
Cytoflow Documentation


Release 1.2+7.g290af88.dirty

Brian Teague

Apr 07, 2022

CONTENTS

| | | |
|----------|-----------------------------------|------------|
| 1 | How is Cytoflow different? | 3 |
| 2 | Getting Started | 5 |
| 3 | Documentation | 7 |
| 4 | For Developers | 9 |
| 5 | For Contributors | 11 |
| 5.1 | User manual | 11 |
| 5.2 | Developer Manual | 216 |
| | Python Module Index | 583 |
| | Index | 587 |

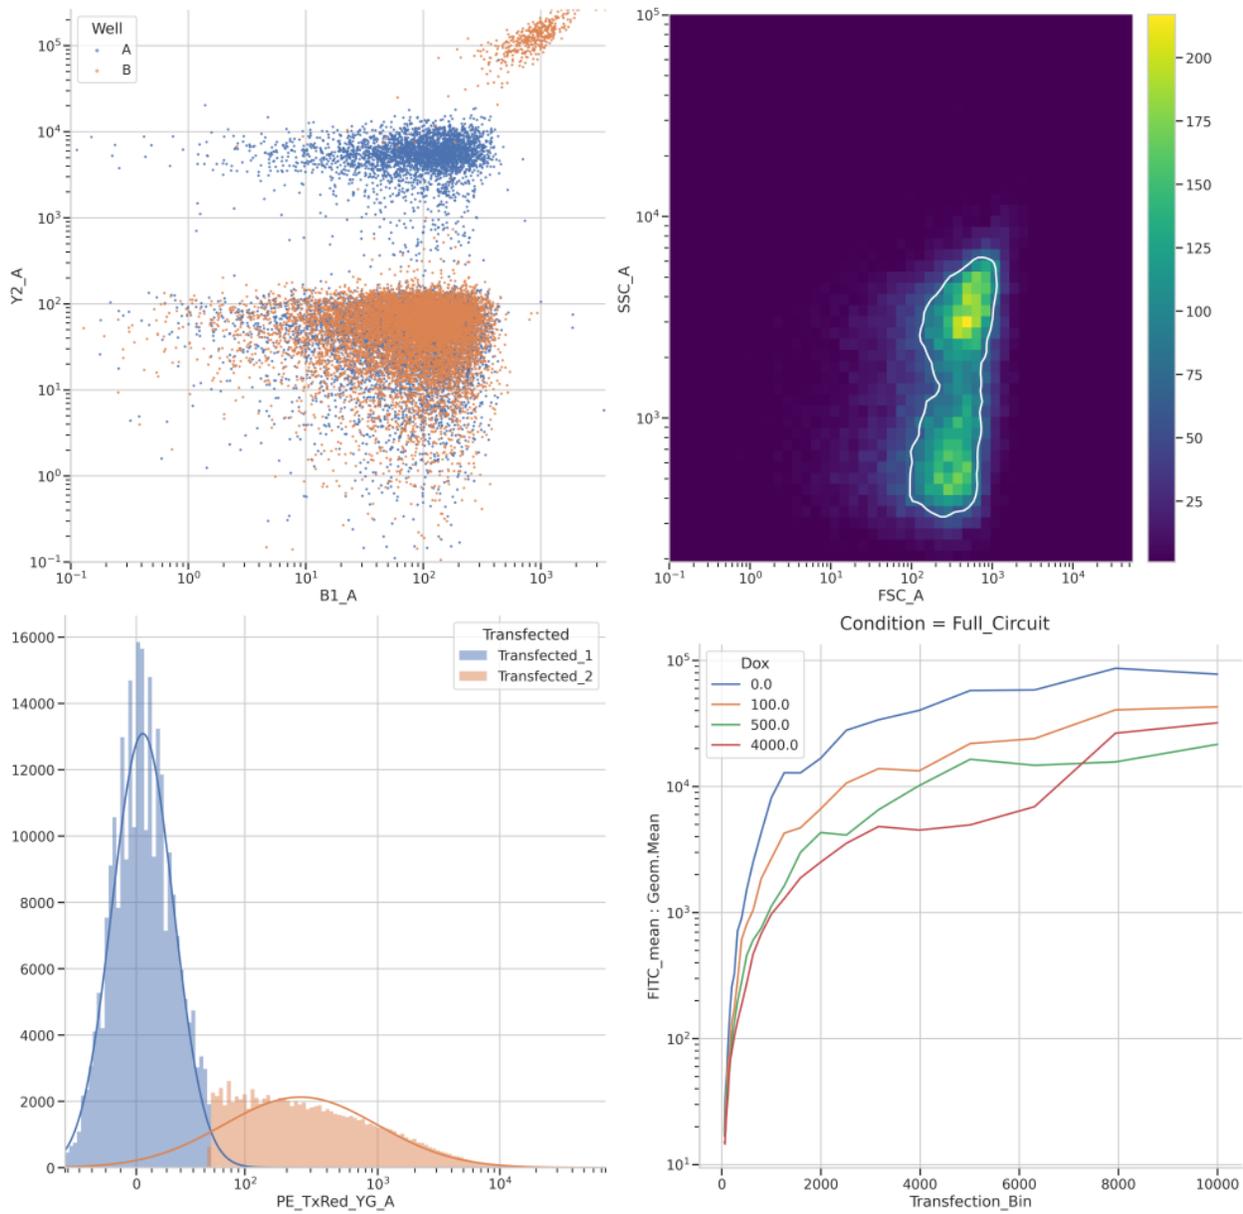

Cytoflow is a **point-and click program** and a **Python library** for analyzing flow cytometry data. It was written by Brian Teague to address shortcomings in currently-available flow software.

HOW IS CYTOFLOW DIFFERENT?

- An emphasis on **metadata**. Cytoflow assumes you are measuring the fluorescence of several samples that were treated differently: collected at different times, treated with varying levels of a chemical, etc. You specify these sample conditions up front, then use those conditions to control your analysis.
- The analysis is represented as a **workflow**. Operations such as gating and compensation are applied sequentially; a workflow can be saved a re-used or shared with colleagues.
- **Good visualization**. Make publication-ready plots right from the software.
- **Thoughtful documentation**. Each module, operation and visualization is documented, and particular attention has been paid to getting users up-and-running quickly.
- Cytoflow is built on **Python modules** that you can use in your own workflows. The library was designed to work particularly well in a [Jupyter notebook](#).
- Cytoflow is **free and open-source**. Contribute bug reports at the [GitHub project page](#) or download the source code to modify it for your own needs. Then, contribute your changes back so the rest of the community can benefit from them.

If you'd like to see Cytoflow in action, here are some [screenshots](#), or you can check out a [screencast on Youtube](#).

GETTING STARTED

Quick installation instructions for the point-and-click program:

- **Windows:** [Download the installer](#), then run it.
- **MacOS (10.10+):** [Download the ZIP file](#). Unzip the file, then double-click to run the program. Depending on your security settings, you may have to specifically enable this program (it's not signed.)
- **Linux:** [Download the tarball](#). Extract it, then run the *cytoflow* binary.

More detailed installation instructions *can be found in the user's manual*.

DOCUMENTATION

The *user manual* is broken into four different sets of documentation:

- *Tutorials* take you step-by-step through some basic analyses. Start here if you're new to Cytoflow.
- *How-to guides* are recipes. They guide you through some common use-cases. They are more advanced than tutorials and assume some knowledge of how Cytoflow works.
- *User guides* discuss how Cytoflow works “under the hood”, which can make you a better Cytoflow user for more advanced or non-standard analyses.
- *Reference pages* document every operation and view. These are the same pages that are displayed in Cytoflow's “Help” panel.

FOR DEVELOPERS

If you want to use [Python](#) to analyze flow cytometry data, then Cytoflow is for you! I've found Cytoflow useful for both *interactive data exploration* (ie, poking data to see what it's telling you) and *automated data analysis* (ie, writing scripts and pipelines to process lots of data.)

To get a taste of what Cytoflow can do, check out an [example Jupyter notebook](#).

Then, head over to the [developers' manual](#). There, you'll find:

- [Tutorial Jupyter notebooks](#) to get you started writing your own analyses.
- [In-depth examples](#) that demonstrate more advanced usage.
- [How-to guides](#) to help you with common tasks.
- [Developer's guides](#) to help you understand how Cytoflow is structured (particularly useful for writing your own modules.)
- An [API reference](#), documenting all the user-facing classes, operations and views.

FOR CONTRIBUTORS

Hooray! We'd love to have you.

The [Cytoflow source code](#) is hosted over at [GitHub](#). Feel free to report bugs, request enhancements, fork the codebase and start hacking. Also, check out the *Developers' guides* for an overview and justification of Cytoflow's design, as well as useful information for writing your own modules, operations and views.

5.1 User manual

Note: If there's something you'd like to do that isn't well-explained by the user manual, please [file an issue on GitHub](#).

The **User Manual** is divided into four sections:

1. *Tutorials* are step-by-step examples to get you started using Cytoflow. They include both some basic tutorials as well as examples of some more advanced analyses.

5.1.1 Tutorial: Quickstart


Welcome to Cytoflow! This document will demonstrate importing some data and running a very basic analysis using the GUI. It should help you get started with the following steps:

- Importing data
- Basic visualizations
- Gating
- Summary statistics


If you'd like to follow along, you can do so by downloading one of the `cytoflow-####-examples-basic.zip` files from the [Cytoflow releases](#) page on GitHub.

Importing data


Start the software. The left panel is the “workflow” panel, and upon startup has a single operation named **Import Data**. Click *Set up experiment...*

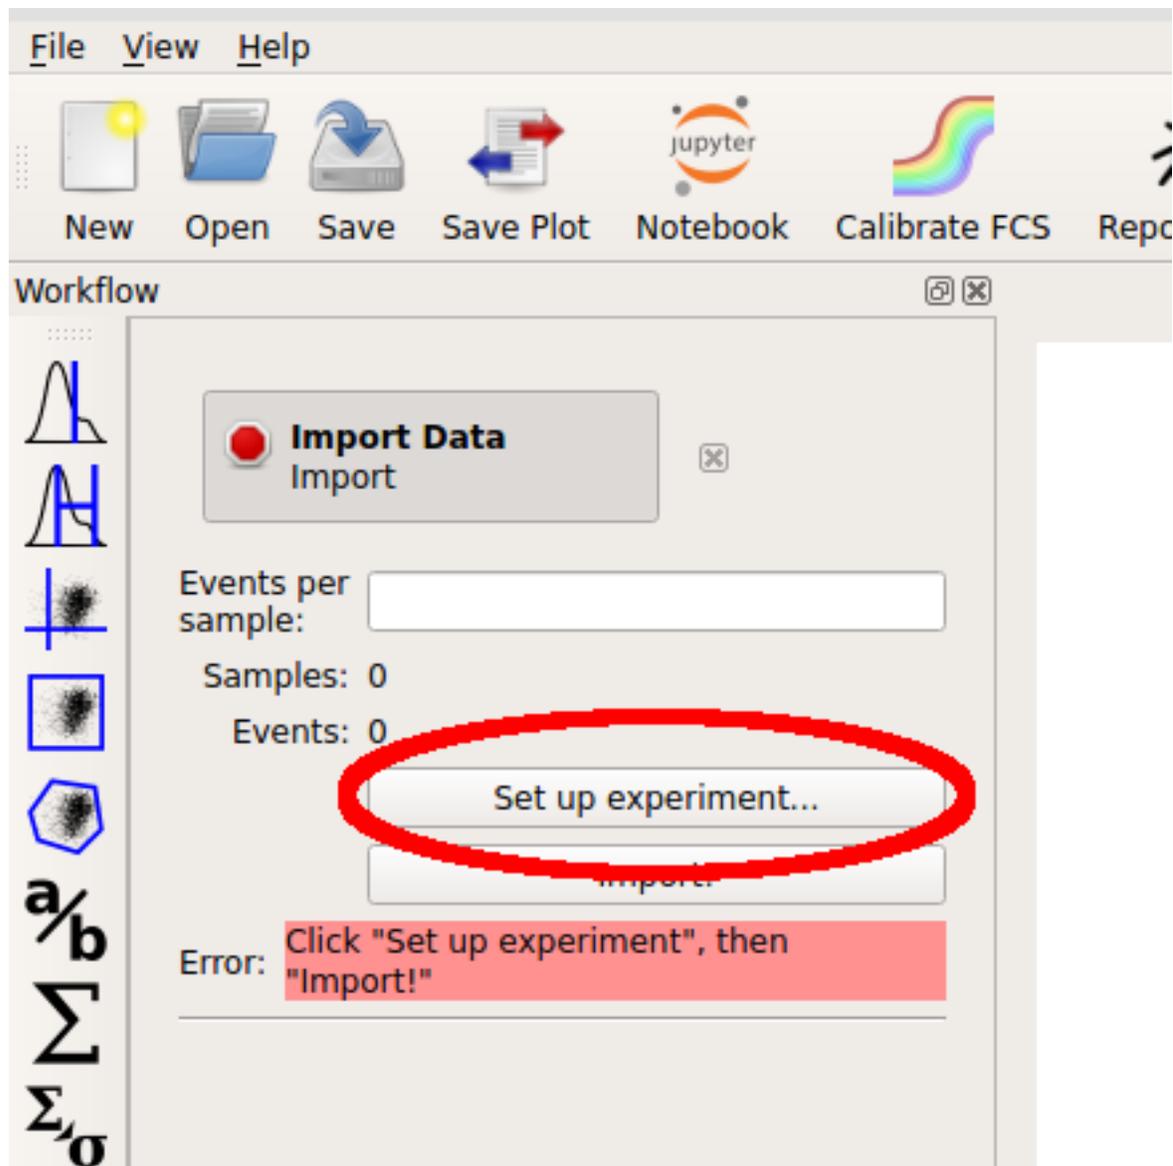

In the **Experiment Setup** dialog that appears, click *Add tubes...*

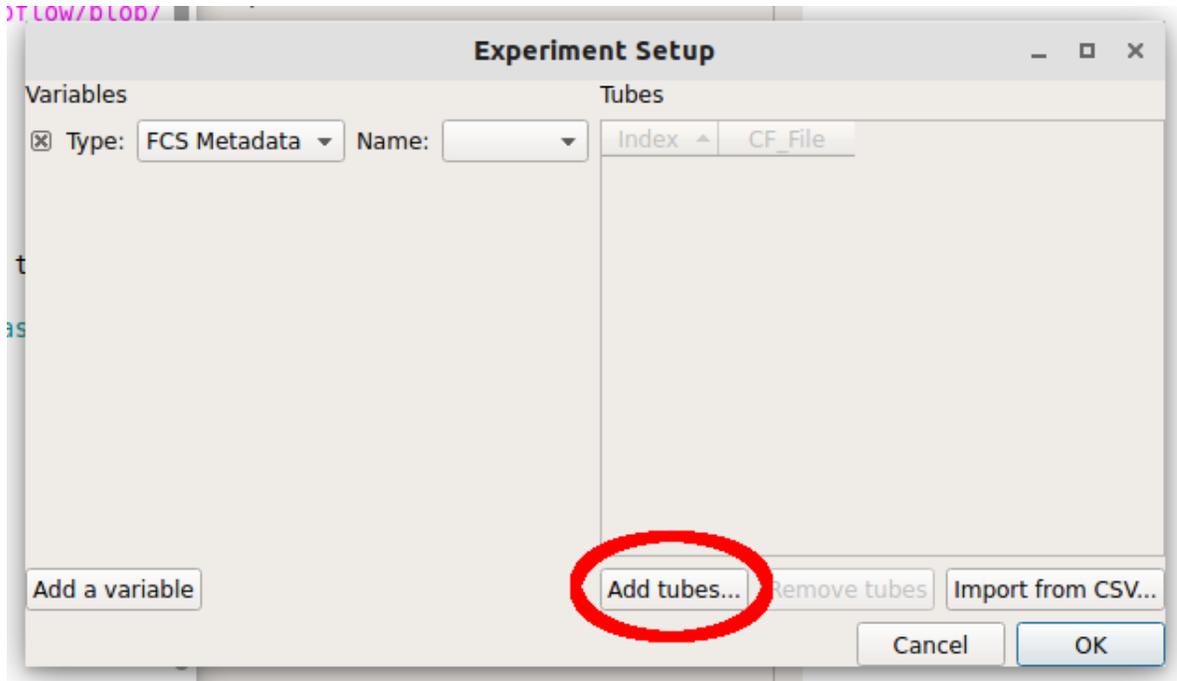


Choose *CFP_Well_A4.fcs* and *RFP_Well_A3.fcs*. You can select multiple files by holding down the *Control* key (Windows or Linux) or the *Command* key (Mac) while clicking on the files.

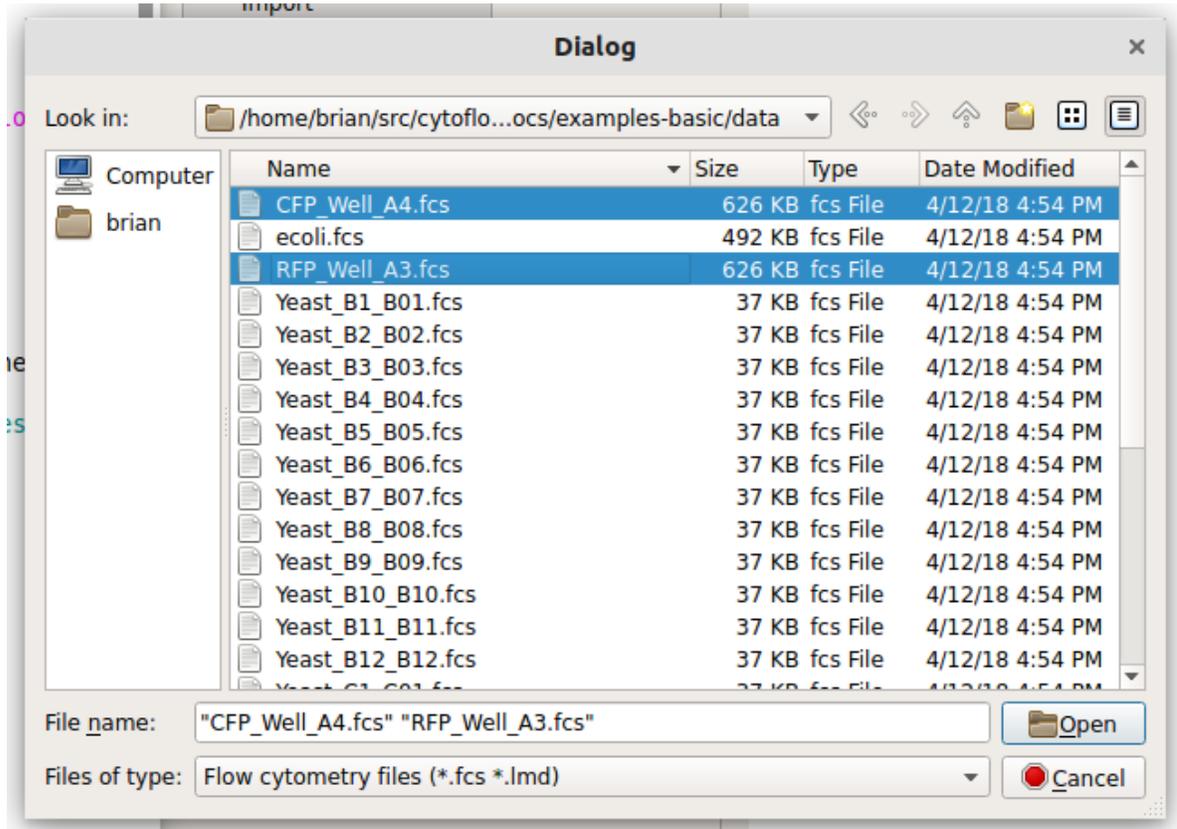


Each file is now a row in the *Tubes* table. Cytoflow assumes that your FCS files were all collected under the same instrument settings (voltages, etc) but have varying experimental conditions (ie your independent variables.) We

now have to tell Cytoflow what those conditions are for each tube. Click *Add a variable*.

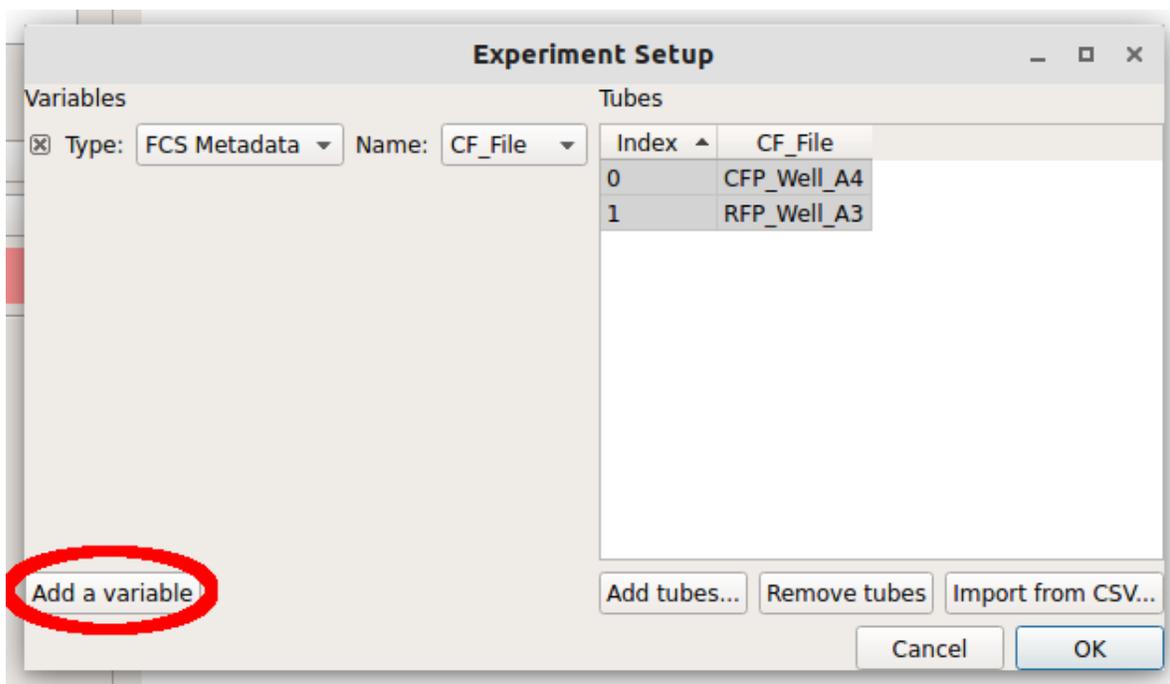


We can make a new variable that is a *Category*, a *Number* or *True/False* (ie a boolean.) Since these two tubes were exposed to different amounts of the small molecule *doxycycline*, pull down the “Type” selector and choose *Number*.

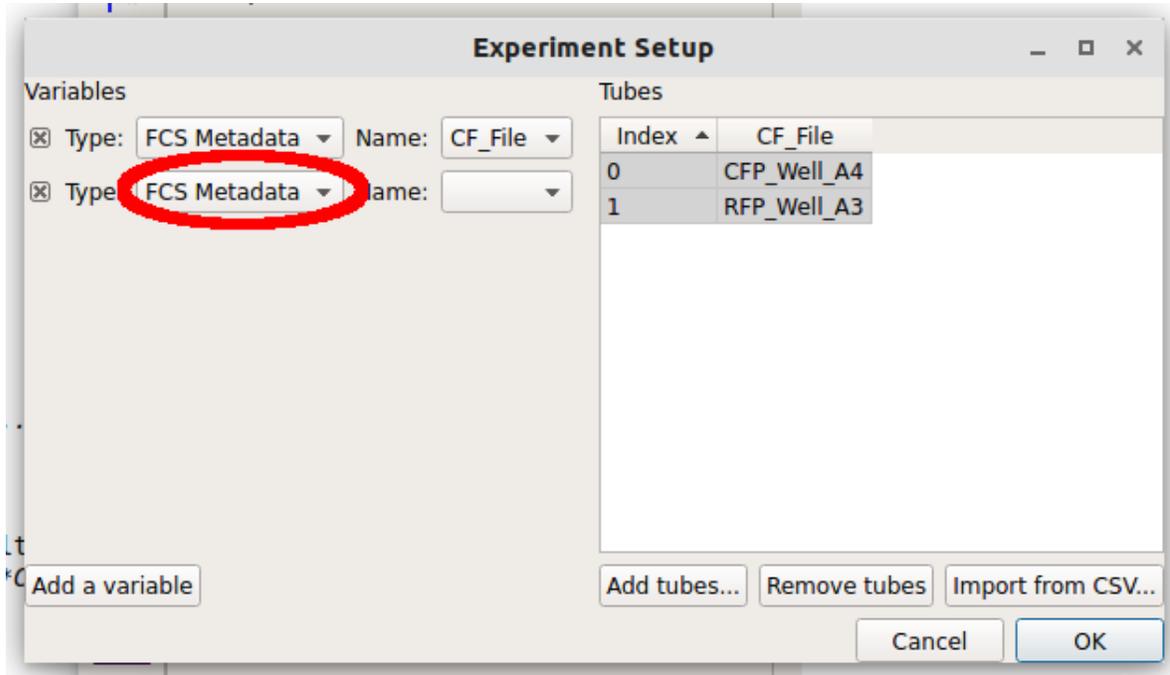


Note: If you have an experimental variable saved as metadata in your FCS file, see the *Frequently Asked Questions*.


Type the name “Dox” into the *Name* box. Notice how there’s now a new column named “Dox” in the *Tubes* table.

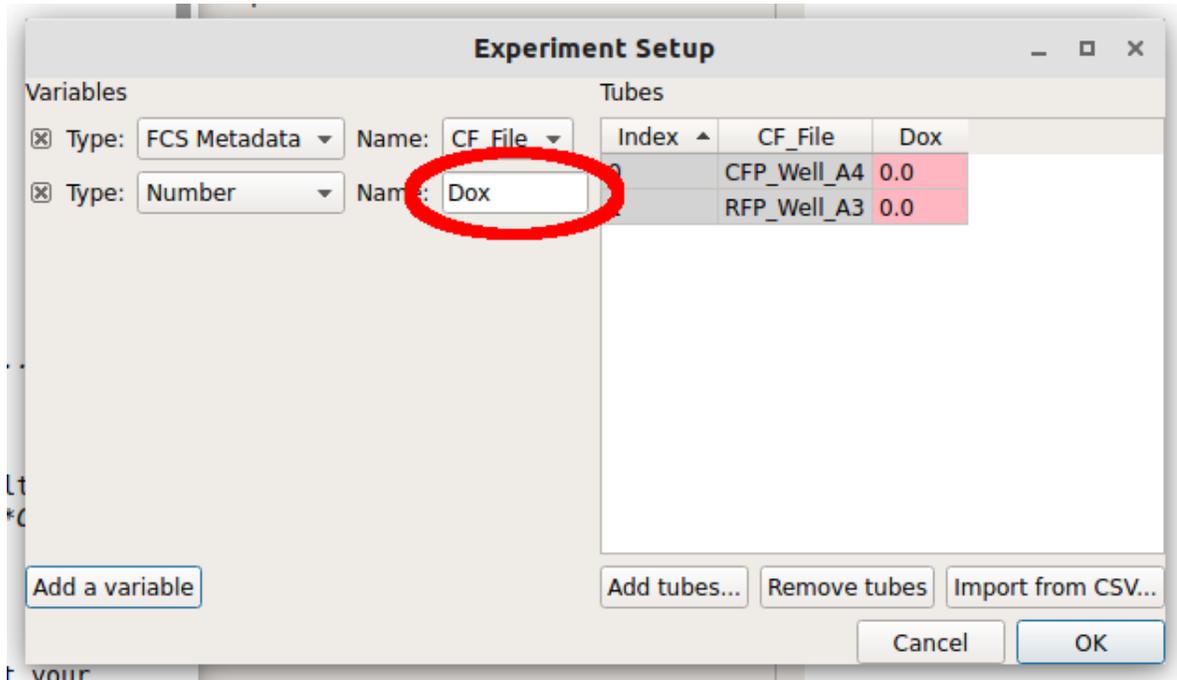


Note how the new column is red. Each tube must have a *unique set of conditions* to import the data – any tube that shares conditions with another tube is labeled red like this. Type “1.0” into the “Dox” column for the first row (CFP_Well_A4) and “10.0” into the “Dox” column for the second row (RFP_Well_A3). Notice how all the cells are white.

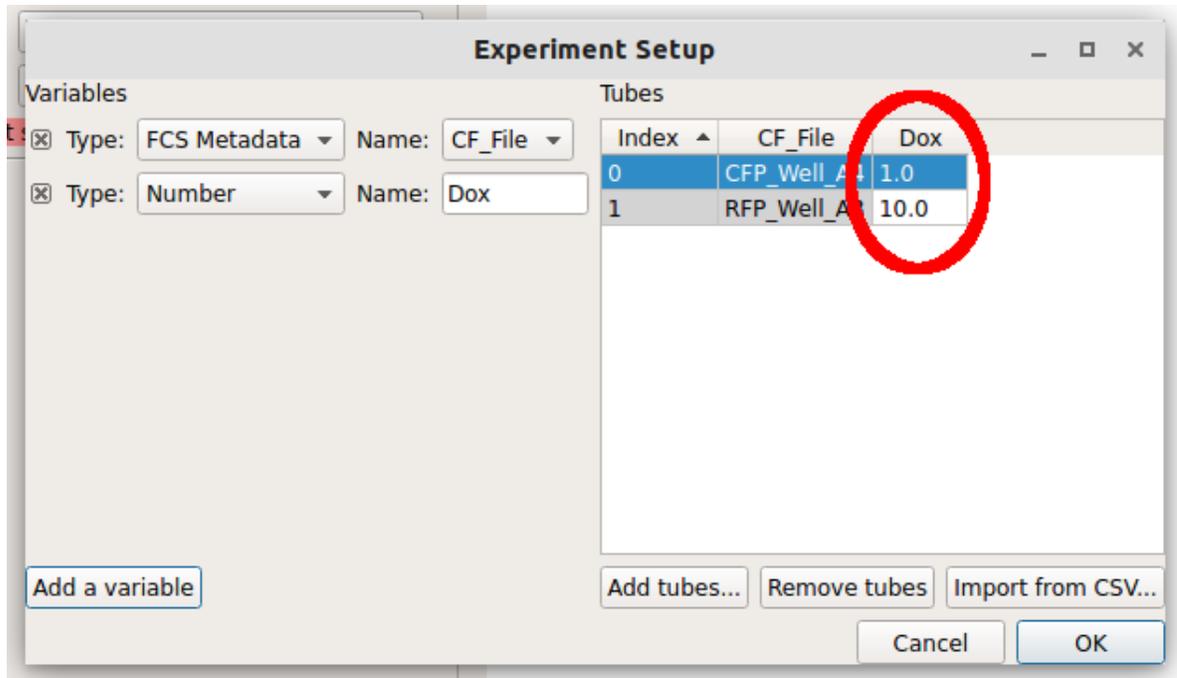


Click “OK” to return to the main screen.

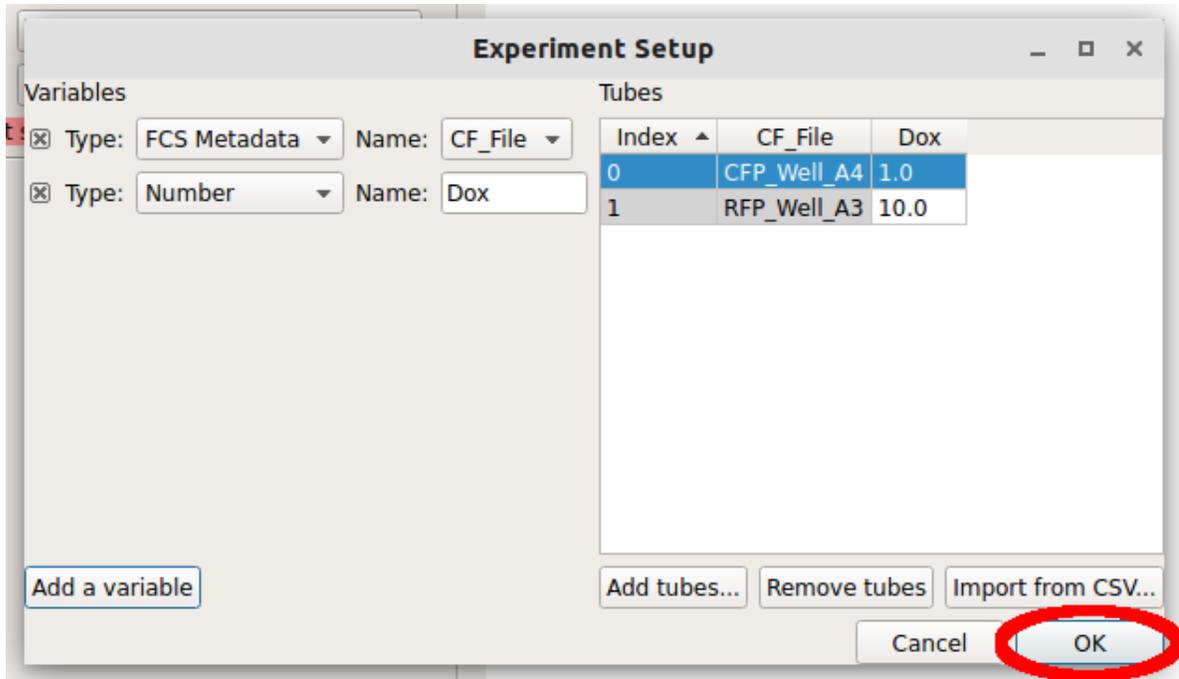


Now, all the channels in those files show up in the Import dialog. You can rename the channels if you'd like, or remove channels that you're not using, but we won't worry about that here. Click "Import!" to import the data. Note that the red stop-sign on the module header changes to a green check-mark to show that the operation succeeded.

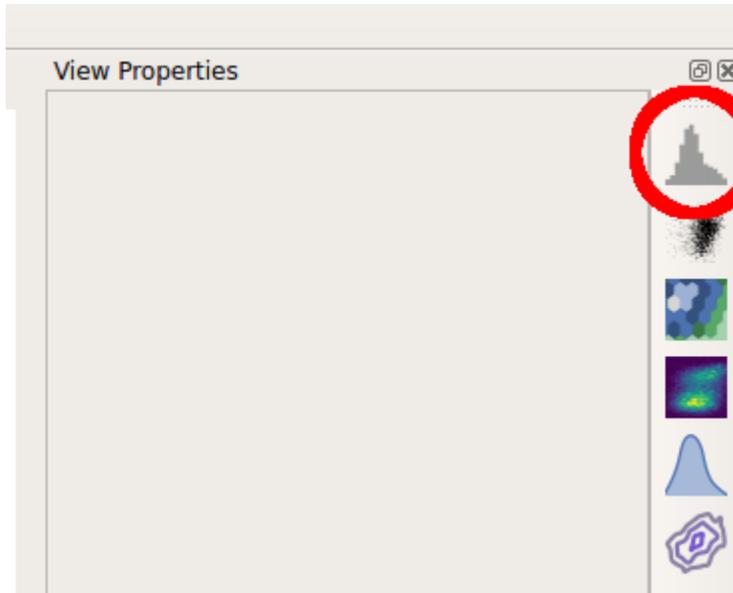

The controls in the right panel are the view parameters. We won't get a plot until we choose a channel to view. Pull down the *Channel* selector and choose "Y2_A".

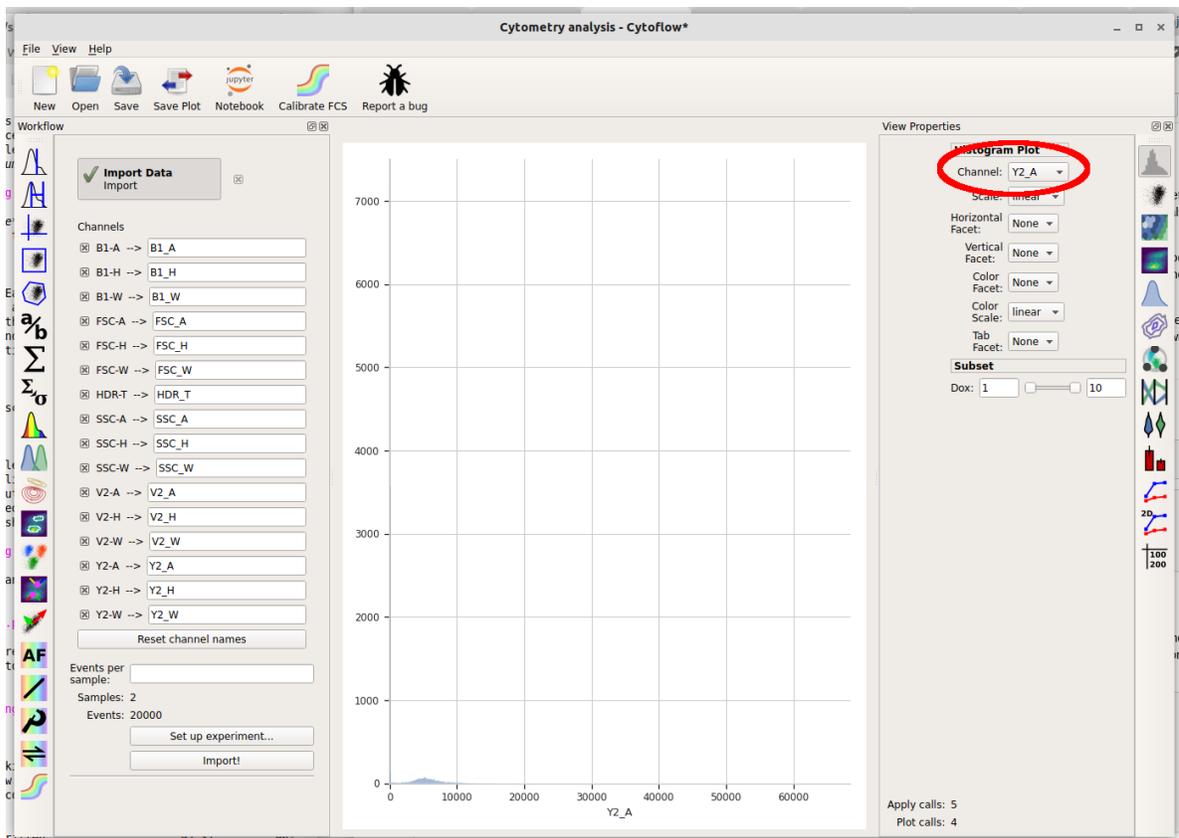


Cytoflow immediately displays a plot. Unfortunately, most of the data in this channel is clustered around 0, which makes it difficult to see using a linear scale (the default.) We can use a different scale by selecting the "Scale" option – choose "logicle" instead.

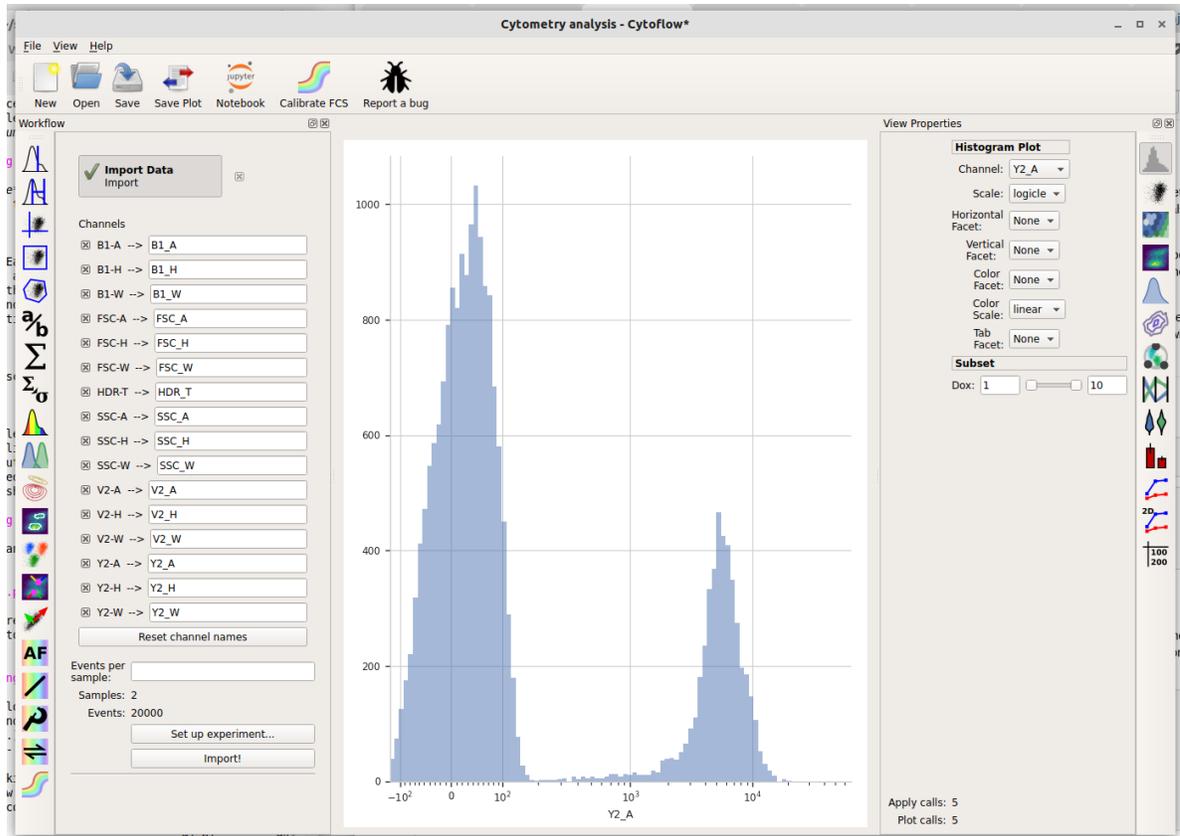


The *logicle* scale is interesting – it’s linear around 0 and logarithmic elsewhere, and we can immediately see that this data is bimodal.

But wait – which tube are we looking at? Here we encounter one of the central principles of Cytoflow: **by default, we’re looking at the entire data set.** This data comes from both tubes, not just one. We can tell Cytoflow to make a separate plot for each Dox concentration by changing the *Vertical facet* option to “Dox”.

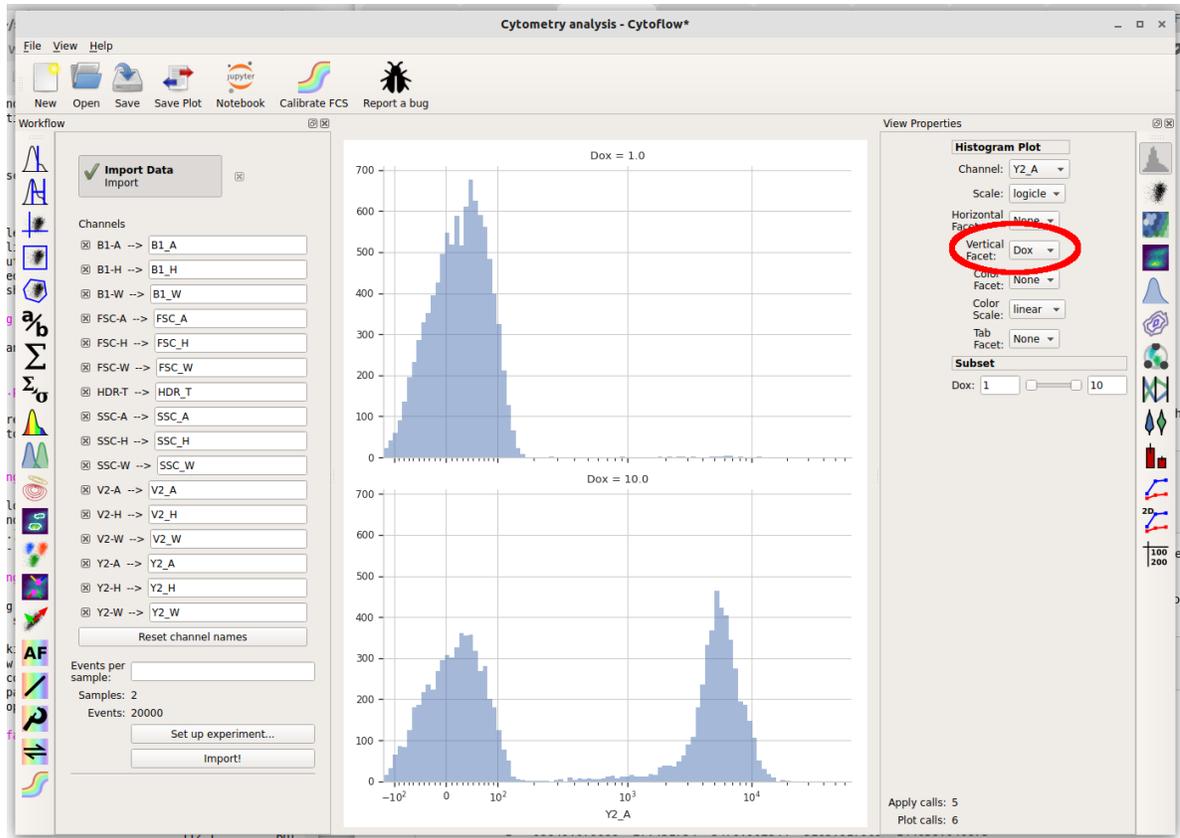


We can also plot the two different Dox concentrations on the same plot using different colors by setting *Color Facet* to “Dox” instead. Note that **you must change Vertical Facet back to “None”** as well.

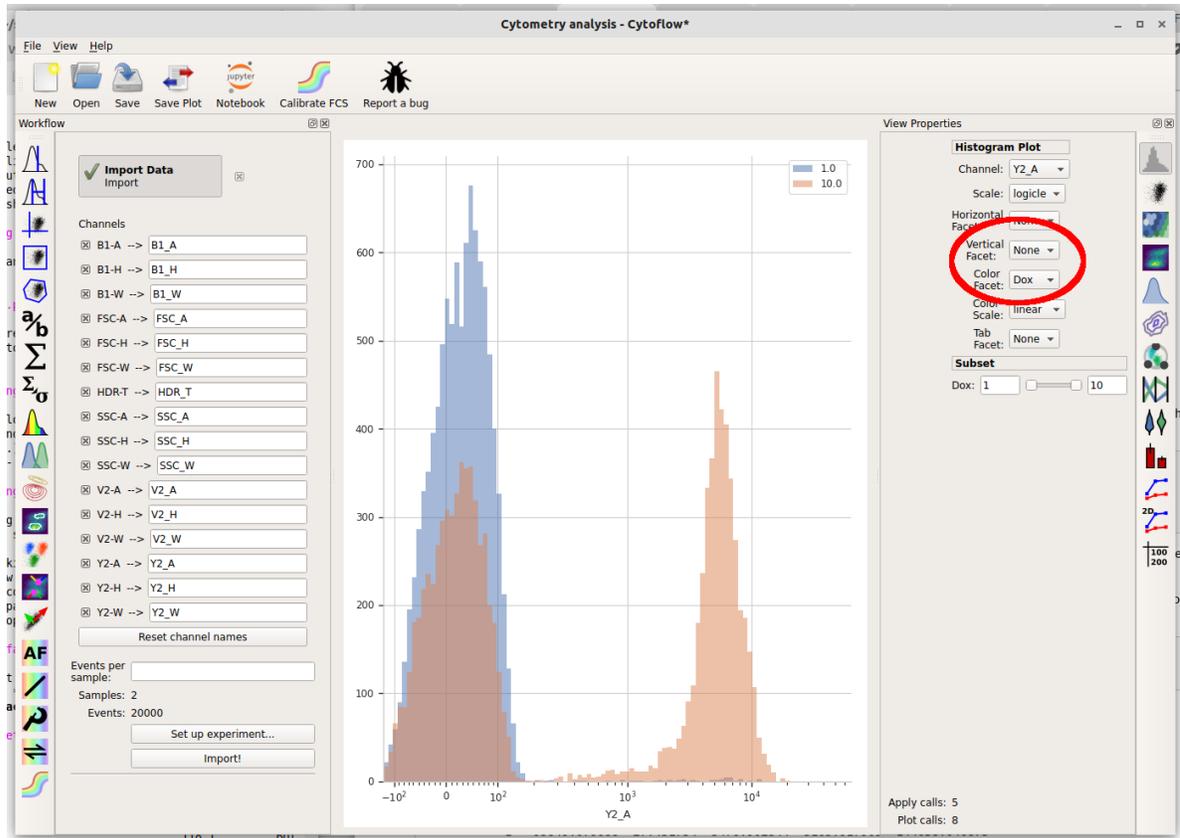


Basic gating


So there's a clear difference between the two tubes: one has a substantial population above ~200 in the Y2-A channel and the other doesn't. What is the proportion of "high" cell in each tube? To count these two populations, we first have to use a gate to separate them. Let's use a threshold gate. First, make one by choosing the threshold gate on the operations toolbar:

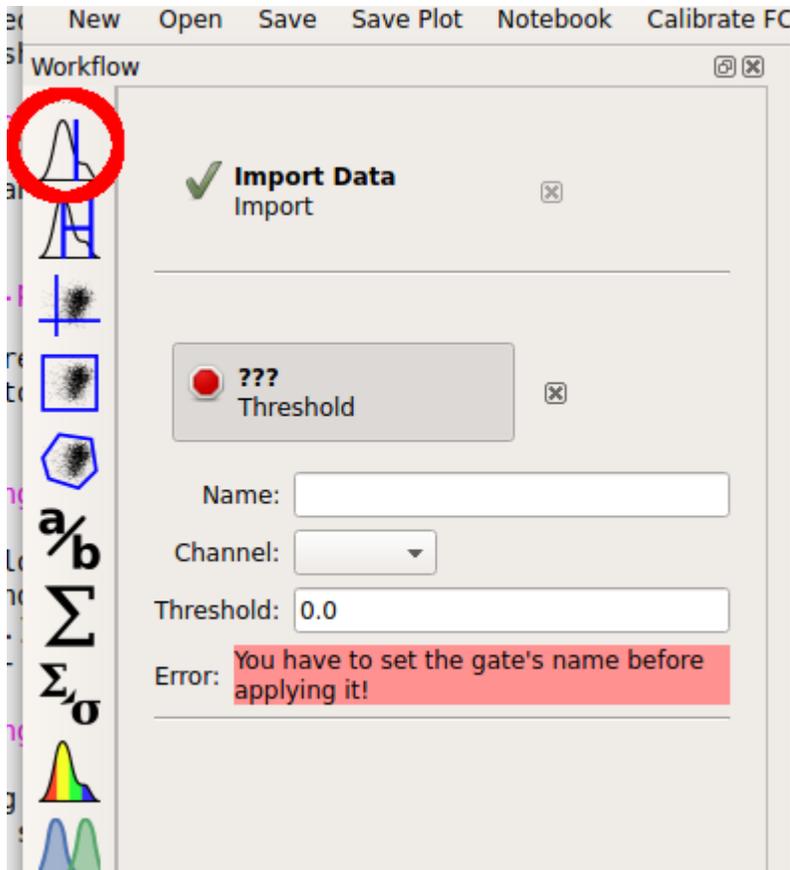

Then, set the operation's name to "T" and the channel to "Y2-A". Note that when you set the channel, a plot appears in the central pane. It's on a linear scale again – change it to "logicle" on the plot options pane.

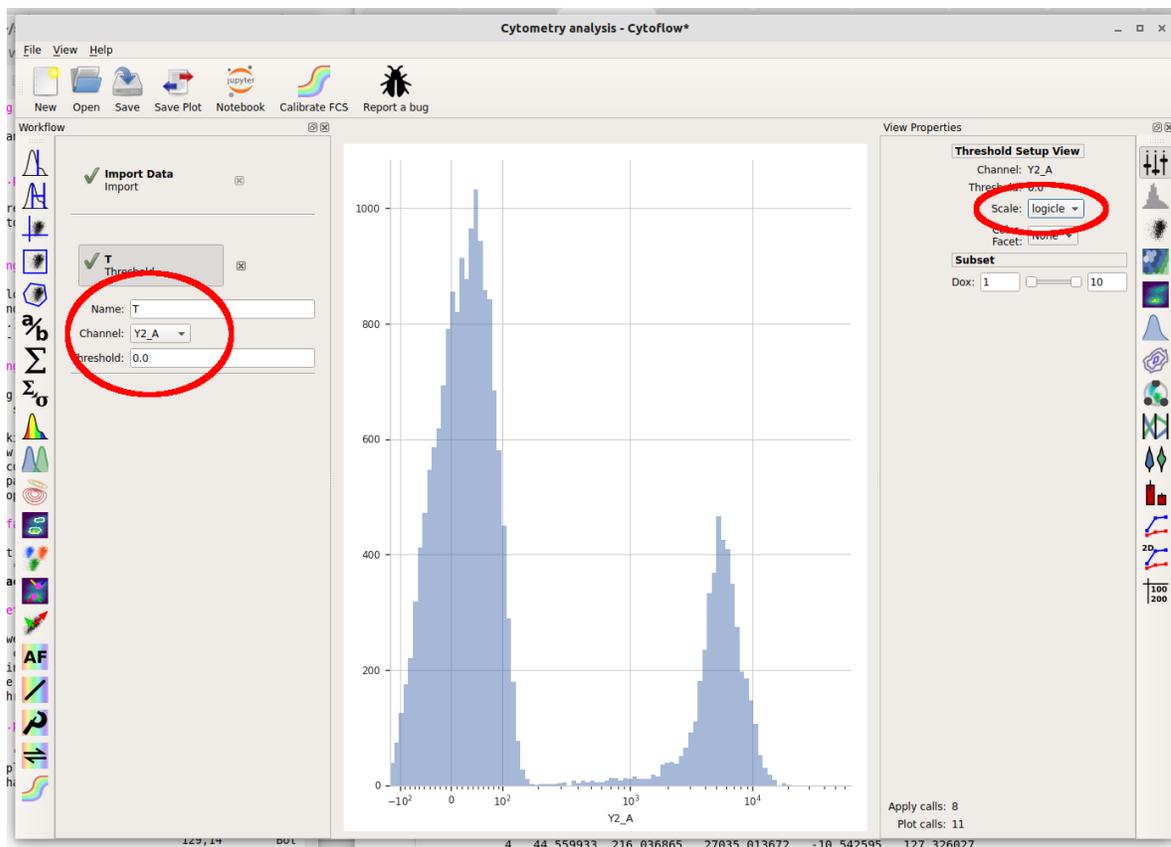


Note that when you move your mouse across the center pane, you now get a blue cursor that follows it. You can set the threshold by clicking on the pane. Choose a value about 200 (ie, one tic above the 10^2 major label.)

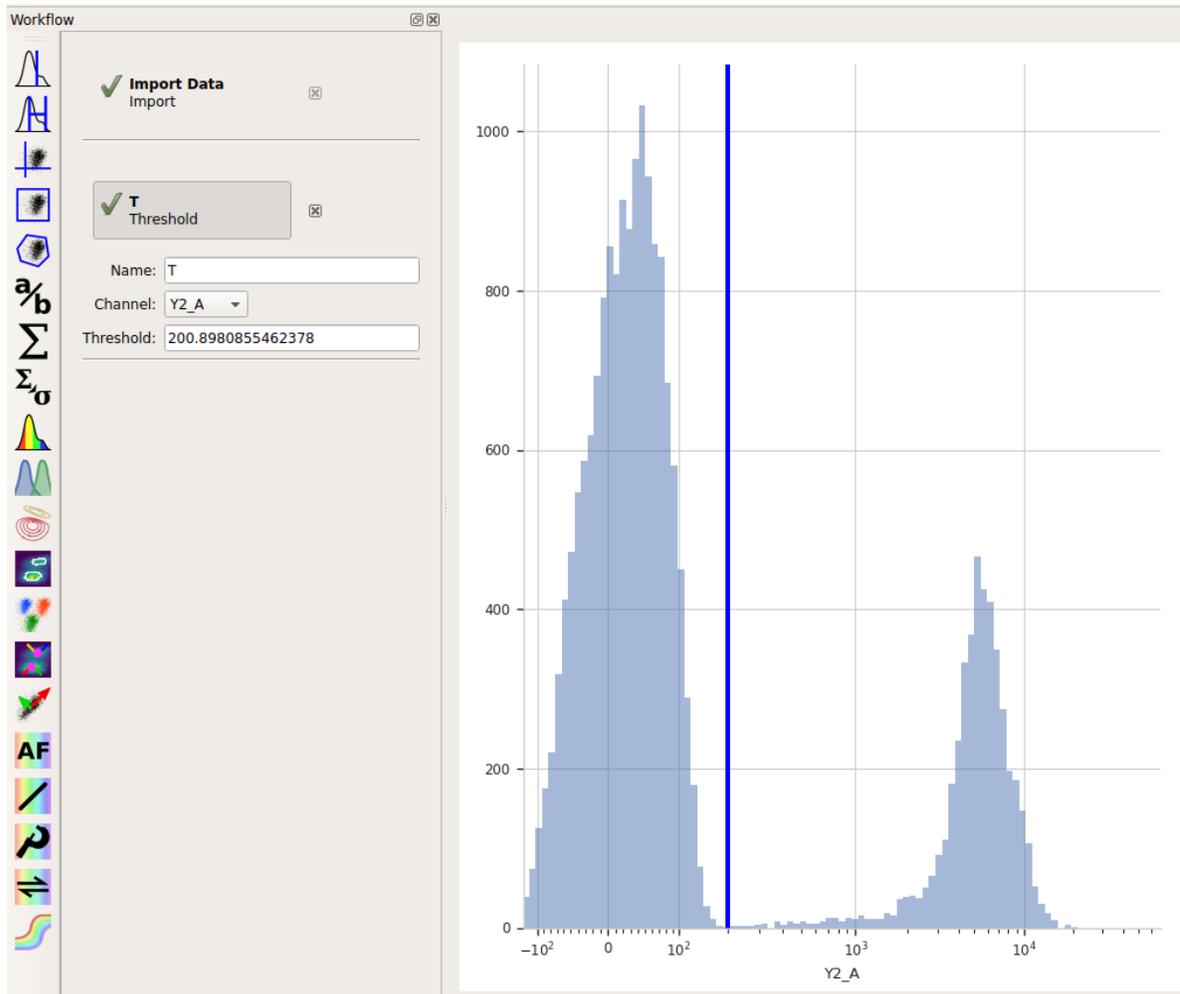

When you created a new Threshold gate, you added a new condition to the data set. This condition is *exactly like the "Dox" condition you set up when you imported your data*. That is, now there are some events that are Dox = 1 and T = True, some events that are Dox = 1 and T = False, some events that are Dox = 10 and T = True, and some events that are Dox = 10 and T = False.

You can get a good feel for this if you make a new Histogram. Set the histogram parameters as follows:


- Channel = "Y2_A"
- Scale = "logicle"
- Vertical Facet = "Dox"
- Color Facet = "T"

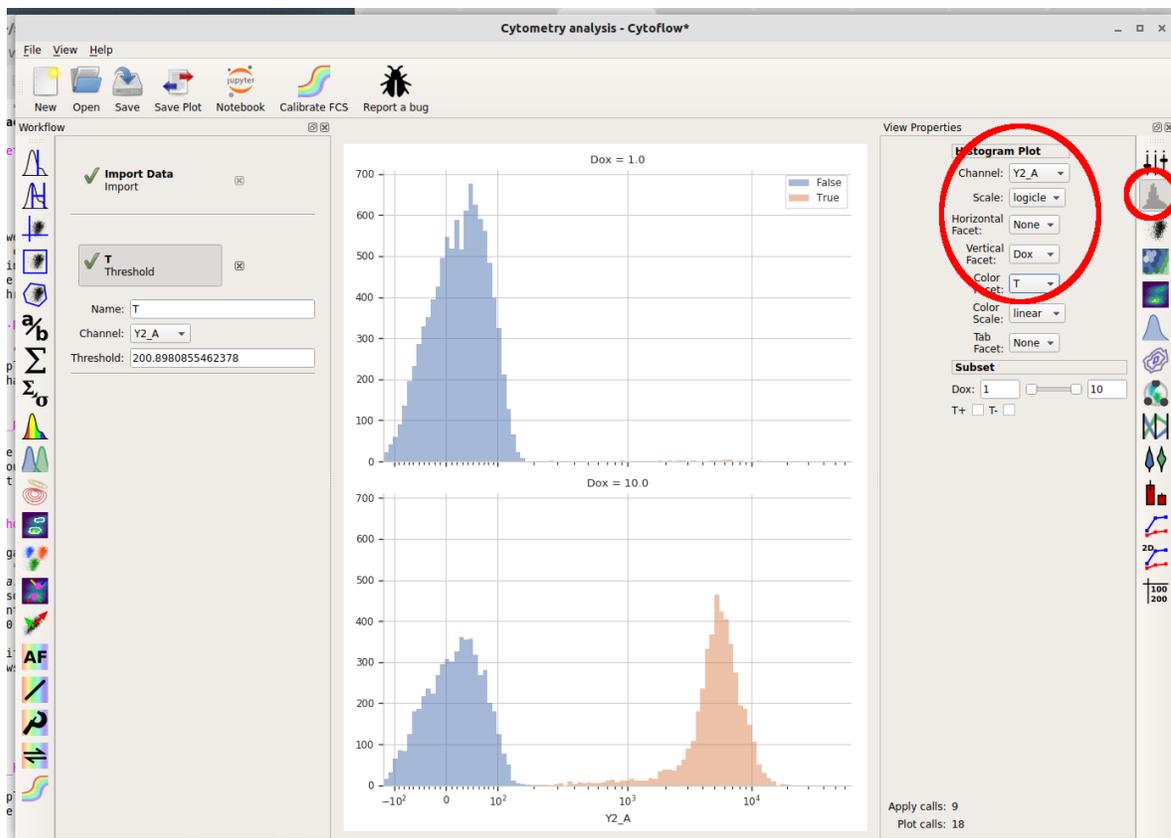


What are we looking at? The two plots, top and bottom, represent the different Dox amounts (look at the titles!) Each is showing the “high” and “low” populations we identified with the Threshold gate in different colors. Play around with the different facets until you are comfortable with what does what. Also poke at the “subset” controls. (Don’t worry, you won’t break anything!)

Basic statistics

Cytoflow’s reason for existing is to let you do quantitative flow cytometry. So lets quantitate those populations – how many events are in each of them? Once you’ve identified populations, Cytoflow lets you compute a number of *summary statistics* about each population, then graph statistics. To create a new statistic, choose the large “sigma” button on the operations toolbar, which creates a new Channel Statistic operation.

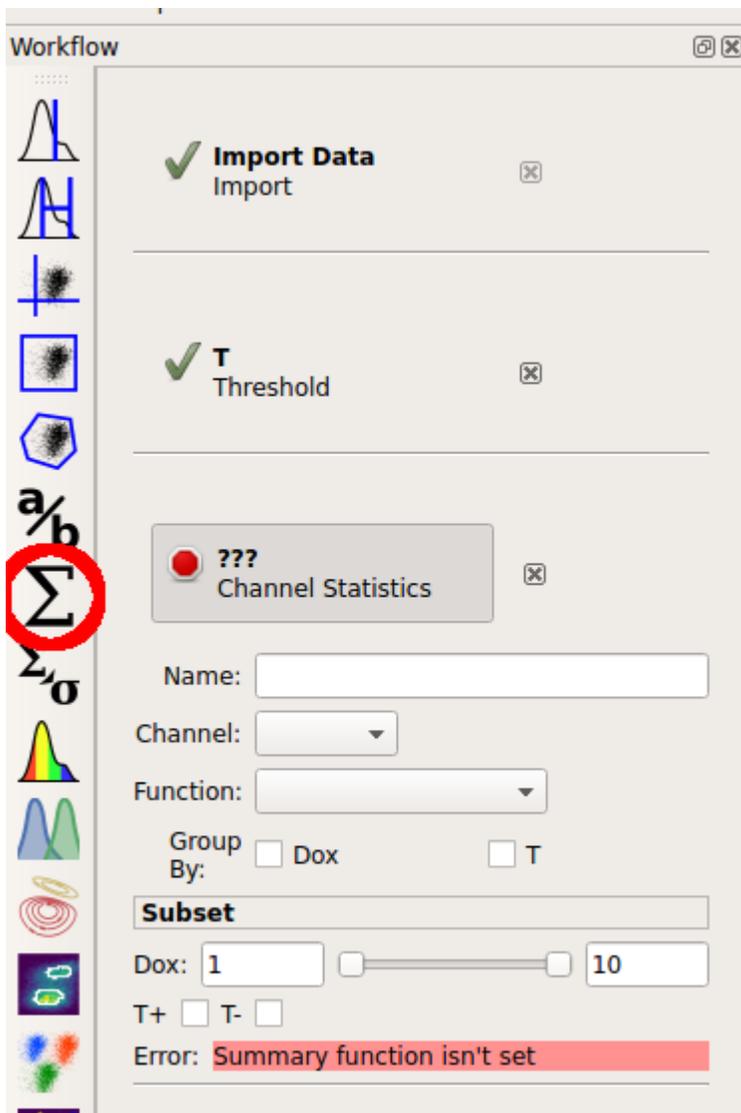

Set the name of the new statistic to “Count”. Choose the “Y2_A” channel, and set the “Function” to “Count”. Under “Group by”, check *both* the “Dox” and “T” tic boxes.

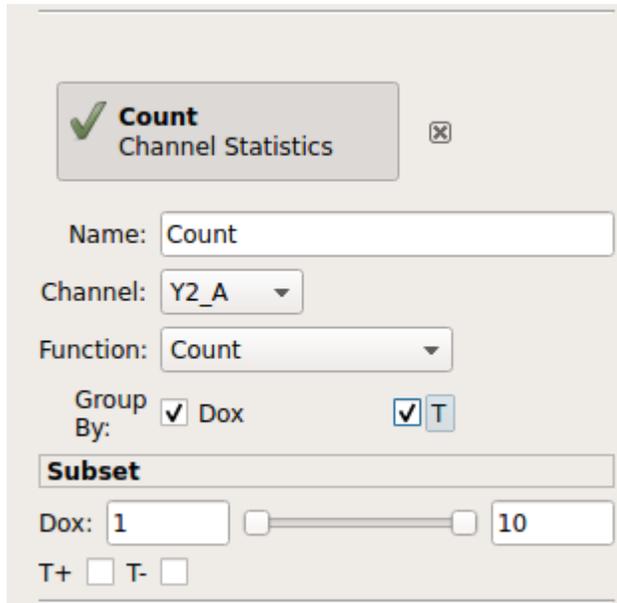

Count Channel Statistics

Name: Count

Channel: Y2_A

Function: Count

Group By: Dox T

Subset

Dox: 1 10


T+ T-

The “Group by” settings are particularly important. You’re telling Cytoflow *which groups you want to compute the function on*. Cytoflow will break your data set up into unique combinations of all of these variables (which could be experimental conditions, like “Dox”, or gates, like “T”, or other subsets from other operations) and compute the function for each unique subset. So, what we’ve asked Cytoflow to do is break the data into four subsets:

- Dox = 1 and T = True
- Dox = 1 and T = False
- Dox = 10 and T = True
- Dox = 10 and T = False

and then compute the “Count” function on each subset.

Finally, let’s plot that summary statistic. Choose the bar plot from the Views toolbar:

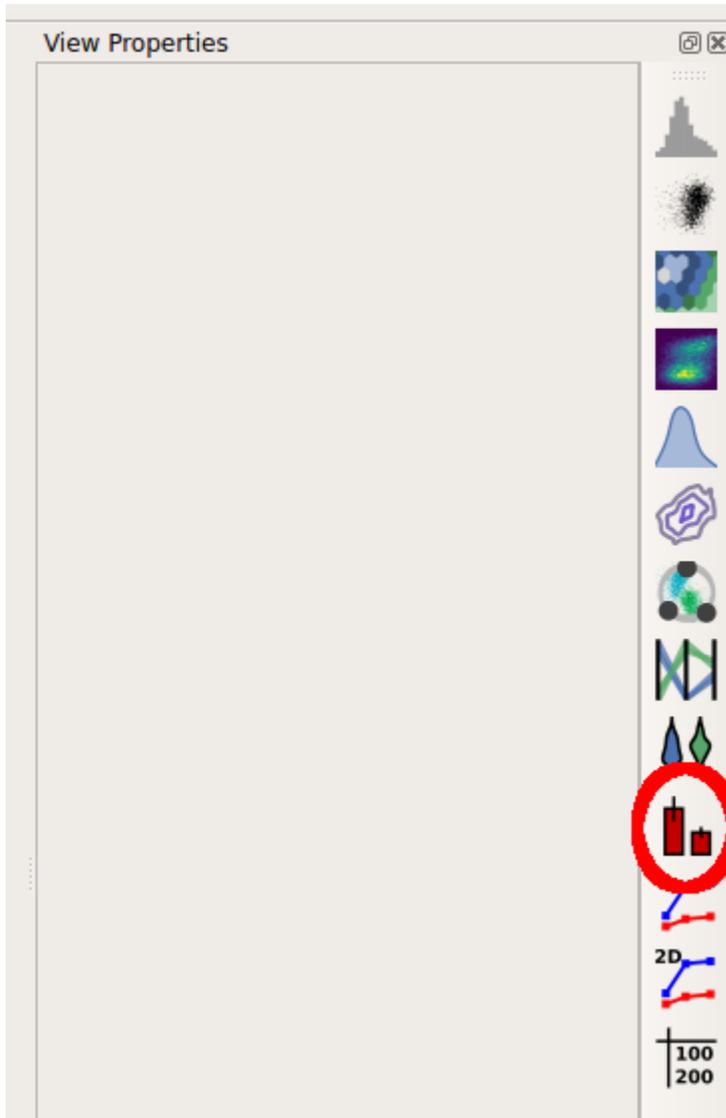


Set the view parameters as follows:

- Statistic = ('Count', 'Count')

Note: the new statistic is called ('Count', 'Count') because the channel statistic operator's *name* was "Count" and the *function* you applied was also named "Count".


- Variable = "Dox"
- Hue Facet = "T"

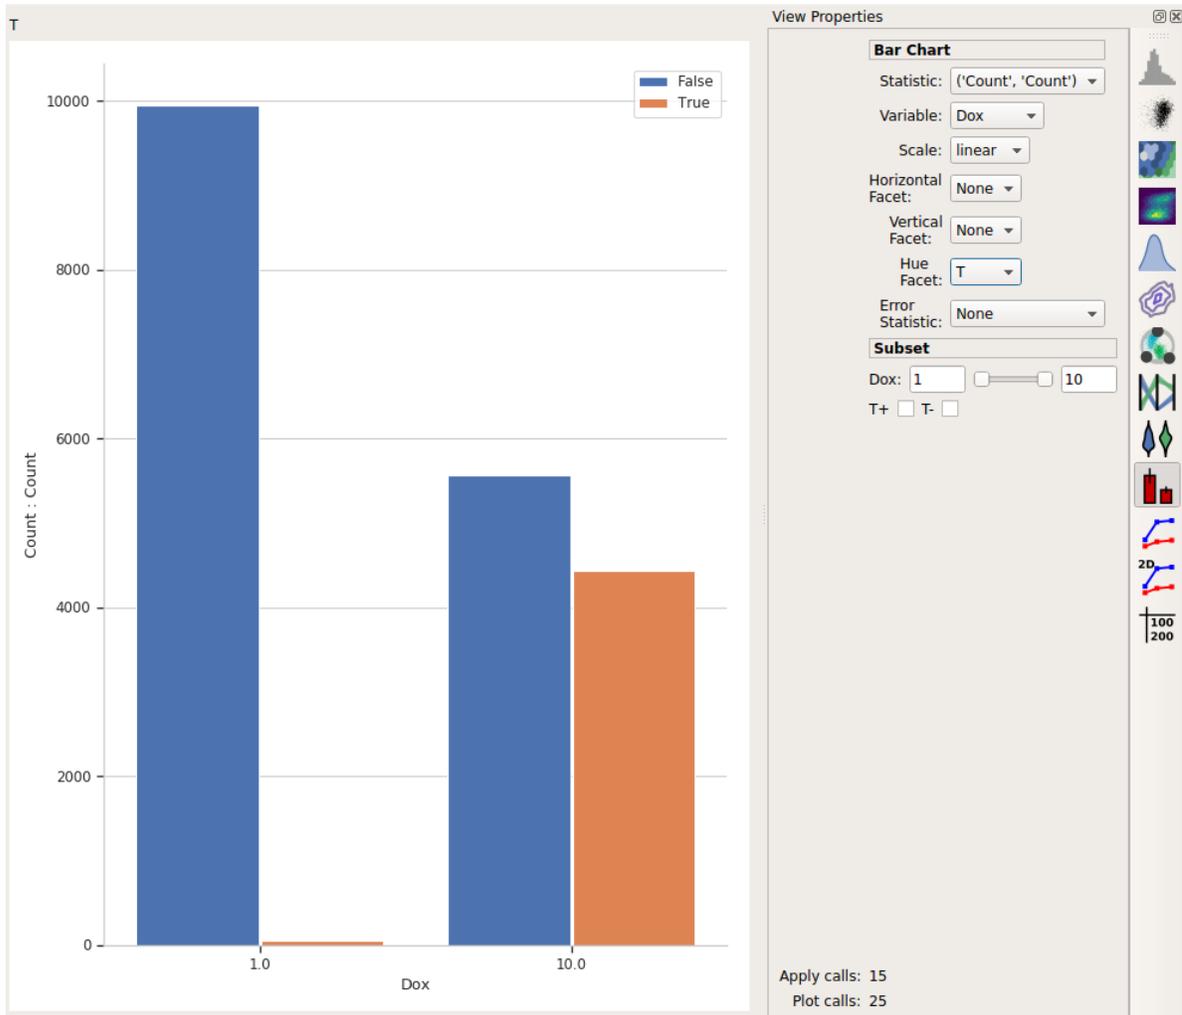


This is the bar plot we wanted: comparing different Dox levels (the two bars on the left vs. the two bars on the right) and how many events were below the threshold (T = False, in blue) vs how many were above it (T = True, in orange.)

Export the plot

I like to think that Cytoflow’s graphics are nice-looking. Possibly nice enough to publish! (Also, if you publish using Cytoflow, please cite it!) To export the plot, choose “Save plot...” from the toolbar at the top.

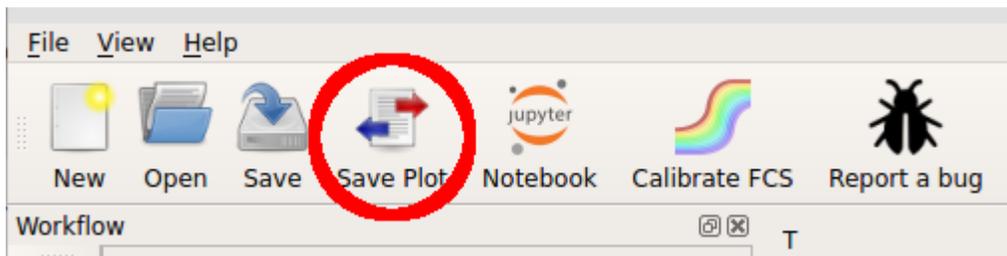

In this dialog, you can set many of the visual parameters for the plot, such as the axis labels and plot title. You can also export the figure with a given size (in inches) and resolution (in dots-per-inch) by clicking “Export figure...”.

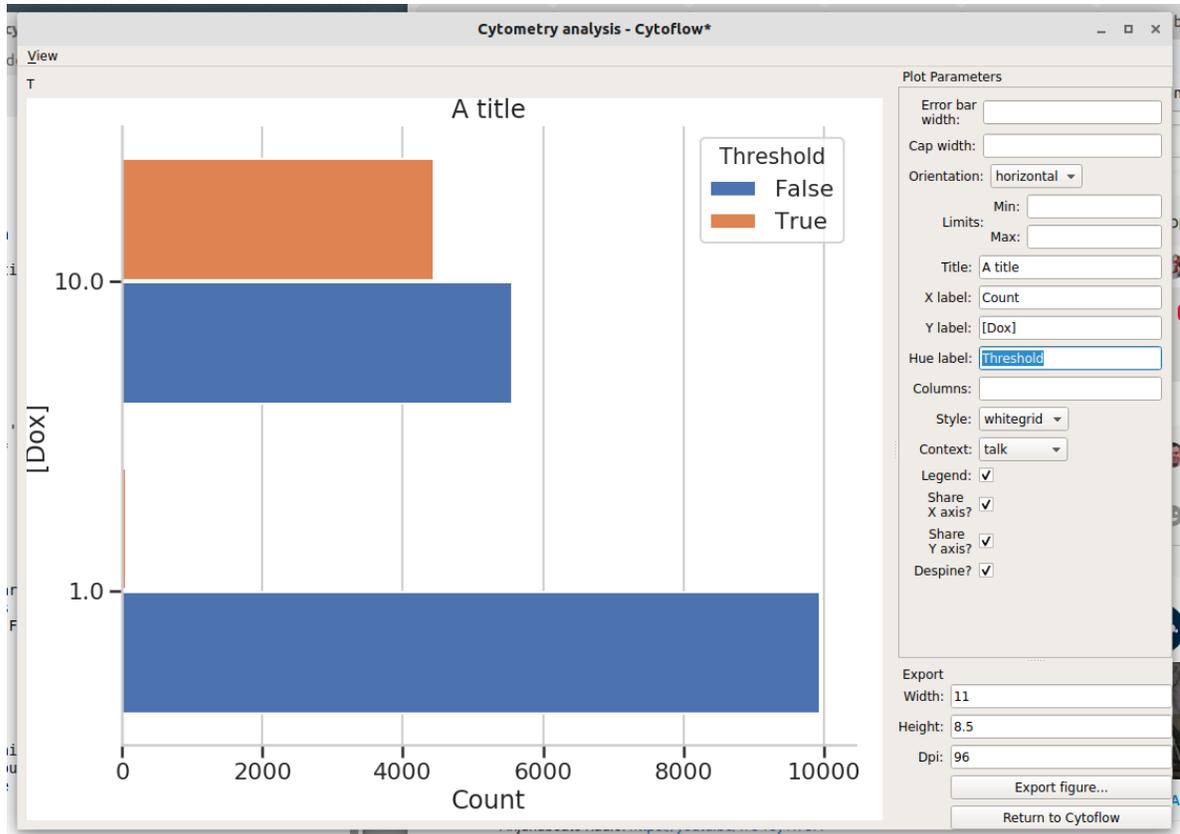

To return to Cytoflow, click “Return to Cytoflow”.

5.1.2 Tutorial: Dose-Response

A common way to use flow cytometry is to analyze a dose-response experiment: cells were treated with increasing doses of some drug or compound, and we want to see how the response changed as we increased the amount of the compound. In this case, I’m treating an engineered yeast line with isopentyladenine, or IP; the yeast cells are engineered with a basic GFP reporter that is expressed in response to IP. We measured GFP fluorescence after 12 hours, at which time we expect the cells to be at steady-state.

(The experiment is described in more detail here: [Chen et al, Nature Biotech 2005](#))

If you’d like to follow along, you can do so by downloading one of the **cytoflow-#####-examples-basic.zip** files from the [Cytoflow releases](#) page on GitHub.

Importing Data

Start Cytoflow. A workflow always starts with an **Import Data** operation; click the **Set up experiment button...**

Remember that we need to tell Cytoflow about the experimental conditions for each sample we’re analysing. In this case, we only have one experimental variable, *IP*.

- Click **Add a variable**
- Change its type to **Number** and its name to **IP**.
- Click **Add tubes...**


- Select all of the tubes whose names start with *Yeast_B1* through *Yeast_C9*.

Note: Remember, you can select multiple files by holding down the *Control* or *Command* key.

- Fill in the experimental values for the **IP** column. I did a serial dilution; use the the table below for reference.

| File | IP |
|-------------------|-------|
| Yeast_B1_B01.fcs | 5.0 |
| Yeast_B2_B02.fcs | 3.7 |
| Yeast_B3_B03.fcs | 2.8 |
| Yeast_B4_B04.fcs | 2.1 |
| Yeast_B5_B05.fcs | 1.5 |
| Yeast_B6_B06.fcs | 1.1 |
| Yeast_B7_B07.fcs | 0.88 |
| Yeast_B8_B08.fcs | 0.66 |
| Yeast_B9_B09.fcs | 0.5 |
| Yeast_B10_B10.fcs | 0.37 |
| Yeast_B11_B11.fcs | 0.28 |
| Yeast_B12_B12.fcs | 0.21 |
| Yeast_C1_C01.fcs | 0.15 |
| Yeast_C2_C02.fcs | 0.11 |
| Yeast_C3_C03.fcs | 0.089 |
| Yeast_C4_C04.fcs | 0.066 |
| Yeast_C5_C05.fcs | 0.05 |
| Yeast_C6_C06.fcs | 0.037 |
| Yeast_C7_C07.fcs | 0.028 |
| Yeast_C8_C08.fcs | 0.021 |
| Yeast_C9_C09.fcs | 0.015 |

At the end, your table should look like this:

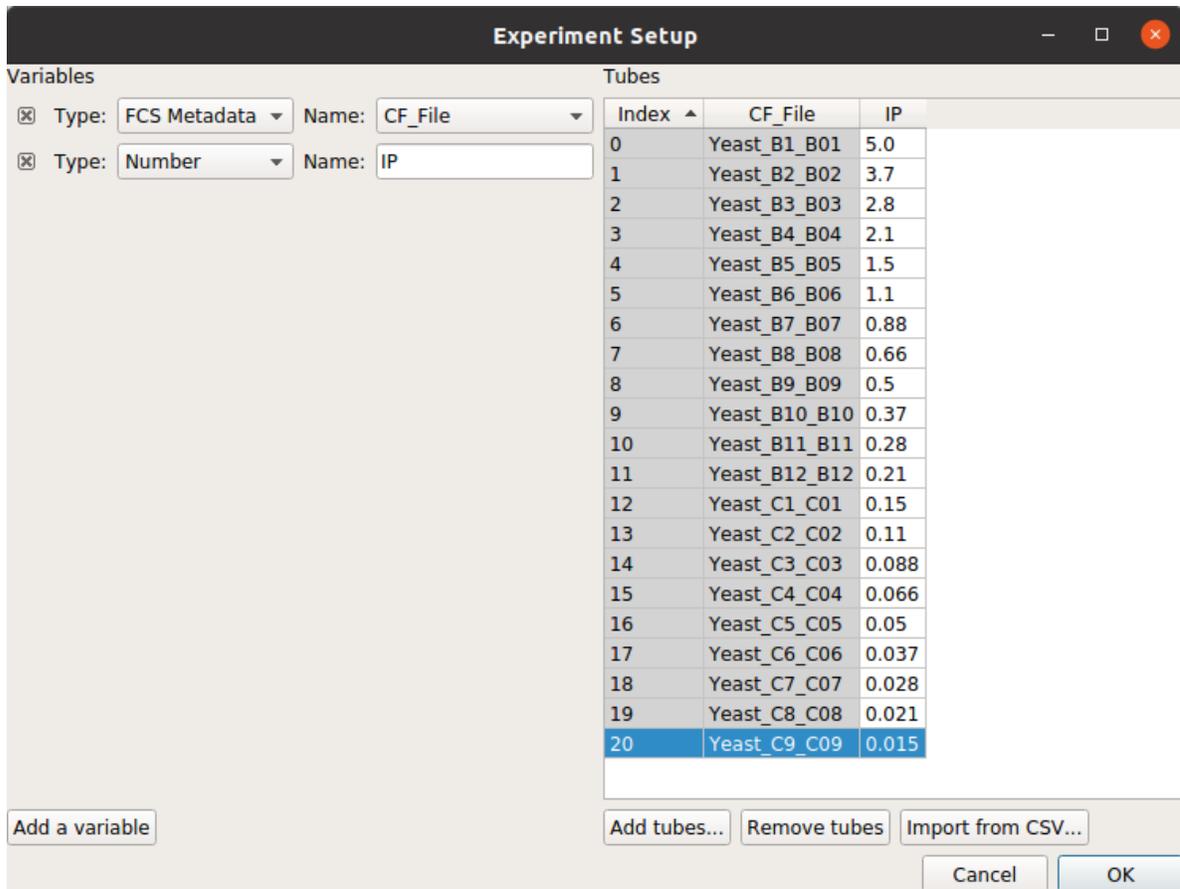

Note: Filling out these tables can be a pain, especially if you’ve already got this information in a table somewhere else already. If so, you can actually import the table directly, following the instructions at [HOWTO: Import an experiment from a table](#)

Click **Import!** to import the data.


Filter out clumps and debris

Because these cultures were grown on a roller drum, they are quite uniform in size – but there are still some clumps. Let’s filter that out with a polygon gate.



- Click the polygon gate button on the operations toolbar:
- Name the gate *Single_Cells* – so we can refer to this subset later – and set the X and Y channels to FSC_A and SSC_A. (These are the forward and side-scatter parameters.)
- The initial plot is hard to work with – on the View pane, change both the X and Y scale to **log**.
- Draw a polygon around the major population the center of the plot. Single-click to set a new vertex; double-click to close the polygon.

Here’s what my window looks like now:

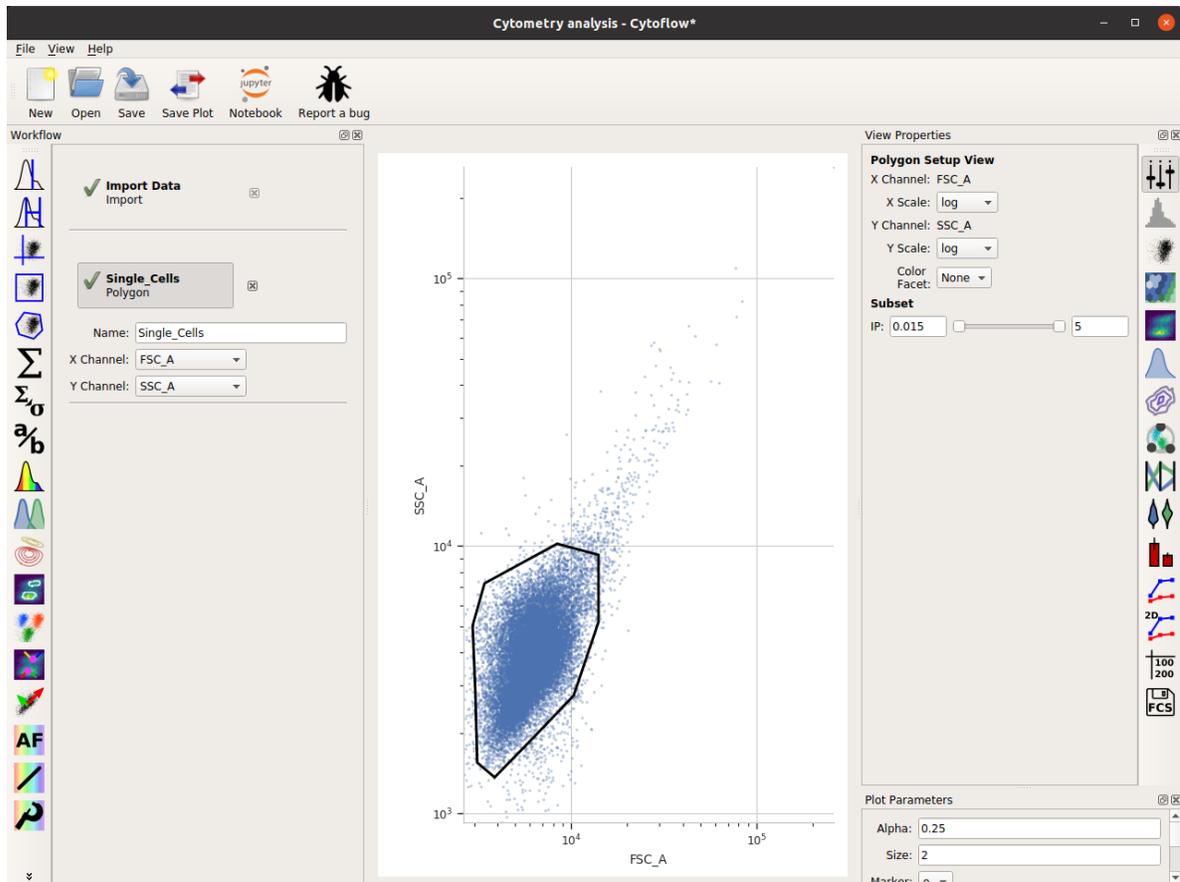


Look at the FITC_A channel

Let's use a histogram to see if we're seeing a dose-response.




- Choose the histogram view:
- Set the channel to **FITC_A** and the scale to **log**
- Set the **Horizontal Facet** to **IP** – this will give us one plot for each different value of **IP**
- To only look at the cells in the **Single_Cells** gate, under **Subset**, click the check-box next to **Single_Cells+**

The result is the following plot:

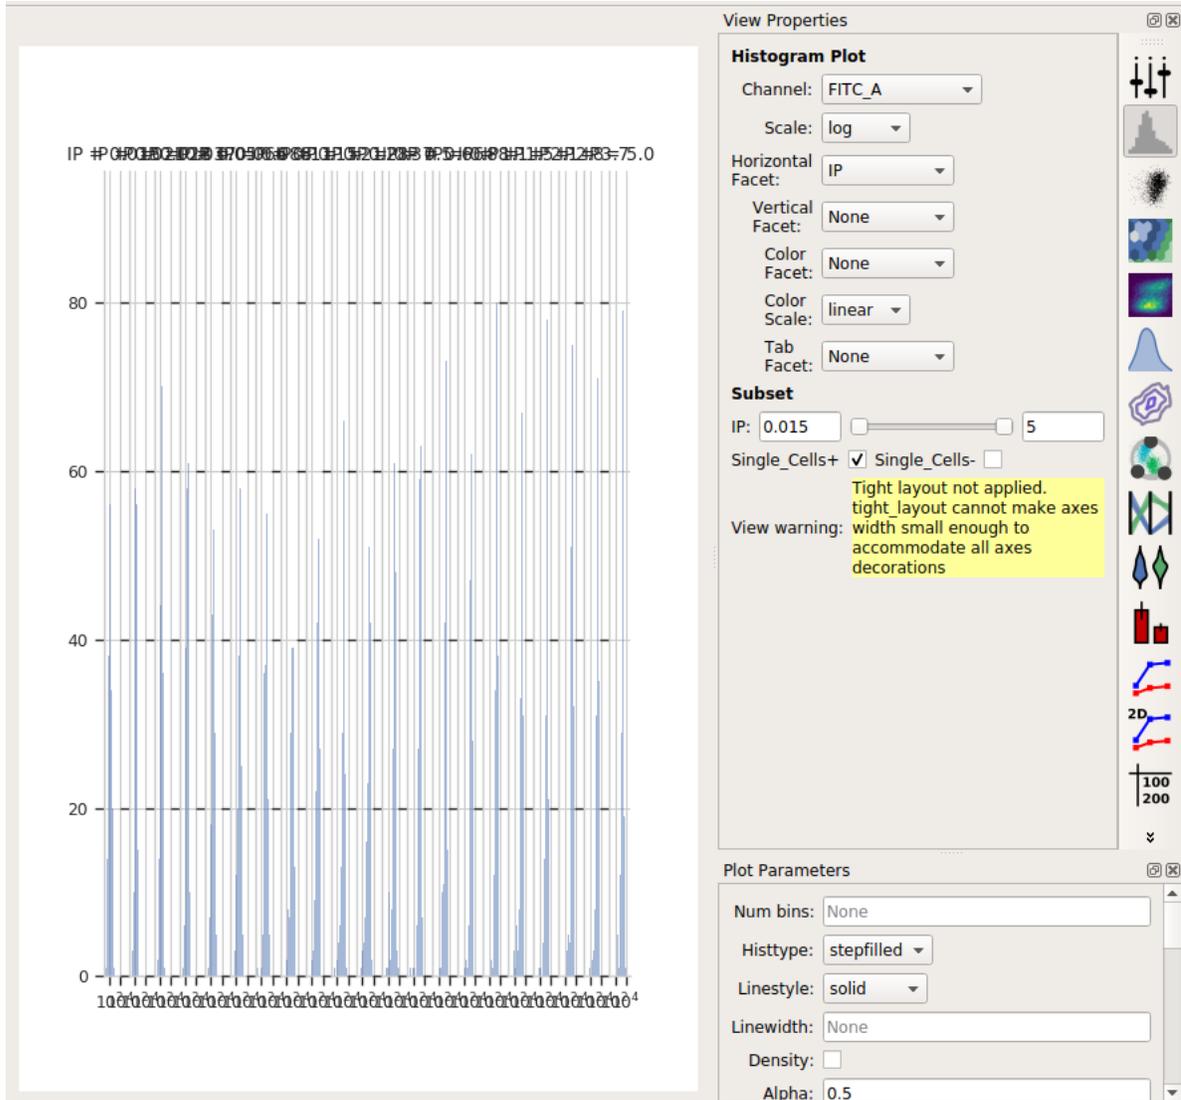


We've got so many different values of **IP** that we can't squeeze them all next to each other. However, we *can* ask Cytoflow to “wrap” them onto several lines, like the word-wrap on a word processor. To do so, in the **Plot Parameters** pane (bottom-right in the default layout), scroll down to **Columns** and set it to 4.

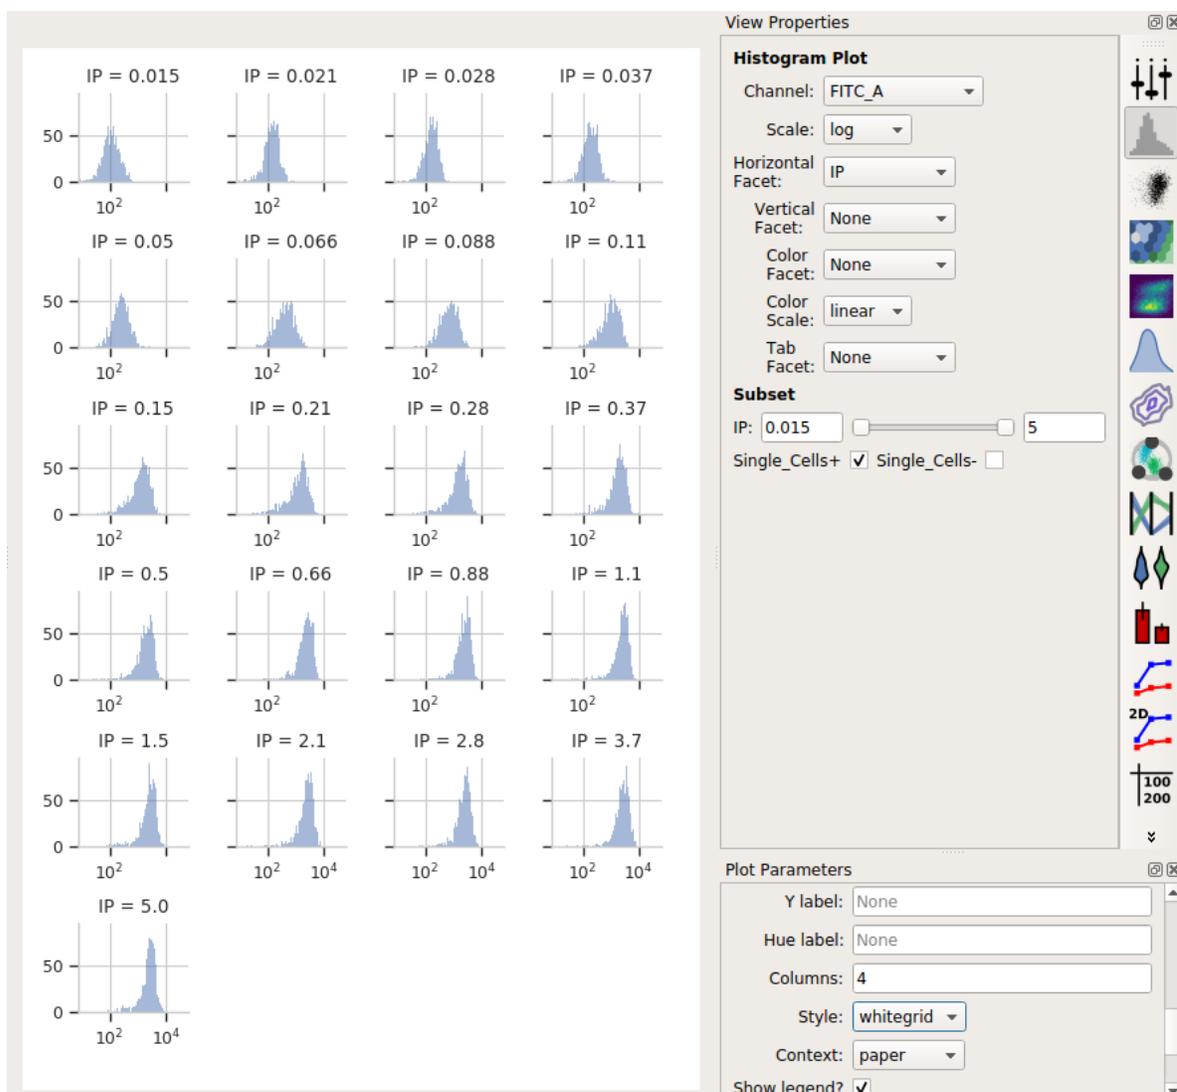

Ah, much better. We can see each plot, and we're clearly seeing an increase. However, histograms are kind of a terrible way to compare lots of distributions like this. A better way is a *violin plot*.



- Choose the violin plot view:
- Set the **X variable** to **IP**, the **Y variable** to **FITC_A**, and the **Y channel scale** to **log**.
- As above, set **Subset** to **Single_Cells+**

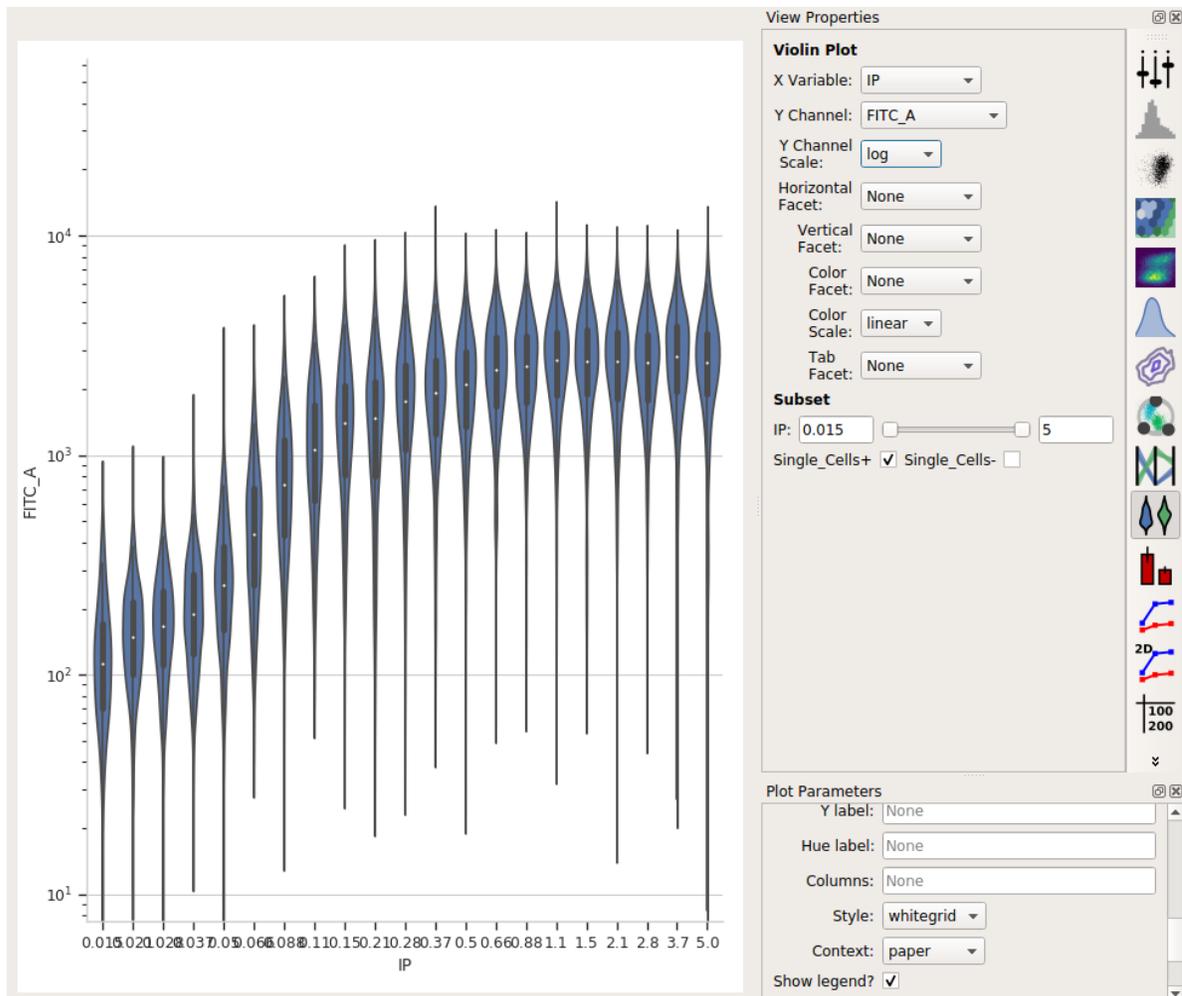

I love how a violin plot lets you compare distributions side-by-side. In this case, it's very clear that there's a clear dose-dependent response as IP concentration increases, as well as a clear saturation of the response.

Summarize the dose-response curve on a line plot

Next, let's make a "traditional" dose-response curve with a scatter plot, where the X axis shows the amount of IP and the Y axis shows the geometric mean of the **FITC_A** channel.



- Add a **Channel Statistics** operation:
- Give the new statistic a name – I called it *GFP_Mean* – and choose the channel we want to analyze (*FITC_A*) and the function we want to apply (*Geom.Mean*)
- Now we need to tell Cytoflow which subsets of our data we want to apply the function to. We want the geometric mean computed for every different value of IP; so set **Group by** to **IP**.
- Again, we only want to analyze the cells in the *Single_Cells* gate – so set **Subset** to *Single_Cells+*.

At the end, your operation should look like this:

✓ **GFP_Mean**
Channel Statistics ✕

Name:

Channel:

Function:

Group By: IP Single_Cells

Subset

IP:


Single_Cells+ Single_Cells-

Now that we've made a new summary statistic, we want to plot it!



- Open the **1D Statistics View**:
- Set **Statistic** to the name of the statistic we just created: (*'GFP_Mean', 'Geom.Mean'*) (note that it shows us both the name of the operation that created the statistic, and the function that we used.)
- Set the **Statistic Scale** to **log**. This is how the plot will scale the Y axis.
- Set **Variable** to the variable we want on the X axis – in this case, *IP*.
- Set **Variable Scale** to *log* – this is the scale on the Y axis.

Et voila, a scatter plot:

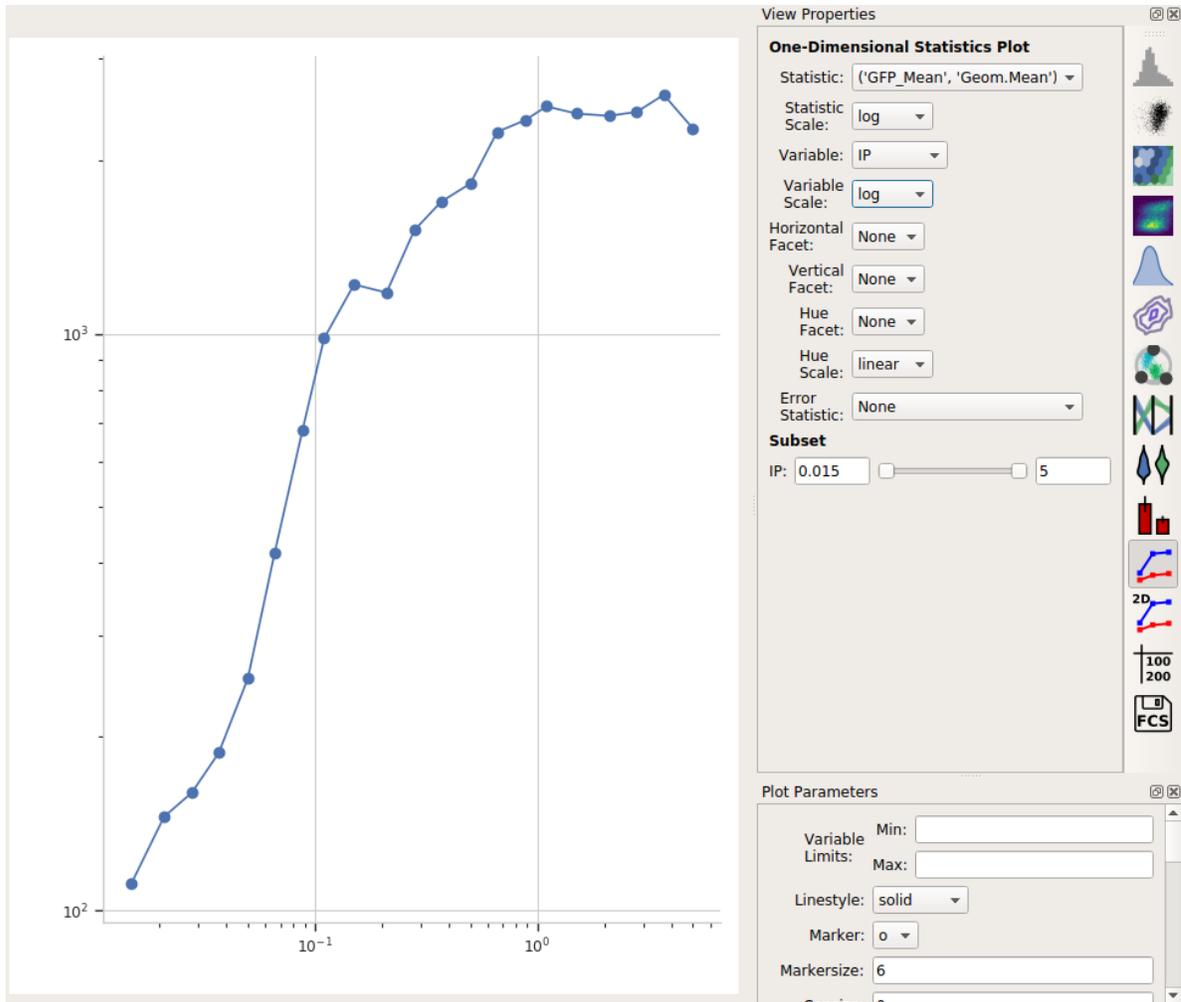

Export the dose-response curve as a table

Often, we want this data available for downstream analyses. Any statistic you've computed, you can also export as a table (for importing into a spreadsheet or other plotting or analysis tool.)



- Choose the **Table View**:
- Set **Statistic** to the same statistic we were just looking at: ('GFP_Mean', 'Geom.Mean')
- Set **Row** to the variable you'd like to put on different rows. In this case, there's only one, so set it to *IP*.
- You can preview the table in the center plot pane. To export it to a CSV file, click **Export...**

The screenshot displays the Cytoflow software interface. On the left, a table shows the relationship between IP values and their corresponding mean values. On the right, the 'View Properties' panel is visible, showing settings for 'Table View' and 'Subset'.

| | |
|------------|---------|
| IP = 0.015 | 111.461 |
| IP = 0.021 | 145.292 |
| IP = 0.028 | 160.033 |
| IP = 0.037 | 187.577 |
| IP = 0.05 | 252.491 |
| IP = 0.066 | 417.172 |
| IP = 0.088 | 680.333 |
| IP = 0.11 | 981.298 |
| IP = 0.15 | 1217.28 |
| IP = 0.21 | 1178.52 |
| IP = 0.28 | 1511.86 |
| IP = 0.37 | 1694.55 |
| IP = 0.5 | 1821.46 |
| IP = 0.66 | 2238.85 |
| IP = 0.88 | 2345.18 |
| IP = 1.1 | 2479.25 |
| IP = 1.5 | 2408.16 |
| IP = 2.1 | 2387.24 |
| IP = 2.8 | 2425.22 |
| IP = 3.7 | 2596.3 |
| IP = 5 | 2270.78 |

The 'View Properties' panel includes the following settings:

- Table View:**
 - Statistic: ('GFP_Mean', 'Geom.Mean')
 - Rows: IP
 - Subrows: None
 - Columns: None
 - Subcolumn: None
 - Export... button
- Subset:**
 - IP: 0.015 (slider) to 5

The 'Plot Parameters' panel is currently empty.


5.1.3 Tutorial: Machine Learning

One of the directions Cytoflow is going in that I'm most excited about is the application of advanced machine learning methods to flow cytometry analysis. After all, cytometry data is just a high-dimensional data set with many data points: making sense of it can take advantage of some of the sophisticated methods that have seen great success with other high-throughput biological data (such as microarrays.)

The following tutorial goes in depth on a common machine-learning method, Gaussian Mixture Models, then demonstrates with briefer examples some of the other machine learning methods that are implemented in Cytoflow.

Import the data

- Start Cytoflow. Under the **Import Data** operation, choose **Set up experiment...**
- Add one variable, *Dox*. Make it a *Number*.
- From the *examples-basic* data set, import *RFP_Well_A3.fcs* and *CFP_Well_A4.fcs*. Assign them *Dox = 10.0* and *Dox = 1.0*, respectively. Your setup should look like this:

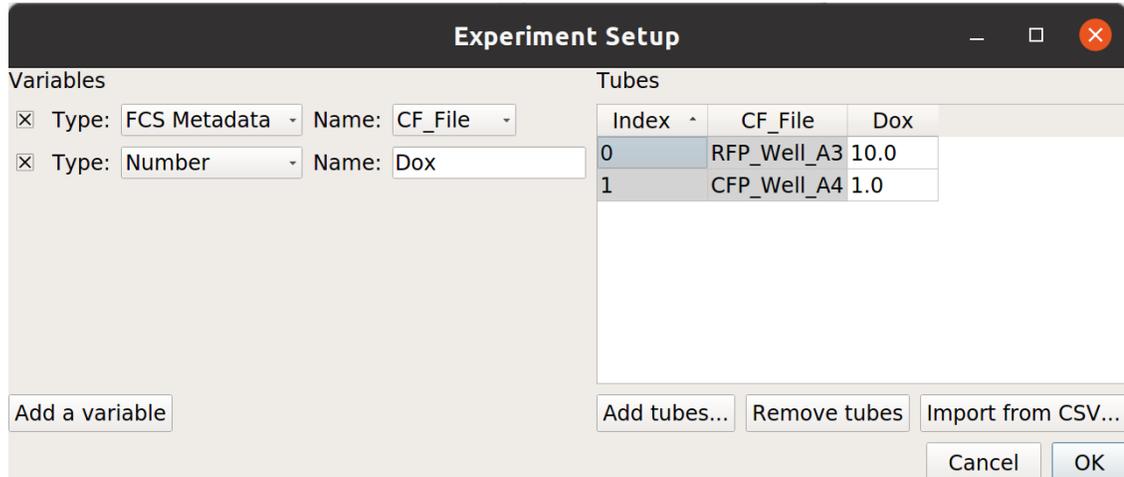

- Choose **OK**
- Optional: Remove the **-W** and **-H** channels from the **Import Data** operation; we're only using the **-A** channels. Your **Import Data** operation should look like this:

✔
Import Data
✕

Import

Channels

✕ B1-A -->

✕ FSC-A -->

✕ HDR-T -->

✕ SSC-A -->

✕ V2-A -->

✕ Y2-A -->

Events per sample:


Samples: 2

Events: 20000

- Click the **Import!** button in the **Import Data** operation.


Examine the data

- Create a **Histogram** view. Set the channel to **Y2-A** and the scale to **logicle**.

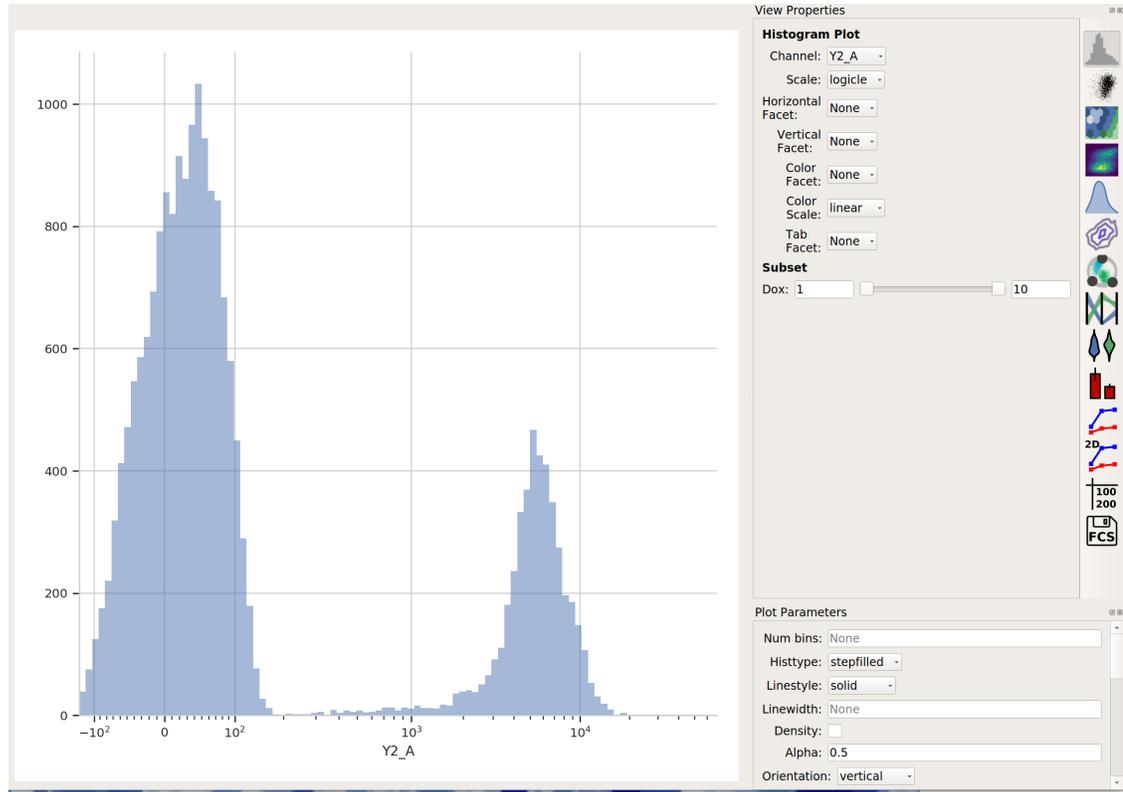


This data looks pretty bi-modal to me. If we wanted to separate out those two populations, a **Threshold** operation would do nicely. However, using a Gaussian mixture model comes with some advantages which we will see.

Create a Gaussian mixture model




- To model this data as a mixture of Gaussians, click the **1D Mixture Model** button:
 - Set the parameters as follows:
 - **Name** – “Gauss” (or something memorable – it’s arbitrary)
 - **Channel** – **Y2-A** (the channel we’re applying the model to)
 - **Scale** – **logicle** (we want the *logicle* scale applied to the data before we model it)
 - **Num Components** – 2 (how many components are in the mixture?)
- ...and click **Estimate!** You’ll see a plot like this:

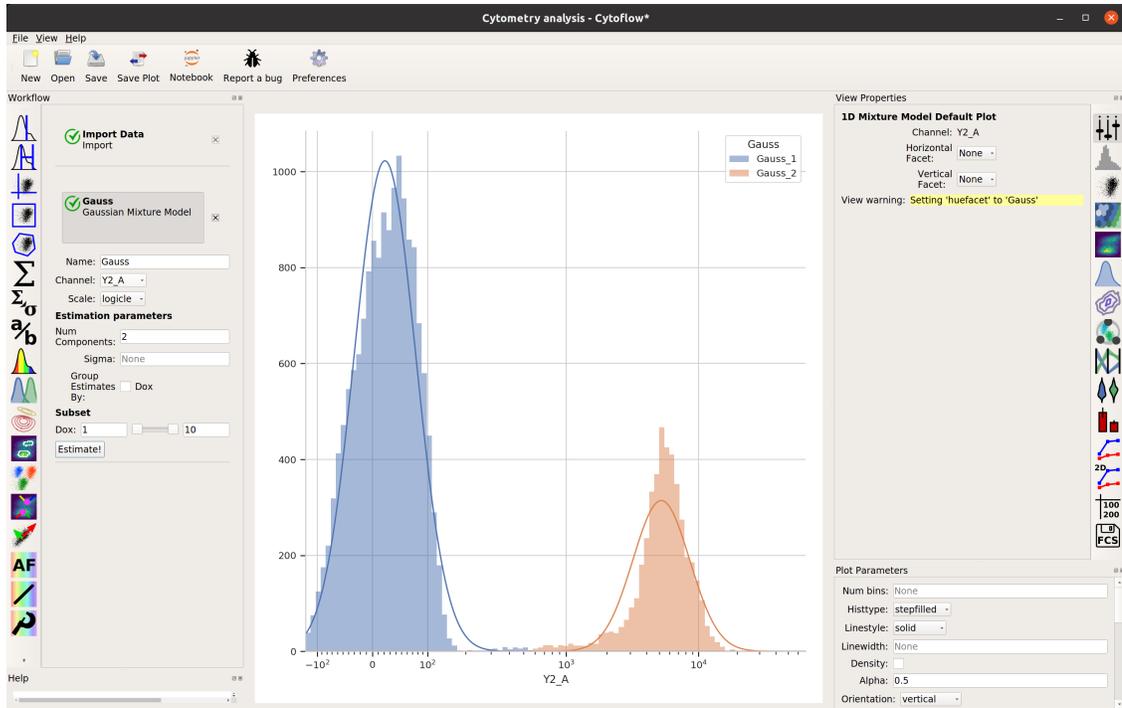


Excellent. It looks like the mixture model found two populations and separated them out.

- What did the **Gaussian Mixture Model** operation actually do? Just like a threshold gate, it makes two new populations – in this case, they’re named **Gauss_1** and **Gauss_2**. You can now view and manipulate them just like you could if you defined the two populations with any other gate. For example, I can view them on separate histograms:

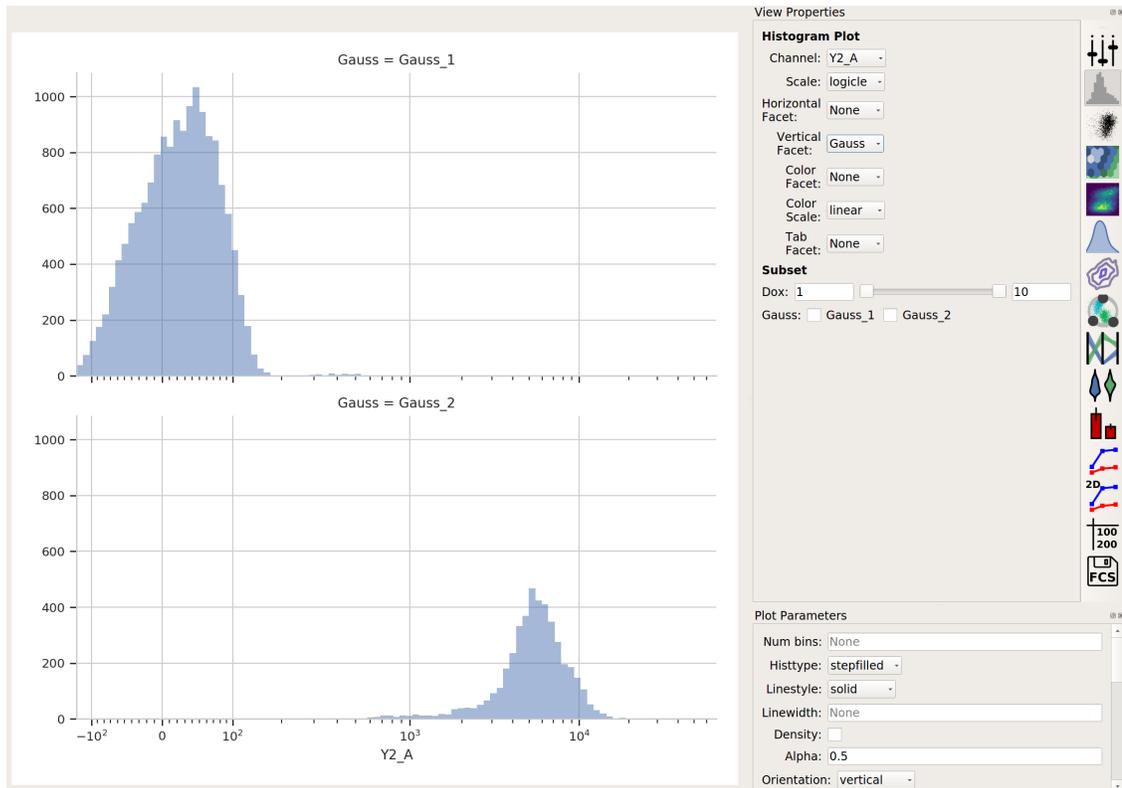


Advanced GMM uses

- Sometimes, data does not separate “cleanly” like this data set does. If that’s the case, you can set the **sigma** estimation parameter. This tells the operation to create a new boolean variable for each component in the model, which is **True** if the event is within **sigma** standard deviations of the population mean. For example, if we set **sigma** to 1 and click **Estimate!**, our diagnostic plot remains the same:

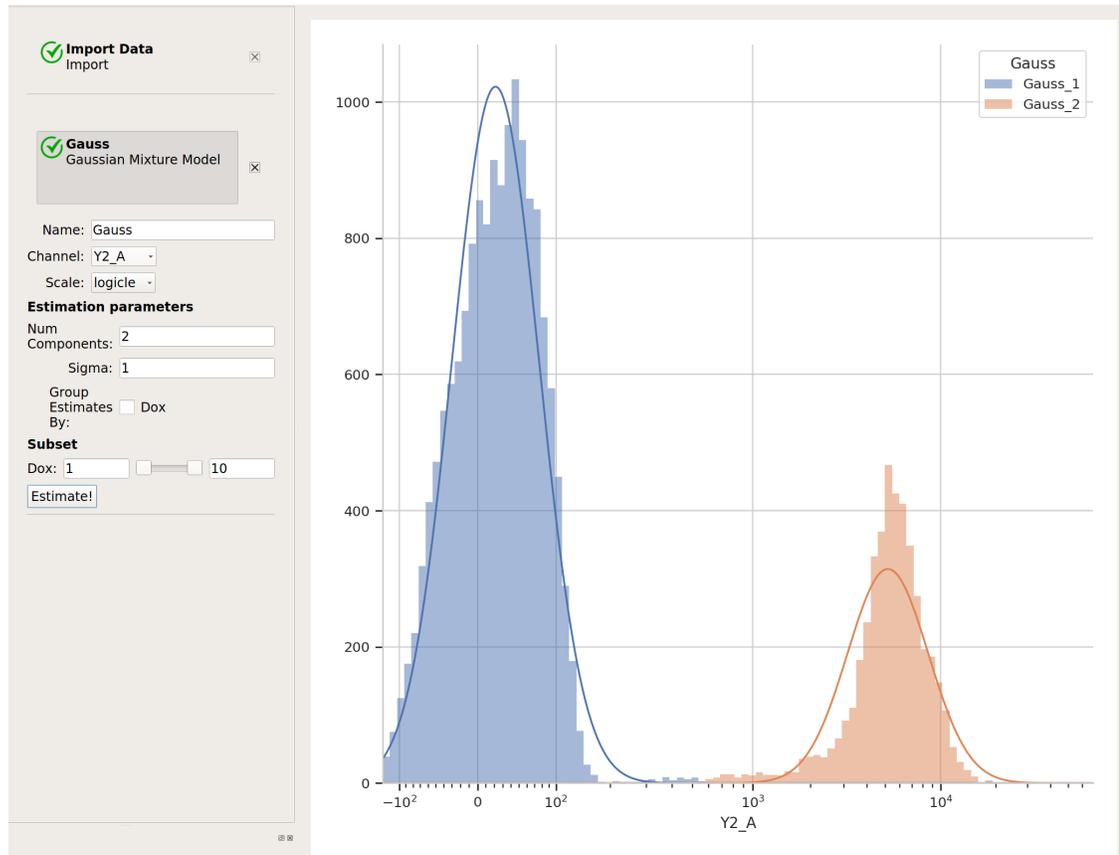


... but now we’ve got two additional variables, **Gauss_1** and **Gauss_2**. For example, I can make a histogram and set the color facet to **Gauss_1**:

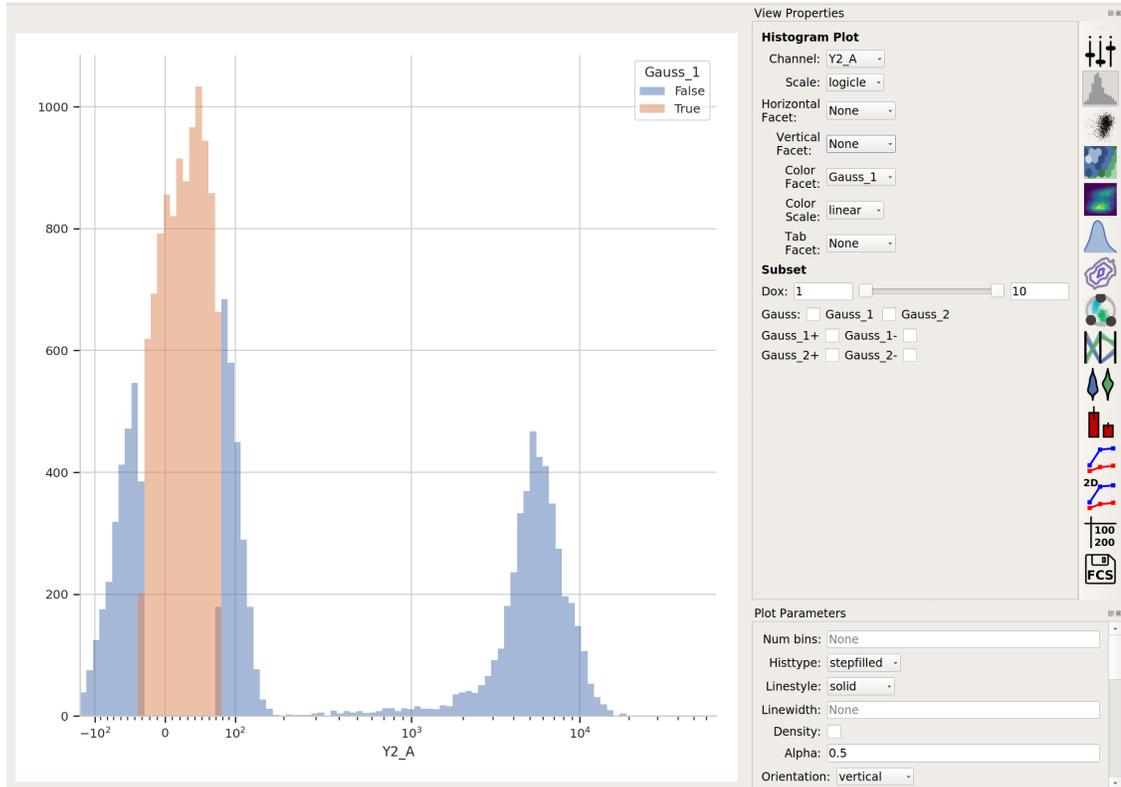


and we can see that only the “center” of the first population has the **Gauss_1** variable set to **True**.

- Sometimes, we don’t want to use the same model parameters for the entire data set. Instead, sometimes you want to estimate different models for different subsets. The **Gaussian Mixture Model** (and other data-driven operations) have a **Group Estimates By** parameter that allows you to just that. For example, let’s say I want a different model estimated for each value of **Dox** (remember, that’s my experimental variable.) I set **Group Estimates By** to **Dox**, and instead of getting one mixture model, now I get one for each different value of **Dox**:

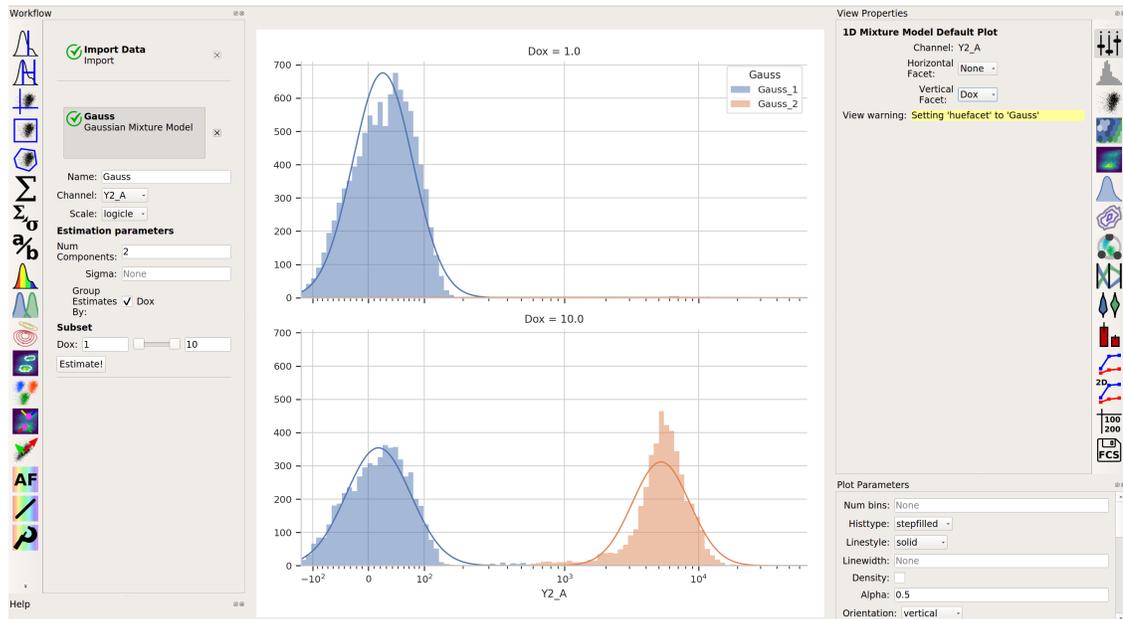

Note that there are two models shown, one for each value of **Dox**. (Note that I set **Vertical Facet** on the view to **Dox** to show both of them.

- Finally, in addition to gating events, data-driven modules also often create new statistics as well. For example, the **Gaussian Mixture Model** operation creates two statistics, **mean** and **proportion**, recording the mean of each population and the proportion of events that was in that population. This is particularly powerful when combined with the **Group Estimates By** parameter. For example, in the image above, it's pretty clear that there weren't many events in the **Gauss_2** population for **Dox = 1.0**. Let's look at the actual proportions using a bar graph:

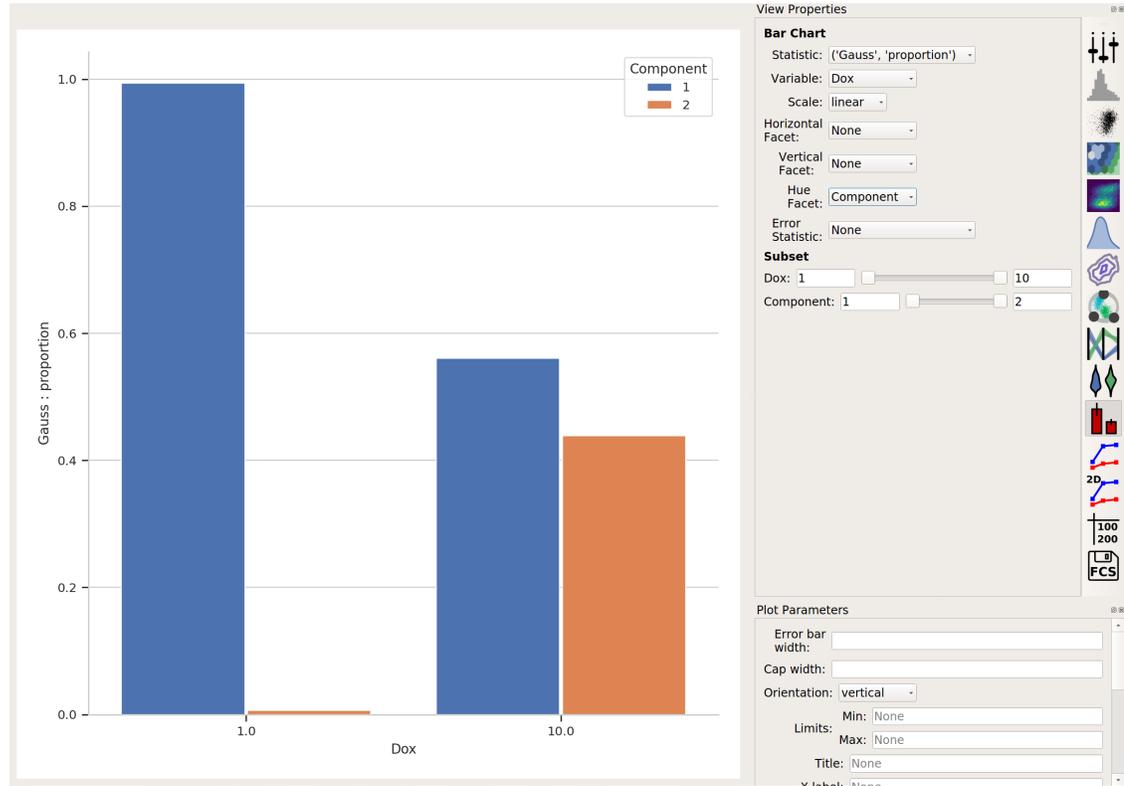



The *Tutorial: Yeast Multidimensional Induction Timecourse* tutorial gives a non-trivial example of this.

More Machine Learning Operations





- **2-dimensional Gaussian Mixture model**

A gaussian mixture model that works in two dimensions (ie, on a scatterplot.)

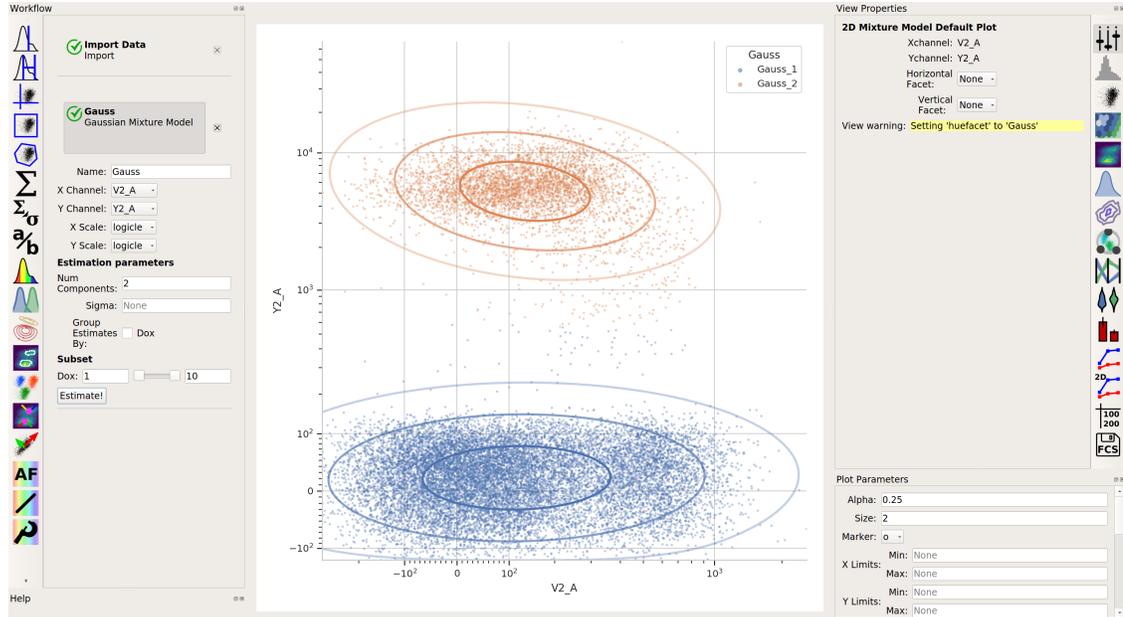


Density gate

Computes a gate based on a 2D density plot. The user chooses what proportion of events to keep, and the module creates a gate that selects the events in the highest-density bins of a 2D histogram.

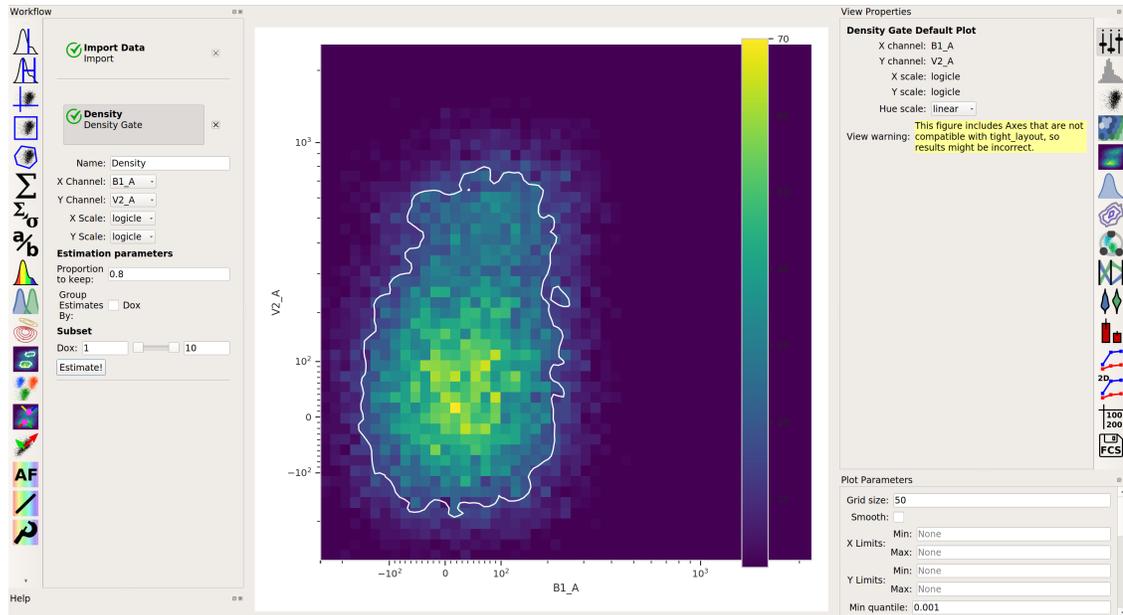


K-means clustering

Uses k-means clustering on a scatter-plot. This sometimes works better than a 2D Gaussian mixture model if the populations aren't "normal" (ie, Gaussian- shaped).




- **flowPeaks**


Sometimes, Gaussian mixtures and k-means clustering don't do a great job of clustering flow data. These clustering methods like data that is "compact" – regularly spaced around a "center". Many data sets are not like that. For example, this one, from the `ecoli.fcs` file in `examples-basic/data`:

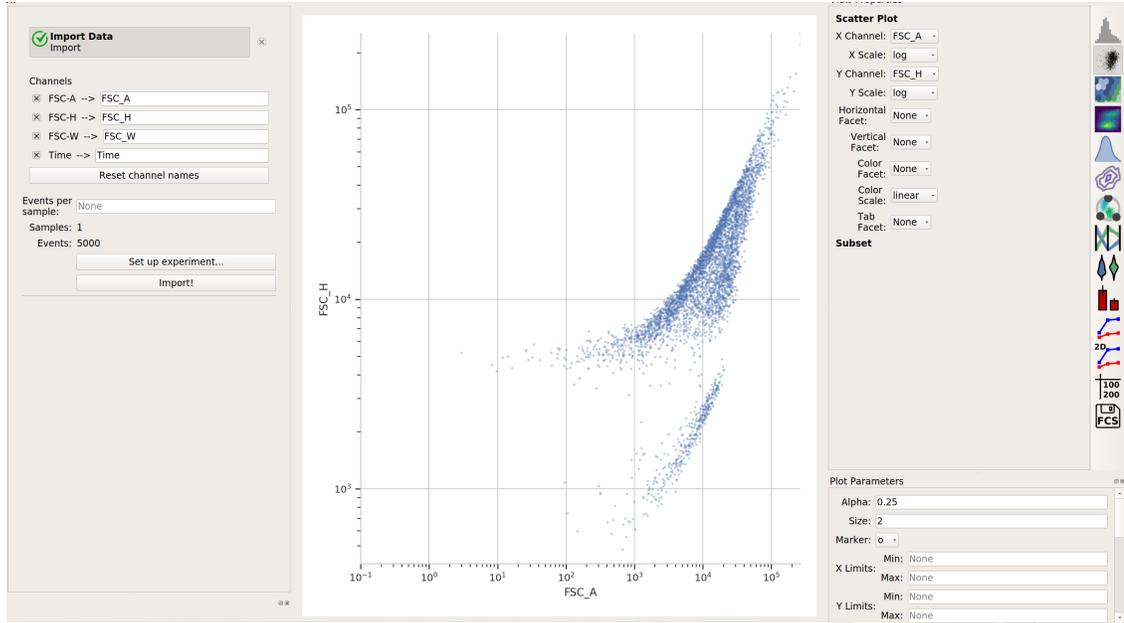


There are clearly two populations, but the Gaussian mixture method isn't effective at separating them:

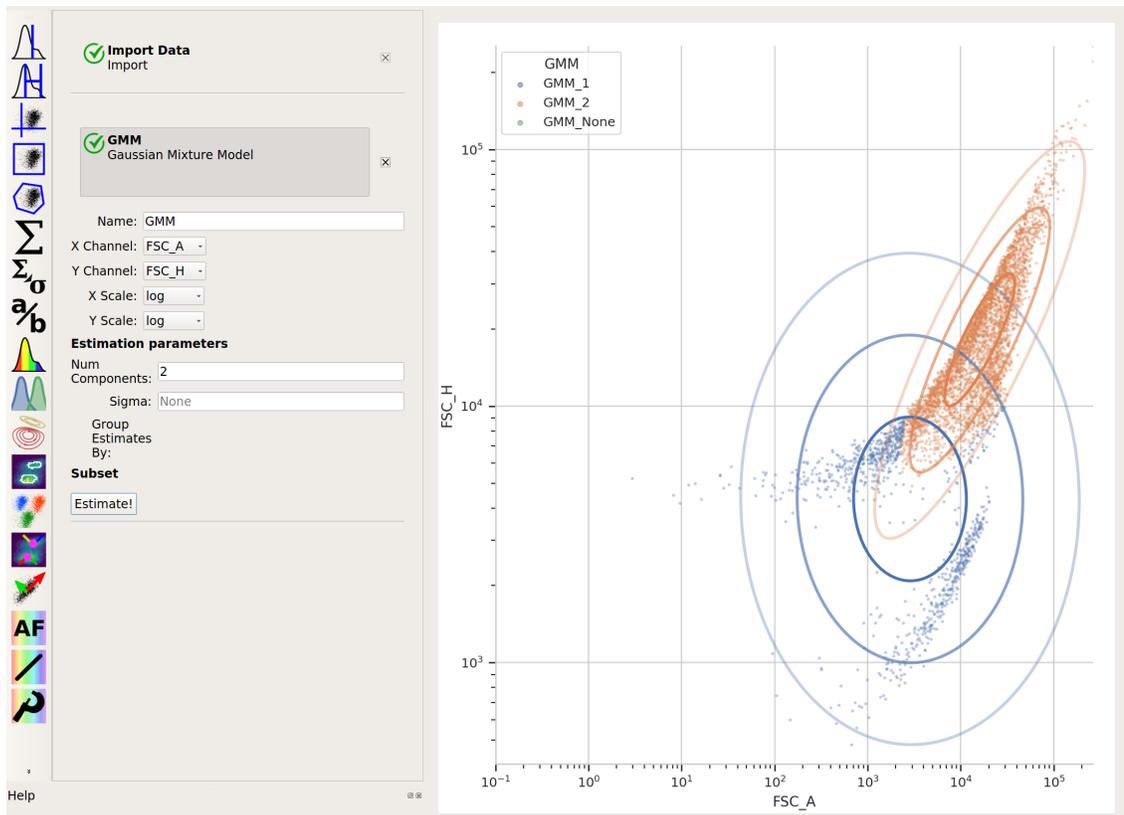

And neither is k-means:

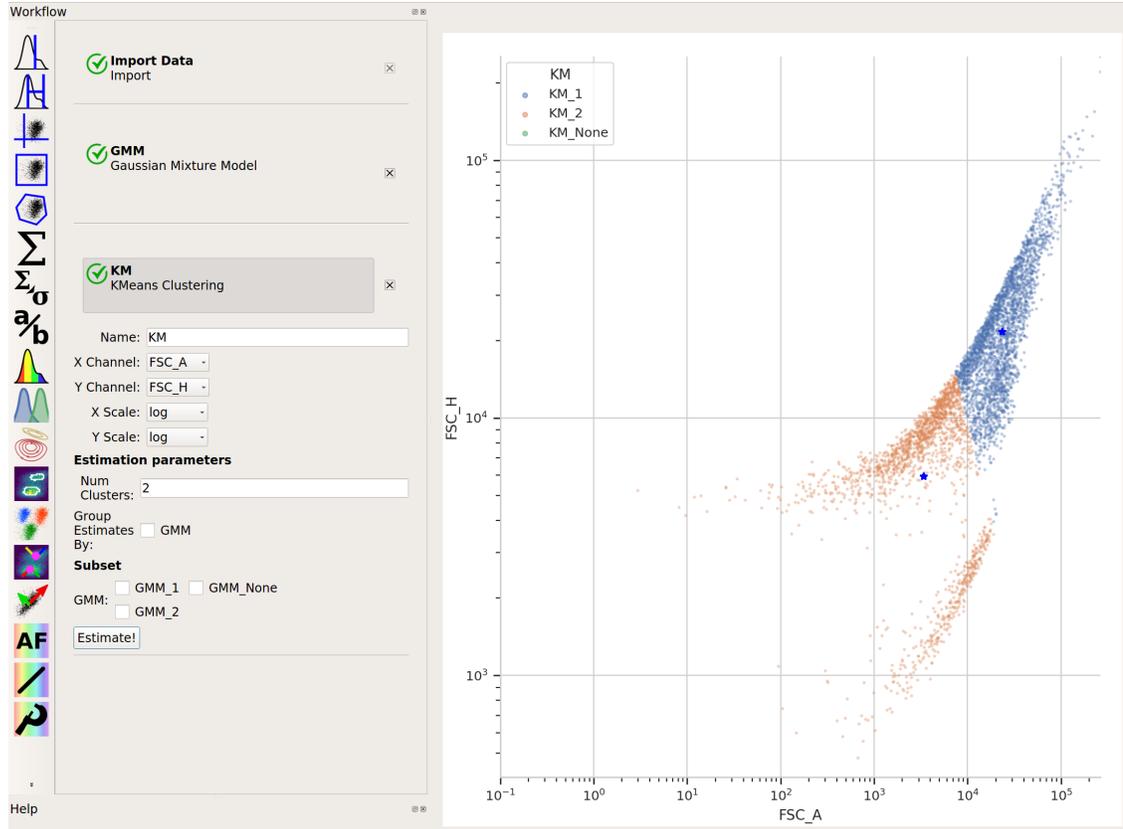

In cases like this, a flow cytometry-specific method called `flowPeaks` may work better.

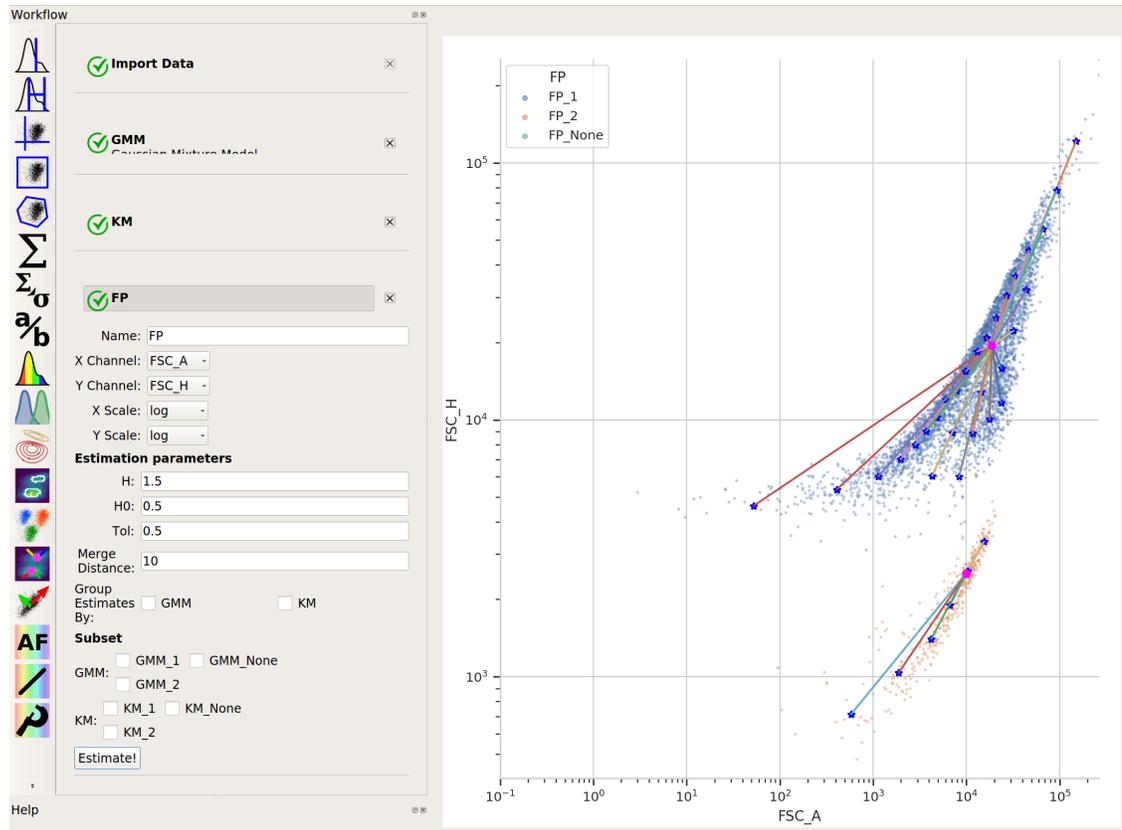


flowPeaks is nice in that it can automatically discover the “natural” number of clusters. There are two caveats, though. First, the peak-finding can be quite sensitive to the estimation parameters h , h_0 , t and Merge distance. The defaults are a good place to start, but if you’re having trouble getting good performance, try tweaking them (see the documentation for what they mean.) And second, flowPeaks is quite computationally expensive. Thus, on large data sets, it can be quite slow.

5.1.4 Tutorial: Yeast Multidimensional Induction Timecourse

This workflow demonstrates a real-world multidimensional analysis. The yeast strain we’re studying responds to the small molecule *isopentyladenine* (IP) by expressing a green fluorescent protein, which we can measure using a flow cytometer in the *FITC-A* channel.

This experiment was designed to determine the dynamics of the IP \rightarrow GFP response. I induced several yeast cultures with different amounts of IP, then took readings on the cytometer over the course of the day, every 30 minutes for 8 hours. The outline of the experimental setup is below.

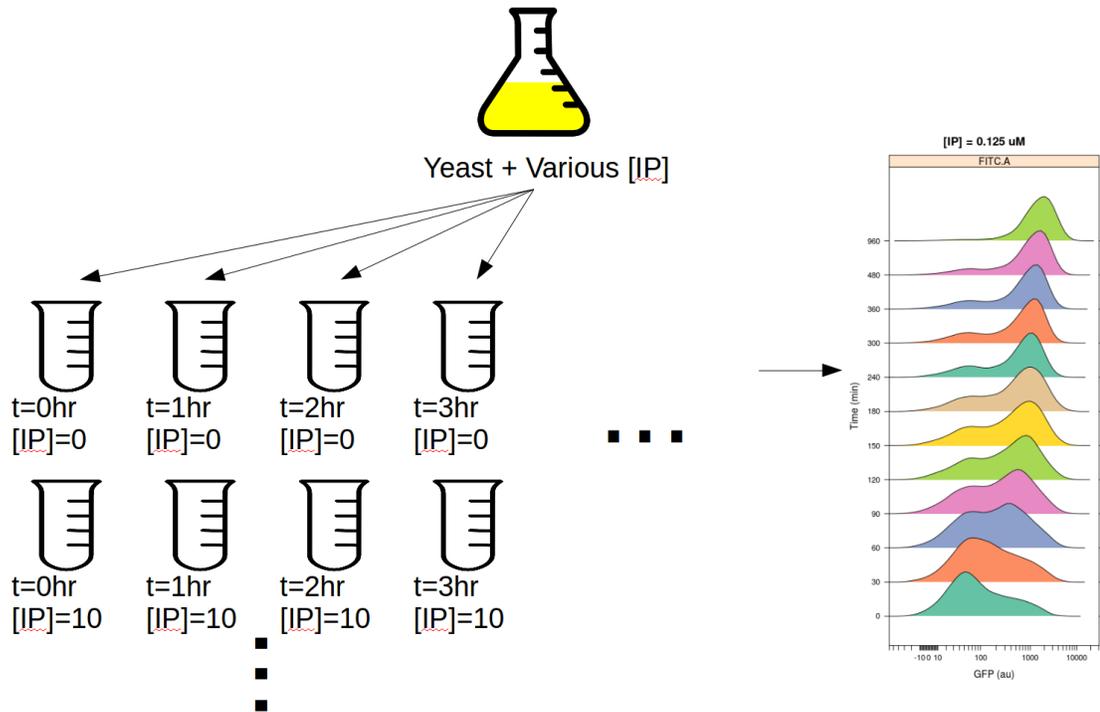

If you'd like to follow along, you can do so by downloading one of the [cytoflow-#####-examples-advanced.zip](#) files from the [Cytoflow releases](#) page on GitHub. The files are in the `yeast/` subdirectory.

Warning: This is a pretty big data set; on modest computers, the operations can take quite some time to complete. Be patient!

Import the data

- Start Cytoflow. Under the **Import Data** operation, choose **Set up experiment...**
- Add two variables, `IP` and `Time`. Make both of them *Number s*.
- In this case, I've encoded the amount of IP and the time (in minutes) in the FCS files' file names. For example:

| File | IP | Minutes |
|-------------------|------|---------|
| IP_0.0_Minutes_0 | 0 | 0 |
| IP_0.05_Minutes_0 | 0.05 | 0 |
| ... | ... | ... |
| IP_0.0_Minutes_30 | 0 | 30 |
| ... | ... | ... |

Note: There are a *lot* of rows in this table. Two things can make setting up these kinds of experiments easier. First, if you already have the details in a table, you can import that table by following the instructions at [HOWTO: Import an experiment from a table](#). And second, you can select multiple cells in the table to edit at once by holding **Control** or **Command** and clicking multiple cells.


Warning: It is generally not a good idea to name a variable **Time**, because most flow cytometers produce FCS files with a **Time** “channel” and you can’t re-use those names!

At the end, your table should look like this:

| Index | CF_File | IP | Minutes |
|-------|-----------------------|--------|---------|
| 55 | IP_0.0312_Minutes_0 | 0.0312 | 0.0 |
| 59 | IP_0.0312_Minutes_120 | 0.0312 | 120.0 |
| 60 | IP_0.0312_Minutes_150 | 0.0312 | 150.0 |
| 61 | IP_0.0312_Minutes_180 | 0.0312 | 180.0 |
| 62 | IP_0.0312_Minutes_240 | 0.0312 | 240.0 |
| 56 | IP_0.0312_Minutes_30 | 0.0312 | 30.0 |
| 63 | IP_0.0312_Minutes_300 | 0.0312 | 300.0 |
| 64 | IP_0.0312_Minutes_360 | 0.0312 | 360.0 |
| 65 | IP_0.0312_Minutes_480 | 0.0312 | 480.0 |
| 57 | IP_0.0312_Minutes_60 | 0.0312 | 60.0 |
| 58 | IP_0.0312_Minutes_90 | 0.0312 | 90.0 |
| 12 | IP_0.05_Minutes_0 | 0.05 | 0.0 |
| 19 | IP_0.05_Minutes_120 | 0.05 | 120.0 |
| 21 | IP_0.05_Minutes_150 | 0.05 | 150.0 |
| 24 | IP_0.05_Minutes_180 | 0.05 | 180.0 |
| 25 | IP_0.05_Minutes_240 | 0.05 | 240.0 |
| 14 | IP_0.05_Minutes_30 | 0.05 | 30.0 |
| 27 | IP_0.05_Minutes_300 | 0.05 | 300.0 |
| 29 | IP_0.05_Minutes_360 | 0.05 | 360.0 |
| 33 | IP_0.05_Minutes_480 | 0.05 | 480.0 |

Filter out clumps and debris


Let’s have a look at the morphological parameters, *FSC-A* and *SSC-A*. There are so many events in this data set that a standard scatterplot isn’t a great choice:

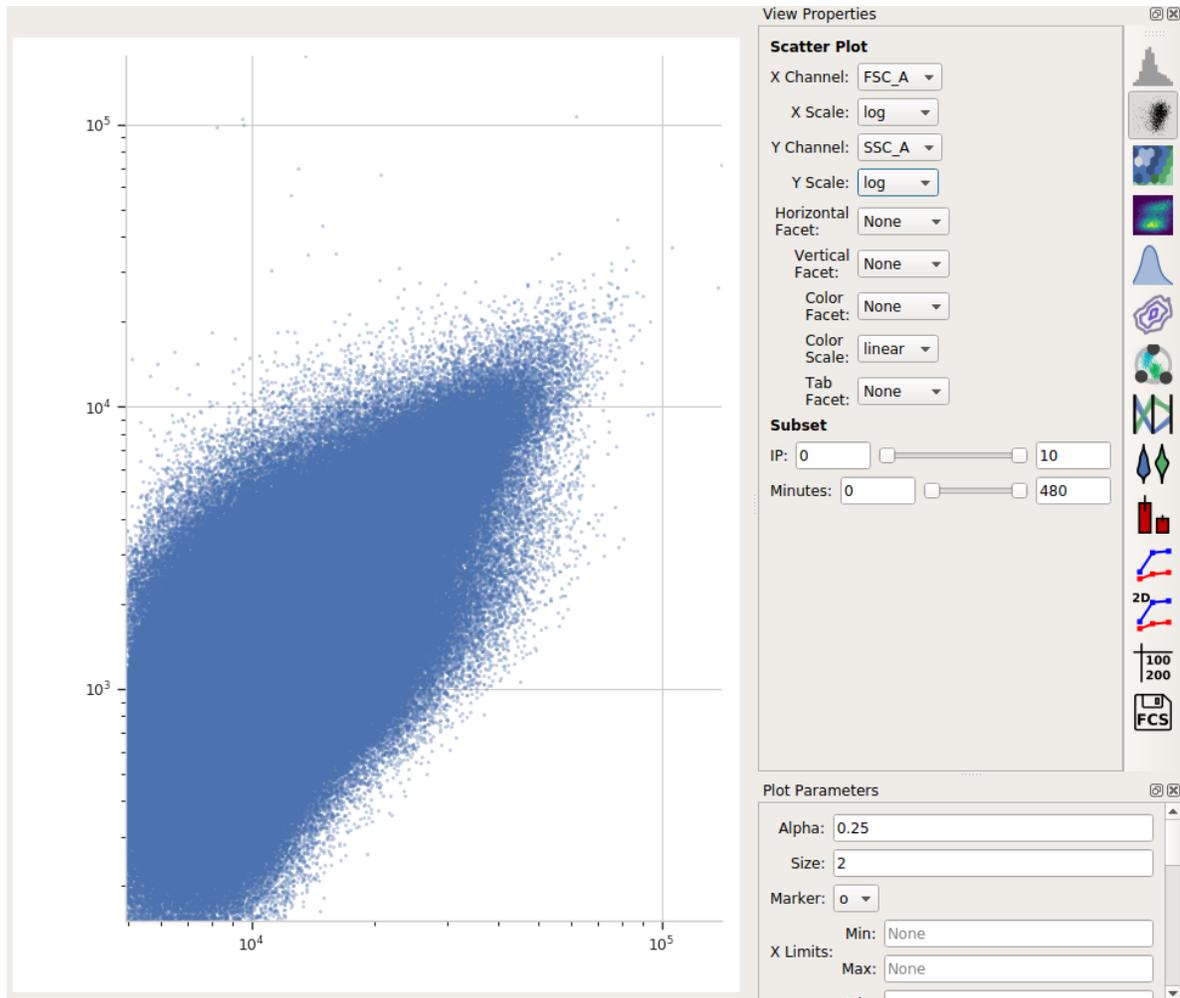

Instead, let's use a density plot.




- Click the density plot button:
- Set the **X channel** to **FSC_A** and the **Y channel** to **SSC_A**. Change both axis scales to **log**.

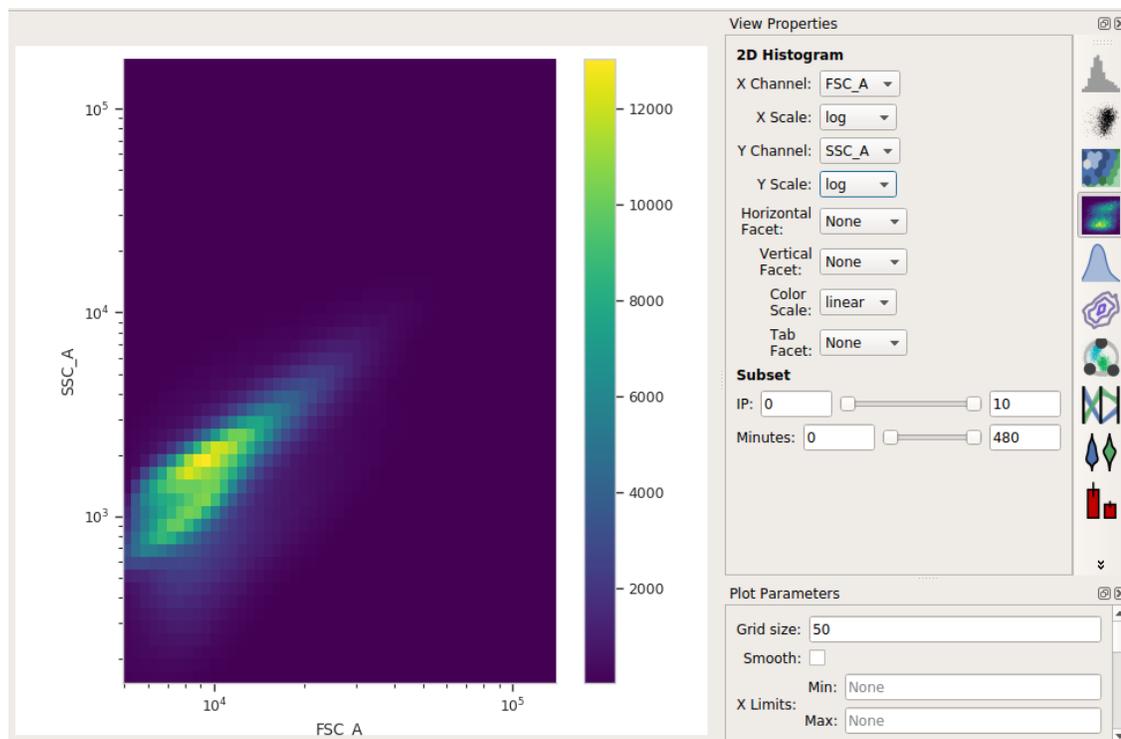

This distribution looks quite tight. Instead of drawing a polygon, let's use a density gate to keep the 80% of events that are in the "center" of this distribution.



- Add a **Density Gate** operation to your workflow:
- Set **X channel** to **FSC_A** and **Y Channel** to **SSC_A**. Change both axis scales to **log**. By default, the operation keeps 90% of the events; let's change that to 80% by setting **Proportion to keep** to *0.8*.
- Click **Estimate!** and check the diagnostic plot to make sure that the gate captures the population you want:

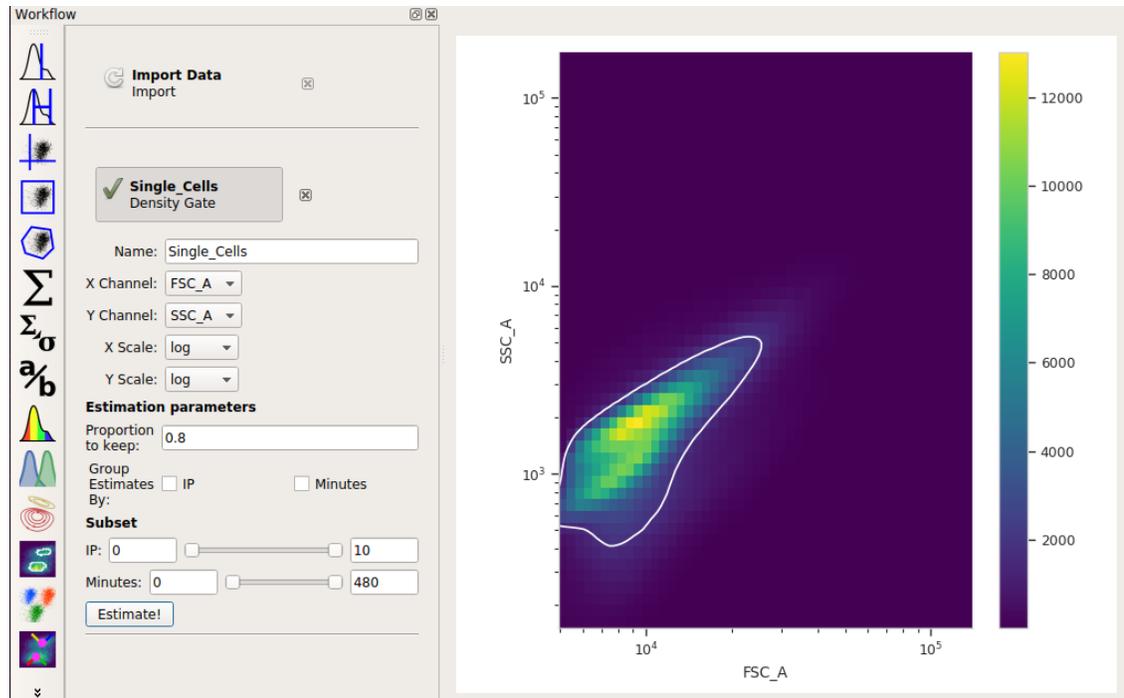

Compute the geometric mean at each different timepoint and IP concentration

Next, we'll create a new **Channel Statistic** to compute the geometric mean of the **FITC_A** channel at each timepoint and IP concentration.

Note: Why the geometric mean? See [Guide: Which measure of center should I use?](#)



- Add a **Channel Statistics** operation:
- Give the new statistic a name – I called it *GFP_Mean* – and choose the channel we want to analyze (*FITC_A*) and the function we want to apply (*Geom.Mean*)
- Now we need to tell Cytoflow which subsets of our data we want to apply the function to. We want the geometric mean computed for every different value of IP *and* timepoint; so set **Group by** to **IP and Minutes**.
- Again, we only want to analyze the cells in the *Single_Cells* gate – so set **Subset** to *Single_Cells+*.

At the end, your operation should look like this:

✓ **GFP_Mean**
Channel Statistics
 ✕

Name:

Channel:

Function:

Group IP Single_Cells

By: Minutes

Subset

Minutes:

IP:


Single_Cells+ Single_Cells-

Now that we've made a new summary statistic, we want to plot it!



- Open the **1D Statistics View**:
- Set **Statistic** to the name of the statistic we just created: (*'GFP_Mean', 'Geom.Mean'*) (note that it shows us both the name of the operation that created the statistic, and the function that we used.)
- Set the **Statistic Scale** to **log**. This is how the plot will scale the Y axis.
- Set **Variable** to the variable we want on the X axis – in this case, *Minutes*.
- Set **Hue Facet** to the variable we want plotted in different colors – in this case, *IP*.
- The IP concentrations were a standard dilution series, so change the **Hue scale** to **log**.

Et voila, a scatter plot:

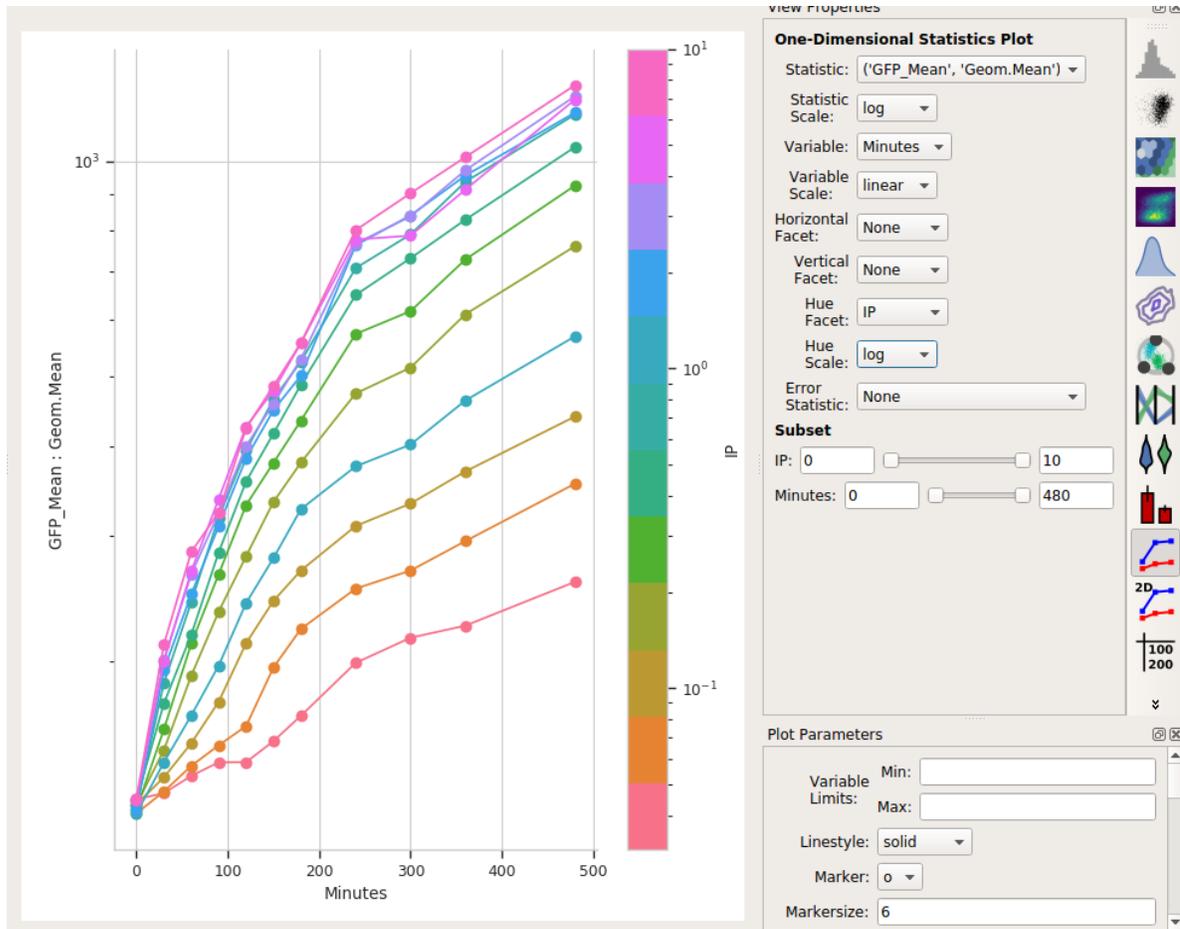


Is a geometric mean an appropriate summary statistic?


A geometric mean is only an appropriate summary statistic if the unimodal in log space. Is this actually true? Let's look at the histogram of each IP/time combination to find out.



- Choose the histogram view:
- Set the **Channel** to **FITC_A**, the **Scale** to *logicle*, the **Horizontal facet** to *Minutes* and the **Vertical facet** to *IP*.
- Set **Subset** to *Single_Cells+*

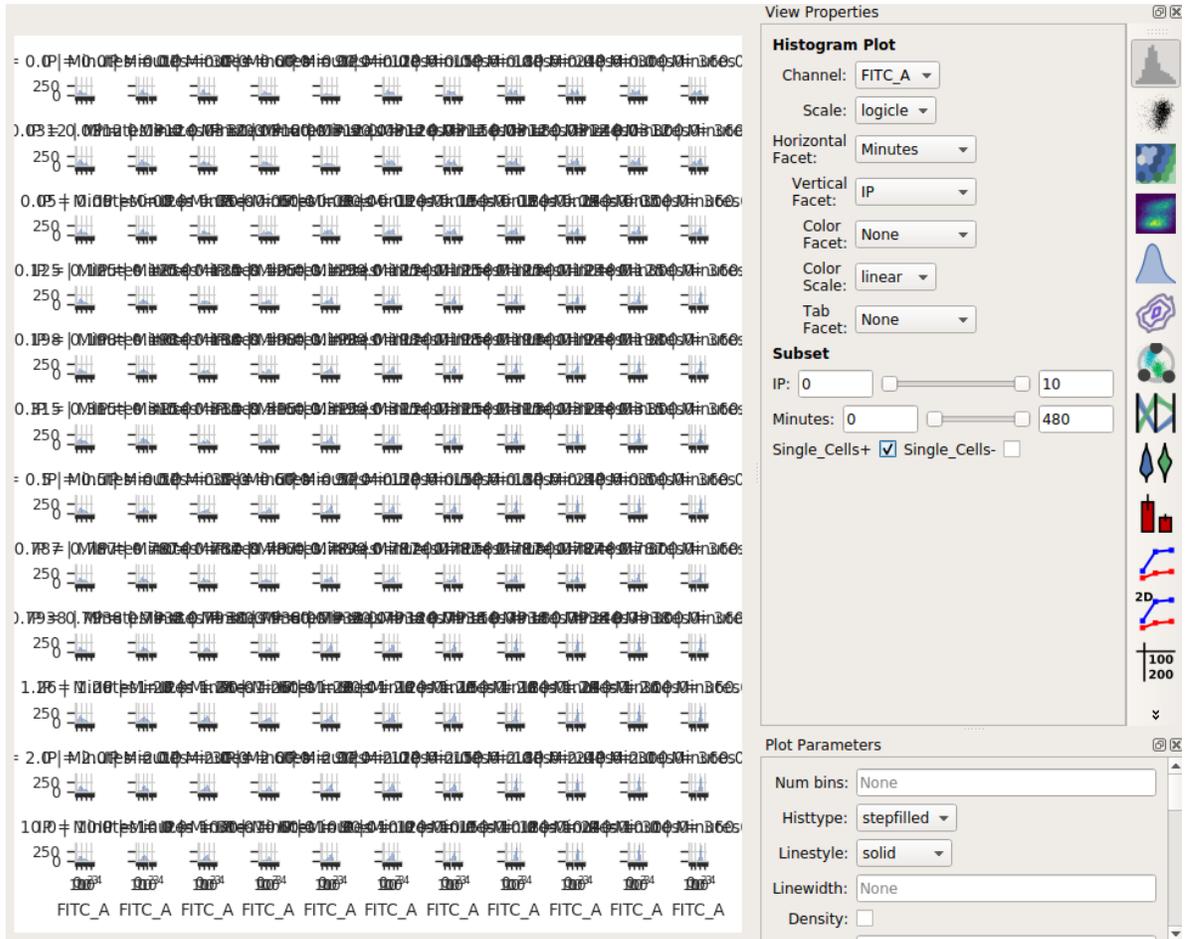

Heep, that's impossible to read! Instead, let's put the *IP* variable on the *Hue* axis, and then use the **Columns** parameter to give us a table of plots. We'll also change to a **1D Kernel Density Estimate**, which will give us smoothed lines instead of jagged histograms.

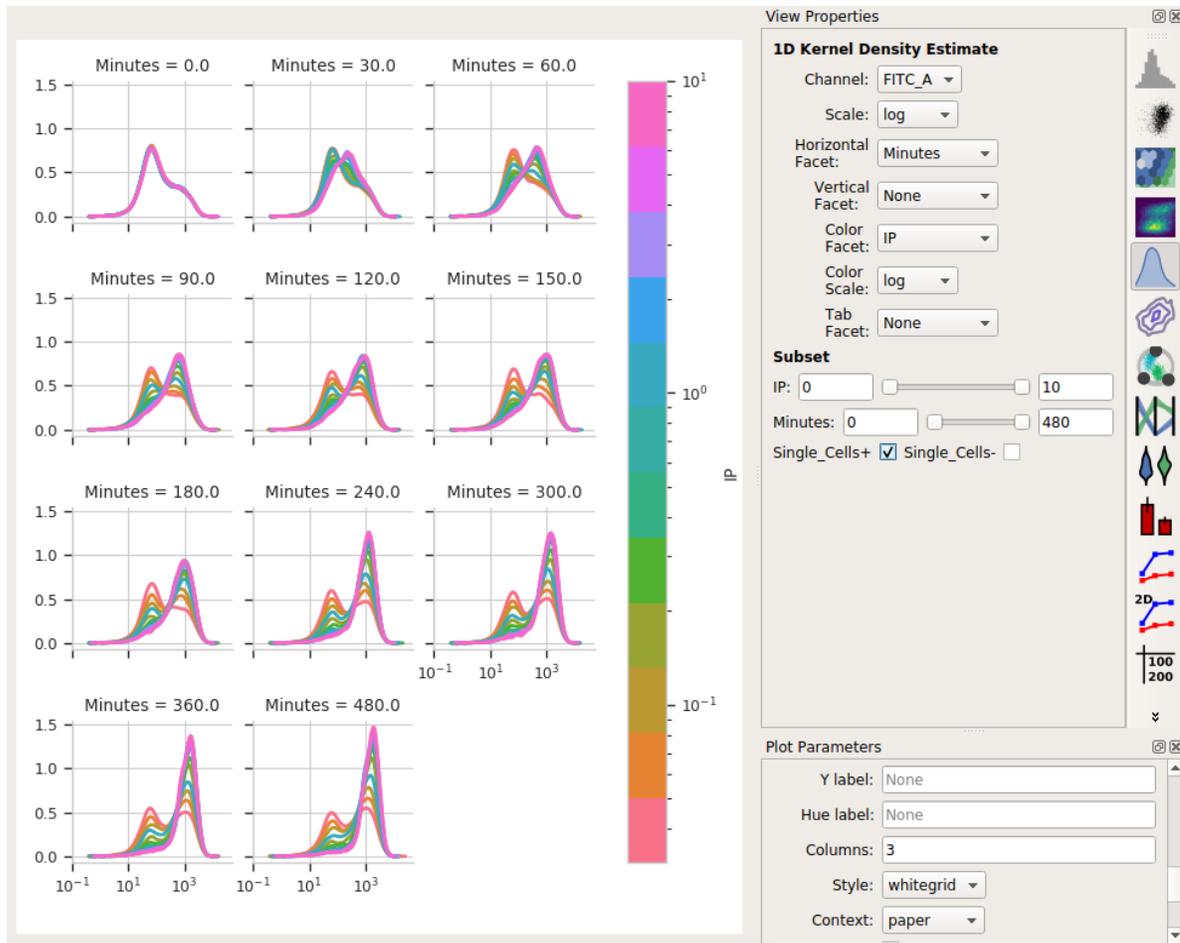

Okay, now *this* is interesting. Many of these distributions are *not* unimodal. Instead, there’s significant additional structure. It’s almost like there are two populations of cells in each tube – on that’s “off” and one that’s “on” – and different amounts of IP and time change the proportion of cells in each population.

Model the data as a mixture of gaussians

It turns out that this “mixture of Gaussians” thing is sufficiently common in cytometry that Cytoflow has a module that can handle it explicitly. Let’s have Cytoflow model each IP/time subset as a mixture of two gaussians and see if that’s more informative than the simple dose-response curve.



- Add a **1D Mixture Model** to your workflow:
- Set the name to something reasonable – I chose *GM_FITC* – and the channel to *FITC_A* and the scale to *log*.
- We want a model with two components, so set **Num components** to 2.
- We want a *separate* model fit to each subset of data with unique values of *IP* and *Minutes*. So, set **Group estimates by** to *IP and Minutes*.
- We only want to estimate the model from the cells in the *Single_Cells* gate – so set **Subset** to *Single_Cells+*.

Your operation should look like this:

✓ **GM_FITC**
 Gaussian Mixture Model ✕

Name:

Channel:

Scale:

Estimation parameters

Num Components:

Sigma:

Group Estimates By: IP Single_Cells

Minutes

Subset


Minutes:

IP:

Single_Cells+ Single_Cells-

- Click **Estimate!**

You can page through the tabs on the plot to look at the various models that were fit. For example, here's the IP=0.05, Minutes=300 tab:

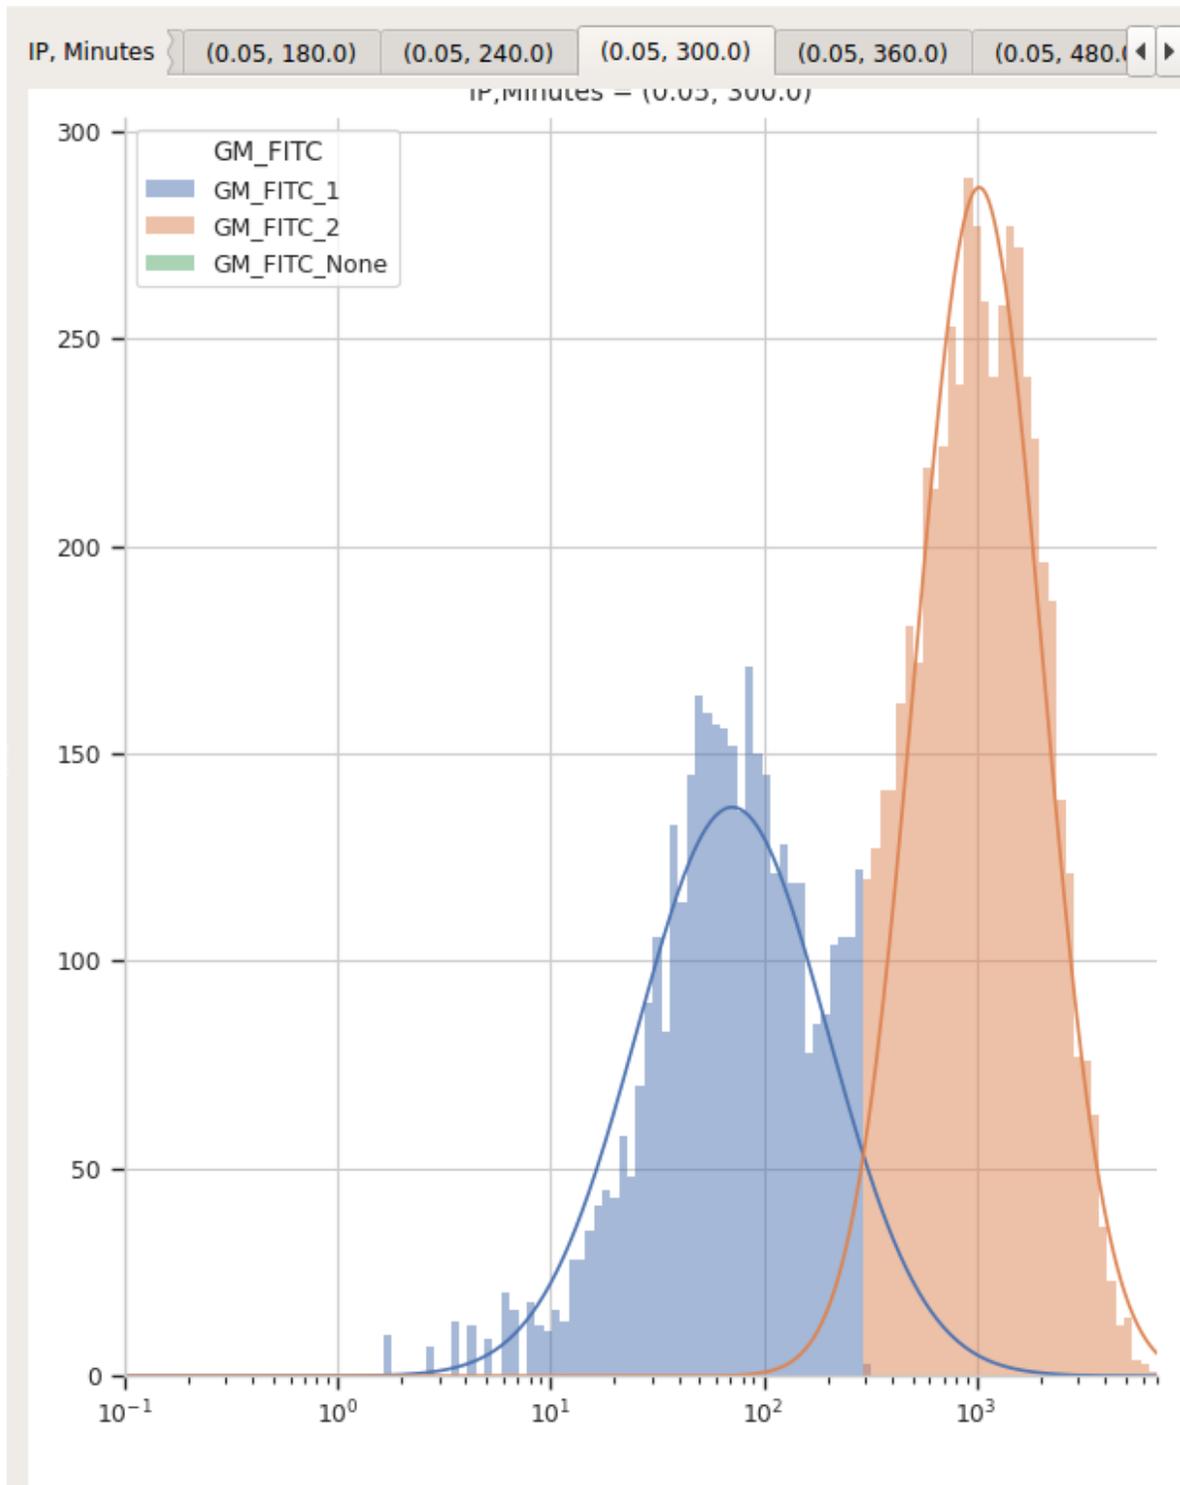



I'd say that's a pretty good fit!

It's important to note that *most data-driven operations* **also** add statistics that contain information about the models they fit. In this case, the **1D Mixture Model** operation creates statistics named *mean* and *proportion*, containing the mean and proportion for each component for each data subset.

First, let's see if the means actually do stay the same for the two components:

- Select the **1D Statistics View** 
- Set **Statistic** to ('GM_FITC', 'mean') and the **Statistic scale** to *log*.
- Set **Variable** to *Minutes*. Leave the **Variable Scale** as *linear*.
- Set the **Hue facet** to *IP* and change the **Hue scale** to *log*.
- The tabs at the top of the plot window will show you the results for the different components. (Note that I also set the Y axis minimum to "10").

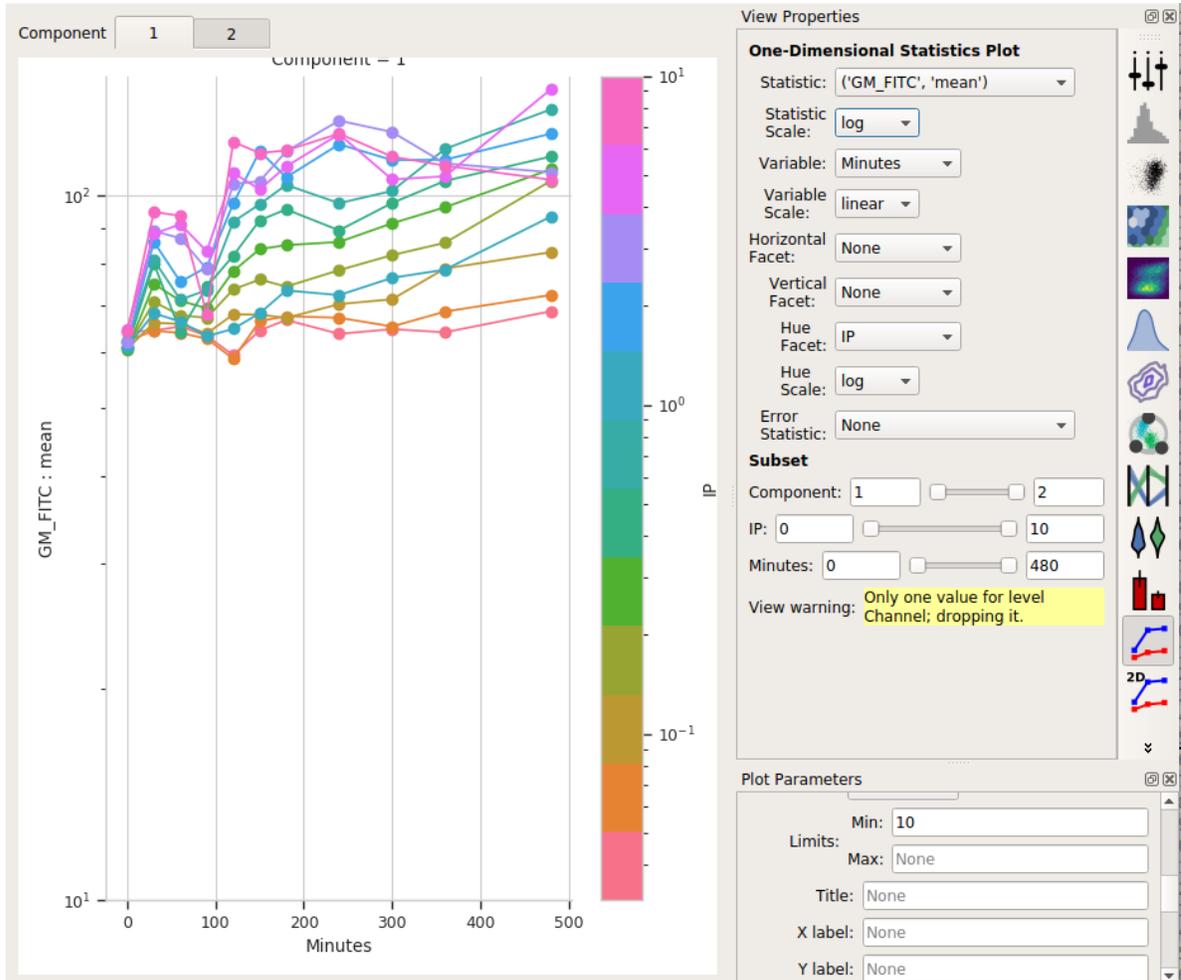


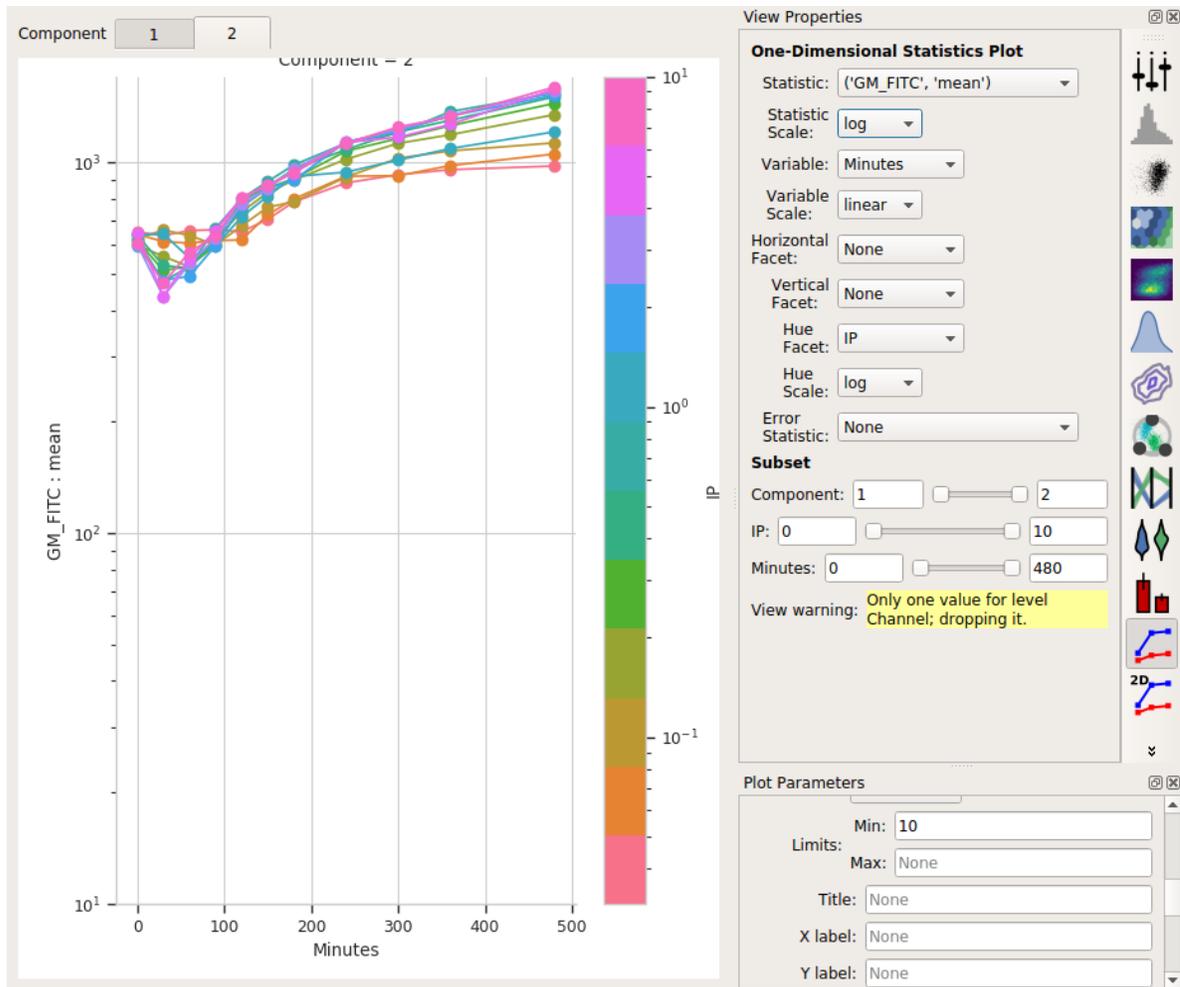

So the means stay pretty constant? They change a lot less than the geometric mean does, at least. A little increase over time – about 5-fold – for the “high” population, and a more-chaotic but still some increase over time for the “low” population.

Second, let’s see if the proportion in the “high” component changes:

- Set **Statistic** to `('GM_FITC', 'proportion')`
- Change the **Statistic scale** back to *linear*.
- Leave the **Variable** set to *Minutes*, the **Variable scale** on *linear**, the **Hue facet** on *IP* and the **Hue scale** on *log*.
- If you changed the Y axis minimum, reset it to nothing (default).
- Select Component 2 in the tabs at the top of the plot window.

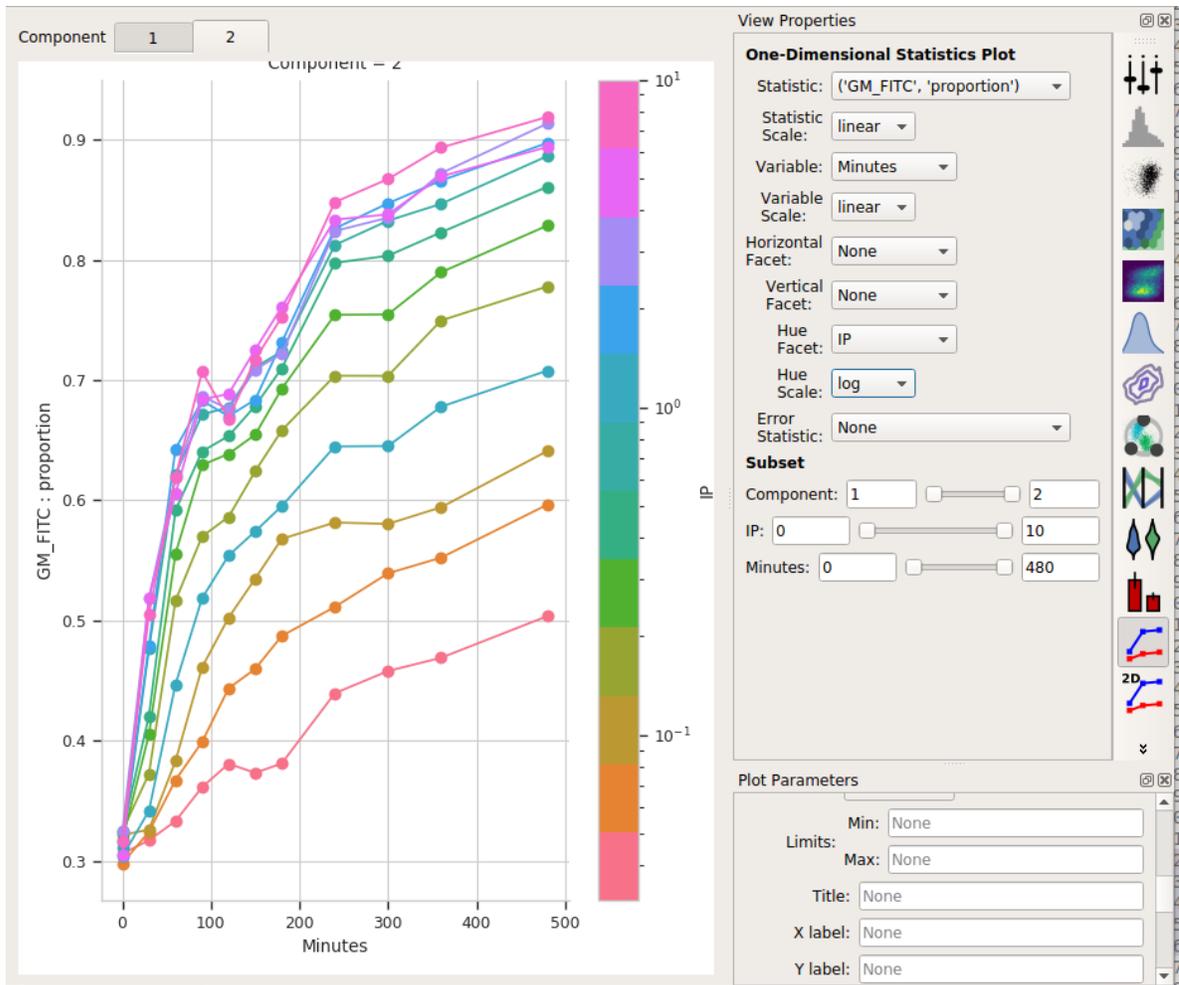


I think those dynamics look significantly different. For one thing, the mixture model “saturates” much more quickly – both in time and in IP. The geometric mean model indicates saturation at about 5 uM, while the mixture model seems to saturate one or two steps earlier. Things also stop changing quite as dramatically by about 240 minutes, whereas the geometric mean hasn’t reached anything like a steady state by 480 minutes (the end of the experiment.)

I hope this has demonstrated a non-trivial insight into the dynamics of this biological system that are gained by looking at it through a quantitative lens, with some machine learning thrown in there as well.

5.1.5 Tutorial: Synthetic Gene Logic Network

This example reproduces Figure 2, part (a), from Kiani et al, *Nature Methods* 11: 723 (2014). This experiment uses a dCas9 fusion to repress the output of a yellow fluorescent reporter. The dCas9 is directed to the repressible promoter by a guide RNA under the control of rtTA3, a transcriptional activator controlled with the small molecule inducer doxycycline (Dox).

The plasmids that were co-transfected are shown below (reproduced from the above publication’s Supplementary Figure 6a.)

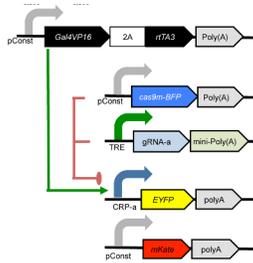

If you'd like to follow along, you can do so by downloading one of the **cytoflow-#####-examples-advanced.zip** files from the [Cytoflow releases](#) page on GitHub. The files are in the **kiani/** subdirectory.

Warning: This is a pretty big data set; on modest computers, the operations can take quite some time to complete. Be patient!

Import the data

- Start Cytoflow. Under the **Import Data** operation, choose **Set up experiment...**
- Add three variables, *Condition* and *Dox*, and *Replicate*. Make *Condition* and *Replicate* *Category*s*, and make **Dox* a *Number*.
- Each replicate is in a separate subdirectory, with identical filenames. Here's the mapping from filename to conditions for one replicate:

Experiment Setup

| Variables | | Tubes | | | | |
|----------------------|-----------------|-------|---------------------|--------------|--------|-----|
| ⊗ Type: FCS Metadata | Name: CF_File | 0 | Specimen_002_A1_A01 | Full_Circuit | 0.0 | 0.0 |
| ⊗ Type: Category | Name: Condition | 1 | Specimen_002_A2_A02 | Full_Circuit | 100.0 | 0.0 |
| ⊗ Type: Number | Name: Dox | 2 | Specimen_002_A3_A03 | Full_Circuit | 500.0 | 0.0 |
| ⊗ Type: Category | Name: Replicate | 3 | Specimen_002_A4_A04 | Full_Circuit | 4000.0 | 0.0 |
| | | 4 | Specimen_002_C5_C05 | No_gRNA | 0.0 | 0.0 |
| | | 5 | Specimen_002_C6_C06 | No_gRNA | 100.0 | 0.0 |
| | | 6 | Specimen_002_C7_C07 | No_gRNA | 500.0 | 0.0 |
| | | 7 | Specimen_002_C8_C08 | No_gRNA | 4000.0 | 0.0 |
| | | 8 | Specimen_002_D1_D01 | No_Cas9 | 0.0 | 0.0 |
| | | 9 | Specimen_002_D2_D02 | No_Cas9 | 100.0 | 0.0 |
| | | 10 | Specimen_002_D3_D03 | No_Cas9 | 500.0 | 0.0 |
| | | 11 | Specimen_002_D4_D04 | No_Cas9 | 4000.0 | 0.0 |

Note: There are a *lot* of rows in this table. Two things can make setting up these kinds of experiments easier. First, if you already have the details in a table, you can import that table by following the instructions at *HOWTO: Import an experiment from a table*. And second, you can select multiple cells in the table to edit at once by holding **Control** or **Command** and clicking multiple cells.


Warning: It is generally not a good idea to name a variable **Time**, because most flow cytometers produce FCS files with a **Time** “channel” and you can’t re-use those names!

At the end, your table should look like this:

| Index | CF_File | Condition | Dox | Replicate |
|-------|---------------------|--------------|--------|-----------|
| 0 | Specimen_002_A1_A01 | Full_Circuit | 0.0 | 1 |
| 1 | Specimen_002_A2_A02 | Full_Circuit | 100.0 | 1 |
| 2 | Specimen_002_A3_A03 | Full_Circuit | 500.0 | 1 |
| 3 | Specimen_002_A4_A04 | Full_Circuit | 4000.0 | 1 |
| 4 | Specimen_002_C5_C05 | No_gRNA | 0.0 | 1 |
| 5 | Specimen_002_C6_C06 | No_gRNA | 100.0 | 1 |
| 6 | Specimen_002_C7_C07 | No_gRNA | 500.0 | 1 |
| 7 | Specimen_002_C8_C08 | No_gRNA | 4000.0 | 1 |
| 8 | Specimen_002_D1_D01 | No_Cas9 | 0.0 | 1 |
| 9 | Specimen_002_D2_D02 | No_Cas9 | 100.0 | 1 |
| 10 | Specimen_002_D3_D03 | No_Cas9 | 500.0 | 1 |
| 11 | Specimen_002_D4_D04 | No_Cas9 | 4000.0 | 1 |
| 12 | Specimen_002_A1_A01 | Full_Circuit | 0.0 | 2 |
| 13 | Specimen_002_A2_A02 | Full_Circuit | 100.0 | 2 |
| 14 | Specimen_002_A3_A03 | Full_Circuit | 500.0 | 2 |
| 15 | Specimen_002_A4_A04 | Full_Circuit | 4000.0 | 2 |
| 16 | Specimen_002_C5_C05 | No_gRNA | 0.0 | 2 |
| 17 | Specimen_002_C6_C06 | No_gRNA | 100.0 | 2 |
| 18 | Specimen_002_C7_C07 | No_gRNA | 500.0 | 2 |
| 19 | Specimen_002_C8_C08 | No_gRNA | 4000.0 | 2 |
| 20 | Specimen_002_D1_D01 | No_Cas9 | 4000.0 | 2 |
| 21 | Specimen_002_D2_D02 | No_Cas9 | 100.0 | 2 |
| 22 | Specimen_002_D3_D03 | No_Cas9 | 500.0 | 2 |
| 23 | Specimen_002_D4_D04 | No_Cas9 | 0.0 | 2 |
| 24 | Specimen_002_A1_A01 | Full_Circuit | 4000.0 | 3 |
| 25 | Specimen_002_A2_A02 | Full_Circuit | 100.0 | 3 |
| 26 | Specimen_002_A3_A03 | Full_Circuit | 500.0 | 3 |
| 27 | Specimen_002_A4_A04 | Full_Circuit | 0.0 | 3 |
| 28 | Specimen_002_C5_C05 | No_gRNA | 4000.0 | 3 |
| 29 | Specimen_002_C6_C06 | No_gRNA | 100.0 | 3 |
| 30 | Specimen_002_C7_C07 | No_gRNA | 500.0 | 3 |
| 31 | Specimen_002_C8_C08 | No_gRNA | 0.0 | 3 |
| 32 | Specimen_002_D1_D01 | No_Cas9 | 0.0 | 3 |
| 33 | Specimen_002_D2_D02 | No_Cas9 | 100.0 | 3 |
| 34 | Specimen_002_D3_D03 | No_Cas9 | 500.0 | 3 |
| 35 | Specimen_002_D4_D04 | No_Cas9 | 4000.0 | 3 |

Gate out debris


There’s a lot of data here; let’s use a **Density View** to look at the **FSC-A** and **SSC-A** channels:

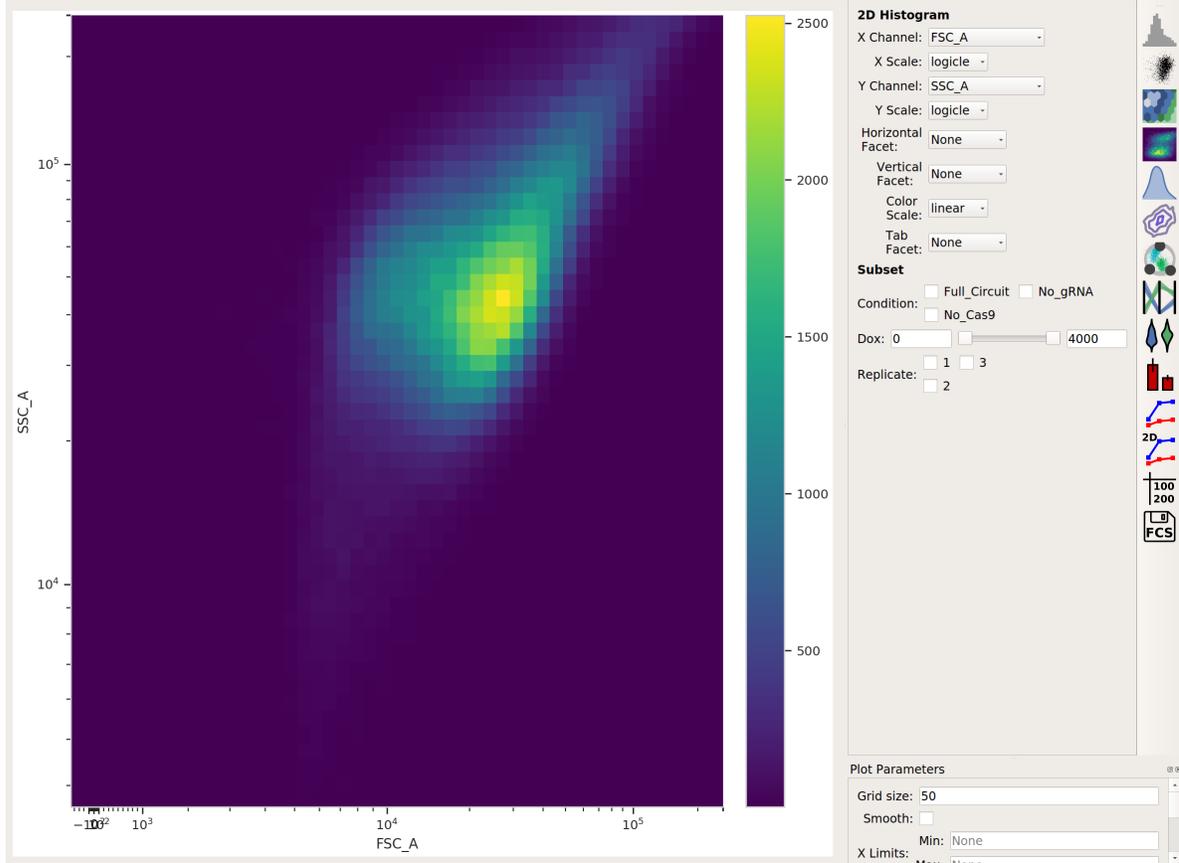


This looks like it's been pre-gated (ie, there's not a mixture of populations.) It's also pushed up against the top axes in both SSC-A and FSC-A, which is a little concerning, but shouldn't affect our analyses too much.

Select transfected cells


The next thing we usually do is select for positively transfected cells. mKate is the transfection marker, so look at the red (PE_TxRed_YG_A) channel:

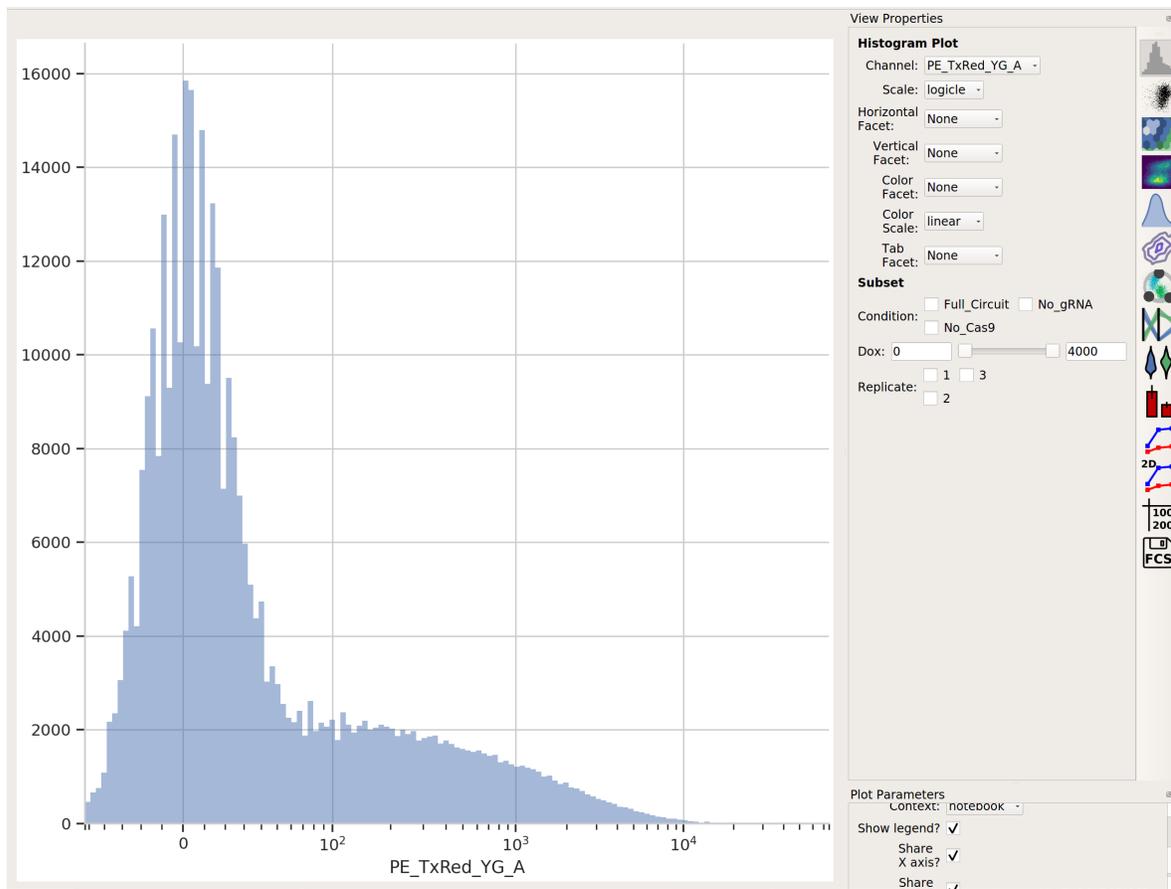

Let's fit a mixture-of-gaussians, for a nice principled way of separating the transfected population from the untransfected population.

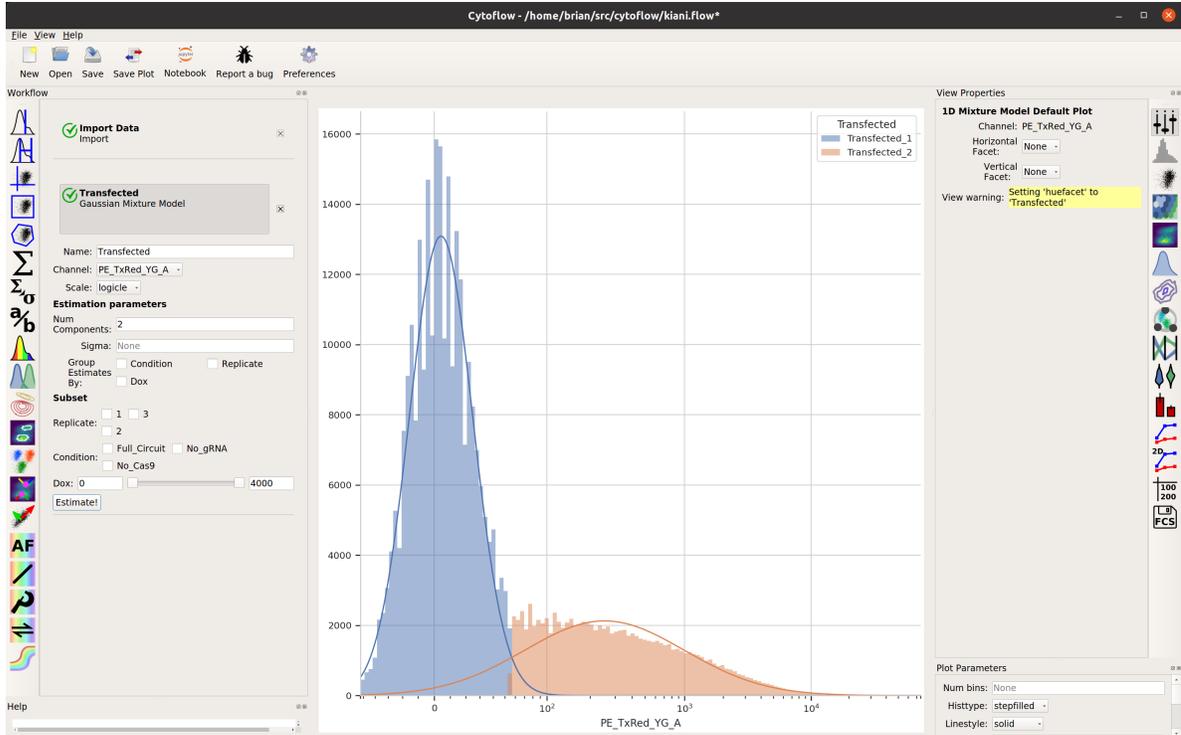

Looks good: the events with Transfected_2 == True are the cells in the transfected population. Let's make a statistic to see how many events are in each population:

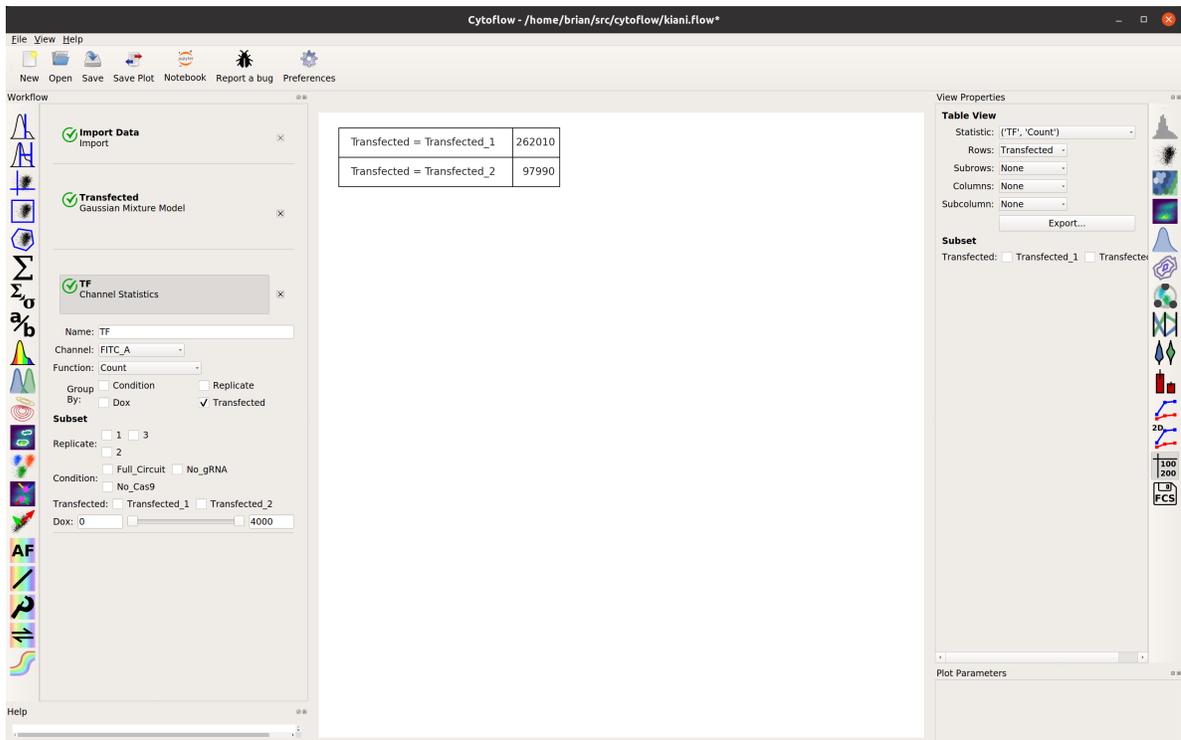

Examine the function of the gene circuit

Now, we can reproduce the bar chart in the publication by taking the output (EYFP, in the FITC-A channel) geometric mean of the positively transfected cells, split out by condition and Dox. Don't forget to look at just the transfected cells (using subset). We'll compute the geometric mean across circuit and Dox, and then split it out by replicate so we can compute an SEM.

Please note: This is a terrible place to use error bars. See:

<https://www.nature.com/nature/journal/v492/n7428/full/492180a.html>

and

<http://jcb.rupress.org/content/177/1/7>

for the reason why. I'm using them here to demonstrate the capability, rather than argue that you should perform your analysis this way.

- First, make a statistic with the overall geometric mean (by condition and Dox):

✔ **FITC_Mean**
 Channel Statistics ✕

Name:

Channel:

Function:

Group Condition Replicate

By: Dox Transfected

Subset

Replicate: 1 3
 2

Condition: Full_Circuit No_gRNA
 No_Cas9

Transfected: Transfected_1 Transfected_2

Dox:

- Next, make a statistic with the geometric mean broken out by condition, Dox and replicate.

✔ **FITC_By_Replicate** ✕
 Channel Statistics

Name:

Channel:

Function:

Group Condition **Replicate**

By: Dox Transfected

Subset

Replicate: 1 3
 2

Condition: Full_Circuit No_gRNA
 No_Cas9

Transfected: Transfected_1 Transfected_2

Dox:

- Finally, compute the geometric standard deviation of the mean:

FITC_SEM
Transform Statistic ✕

Name:

Statistic:

Function:

Group Condition Replicate

By: Dox


Subset

Replicate: 1 3
 2

Condition: Full_Circuit No_gRNA
 No_Cas9

Dox:


- Then plot them together:

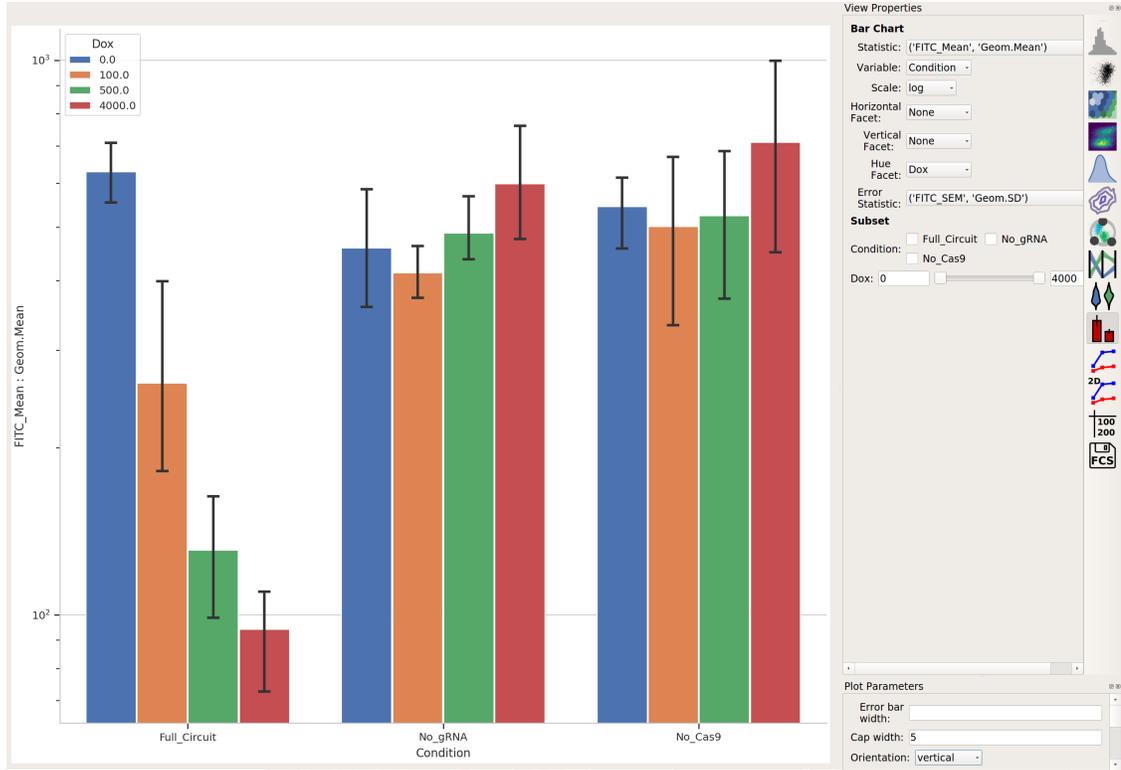

Further exploration

So that's useful, but maybe there's more in this data. We've noticed in our lab that gene circuit behavior frequently changes as copy number changes. Is this the case here? We can bin the data by transfection level, and see if the behavior changes as the bin number increases.

- Add a binning operation:

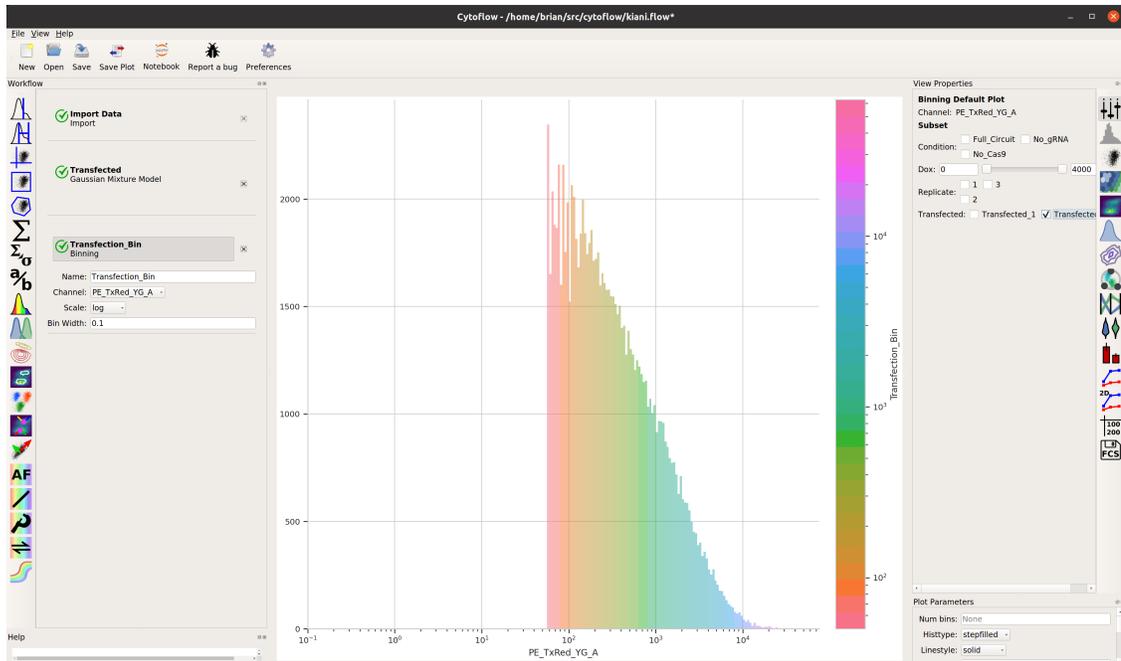

- Make a statistic that computes the mean FITC signal in each bin:

✔
FITC_mean
✕

Name:

Channel:

Function:

Group By:

| | |
|---|--|
| <input checked="" type="checkbox"/> Condition | <input type="checkbox"/> Transfected |
| <input checked="" type="checkbox"/> Dox | <input checked="" type="checkbox"/> Transfection_Bin |
| <input type="checkbox"/> Replicate | |

Subset

Transfection_Bin:


Dox:

Replicate: 1 2 3

Condition: Full_Circuit No_gRNA No_Cas9

Transfected: Transfected_1 Transfected_2

- Does it change as the bin number increases?

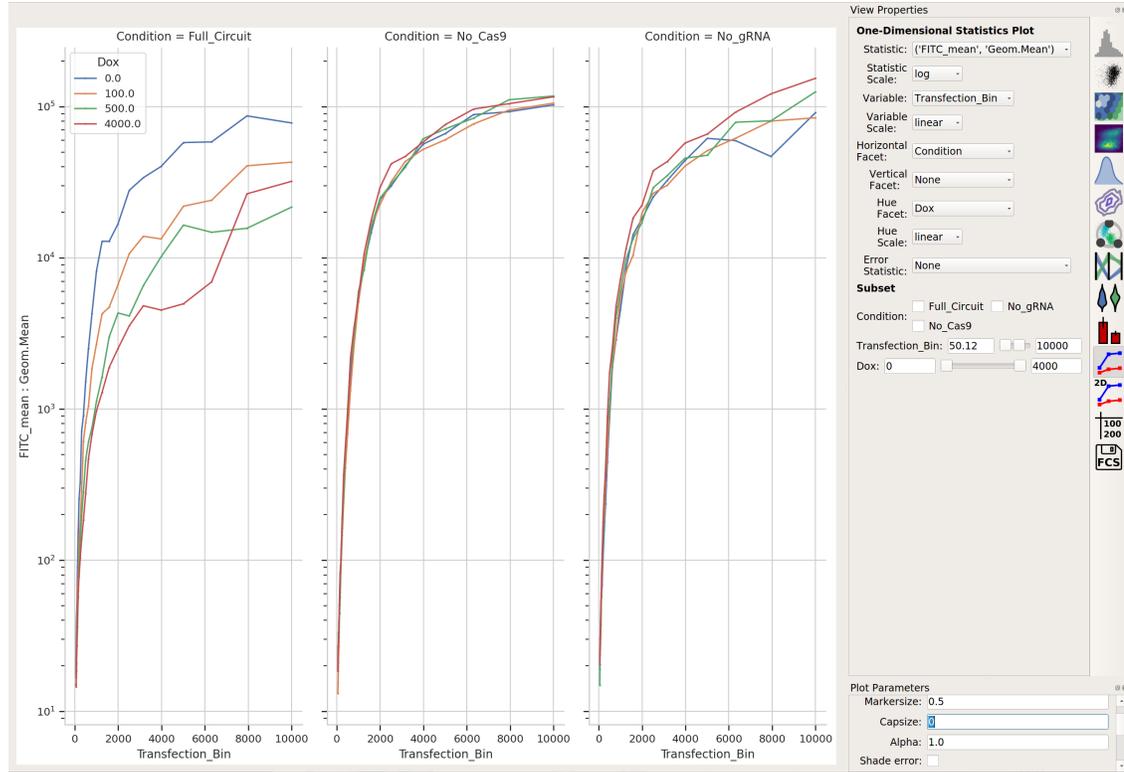

I would say it does!

2. *HOWTOs* are “recipes” – step-by-step guides to accomplish a particular task. They are a little higher-level than the tutorials.

5.1.6 HOWTO: Install Cytoflow


Windows

On Windows, you can use a graphical to install Cytoflow.


- (a) Browse to <https://cytoflow.github.io/>
- (b) Download the Windows binaries by clicking the button at the top of the page.



- (c) Even though I’ve signed the Windows app, Windows doesn’t recognize me as a “certified” developer. (It’s EXPENSIVE – even more so than becoming an Apple developer.) So you’ll get a Windows protected your PC message:

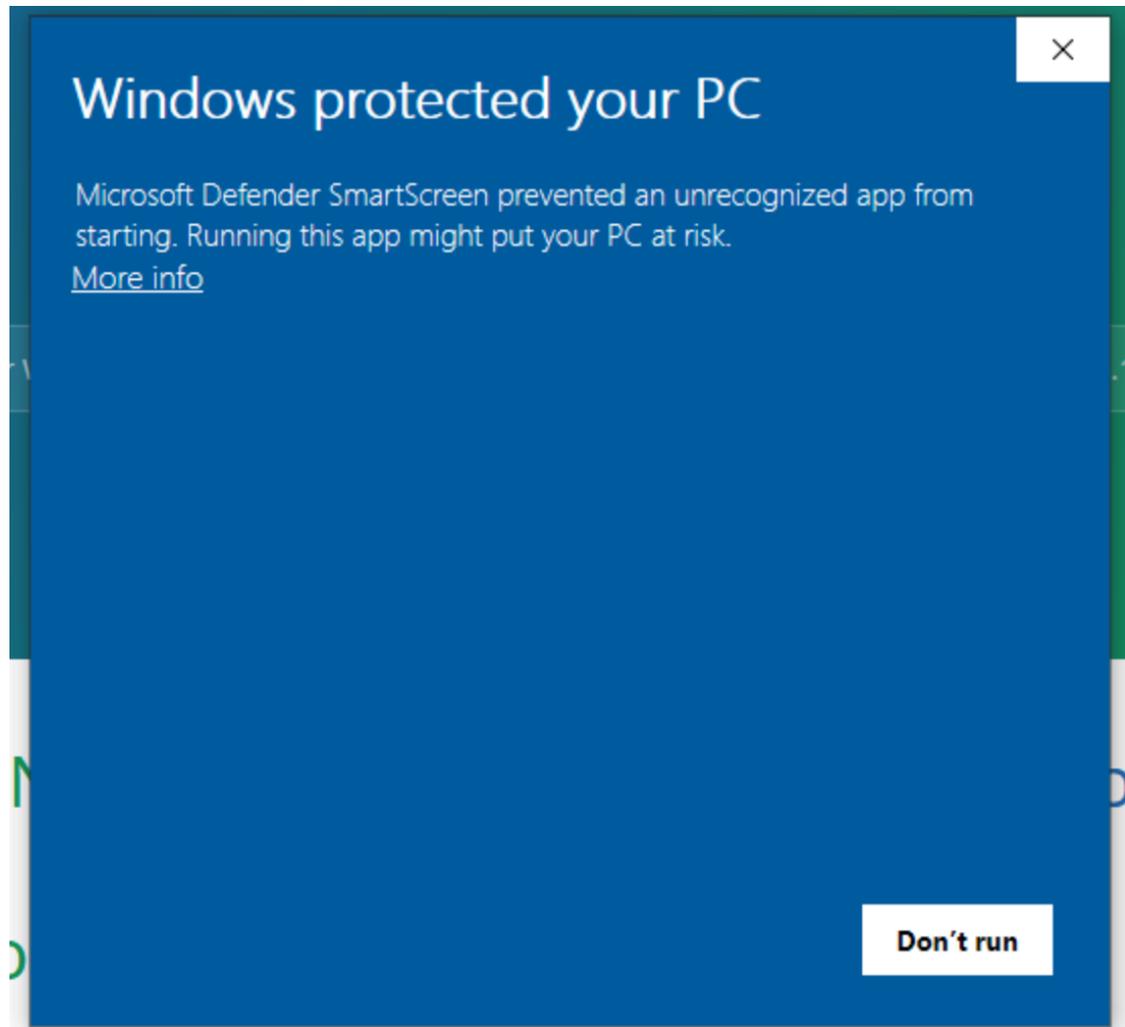

However, if you click “More information”, then you can verify that the installer is signed “Open Source Developer, Brian Teague” (that’s me!) and then click “Run anyway.”

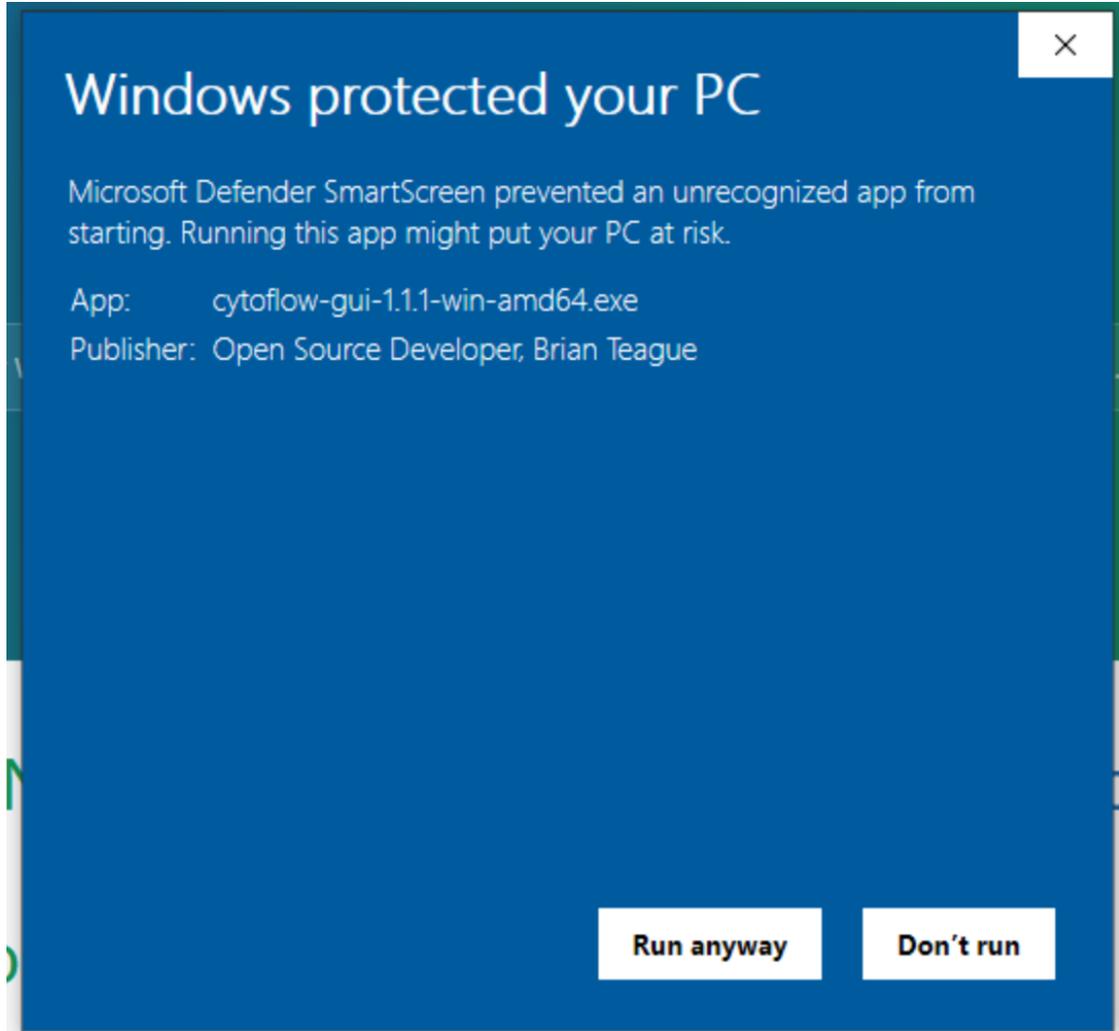


- (d) Follow the instructions in the installer. Once you've completed the installation, you should be able to find Cytoflow in your Start menu.


MacOS

These instructions were developed using OSX Catalina. I don't own a Mac or use one on a regular basis, so if these instructions could be improved, please let me know. Also, these binaries were almost certainly built on an Intel Mac, so they may not work on an A1 mac.


- (a) Browse to <https://cytoflow.github.io/>
- (b) Download the MacOS binaries by clicking the button at the top of the page.

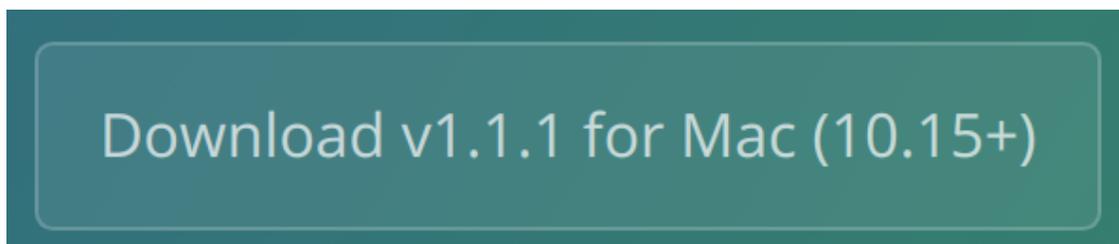

- (c) Using Finder, browse to your Downloads folder.

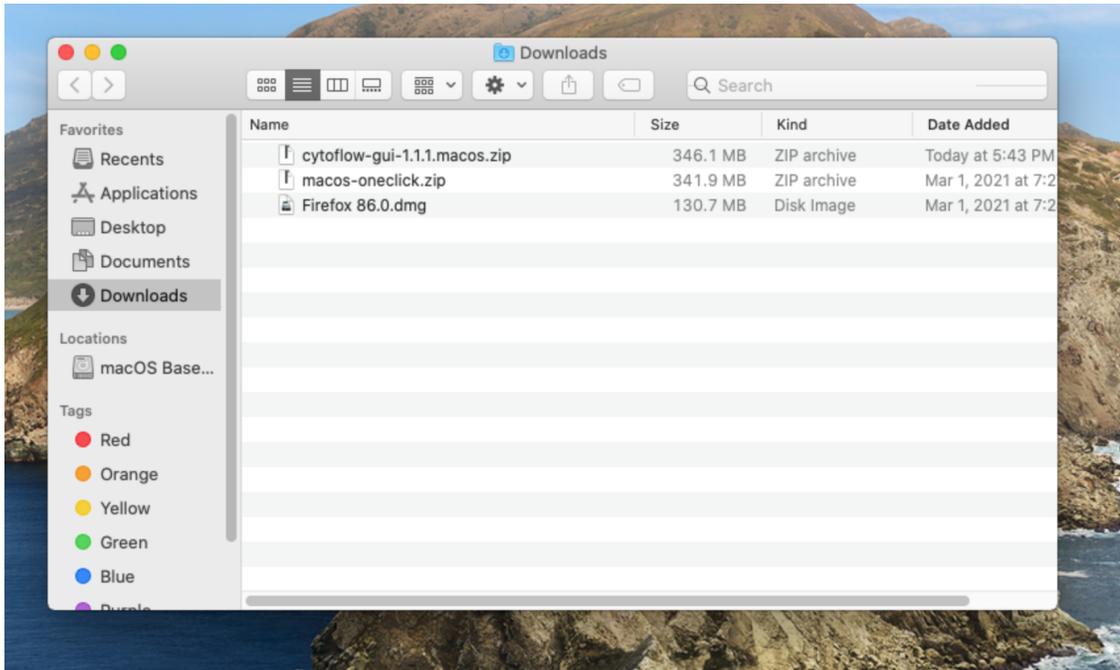

- (d) Right-click on the .ZIP file you downloaded and choose “Open With -> Archive Utility.”

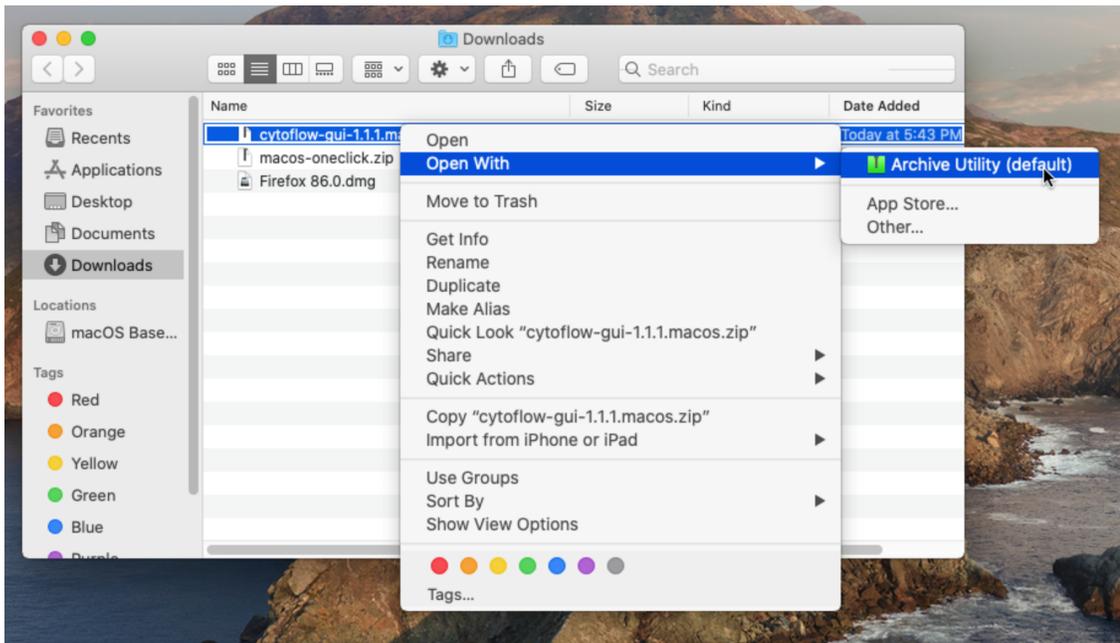


This will extract the application from the archive.

- (e) Double-click the new application. Unfortunately, I am not an Apple Developer, and because it costs like \$100 a year, I likely never will be. So, the first time you run the application, you will be presented with a screen like the following:



(f) To launch Cytoflow anyway, open System Preferences and select the Security and Privacy pane:

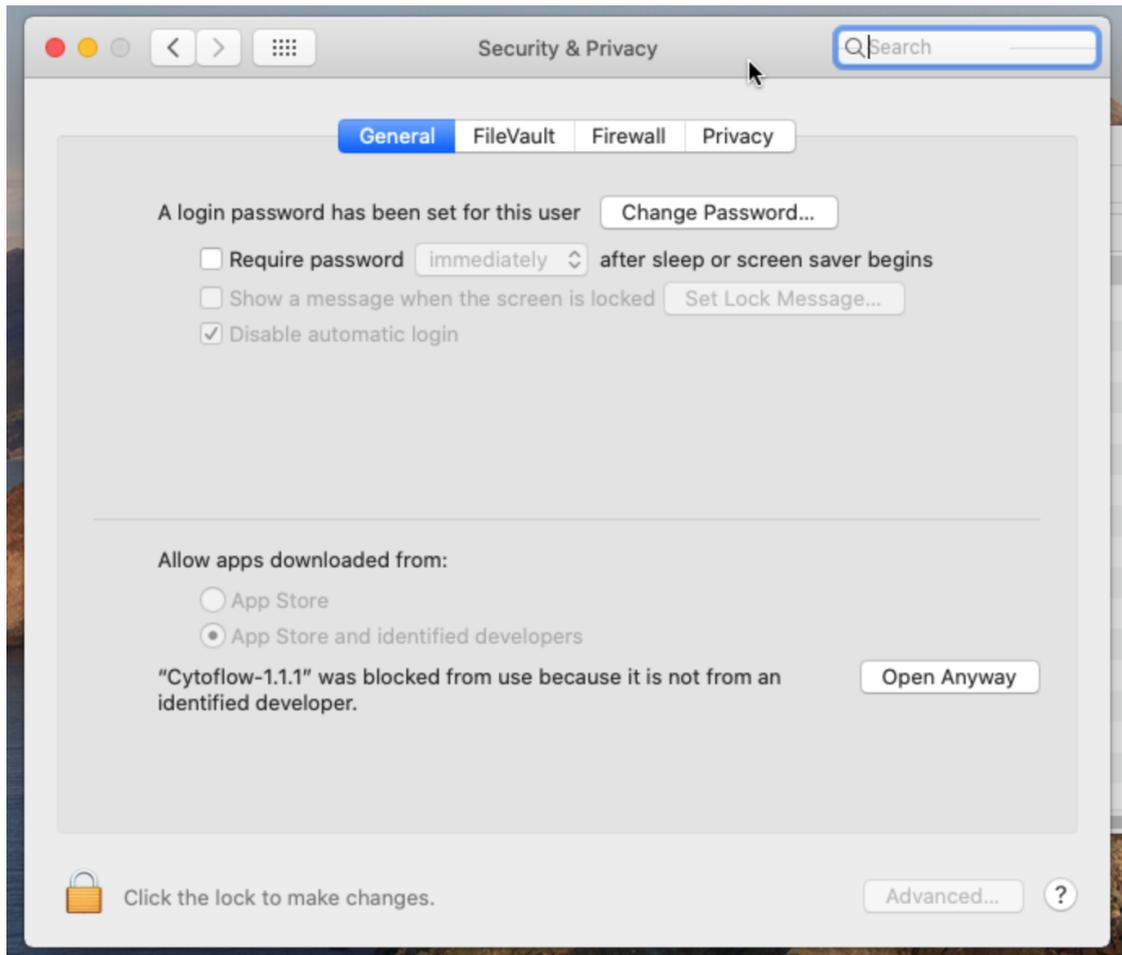

(g) Click the **Open Anyway** button. Because MacOS wants you to be EXTRA SURE, you will be asked one more time if you're sure you know what you're doing:



Click **Open** and after a moment, Cytoflow should launch.


- (h) (Optional) Move the Cytoflow application to somewhere else “permanent”, like the desktop or your Applications folder.

Linux


These instructions were developed on Ubuntu 20.04 – they should work on any modern Linux desktop system. However, they do require some comfort with the command line. If they don't work for you, or you are desperate for a point-and-click installer, please file a bug (or better, a patch or pull-request.)

This results in a program that you can launch from your desktop launcher – the “Programs” menu or similar.

- (a) Browse to <https://cytoflow.github.io/>
- (b) Download the Linux binaries by clicking the button at the top of the page.

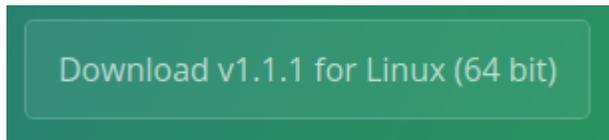

- (c) Extract the archive:

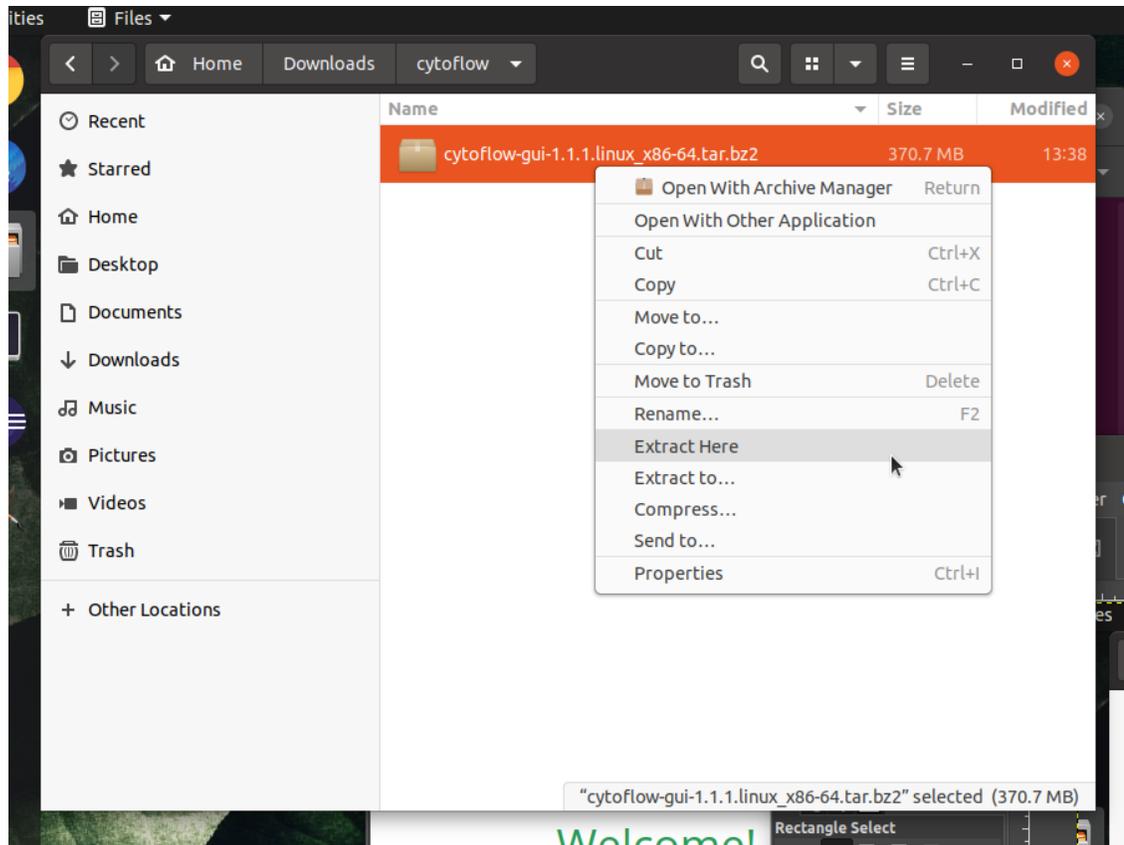

- (d) Move the resulting directory to a “permanent” home. I like to drop such things in `~/ .local/lib`, but you may prefer to put it elsewhere.

The remaining steps should be completed from the command line, starting in the directory containing the extracted files.

If you would like to launch Cytoflow from the command line, you can do so by navigating to this directory and running the executable `cytoflow`.

- (e) Update the location of the icon in the `.desktop` file by calling the `set_launcher_icon` script:

```
$ ./set_launcher_icon
```

- (f) Link `cytoflow.desktop` into the `~/ .local/share/applications` directory:

```
$ ln -s $PWD/cytoflow.desktop $HOME/.local/share/applications/cytoflow.desktop
```

- (g) Update the database of desktop entries:

```
$ update-desktop-database ~/.local/share/applications
```


5.1.7 HOWTO: Import an experiment from a table

Cytoflow can allow you to analyze complex flow cytometry experiments, with many tubes and many conditions. However, describing those tubes and conditions in the `Experimental Setup` dialog can be a pain – especially if you already have that information in a table somewhere.

Unfortunately, the way I’ve programmed that dialog box, you can’t (yet) copy-and-paste into it. Instead, Cytoflow allows you to *import* an experimental design from a CSV (comma-separated values) file, as long as it is formatted in the following way:

- The first row is a header; subsequent rows are tubes.
- The first column is the filename. (If you include paths, they must be either absolute paths, or relative to the location of the CSV file.)
- Each subsequent column is a variable. The entry in the header is the variable’s name, and in subsequent rows the column contains the variable value for that tube.
- There is no way to specify the type of variable. You can change the type once it’s been imported.

An example will make this clearer. Let’s say I have the following 24 files:

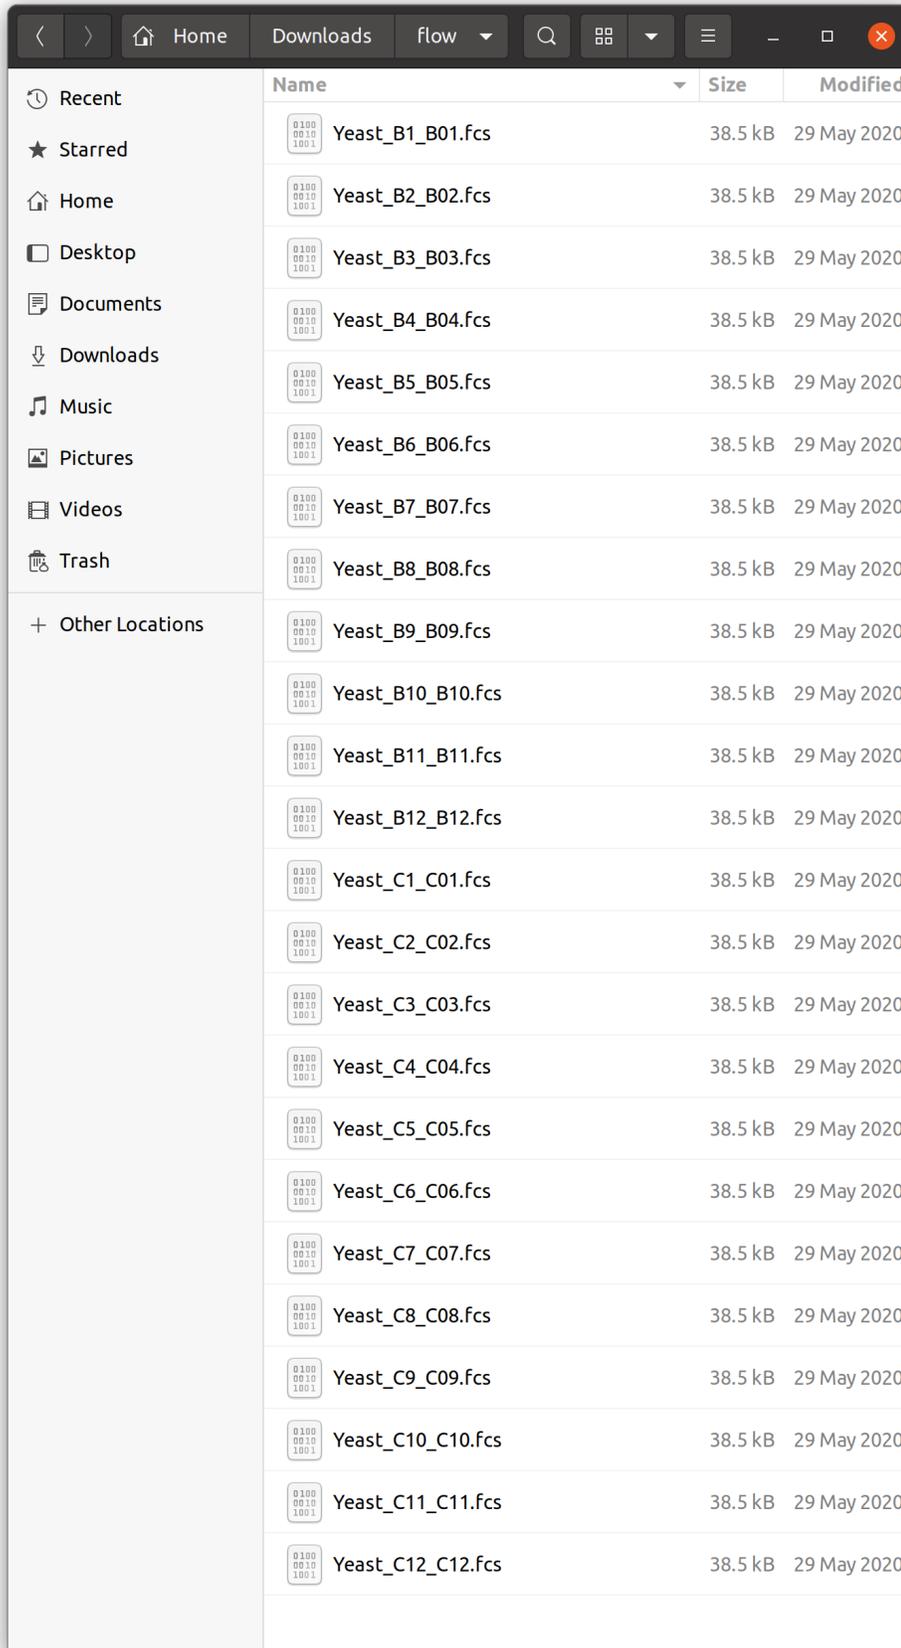


As is clear from the filenames, they came from two rows of a multiwell plate. Let's say that the two rows are replicates, and the amount of some drug I added increases across each row. I might open my favorite spreadsheet editor and create a table like so:

| | A | B | C |
|-----------|-------------------|------|-----------|
| 1 | | Drug | Replicate |
| 2 | Yeast_B1_B01.fcs | 0.1 | A |
| 3 | Yeast_B2_B02.fcs | 0.2 | A |
| 4 | Yeast_B3_B03.fcs | 0.5 | A |
| 5 | Yeast_B4_B04.fcs | 1 | A |
| 6 | Yeast_B5_B05.fcs | 2 | A |
| 7 | Yeast_B6_B06.fcs | 5 | A |
| 8 | Yeast_B7_B07.fcs | 10 | A |
| 9 | Yeast_B8_B08.fcs | 20 | A |
| 10 | Yeast_B9_B09.fcs | 50 | A |
| 11 | Yeast_B10_B10.fcs | 100 | A |
| 12 | Yeast_B11_B11.fcs | 200 | A |
| 13 | Yeast_B12_B12.fcs | 500 | A |
| 14 | Yeast_C1_C01.fcs | 0.1 | B |
| 15 | Yeast_C2_C02.fcs | 0.2 | B |
| 16 | Yeast_C3_C03.fcs | 0.5 | B |
| 17 | Yeast_C4_C04.fcs | 1 | B |
| 18 | Yeast_C5_C05.fcs | 2 | B |
| 19 | Yeast_C6_C06.fcs | 5 | B |
| 20 | Yeast_C7_C07.fcs | 10 | B |
| 21 | Yeast_C8_C08.fcs | 20 | B |
| 22 | Yeast_C9_C09.fcs | 50 | B |
| 23 | Yeast_C10_C10.fcs | 100 | B |
| 24 | Yeast_C11_C11.fcs | 200 | B |
| 25 | Yeast_C12_C12.fcs | 500 | B |

I'll save this as a CSV file *in the same directory as my .FCS files*. When I import this file in the Experimental

Setup dialog, it looks like this:

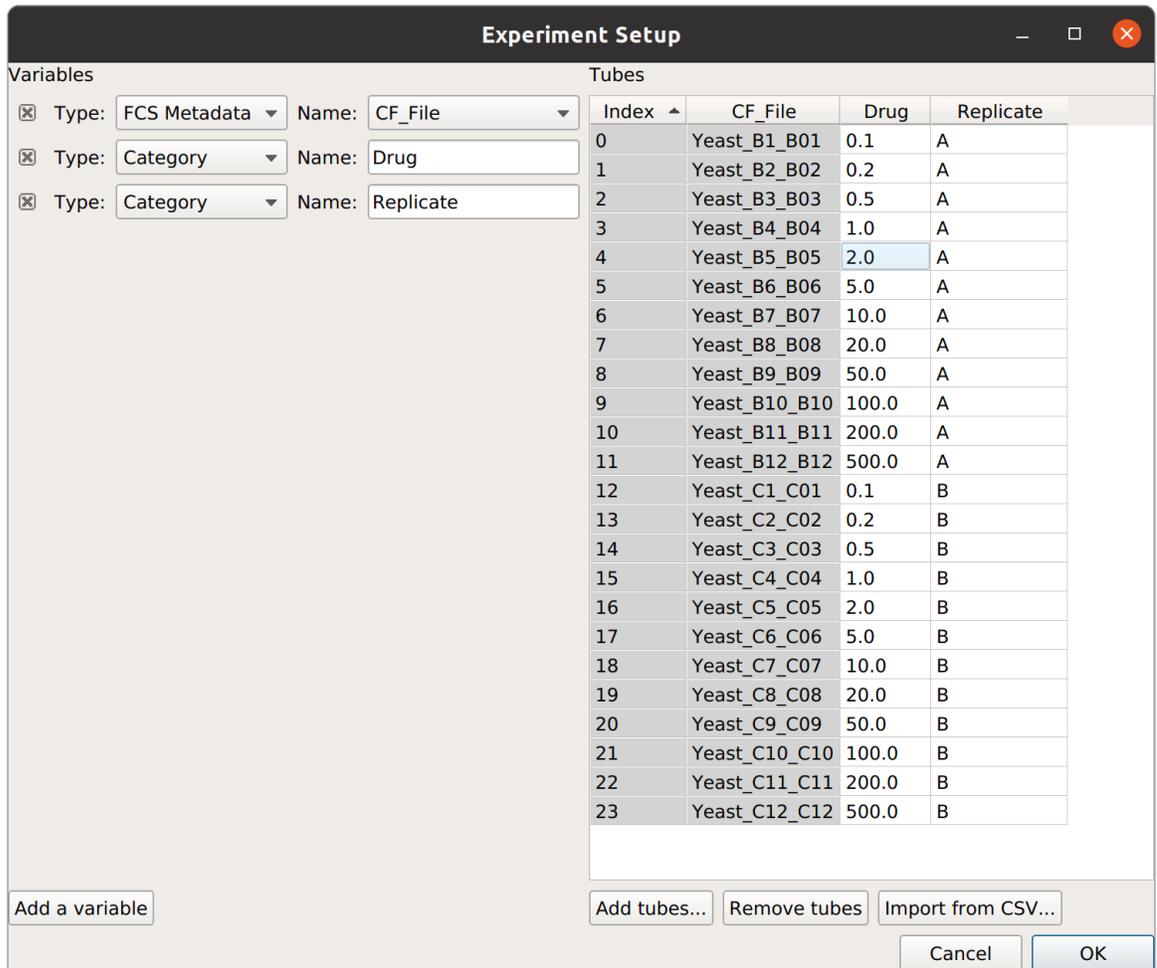



It is important to note that, by default, everything is imported as a **Category** variable. In this case, we obviously want Drug to be numeric, so I can pull down the “Type” selector for that variable and change it to “Numeric”. Similarly, if your table has TRUE and FALSE for values, “TRUE” and “FALSE” will be imported as categories, but you can change it to a True/False variable by changing the variable type.

5.1.8 HOWTO: Export plots


I’m really proud of the plots you can produce with Cytotflow, and I hope that you will find them nice enough to use in your talks, posters and publications! To help you do so, it’s easy to export the current plot to a variety of file formats.

Procedure


- (a) Create the plot you want to save. Here, I've got a set of histograms.

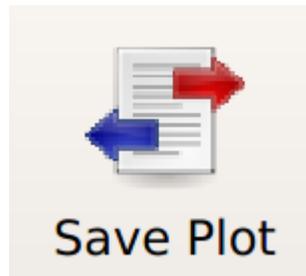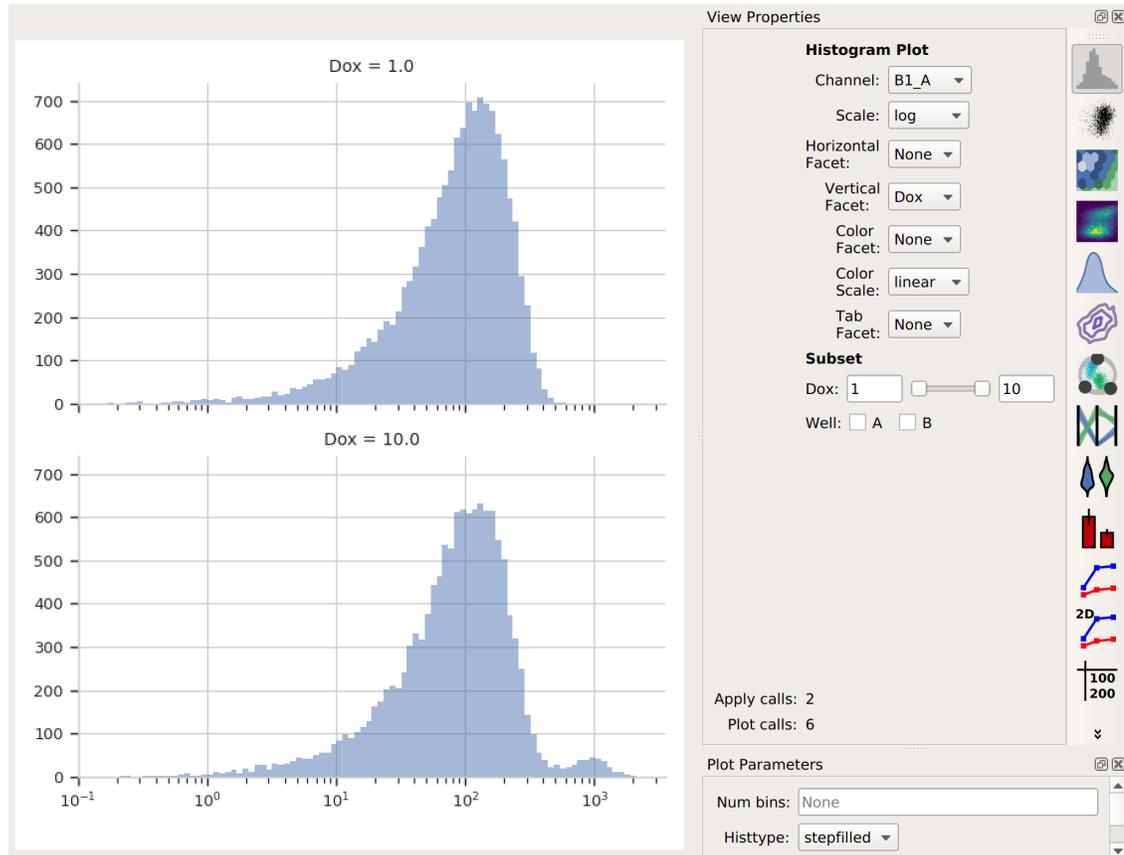

- (b) Click the **Save Plot** button in the top toolbar:
- (c) The **Save Plot** view will open. In the center panel, you'll see the same plot – but on the right, you'll see a pane with a bunch of visual style options you can adjust. (The eagle-eyed among you will recognize this as the same panel that shows up below the view parameters pane in the main application.)

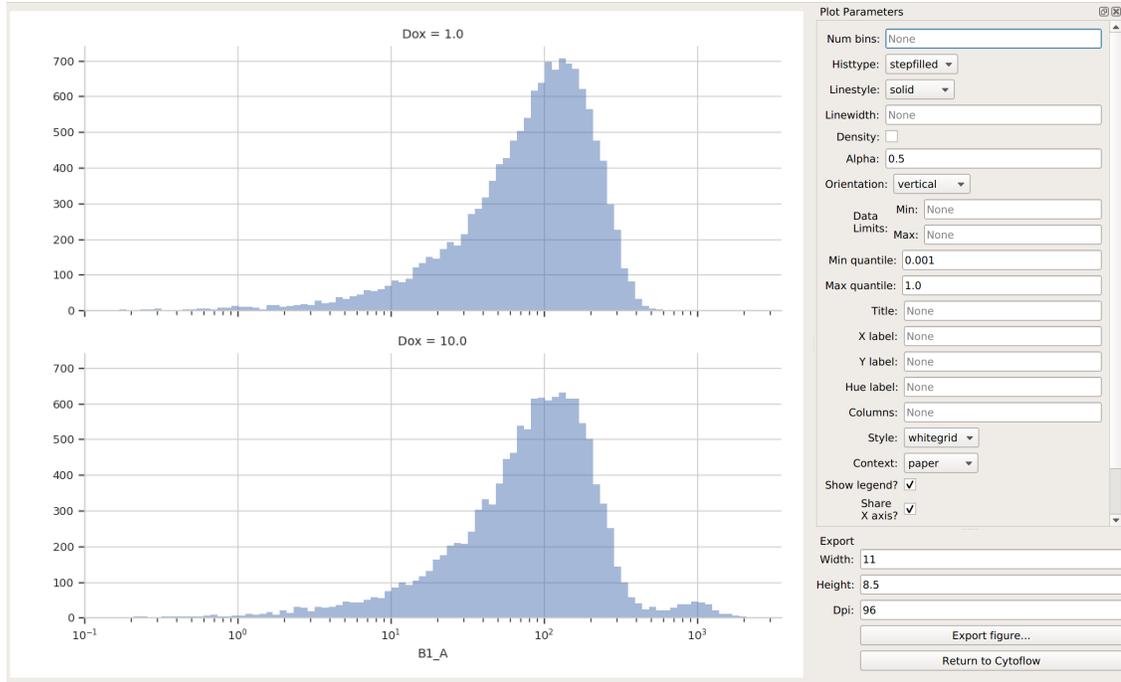

(d) Adjust the display options to your liking. One particular one to pay attention to is the **Context** setting, which changes the relative size of the annotations (axes, labels, legend, etc) relative to the main plot. Here, I've changed it to *talk* and set the plot to a horizontal layout instead of a vertical one.

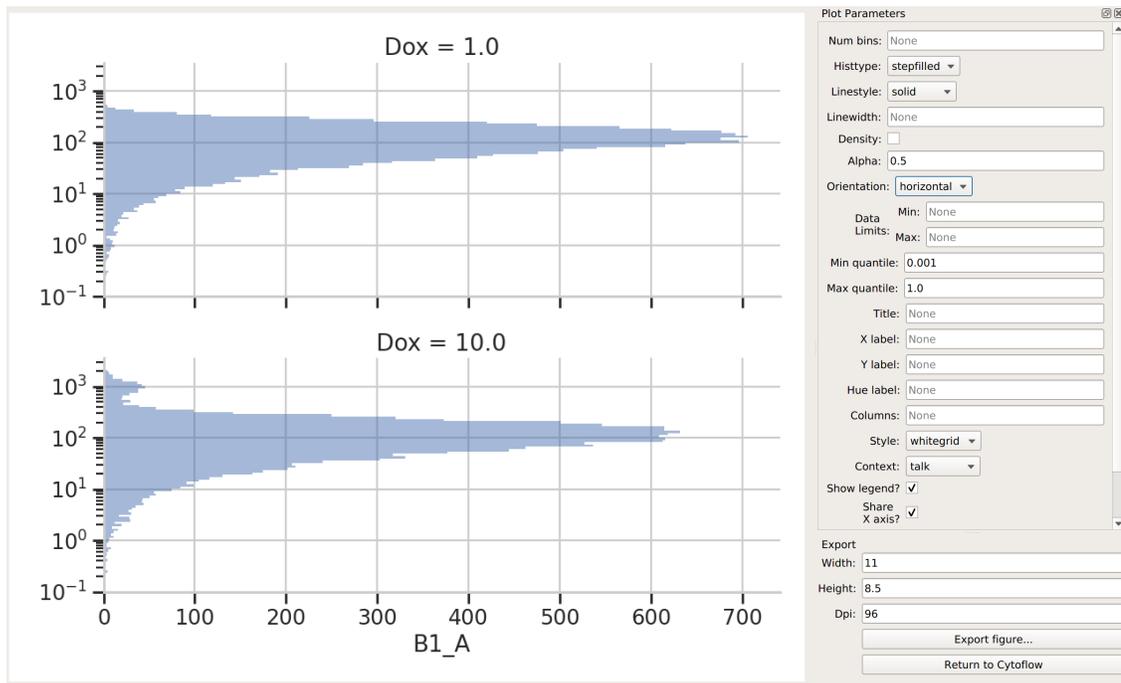

(e) Set the *width*, *height*, and *resolution* of the final image. (Width and height are in inches, and resolution is in DPI – dots per inch.)

Export

Width:

Height:

Dpi:

- (f) Click **Export figure...** to open your system’s usual **Save As** dialog box. Pay *particular attention* to the file *type* – it’s here where you can choose to save as, say, a PNG or a PDF or a TIFF. Which formats are available to you are system-dependent, but if you need a raster image (to put in a talk, for example), I suggest PNG, while if you need a vector image (to submit with a manuscript, for example), I suggest PDF or EPS.
- (g) Once you’re done, click **Return to Cytoflow** to return to the main application.


5.1.9 HOWTO: Add error bars to a statistics plot

While statistics plots of things like the *geometric mean* are useful, we often want to add some sort of “error bars” to that plot as well.


For example, consider the following experiment (taken from the *Kiani et al example*), in which we have two treatment levels that we’ve measured in triplicate:

| Index | CF_File | Dox | Replicate |
|-------|---------------------|--------|-----------|
| 0 | Specimen_002_A1_A01 | 0.0 | 1 |
| 1 | Specimen_002_A4_A04 | 4000.0 | 1 |
| 2 | Specimen_002_A1_A01 | 0.0 | 2 |
| 3 | Specimen_002_A4_A04 | 4000.0 | 2 |
| 4 | Specimen_002_A1_A01 | 0.0 | 3 |
| 5 | Specimen_002_A4_A04 | 4000.0 | 3 |


Note that, as per the example, I’m only looking at cells that are already fluorescing in the **PE_TxRed_YG** channel, which is my transfection marker.

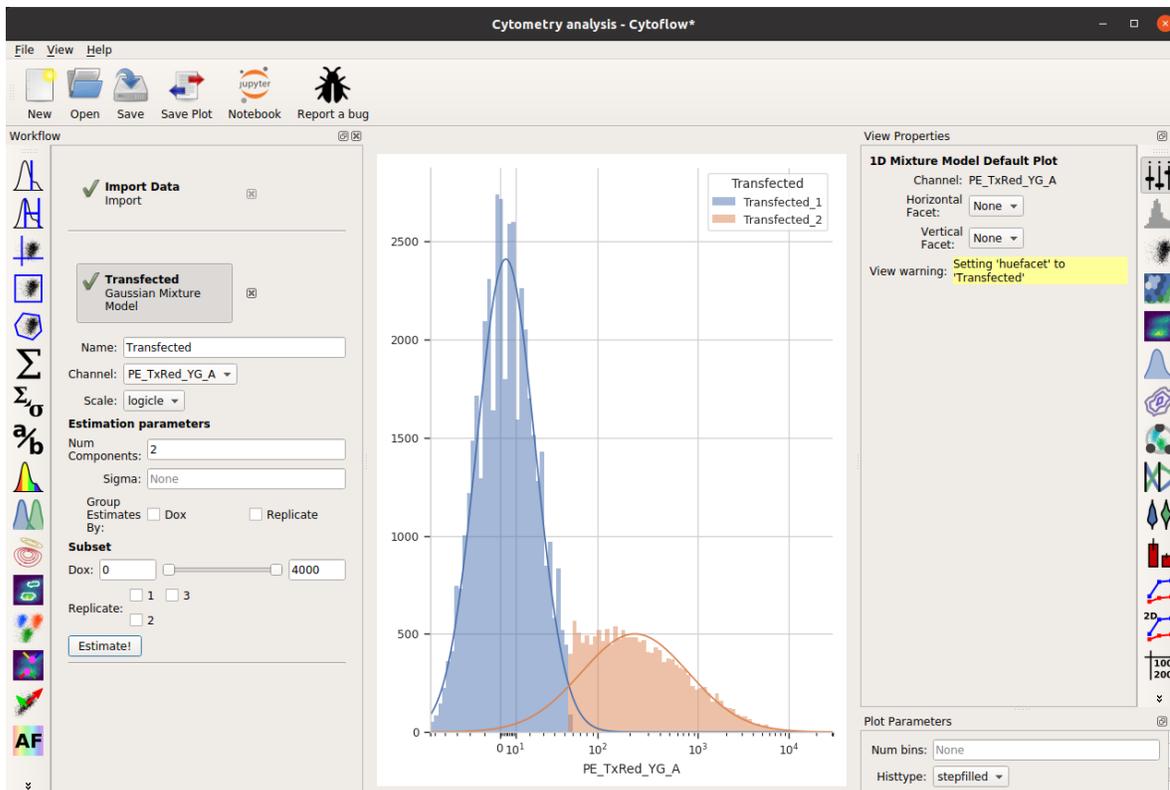

Let's look at how the **FITC_A** channel changes across my conditions and replicates:

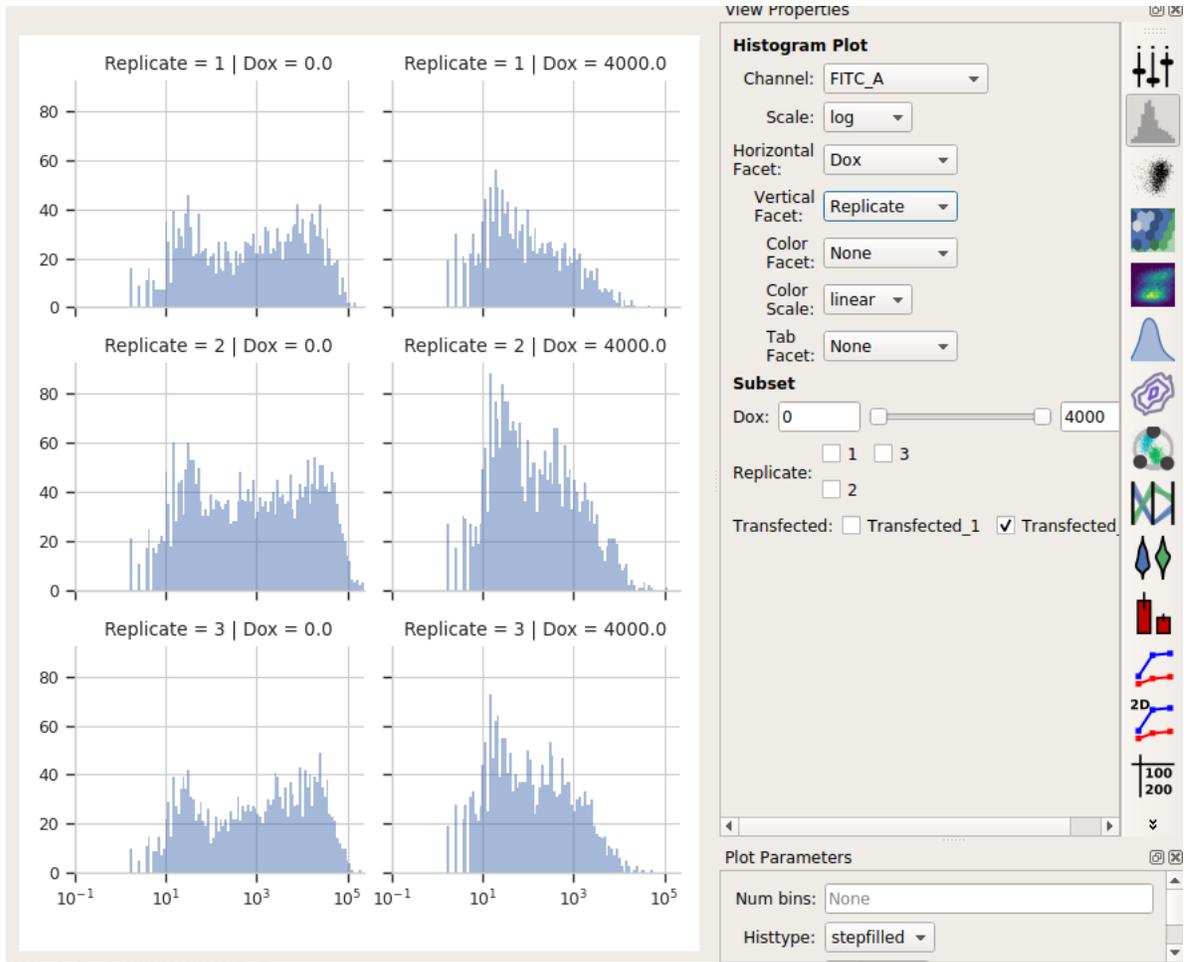


It's clear from the histograms that the **Drug == 0** populations have a much higher fluorescence in the **FITC_A** channel than the **Drug = 4000.0** condition. We can see that quantitatively by creating a **Geom.Mean** statistic:

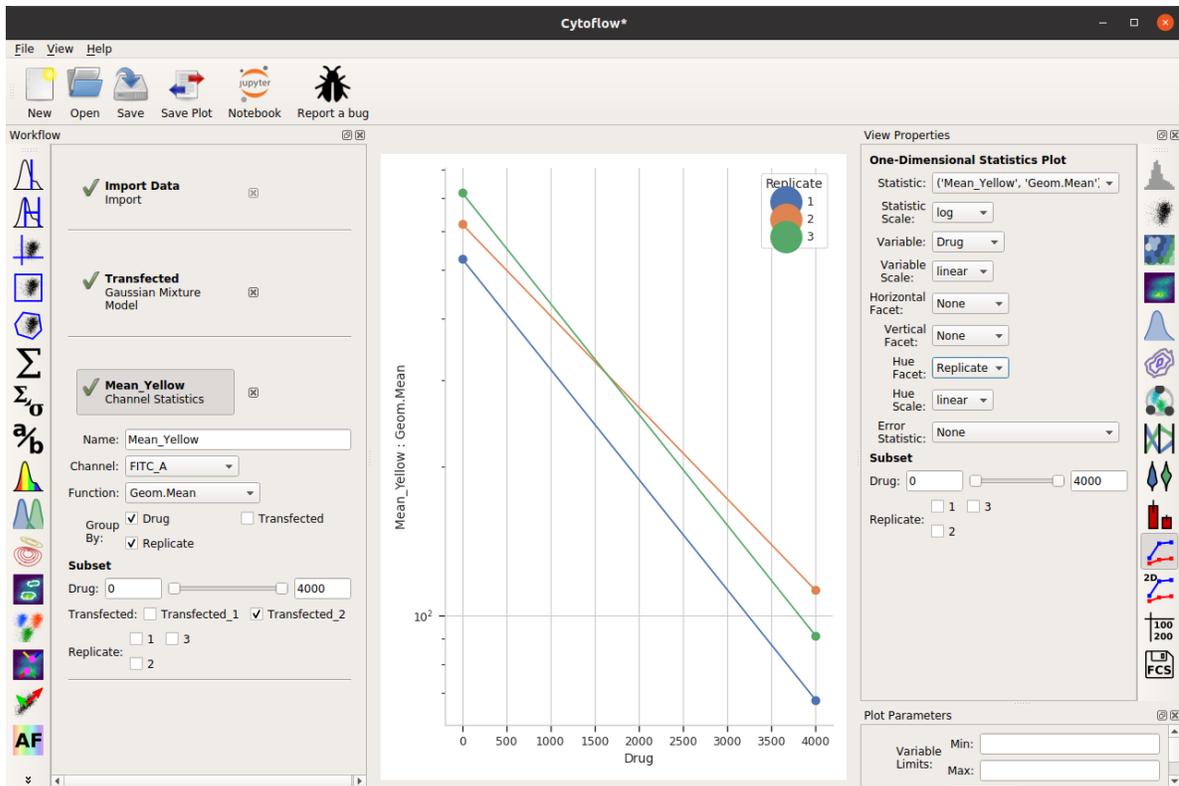


When we compute the geometric mean of all six different subsets (two drugs and three replicates), there's a definite decrease. Our goal is to also show a visual representation of the amount of variation between the three replicates.

Before that, though, there's a subtle question to answer – do we want to take a “mean of means” – that is, the geometric mean of these three means? Or do we want a geometric mean of *all* of the underlying data? I'm going to choose the first approach, but I encourage you to think carefully about the which is more appropriate in your own case.

So I'll add a **Transform Statistic** operation, to take the mean-of-geometric-means:

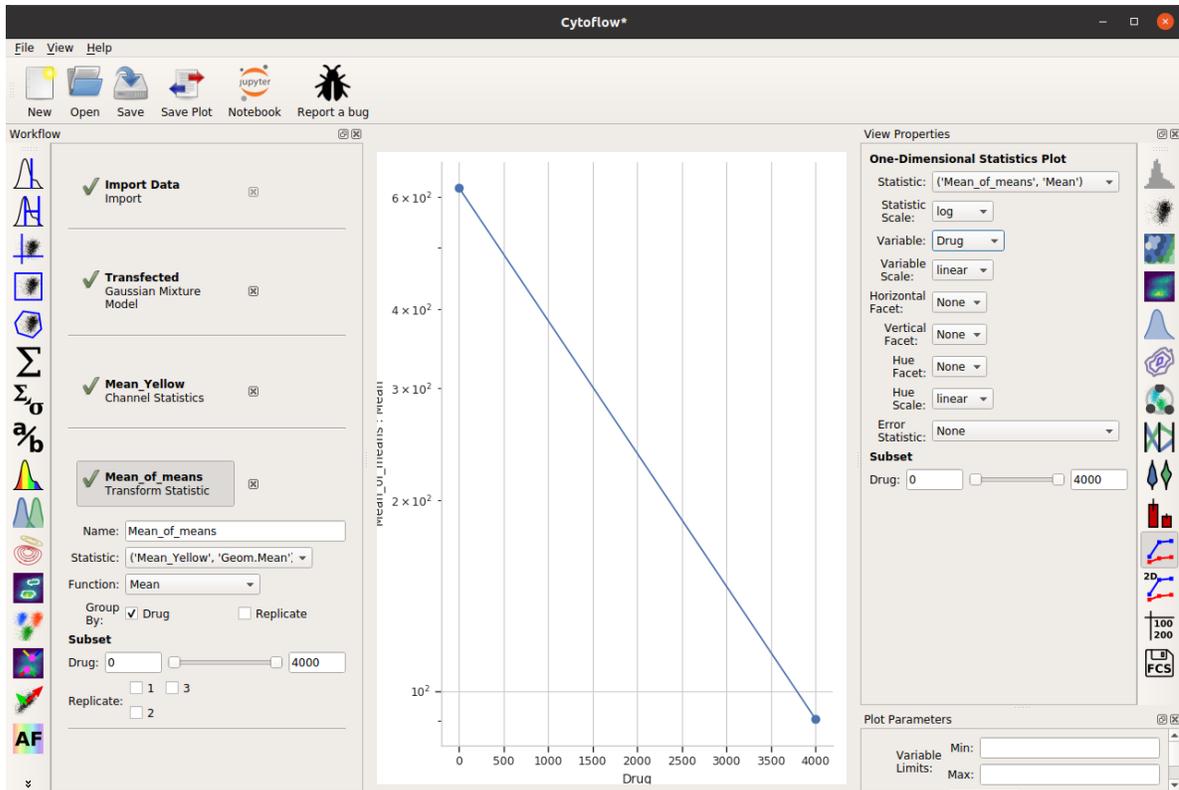


And now, to add error bars, I need *another* statistic. This will also be a **Transform Statistic** operation, but this time to compute the standard deviation of the means:

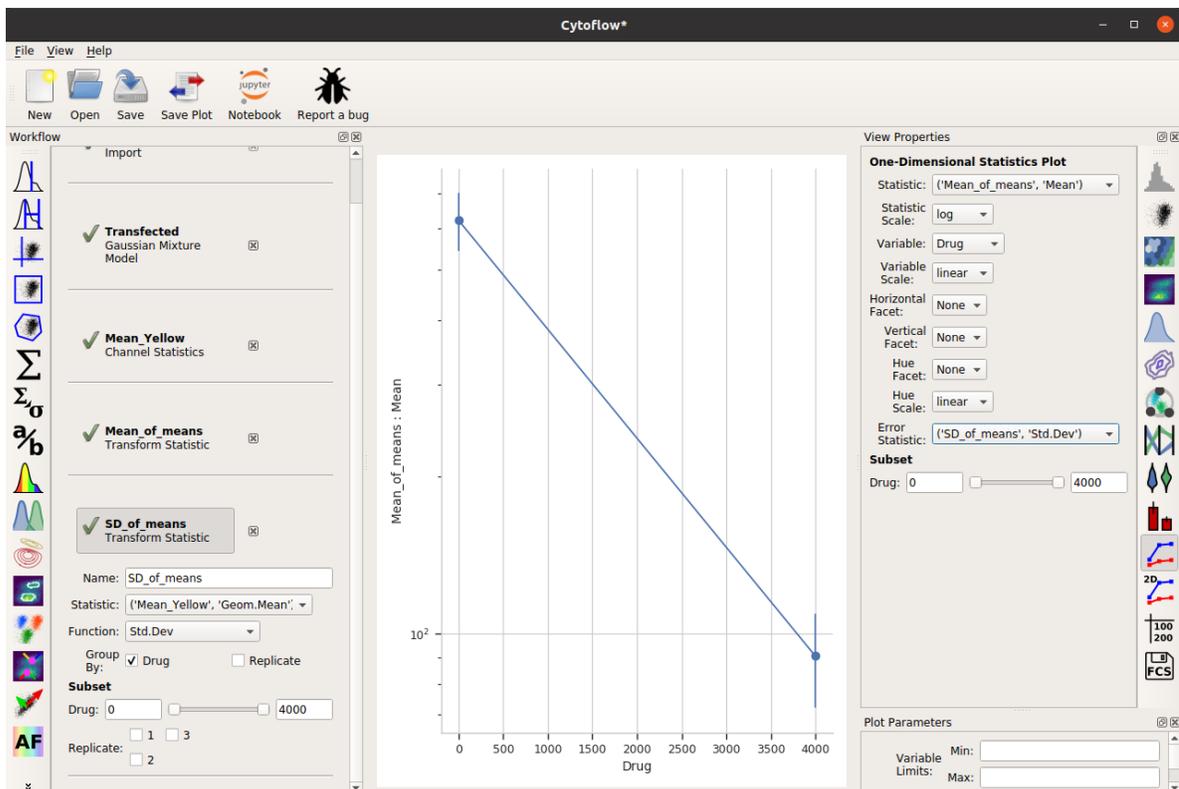


Two important things to note about the above image. First, I have used the same **Group by:** settings as the **Mean_of_means** operation. And second, when I set up my **One-dimensional statistics plot**, I chose the new statistic as the **Error statistic**.

One last thing – the “default” visual properties of those error bars are just vertical lines. This is useful if you’ve got a lot to visualize, but less so if it’s just a few points. Many people like “end caps” on their error bars – to get those, change the **Capsize** option in the **Plot Parameters** pane to something greater than 0.

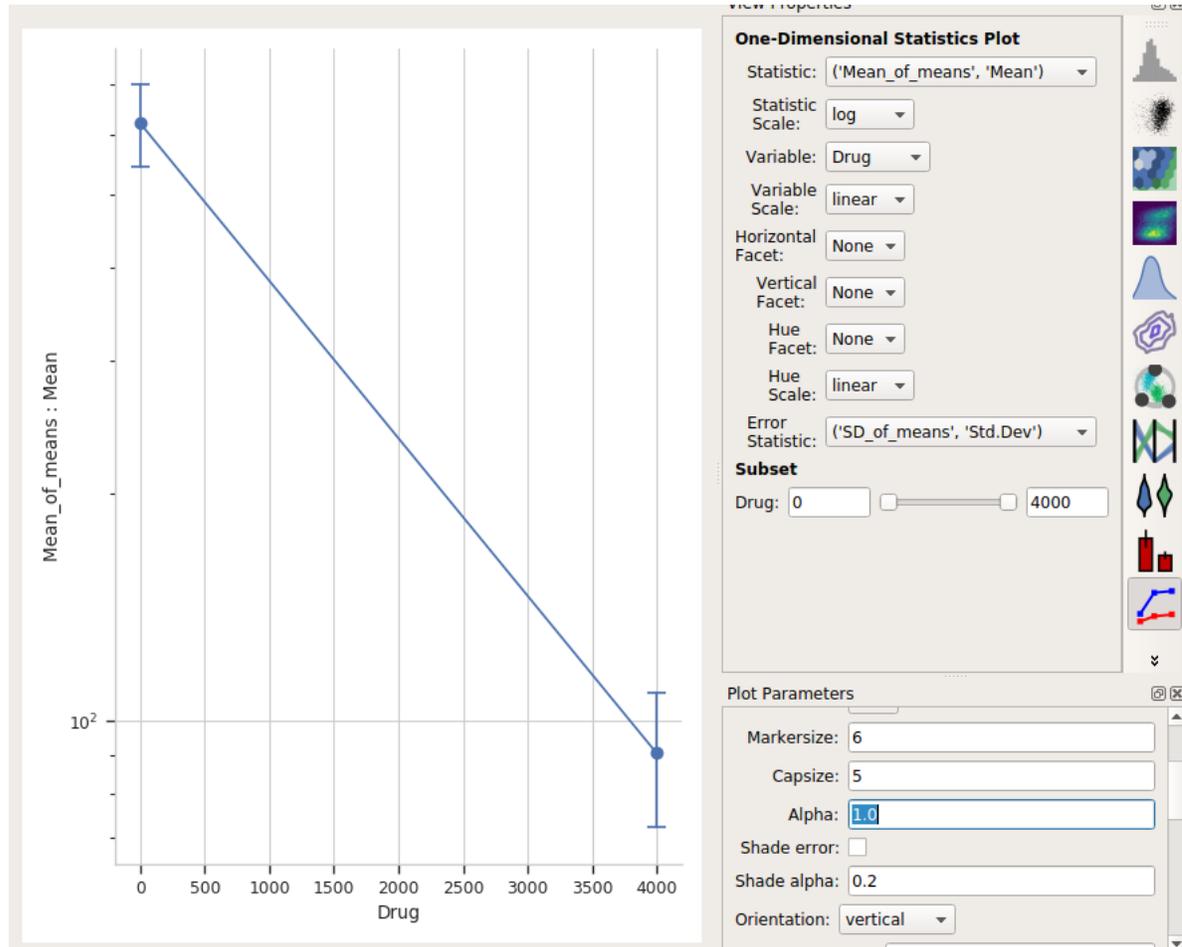

Alternately, choose **Shade error** to get a “shaded” error display. This one is particularly nice if you have lots of error bars.

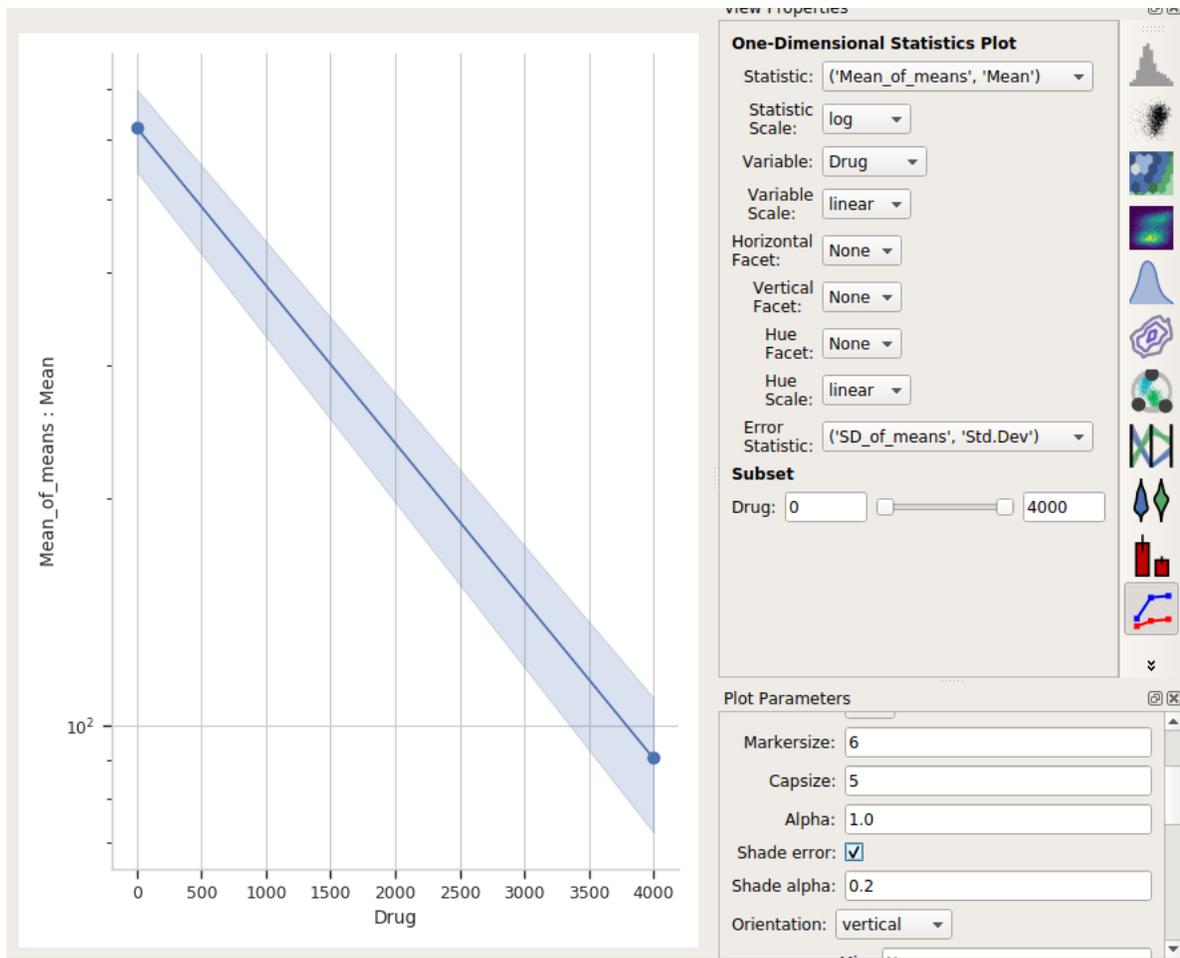

One final thing – the use of error bars is a subtle topic – much more so than most biologists grasp. For a useful overview of the issues at play, please see:

[Know when your numbers are significant](#)

and

[Error bars in experimental biology](#)

5.1.10 HOWTO: Use different gates for different subsets of data

Sometimes, it makes sense to apply different gates to different subsets of your data set. It's particularly useful when we're estimating the gate parameters from the data. For example, consider the following data (taken from the **Yeast Dosage-Response Curve** tutorial.)

The screenshot displays the Cytotflow software interface. The top window is titled "Experiment Setup" and contains two main sections: "Variables" and "Tubes".

Variables:

- Variable 1: Type: FCS Metadata, Name: CF_File
- Variable 2: Type: Number, Name: IP

Tubes:

| Index | CF_File | IP |
|-------|---------------|------|
| 0 | Yeast_B4_B04 | 2.0 |
| 1 | Yeast_B12_B12 | 0.2 |
| 2 | Yeast_C8_C08 | 0.02 |

Buttons at the bottom of the "Experiment Setup" window include "Add a variable", "Add tubes...", "Remove tubes", "Import from CSV...", "Cancel", and "OK".


The main window is titled "Cytometry analysis - Cytotflow*" and shows a workflow on the left and a histogram plot in the center. The histogram plot displays three histograms of FITC_A vs IP, corresponding to the three tubes defined in the "Experiment Setup" window:

- Top histogram: IP = 0.02
- Middle histogram: IP = 0.2
- Bottom histogram: IP = 2.0


The x-axis is labeled "FITC_A" and has a logarithmic scale with major ticks at 10^2 , 10^3 , and 10^4 . The y-axis represents frequency, ranging from 0 to 80. The "View Properties" panel on the right shows the "Histogram Plot" settings, including Channel: FITC_A, Scale: logicle, and Subset: IP: 0.02 to 2.0. The "Plot Parameters" panel shows Num bins: None and Histtype: stepfilled.

Imagine that we want to use the *1D Gaussian operation* to choose the events from the center ± 0.5 standard deviation this data. It's clear that a gaussian model that fits the first data set won't fit the second or third!


To address this problem, most data-driven gates have a **Group estimates by** option. Set this to a condition, and the operation will subdivide the data by that condition and estimate *separate model parameters for each subset*. For example, if we choose **IP** as the group-by condition:

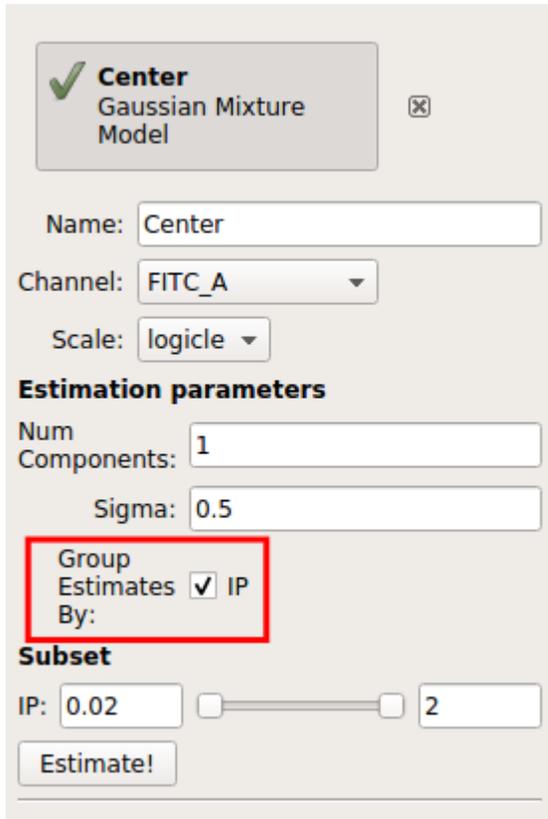

Then the operation will give us three different estimates, one for each value of **IP**:

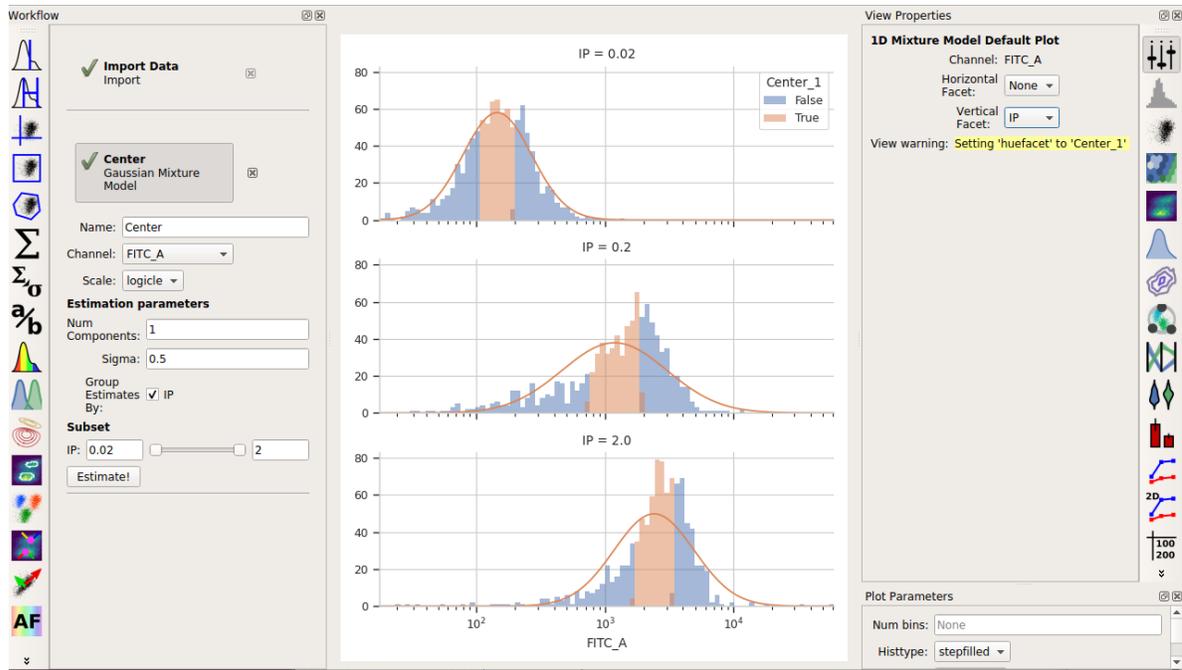


And of course, don't forget that the operation also makes a new **statistic** containing the means:

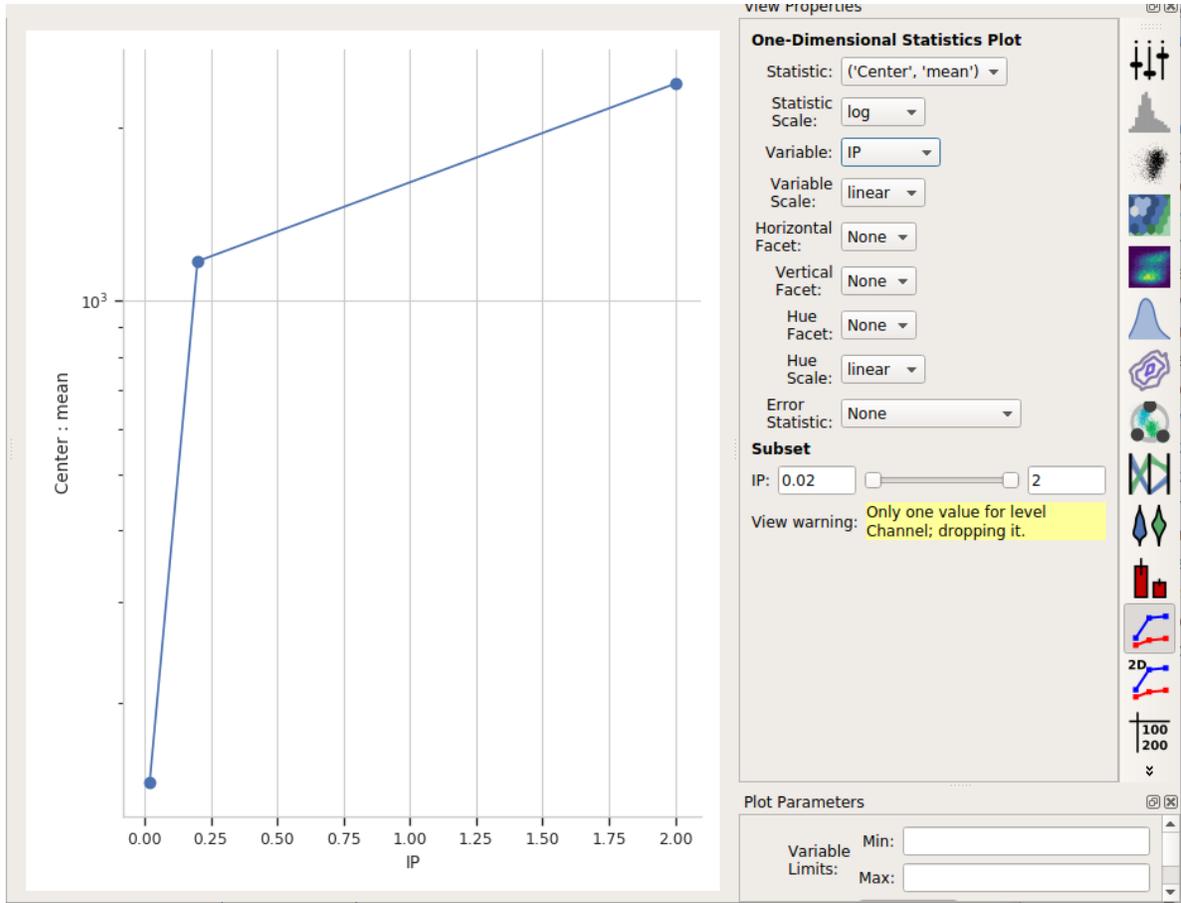

5.1.11 HOWTO: Compensate for bleedthrough

One common issue in flow cytometry is the fact that spectrally adjacent channels often overlap. For example, if I'm trying to measure a green fluorophore like FITC, and a yellow fluorophore like PE, a significant amount of FITC fluorescence will also be picked up by my PE channel, as demonstrated by the screenshot below (from the BD Spectrum Viewer)

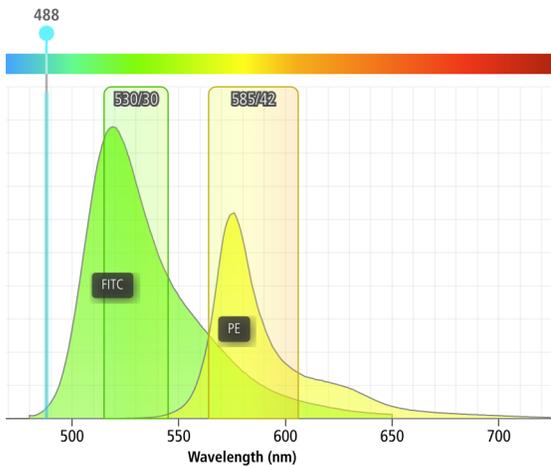

As you can see, something like 12% of the FITC fluorescence ends up in the PE channel!

Fortunately, a little linear algebra can fix this problem, and Cytoflow makes it easy. However, you'll need to run a few controls:

- A *blank* control – one with your cells but without any fluorophores. This will let us measure the “background” fluorescence (or autofluorescence) of the samples.
- A set of *single-color* controls – for each fluorophore, one control that is stained with (or expresses) only that fluorophore and no others. These let us measure how much signal “bleeds through” into the non-target channels. These controls should be as bright as (but no brighter than) your brightest experimental sample.

Warning: These controls must be collected using the SAME instrument settings as your experimental samples. It's really best if they're collected at the SAME TIME as your experimental samples – even properly calibrated instruments are known to drift substantially between days, or even over the course of a single day. And yes, that means you *really should* run these controls for *every* experiment. If you'd like a way to correct for day-to-day variability, see *HOWTO: Use beads to correct for day-to-day variation*.

Procedure

- (a) Collect the controls listed above.
- (b) Import your data into Cytoflow. Do *not* import your control samples (unless they're part of the experiment.) In the example below, we'll have three fluorescence channels – *Pacific Blue-A*, *FITC-A* and *PE-Tx-Red-YG-A* – in addition to the forward and side-scatter channels.

✓

Import Data

Import

✕

Channels

✕ FITC-A -->

✕ FSC-A -->

✕ PE-Tx-Red-YG-A -->

✕ Pacific Blue-A -->

✕ SSC-A -->

Reset channel names

Events per sample:

Samples: 4


Events: 40000

Set up experiment...

Import!


(c) (Optional but recommended) - use a gate to filter out the “real” cells from debris and clumps. Here, I’m using a polygon gate on the forward-scatter and side-scatter channels to select the population of “real” cells.

(I've named the population "Cells" – that's how we'll refer to it subsequently).

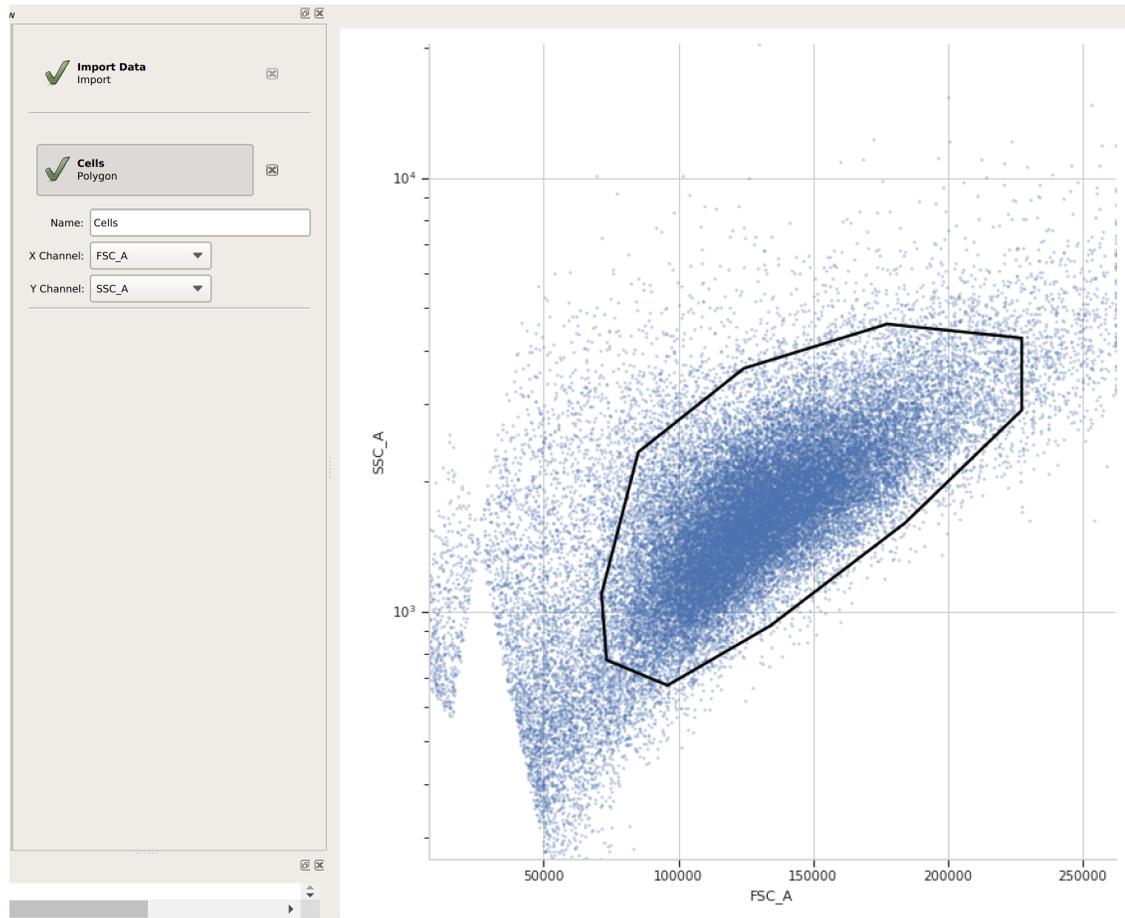


- (d) Add the **Autofluorescence** operation (it's the  button). Specify the file containing the data from the blank control, choose the channels you want to apply the correction to, and (if you followed the optional step above) choose the subset that you want to use to estimate the correction from. Once you're done, click **Estimate!**

The diagnostic plot shows a histogram of the fluorescence values from the blank file, and the red line indicates their median. This is the amount of "autofluorescence" that will be subtracted from your experimental data.

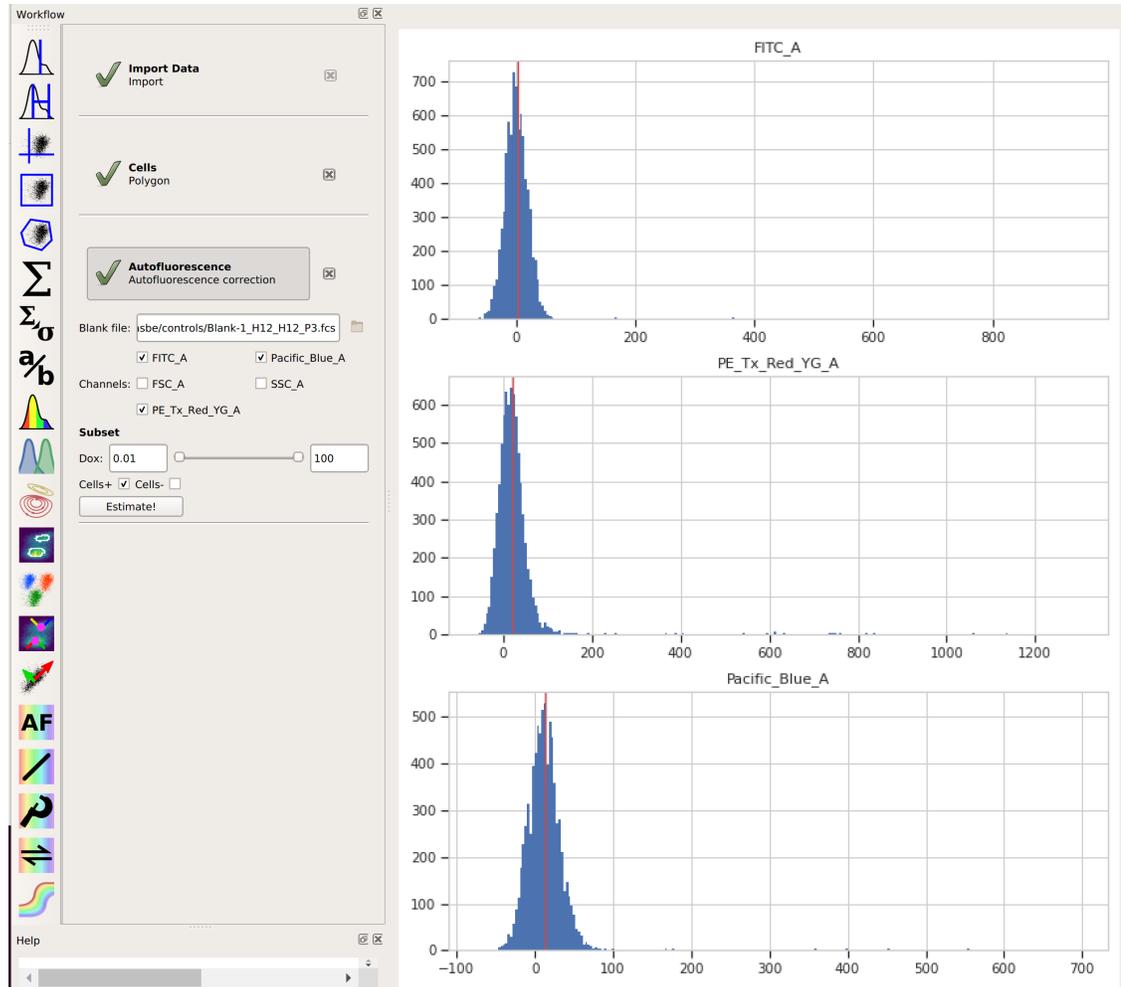


Note: By choosing the “Cells” subset, I told Cytoflow to apply the *same gate* from that operation to the *blank data* before estimating the autofluorescence correction. This way, the clumps and debris in the sample don’t influence that estimate. We’ll do the same thing in the next step, when we apply the bleedthrough compensation.



- (e) Add the **Bleedthrough** operation (it’s the **Add Control** button). For each control you have, click **Add Control**. In the **Controls** list, choose the channel you’re correcting and the file that contains the control data. Again, if you followed the optional step, also choose the subset you want to estimate the correction from. Then, click **Estimate!**.

Here, the diagnostic plots show the data in the control files and the estimate that was fit to them. Because it’s a *linear* estimate, but the data is plotted on a *logarithmic* scale, the estimate lines are shown as curves.

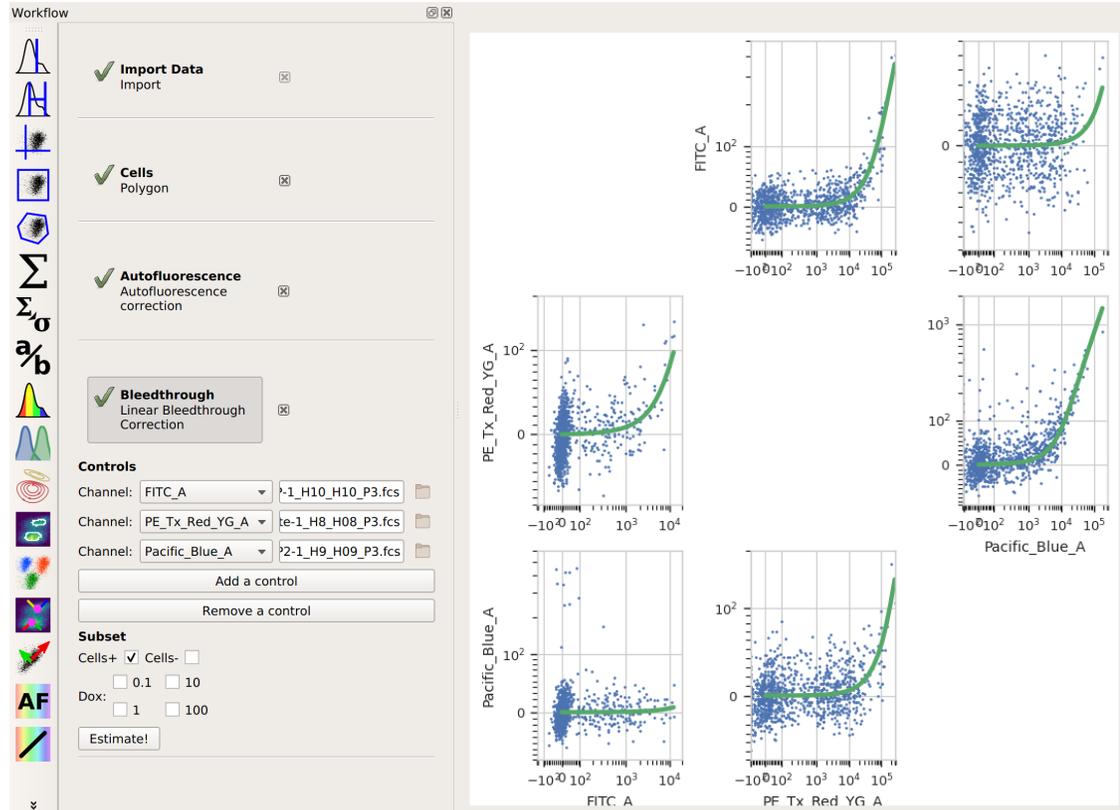

And that's it. Now you can continue on with your analysis, secure in the knowledge that you've successfully separated the adjacent fluorescence channels.

If you'd like to learn more, [Abcam has a good page](#) about compensation, and [Mario Roederer has an even more detailed treatment](#).

5.1.12 HOWTO: Use beads to correct for day-to-day variation

Flow cytometers are complex instruments, and the precise numerical values they report depend not only on the fluorescence of the sample, but also on the illumination intensity, optical setup, gain of the detectors (ie PMT voltages), and even things such as whether the flow cell has been cleaned recently. We often want to compare data that was collected on different days, and this instrument *drift* can make these comparisons difficult.

Many cytometers, especially those used in a clinical setting, use a daily calibration to counter these effects. However, these calibrations are intended for standardized protocols that are run regularly, not the one-off experiments that many investigators run.

One approach to this problem is to *calibrate* each day's measurements using a stable calibrant. The idea is straightforward: each day, in addition to your experimental samples, you measure a sample of stable fluorescent particles (of known fluorescence), then use these calibrant measurements to convert the arbitrary units (au) for your experimental samples to the known units for your calibrant. For example, if your particles have a fluorescence of 1000 molecules of fluorescein (MEFL), and you measure their brightness to be 5000 au, then you know that an experimental sample with a brightness of 10,000 au is equivalent to 2,000 MESF. This relationship holds even if tomorrow the laser is a little dimmer or the fluidics are a little dirty.

While there are a number of different kinds of stable calibrants that might be used this way, we have had very good success with [Spherotech's Rainbow Calibration Particles](#). (We usually refer to these particles as "beads".) Because they're made of polystyrene with the fluorophores "baked in" (not on the surface), they are ridiculously

stable. Spherotech also provides enough technical data about their fluorescence to make it easy to determine a calibration curve and apply it to experimental data. Below, you can find the process for doing so using Cytoflow.

Note: It is often considered “best practice” only to compare data that was on the same instrument with the same detector gain settings. Using beads this way can help you get around the “same detector gain settings” requirement – for example, if you have a really bright sample and a really dim sample – but it is *not* a good idea to try to compare between different instruments unless those instruments have *exactly* the same optical configuration (lasers, filters, and from the same vendor.)

Procedure

- (a) Collect a sample of beads *on the same day, and with the same settings*, as your experimental samples.
- (b) Import your data into Cytoflow. Do *not* import your bead control. In the example below, we’ll have three fluorescence channels – *Pacific Blue-A*, *FITC-A* and *PE-Tx-Red-YG-A* – in addition to the forward and side-scatter channels.

**Import Data**
Import 

Channels

FITC-A -->

FSC-A -->

PE-Tx-Red-YG-A -->

Pacific Blue-A -->

SSC-A -->

Events per sample:

Samples: 4
Events: 40000



- (c) Add the **Beads** operation to your workflow. It's the icon.
- (d) Choose the beads you used, *including the specific lot*, from the drop-down list.

Note: If the beads you want to use are not in the list, please submit a bug report. Adding a new set of beads is pretty trivial.

- (e) Specify the file containing the data from the beads.
- (f) Click **Add a channel** for every channel you want to calibrate. In the **Channels** list, specify both the *channel* you want to calibrate and the *units* you want to calibrate it.

Note: It works best to choose units of a fluorophore that is spectrally matched to the channel that you're calibrating. Here are the beads that Cytoflow knows about (including the laser and filter sets used to characterize the beads):


- Spherotech ACP 30-2K
- Spherotech RCP-30-5A Lot AN04, AN03, AN02, AN01, AM02, AM01, AL01, AK04, AK03 & AK02**
- Spherotech RCP-30-5A (Euroflow) Lot EAM02 & EAM01
- Sphreotech RCP-30-5A (Euroflow) Lot EAK01, EAG01, EAE01 & EAF01
- Spherotech RCP-30-5A Lot AK01, AJ01, AH02, AH01, AF02, AF01, AD04 & AE01
- Spherotech RCP-30-5A Lot AG01
- Spherotech RCP-30-5A Lot AA01, AA02, AA03, AA04, AB01, AB02, AC01 & GAA01-R
- Spherotech RCP-30-5A Lot AC02, AC03 & AD01
- Spherotech RCP-30-5A Lot Z02 and Z03
- Spherotech RCP-30-5 Lot AA01, AB01, AB02, AC01 & AD01
- Spherotech RCP-30-5 Lot AM02, AM01, AL01, AH01, AG01, AF01 & AD03
- Spherotech RCP-60-5
- Spherotech URCP 38-2K
- Spherotech URCP 38-2K Lot AN01, AM01, AL02, AL01, AK03, AK02, AK01, AJ02 & AJ03
- Spherotech URCP 50-2K Lot AM01 & AJ01
- Spherotech URCP 50-2K

The Spherotech fluorophore labels and the laser / filter sets used to measure them (that I know about) are:

- **MECSB** (Cascade Blue, 405 → 450/50)
- **MEBFP** (BFP, 405 → 530/40)
- **MEFL** (Fluroscein, 488 → 530/40)
- **MEPE** (Phycoerythrin, 488 → 575/25)
- **MEPTR** (PE-Texas Red, 488 → 613/20)

- **MECY** (Cy5, 488 → 680/30)
- **MEPCY7** (PE-Cy7, 488 → 750 LP)
- **MEAP** (APC, 633 → 665/20)
- **MEAPCY7** (APC-Cy7, 635 → 750 LP)

(g) Click **Estimate!** Check the diagnostic plots to make sure that each peak in your data was found, and that you have a fairly linear relationship between the (measured) peaks and the (known) calibration.

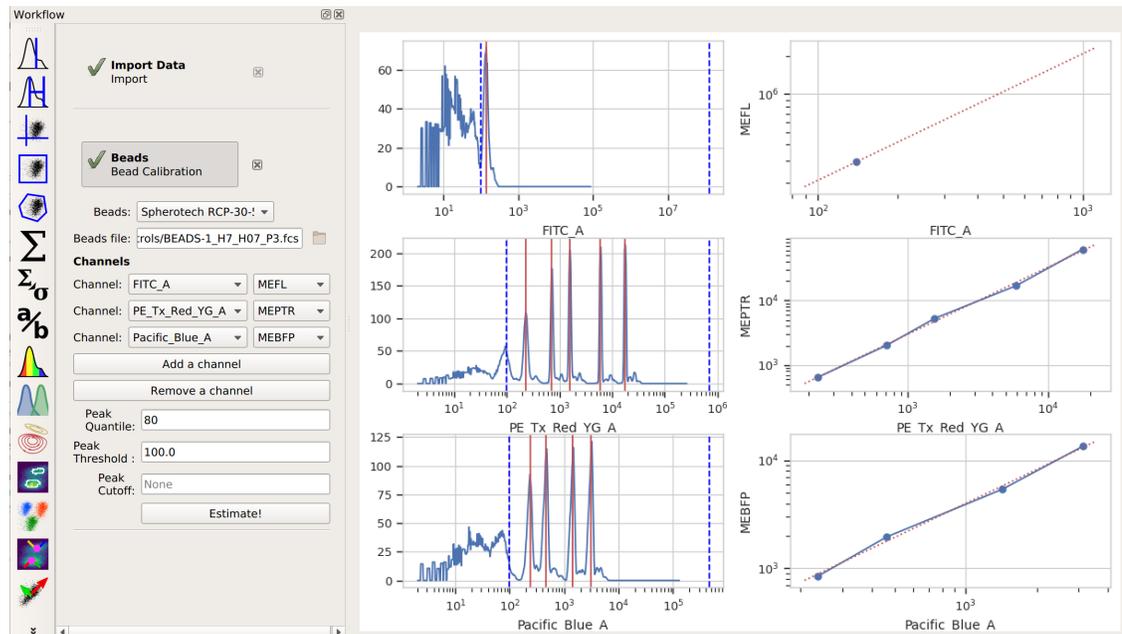

Note: If not all of the peaks were identified, try messing around with the peak-finding parameters.

Note: Bead calibration is particularly powerful when combined with the autofluorescence correction and bleedthrough compensation described in *HOWTO: Compensate for bleedthrough*. They're so useful when done together that this sequence of operations has its own module – see *HOWTO: Use the TASBE workflow for calibrated flow cytometry*.

5.1.13 HOWTO: Use the TASBE workflow for calibrated flow cytometry

As outlined in *HOWTO: Use beads to correct for day-to-day variation*, flow cytometry's quantitative power is somewhat belied by the sensitivity of single-cell measurements to instrument configuration and state. In a word, cytometers drift – sometimes by as much as 20% over the course of a day, even with identical settings. This can complicate experiments or processes that depend on precise, reproducible measurements – predictive modeling of gene expression in particular.

Fortunately, a set of data manipulations can go a long way towards fixing these issues:

- *Subtract* autofluorescence from the experimental measurements. This requires the measurement of a *non-fluorescent* control.

- *Compensate* for spectral bleed-through. This requires the measurement of controls stained with (or expressing) the individual fluorophores alone.
- *Calibrate* the measurements using a stable calibrant. This requires measuring a calibrant such as the [Spherotech rainbow calibration particles](#)
- (Optional) *Translate* all the channels so they're in the same units. This requires the measurement of multi-color controls where the staining (or expression) of each fluorophore is equal.

You can read more about this workflow in the following resources:

- [A Method for Fast, High-Precision Characterization of Synthetic Biology Devices](#)
- [Accurate Predictions of Genetic Circuit Behavior from Part Characterization and Modular Composition](#)
- [The TASBE Jupyter notebook](#)

Because this method originated in software called *Tool-Chain to Accelerate Synthetic Biology Engineering*, we abbreviate it *TASBE*. And while it was developed in the context of modeling and simulating synthetic gene networks, there is *nothing* about it that is syn-bio specific. If you want to generate data sets that you can directly compare to each other (particularly if they're collected on the same instrument), this is the calibration that will let you to so. And while each of the steps above has its own operation, they're also combined in the **TASBE** operation.

Procedure

- (a) Collect the following controls:
 - Blank, un-stained, non-fluorescent cells (to subtract autofluorescence).
 - Cells stained with (or expressing) only one fluorophore (to compensate for spectral bleedthrough).
 - Beads (to calibrate the measurements)
 - (Optional) multi-color controls, where each *pair* of fluorescent molecules stains (or is expressed) at equal intensity.
- (b) #. Import your data into Cytosflow. Do *not* import your control samples (unless they're part of the experiment.) In the example below, we'll have three fluorescence channels – *Pacific Blue-A*, *FITC-A* and *PE-Tx-Red-YG-A* – in addition to the forward and side-scatter channels.

 **Import Data**
Import ✕

Channels

FITC-A -->

FSC-A -->

PE-Tx-Red-YG-A -->

Pacific Blue-A -->

SSC-A -->


Events per sample:

Samples: 4

Events: 40000

(c) (Optional but recommended) - use a gate to filter out the “real” cells from debris and clumps. Here, I’m using a polygon gate on the forward-scatter and side-scatter channels to select the population of “real” cells.

(I've named the population "Cells" – that's how we'll refer to it subsequently).

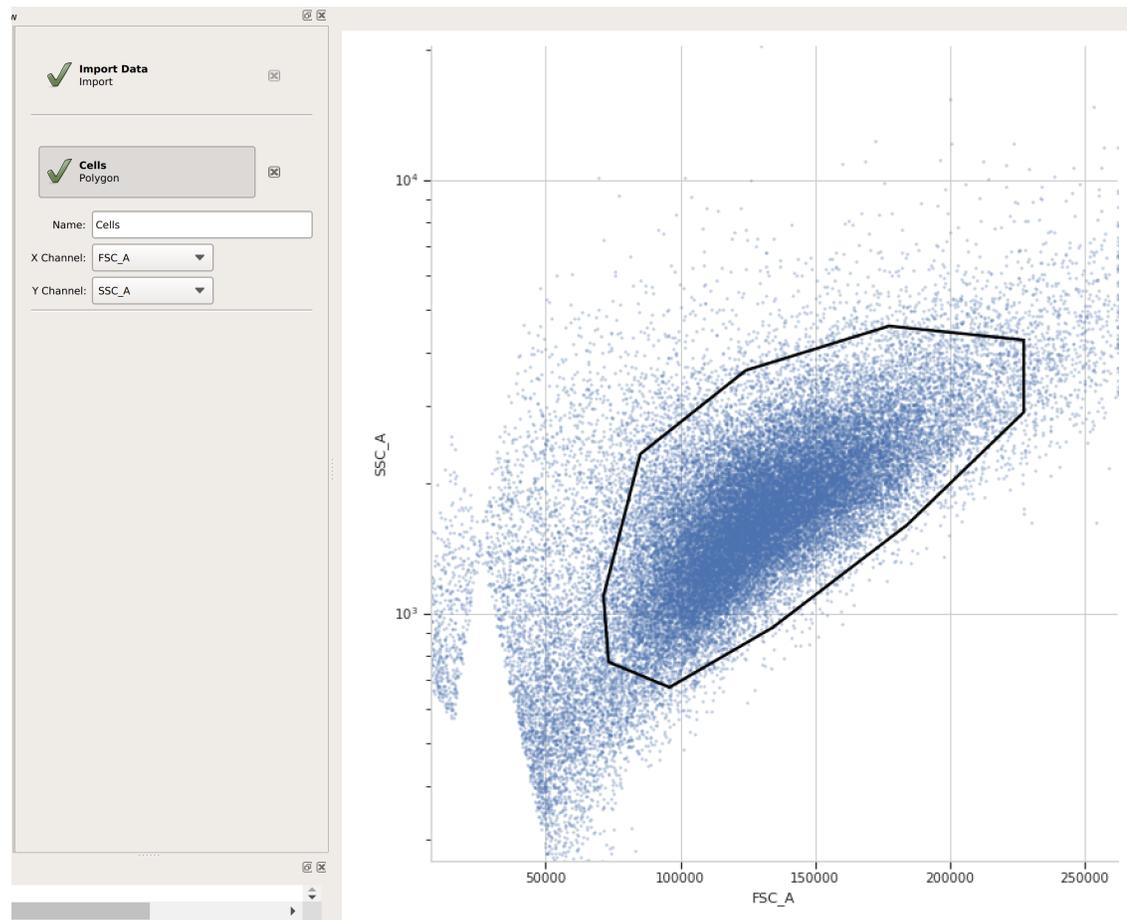

(d) Add the **TASBE** operation (it's the button).

TASBE
Quantitative Pipeline 

FITC_A Pacific_Blue_A

Channels: FSC_A SSC_A

PE_Tx_Red_YG_A

Autofluorescence

Blank file: 

Bleedthrough Correction

Bead Calibration

Beads:

Beads file: 

Bead units:

Peak Quantile:

Peak Threshold :

Peak Cutoff:

Color Translation

Do color translation?

Subset

Cells+ Cells-

0.1 10

Dox: 1 100

Estimate progress: No model estimated

Error: Click "Estimate"!

(e) Select which channels you are calibrating.

FITC_A
 Pacific_Blue_A
 Channels: FSC_A SSC_A
 PE_Tx_Red_YG_A

(f) Specify the files containing the blank and single-fluorophore controls.

Autofluorescence

Blank file: 

Bleedthrough Correction

FITC_A 

PE_Tx_Red_YG_A 

Pacific_Blue_A 

(g) If you are *not* doing a unit translation: select the beads you're using, the data file, and the appropriate units for each channel:

Bead Calibration

Beads: Spherotech RCP. ▾

Beads file: sbe/controls/BEADS-1_H7_H07_P3.fcs 

FITC_A MEFL ▾

Bead units: PE_Tx_Red_YG_A MEPTR ▾

Pacific_Blue_A MEBFP ▾

Peak Quantile: 80

Peak Threshold : 100.0

Peak Cutoff: None

Color Translation

Do color translation?

- (h) If you *are* doing a unit translation, specify the beads you're using, the data file, the unit you want *all* the channels in, the channel you want everything translated to, and the multi-color control files.

Bead Calibration

Beads: Spherotech RCP ▾

Beads file: sbe/controls/BEADS-1_H7_H07_P3.fcs 

Beads unit: MEFL ▾

Peak Quantile: 80

Peak Threshold : 100.0

Peak Cutoff: None

Color Translation

Do color translation?

To channel: FITC_A ▾

Use mixture model?

PE_Tx_Red_YG_A -> FITC_A Y-1_H11_H11_P3.fcs 

Pacific_Blue_A -> FITC_A RBY-1_H11_H11_P3.fcs 

Note: If you're measuring cells that have a large non-fluorescent population – such as transfected mammalian cells – choose **Use mixture model** as well.

- (i) (Optional but recommended) - if you set a gate above to select for cells (and not clumps or debris), select that gate under **Subset:**


Subset

Cells+ Cells-


0.1 10

Dox: 1 100


- (j) Click **Estimate!**
- (k) Check all three (or four) diagnostic plots – make sure that the estimates look reasonable.
 - Autofluorescence – there’s a single peak in each channel, and a red line at the center.

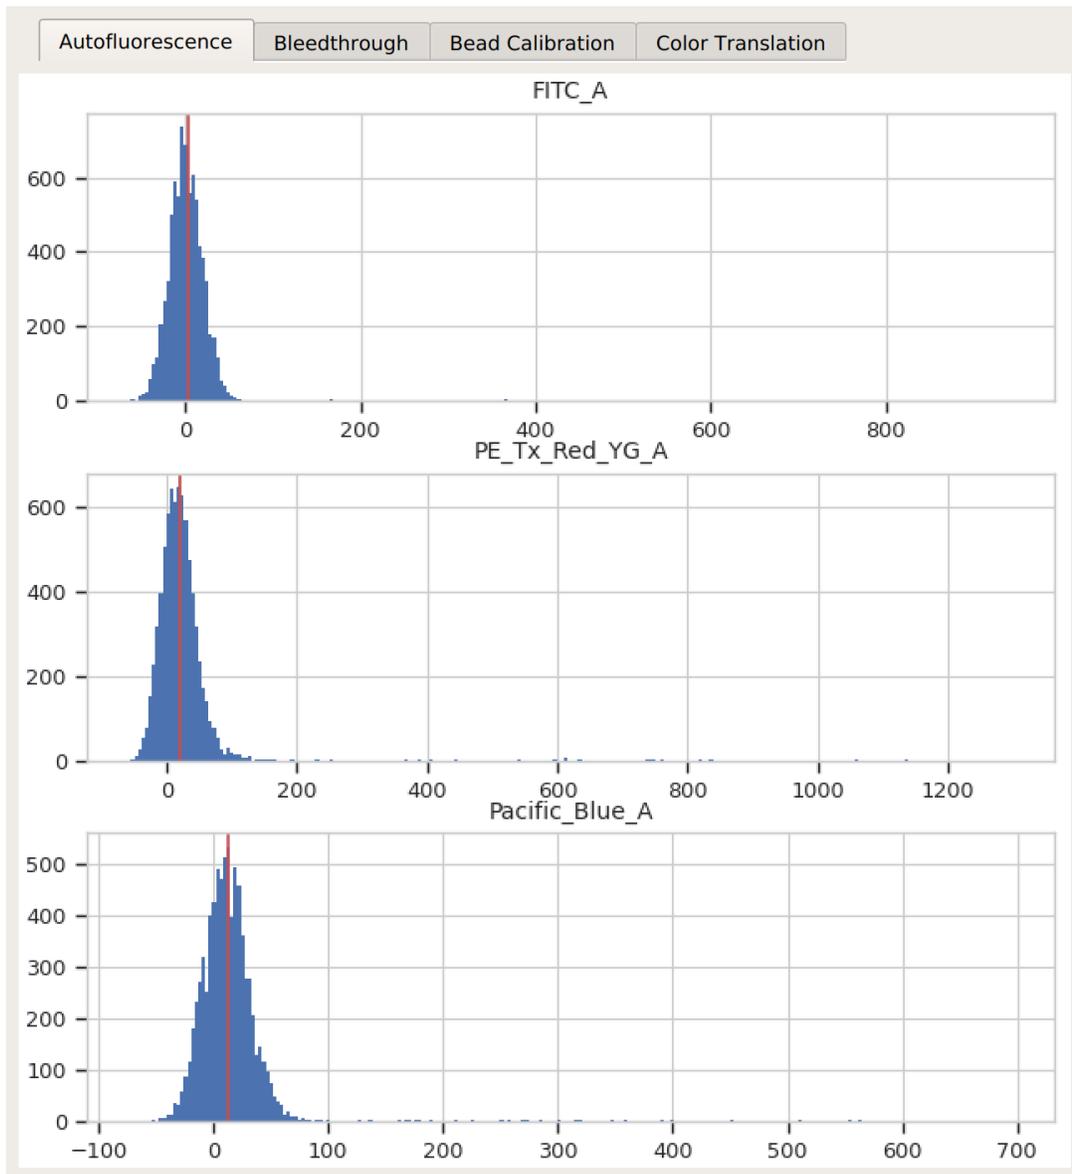


- Bleedthrough – the bleedthrough estimates (green lines) follow the data closely.

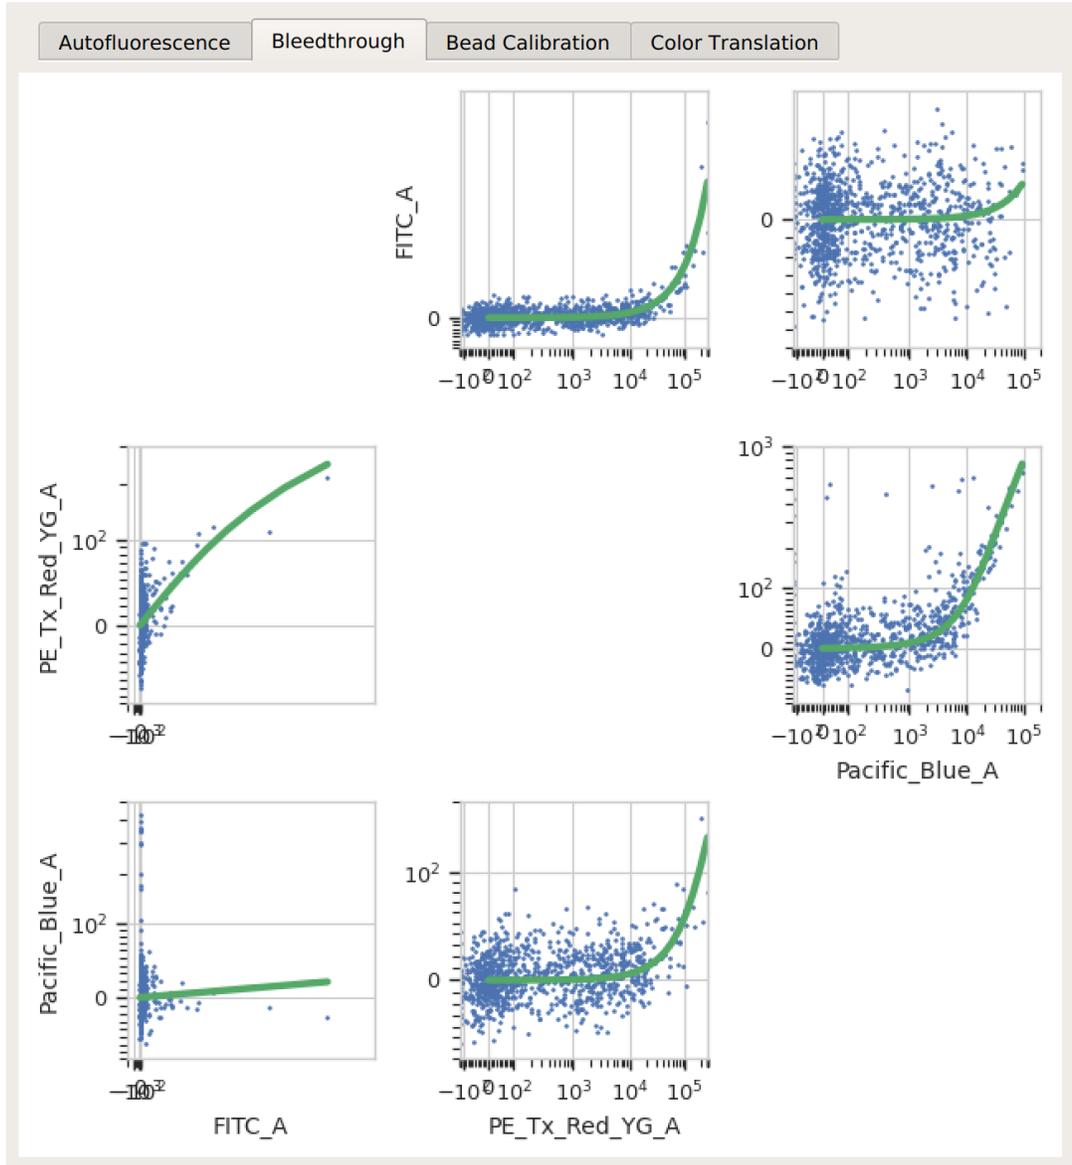

- Bead Calibration – all the peaks between the minimum and maximum cutoffs (blue dashed lines) were found, and there's a linear relationship with the vendor-supplied values.

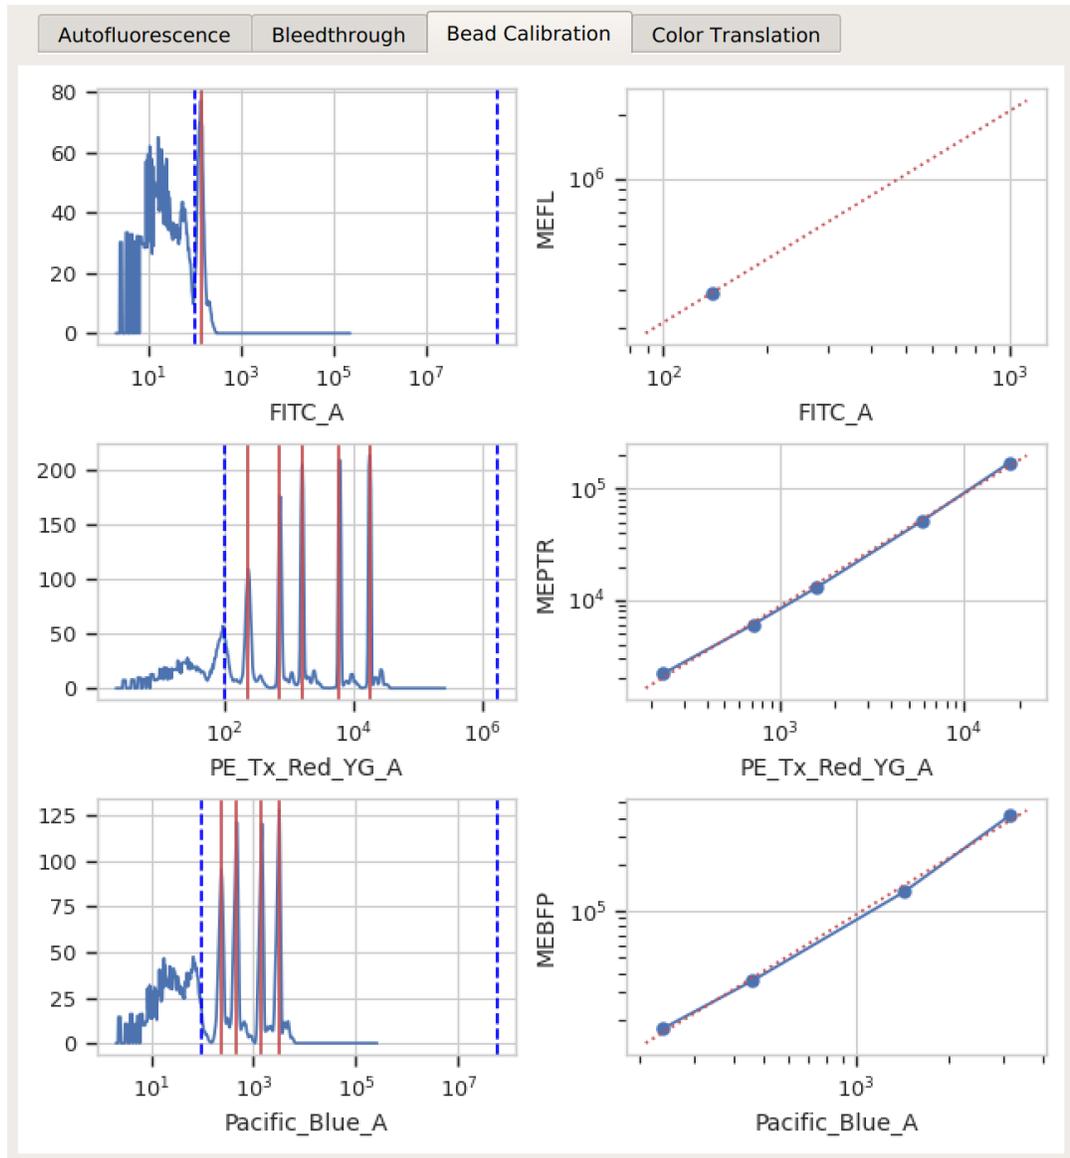

- Color translation – there’s a linear relationship between the channels, and if you’re using a mixture model, the centers of the two distributions were successfully identified.

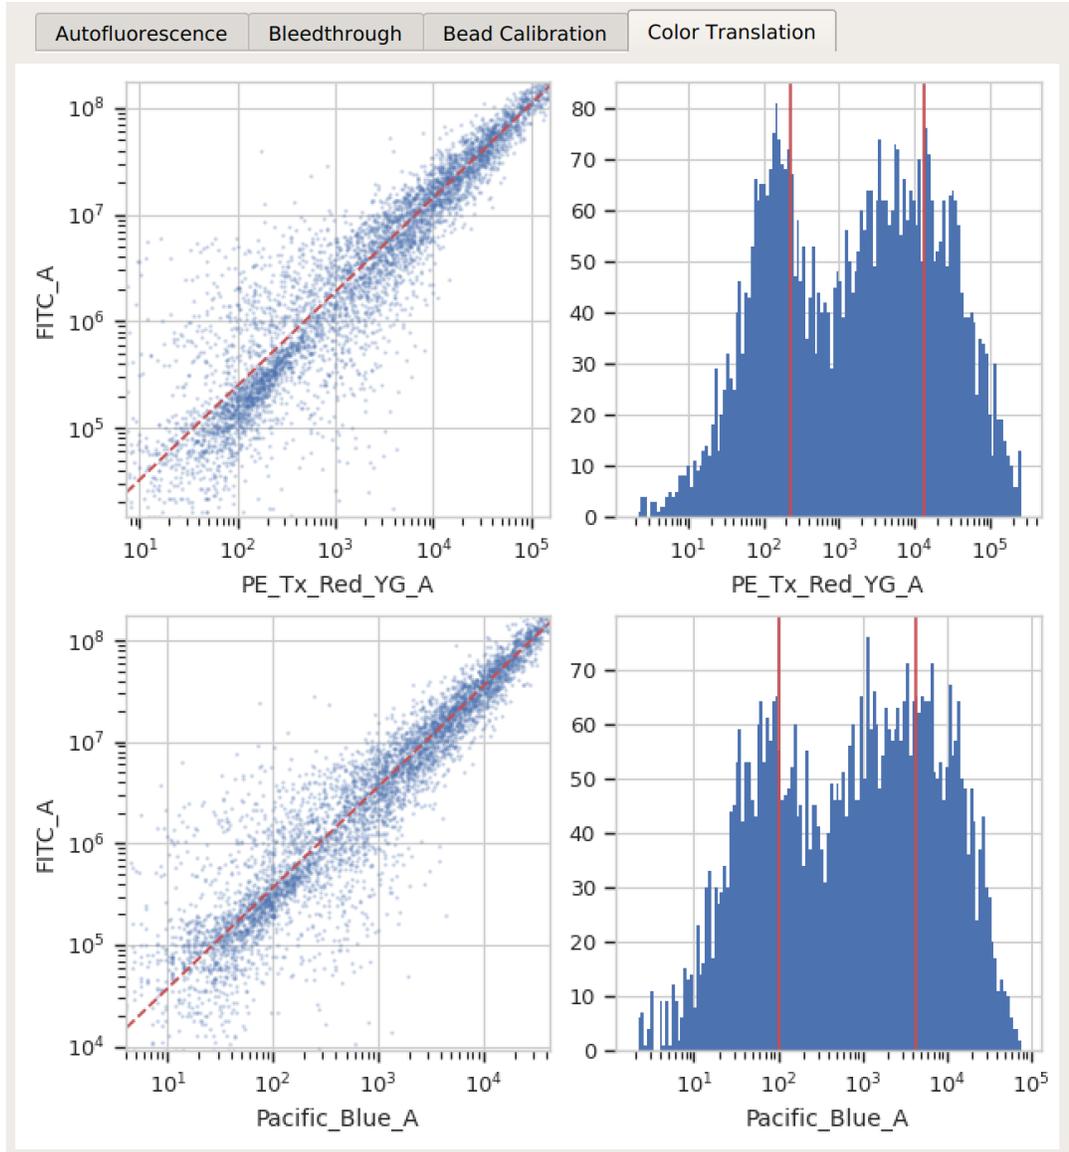

- (l) Proceed with your analysis. If this will involve multiple data sets from multiple days, you may wish to export the calibrated data back into FCS files, as described here: [HOWTO: Export FCS files](#).

5.1.14 HOWTO: Export FCS files

I've tried to make Cytoflow both powerful and straightforward to use, but I understand that some people may wish to use other software for their cytometry analysis. Cytoflow has some unique capabilities – in particular, its **Bead Calibration** and **TASBE** modules – and it is possible to import data into Cytoflow, calibrate or otherwise manipulate it, then export it back to FCS files that can be opened with other analysis programs.

Procedure

- (a) Import your data into Cytoflow. Do *not* import your control samples (unless they're part of the experiment.) In the example below, we'll have three fluorescence channels – *Pacific Blue-A*, *FITC-A* and *PE-Tx-Red-YG-A* – in addition to the forward and side-scatter channels.

**Import Data**
Import 

Channels

FITC-A -->

FSC-A -->

PE-Tx-Red-YG-A -->

Pacific Blue-A -->


SSC-A -->

Events per sample:

Samples: 4

Events: 40000

- (b) Perform whatever calibration or manipulation you would like. In this case, I've applied the **Autofluorescence** and **Bleedthrough** modules.

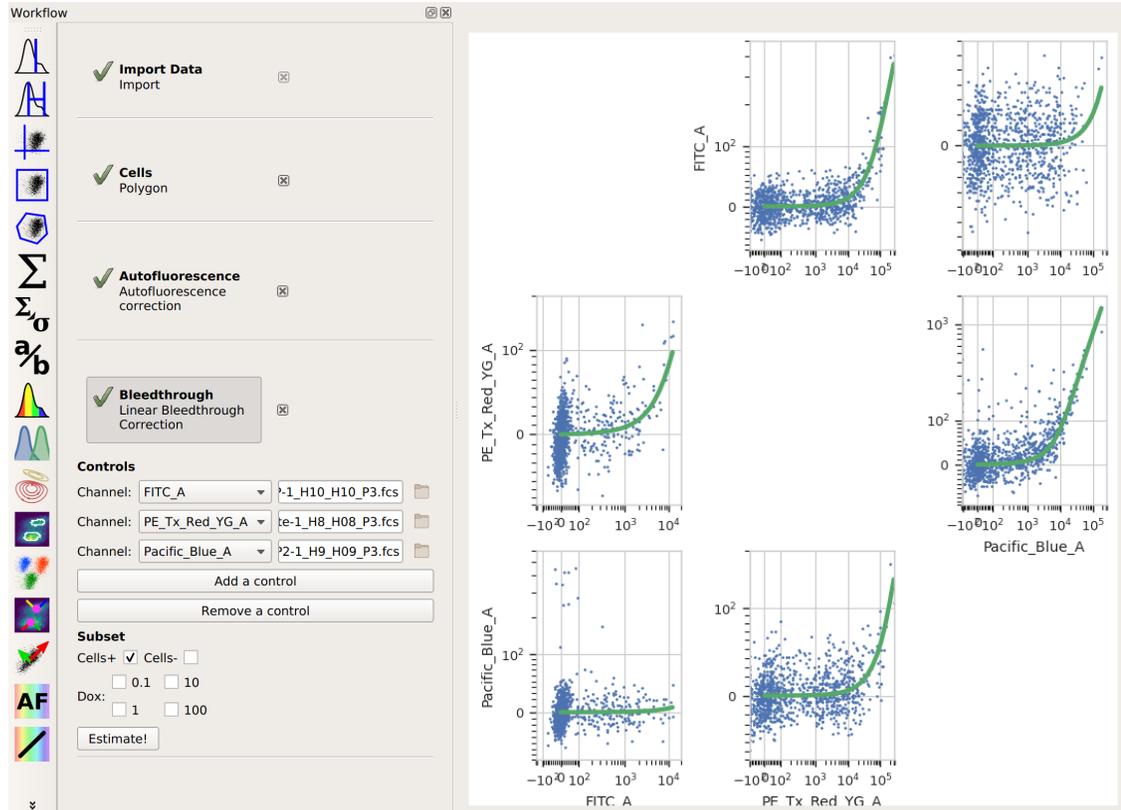

- (c) Choose the **Export FCS** view. It's the  button. Note that this is found on the *Views* toolbar, not the *Operations* toolbar.
- (d) Select how you'd like the data split up when it is exported. Remember, when Cytoflow imports data, it "forgets" everything about the "tubes" that the data came from – it only knows which sets of data were treated with which conditions. Select which conditions should be split into separate FCS files in the view parameters.

View Properties

Export FCS

Group
Estimates Cells Dox

By:

Subset

Cells+ Cells-

0.1 10

Dox: 1 100

Export...

In this case, I've asked for each unique value of **Dox** to go into its own FCS file. The table in the view pane will show you which files will be created.


| # | Dox | Filename |
|---|-----|-------------|
| 1 | 0.1 | DoX_0.1.fcs |
| 2 | 1 | DoX_1.fcs |
| 3 | 10 | DoX_10.fcs |
| 4 | 100 | DoX_100.fcs |

- (e) Click **Export...** and select the directory to save the FCS files to.
3. *Guides* help you understand some of the principles Cytoflow is based on and some subtler points about using it to analyze flow cytometry data. They can help you use Cytoflow more effectively!


5.1.15 Guide: Which measure of center should I use?

When analyzing flow cytometry data, we often want to know the *center* of a distribution. For example, we may be treating our cells with a drug and want to be able to report that “fluorescence decreased XXX fold.”


Often, we use the *arithmetic mean* to find the center. For example, in the histogram below, I’ve drawn 100,000 samples from a normal distribution with a mean of 1000 and a standard deviation of 100. The arithmetic mean is 999.40; I’ve drawn a red line on the plot at this position.

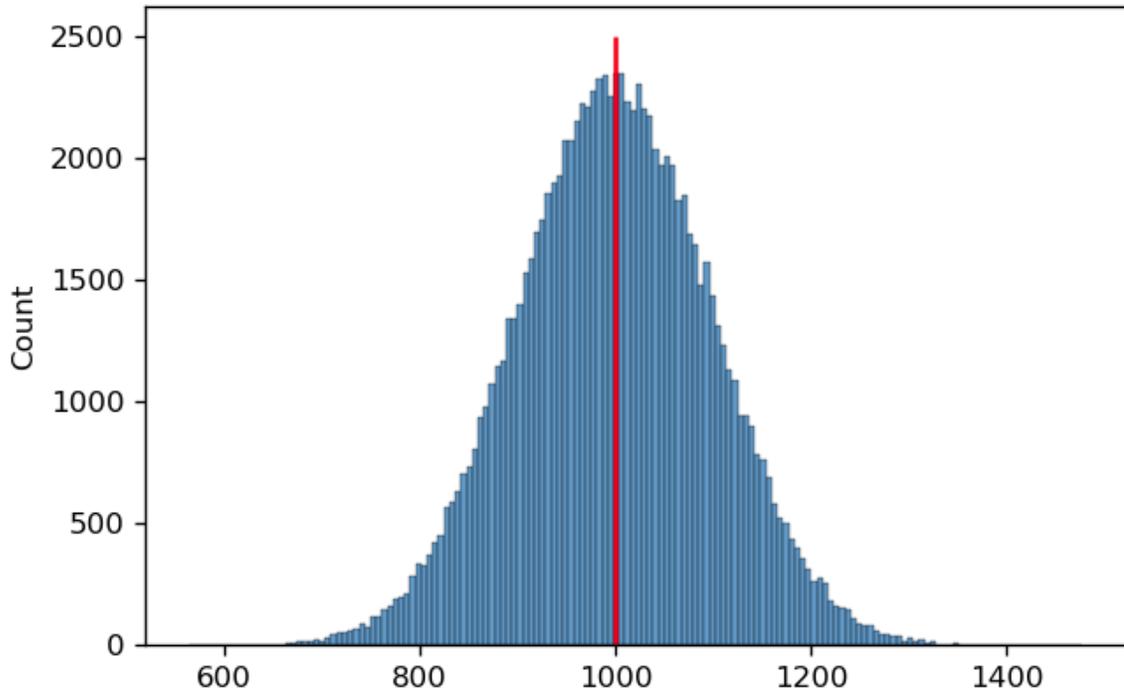

It's pretty clear that this is a good measure of this distribution's center. However, in cytometry, we often encounter distributions that are symmetrical *on a log scale*. This is the case below – and again, I've drawn a red line at the arithmetic mean of this distribution.

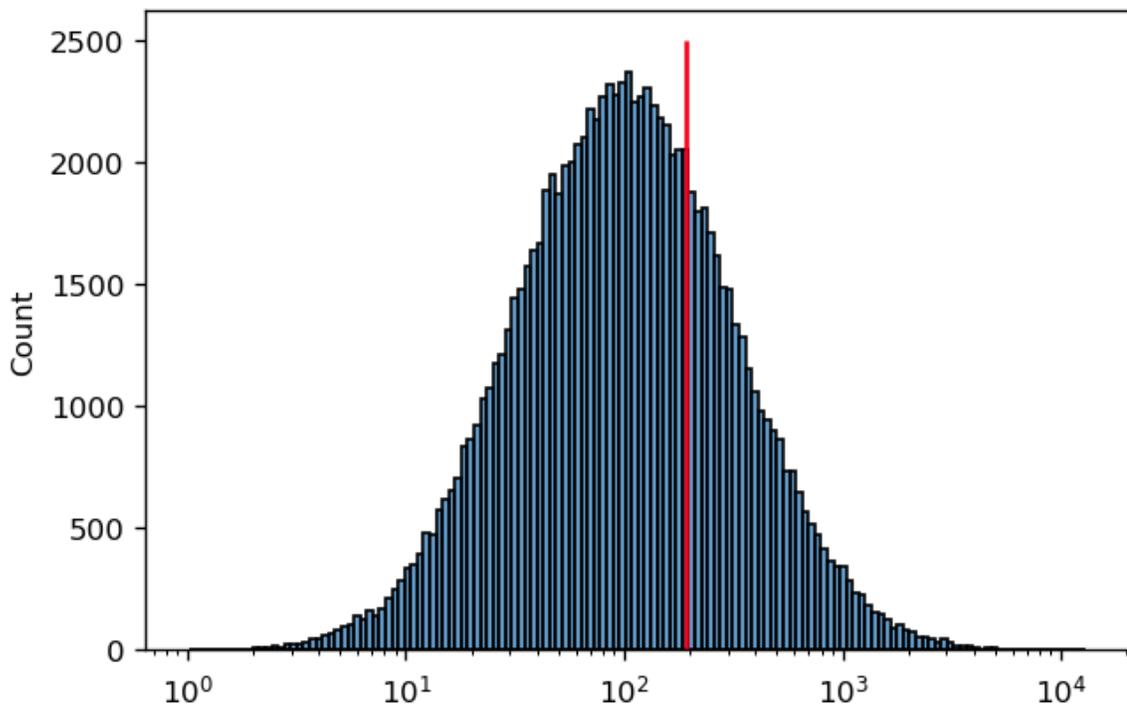


In this case, it's pretty clear that the arithmetic mean is *not* a good measure of this distribution's "center". It's easy to see why this is happening if we plot the *same* data on a *linear* scale instead:

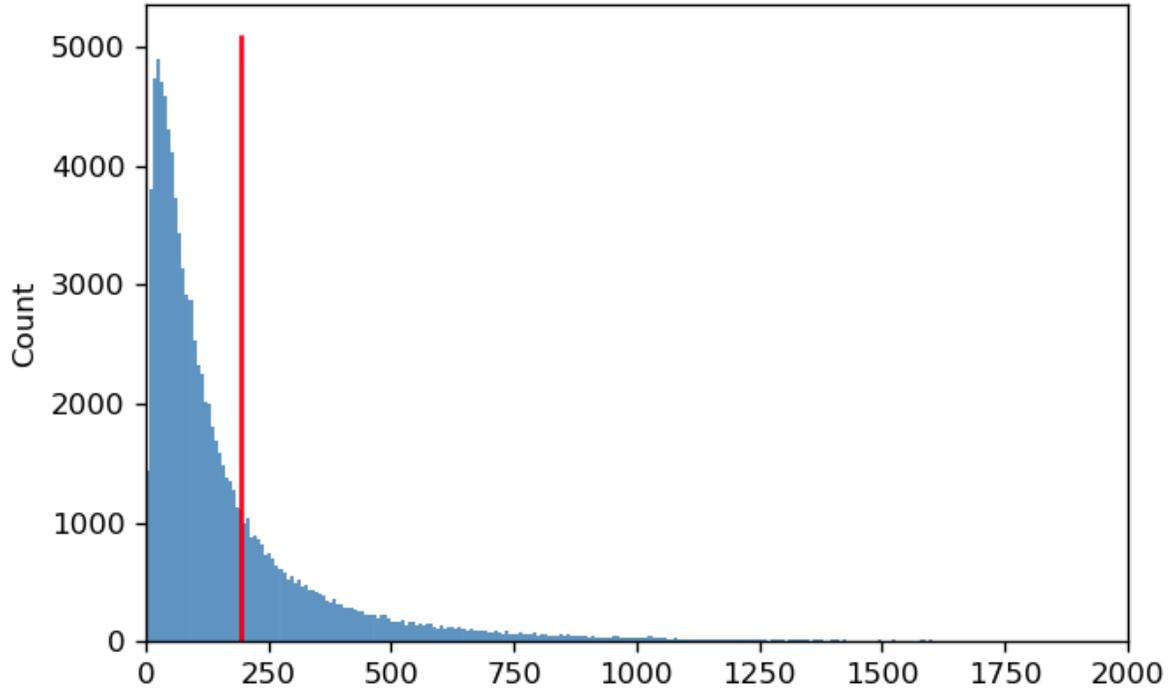

The reason that the *arithmetic* mean isn't a good measure of center is because on a linear scale, *the distribution is not symmetric*. Instead, the mean is being "dragged" up by the larger values in the "tail" of the distribution.

A better measure of center for this kind of distribution is the *geometric mean*. Let's say we have n values. Instead of adding the values together and dividing by n (arithmetic mean), to find the geometric mean we multiply all the numbers together and then take the n th root. Below, you can see the log-scaled data again, with the arithmetic mean in red and the geometric mean in blue. It's clear that for data of this sort, the geometric mean is a better measure of "center".

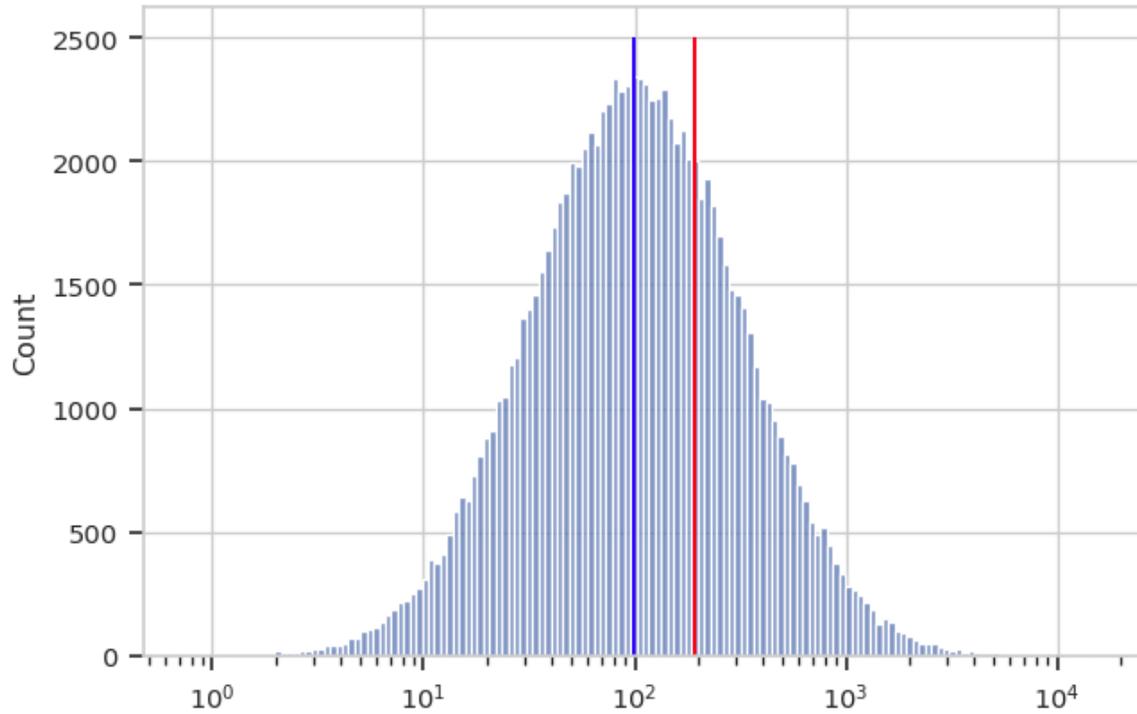

Cytoflow implements both a geometric mean (to measure center) and a geometric “standard deviation” to measure spread. I highly recommend you use these instead of their arithmetic brethren when analyzing data that appears normal (or at least symmetric) on a logarithmic scale.

PS - why is so much biology log-normal? My colleague Jacob Beal has done some theoretical work on the topic. You can read his paper here:

Biochemical complexity drives log-normal variation in genetic expression. Jacob Beal, *Engineering Biology*, 1.1 (2017), pp. 55-60, July 2017. <https://digital-library.theiet.org/content/journals/10.1049/enb.2017.0004>

5.1.16 Guide: Using statistics to summarize data

Summarizing data is a key step in flow cytometry. Even simple, “traditional” analyses involve drawing gates and counting the number of events in them.


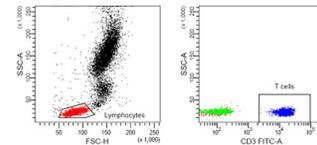


Fig. 1: What proportion of these events were T-cells?


Cytoflow calls these summary values – such as the mean or count of a set of events – *statistics*. Here, I’m using the word “statistic” in the technical sense, as in “a quantity that is computed from a sample.”

Another key insight is that we are usually interested in *how a statistic changes* across our experiment. For example, let’s say that I have some cells that express GFP, and I want to know how the amount of GFP expression changes as I alter the amount of a small molecule that I treat my cells with. I can create a *statistic*, then plot that statistic, to answer my question. Let’s see how I might do so. (I’m using data from the *examples-basic* directory – feel free to follow along.)

First, I need to import my data. In my experiment setup (in the **Import Data** operation), I must specify the *conditions* for each tube – that is, how the cells in each tube are different. In this case, I treated each tube with a different concentration of my drug, so I use “Drug” as a condition.

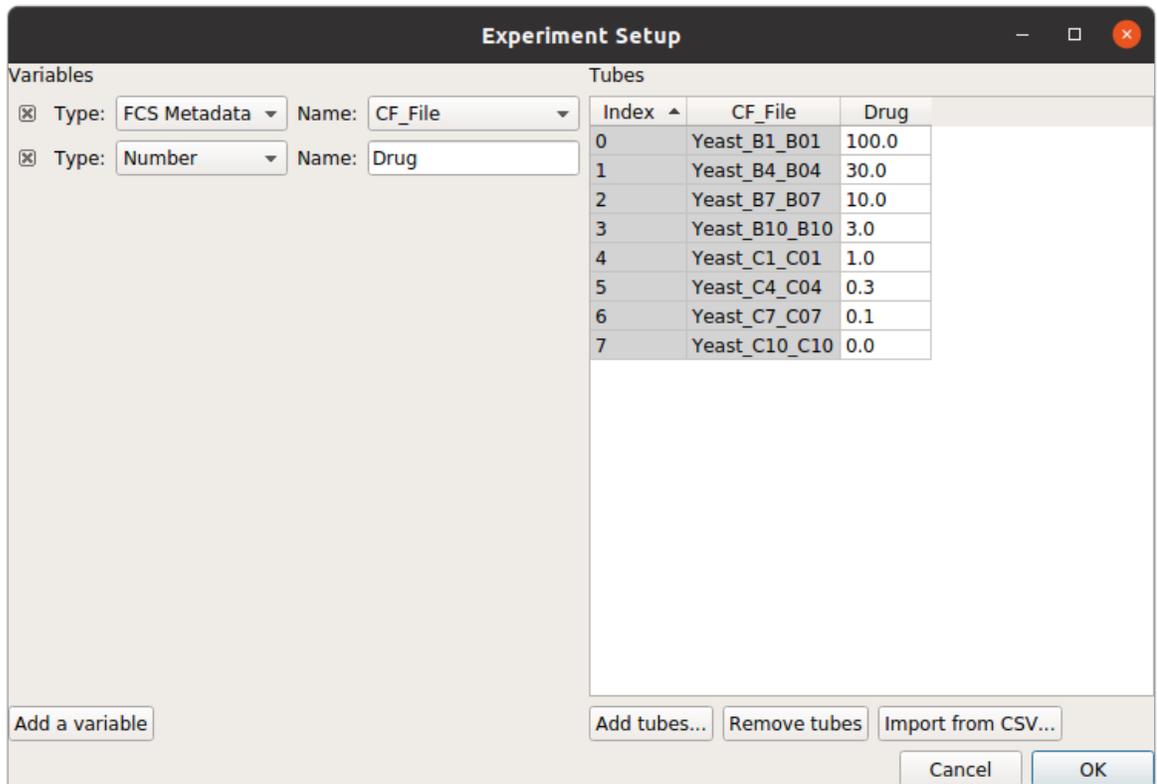

Using a histogram (and a vertical *facet*), I can see that the GFP intensity (as displayed in the FITC-A channel) is in fact changing when I vary the amount of drug I treat the cells with.

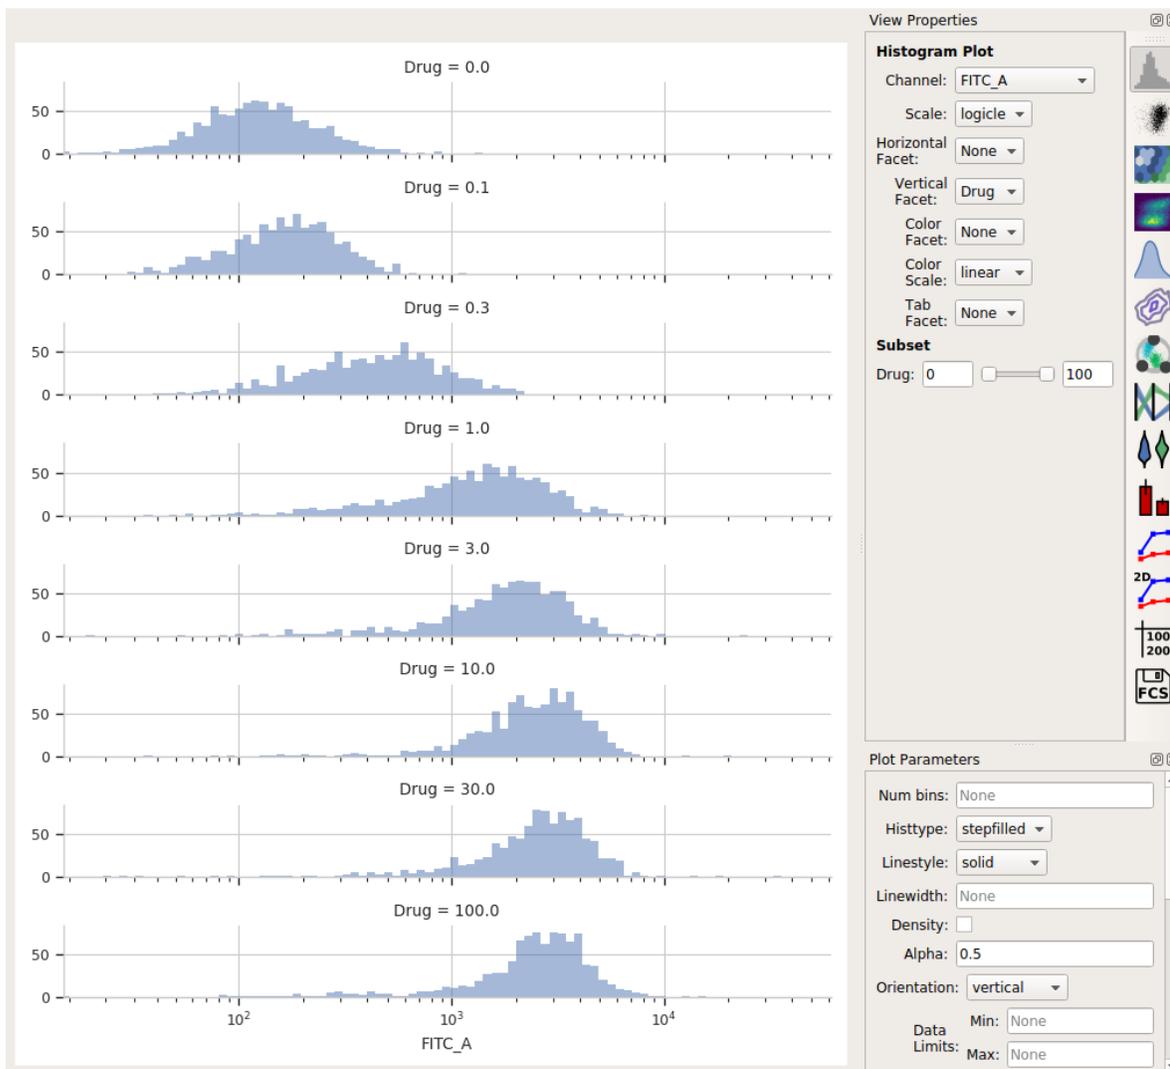

Each distribution seems pretty symmetrical when plotted on a logarithmic scale, so let's use a *geometric mean* to summarize them. I can do that with a **Channel Statistics** operation (the one whose button is a big sigma.)

The screenshot shows the 'Workflow' window in Cytosflow. On the left is a vertical toolbar with icons for various operations: a histogram, a histogram with a blue line, a scatter plot with a blue line, a scatter plot with a blue box, a scatter plot with a blue hexagon, a summation symbol (Σ), a summation symbol with a sigma (Σ, σ), a fraction (a/b), and a multi-colored histogram. The main area shows two steps in the workflow:

- Import Data**: Import (with a green checkmark and a close button).
- Mean_GFP**: Channel Statistics (with a green checkmark and a close button).

The configuration for the 'Mean_GFP' step is as follows:

- Name:** Mean_GFP
- Channel:** FITC_A
- Function:** Geom.Mean
- Group By:** Drug
- Subset:** Drug: 0 [slider] 100

Note that I've set a name for the statistic, the channel I want to summarize, and the function I want to apply. Probably the most important – and most confusing! – parameter is **By**. This specifies how I want to Cytosflow to group the data before applying **Function** to channel – in this case, I've set it to *Drug*. Here's the order that things happen in:

Cytosflow sees how many different values of the *Drug* parameter are in the data set.

It separates the data into groups – subsets – by those different values of *Drug*. If each tube has a different *Drug* value, then each of those subsets is the events from a single tube. However, if I had multiple tubes with the same *Drug* value, those tubes would be combined.*

For each subset of the data – each unique value of *Drug* – Cytosflow applies the function I asked for (in this case, *Geom.Mean* – the geometric mean – to the channel I said – in this case, *FITC_A*).

This results in a table of those summary numbers for each subset. You can view this table directly (with the

Table View, natch) – here’s what we see.

The screenshot displays the Cytoflow software interface. On the left, a table shows the mean GFP values for different drug concentrations. On the right, the 'View Properties' panel is open, showing settings for the 'Table View' and a 'Subset' slider.

| | |
|------------|---------|
| Drug = 0 | 121.803 |
| Drug = 0.1 | 160.033 |
| Drug = 0.3 | 417.172 |
| Drug = 1 | 1217.28 |
| Drug = 3 | 1694.55 |
| Drug = 10 | 2345.18 |
| Drug = 30 | 2387.24 |
| Drug = 100 | 2270.78 |

View Properties

Table View

Statistic: ('Mean_GFP', 'Geom.Mean') ▾

Rows: Drug ▾

Subrows: None ▾

Columns: None ▾


Subcolumn: None ▾

Export...

Subset


Drug: 0 100

If you would like to export this data, you can of course do so with the **Export** button. However, Cytoflow can plot it directly as well, with the **1D Statistics View**.

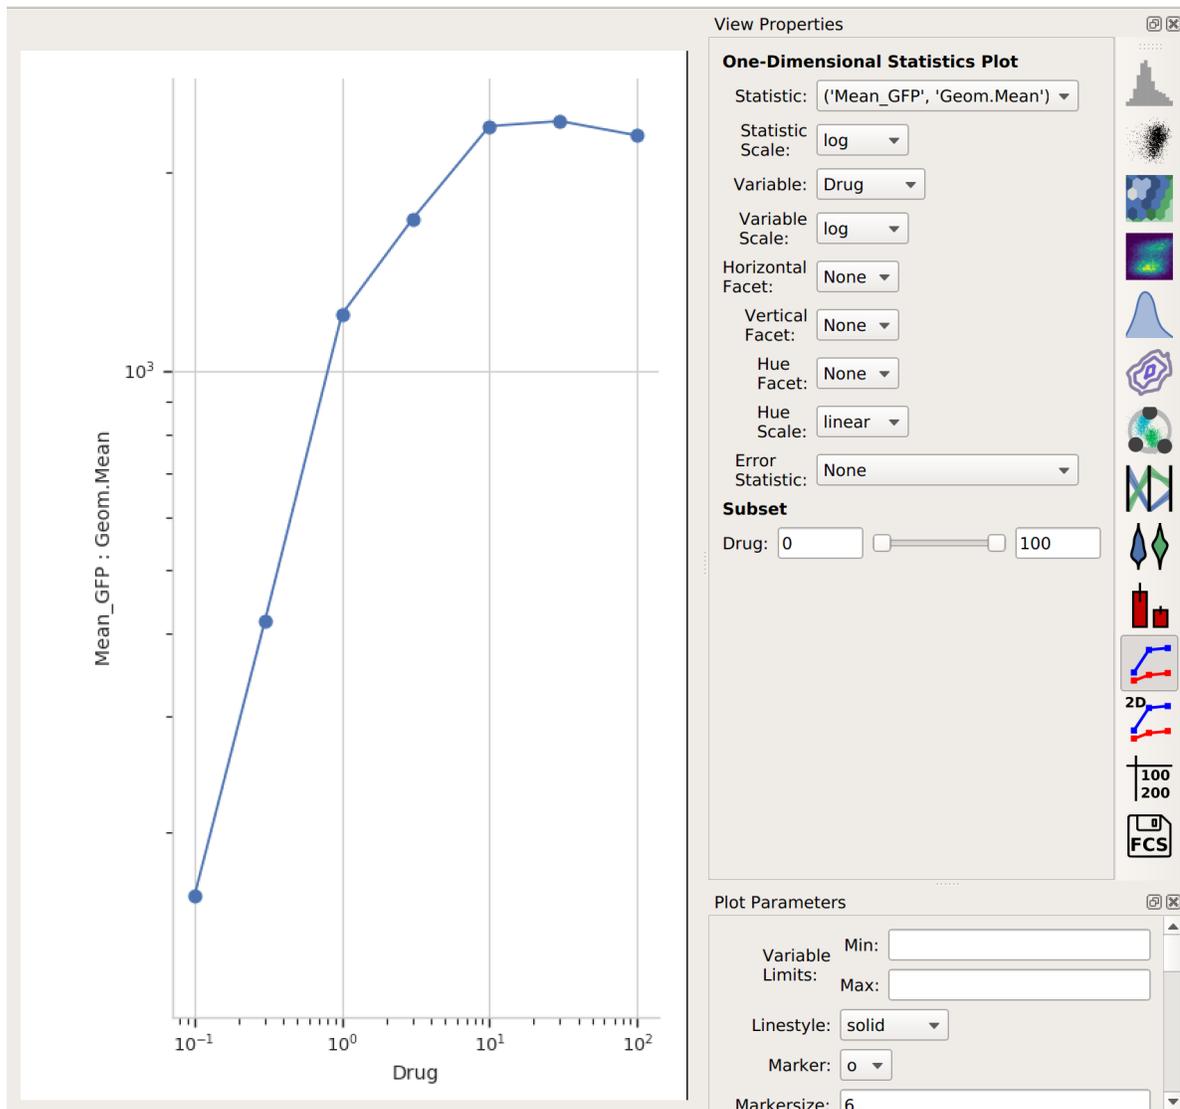

In setting up this plot, I selected the statistic to plot and the variable I wanted on the X axis. I also changed the statistic scale (to *log*) and the variable scale (to *logicle*), which makes things easier to interpret. (Note that if I had left the variable scale on *log*, it would not have plotted the “Drug = 0” condition, because $\log(0)$ is undefined!

It’s clear from this analysis that the mean GFP value increases as the amount of drug increases. However, statistics are more powerful than this because they can capture multiple variables at the same time. For example, let’s imagine that I did two different replicates on two different days:

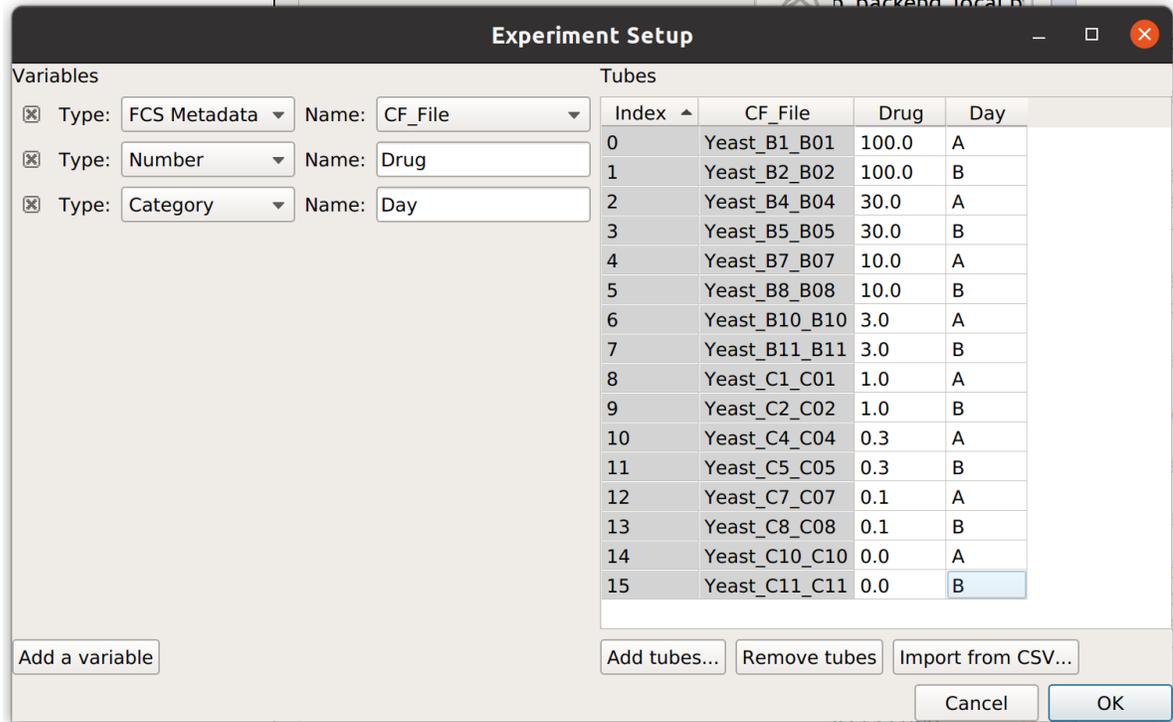

In this case, I have imported twice as many tubes, and labeled them with *both* the amount of drug I used *and* which day I did the experiment on.

Now, when I set up my **Channel Statistic**, I'll set **Group By** to *both Day and Drug*.


The screenshot shows the 'Workflow' editor in Cytoflow. On the left is a vertical toolbar with icons for various operations: a histogram, a histogram with a blue line, a scatter plot with a blue crosshair, a scatter plot with a blue box, a scatter plot with a blue pentagon, a summation symbol Σ , a summation symbol with a sigma Σ, σ , a fraction a/b , a multi-colored histogram, and two overlapping bell curves. The main workspace contains two steps:

- Import Data** (Import) - marked with a green checkmark and a close button.
- Mean_GFP** (Channel Statistics) - marked with a green checkmark and a close button.

The 'Mean_GFP' step configuration is as follows:


- Name: Mean_GFP
- Channel: FITC_A
- Function: Geom.Mean
- Group By: Day, Drug
- Subset: Drug: 0 (slider from 0 to 100), Day: A, B

Let's see what this does to my table:

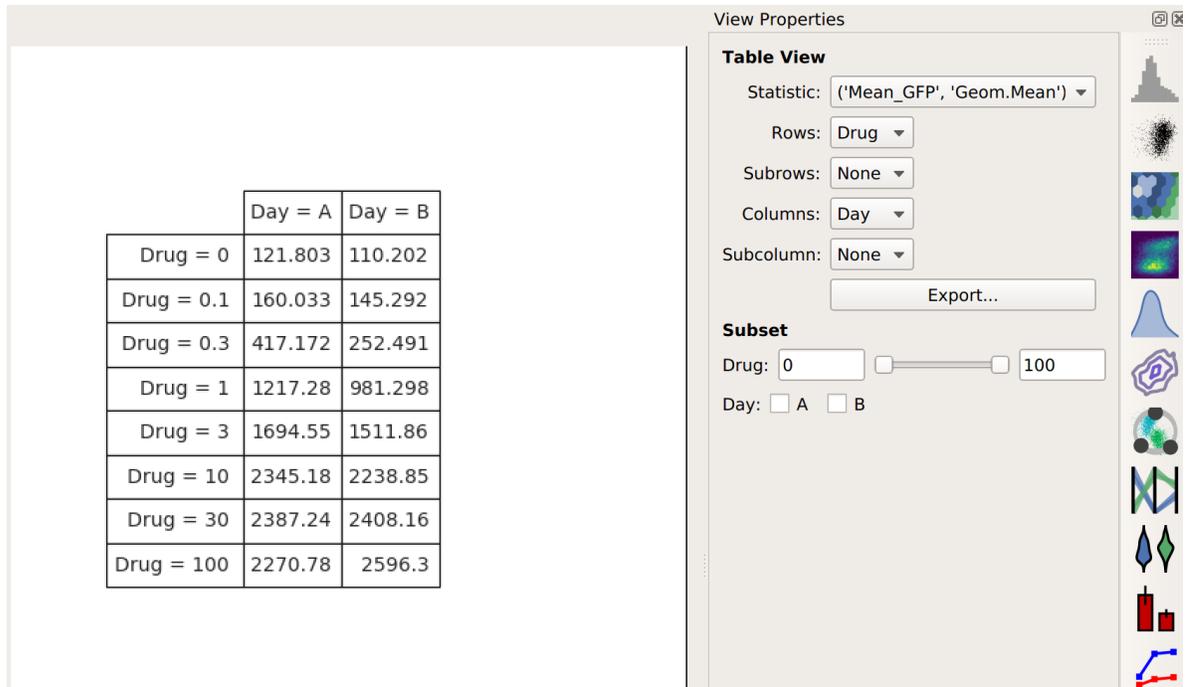

Note that I now have *two* conditions that I can use when making my table: **Drug** and **Day**. This is because the channel statistic operation computed a geometric mean for *each unique combination of Drug and Day values*. So instead of 8 means, now I have 16. Here, I've configured the table view to show different amounts of drug on different rows and different days in different columns.

Again, I could export this if I wanted – or I could plot it. Let's make another **1D Statistics View** plot, putting the two different days in different colors:

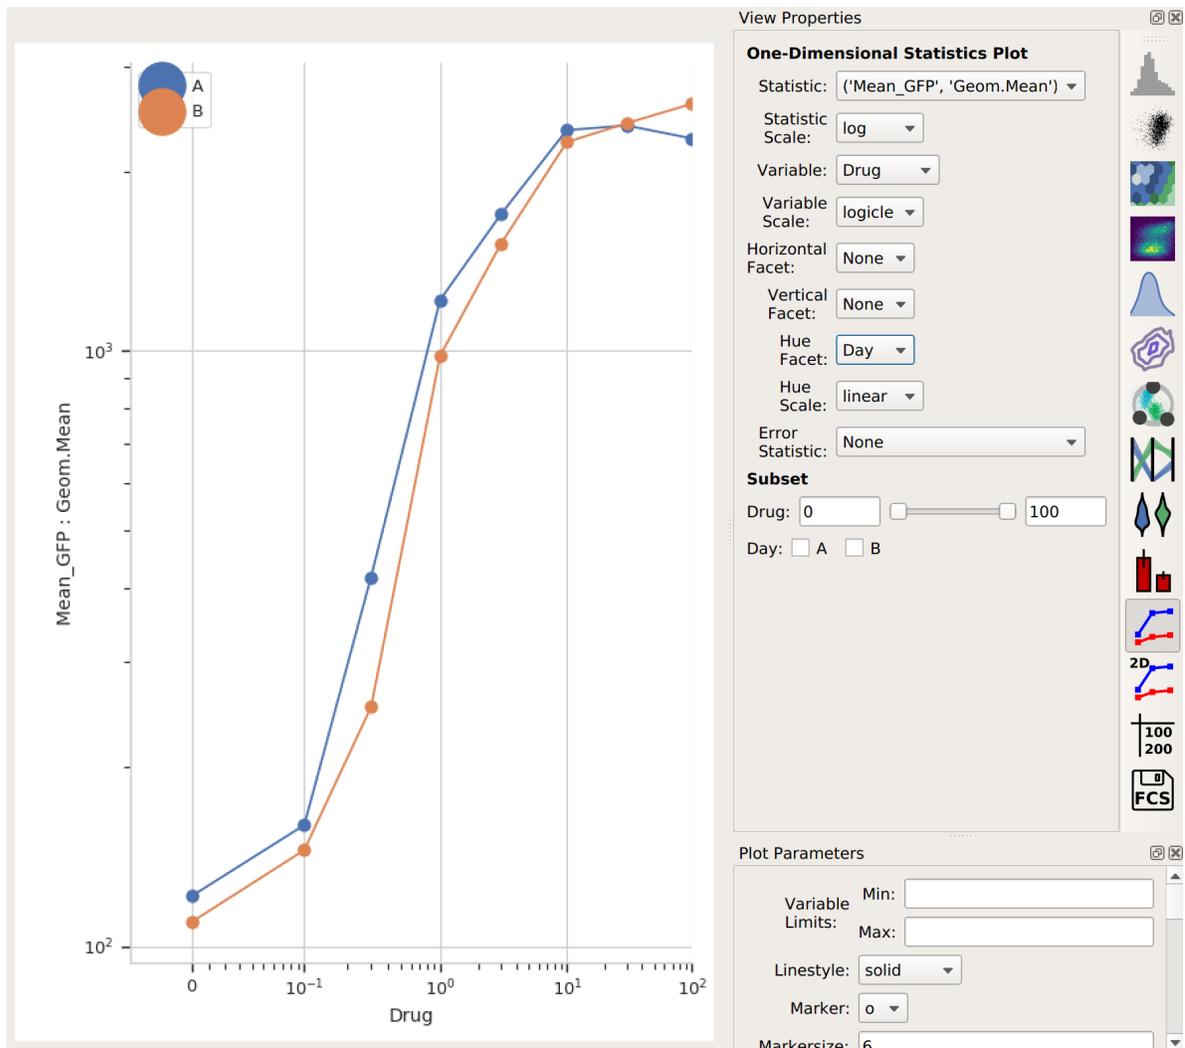

Note that the “Day A” values are pretty consistently higher than “Day B”. I wonder how much higher, and how consistently so? We can answer this question with another operation, called **Transform Statistic**. This works similarly to **Channel Statistic**, in that it groups things together and applies a function. However, instead of grouping together events from the flow cytometer, it groups together *values in another statistic* before applying the function. (This way, it *transforms* that statistic – see?)

This time, I’ll group by **Drug** (and *not Day*). Remember, this will take the starting statistic, split it into groups for each unique value of **Drug**, and then apply the **Fold** function to each group. (Fold simply divides every value in the group by the minimum value.)

 **Fold_GFP** 
Transform Statistic

Name:

Statistic:

Function:

Group By: Day Drug

Subset

Day: A B

Drug: 

| | Day = A | Day = B |
|------------|---------|---------|
| Drug = 0 | 1.10527 | 1 |
| Drug = 0.1 | 1.10146 | 1 |
| Drug = 0.3 | 1.65223 | 1 |
| Drug = 1 | 1.24048 | 1 |
| Drug = 3 | 1.12084 | 1 |
| Drug = 10 | 1.04749 | 1 |
| Drug = 30 | 1 | 1.00877 |
| Drug = 100 | 1 | 1.14335 |

View Properties

Table View

Statistic: ('Fold_GFP', 'Fold') ▼

Rows: Drug ▼

Subrows: None ▼

Columns: Day ▼

Subcolumn: None ▼

Export...

Subset

Day: A B

Drug:

The **Fold** function produces a statistic the same size and shape as the one it's operating on. However, some functions *reduce* the size of the statistic – for example, if we apply **Geom.Mean** again, we only get a table with one column (because it's taking the geometric mean of all the values in each group):

The screenshot shows the Cytoflow software interface. The main window is titled "Cytometry analysis - Cytoflow*". The interface is divided into several panels:

- Workflow:** Contains three steps:
 - Import Data:** Import
 - Mean_GFP:** Channel Statistics
 - Fold_GFP:** Transform Statistic. The configuration for this step is:
 - Name: Fold_GFP
 - Statistic: ('Mean_GFP', 'Geom.Mean')
 - Function: Geom.Mean
 - Group By: Day, Drug
 - Subset: Day: A, B; Drug: 0 to 100 (slider)
- Table View:** Shows a table of results for the 'Fold_GFP' statistic, grouped by 'Drug'.

| | |
|------------|---------|
| Drug = 0 | 115.857 |
| Drug = 0.1 | 152.484 |
| Drug = 0.3 | 324.549 |
| Drug = 1 | 1092.94 |
| Drug = 3 | 1600.6 |
| Drug = 10 | 2291.4 |
| Drug = 30 | 2397.68 |
| Drug = 100 | 2428.09 |
- View Properties:** Shows settings for the 'Table View' of the 'Fold_GFP' statistic:
 - Statistic: ('Fold_GFP', 'Geom.Mean')
 - Rows: Drug
 - Subrows: None
 - Columns: None
 - Subcolumn: None
 - Export... button
 - Subset: Drug: 0 to 100 (slider)
- Help:** A section titled "Table" with the text: "Make a table out of a statistic. The t be exported."

Statistics are a pretty key part of the way Cytoflow is meant to be used. I hope this explanation made sense – if you feel it can be improved, please feel free to submit a bug (or, even better, a patch or pull request) to improve it.

5.1.17 Guide: Using *facets* to compare data sets

Cytoflow uses an idea called *facets* to help you analyze data. It's taken from Tufte's [trellis plots](#), which is a fancy term for a simple idea: that to *compare* two data sets, you should plot them next to each other using the same scale and axes:

Let's say I have two different FCS files. As I imported them, I created a `Sample` variable and assigned the tubes `Sample_1` and `Sample_2`, respectively. Now I want to compare them using a histogram plot. Remember that by default, Cytoflow shows *all* of the data, *from both of the tubes*, at the same time on the plot:



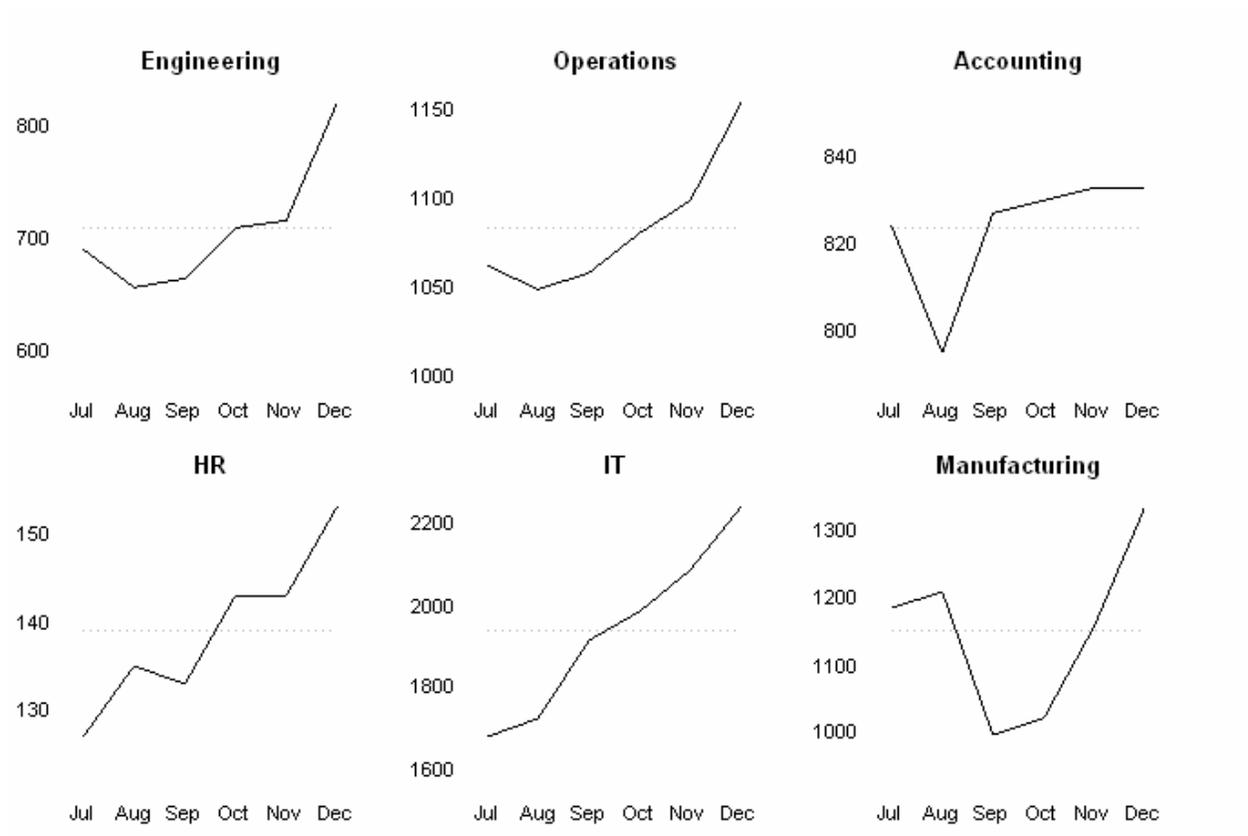



Fig. 2: This figure shows multiple line plots on the same X axes, making it easy to compare between them. (Image by Wikipedia user Chrispounds)

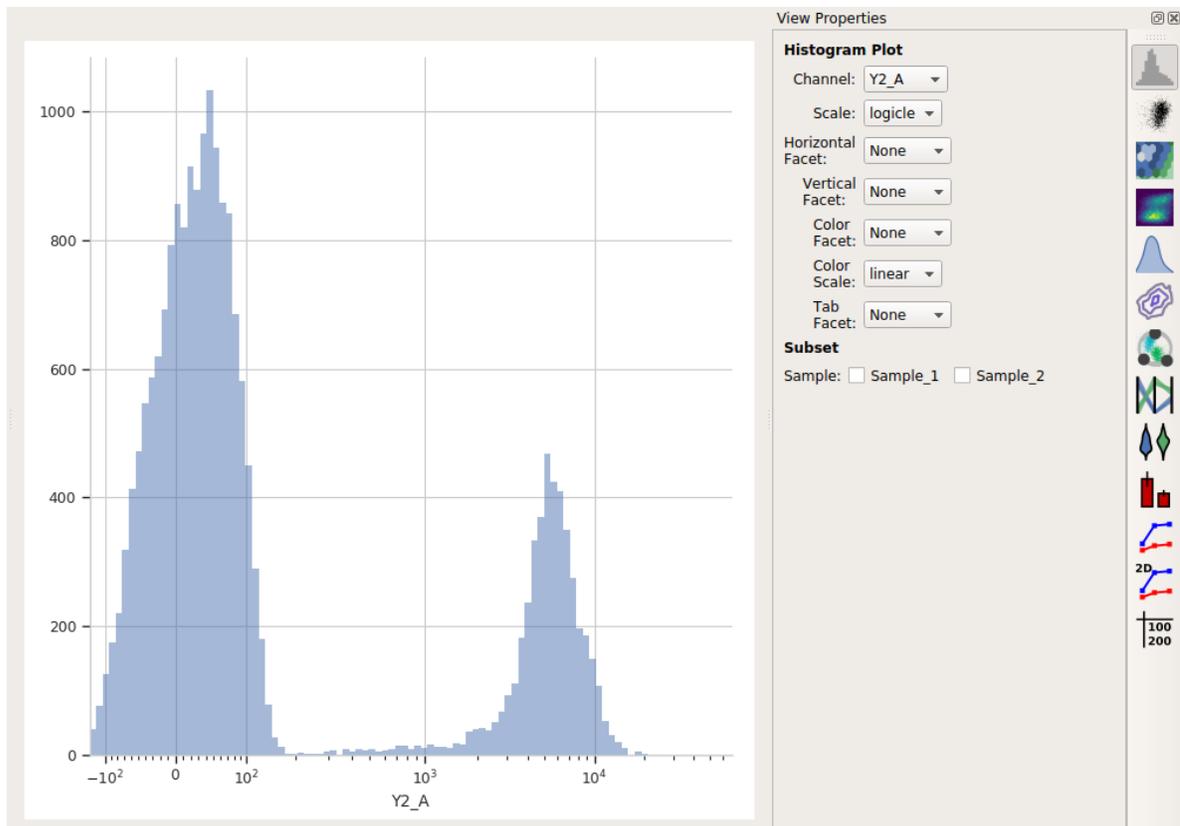


However, Cytosflow also makes it easy to compare these two samples. I can put them on separate plots, side-by-side, by setting `Horizontal Facet` to the *variable* that I want to compare. In this case, it's `Sample`:

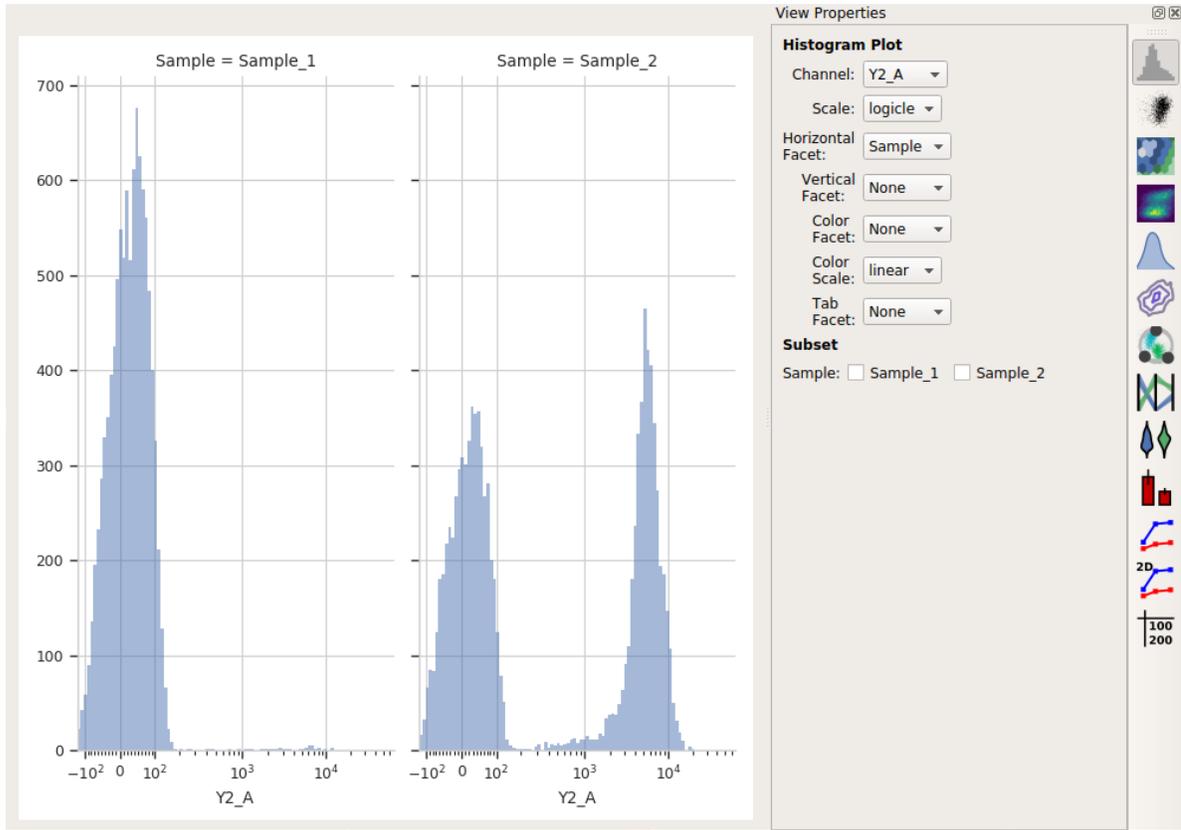

Note that the title of the plot shows me both which *variable* I'm comparing and what the *value* of that variable is in each plot. Similarly, I can create separate plots but stack them on top of each other with the `Vertical Facet` setting:

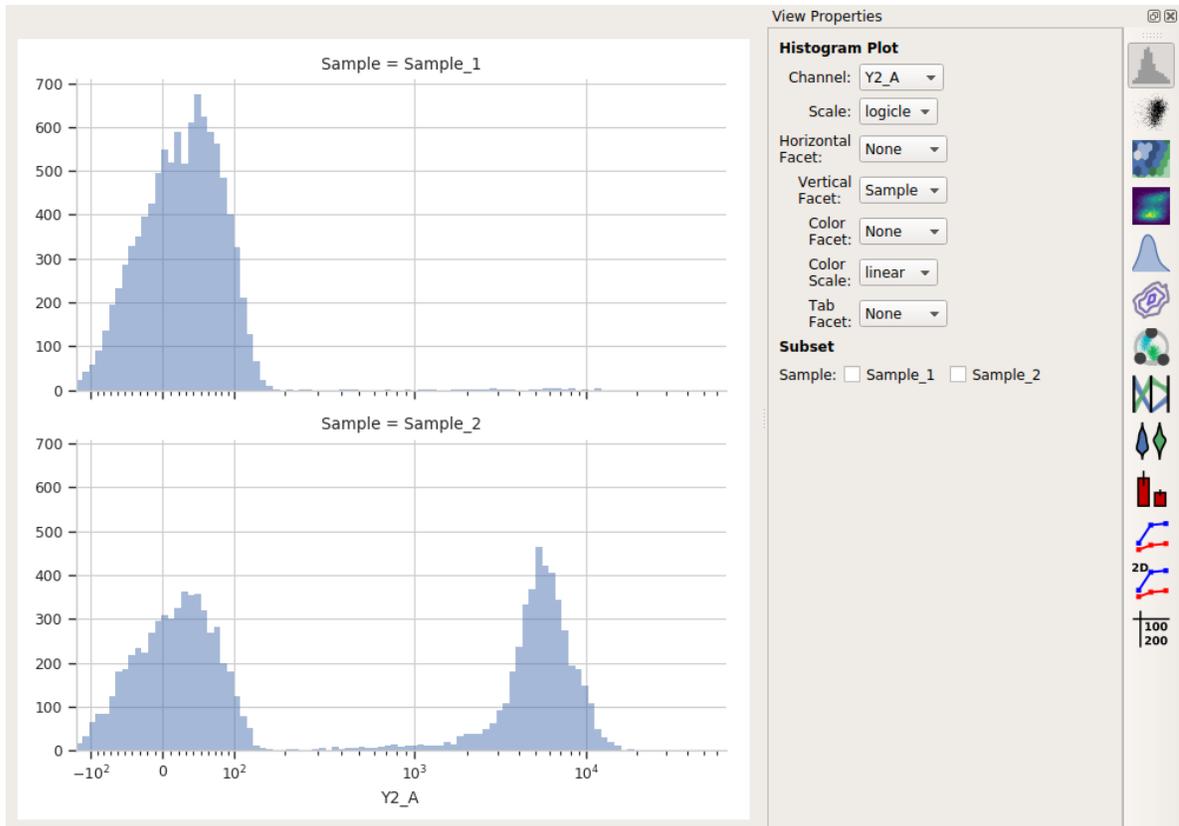


You can also view them on the same plot but with different colors using the Color Facet setting:

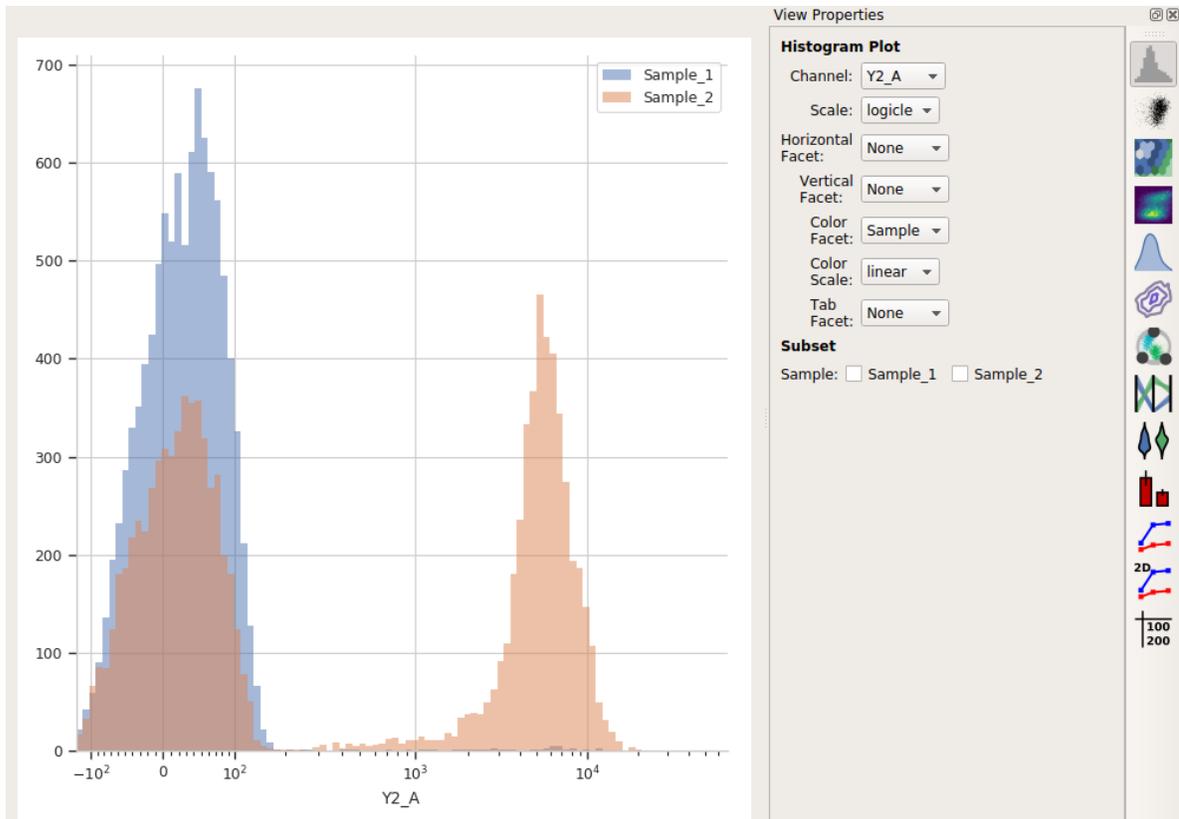

(No, you can't change the colors, at least not in the point-and-click interface – they're the from default [Seaborn qualitative palette](#). If you'd like to be able to change the colors, submit a feature request or (even better) a patch!)

Finally, if you have multiple variables, you can set multiple facets at once to compare across them all. For example, I've added a Threshold gate called Morpho, and now I can compare data across different values of both Sample and Morpho:

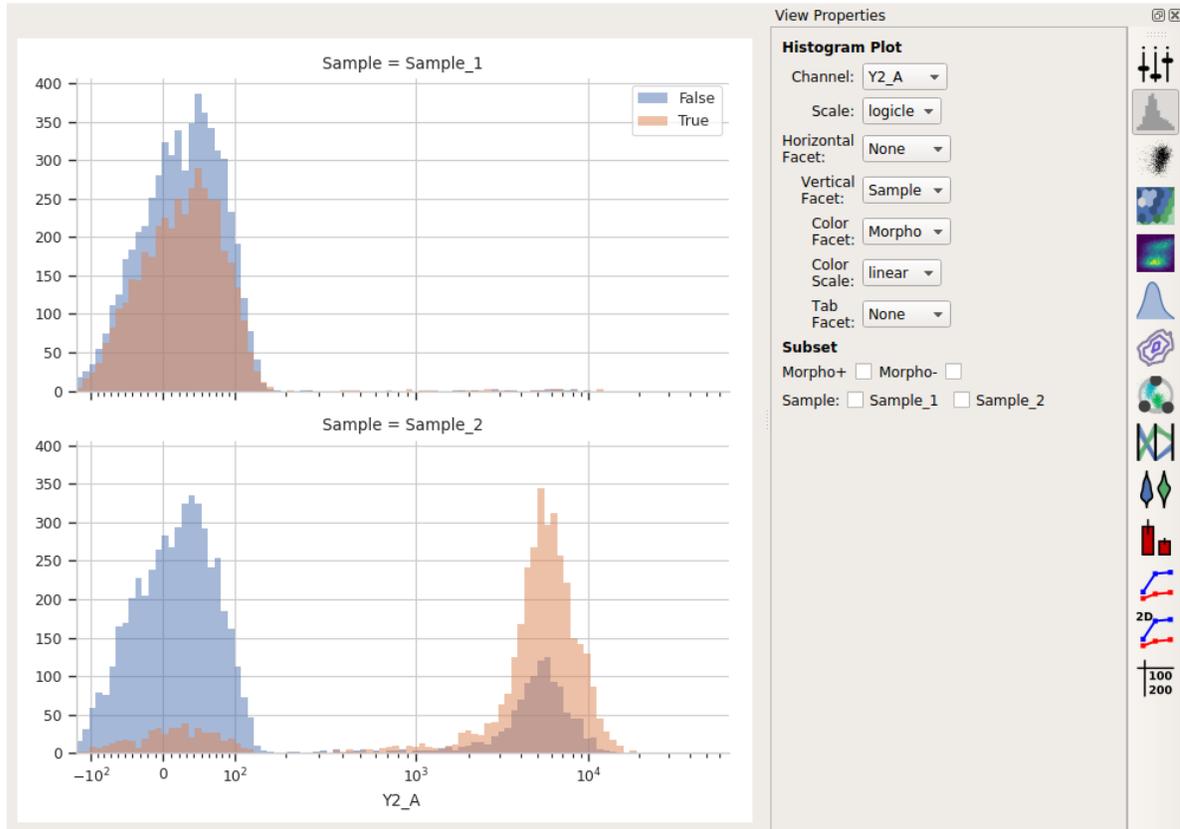

5.1.18 Guide: How can I understand the experiment structure?

When creating a complex analysis, it can be easy to lose track of the channels, conditions, and statistics that you've created in your workflow. In order to give users both a quick overview of their experiment and allow them to "drill down" into their experiment structure, Cytoflow includes an **Experiment Browser**.

Consider the experiment outlined in [Tutorial: Synthetic Gene Logic Network](#) – five channels, three experimental conditions, two conditions added in the analysis, and a number of statistics. It's a lot to keep in your head! However, if you select the last operation in the workflow, the **Experiment Browser** shows this:

✔ **FITC_mean** ✕
 Channel Statistics

Name:

Channel:

Function:

Condition Transfected
 Dox Transfection_Bin
 Replicate

Subset

Full_Circuit No_gRNA
 No_Cas9

Dox:
 1 3

Experiment Browser @ ✕


- ▾ Channels
 - FITC_A
 - FSC_A
 - PE_TxRed_YG_A
 - Pacific_Blue_A
 - SSC_A
- ▾ Conditions
 - Condition
 - Dox
 - Replicate
 - Transfected
 - Transfection_Bin
- ▾ Statistics
 - ('Transfected', 'mean')
 - ('Transfected', 'sigma')
 - ('Transfected', 'interval')
 - ('Transfected', 'proportion')
 - ('FITC_mean', 'Geom.Mean')

Note: If the **Experiment Browser** isn't visible, you can show it by selecting it from the **View** menu or clicking the corresponding button on the button bar.

Here, you can see the channels, conditions, and statistics in the experiment in a tree view. If you open one, by clicking the caret or double-clicking the name, you are shown additional information about each. Let's walk through all three below.

Channels

Each *channel* is shown in the experiment browser. When you open a channel, additional metadata about the channel is visible, such as the original name in the `.fcs` file and the range of the channel. Additionally, if the channel has been manipulated in any way, or is a "synthetic" or derived channel, the operations that did so leave some metadata as well. For example, if you create a new channel with the **Ratio** operation, the numerator and denominator are shown.

Σ
 Σ, σ
 $\frac{a}{b}$



✔ **FITC_mean**
 Channel Statistics ✕

✔ **FITC_over_FSC**
 Ratio ✕

Name:

Numerator:


Denominator:

Experiment Browser 🔍 ✕

- ▾ Channels
 - ▾ FITC_A
 - type: 'channel'
 - fcs_name: 'FITC-A'
 - range: '262143.0'
 - ▾ FITC_over_FSC
 - type: 'channel'
 - numerator: 'FITC_A'
 - denominator: 'FSC_A'
 - FSC_A
 - PE_TxRed_YG_A
 - Pacific_Blue_A
 - SSC_A


Conditions

Remember, *conditions* – either experimental conditions or conditions that were added by operations – are how you control the plotting and statistics. You can view the conditions in the browser as well. When you open them, you can see the type of condition, the condition's type (boolean, numeric, categorical), and the values of that condition.

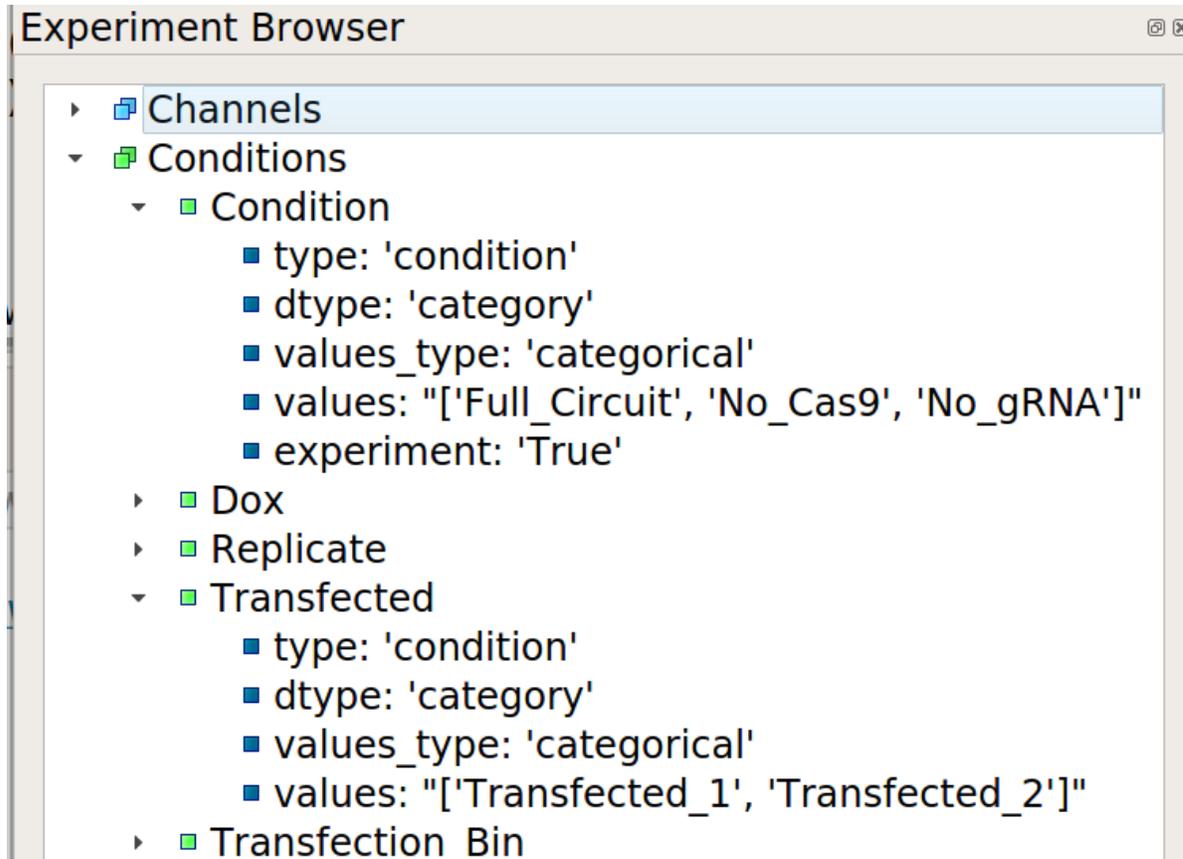

Statistics

Remember, *statistics* are summaries of the data that are computed by an operation. The statistics that have been added to the experiment are also shown by the browser window, including the facets over which the statistic was computed and the various values of those facets.













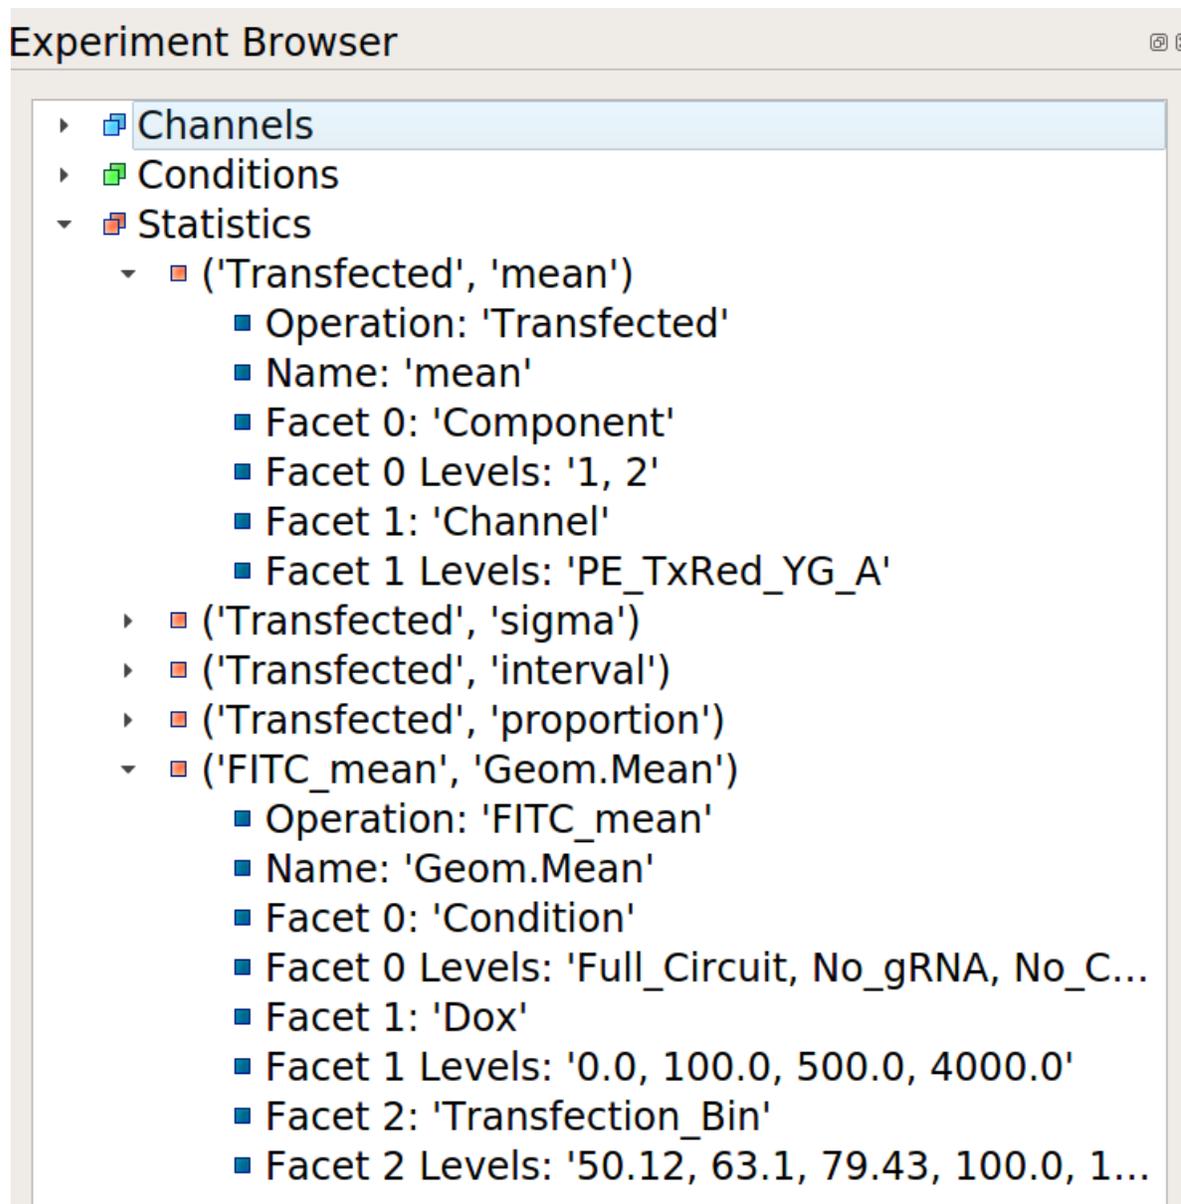


4. *Reference documents* for each operation and view in Cytoflow. These are the same documents that appear in the **Help** pane in the user interface.

5.1.19 Operation and View Gallery

Below is a gallery of *Cytoflow*'s operations and views. Each header will take you to the corresponding manual page.

Operations

| | | | |
|--|---|---|--|
| <p><i>Autofluorescence correction</i></p>  <p>operations/autofluorescence-1.png</p> | <p><i>Bead calibration</i></p>  <p>operations/bead_calibration-1.png</p> | <p><i>Binning</i></p>  <p>operations/binning-1.png</p> | <p><i>Bleedthrough correction</i></p>  <p>operations/bleedthrough_linear-</p> |
| <p><i>Channel Statistics</i></p>  | <p><i>Color translation</i></p>  <p>operations/color_translation-1.png</p> | <p><i>Density gate</i></p>  <p>operations/density-1.png</p> | <p><i>FlowPeaks</i></p>  <p>operations/flowpeaks-1_01.png</p> |
| <p><i>1D Gaussian</i></p>  <p>operations/gaussian_1d-1.png</p> | <p><i>2D Gaussian</i></p>  <p>operations/gaussian_2d-1.png</p> | <p><i>KMeans Clustering</i></p>  <p>operations/kmeans-1.png</p> | <p><i>Principle Component Analysis</i></p>  |
| <p><i>Polygon Gate</i></p>  <p>operations/polygon-1.png</p> | <p><i>Quad Gate</i></p>  <p>operations/quad-1.png</p> | <p><i>Range Gate</i></p>  <p>operations/range-1.png</p> | <p><i>Rectangle Gate</i></p>  <p>operations/range2d-1.png</p> |
| <p><i>Ratio</i></p>  | <p><i>TASBE Calibration</i></p>  <p>operations/tasbe-4.png</p> | <p><i>Threshold Gate</i></p>  <p>operations/threshold-1.png</p> | <p><i>Transform Statistic</i></p>  |

Views

| | | | |
|--|---|--|---|
| <p><i>Bar Chart</i></p> <p>views/bar_chart-1.png</p> | <p><i>Density Map</i></p> <p>views/density-1.png</p> | <p><i>Export FCS</i></p> | <p><i>Histogram</i></p> <p>views/histogram-1.png</p> |
| <p><i>2D Histogram</i></p> <p>views/histogram_2d-1.png</p> | <p><i>Kernel Density Estimate</i></p> <p>views/kde_1d-1.png</p> | <p><i>2D Kernel Density Estimate</i></p> <p>views/kde_2d-1.png</p> | <p><i>Parallel Coordinates Co-Plot</i></p> <p>views/parallel_coords-1.png</p> |
| <p><i>RadViz Plot</i></p> <p>views/radviz-1.png</p> | <p><i>Scatterplot</i></p> <p>views/scatterplot-1.png</p> | <p><i>1D Statistics Plot</i></p> <p>views/stats_1d-1.png</p> | <p><i>2D Statistics Plot</i></p> <p>views/stats_2d-1.png</p> |
| <p><i>Table View</i></p> <p>views/table-1.png</p> | <p><i>Violin Plot</i></p> <p>views/violin-1.png</p> | | |

Operations

Autofluorescence correction

Apply autofluorescence correction to a set of fluorescence channels.

This module estimates the arithmetic median fluorescence from cells that are not fluorescent, then subtracts the median from the experimental data.

Check the diagnostic plot to make sure that the sample is actually non-fluorescent, and that the module found the population median.

Channels


The channels to correct

Blank file

The FCS file containing measurements of blank cells.

Note: You cannot have any operations before this one which estimate model parameters based on experimental conditions. (Eg, you can't use a **Density Gate** to choose morphological parameters and set *by* to an experimental

condition.) If you need this functionality, you can access it using the Python module interface.

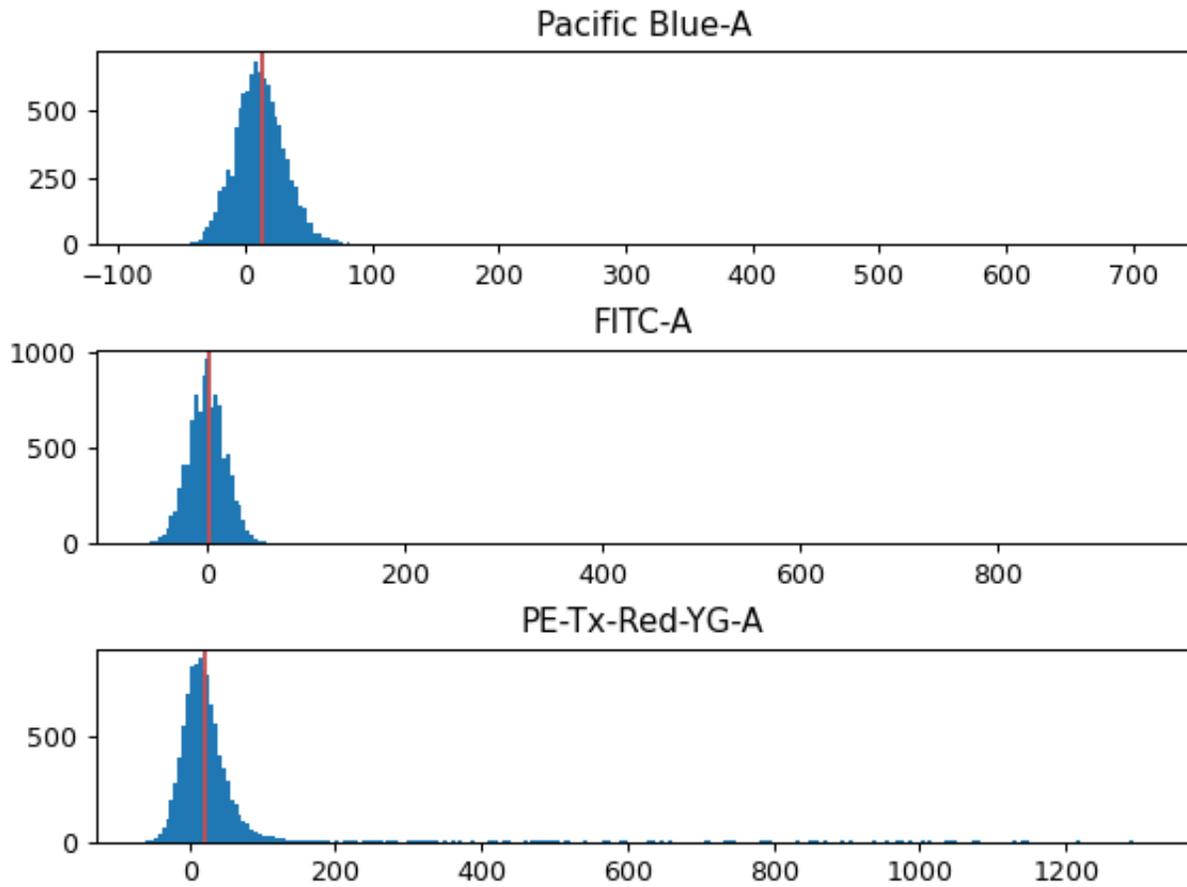

Bead Calibration

Calibrate arbitrary channels to molecules-of-fluorophore using fluorescent beads (eg, the **Spherotech RCP-30-5A** rainbow beads.)

Computes a log-linear calibration function that maps arbitrary fluorescence units to physical units (ie molecules equivalent fluorophore, or *MEF*).

To use, set **Beads** to the beads you calibrated with (check the lot!) and **Beads File** to an FCS file containing events collected *using the same cytometer settings as the data you're calibrating*. Then, click **Add a channel** to add the channels to calibrate, and set both the channel name and the units you want calibrate to. Click **Estimate**, and *make sure you check the diagnostic plot to see that the correct peaks were found*.

If it didn't find all the peaks (or found too many), try tweaking **Peak Quantile**, **Peak Threshold** and **Peak Cutoff**. If you can't make the peak finding work by tweaking , please submit a bug report!

Beads

The beads you're calibrating with. Make sure to check the lot number!

Beads file

A file containing the FCS events from the beads.

Channels


A list of the channels you want calibrated and the units you want them calibrated in.

Peak Quantile

Peaks must be at least this quantile high to be considered. Default = 80.

Peak Threshold

Don't search for peaks below this brightness. Default = 100.

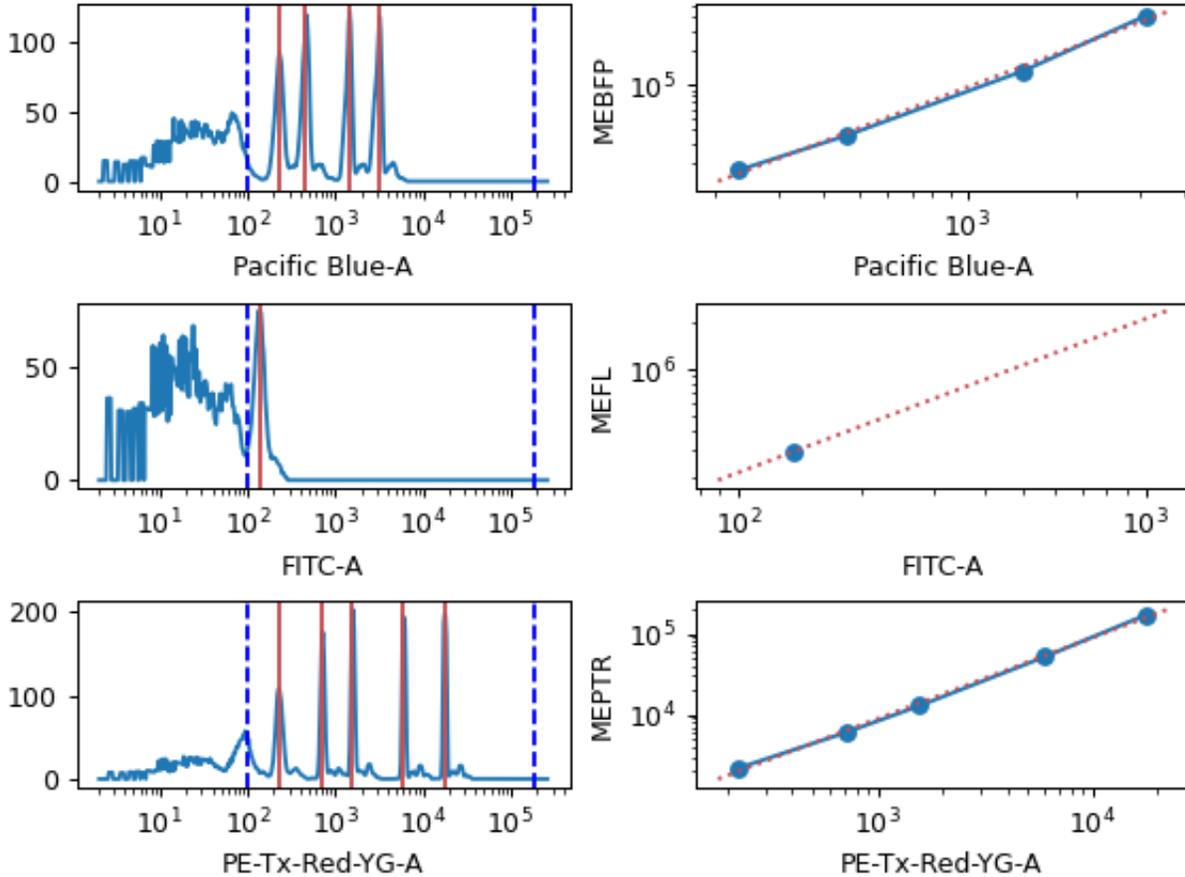

Note: It works best to choose units of a fluorophore that is spectrally matched to the channel that you're calibrating. Here are the beads that Cytotflow knows about (including the laser and filter sets used to characterize the beads):

- Spherotech ACP 30-2K
- Spherotech RCP-30-5A Lot AN04, AN03, AN02, AN01, AM02, AM01, AL01, AK04, AK03 & AK02**
- Spherotech RCP-30-5A (Euroflow) Lot EAM02 & EAM01
- Sphreotech RCP-30-5A (Euroflow) Lot EAK01, EAG01, EAE01 & EAF01
- Spherotech RCP-30-5A Lot AK01, AJ01, AH02, AH01, AF02, AF01, AD04 & AE01
- Spherotech RCP-30-5A Lot AG01
- Spherotech RCP-30-5A Lot AA01, AA02, AA03, AA04, AB01, AB02, AC01 & GAA01-R
- Spherotech RCP-30-5A Lot AC02, AC03 & AD01

- Spherotech RCP-30-5A Lot Z02 and Z03
- Spherotech RCP-30-5 Lot AA01, AB01, AB02, AC01 & AD01
- Spherotech RCP-30-5 Lot AM02, AM01, AL01, AH01, AG01, AF01 & AD03
- Spherotech RCP-60-5
- Spherotech URCP 38-2K
- Spherotech URCP 38-2K Lot AN01, AM01, AL02, AL01, AK03, AK02, AK01, AJ02 & AJ03
- Spherotech URCP 50-2K Lot AM01 & AJ01
- Spherotech URCP 50-2K

The Spherotech fluorophores labels and the laser / filter sets (that I know about) are:

- **MECSB** (Cascade Blue, 405 → 450/50)
 - **MEBFP** (BFP, 405 → 530/40)
 - **MEFL** (Fluorescein, 488 → 530/40)
 - **MEPE** (Phycoerythrin, 488 → 575/25)
 - **MEPTR** (PE-Texas Red, 488 → 613/20)
 - **MECY** (Cy5, 488 → 680/30)
 - **MEPCY7** (PE-Cy7, 488 → 750 LP)
 - **MEAP** (APC, 633 → 665/20)
 - **MEAPCY7** (APC-Cy7, 635 → 750 LP)
-

Binning

Bin data along an axis.

This operation creates equally spaced bins (in linear or log space) along an axis and adds a condition assigning each event to a bin. The value of the event's condition is the left end of the bin's interval in which the event is located.

Name

The name of the new condition created by this operation.

Channel


The channel to apply the binning to.

Scale

The scale to apply to the channel before binning.

Bin Width

How wide should each bin be? Can only set if **Scale** is *linear* or *log* (in which case, **Bin Width** is in log₁₀-units.)

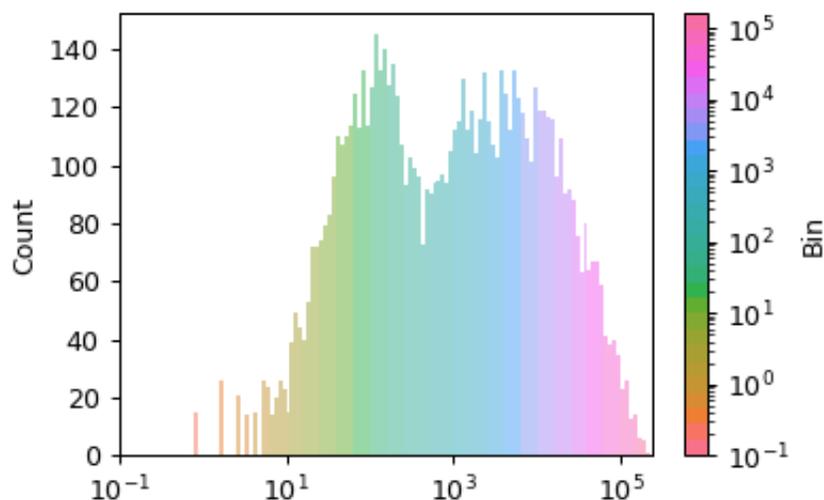

Linear Bleedthrough Compensation

Apply matrix-based bleedthrough correction to a set of fluorescence channels.

This is a traditional matrix-based compensation for bleedthrough. For each pair of channels, the module estimates the proportion of the first channel that bleeds through into the second, then performs a matrix multiplication to compensate the raw data.

This works best on data that has had autofluorescence removed first; if that is the case, then the autofluorescence will be subtracted from the single-color controls too.

To use, specify the single-color control files and which channels they should be measured in, then click **Estimate**. Check the diagnostic plot to make sure the estimation looks good. There must be at least two channels corrected.

Add Control, Remove Control

Add or remove single-color controls.

Note: You cannot have any operations before this one which estimate model parameters based on experimental conditions. (Eg, you can't use a **Density Gate** to choose morphological parameters and set *by* to an experimental condition.) If you need this functionality, you can access it using the Python module interface.

Channel statistic

Apply a function to subsets of a data set, and add it as a statistic to the experiment.


First, the module groups the data by the unique values of the variables in **By**, then applies **Function** to the **Channel** in each group.

Name

The operation name. Becomes the first part of the new statistic's name.

Channel

The channel to apply the function to.

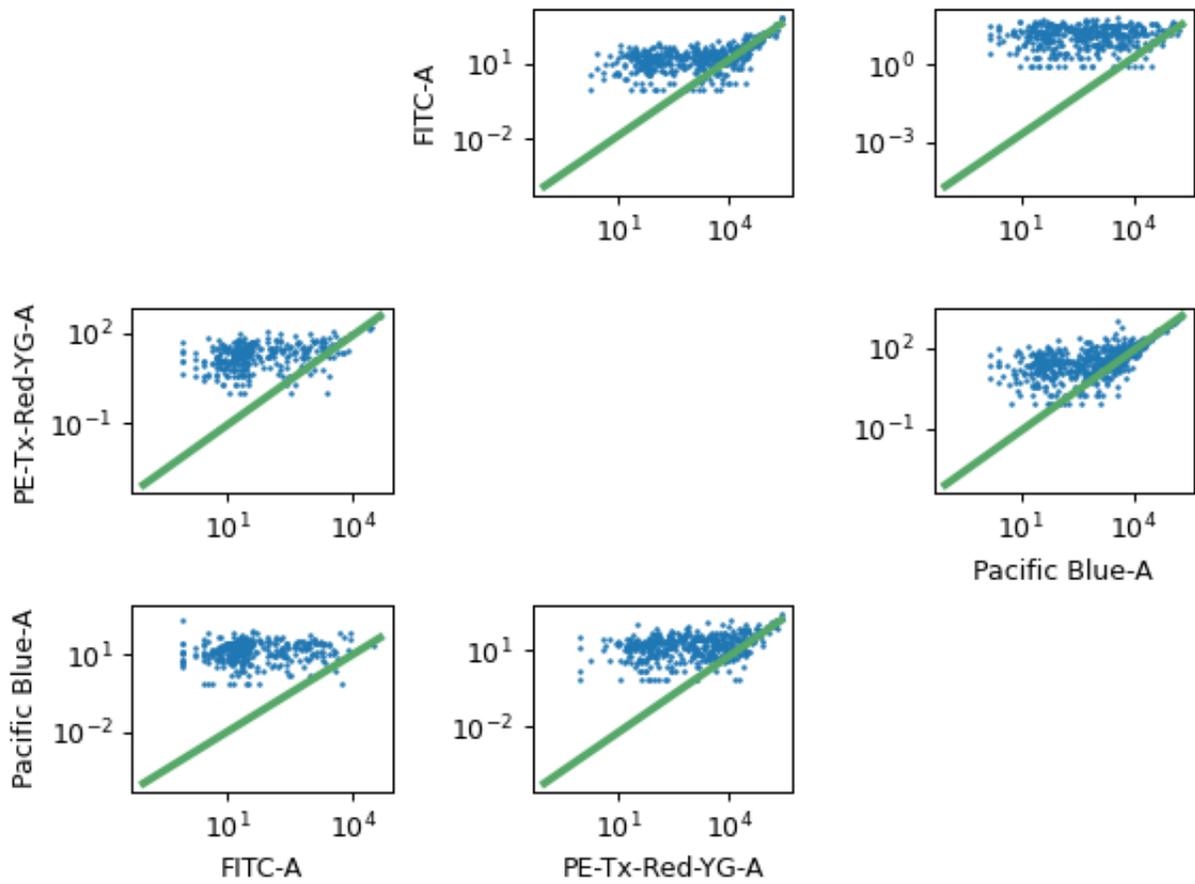

Function

The function to compute on each group.

Subset

Only apply the function to a subset of the data. Useful if the function is very slow.

Color Translation

Translate measurements from one color's scale to another, using a two-color or three-color control.

To use, set up the **Controls** list with the channels to convert and the FCS files to compute the mapping. Click **Estimate** and make sure to check that the diagnostic plots look good.

Add Control, Remove Control

Add and remove controls to compute the channel mappings.

Use mixture model?

If True, try to model the **from** channel as a mixture of expressing cells and non-expressing cells (as you would get with a transient transfection), then weight the regression by the probability that the the cell is from the top (transfected) distribution. Make sure you check the diagnostic plots to see that this worked!

Note: You cannot have any operations before this one which estimate model parameters based on experimental conditions. (Eg, you can't use a **Density Gate** to choose morphological parameters and set *by* to an experimental condition.) If you need this functionality, you can access it using the Python module interface.

Density Gate

Computes a gate based on a 2D density plot. The user chooses what proportion of events to keep, and the module creates a gate that selects those events in the highest-density bins of a 2D density histogram.

A single gate may not be appropriate for an entire experiment. If this is the case, you can use **By** to specify metadata by which to aggregate the data before computing and applying the gate.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale




Re-scale the data in **Channel** before fitting.

Keep

The proportion of events to keep in the gate. Defaults to 0.9.

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, **Time** and **Dox**, setting **by** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of **Time** and **Dox**.

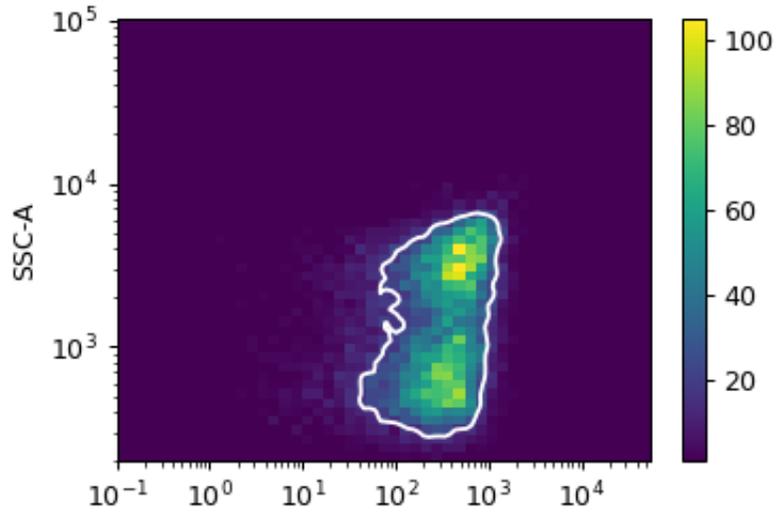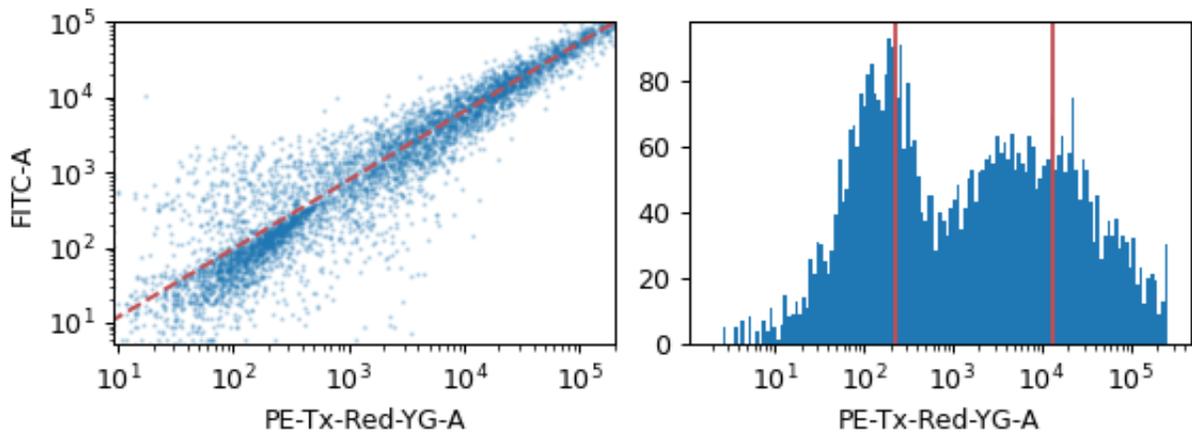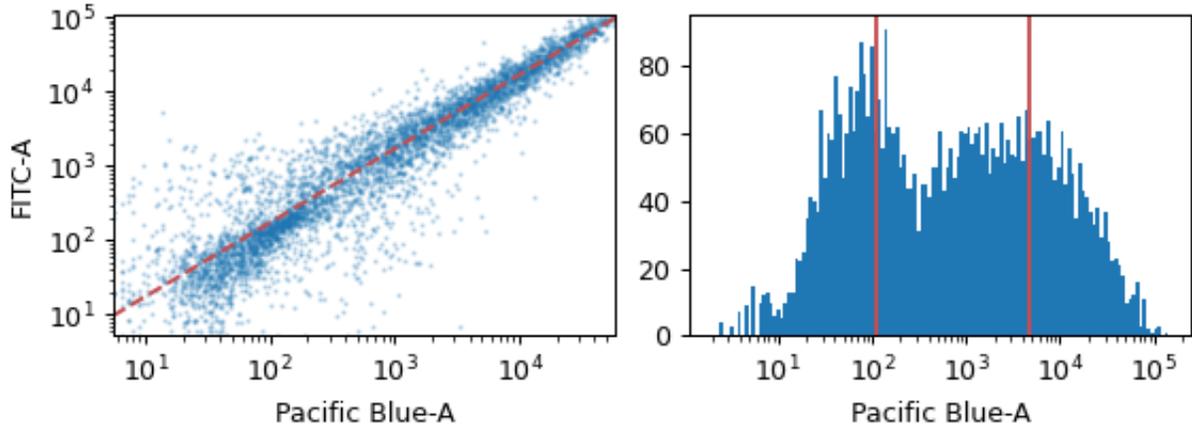

FlowPeaks Clustering

This module uses the **flowPeaks** algorithm to assign events to clusters in an unsupervised manner.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale

Re-scale the data in **Channel** before fitting.

h, h0

Scalar values that control the smoothness of the estimated distribution. Increasing **h** makes it “rougher,” while increasing **h0** makes it smoother.

tol


How readily should clusters be merged? Must be between 0 and 1.


Merge Distance

How far apart can clusters be before they are merged?

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, **Time** and **Dox**, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of **Time** and **Dox**.

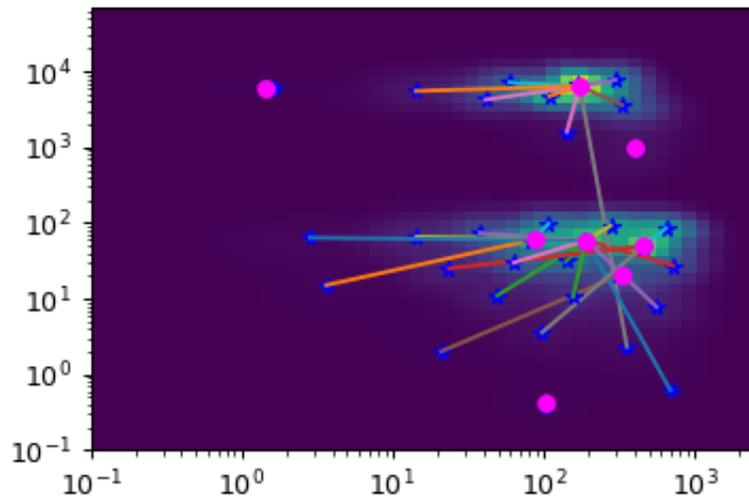

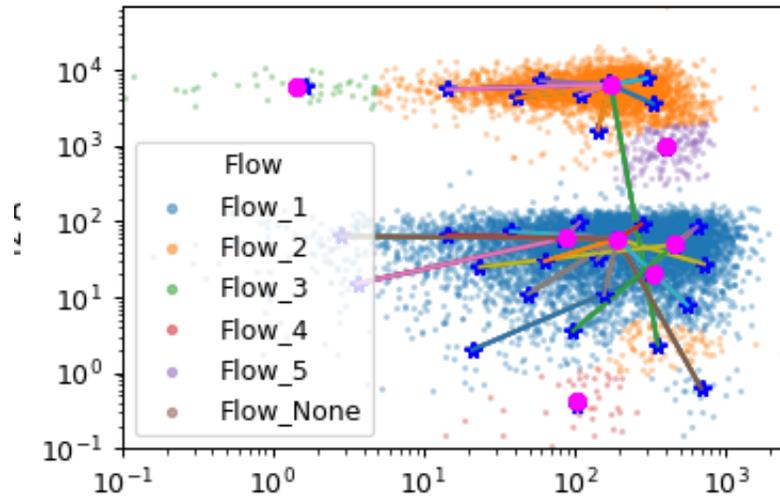

Gaussian Mixture Model (1D)

Fit a Gaussian mixture model with a specified number of components to one channel.

If **Num Components** is greater than 1, then this module creates a new categorical metadata variable named **Name**, with possible values `{name}_1` ... `name_n` where `n` is the number of components. An event is assigned to `name_i` category if it has the highest posterior probability of having been produced by component `i`. If an event has a value that is outside the range of one of the channels' scales, then it is assigned to `{name}_None`.

Additionally, if **Sigma** is greater than 0, this module creates new boolean metadata variables named `{name}_1` ... `{name}_n` where `n` is the number of components. The column `{name}_i` is True if the event is less than **Sigma** standard deviations from the mean of component `i`. If **Num Components** is 1, **Sigma** must be greater than 0.

Finally, the same mixture model (mean and standard deviation) may not be appropriate for every subset of the data. If this is the case, you can use **By** to specify metadata by which to aggregate the data before estimating and applying a mixture model.

Note: **Num Components** and **Sigma** withh be the same for each subset.

Name

The operation name; determines the name of the new metadata

Channel

The channels to apply the mixture model to.

Scale

Re-scale the data in **Channel** before fitting.

Num Components


How many components to fit to the data? Must be a positive integer.

Sigma

How many standard deviations on either side of the mean to include in the boolean variable `{name}_i`? Must be None or > 0.0 . If **Num Components** is 1, must be > 0 .

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, `Time` and `Dox`, setting `By` to `["Time", "Dox"]` will fit the model separately to each subset of the data with a unique combination of `Time` and `Dox`.

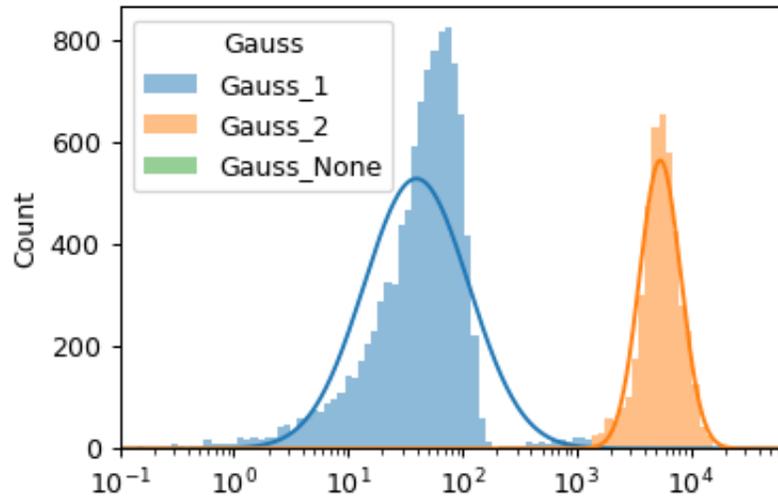

Gaussian Mixture Model (2D)

Fit a Gaussian mixture model with a specified number of components to two channels.

If **Num Components** is greater than 1, then this module creates a new categorical metadata variable named **Name**, with possible values `{name}_1` ... `name_n` where `n` is the number of components. An event is assigned to `name_i` category if it has the highest posterior probability of having been produced by component `i`. If an event has a value that is outside the range of one of the channels' scales, then it is assigned to `{name}_None`.

Additionally, if **Sigma** is greater than 0, this module creates new boolean metadata variables named `{name}_1` ... `{name}_n` where `n` is the number of components. The column `{name}_i` is `True` if the event is less than **Sigma** standard deviations from the mean of component `i`. If **Num Components** is 1, **Sigma** must be greater than 0.

Finally, the same mixture model (mean and standard deviation) may not be appropriate for every subset of the data. If this is the case, you can use `By` to specify metadata by which to aggregate the data before estimating and applying a mixture model.

Note: **Num Components** and **Sigma** will be the same for each subset.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale

Re-scale the data in **Channel** before fitting.

Num Components


How many components to fit to the data? Must be a positive integer.

Sigma

How many standard deviations on either side of the mean to include in the boolean variable {name}_i? Must be ≥ 0.0 . If **Num Components** is 1, must be > 0 .

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, **Time** and **Dox**, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

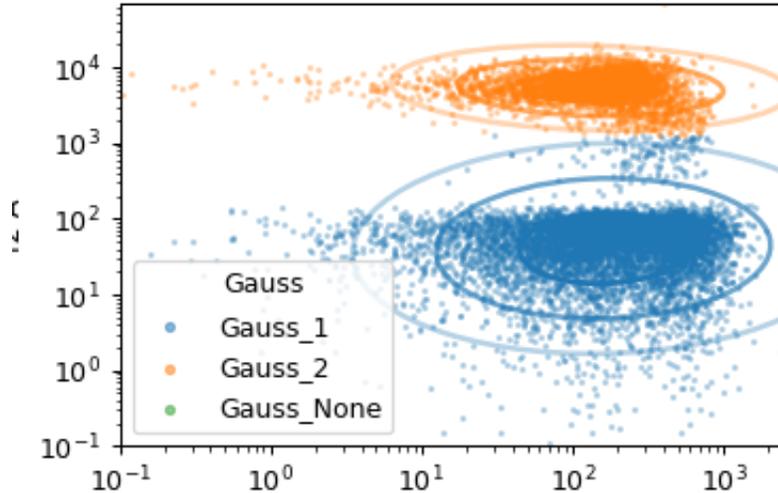

Import Files

Import FCS files and associate them with experimental conditions (metadata.)

Channels

Here, you can rename channels to use names that are more informative, or remove channels you don't need. Names must be valid Python identifiers (must contain only letters, numbers and underscores and must start with a letter or underscore.)

Reset channel names

Reset the channels and channel names.


Events per sample

For very large data sets, *Cytoflow*'s interactive operation may be too slow. By setting **Events per sample**, you can tell *Cytoflow* to import a smaller number of events from each FCS file, which will make interactive data exploration much faster. When you're done setting up your workflow, set **Events per sample** to empty or 0 and *Cytoflow* will re-run your workflow with the entire data set.

Set up experiment....

Open the sample editor dialog box.

The sample editor dialog

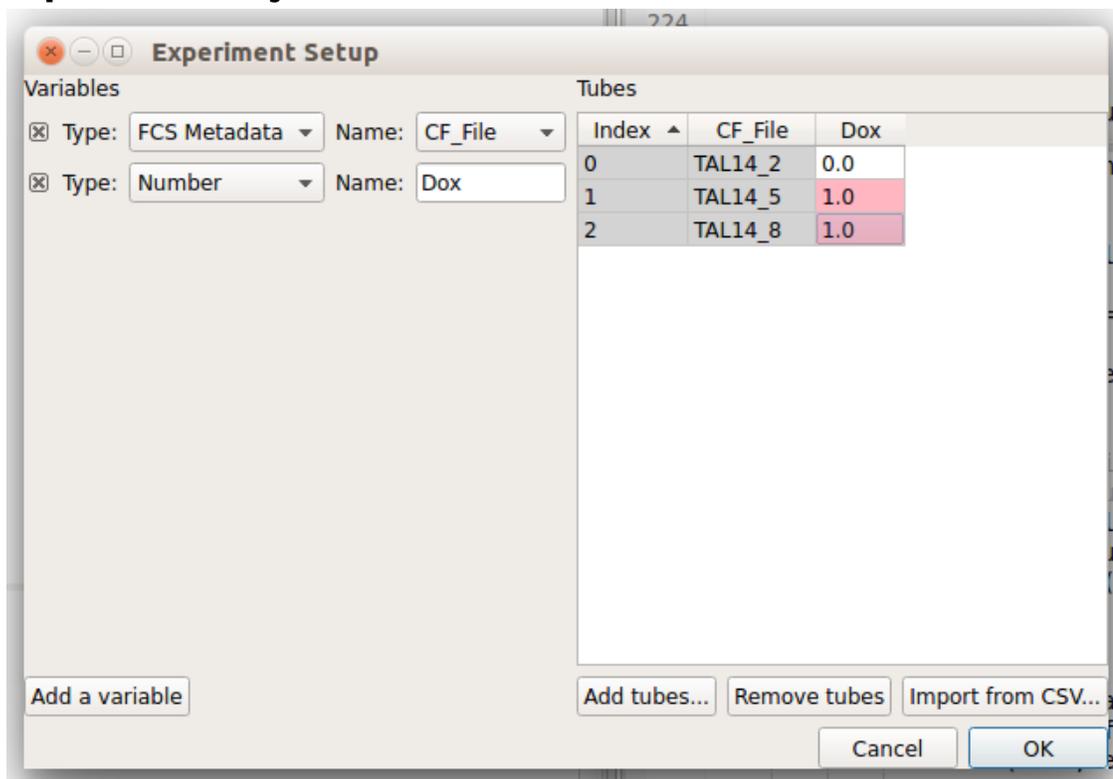

Allows you to specify FCS files in the experiment, and the experimental conditions that each tube (or well) was subject to.

Note: You can select sort the table by clicking on a row header.

Note: You can select multiple entries in a column by clicking one, holding down *Shift*, and clicking another (to select a range); or, by holding down *Ctrl* and clicking multiple additional cells in the table. If multiple cells are selected, typing a value will update all of them.

Note: **Each tube must have a unique set of experimental conditions.** If a tube's conditions are not unique, the row is red and you will not be able to click "OK".

Add tubes

Opens a file selector to add tubes.

KMeans

This module uses the **KMeans** algorithm to assign events to clusters in an unsupervised manner.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale


Re-scale the data in **Channel** before fitting.

Num Clusters

How many clusters to assign the data to.

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

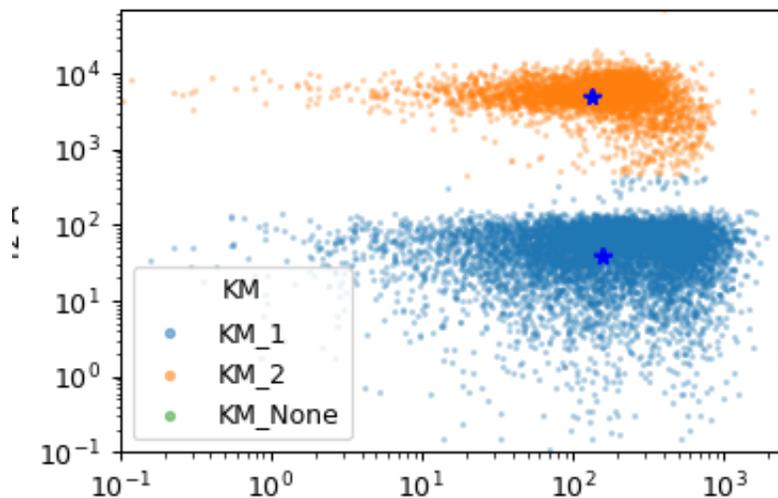

Principal Component Analysis

Use principal components analysis (PCA) to decompose a multivariate data set into orthogonal components that explain a maximum amount of variance.

Creates new “channels” named {name}_1 . . . {name}_n, where name is the **Name** attribute and n is **Num components**.

The same decomposition may not be appropriate for different subsets of the data set. If this is the case, you can use the **By** attribute to specify metadata by which to aggregate the data before estimating (and applying) a model. The PCA parameters such as the number of components and the kernel are the same across each subset, though.

Name

The operation name; determines the name of the new columns.

Channels

The channels to apply the decomposition to.

Scale

Re-scale the data in the specified channels before fitting.

Num components

How many components to fit to the data? Must be a positive integer.

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

Whiten

Scale each component to unit variance? May be useful if you will be using unsupervised clustering (such as K-means).

Polygon Gate

Draw a polygon gate. To add vertices, use a single-click; to close the polygon, click the first vertex a second time.

Name

The operation name. Used to name the new metadata field that's created by this module.

X Channel

The name of the channel on the gate's X axis.

Y Channel

The name of the channel on the gate's Y axis.

X Scale

The scale of the X axis for the interactive plot.

Y Scale


The scale of the Y axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

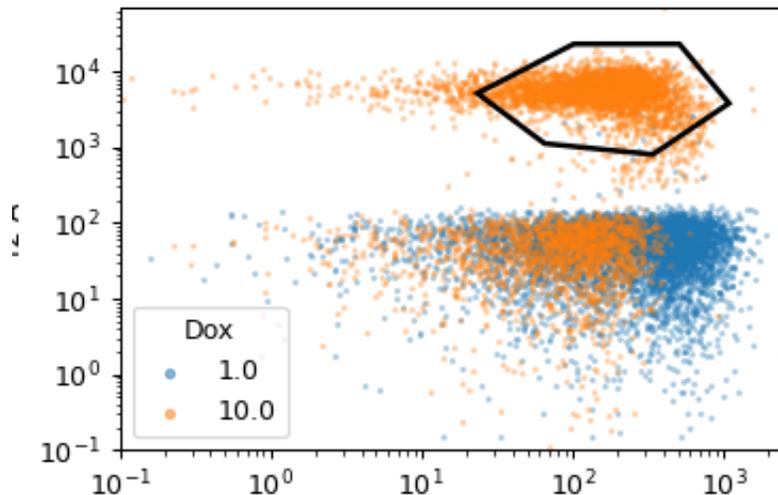

Quadrant Gate

Draw a “quadrant” gate. To create a new gate, just click where you’d like the intersection to be. Creates a new metadata column named *name*, with values name_1 (upper-left quadrant), name_2 (upper-right), name_3 (lower-left), and name_4 (lower-right).

Note: This matches the order of FACSDiva quad gates.

Name

The operation name. Used to name the new metadata field that’s created by this operation.

X channel

The name of the channel on the X axis.

X threshold

The threshold in the X channel.

Y channel

The name of the channel on the Y axis.

Y threshold

The threshold in the Y channel.

X Scale

The scale of the X axis for the interactive plot.

Y Scale


The scale of the Y axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

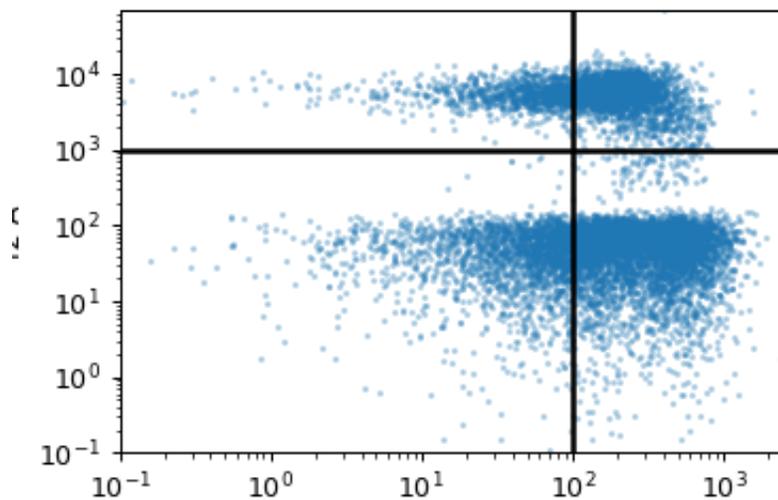

Range Gate

Draw a range gate. To draw a new range, click-and-drag across the plot.

Name

The operation name. Used to name the new metadata field that's created by this module.

Channel

The name of the channel to apply the gate to.

Low

The low threshold of the gate.

High

The high threshold of the gate.

Scale


The scale of the axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

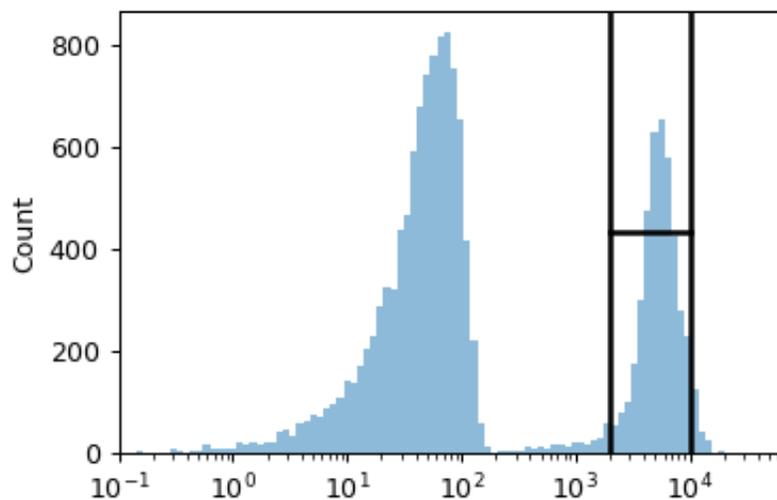

2D Range Gate

Draw a 2-dimensional range gate (eg, a rectangle). To set the gate, click-and-drag on the plot.

Name

The operation name. Used to name the new metadata field that's created by this operation.

X channel

The name of the channel on the X axis.

X Low

The low threshold in the X channel.

X High

The high threshold in the X channel.

Y channel

The name of the channel on the Y axis.

Y Low

The low threshold in the Y channel.

Y High

The high threshold in the Y channel.

X Scale

The scale of the X axis for the interactive plot.

Y Scale


The scale of the Y axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

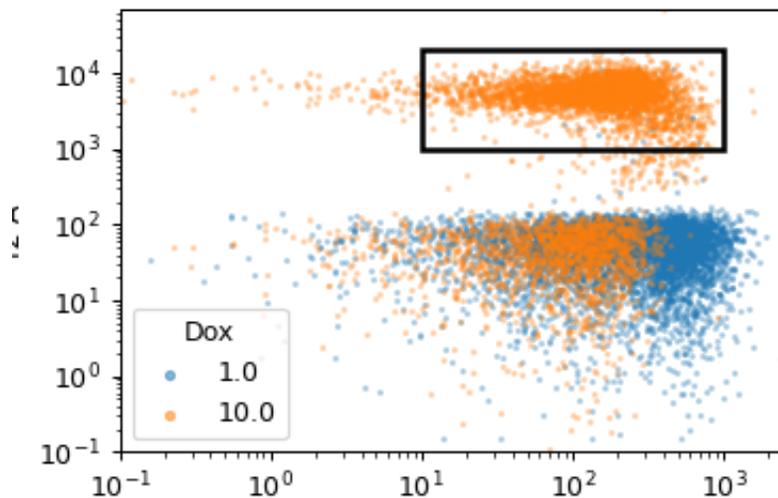

Ratio

Adds a new “channel” to the workflow, where the value of the channel is the ratio of two other channels.

Name

The name of the new channel.

Numerator

The numerator for the ratio.

Denominator

The denominator for the ratio.

TASBE Calibrated Flow Cytometry

This module combines all of the other calibrated flow cytometry modules (autofluorescence, bleedthrough compensation, bead calibration, and channel translation) into one easy-use-interface.


Channels

Which channels are you calibrating?

Autofluorescence

Blank File

The FCS file with the blank (unstained or untransformed) cells, for autofluorescence correction.

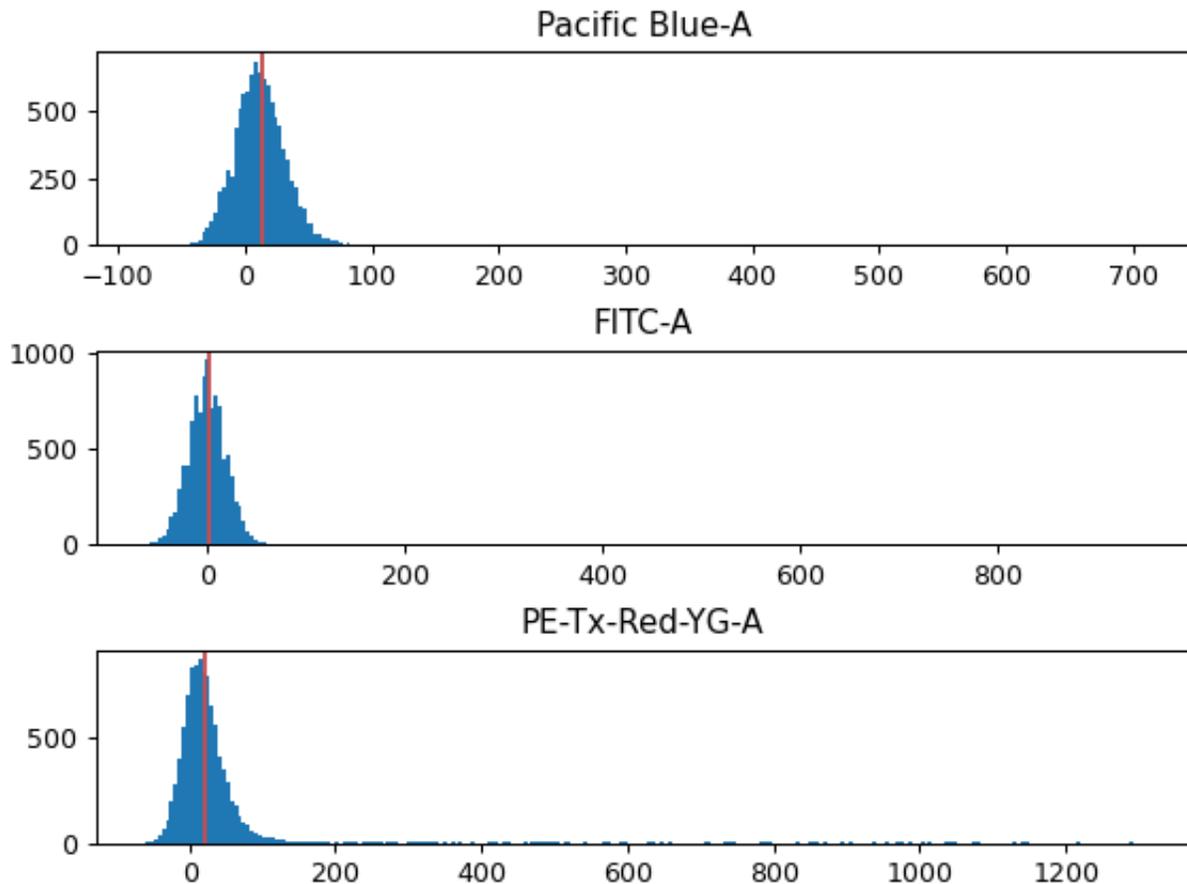

Bleedthrough Correction

A list of single-color controls to use in bleedthrough compensation. There's one entry per channel to compensate.

Channel


The channel that this file is the single-color control for.

File

The FCS file containing the single-color control data.

Bead Calibration

The beads that you used for calibration. Make sure to check the lot number as well!

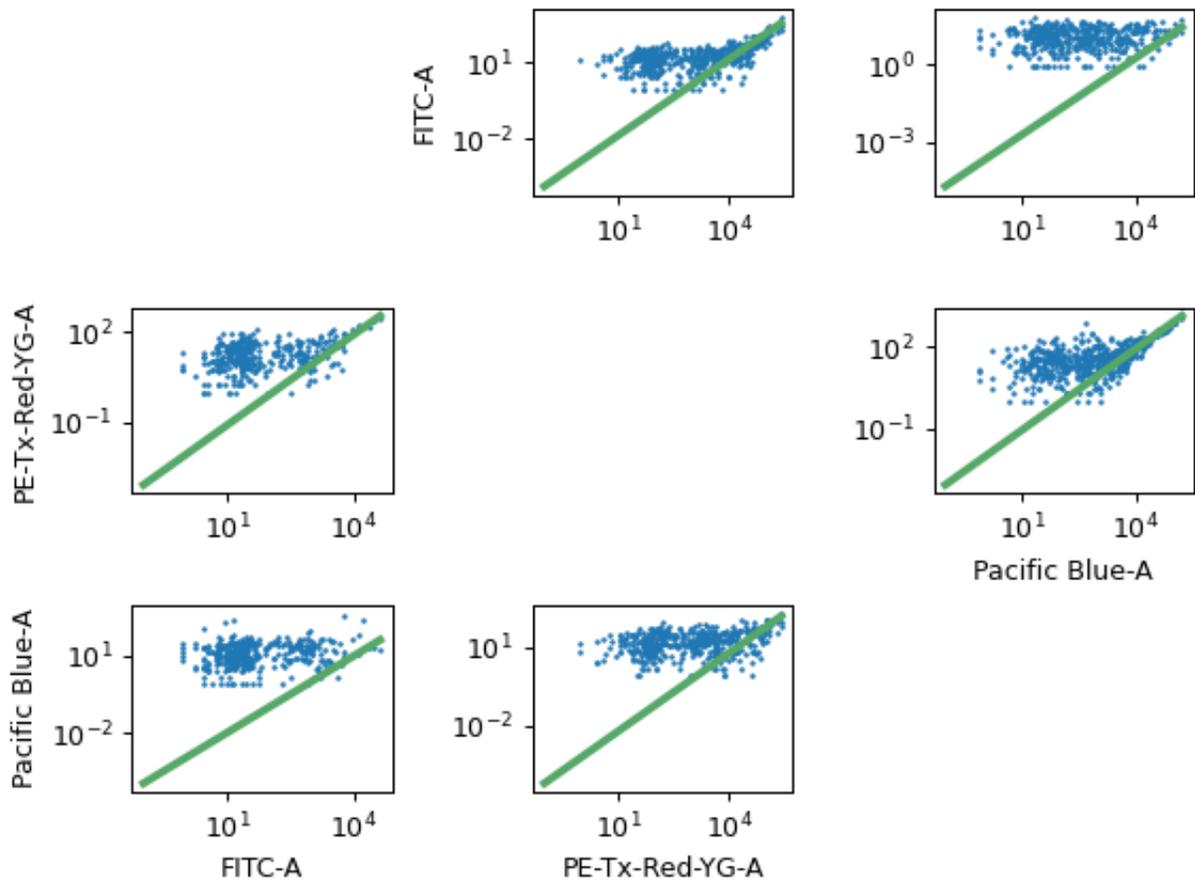

The FCS file containing the bead data.

The unit (such as *MEFL*) to calibrate to.

Peak Quantile


The minimum quantile required to call a peak in the bead data. Check the diagnostic plot: if you have peaks that aren't getting called, decrease this. If you have "noise" peaks that are getting called incorrectly, increase this.

Peak Threshold

The minimum brightness where the module will call a peak.

Peak Cutoff

The maximum brightness where the module will call a peak. Use this to remove peaks that are saturating the detector.

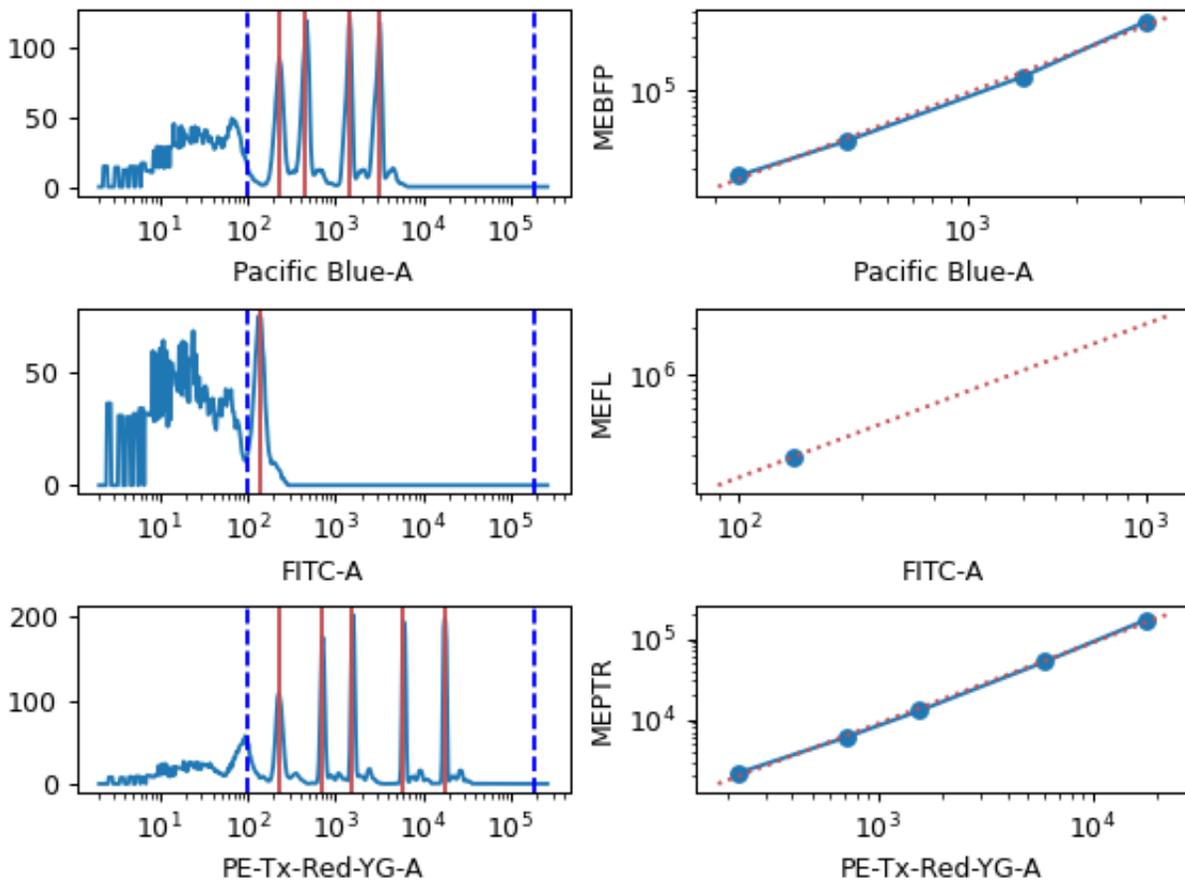

Color Translation

To Channel


Which channel should we rescale all the other channels to?

Use mixture model?

If this is set, the module will try to separate the data using a mixture-of-Gaussians, then only compute the translation using the higher population. This is the kind of behavior that you see in a transient transfection in mammalian cells, for example.

Translation list

Each pair of channels must have a multi-color control from which to compute the scaling factor.

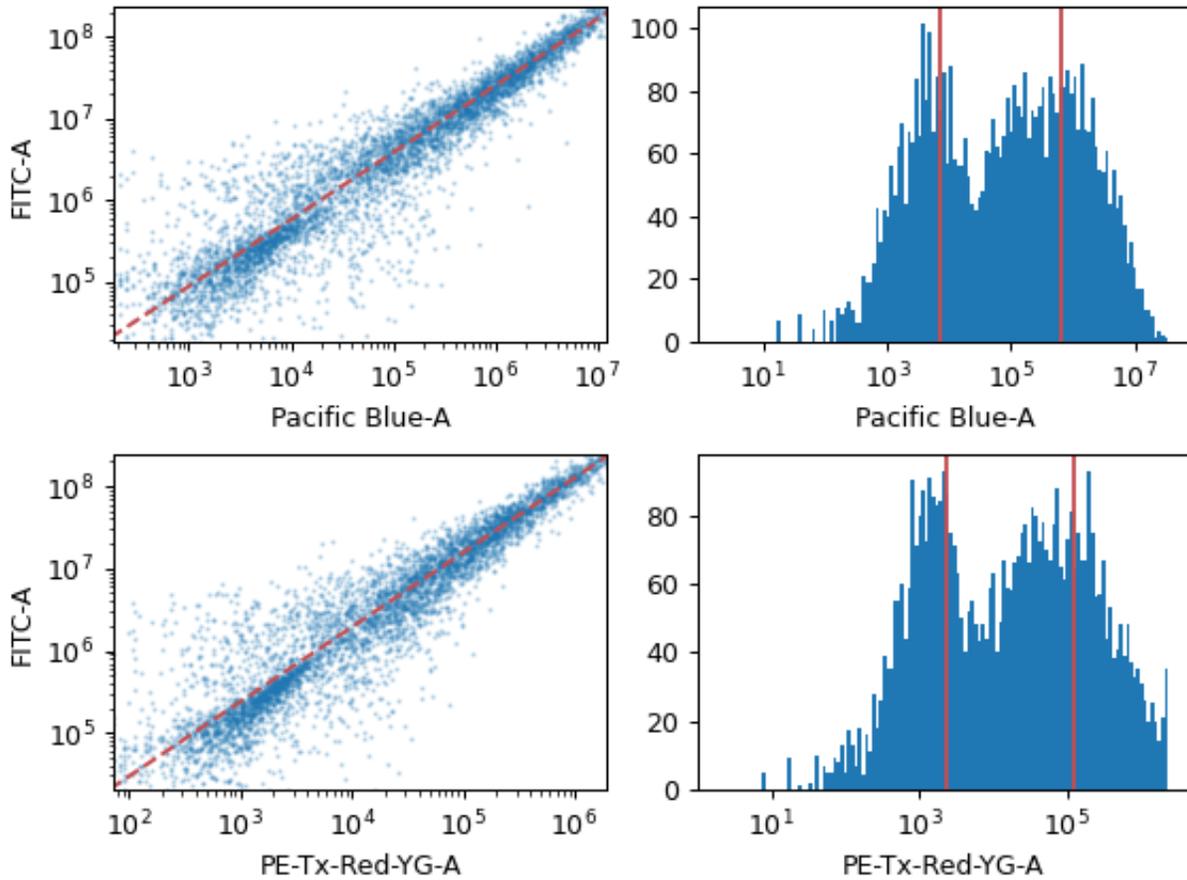

Threshold Gate

Draw a threshold gate. To set a new threshold, click on the plot.

Name

The operation name. Used to name the new metadata field that's created by this module.

Channel

The name of the channel to apply the gate to.

Threshold

The threshold of the gate.

Scale


The scale of the axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

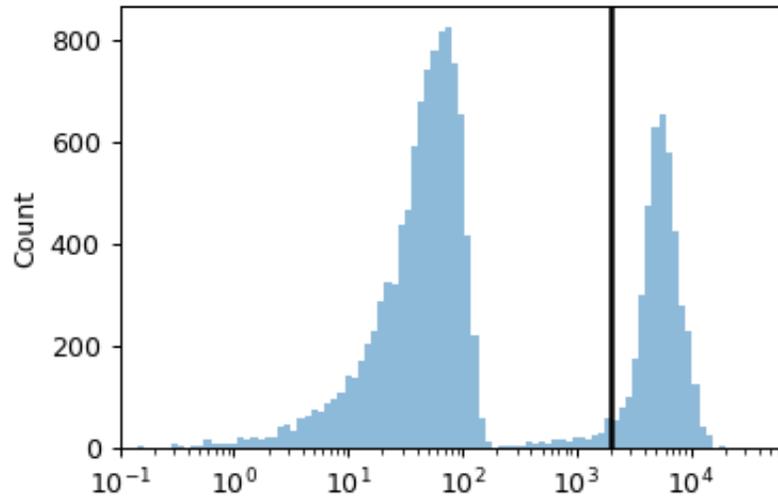

Transform statistic

Apply a function to a statistic, and add it as a statistic to the experiment.

First, the module groups the data by the unique values of the variables in **By**, then applies **Function** to the statistic in each group.

Note: Statistics are a central part of *Cytoflow*. More documentation is forthcoming.

Name

The operation name. Becomes the first part of the new statistic's name.

Statistic

The statistic to apply the function to.

Function

The function to compute on each group.

Subset

Only apply the function to a subset of the input statistic. Useful if the function is very slow.

Views

Bar Chart

Plots a bar chart of a statistic.

Each variable in the statistic (ie, each variable chosen in the statistic operation's **Group By**) must be set as **Variable** or as a facet.

Statistic

Which statistic to plot.

Variable

The statistic variable to use as the major bar groups.

Scale

How to scale the statistic plot.

Horizontal Facet

Make multiple plots, with each column representing a subset of the statistic with a different value for this variable.

Vertical Facet

Make multiple plots, with each row representing a subset of the statistic with a different value for this variable.

Hue Facet


Make multiple bars with different colors; each color represents a subset of the statistic with a different value for this variable.

Error Statistic

A statistic to use to make the error bars. Must have the same variables as the statistic in **Statistic**.

Subset

Plot only a subset of the statistic.

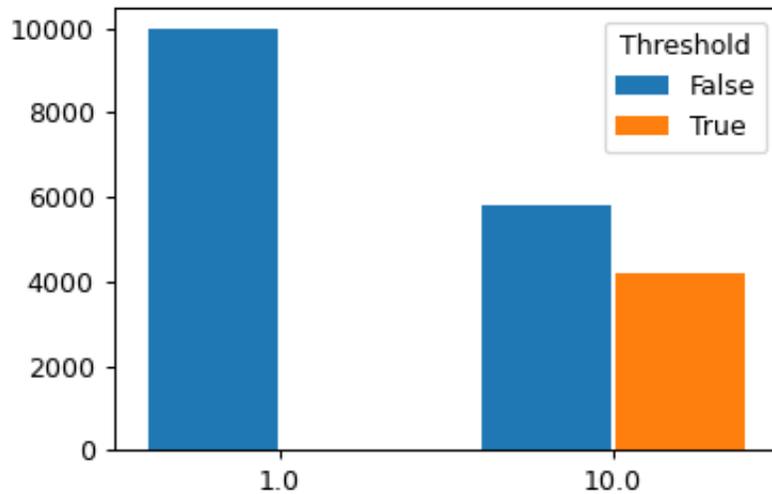

Density Plot

Plots a 2-dimensional density plot.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Scale


Scale the color palette and the color bar

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

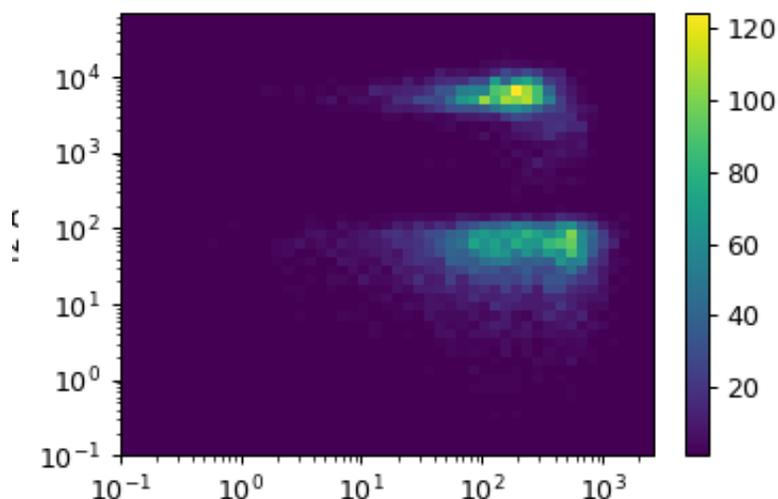**Export FCS**

Exports FCS files from after this operation. Only really useful if you've done a calibration step or created derivative channels using the ratio option. As you set the options, the main plot shows a table of the files that will be created.

Base

The prefix of the FCS file names

By

A list of metadata attributes to aggregate the data before exporting. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will export one file for each subset of the data with a unique combination of Time and Dox.

Keywords

If you want to add more keywords to the FCS files' TEXT segment, specify them here.

Export...

Choose a folder and export the FCS files.

Histogram

Plots a histogram.

Channel

The channel for the plot.

Scale

How to scale the X axis of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

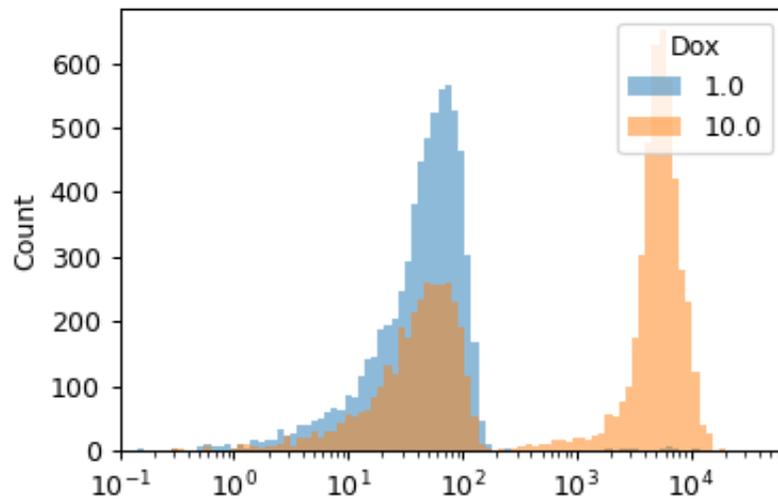

2D Histogram

Plots a 2-dimensional histogram. Similar to a density plot, but the number of events in a bin change the bin's opacity, so you can use different colors.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

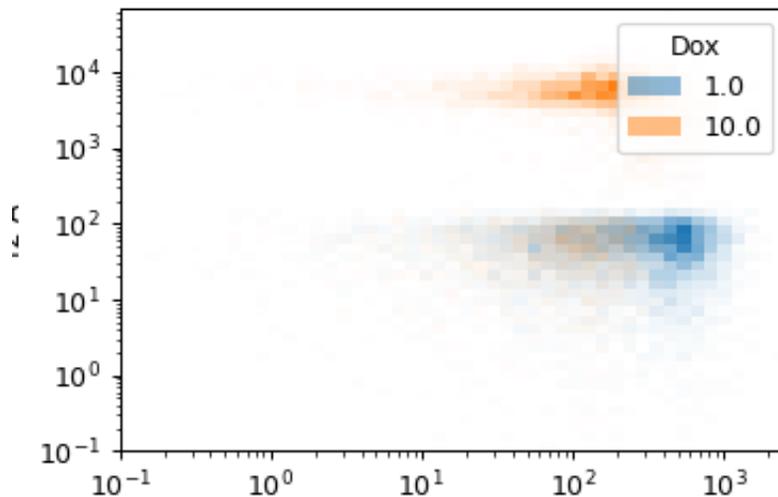

1D Kernel Density Estimate

Plots a “smoothed” histogram.

Channel

The channel for the plot.

Scale

How to scale the X axis of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab’s plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

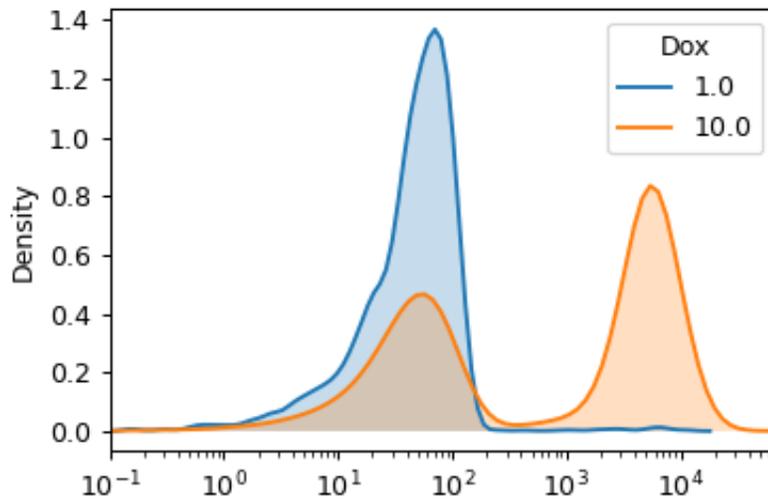

2D Kernel Density Estimate

Plots a 2-d kernel-density estimate. Sort of like a smoothed histogram. The density is visualized with a set of isolines.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

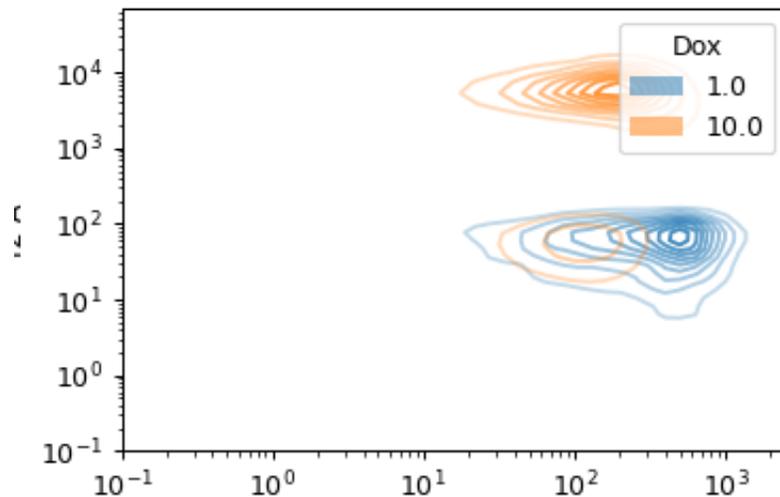

Parallel Coordinates Plot

Plots a parallel coordinates plot. PC plots are good for multivariate data; each vertical line represents one attribute, and one set of connected line segments represents one data point.

Channels

The channels to plot, and their scales. Drag the blue dot to re-order.

Add Channel, Remove Channel

Add or remove a channel

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot different values of a condition with different colors.

Color Scale


Scale the color palette and the color bar

Tab Facet

Make multiple plots in different tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

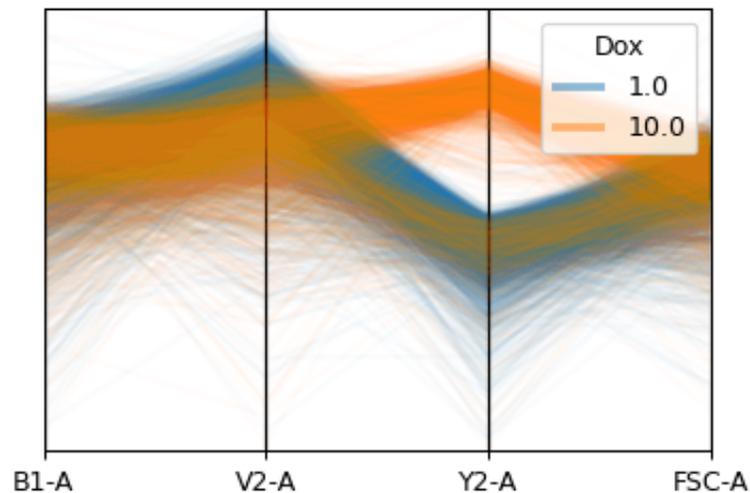

Radviz Plot

Plots a radviz plot. Radviz plots project multivariate plots into two dimensions. Good for looking for clusters.

Channels

The channels to plot, and their scales. Drag the blue dot to re-order.

Add Channel, Remove Channel

Add or remove a channel

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot different values of a condition with different colors.

Color Scale


Scale the color palette and the color bar

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

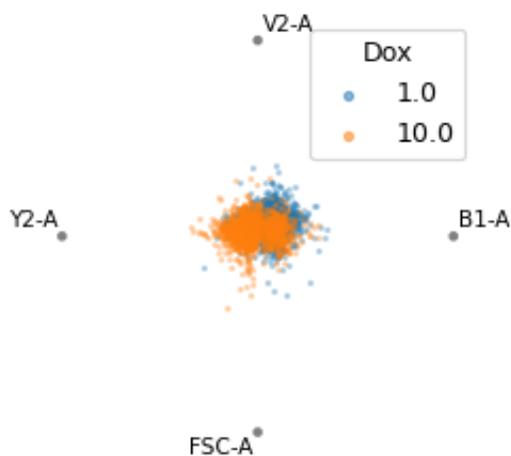

Scatterplot

Plot a scatterplot.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

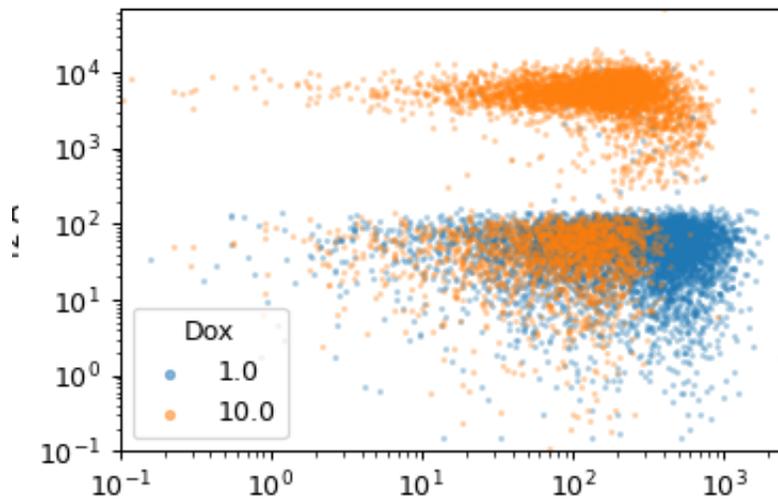

1D Statistics Plot

Plots a line plot of a statistic.

Each variable in the statistic (ie, each variable chosen in the statistic operation's **Group By**) must be set as **Variable** or as a facet.

Statistic

Which statistic to plot.

Variable

The statistic variable put on the X axis. Must be numeric.

X Scale, Y Scale

How to scale the X and Y axes.

Horizontal Facet

Make multiple plots, with each column representing a subset of the statistic with a different value for this variable.

Vertical Facet

Make multiple plots, with each row representing a subset of the statistic with a different value for this variable.

Hue Facet

Make multiple bars with different colors; each color represents a subset of the statistic with a different value for this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Error Statistic

A statistic to use to make the error bars. Must have the same variables as the statistic in **Statistic**.

Subset

Plot only a subset of the statistic.

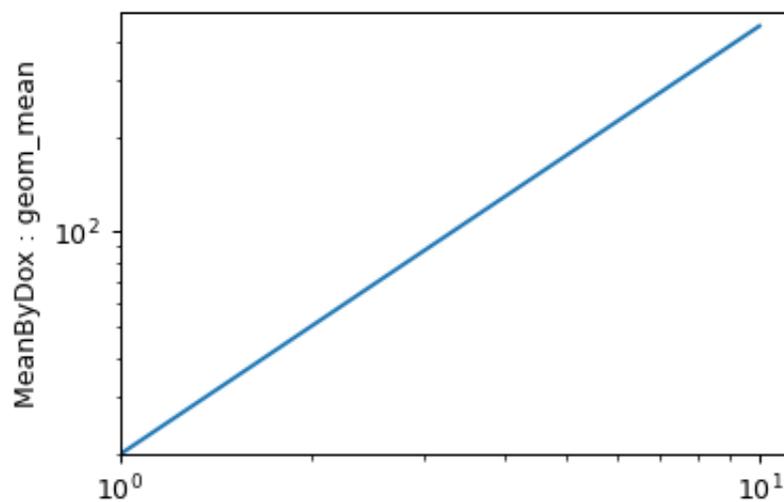

2D Statistics Plot

Plot two statistics on a scatter plot. A point (X,Y) is drawn for every pair of elements with the same value of **Variable**; the X value is from **** X statistic**** and the Y value is from **Y statistic**.

X Statistic

Which statistic to plot on the X axis.

Y Statistic

Which statistic to plot on the Y axis. Must have the same indices as **X Statistic**.

X Scale, Y Scale

How to scale the X and Y axes.

Variable

The statistic variable to put on the plot.

Horizontal Facet

Make multiple plots, with each column representing a subset of the statistic with a different value for this variable.

Vertical Facet

Make multiple plots, with each row representing a subset of the statistic with a different value for this variable.

Color Facet

Make lines on the plot with different colors; each color represents a subset of the statistic with a different value for this variable.

Color Scale

If **Color Facet** is a numeric variable, use this scale for the color bar.

X Error Statistic

A statistic to use to make error bars in the X direction. Must have the same indices as the statistic in **X Statistic**.

Y Error Statistic

A statistic to use to make error bars in the Y direction. Must have the same indices as the statistic in **Y Statistic**.

Subset

Plot only a subset of the statistic.

Table

Make a table out of a statistic. The table can then be exported.

Statistic

Which statistic to view.

Rows

Which variable to use for the rows

Subrows


Which variable to use for subrows.

Columns

Which variable to use for the columns.

Subcolumns

Which variable to use for the subcolumns.

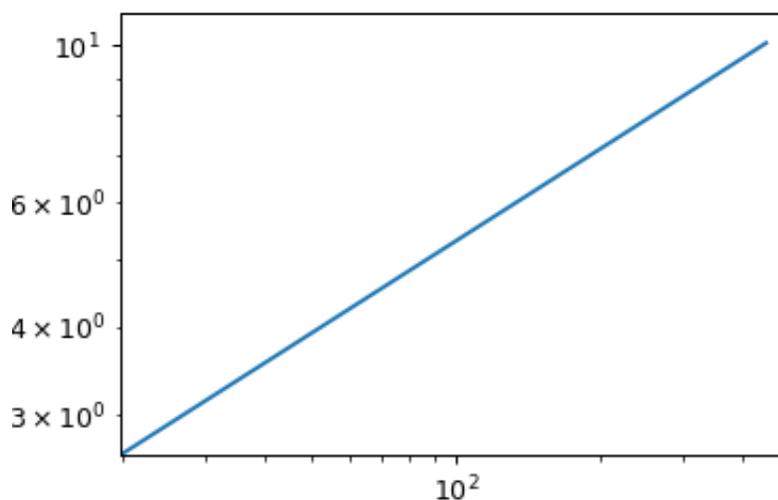**Export**

Export the table to a CSV file.

Violin Plot

Plots a violin plot, which is a nice way to compare several distributions.

X Variable

The variable to compare on the X axis.

Y Channel

The channel to plot on the Y axis.

Y Channel Scale

How to scale the Y axis of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale

If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet


Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.


There are also a few odds and ends:

| | Threshold = 0 | Threshold = 1 |
|----------|---------------|---------------|
| Dox = 1 | 9963 | 37 |
| Dox = 10 | 5823 | 4177 |

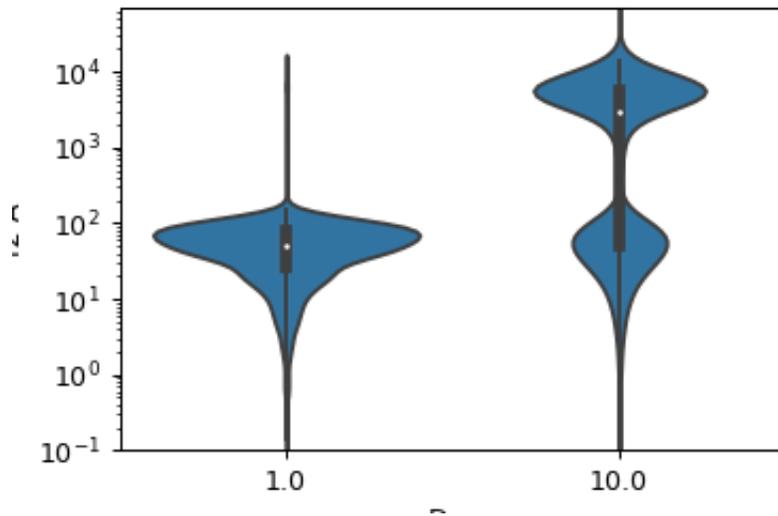


5.1.20 Screenshots of the Cytoflow GUI


The main GUI.

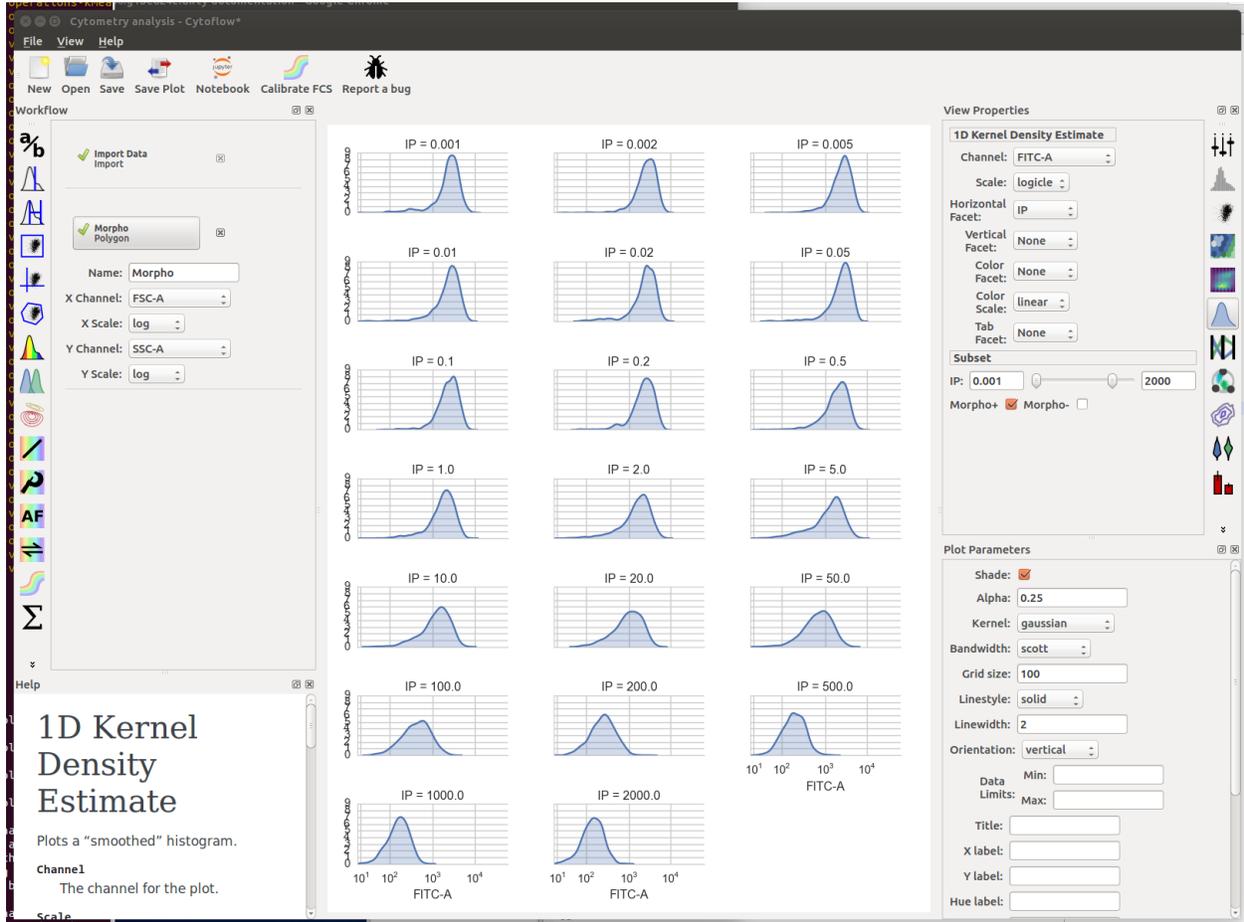

The experiment editor.

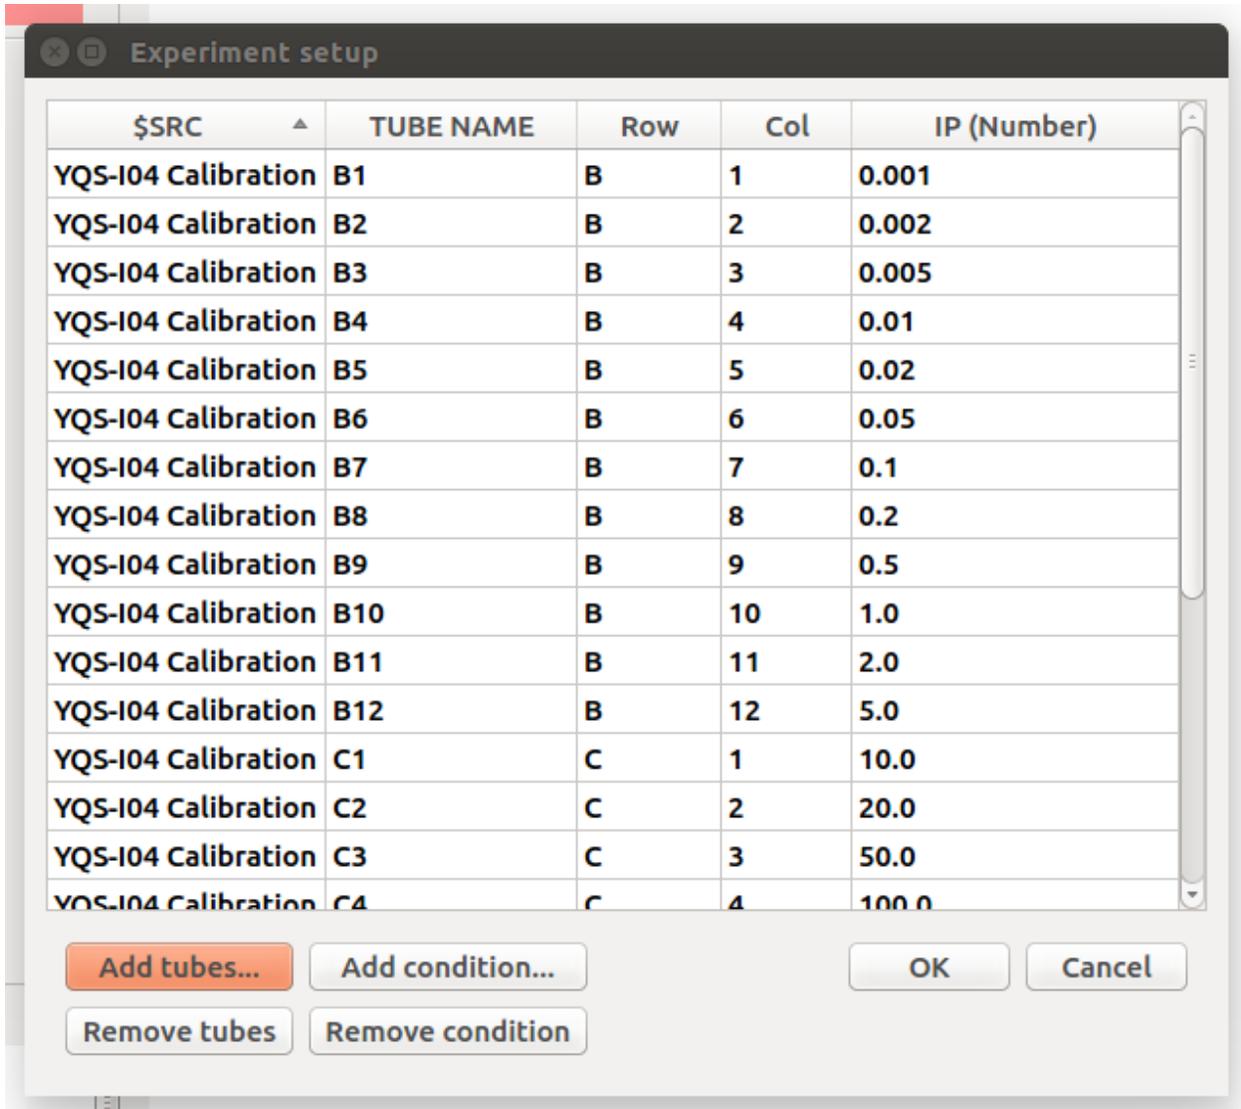

The plot editor.

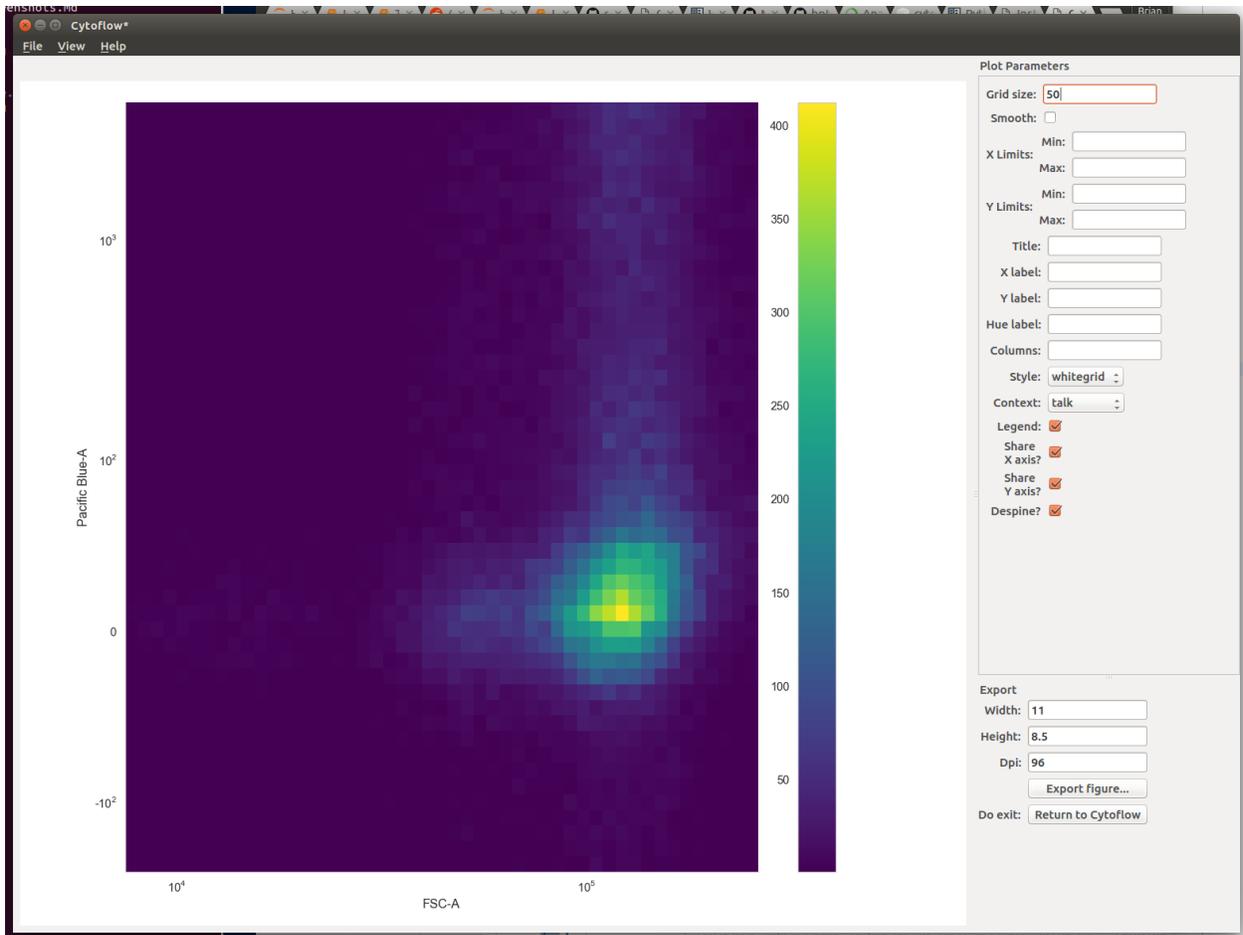

Convert FCS files to calibrated units.

TASBE Calibrated Flow Cytometry

This module combines all of the other calibrated flow cytometry modules (autofluorescence, bleedthrough compensation, bead calibration, and channel translation) into one easy-use-interface.

Files
Choose the files to calibrate

X Morpho Channel
The X channel to select morphology

X Morpho Scale
How to scale the X morpho channel?


Y Morpho Channel
The Y channel to select morphology

Y Morpho Scale
How to scale the Y morpho channel?


Fluorescence channels
Which channels are you calibrating?

Autofluorescence
Blank File
The FCS file with the blank (unstained or untransformed) cells, for autofluorescence correction.


One-dimensional Gaussian mixture models.

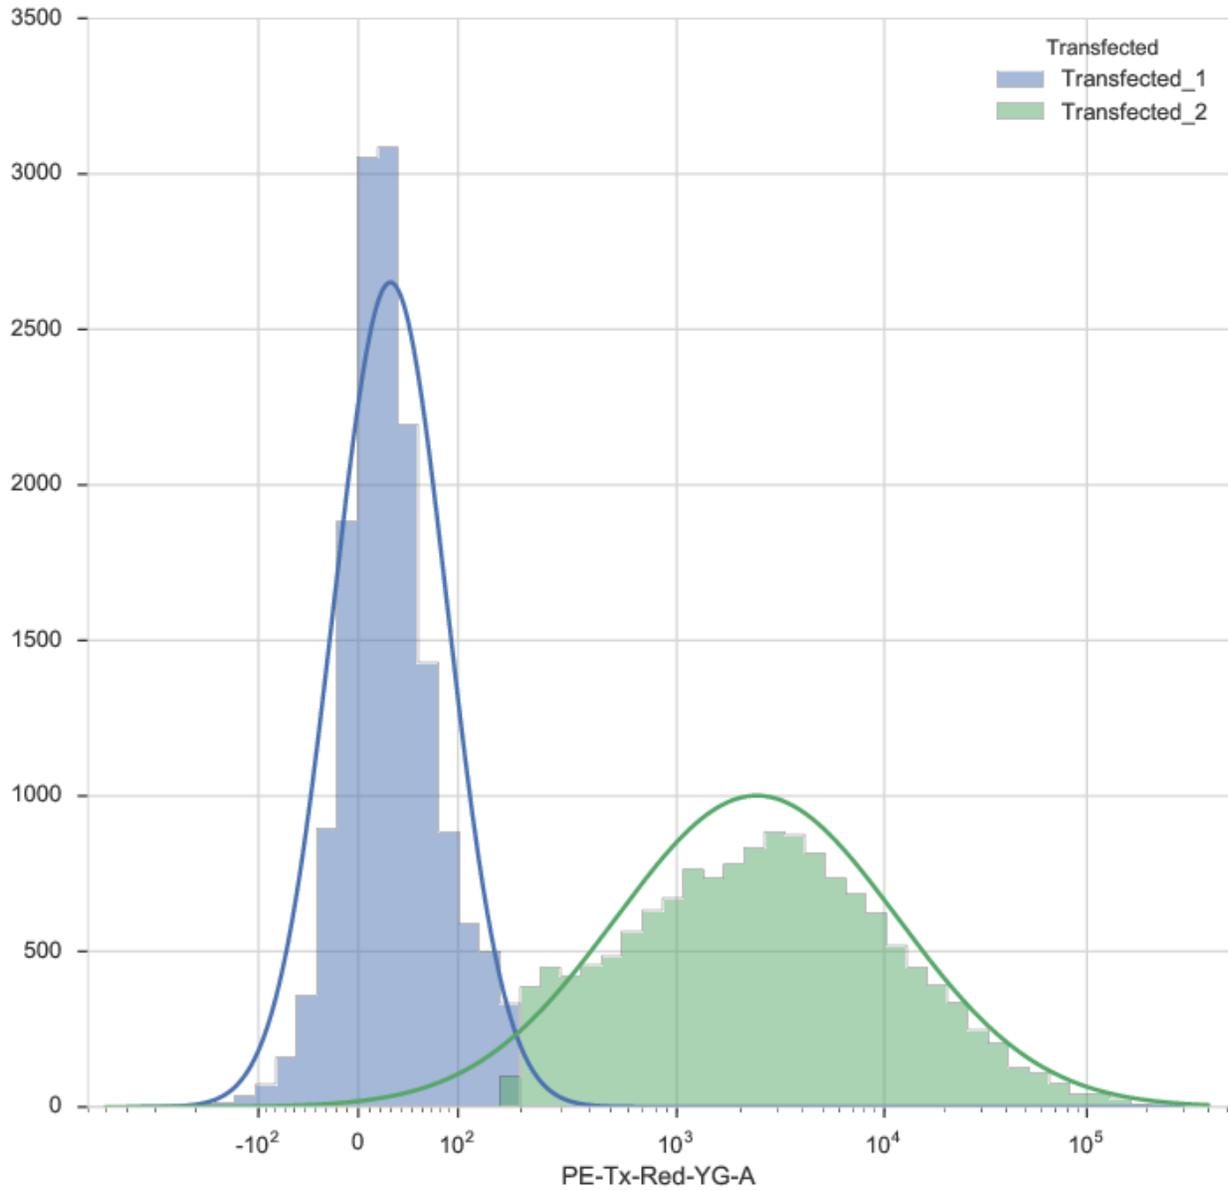


Two-dimensional kernel density estimates.

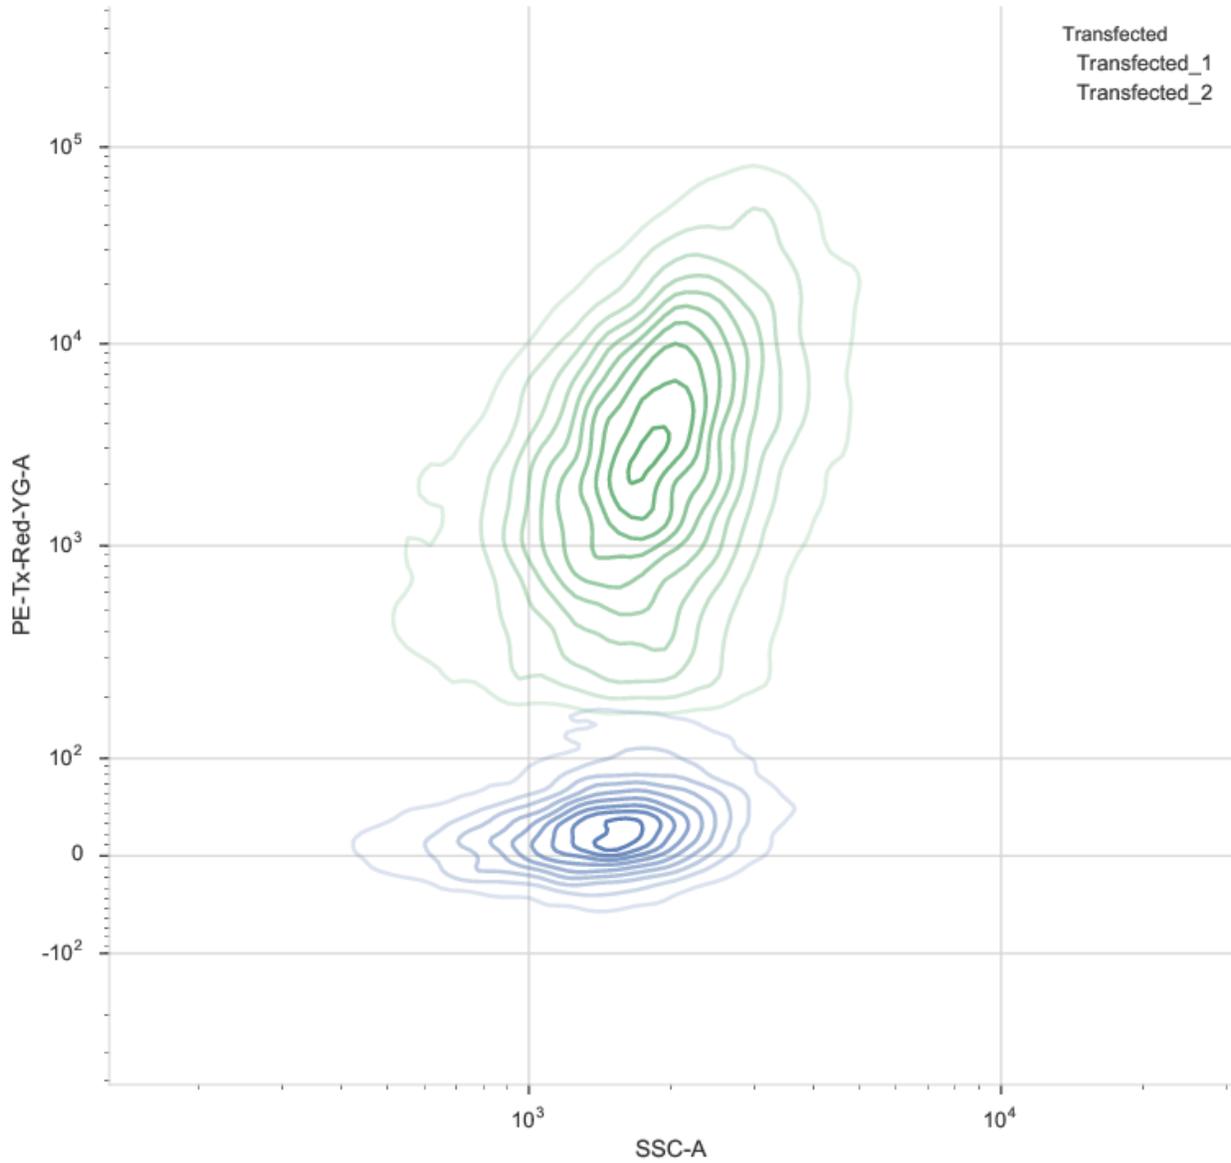


Violin plots to compare distributions.

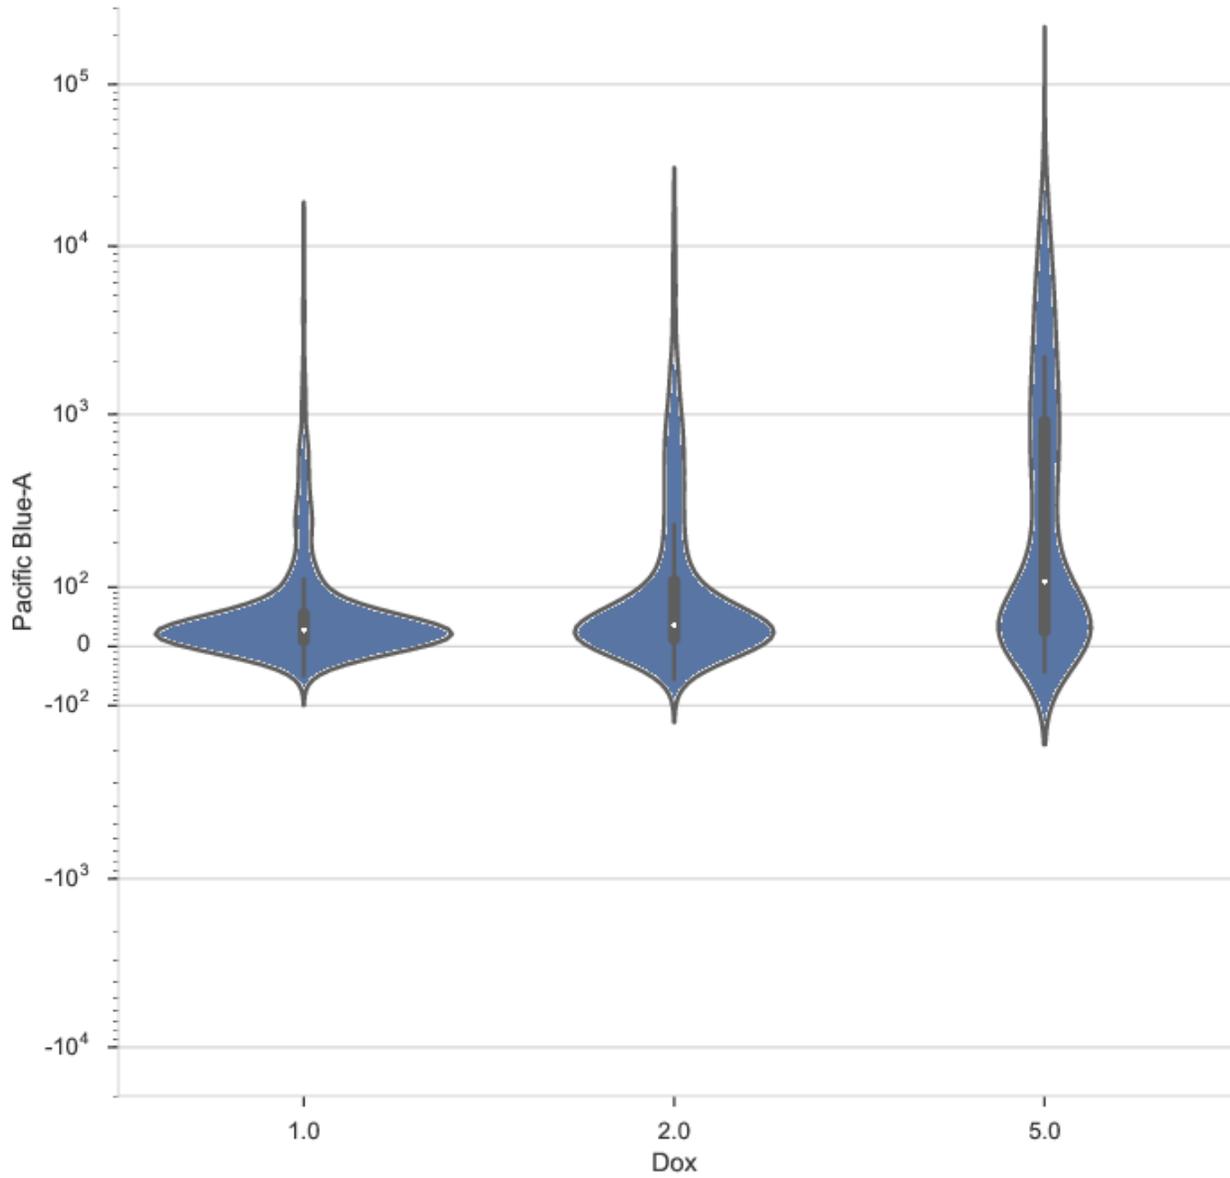


Calibrate raw data to physical calibrants like beads.

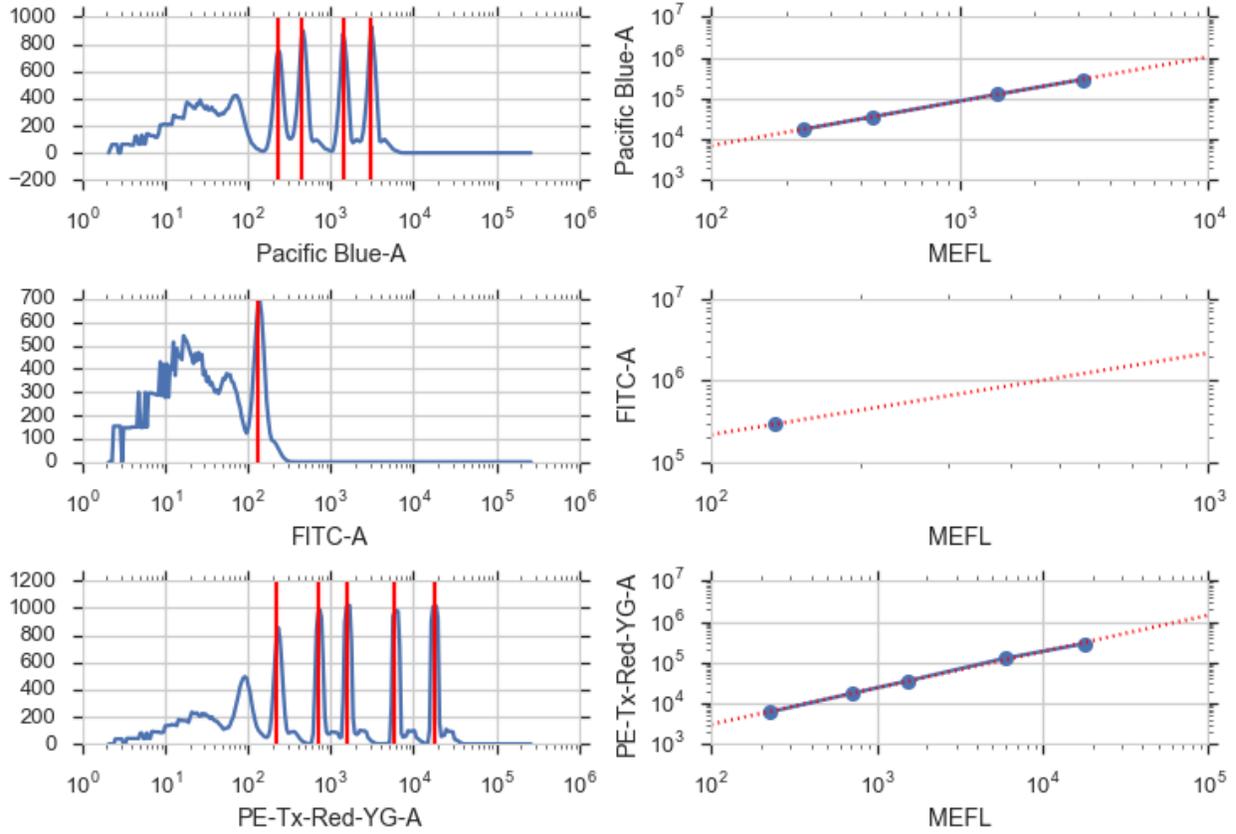


Bin data to analyze subsets.

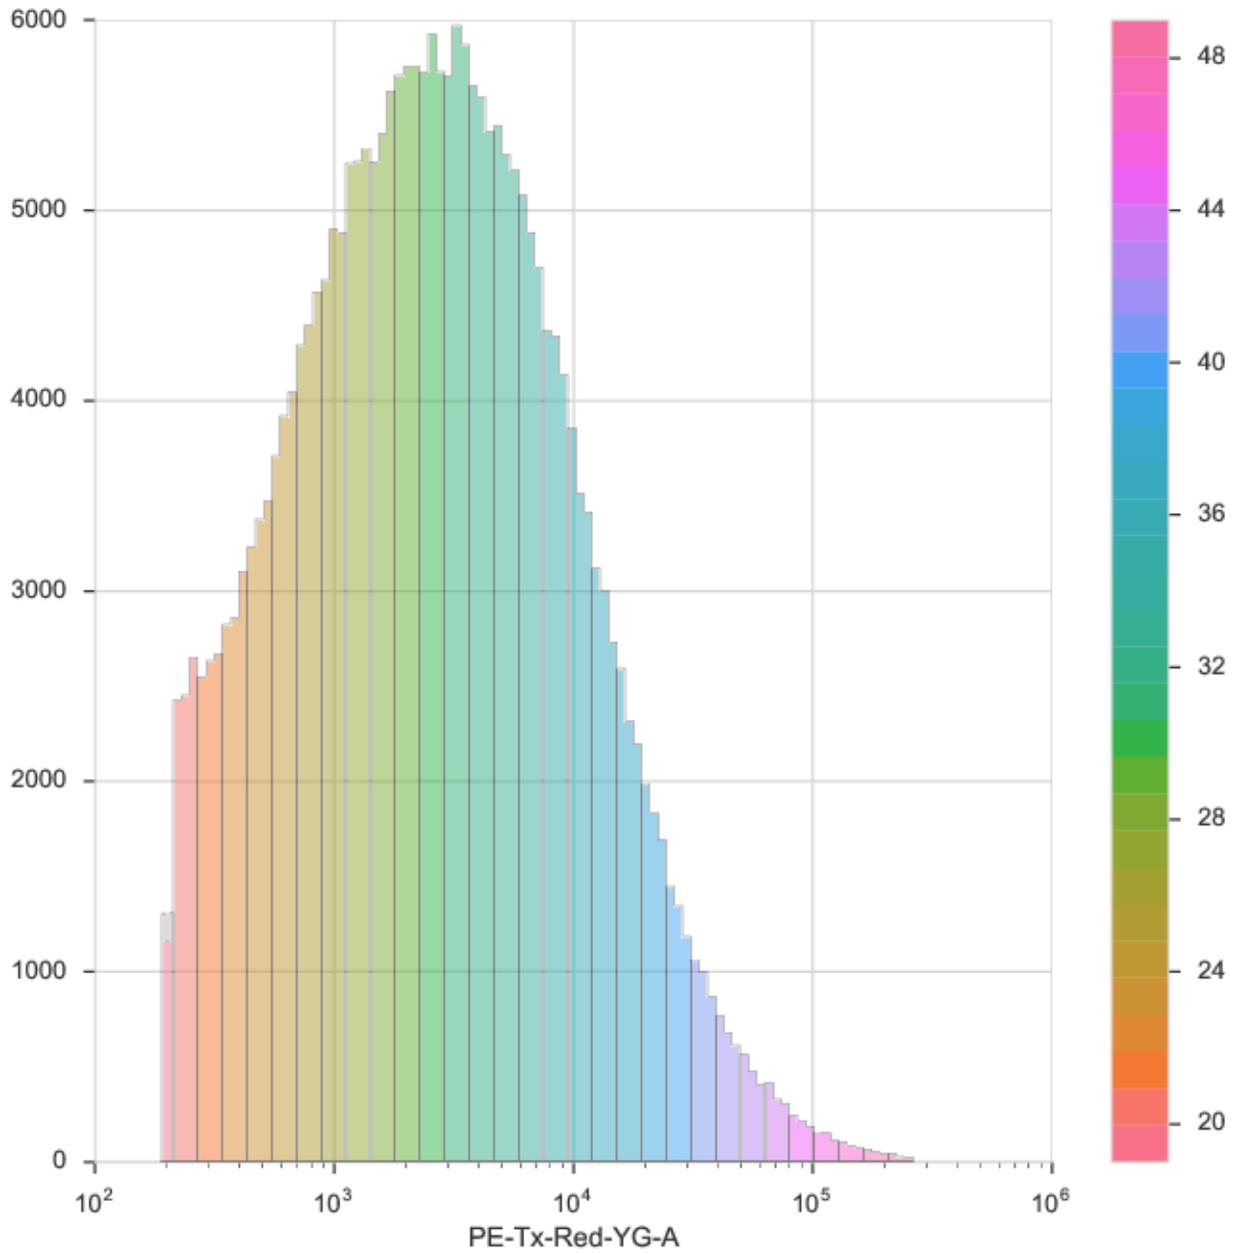

Summarize data with statistics plots.

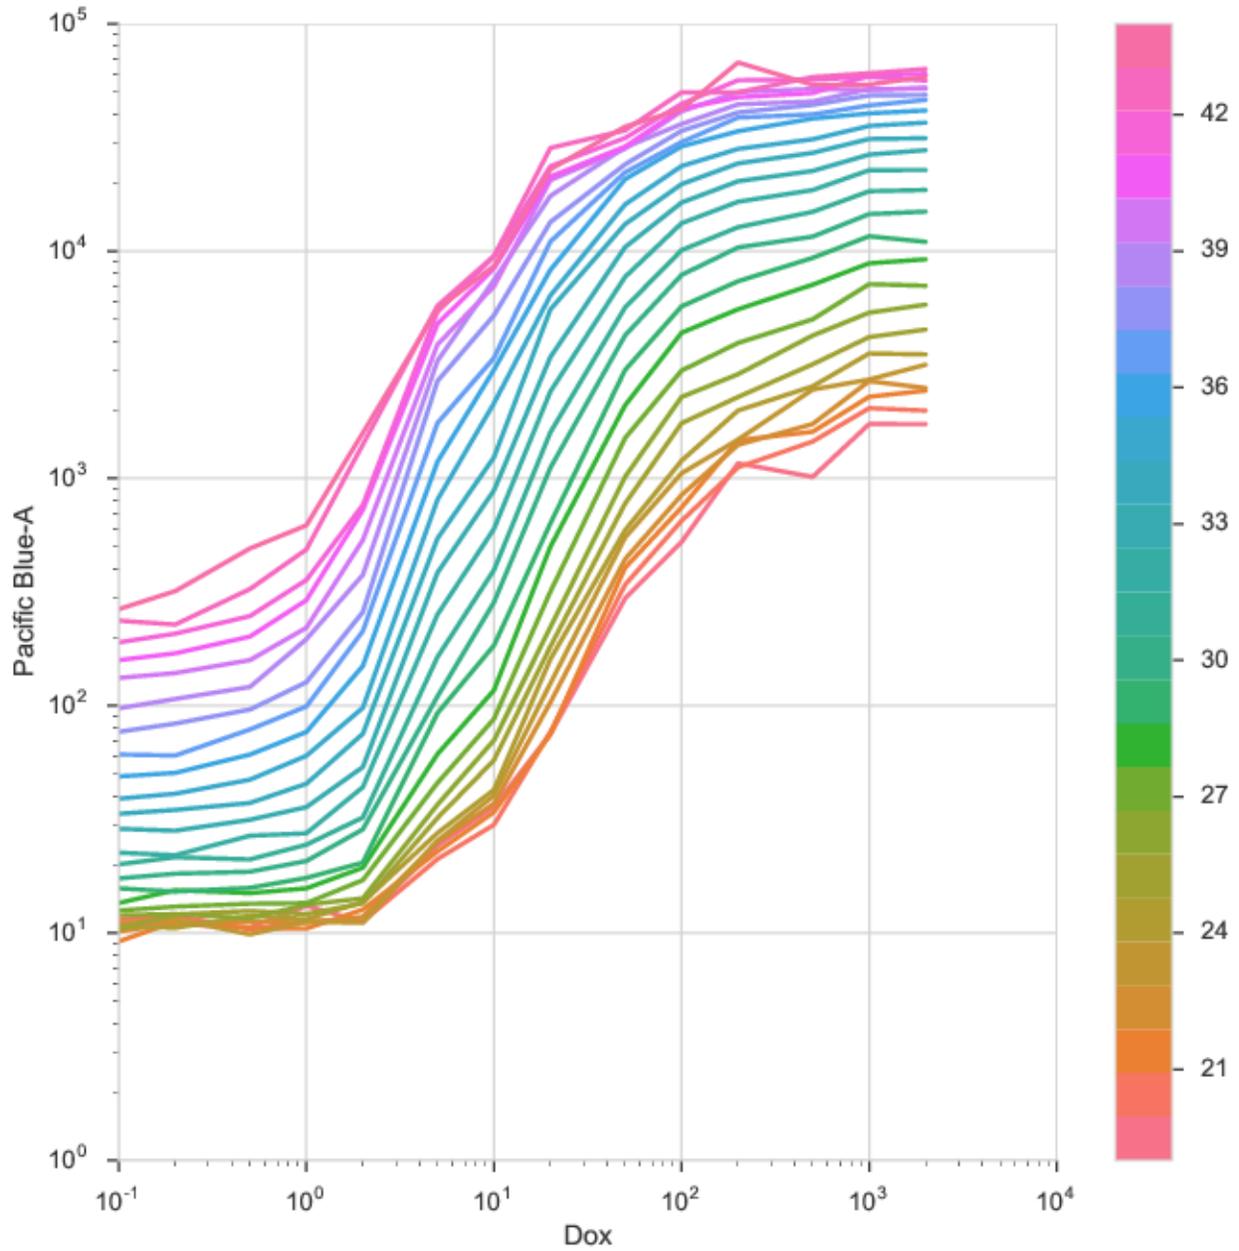

Export straight to a Jupyter notebook.

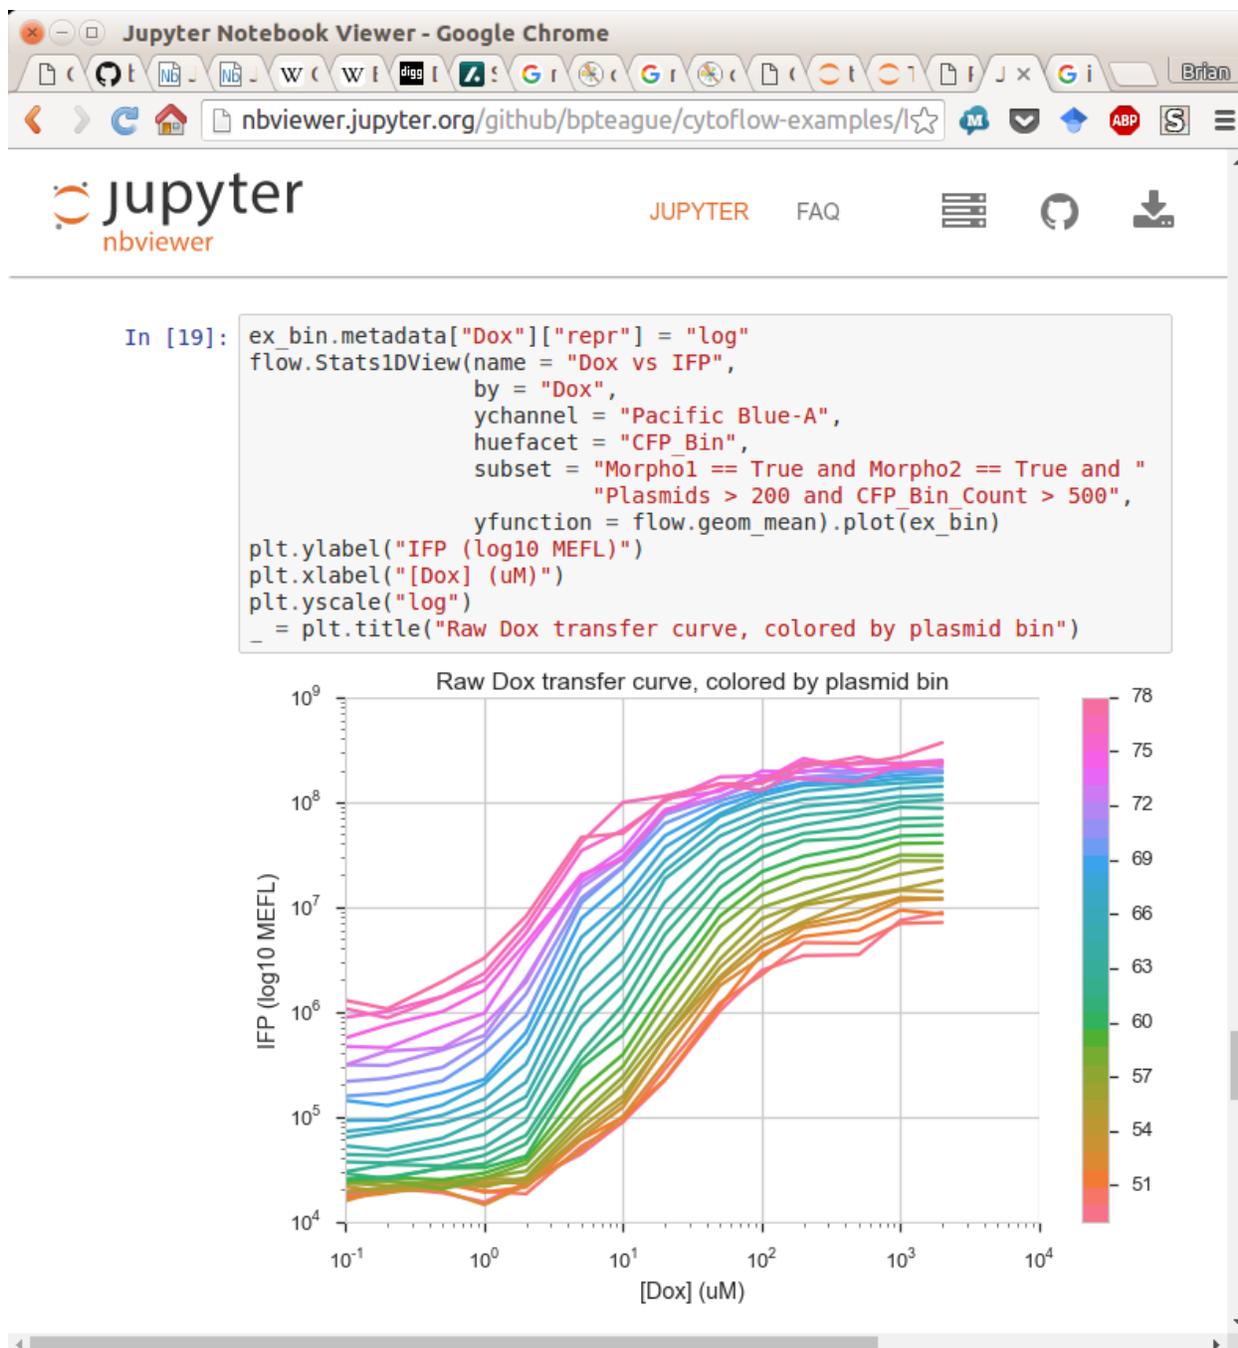

5.1.21 Frequently Asked Questions

These are some questions that are commonly asked about Cytoflow’s GUI, especially by new users.

I’ve made one of the panels (eg, the View settings panel) disappear. How do I make it come back?

You can restore them by going to the **View** menu and toggling the checkbox next to the panel that you made disappear.

I have some information in the FCS files’ metadata that I’d like to use as experimental variables. How do I “import” them?

In the **Experiment Setup** dialog:

1. Click **Add a variable**
2. Select **FCS Metadata** as the variable type
3. Choose the metadata you want from the **Name** dropdown
4. *Change* the **Type** to something appropriate – probably **Number** or **Category**

5.1.22 Tutorials


The following are step-by-step examples to get you started using Cytoflow. They include both some basic tutorials as well as examples of some more advanced analyses.

Easy tutorials

Advanced tutorials

Tutorial: Transcriptional Repressor Characterization

This example demonstrates using `cytoflow` to use calibrated flow cytometry to characterize a transcriptional repressor in a mammalian multi-plasmid system. The implementation closely follows that described in [Beal et al](#) and its implementation in [Davidsohn et al](#). The experiment whose data we’ll be analyzing characterizes a TALE transcriptional repressor (TAL14, from [Li et al](#)) using a multi-plasmid transient transfection in mammalian cells, depicted below:



The small molecule doxycycline (“Dox”) drives the transcriptional activator `rtTA3` to activate the transcriptional repressor (“R1” in the diagram), which then represses output of the yellow fluorescent protein `EYFP`. `rtTA3` also drives expression of a blue fluorescent protein, `eBFP2`, which serves as a proxy for the amount of repressor. Finally, since we’re doing transient transfection, there’s a huge amount of variability in the level of transfection; we measure transfection level with a constitutively expressed red fluorescent protein, `mKate`.

If you’d like to follow along, you can do so by downloading one of the `cytoflow-#####-examples-advanced.zip` files from the [Cytoflow releases page](#) on GitHub. The files are in the `tasbe/` subdirectory.

Setup

- Start Cytoflow. Under the **Import Data** operation, choose **Set up experiment...**
- Add one variable, **Dox** – make it a **Number**.
- Load the TAL14...fcs files from the tasbe/ subdirectory, and fill in the Dox concentrations as per the table below:

Experiment Setup

Variables

- ☒ Type: FCS Metadata Name: CF_File
- ☒ Type: Number Name: Dox


Tubes

| Index | CF_File | Dox |
|-------|----------|--------|
| 0 | TAL14_1 | 0.0 |
| 1 | TAL14_2 | 0.1 |
| 2 | TAL14_3 | 0.2 |
| 3 | TAL14_4 | 0.5 |
| 4 | TAL14_5 | 1.0 |
| 5 | TAL14_6 | 2.0 |
| 6 | TAL14_7 | 5.0 |
| 7 | TAL14_8 | 10.0 |
| 8 | TAL14_9 | 20.0 |
| 9 | TAL14_10 | 50.0 |
| 10 | TAL14_11 | 100.0 |
| 11 | TAL14_12 | 200.0 |
| 12 | TAL14_13 | 500.0 |
| 13 | TAL14_14 | 1000.0 |
| 14 | TAL14_15 | 2000.0 |


Buttons: Add a variable, Add tubes..., Remove tubes, Import from CSV..., Cancel, OK

Gate out the debris

- Use a scatter plot to look at the FSC_A and SSC_A channels:

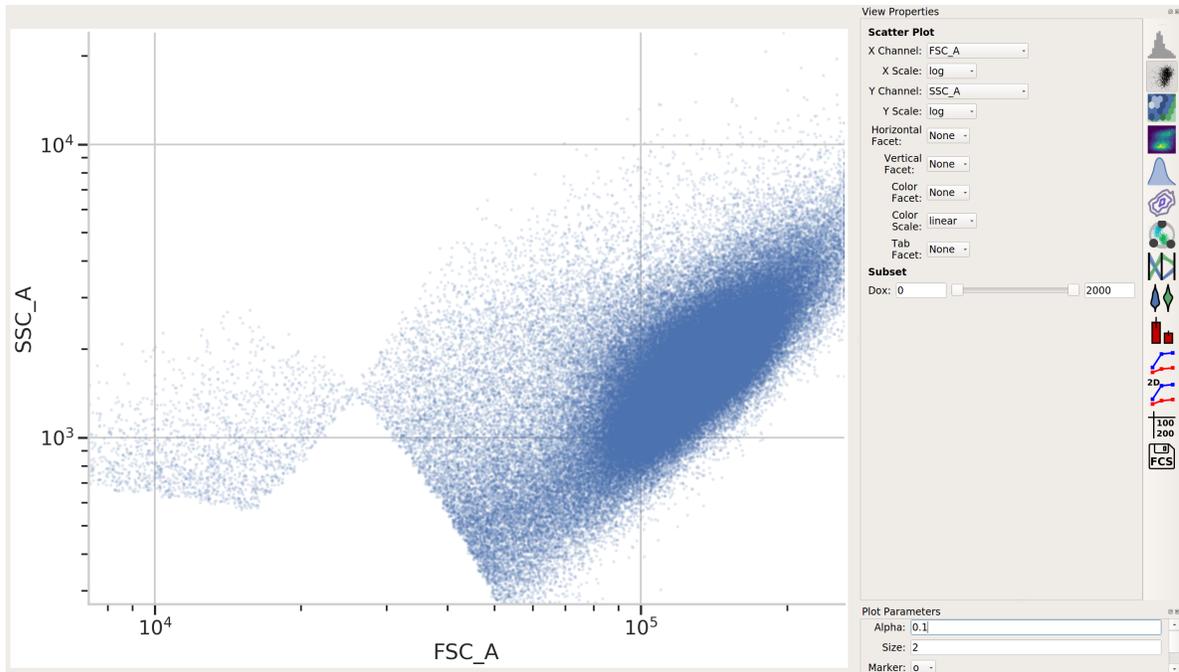

- This looks pretty good – a nice tight distribution. Let's use a 2D gaussian model to take 2 standard deviations around the centroid.

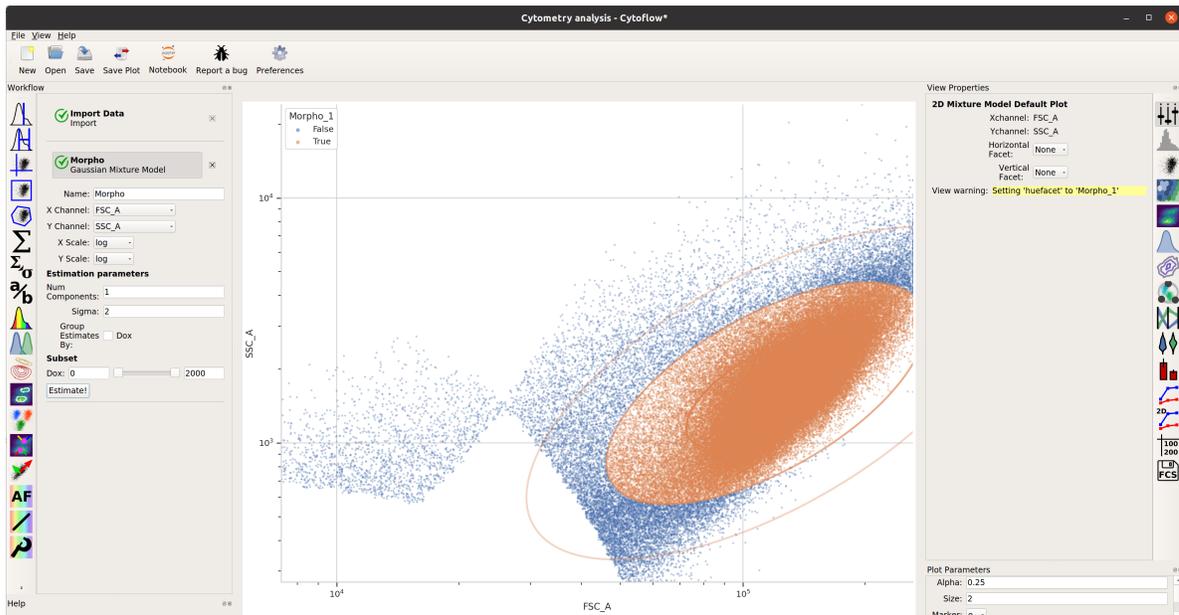

TASBE Calibration

- Use the TASBE calibration module to calibrate the FITC_A, Pacific_Blue_A, and PE_Tx_Red_YG_A channels.
Settings:
 - Autofluorescence / Blank file: `controls/Blank-1_H12_H12_P3.fcs`
 - Bleedthrough / PE_Tx_Red_YG_A file: `controls/mkate-1_H8_H08_P3.fcs`
 - Bleedthrough / FITC_A file: `controls/EYFP-1_H10_H10_P3.fcs`
 - Bleedthrough / Pacific_Blue_A file: `controls/EBFP2-1_H9_H09_P3.fcs`
 - Beads: Spherotech RCP-30-5A Lot AA01-AA04, AB01, AB02, AC01, GAA01-R
 - Beads file: `controls/BEADS-1_H7_H07_P3.fcs`
 - Beads unit: MEFL
 - Remaining beads parameters: left at default
 - Color translation / Do color translation? : True
 - Color translation / To channel: FITC_A
 - Color translation / Use mixture model? True
 - Color translation / PE_Tx_Red_YG_A -> FITC_A: `controls/RBY-1_H11_H11_P3.fcs`
 - Color translation / Pacific_Blue_A -> FITC_A: `controls/RBY-1_H11_H11_P3.fcs`
 - Subset / Morpho_1+: True

✔ **TASBE** ✕
 Quantitative Pipeline

FITC_A Pacific_Blue_A
 Channels: FSC_A SSC_A
 PE_Tx_Red_YG_A


Autofluorescence
 Blank file: 📁


Bleedthrough Correction
 PE_Tx_Red_YG_A 📁
 FITC_A 📁
 Pacific_Blue_A 📁


Bead Calibration
 Beads: ▼
 Beads file: 📁
 Beads unit: ▼
 Peak Quantile:
 Peak Threshold :
 Peak Cutoff:


Color Translation
 Do color translation?
 To channel: ▼
 Use mixture model?
 PE_Tx_Red_YG_A -> FITC_A 📁
 Pacific_Blue_A -> FITC_A 📁

Subset
 Morpho_1+ Morpho_1-
 Dox:
 Estimate progress: Valid model estimated!

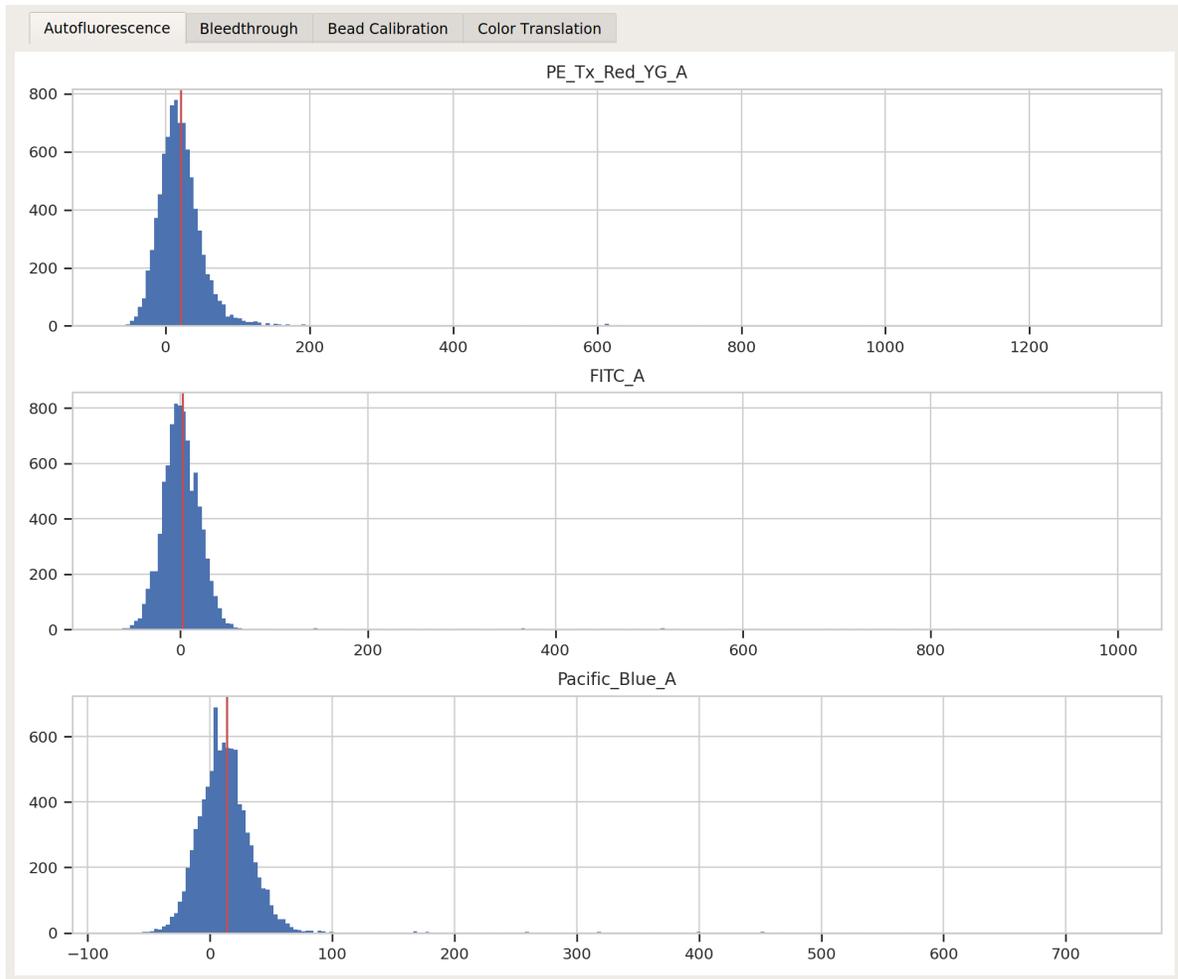

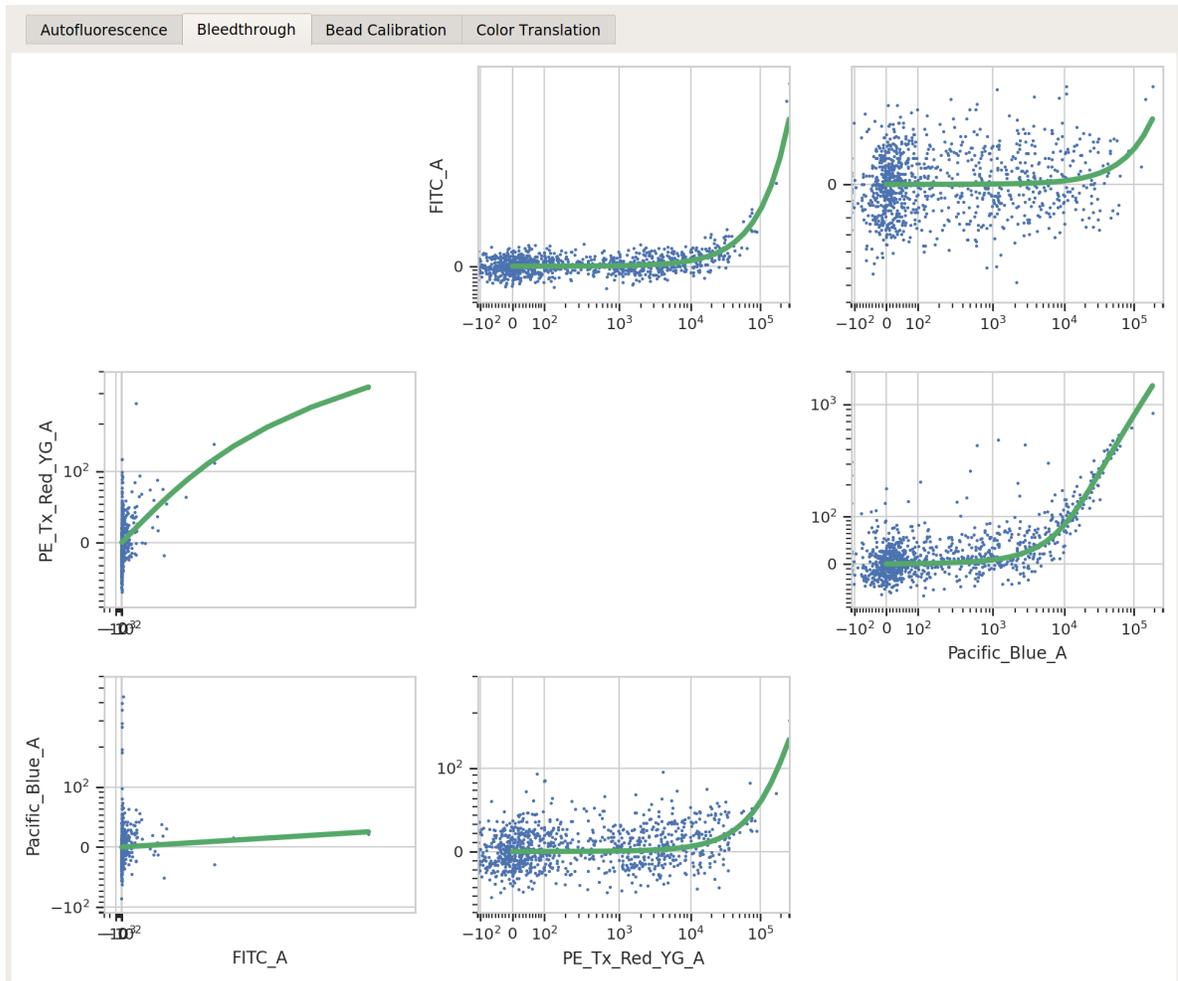

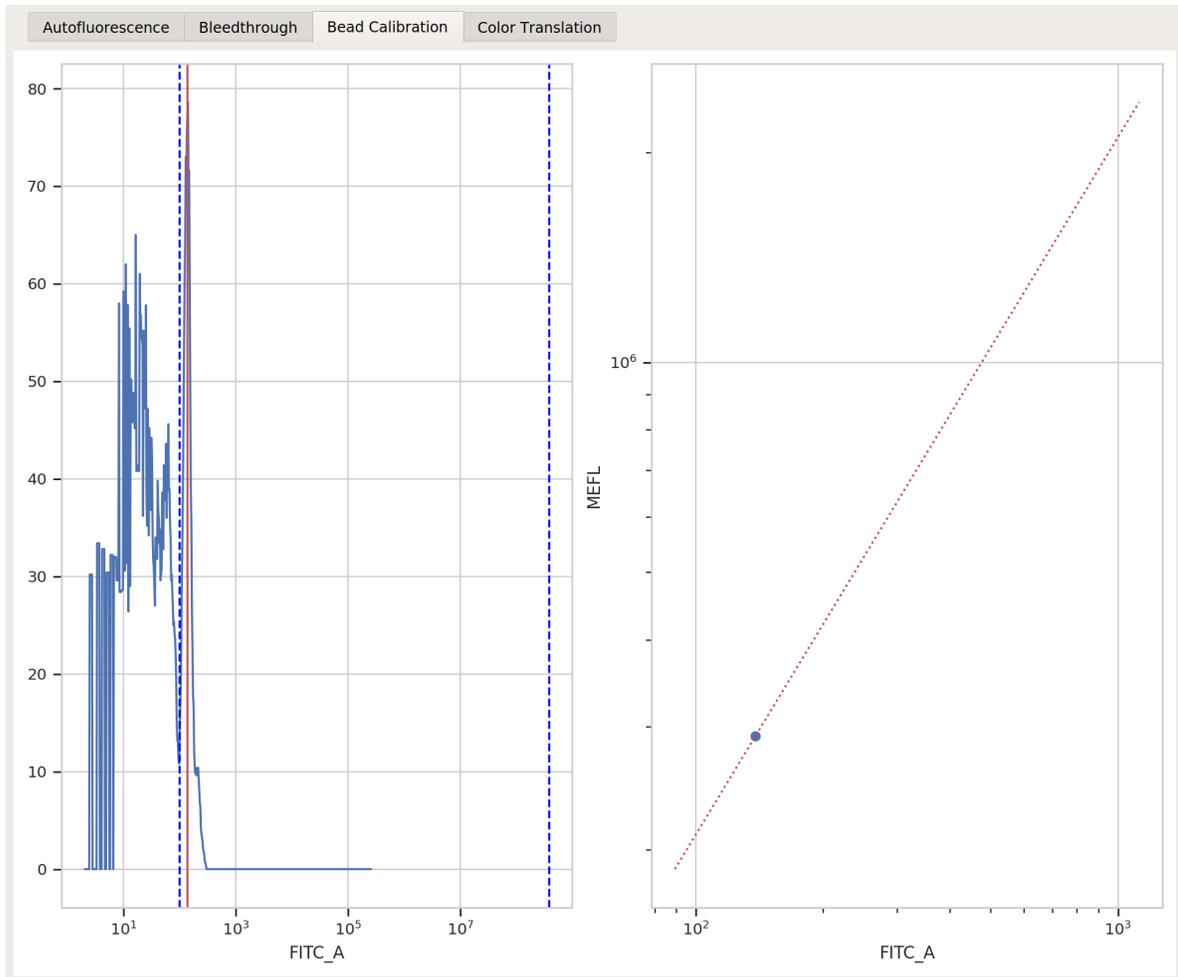


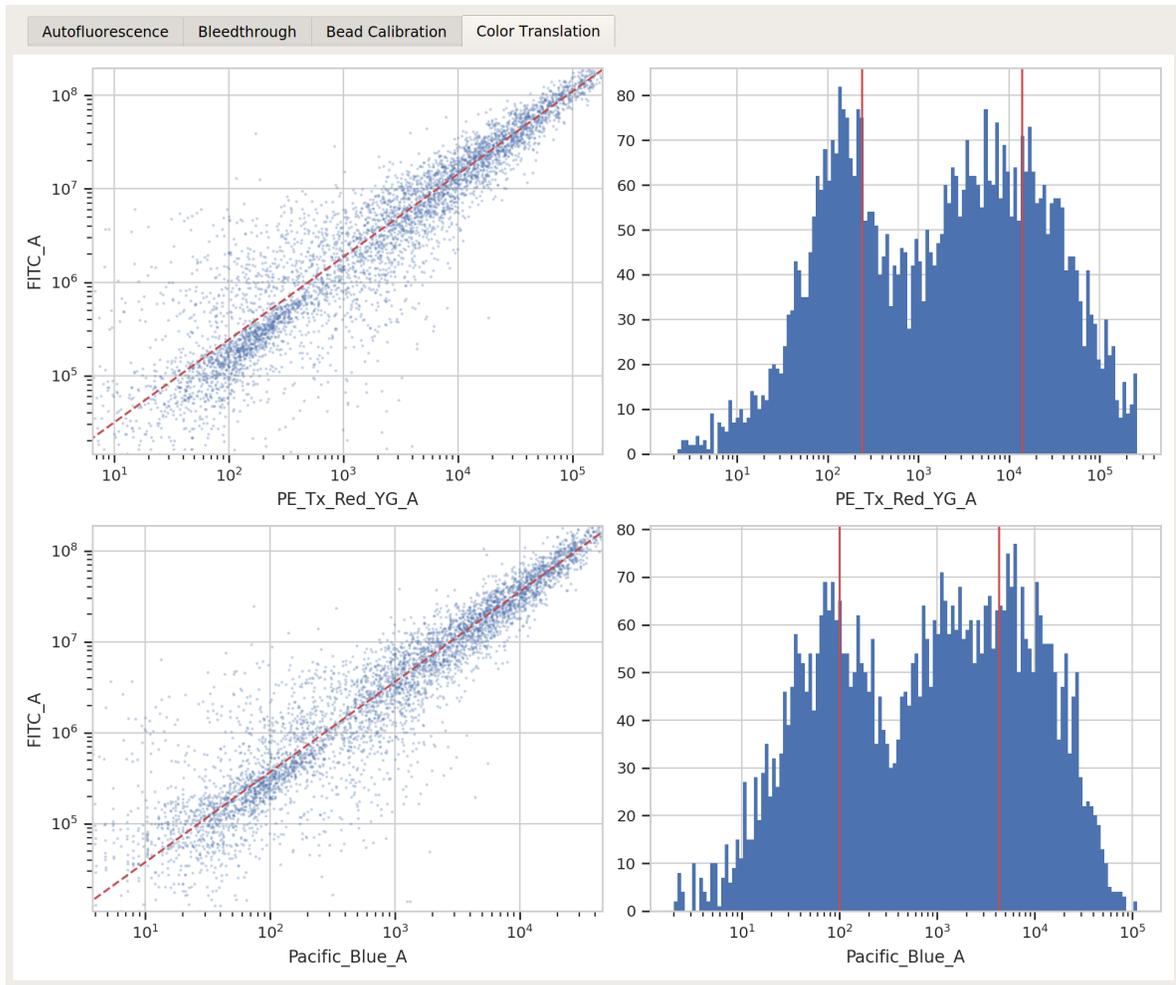

Binned Analysis


As described above, the example data in this notebook is from a transient transfection of mammalian cells in tissue culture. What this means is that there's a really broad distribution of fluorescence, corresponding to a broad distribution of transfection levels.

- Let's check the PE_Tx_Red_YG_A channel, where our mKate transfection marker is:

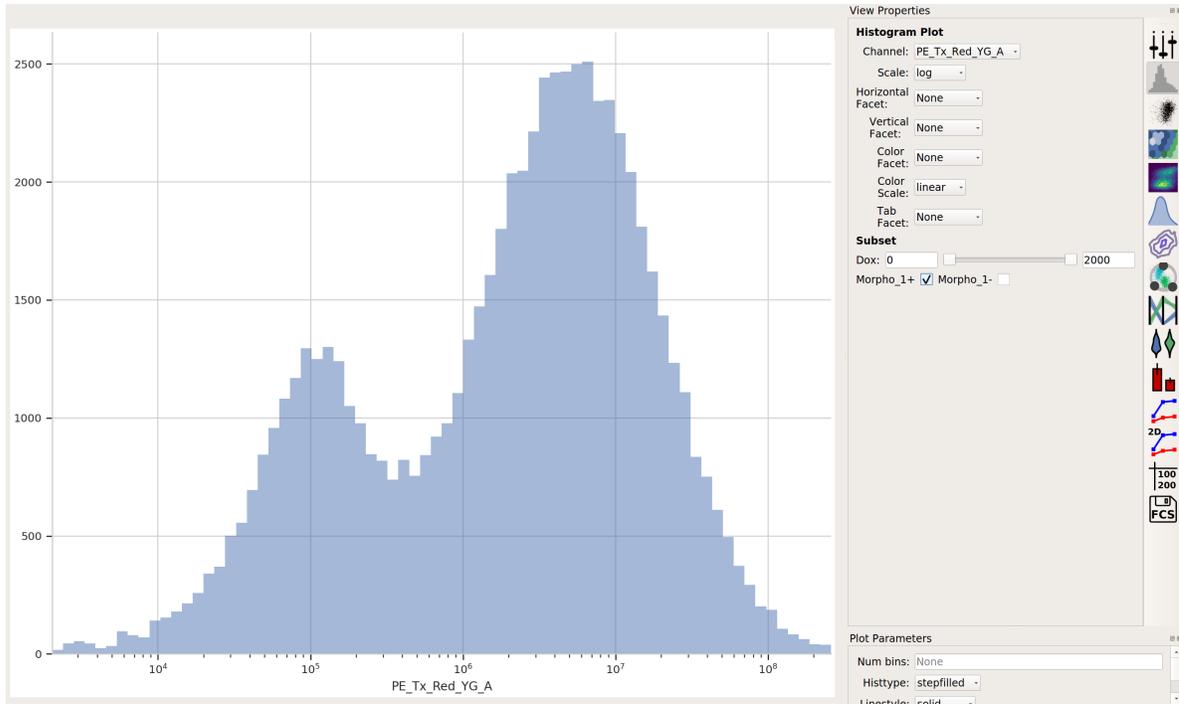


The way we handle this data is by dividing the cells into bins depending on their transfection levels. We find that cells that received few plasmids frequently behave differently (quantitatively speaking) than cells that received many plasmids. The **Binning** module applies evenly spaced bins; in this example, we're going to apply them on a log scale, every 0.1 log-units.

- Apply the **Binning** module with a log scale and a bin width of 0.1 log units:

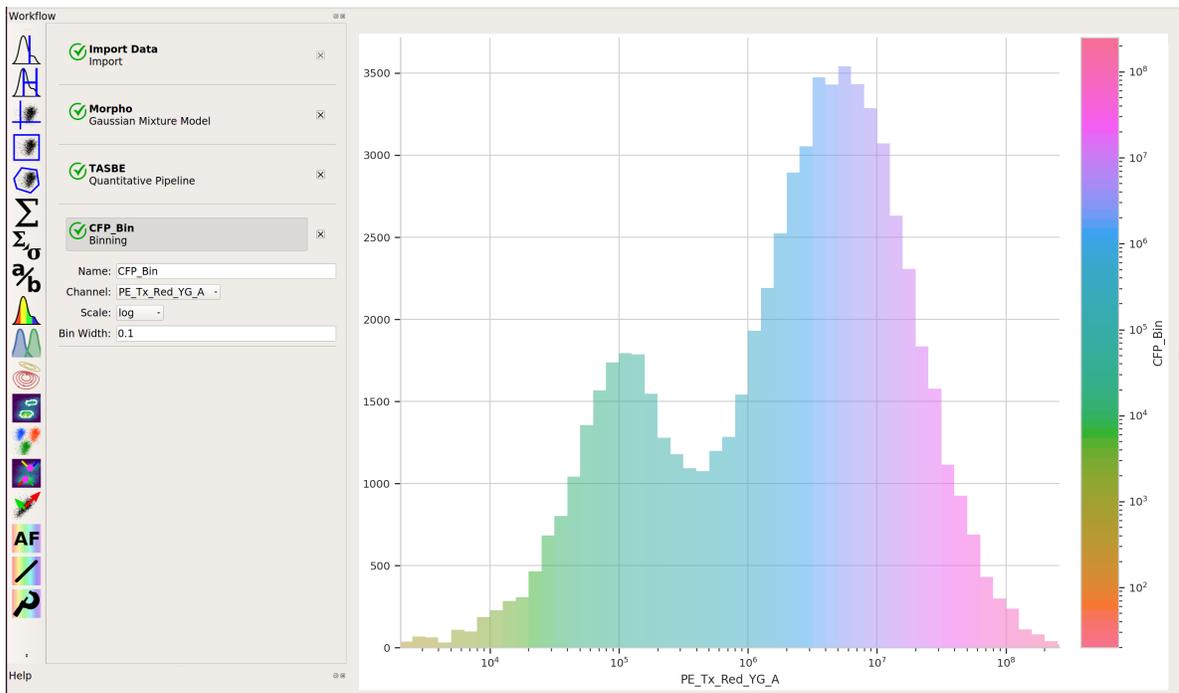

- Also, we really only want to look at transfected cells – so let's use a **1D Gaussian** gate to separate the transfected population from the untransfected population:

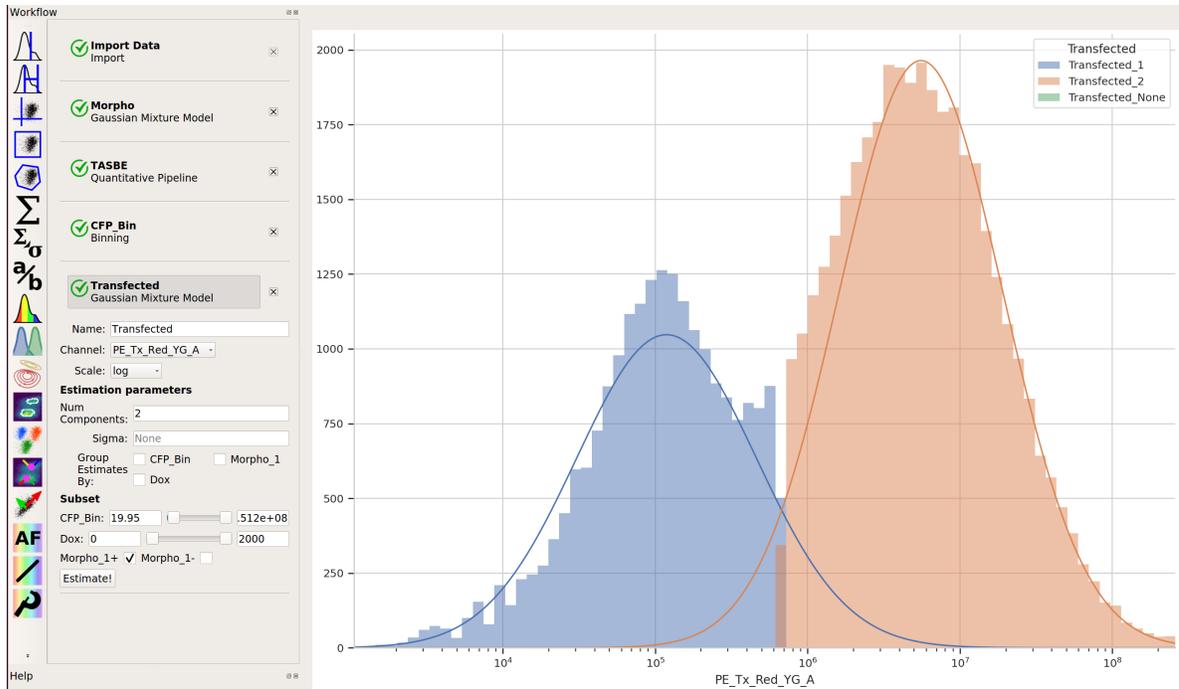

Creating Transfer Curves


- Let's normalize our input and output fluorescent proteins by our constitutive protein expression using **Ratio** operation:

✓ **InputPerConstitutive**
 Ratio ✕

Name:

Numerator:

Denominator:

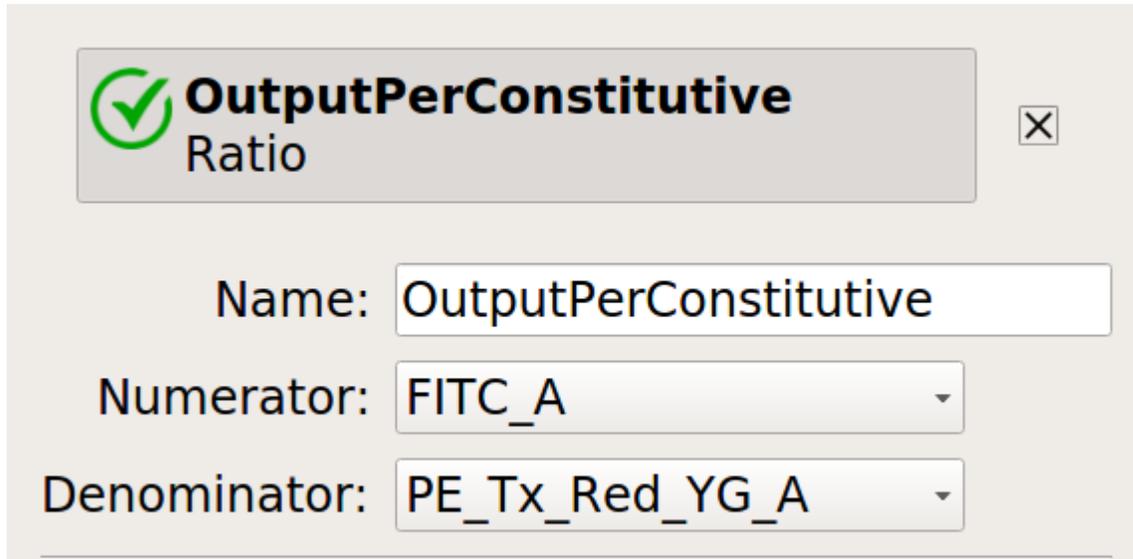

OutputPerConstitutive
Ratio

Name:

Numerator:

Denominator:

- Now, create four statistics: the geometric mean of the input and output fluorescence measurements, both normalized and not, for each bin, in each Dox condition. And make sure to only look at transfected single cells!

✓ **Input** ✕
 Channel Statistics

Name:

Channel:

Function:

Group CFP_Bin Morpho_1

By: Dox Transfected

Subset

Morpho_1+ Morpho_1-

Dox:

Transfected: Transfected_1 Transfected_2

CFP_Bin:

✓
Output
Channel Statistics
✕

Name:

Channel:

Function:

Group CFP_Bin Morpho_1

By: Dox Transfected

Subset

Morpho_1+ Morpho_1-

Dox:

Transfected: Transfected_1 Transfected_2

CFP_Bin:

 **InputNormalized**
Channel Statistics ✕

Name:

Channel:

Function:

Group CFP_Bin Morpho_1
By: Dox Transfected

Subset

Morpho_1+ Morpho_1-

Dox:

Transfected: Transfected_1 Transfected_2

CFP_Bin:

✔ **OutputNormalized**
 Channel Statistics ✕

Name:

Channel:

Function:

Group CFP_Bin Morpho_1

By: Dox Transfected

Subset


Morpho_1+ Morpho_1-

Dox:

Transfected: Transfected_1 Transfected_2


CFP_Bin:

- Now, we can start looking at transfer curves. First question: does the blue signal (our “input” signal) increase as we increase Dox concentration?

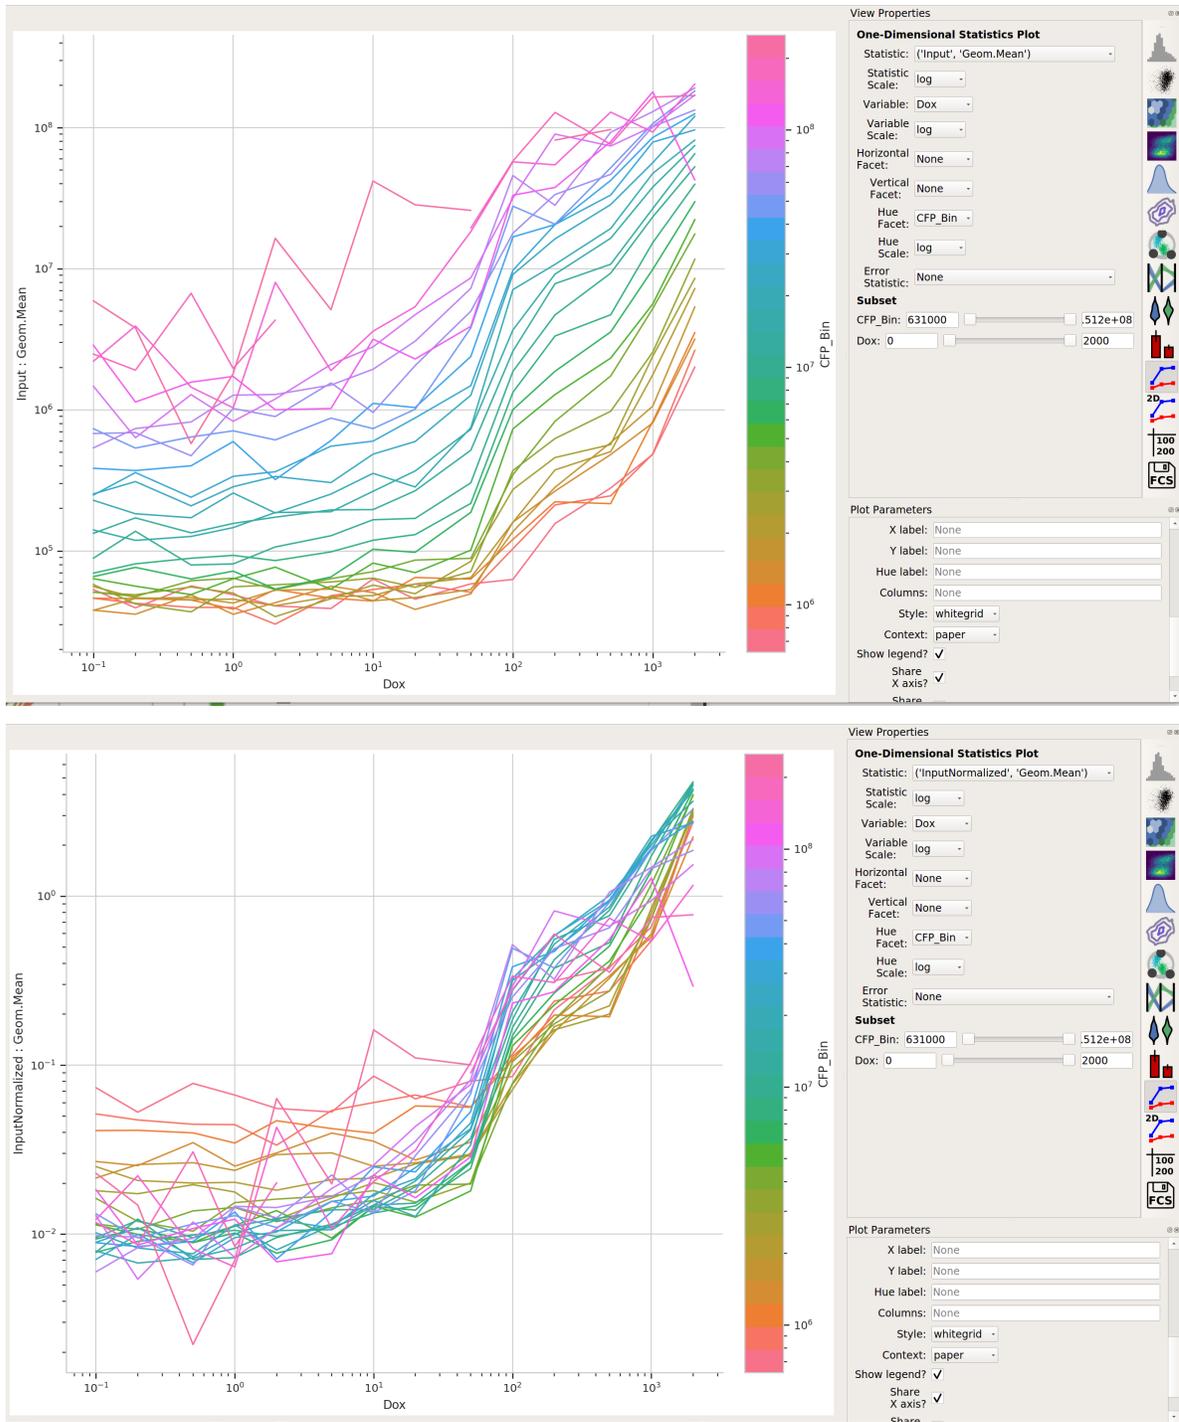

Yes! That's a good sign that our experiment is working.

- Does the yellow signal (our “output”) decrease as the blue signal (our “input”) increases? Ie, is the repressor “inverting” the signal?

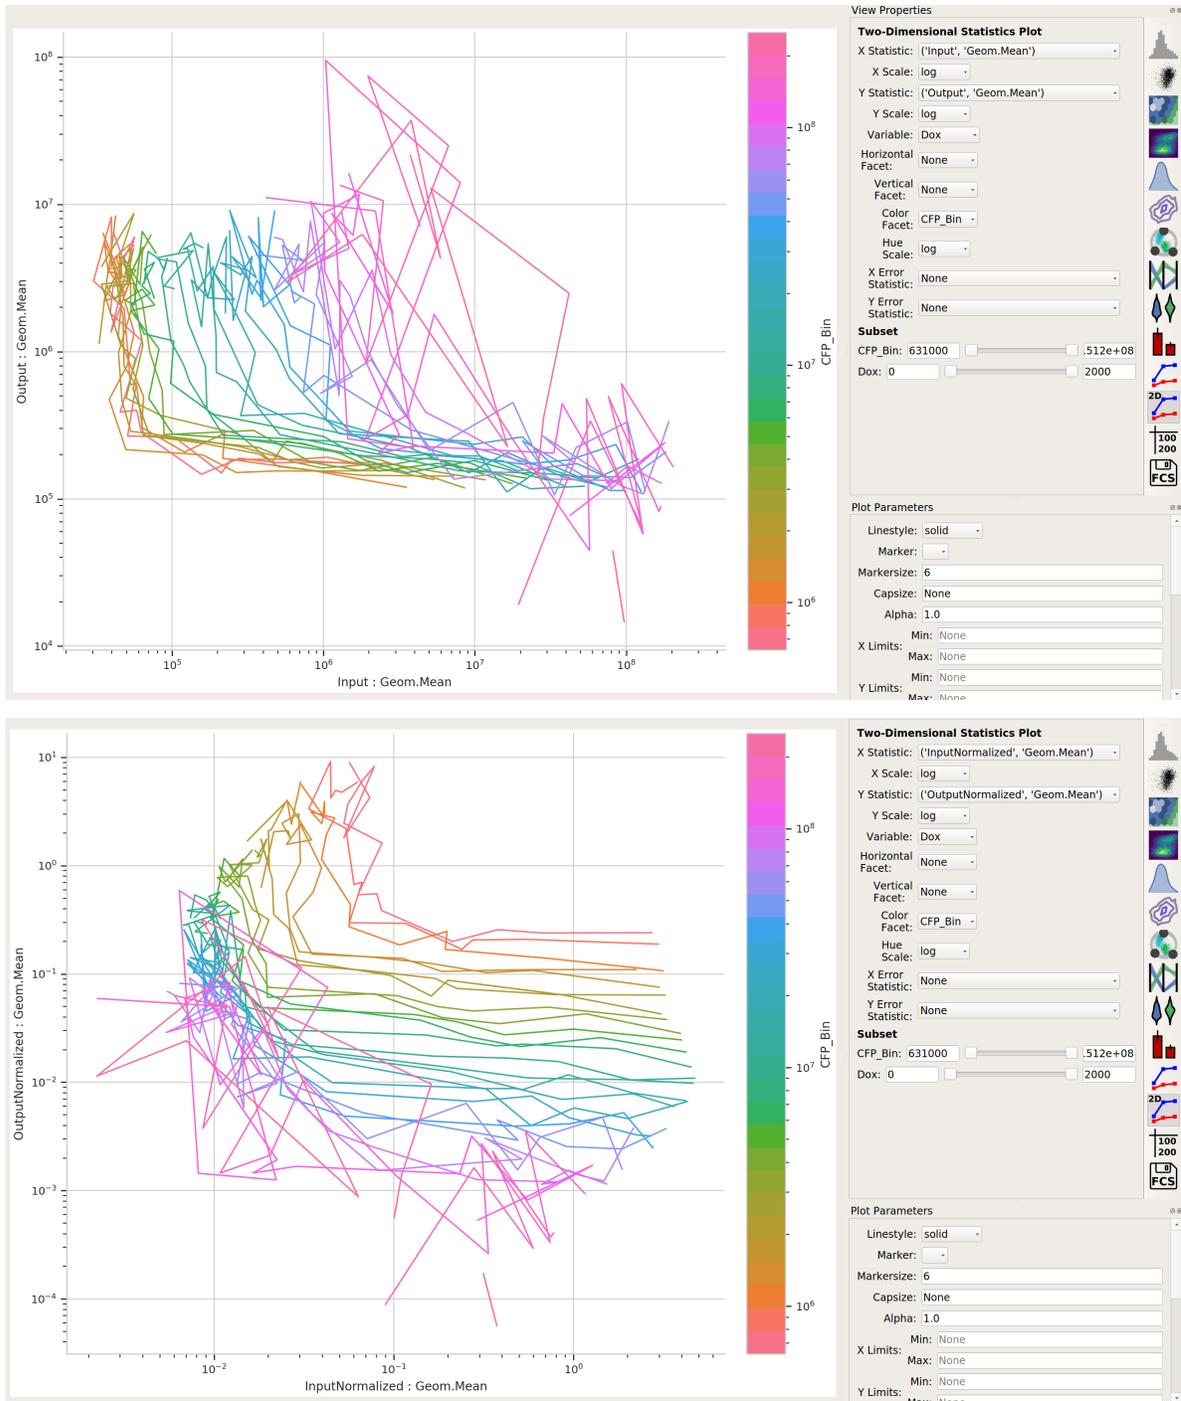

The data is a little “messy” – primarily because of bins that didn’t have many events in them, and thus gave quite noisy signals – but it’s clear that we are seeing an inversion of the input signal to the output signal. The repressor works.

5.1.23 How-To Guides

These guides are “recipes” – step-by-step guides to accomplish a particular task. They are a little higher-level than the tutorials. If there is something that you find confusing, please feel free to submit a bug report (or even better, a patch or pull request.)

5.1.24 Users’ guides

These documents help you understand some of the principles Cytoflow is based on and some subtler points about using it to analyze flow cytometry data. They can help you use Cytoflow more effectively!

5.2 Developer Manual

So you want to use *cytoflow* in your own Python-based analyses. Great! May I recommend you start with the *tutorials* and *examples* – they will give you a feel for the kinds of things you can use *cytoflow* to do. All of them are generated from *Jupyter notebooks*, and those notebooks and data can be found in the Releases tab at [the project homepage](#) (look for `cytoflow-$VERSION-examples-basic.zip` and `cytoflow-$VERSION-examples-advanced.zip`).

Then, if you decide you want to have a go, see the [installation notes](#). Quick hint: if you have Anaconda installed, say:

```
conda config --add channels cytoflow
conda create --name cytoflow cytoflow
```

This creates a new Anaconda environment named `cytoflow` and installs the latest *cytoflow* package from the Anaconda Cloud.

For more details of these modules, you’re likely to want to see the module documents

5.2.1 Contents:

Tutorials

These tutorials illustrate some of the capabilities of the *cytoflow* library. They are generated from the example notebooks and data sets in the `cytoflow-$VERSION-examples-basic.zip` file, available from the Releases tab at [the project homepage](#). Feel free to fire up a *Jupyter notebook* and follow along!

Basic example cytometry workflow

Welcome to *cytoflow*! I’m glad you’re here. The following is a heavily commented workflow for importing a few tubes of cytometry data and doing some (very) basic analysis. The goal is to give you not only a taste of using the library for interactive work, but also some insight into the rationale for the way it’s designed the way it is and the way it differs from existing projects.

cytoflow’s goal is to enable *quantitative, reproducible* cytometry analysis. Reproducibility between cytometry experiments is poor, due in part to differences in analysis between operators; but if all your analysis is in a *Jupyter notebook* (like this one!), then sharing and reuse of workflows is much easier.

Let’s look at a very basic experiment, containing only two tubes. These two tubes contain cells that are expressing fluorescent proteins as the read-out of some cell state. We’ll assume that these two tubes are identical, except that one has been induced with 1 μM of the small molecule inducer Doxycycline (aka ‘Dox’) and the other tube has been induced with 10 μM Dox.

Start by setting up Jupyter's plotting interface, then import the cytoflow module.

```
# in some buggy versions of the Jupyter notebook, this needs to be in its OWN CELL.  
%matplotlib inline
```

```
import cytoflow as flow  
  
# if your figures are too big or too small, you can scale them by changing matplotlib's  
↪ DPI  
import matplotlib  
matplotlib.rc('figure', dpi = 160)
```

The central data structure in cytoflow is the `Experiment`, which is basically a `pandas.DataFrame` containing the events; its associated metadata (experimental conditions and the like); and some methods to manipulate them.


You usually create an `Experiment` using an instance of the `ImportOp` class. Start by defining two tubes, including their experimental conditions (ie, how much Dox is in each); then give those tubes, and a `dict` specifying the experimental conditions' names and types, to `ImportOp`. Call the `apply()` function to get back the `Experiment` with all the data in it.

```
tube1 = flow.Tube(file = 'data/RFP_Well_A3.fcs',  
                 conditions = {'Dox' : 10.0})  
tube2 = flow.Tube(file='data/CFP_Well_A4.fcs',  
                 conditions = {'Dox' : 1.0})  
  
import_op = flow.ImportOp(conditions = {'Dox' : 'float'},  
                          tubes = [tube1, tube2])  
  
ex = import_op.apply()
```

Once you have an `Experiment` instance, this is the last time you should ever think about tubes or wells. Rather, think of your experiment as a very large set of single-cell measurements, each of which has some metadata associated with it; in this case, how much Dox the cell was exposed to. `cytoflow` helps you focus your analysis on how those measurements change as the experimental conditions change, without worrying about what cells were in what tube.

Let's have a quick look at one of the fluorescence channels, Y2-A. Instantiate a `HistogramView` and tell it which channel we're looking at, then call `plot` and pass it the experiment containing the data. Remember, this is not a single tube, but rather all the data in the `Experiment`.


```
hist = flow.HistogramView()  
hist.channel = 'Y2-A'  
hist.plot(ex)
```

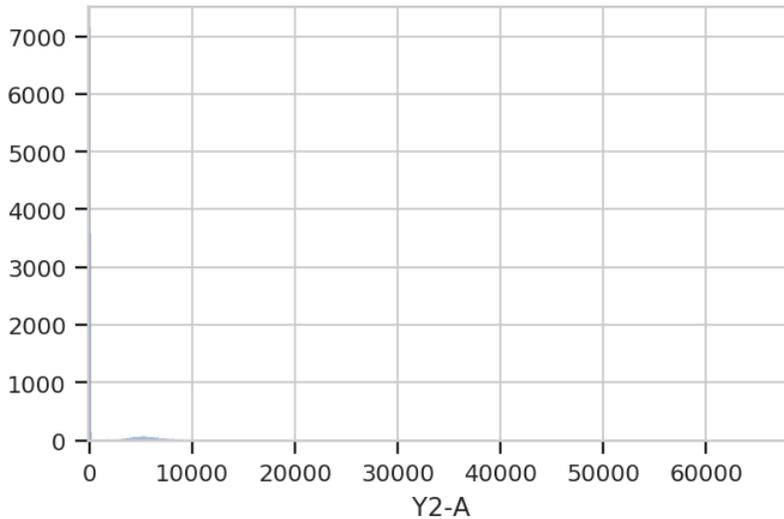

Hmmm. This plot is hard to interpret because most of the data is clustered around 0, in the linear range of the detector’s response. Let’s re-plot using a different scale. My favorite is `logicle`, which has a linear response around 0 and a log range elsewhere. We specify the plot scale by setting the `scale` attribute of `HistogramView` to `logicle`; other options are `log` and `linear`.

The cell below also demonstrates a different way to parameterize the `HistogramView` instance, by passing parameters to the constructor instead of setting the values of the instance’s attributes after we make it. Either way is correct.

```
hist = flow.HistogramView(channel = 'Y2-A',
                          scale = 'logicle')
hist.plot(ex)
```

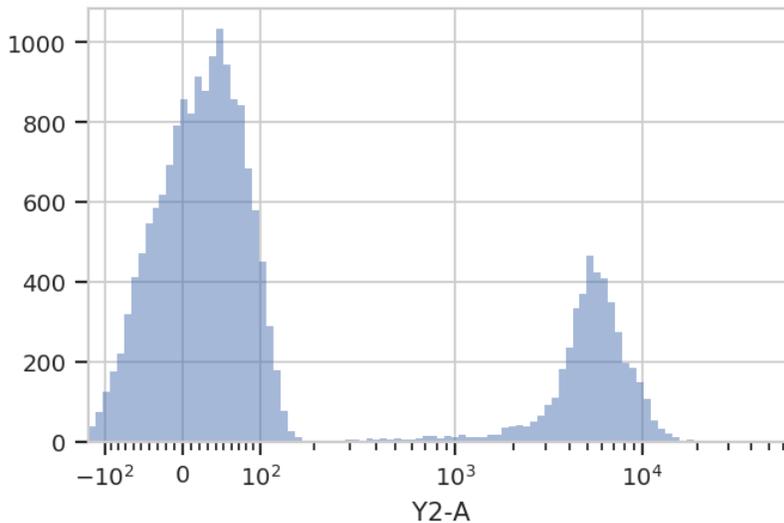


Ah, much better. There is clearly a population of cells around 0 and a population of cells around about 5000. But! This is the entire `Experiment` – is is one of the populations from the low-Dox tube and the other population from the high-Dox tube?

Let’s see if the histogram is different for the two different concentrations of inducer. `CytoFlow`’s plotting takes inspiration from Trellis plots (eg the `lattice` package in R): to split the data into subsets, you tell the plotting module which metadata “facet” you want to plot in the X, Y and color (hue) axes.

This time, we tell `HistogramView` to make a separate plot for each different value of `Dox` and stack them on top of each other by saying `yfacet = 'Dox'`; if we wanted the plots side-by-side, we would have said `xfacet = 'Dox'`.


Also note that this time, we don't keep around the `HistogramView` object; if we don't need to re-use it, we can just call `plot` right after the constructor.

```
flow.HistogramView(channel = 'Y2-A',
                   scale = 'logicle',
                   yfacet = 'Dox').plot(ex)
```

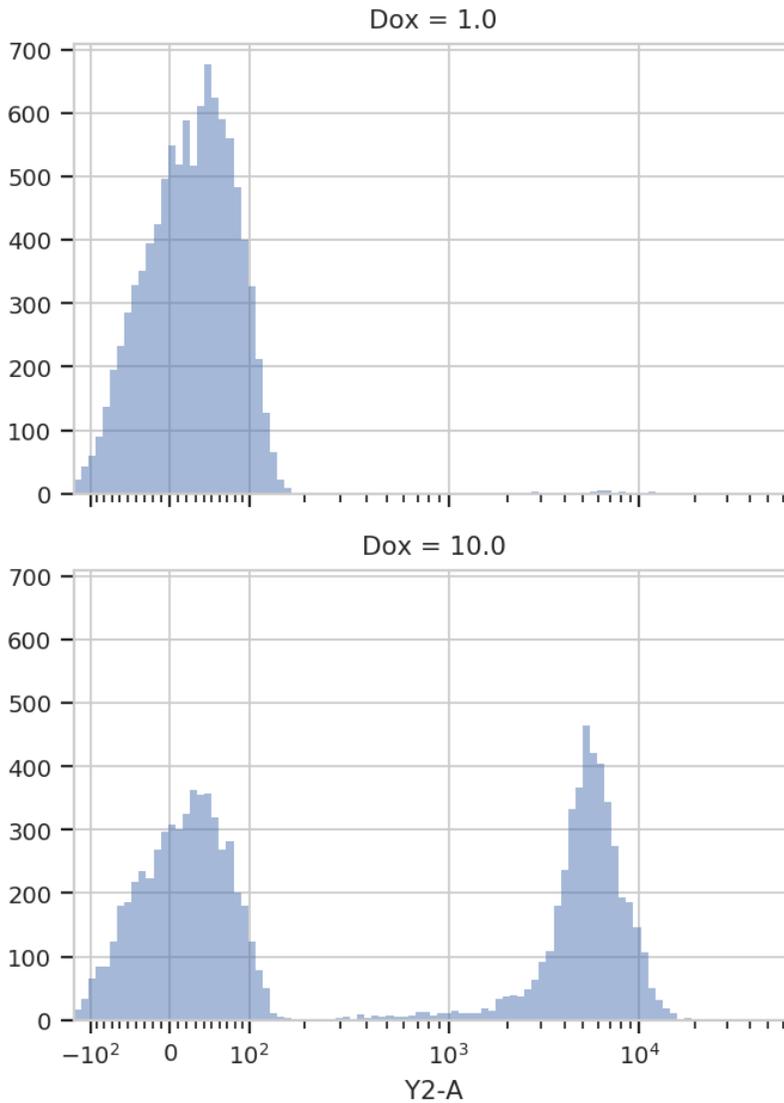

Indeed, the two tubes have dramatically different histograms. We could also plot them on top of each other with different colors, by using `huefacet` instead of `yfacet`.

```
flow.HistogramView(channel = "Y2-A",
                   scale = "logicle",
                   huefacet = 'Dox').plot(ex)
```

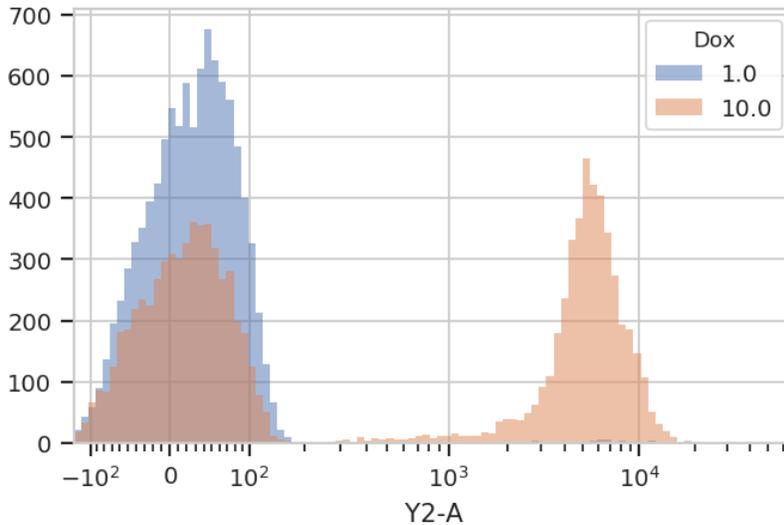

So, there's a clear difference between these tubes: one has a substantial population above about ~200 in the Y2-A, and the other doesn't. What's the proportion of "high" cells? Let's gate out the "high" population using a `ThresholdOp`.

```
thresh = flow.ThresholdOp(name = "T",
                           channel = "Y2-A",
                           threshold = 200)

ex2 = thresh.apply(ex)
```

Two important things to note here: first, an `Operation` (such as `ThresholdOp`) *does not operate in place*; instead, you create a `ThresholdOp` object, then call `apply()` to run it on an `Experiment`. The `apply()` function returns a new `Experiment`.

Second, a gate *does not remove events*; it simply *adds additional metadata* to the events already there. You can see this if we look at the underlying `pandas.DataFrame` for `ex` and `ex2`:

```
print(ex.data.head())
print("----")
print(ex2.data.head())
```

| | B1-A | B1-H | B1-W | Dox | FSC-A | FSC-H | 0 |
|---|------------|---------------|---------------|------------|-------------|------------|-------------|
| ↪ | 257.718353 | -63040.300781 | 10.0 | 459.962982 | 437.354553 | | -127.094002 |
| 1 | -70.234840 | 255.798340 | -34034.042969 | 10.0 | -267.174652 | 365.354553 | |
| 2 | -96.471756 | 313.398346 | -41931.687500 | 10.0 | -201.582336 | 501.354553 | |
| 3 | 18.831570 | 277.669250 | 8514.489258 | 10.0 | 291.259888 | 447.029755 | |
| 4 | 100.882095 | 255.756256 | 51291.074219 | 10.0 | -397.168579 | 354.565308 | |

| | FSC-W | HDR-T | SSC-A | SSC-H | SSC-W | 0 |
|---|----------------|------------|-------------|---------------|---------------|---------------|
| ↪ | 2.018511 | 840.091370 | 747.917847 | 147225.328125 | | 137847.578125 |
| 1 | -95849.679688 | 27.451754 | 3476.902344 | 3163.917969 | 144038.046875 | |
| 2 | -52700.828125 | 32.043865 | 480.270691 | 507.917877 | 123937.437500 | |
| 3 | 85399.273438 | 79.327492 | 8026.275879 | 6741.838867 | 156043.484375 | |
| 4 | -146821.125000 | 79.731194 | 7453.750488 | 609.884277 | 262143.968750 | |

| | V2-A | V2-H | V2-W | Y2-A | Y2-H | 0 |
|---|------------|--------------|--------------|-------------|-------------|-----------|
| ↪ | 153854 | 22701.017578 | 109.946274 | 153.630051 | | 41.593452 |
| 1 | 103.437637 | 336.153870 | 40332.058594 | 5554.108398 | 4273.629883 | 240. |

```
2 -271.375580 256.153870 -138860.828125 81.835281 121.630051
3 -26.212378 207.677841 -16543.453125 -54.120304 98.122017
4 44.559933 216.036865 27035.013672 -10.542595 127.326027
```

```
Y2-W
0 93802.468750
1 170344.203125
2 88188.023438
3 -72294.242188
4 -10852.761719
```

```
-----
B1-A B1-H B1-W Dox FSC-A FSC-H 0 -127.094002
↪257.718353 -63040.300781 10.0 459.962982 437.354553
1 -70.234840 255.798340 -34034.042969 10.0 -267.174652 365.354553
2 -96.471756 313.398346 -41931.687500 10.0 -201.582336 501.354553
3 18.831570 277.669250 8514.489258 10.0 291.259888 447.029755
4 100.882095 255.756256 51291.074219 10.0 -397.168579 354.565308
```


```
FSC-W HDR-T SSC-A SSC-H SSC-W 0 137847.578125
↪2.018511 840.091370 747.917847 147225.328125
1 -95849.679688 27.451754 3476.902344 3163.917969 144038.046875
2 -52700.828125 32.043865 480.270691 507.917877 123937.437500
3 85399.273438 79.327492 8026.275879 6741.838867 156043.484375
4 -146821.125000 79.731194 7453.750488 609.884277 262143.968750
```

```
V2-A V2-H V2-W Y2-A Y2-H 0 41.593452 240.
↪153854 22701.017578 109.946274 153.630051
1 103.437637 336.153870 40332.058594 5554.108398 4273.629883
2 -271.375580 256.153870 -138860.828125 81.835281 121.630051
3 -26.212378 207.677841 -16543.453125 -54.120304 98.122017
4 44.559933 216.036865 27035.013672 -10.542595 127.326027
```

```
Y2-W T
0 93802.468750 False
1 170344.203125 True
2 88188.023438 False
3 -72294.242188 False
4 -10852.761719 False
```

In ex2, the ThresholdOp added a new column, named T, which has the same name as the ThresholdOp's name attribute. It is True if the Y2-A value is greater than 200, and False otherwise. The T column is now a piece metadata just like the Dox concentration that we can use to facet the plots. For example, the following plots different Dox concentrations in separate plots stacked on top of each other (yfacet = "Dox"), and on each of these plots uses separate colors for the "low" and "high" populations (huefacet = 'T'):

```
flow.HistogramView(channel = "Y2-A",
                    scale = "logicle",
                    yfacet = "Dox",
                    huefacet = 'T').plot(ex2)
```

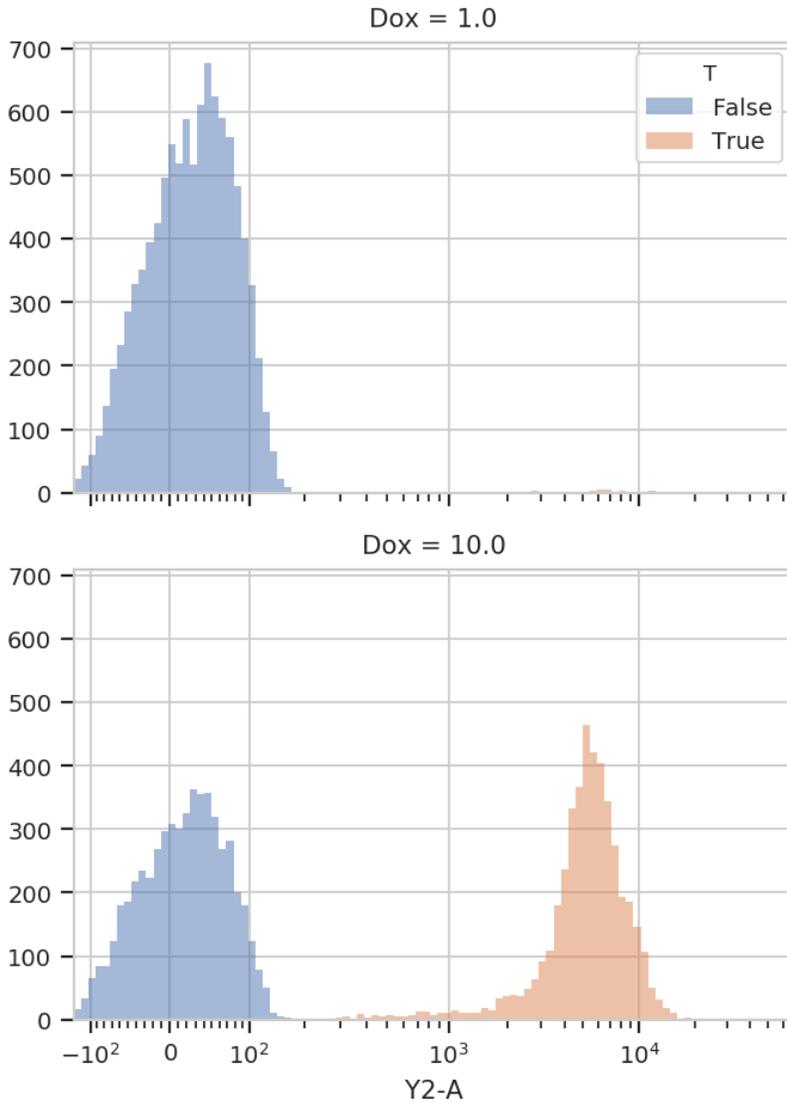

It's also important to note that we can still access the underlying `pandas.DataFrame`: either by looking at the `Experiment.data` attribute, or by referencing a column directly:

```
ex2["T"].head(10)
```

```
0    False
1     True
2    False
3    False
4    False
5    False
6     True
7    False
8     True
9    False
Name: T, dtype: bool
```

Because the data is all stored in a single `pandas.DataFrame`, we can use the `pandas` API, and indeed the rest of

the SciPy stack, to ask sophisticated questions of the underlying data. For example, “how many events of each Dox concentration were above the threshold?”

```
ex2.data.groupby(['Dox', 'T']).size()
```

```
Dox  T
1.0  False    9946
      True      54
10.0 False    5561
      True    4439
dtype: int64
```

cytoflow can answer the same question for us using one of its statistics views. In cytoflow, a *statistic* is a number that summarizes a population; one of the key features of cytoflow is that it makes it easy to see how these summary statistics change as your experimental conditions change.

Several operations add statistics to an experiment; one of the most straightforward ones is `ChannelStatisticOp`. It groups the experiment’s data by the conditions specified in `by`, then applies `function` to `channel` for each group.

In this case, we’ll divide up the data into the subgroups `T == True & Dox == 1`; `T == True & Dox == 10`; `T == False & Dox == 1`; and `T == False & Dox == 10`. Then, we’ll apply the function `len` to the Y2-A channel.

```
ex3 = flow.ChannelStatisticOp(name = "ByDox",
                             channel = "Y2-A",
                             by = ['T', 'Dox'],
                             function = len).apply(ex2)
```


Now we can look at the new statistic: `Experiment.statistics` is a dictionary whose keys are tuples and whose values are the computed statistics (stored as `MultiIndexed pandas.Series`). The first element in the tuple is the name of the operation that added it, and the second is defined by that operation. In this case, it’s `len`, the name of the function.

```
ex3.statistics[("ByDox", "len")]
```

```
T      Dox
False 1.0    9946
      10.0   5561
True   1.0     54
      10.0  4439
Name: ByDox : len, dtype: int64
```

We can also plot statistics using one of the various statistics views, such as `BarChartView`.

```
flow.BarChartView(statistic = ("ByDox", "len"),
                  variable = "Dox",
                  huefacet = 'T').plot(ex3)
```

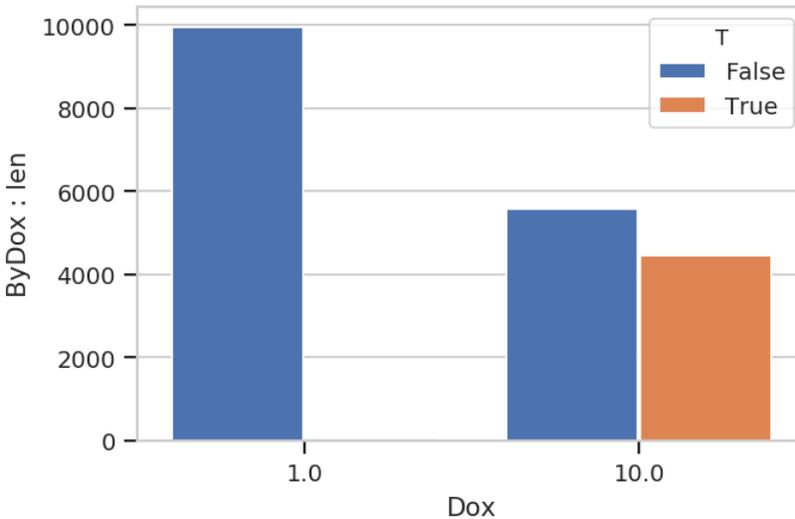

Statistics are important enough that they get an entire notebook of examples; please see `Statistics.ipynb` for a more in-depth exploration.

I hope this makes the semantics of the `cytoflow` package clear. This was a pretty simplistic toy analysis; for more sophisticated examples, see the other accompanying Jupyter notebooks.

Interactive Plots

The `cytoflow` package is designed for both scripting and interactive use. As much as I would like the whole world to use data-driven gating and analysis methods, many workflows still require manually specifying gates, and this is most easily done by drawing the gate on a plot.

Fortunately, through the combination of `matplotlib` and the Jupyter notebook, we can have the best of both worlds: interactive REPL *and* plots that we can point-and-click with.

Clearly, this is best run interactively; but if you're looking at this notebook online, you should still get a flavor of the package's capabilities.

First, set up Jupyter's `matplotlib` support, and import the `cytoflow` module. Note the `%matplotlib notebook` instead of `%matplotlib inline`.

```
# in some buggy versions of the Jupyter notebook, this needs to be in its OWN CELL.
%matplotlib notebook
```

```
import cytoflow as flow

# if your figures are too big or too small, you can scale them by changing matplotlib's
↪DPI
import matplotlib
matplotlib.rc('figure', dpi = 160)
```

Load a few example files, conditioning them on a float variable `Dox`.

```
tube1 = flow.Tube(file='data/RFP_Well_A3.fcs', conditions = {"Dox" : 10.0})
tube2 = flow.Tube(file='data/CFP_Well_A4.fcs', conditions = {"Dox" : 1.0})

import_op = flow.ImportOp(conditions = {"Dox" : "float"},
                          tubes = [tube1, tube2])

ex = import_op.apply()
```

Plot the Y2-A channel. We can see there's a bimodal distribution in one of the tubes.

```
flow.HistogramView(channel = "Y2-A",
                  scale = "logicle",
                  huefacet = "Dox").plot(ex)
```

```
<IPython.core.display.Javascript object>
```

Let's use a `ThresholdOp` to split out the top peak. You can get an interactive plot (the same `HistogramView` as above) by calling `ThresholdOp`'s `default_view()` method. The view that gets returned is linked back to the `ThresholdOp` that produced it: it shows the proper channel, and when you draw a threshold on it the `ThresholdOp` instance's `threshold` trait gets updated.

One other thing to note: because the `ThresholdOp`'s default view is derived from `HistogramView`, you can use all (well, most!) of the functionality in a regular `HistogramView`. Here, we'll use the `huefacet` trait to plot the same multi-colored histogram as above.

As shown below, the steps for using an interactive view are: * Instantiate the operation * Call the operation's `default_view()` to get the interactive view. * Plot the view. * Set the view's `interactive` trait to `True`. This step can go before or after calling `plot()`. * Note that the view now shows a cursor (a vertical blue line) that follows your mouse as you move it around the view. Select the threshold you want, then click the mouse button to set it. A fixed blue line appears.

```
t = flow.ThresholdOp(name = "Threshold",
                    channel = "Y2-A")
tv = t.default_view()
tv.huefacet = "Dox"
tv.scale = "logicle"
tv.interactive = True

tv.plot(ex)
```

```
<IPython.core.display.Javascript object>
```

After you've drawn a threshold on the plot, look at the `ThresholdOp` instance's `threshold` trait and see that it matches the threshold you drew.

```
t.threshold
```

```
235.97817044140453
```

You can then apply the newly parameterized operation to the data set.

```
ex2 = t.apply(ex)
flow.HistogramView(channel = "Y2-A",
                  scale = "logicle",
```

(continues on next page)

(continued from previous page)

```
huefacet = "Dox",
yfacet = "Threshold").plot(ex2)
```

```
<IPython.core.display.Javascript object>
```

We can use a similar strategy with the RangeOp. The setup is very much the same; but instead of a single click, drag the cursor to set the range.

Also note that we can compress the invocation by passing the parameters to default_view() (as we would to a constructor.)

```
r = flow.RangeOp(name = "Range",
                 channel = "Y2-A")

r.default_view(huefacet = "Dox",
               scale = "logicle",
               interactive = True).plot(ex)
```

```
<IPython.core.display.Javascript object>
```

```
r.low, r.high
```

```
(2007.3540593264756, 11086.840684744158)
```

You can also draw ranges on 2D plots. Again, drag the cursor to draw a range.

```
r2d = flow.Range2Dop(name = "Range2D",
                     xchannel = "V2-A",
                     ychannel = "Y2-A")

r2d.default_view(huefacet = "Dox",
                 xscale = "logicle",
                 yscale = "logicle",
                 interactive = True).plot(ex)
```

```
<IPython.core.display.Javascript object>
```

```
r2d.xlow, r2d.xhigh, r2d.ylow, r2d.yhigh
```

```
(-203.01634412009793,
 104.94315196137035,
 2038.5106539405642,
 24562.81382553335)
```

You can specify a polygon this way too. Unfortunately, the JavaScript link between the Jupyter notebook and the Python kernel is a little slow, so the performance here is ... not ideal. Be patient.

Single click to set vertices; click the first vertex a second time to close the polygon.

```
p = flow.PolygonOp(name = "Polygon",
                   xchannel = "V2-A",
```

(continues on next page)

(continued from previous page)

```

        ychannel = "Y2-A")

pv = p.default_view(huefacet = "Dox",
                   xscale = "logicle",
                   yscale = "logicle",
                   interactive = True)

pv.plot(ex)

```

```
<IPython.core.display.Javascript object>
```

```
p.vertices
```

```

[(-109.22381313438126, 4552.48571716678),
 (47.581169555466914, 23032.99288702212),
 (359.0848827803494, 23609.72249982525),
 (603.6648998740229, 5808.103794745581),
 (318.0855902021553, 1315.7691688032837),
 (41.025767639853456, 1513.9301298793557),
 (41.025767639853456, 1513.9301298793557),
 (-15.72537611199034, 1702.8785363694597),
 (-15.72537611199034, 1702.8785363694597)]

```

You can also specify a quadrant (or quad) gate. Move the cursor to where you want it; click to set the gate.

```

q = flow.QuadOp(name = "Quad",
                xchannel = "V2-A",
                ychannel = "Y2-A")

qv = q.default_view(huefacet = "Dox",
                   xscale = "logicle",
                   yscale = "logicle",
                   interactive = True)

qv.plot(ex)

```

```
<IPython.core.display.Javascript object>
```

```
q.xthreshold, q.ythreshold
```

```
(278.2187356624719, 5531.465729647518)
```

Machine Learning for Flow Cytometry

One of the directions cytoflow is going in that I'm most excited about is the application of advanced machine learning methods to flow cytometry analysis. After all, cytometry data is just a high-dimensional data set with many data points: making sense of it can take advantage of some of the sophisticated methods that have seen great success with other high-throughput biological data (such as microarrays.)

The following notebook demonstrates a heavily-commented machine learning method, Gaussian Mixture Models, applied to the demo data set we worked with in "Basic Cytometry." Then, there are briefer examples of some of the other machine learning methods that are implemented in cytoflow.

Set up the Jupyter notebook and import cytoflow.

```
# in some buggy versions of the Jupyter notebook, this needs to be in its OWN CELL.  
%matplotlib inline
```


```
import cytoflow as flow  
  
# if your figures are too big or too small, you can scale them by changing matplotlib's ↵  
↵ DPI  
import matplotlib  
matplotlib.rc('figure', dpi = 160)
```

We have two Tubes of data that we specify were treated with two different concentrations of the inducer Doxycycline.

```
tube1 = flow.Tube(file = 'data/RFP_Well_A3.fcs',  
                 conditions = {"Dox" : 10.0})  
tube2 = flow.Tube(file='data/CFP_Well_A4.fcs',  
                 conditions = {"Dox" : 1.0})  
  
import_op = flow.ImportOp(conditions = {"Dox" : "float"},  
                          tubes = [tube1, tube2],  
                          channels = {'V2-A' : 'V2-A',  
                                     'Y2-A' : 'Y2-A'})  
  
ex = import_op.apply()
```

Let's look at the histogram of the Y2-A channel (on a logicle plot scale).

```
flow.HistogramView(scale = 'logicle',  
                  channel = 'Y2-A').plot(ex)
```

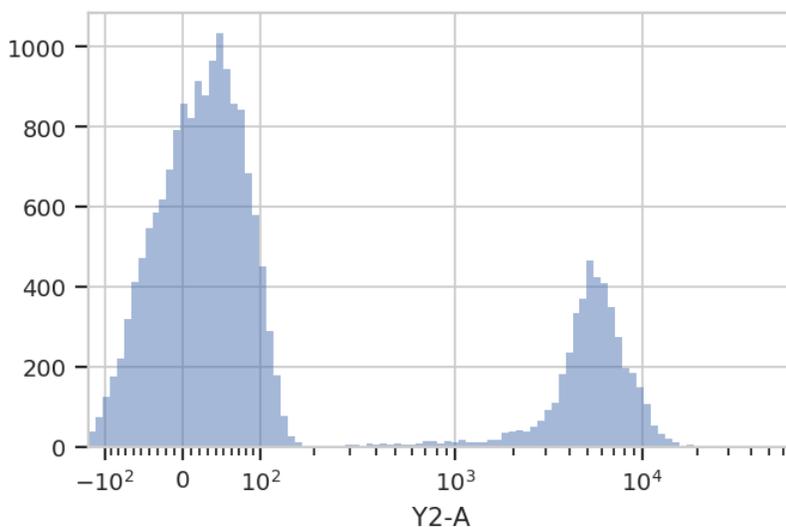


This data looks bimodal to me! Not perfect Gaussians, but close enough that using a Gaussian Mixture Model will probably let us separate them.

Let's use the `GaussianMixtureOp` to separate these two populations. In operations that are parameterized by data (either an Experiment or some auxiliary FCS file), cytoflow separates the estimation of module parameters from their application. Thus, after instantiating the operation, you call `estimate()` to estimate the model parameters. Those parameters stay associated with the operation instance in the same way instances of `ThresholdOp` have the gate threshold as an instance attribute.

Additionally, many modules, including `GaussianMixtureModelOp`, have a `default_view()` factory method that returns a diagnostic plot so you can check to see that the parameter estimation worked. This is particularly important for unsupervised learning methods! In this case, the `GaussianMixtureModelOp`'s `default_view()` returns a `View` that plots a histogram, colored by the component each event was assigned to, and an overlay of the Gaussian distributions on top of the histogram.

```
g = flow.GaussianMixtureOp(name = "Gauss",
                           channels = ["Y2-A"],
                           scale = {"Y2-A" : "logicle"},
                           num_components = 2)


g.estimate(ex)
g.default_view().plot(ex)
```

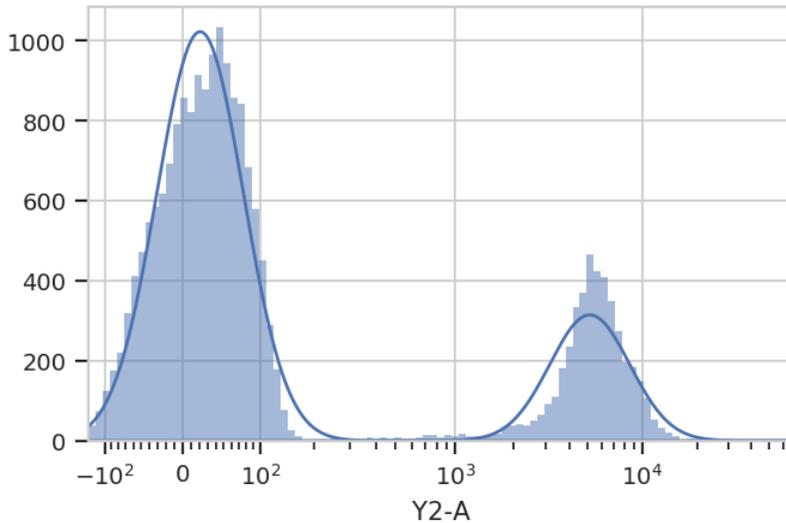

Excellent. It looks like the GMM found the two distributions we were looking for. Let's call `apply()`, then use the operation's default view to plot the new Experiment.

```
ex2 = g.apply(ex)
g.default_view().plot(ex2)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳Setting 'huefacet' to 'Gauss'
```

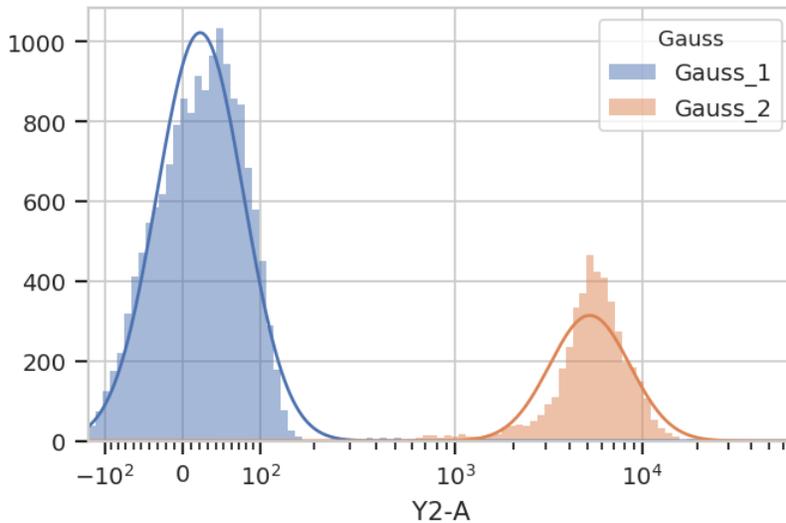


When you `apply()` the `GaussianMixtureModelOp`, it adds a new piece of metadata to each event in the data set: a condition whose name that's the same as the name of the operation (in this case, `Gauss`).

The values are `{Name}_{#}`, where `{Name}` is the name of the operation and `{#}` is which population had the highest posterior probability. So, in this example the events would be labeled `Gauss_1` or `Gauss_2`.

```
ex2.data.head()
```

We can use that new condition to plot or compute or otherwise operate on each of the populations separately:

```
flow.HistogramView(channel = "Y2-A",
                   scale = "logicle",
                   huefacet = "Gauss").plot(ex2)
```

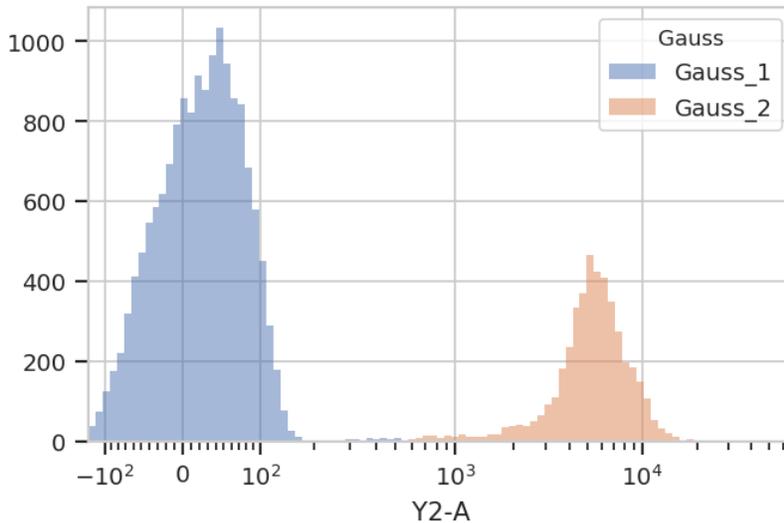

There's an important subtlety to notice here. In the plot above, we set the data scale on the `HistogramView`, but prior to that we passed `scale = {"Y2-A" : "logicle"}` to the `GaussianMixtureOp` operation. We did so in order to fit the gaussian model to the *scaled data*, as opposed to the raw data.

This is an example of a broader design goal: in order to enable more quantitative analysis, `cytoflow` does not re-scale the underlying data; rather, it transforms it before displaying it. Frequently it is useful to perform the same transformation before doing data-driven things, so many modules that have an `estimate()` function also allow you to specify a scale.

A 1-dimensional gaussian mixture model works well if the populations are well-separated. However, if they're closer together, you may only want to keep events that are "clearly" in one distribution or another. One way to accomplish this by passing a `sigma` parameter to `GaussianMixtureOp`. This doesn't change the behavior of `estimate()`, but when you `apply()` the operation it creates new conditions, one for each population. The conditions are named `{Name}_{#}`, where `{Name}` is the name of the operation and `{#}` is the index of the population. The value of the condition is `True` for an event if that event is within `sigma` standard deviations of the population mean.

```
g = flow.GaussianMixtureOp(name = "Gauss",
                          channels = ["Y2-A"],
                          scale = {"Y2-A" : "logicle"},
                          num_components = 2,
                          sigma = 1)

g.estimate(ex)
ex2 = g.apply(ex)

flow.HistogramView(channel = "Y2-A",
```

(continues on next page)



(continued from previous page)

```

huefacet = "Gauss_1",
scale = "logicle").plot(ex2)

flow.HistogramView(channel = "Y2-A",
huefacet = "Gauss_2",
scale = "logicle").plot(ex2)

```

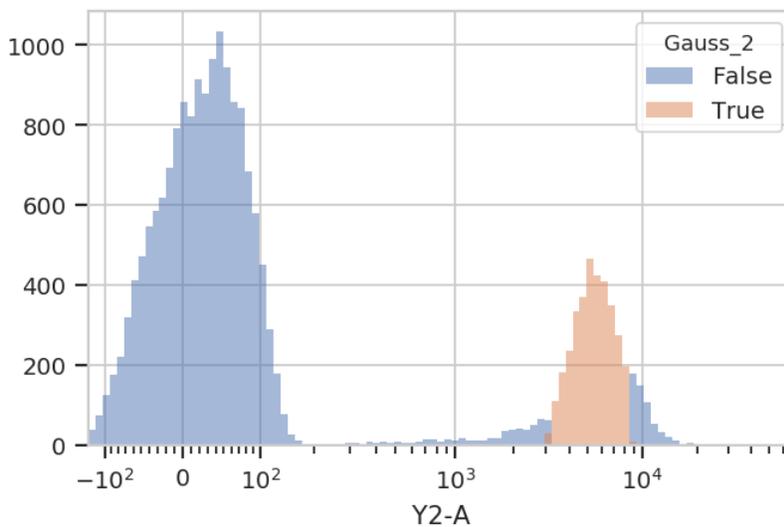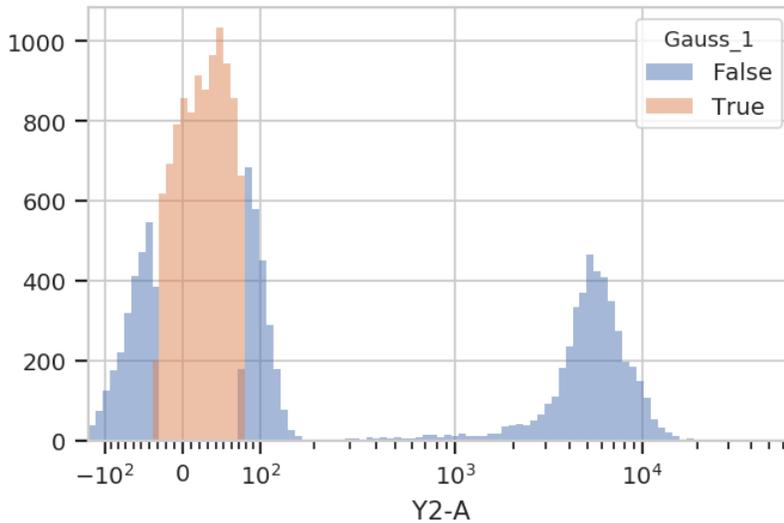

Sometimes, mixtures are very close and separating them is difficult. In such cases it may be better to filter the events based on the *posterior probability* that they are actually members of the components to which they were assigned. We can get this behavior by passing `posterior = True` as a parameter to `GaussianMixture1Dop`.

```

g = flow.GaussianMixtureOp(name = "Gauss",
channels = ["V2-A"],
scale = {"V2-A" : "logicle"},
num_components = 2,
posteriors = True)


```

(continues on next page)

(continued from previous page)

```
g.estimate(ex)
ex2 = g.apply(ex)
g.default_view().plot(ex2)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'Gauss'
```

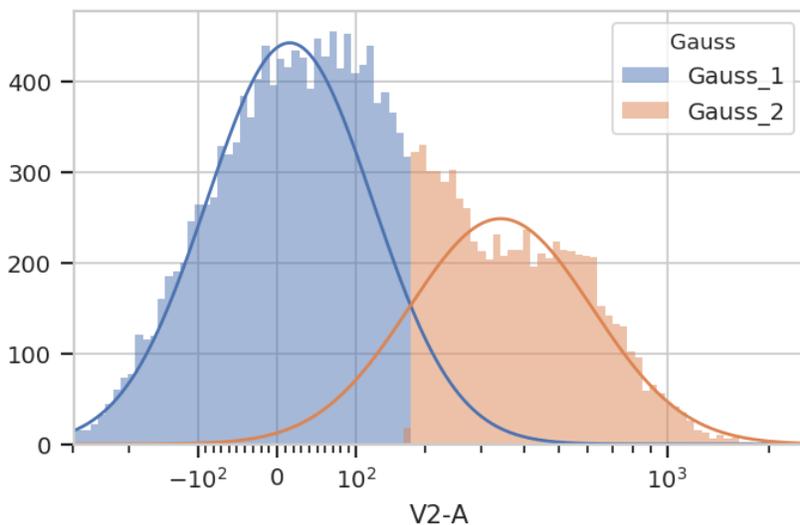


If `posteriors = True`, the `GaussianMixtureOp.apply()` adds another metadata column, `{Name}_{#}_Posterior`, that contains the posterior probability of each event in that component.

```
ex2.data.head()
```

We can use this second metadata column to filter out events with low posterior probabilities:

```
ex2.query("Gauss_1_posterior > 0.9 | Gauss_2_posterior > 0.9").data.head()
```


```
flow.HistogramView(channel = "V2-A",
                   huefacet = "Gauss",
                   scale = "logicle",
                   subset = "Gauss_1_posterior > 0.9 | Gauss_2_posterior > 0.9").
↳ plot(ex2)
```

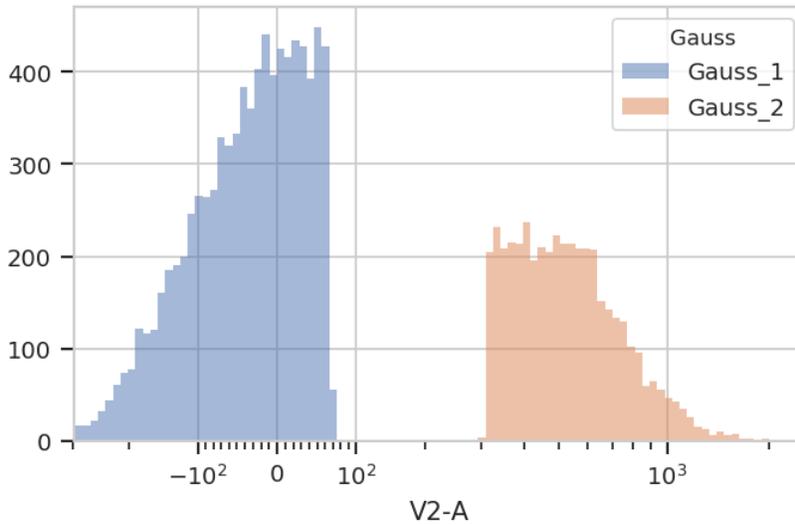

Finally, sometimes you don't want to use the same model parameters for your entire data set. Instead, you want to estimate different parameters for different subsets. `cytoflow`'s data-driven modules allow you to do so with a `by` parameter, which *aggregates* subsets before estimating model parameters. You pass by an array of metadata columns, and the module estimates a new model for each unique subset of those metadata.

For example, let's look at the V2-A channel faceted by `Dox`:

```
flow.HistogramView(channel = "V2-A",  
                   scale = "logicle",  
                   yfacet = "Dox").plot(ex)
```

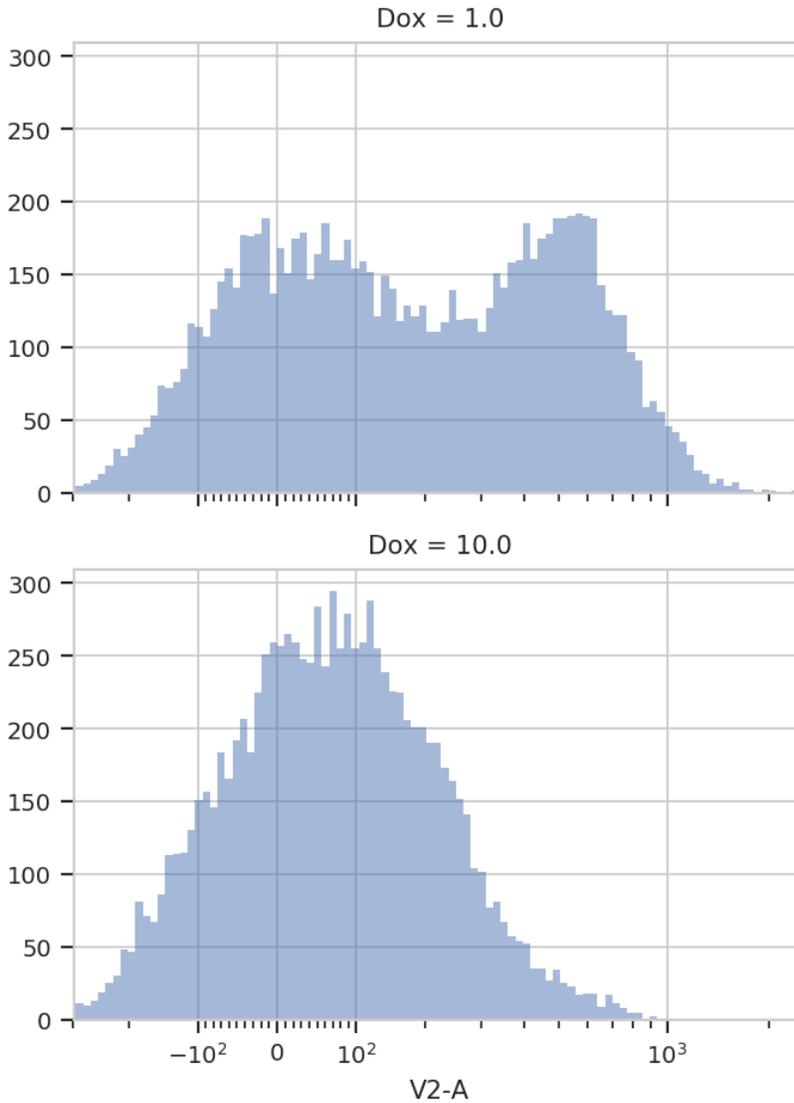


It's pretty clear that the `Dox == 1.0` condition and the `Dox == 10.0` condition are different; a single 2-component GMM won't fit both of them. So let's fit a model to each unique value of `Dox`. Note that `by` takes a *list* of metadata columns; you must pass it a list, even if there's only one element in the list.

```
g = flow.GaussianMixtureOp(name = "Gauss",
                           channels = ["V2-A"],
                           scale = {"V2-A" : "logicle"},
                           num_components = 2,
                           by = ["Dox"])

g.estimate(ex)
ex2 = g.apply(ex)
g.default_view(yfacet = "Dox").plot(ex2)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'Gauss'
```

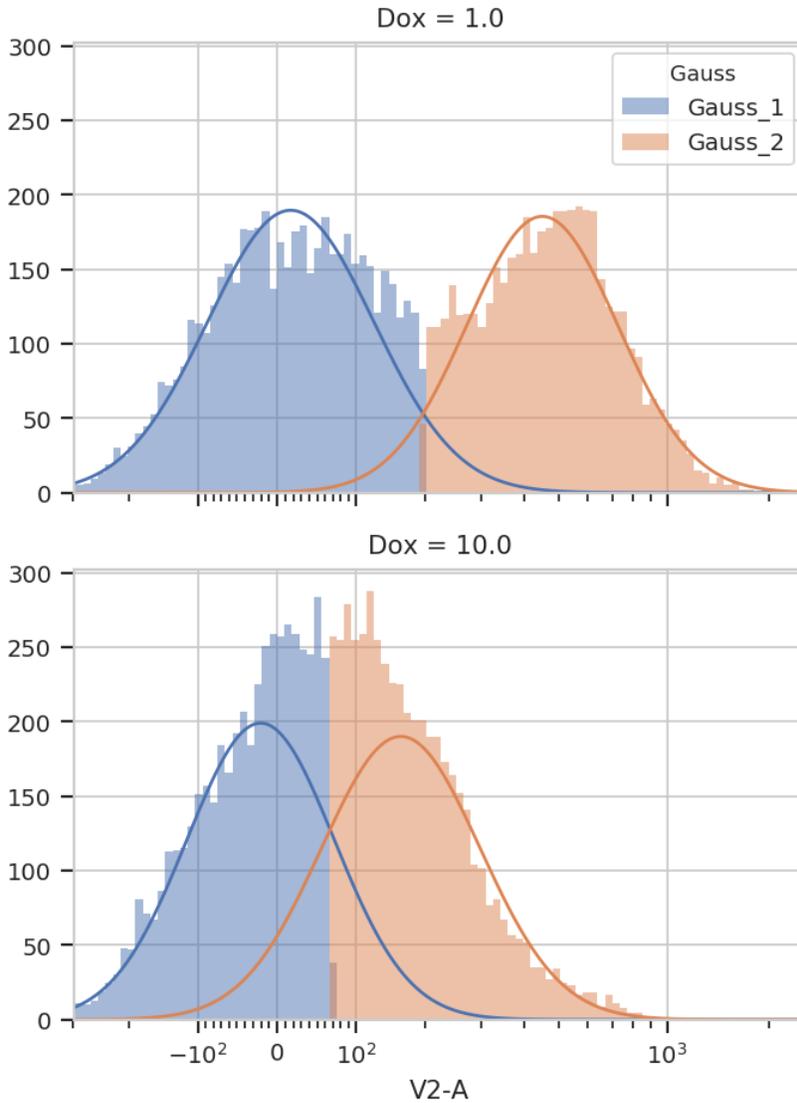

You can see that the models for the two subsets are substantially different.

It is important to note that while the estimated model parameters differ between subsets, it is not currently possible to specify different *module parameters* across subsets. For example, you can't specify that the `Dox = 1.0` subset have two GMM components, but `Dox == 10.0` have only one. If we could *estimate* the number of components, on the other hand, using (say) an AIC or BIC information criterion, then different subsets could have different numbers of components. For this kind of unsupervised algorithm, see the `FlowPeaksOp` example below.

2D Gaussian Mixture Models


Did you notice how we were setting the `channels` attribute of `GaussianMixtureOp` to a one-element list? That's because `GaussianMixtureOp` will work in any number of dimensions. Here's a similar workflow in two channels instead of one:

Basic usage, assigning each event to one of the mixture components: (the isolines in the `default_view()` are 1, 2 and 3 standard deviations away from the mean.)

```
g = flow.GaussianMixtureOp(name = "Gauss",
                           channels = ["V2-A", "Y2-A"],
                           scale = {"V2-A" : "logicle",
                                    "Y2-A" : "logicle"},
                           num_components = 2)

g.estimate(ex)
ex2 = g.apply(ex)
g.default_view().plot(ex2, alpha = 0.1)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳Setting 'huefacet' to 'Gauss'
```

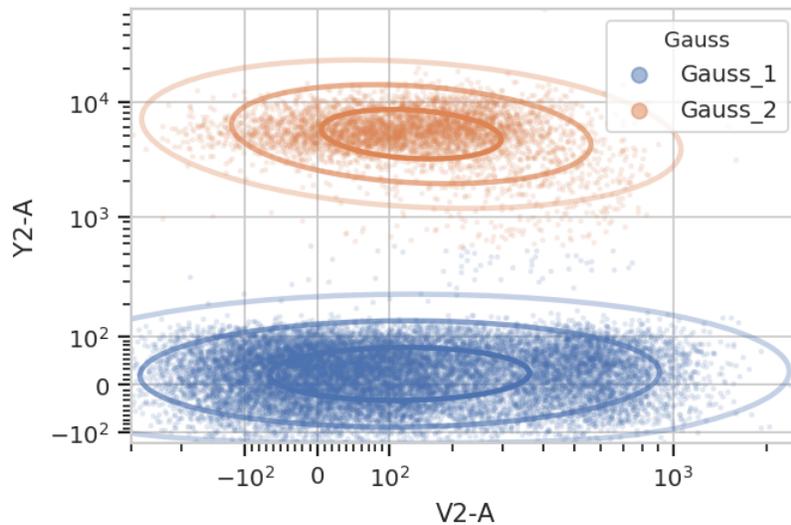

Subsetting based on standard deviation. Note: we use the Mahalanobis distance as a multivariate generalization of the number of standard deviations an event is from the mean of the multivariate gaussian.

```
g = flow.GaussianMixtureOp(name = "Gauss",
                           channels = ["V2-A", "Y2-A"],
                           scale = {"V2-A" : "logicle",
                                    "Y2-A" : "logicle"},
                           num_components = 2,
                           sigma = 2)

g.estimate(ex)
ex2 = g.apply(ex)
```



(continues on next page)

(continued from previous page)

```
g.default_view().plot(ex2, alpha = 0.1)

flow.ScatterplotView(xchannel = "V2-A",
                    ychannel = "Y2-A",
                    xscale = "logicle",
                    yscale = "logicle",
                    huefacet = "Gauss",
                    subset = "Gauss_1 == True | Gauss_2 == True").plot(ex2, alpha = 0.1)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'Gauss'
```

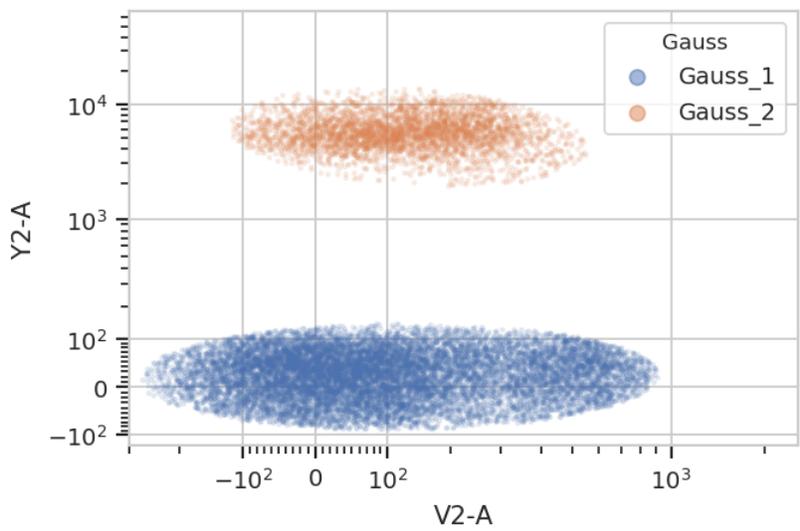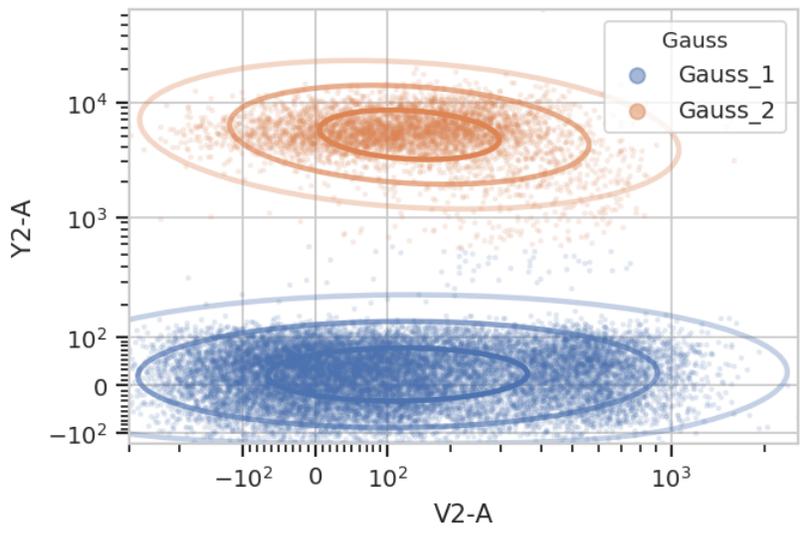

Gating based on posterior probabilities:

```
g = flow.GaussianMixtureOp(name = "Gauss",
```

(continues on next page)

(continued from previous page)

```

channels = ["V2-A", "Y2-A"],
scale = {"V2-A" : "logicle",
        "Y2-A" : "logicle"},
num_components = 2,
posteriors = True)

g.estimate(ex)
ex2 = g.apply(ex)

g.default_view().plot(ex2, alpha = 0.1)


flow.ScatterplotView(xchannel = "V2-A",
                    ychannel = "Y2-A",
                    xscale = "logicle",
                    yscale = "logicle",
                    huefacet = "Gauss",
                    subset = "Gauss_1_posterior > 0.99 | Gauss_2_posterior > 0.99").
↳plot(ex2)


```

```

/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳Setting 'huefacet' to 'Gauss'

```

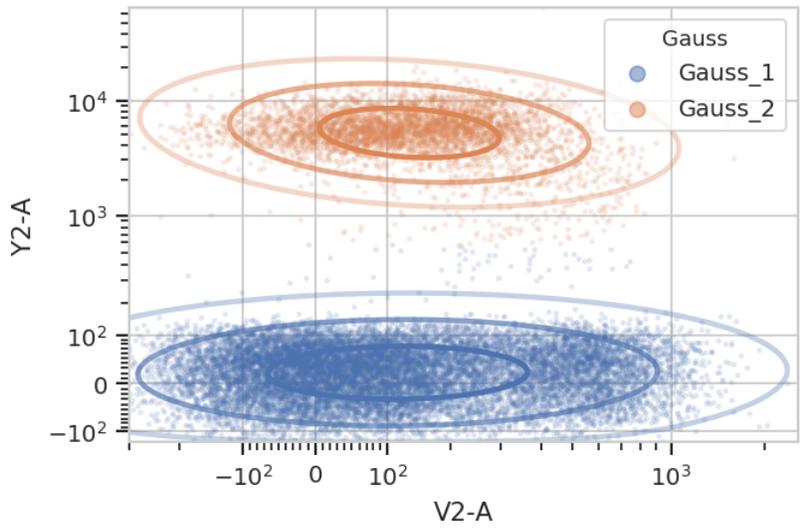

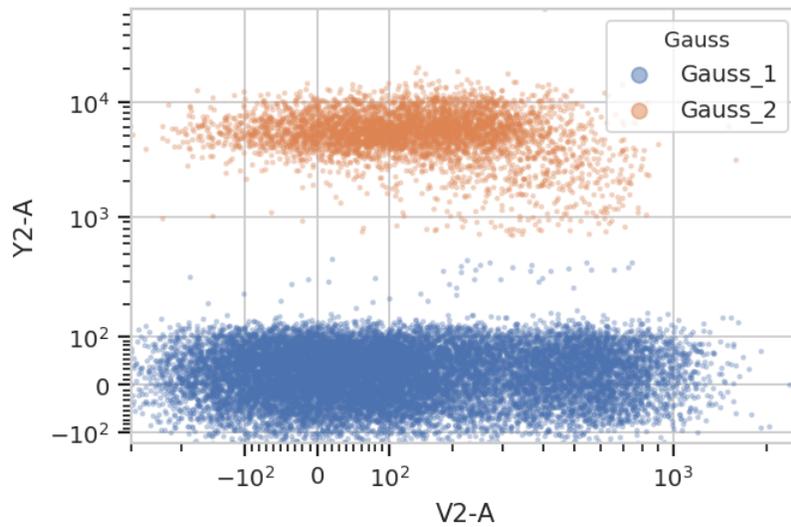


And multiple models for different subsets:

```
g = flow.GaussianMixtureOp(name = "Gauss",
                           channels = ["V2-A", "Y2-A"],
                           scale = {"V2-A" : "logicle",
                                    "Y2-A" : "logicle"},
                           num_components = 2,
                           by = ['Dox'])

g.estimate(ex)
ex2 = g.apply(ex)

g.default_view(yfacet = "Dox").plot(ex2, alpha = 0.1)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'Gauss'
```

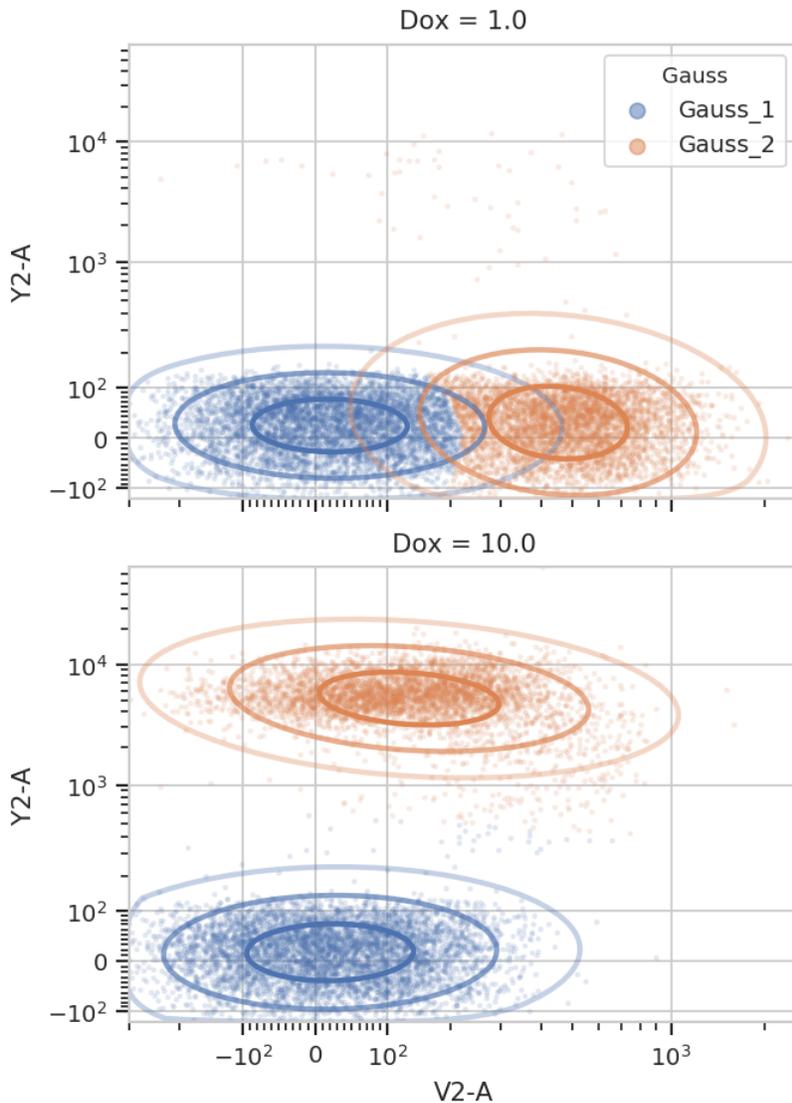


K-Means

A gaussian mixture model can find clustered data, but it works best on clusters that are shaped like gaussian distributions (duh.) K-means clustering is much more general. As with the GMM operation, cytoflow's K-means operation is N-dimensional and is parameterized very similarly. Here's a demonstration in 2D.

```
k = flow.KMeansOp(name = "KMeans",
                  channels = ["V2-A", "Y2-A"],
                  scale = {"V2-A" : "logicle",
                          "Y2-A" : "logicle"},
                  num_clusters = 2,
                  by = ['Dox'])

k.estimate(ex)
ex2 = k.apply(ex)
k.default_view(yfacet = "Dox").plot(ex2)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'KMeans'
```

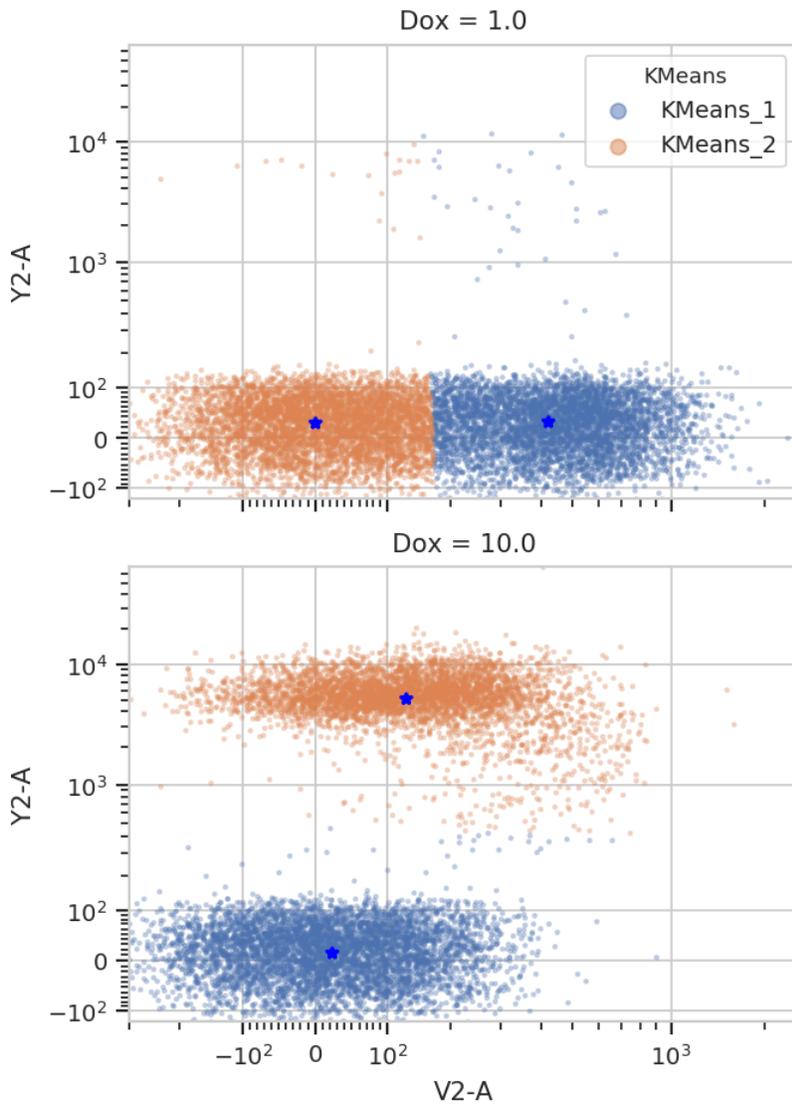

Note how the centroids are marked with blue stars. The locations of the centroids are also saved as a new statistic:

```
ex2.statistics
```


```
{('KMeans', 'centers'): Dox  Cluster  Channel
 1.0  1      V2-A      420.424332
      Y2-A      29.304036
      2      V2-A      1.276445
      Y2-A      26.576759
10.0  1      V2-A      23.096459
      Y2-A      14.118368
      2      V2-A      127.770348
      Y2-A      5113.999433
dtype: float64}
```

FlowPeaks

Sometimes you want to cluster a data set and K-means just doesn't work. (It generally works best when clusters are fairly compact.) In such cases, the unsupervised clustering algorithm `flowPeaks` may work better for you. For example, the following FCS file (of an E. coli experiment) shows clear separation between the cells (upper population) and the particulate matter in the media (lower population.)

```
ex = flow.ImportOp(tubes = [flow.Tube(file = 'data/ecoli.fcs')]).apply()
```

```
flow.ScatterplotView(xchannel = "FSC-A",
                    xscale = 'log',
                    ychannel = "FSC-H",
                    yscale = 'log').plot(ex)
```

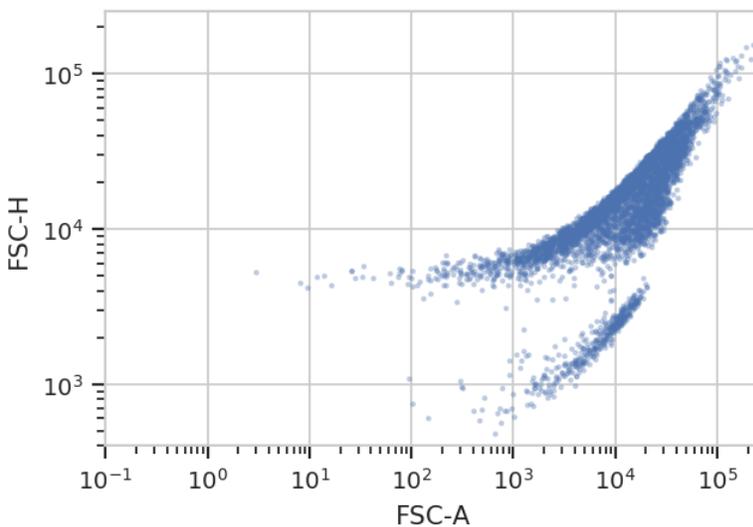


Unfortunately, K-means (even with more clusters than I want) isn't finding them properly.

```
k = flow.KMeansOp(name = "KMeans",
                 channels = ["FSC-A", "FSC-H"],
                 scale = {"FSC-A" : "log",
                         "FSC-H" : "log"},
                 num_clusters = 3)
```

```
k.estimate(ex)
ex2 = k.apply(ex)
k.default_view().plot(ex2)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'KMeans'
```

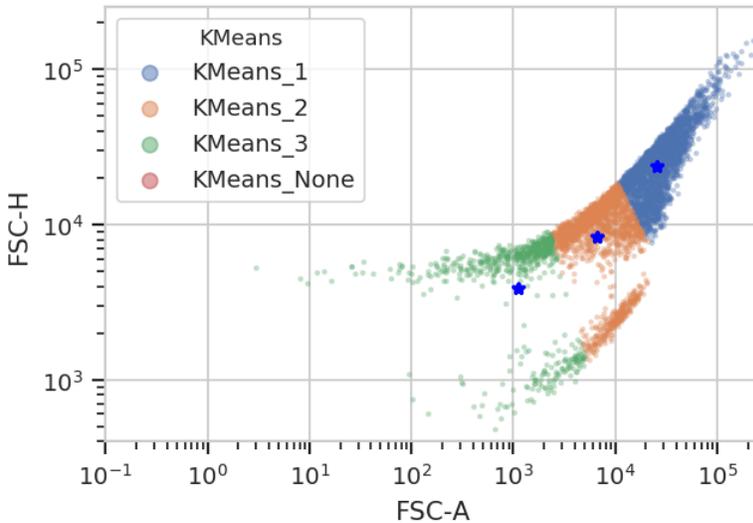



flowPeaks is an unsupervised learning strategy developed specifically for flow cytometry, and it works much better here. It can automatically determine the number of “natural” clusters in a data set. It is also much more computationally expensive – if you have a large data set, be prepared to wait for a while!

Another note – there are a number of hyperparameters for this method that can dramatically change how it operates. The defaults are good for many data sets; for the one below, I had to decrease `h0` from `1.0` to `0.5`. See the documentation for details.

```
fp = flow.FlowPeaksOp(name = "FP",
                      channels = ["FSC-A", "FSC-H"],
                      scale = {"FSC-A" : "log",
                              "FSC-H" : "log"},
                      h0 = 0.5)

fp.estimate(ex)
ex2 = fp.apply(ex)
fp.default_view().plot(ex2)
flow.ScatterplotView(xchannel = "FSC-A",
                    xscale = "log",
                    ychannel = "FSC-H",
                    yscale = "log",
                    huefacet = "FP").plot(ex2)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳Setting 'huefacet' to 'FP'
```

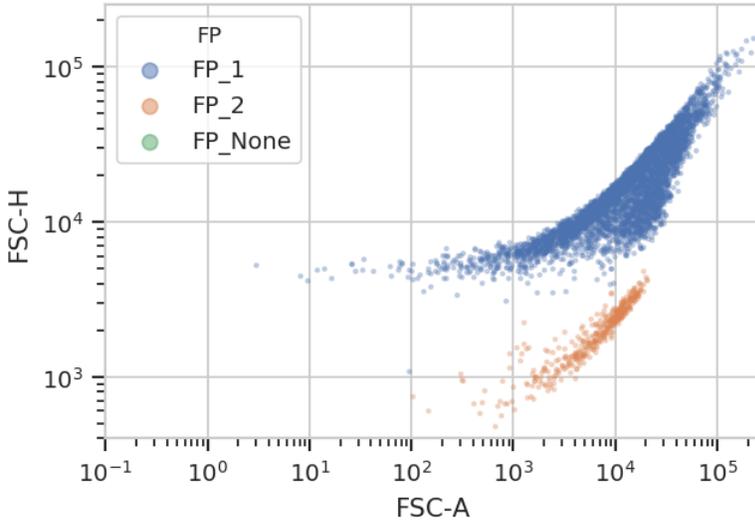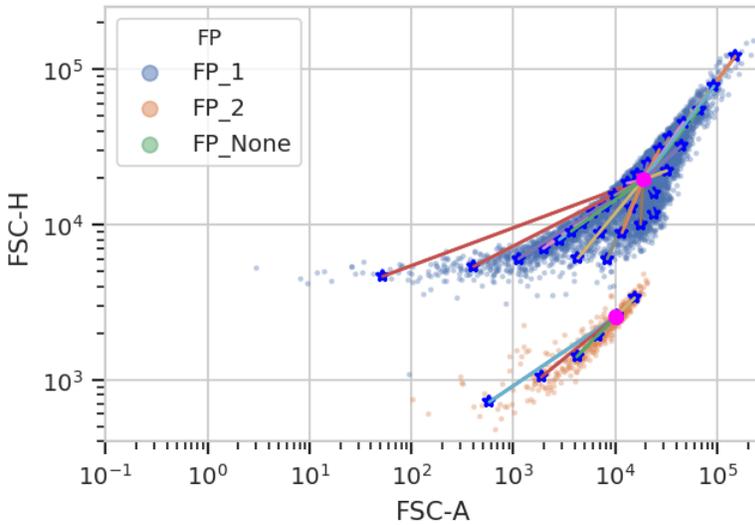

Statistics in cytoflow

One of the most powerful concepts in cytoflow is that it makes it easy to summarize your data, then track how those subsets change as your experimental variables change. This notebook demonstrates several different modules that create and plot statistics.

Set up the Jupyter matplotlib integration, and import the cytoflow module.

```
# in some buggy versions of the Jupyter notebook, this needs to be in its OWN CELL.
%matplotlib inline
```

```
import cytoflow as flow

# if your figures are too big or too small, you can scale them by changing matplotlib's
↳ DPI
```

(continues on next page)

(continued from previous page)

```
import matplotlib
matplotlib.rc('figure', dpi = 160)
```

We use the same data set as the **Yeast Dose Response** example notebook, with one variant: we load each tube three times, grabbing only 100 events from each.

```
inputs = {
    "Yeast_B1_B01.fcs" : 5.0,
    "Yeast_B2_B02.fcs" : 3.75,
    "Yeast_B3_B03.fcs" : 2.8125,
    "Yeast_B4_B04.fcs" : 2.109,
    "Yeast_B5_B05.fcs" : 1.5820,
    "Yeast_B6_B06.fcs" : 1.1865,
    "Yeast_B7_B07.fcs" : 0.8899,
    "Yeast_B8_B08.fcs" : 0.6674,
    "Yeast_B9_B09.fcs" : 0.5,
    "Yeast_B10_B10.fcs" : 0.3754,
    "Yeast_B11_B11.fcs" : 0.2816,
    "Yeast_B12_B12.fcs" : 0.2112,
    "Yeast_C1_C01.fcs" : 0.1584,
    "Yeast_C2_C02.fcs" : 0.1188,
    "Yeast_C3_C03.fcs" : 0.0892,
    "Yeast_C4_C04.fcs" : 0.0668,
    "Yeast_C5_C05.fcs" : 0.05,
    "Yeast_C6_C06.fcs" : 0.0376,
    "Yeast_C7_C07.fcs" : 0.0282,
    "Yeast_C8_C08.fcs" : 0.0211,
    "Yeast_C9_C09.fcs" : 0.0159
}

tubes = []
for filename, ip in inputs.items():
    tubes.append(flow.Tube(file = "data/" + filename, conditions = {'IP' : ip, 'Replicate
↪' : 1}))
    tubes.append(flow.Tube(file = "data/" + filename, conditions = {'IP' : ip, 'Replicate
↪' : 2}))
    tubes.append(flow.Tube(file = "data/" + filename, conditions = {'IP' : ip, 'Replicate
↪' : 3}))

ex = flow.ImportOp(conditions = {'IP' : "float", "Replicate" : "int"},
                    tubes = tubes,
                    events = 100).apply()
```

In *cytoflow*, a *statistic* is a value that summarizes something about some data. *cytoflow* makes it easy to compute statistics for various subsets. For example, if we expect the geometric mean of FITC-A channel to change as the IP variable changes, we can compute the geometric mean of the FITC-A channel of each different IP condition with the `ChannelStatisticOp` operation:

```
op = flow.ChannelStatisticOp(name = "ByIP",
                             by = ["IP"],
                             channel = "FITC-A",
```

(continues on next page)

(continued from previous page)

```

                                function = flow.geom_mean)
ex2 = op.apply(ex)

```

This operation splits the data set by different values of IP, then applies the function `flow.geom_mean` to the FITC-A channel in each subset. The result is stored in the `statistics` attribute of an `Experiment`. The `statistics` attribute is a dictionary. The keys are tuples, where the first element in the tuple is the name of the operation that created the statistic, and the second element is specific to the operation:

```
ex2.statistics.keys()
```

```
dict_keys([('ByIP', 'geom_mean')])
```

The `Statistics1DOp` operation sets the second element of the tuple to the function name. (You can override this by setting `Statistics1DOp.statistic_name`; this is useful if `function` is a lambda function.)

The value of each entry in `Experiment.statistics` is a `pandas.Series`. The series index is all the subsets for which the statistic was computed, and the contents are the values of the statistic itself.

```
ex2.statistics[('ByIP', 'geom_mean')]
```

```

IP
0.0159    106.760464
0.0211    145.242912
0.0282    152.152489
0.0376    194.243504
0.0500    240.788179
0.0668    413.218589
0.0892    670.798705
0.1188    971.121453
0.1584   1345.581190
0.2112   1203.016726
0.2816   1463.993731
0.3754   1733.702533
0.5000   1871.968527
0.6674   2218.190937
0.8899   2324.630935
1.1865   2486.103908
1.5820   2456.024025
2.1090   2326.584475
2.8125   2350.038991
3.7500   2676.275419
5.0000   2269.741514
Name: ByIP : geom_mean, dtype: float64

```

We can also specify multiple variables to break data set into. In the example above, `Statistics1DOp` lumps all events with the same value of IP together, but each amount of IP actually has three values of `Replicate` as well. Let's apply `geom_mean` to each unique combination of IP and `Replicate`:

```

op = flow.ChannelStatisticOp(name = "ByIP",
                             by = ["IP", "Replicate"],
                             channel = "FITC-A",
                             function = flow.geom_mean)

```

(continues on next page)

(continued from previous page)

```
ex2 = op.apply(ex)
ex2.statistics[("ByIP", "geom_mean")][0:12]
```

```
IP      Replicate
0.0159  1          109.294581
         2          106.956580
         3          104.099598
0.0211  1          144.564288
         2          147.712897
         3          143.484638
0.0282  1          155.558697
         2          156.508248
         3          144.679053
0.0376  1          182.294878
         2          206.147145
         3          195.023849
Name: ByIP : geom_mean, dtype: float64
```

Note that the `pandas.Series` now has a `MultiIndex`: there are values for each unique combination of IP and Replicate.

Now that we have computed a statistic, we can plot it with one of the statistics views. We can use a bar chart:

```
flow.BarChartView(statistic = ("ByIP", "geom_mean"),
                  variable = "IP").plot(ex2)
```

```
-----
CytoflowViewError                                Traceback (most recent call last)
<ipython-input-8-4102c59fbf66> in <module>
      1 flow.BarChartView(statistic = ("ByIP", "geom_mean"),
----> 2                          variable = "IP").plot(ex2)

~/src/cytoflow/cytoflow/views/bar_chart.py in plot(self, experiment, plot_name, **kwargs)
    129         """
    130
--> 131         super().plot(experiment, plot_name, **kwargs)
    132
    133         def _grid_plot(self, experiment, grid, **kwargs):

~/src/cytoflow/cytoflow/views/base_views.py in plot(self, experiment, plot_name,
-> **kwargs)
    859             plot_name = plot_name,
    860             scale = scale,
--> 861             **kwargs)
    862
    863         def _make_data(self, experiment):
```

(continues on next page)


(continued from previous page)

```
~/src/cytoflow/cytoflow/views/base_views.py in plot(self, experiment, data, plot_name,
↳ **kwargs)
    712                 "plot variables or the plot name. "
    713                 "Possible plot names: {}"
--> 714                 .format(unused_names, list(groupby.
↳ groups.keys()))
    715
    716                 if plot_name not in set(groupby.groups.keys()):

CytoflowViewError: ('plot_name', "You must use facets ['Replicate'] in either the plot_
↳ variables or the plot name. Possible plot names: [1, 2, 3]")
```


Oops! We forgot to specify how to plot the different Replicates. Each index of a statistic must be specified as either a variable or a facet of the plot, like so:

```
flow.BarChartView(Statistic = ("ByIP", "geom_mean"),
                  variable = "IP",
                  huefacet = "Replicate").plot(ex2)
```

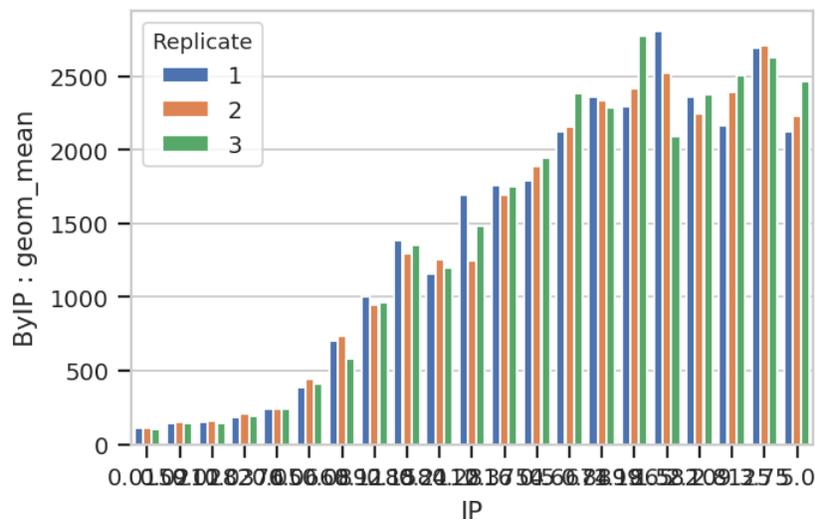


A quick aside - sometimes you get ugly axes because of overlapping labels. In this case, we want a wider plot. While we can directly specify the height of a plot, we can't directly specify its width, only its aspect ratio (the ratio of the width to the height.) cytoflow defaults to 1.5; in this case, let's widen it out to 4. If this results in a plot that's wider than your browser, the Jupyter notebook will scale it down for you.

```
flow.BarChartView(Statistic = ("ByIP", "geom_mean"),
                  variable = "IP",
                  huefacet = "Replicate").plot(ex2, aspect = 4)
```

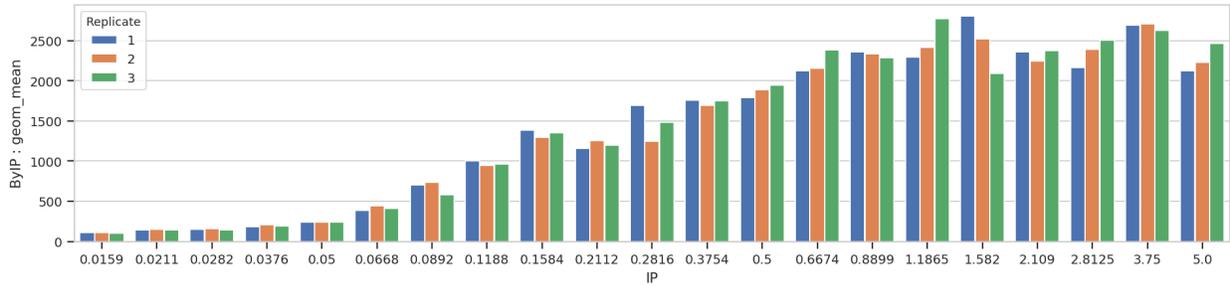

Bar charts are really best for categorical variables (with a modest number of categories.) Let's do a line chart instead:

```
flow.Stats1DView(
    statistic = ("ByIP", "geom_mean"),
    variable = "IP",
    variable_scale = 'log',
    huefacet = "Replicate").plot(ex2)
```

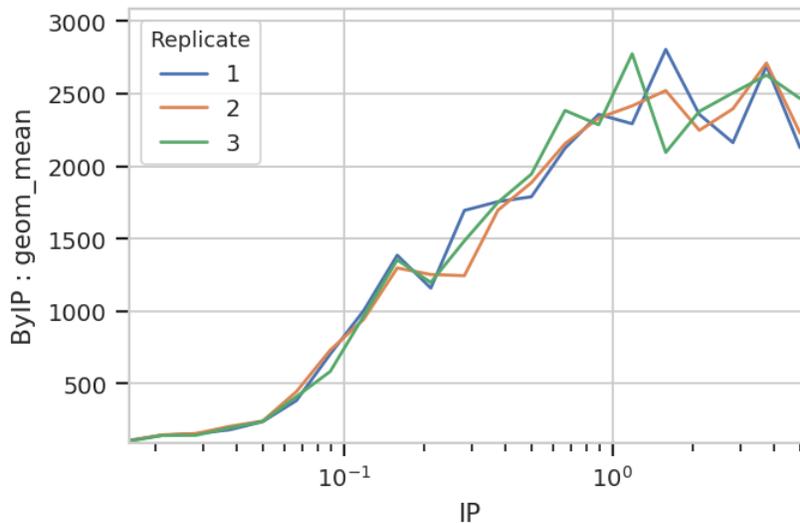

Statistics views can also plot error bars; the error bars must *also* be a statistic, and they must have the same indices as the “main” statistic. For example, let's plot the geometric mean and geometric standard deviation of each IP subset:

```
ex2 = flow.ChannelStatisticOp(
    name = "ByIP",
    by = ["IP"],
    channel = "FITC-A",
    function = flow.geom_mean).apply(ex)

# While an arithmetic SD is usually plotted plus-or-minus the arithmetic mean,
# a *geometric* SD is usually plotted (on a log scale!) multiplied-or-divided by the
# geometric mean. the function geom_sd_range is a convenience function that does this.

ex3 = flow.ChannelStatisticOp(
    name = "ByIP",
    by = ['IP'],
    channel = "FITC-A",
    function = flow.geom_sd_range).apply(ex2)

flow.Stats1DView(
    statistic = ("ByIP", "geom_mean"),
```


(continues on next page)

(continued from previous page)

```

variable = "IP",
variable_scale = "log",
scale = "log",
error_statistic = ("ByIP", "geom_sd_range")).plot(ex3)

```

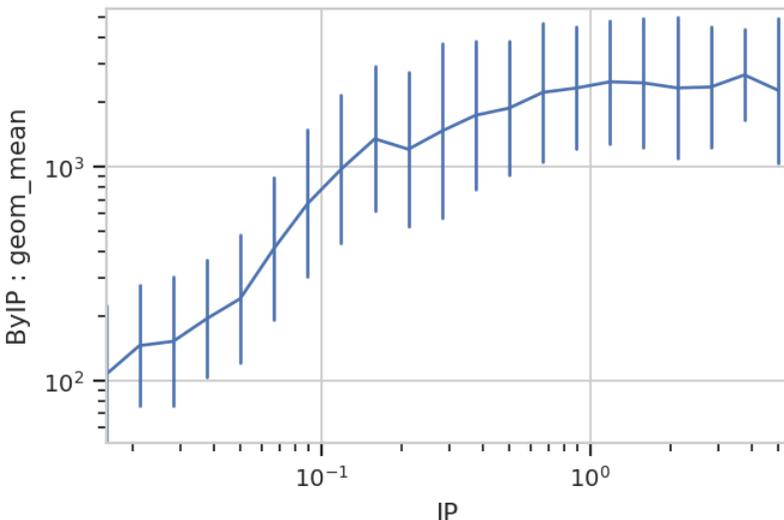

The plot above shows how one statistic varies (on the Y axis) as a variable changes on the X axis. We can also plot two statistics against each other. For example, we can ask if the geometric standard deviation varies as the geometric mean changes:


```

ex2 = flow.ChannelStatisticOp(name = "ByIP",
                             by = ["IP"],
                             channel = "FITC-A",
                             function = flow.geom_mean).apply(ex)

ex3 = flow.ChannelStatisticOp(name = "ByIP",
                             by = ['IP'],
                             channel = "FITC-A",
                             function = flow.geom_sd).apply(ex2)

flow.Stats2DView(variable = "IP",
                 xstatistic = ("ByIP", "geom_mean"),
                 ystatistic = ("ByIP", "geom_sd"),
                 xscale = "log").plot(ex3)

```

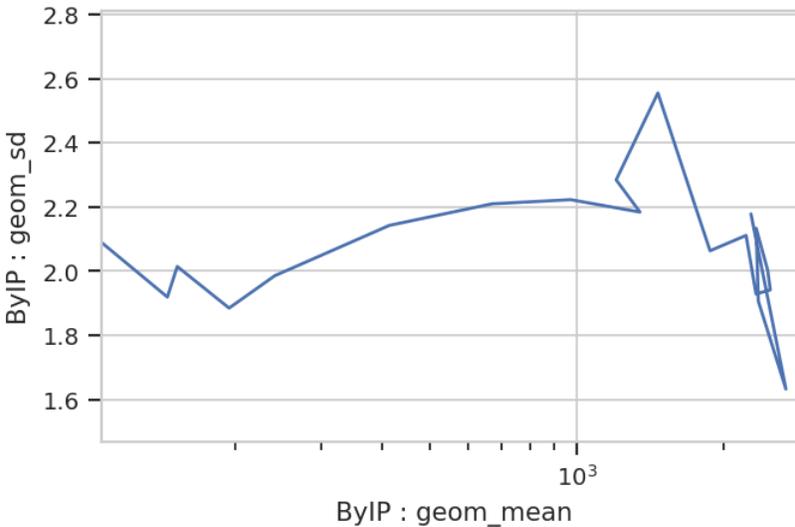

Nope, guess not. See the **TASBE Calibrated Flow Cytometry** notebook for more examples of 1D and 2D statistics views.

Transforming statistics

In addition to making statistics by applying summary functions to data, you can also apply functions to other statistics. For example, a common question is “What percentage of my events are in a particular gate?” We could, for instance, ask what percentage of events are above 1000 in the FITC-A channel, and how that varies by amount of IP. We start by defining a *threshold* gate with `ThresholdOp`:

```
thresh = flow.ThresholdOp(name = "Above1000",
                          channel = "FITC-A",
                          threshold = 1000)
ex2 = thresh.apply(ex)
```

Now, the Experiment has a condition named `Above1000` that is True or False depending on whether that event’s FITC-A channel is greater than 1000. Next, we compute the total number of events in each subset with a unique combination of `Above1000` and IP:

```
ex3 = flow.ChannelStatisticOp(name = "Above1000",
                              by = ["Above1000", "IP"],
                              channel = "FITC-A",
                              function = len).apply(ex2)
ex3.statistics[("Above1000", "len")]
```

| Above1000 | IP | |
|-----------|--------|-----|
| False | 0.0159 | 299 |
| | 0.0211 | 299 |
| | 0.0282 | 299 |
| | 0.0376 | 296 |
| | 0.0500 | 299 |
| | 0.0668 | 262 |

(continues on next page)

(continued from previous page)

```

0.0892    200
0.1188    143
0.1584     76
0.2112    101
0.2816     76
0.3754     57
0.5000     53
0.6674     32
0.8899     19
1.1865     23
1.5820     21
2.1090     34
2.8125     25
3.7500     10
5.0000     29
True      0.0159     1
          0.0211     1
          0.0282     1
          0.0376     4
          0.0500     1
          0.0668    38
          0.0892   100
          0.1188   157
          0.1584   224
          0.2112   199
          0.2816   224
          0.3754   243
          0.5000   247
          0.6674   268
          0.8899   281
          1.1865   277
          1.5820   279
          2.1090   266
          2.8125   275
          3.7500   290
          5.0000   271
Name: Above1000 : len, dtype: int64

```

And now we compute the proportion of `Above1000 == True` for each value of IP. `TransformStatisticOp` applies a function to subsets of a statistic; in this case, we're applying a lambda function to convert each IP subset from length into proportion.

```

import pandas as pd

ex4 = flow.TransformStatisticOp(name = "Above1000",
                               statistic = ("Above1000", "len"),
                               by = ["IP"],
                               function = lambda a: pd.Series(a / a.sum()),
                               statistic_name = "proportion").apply(ex3)


ex4.statistics[("Above1000", "proportion")][0:8]

```

```
Above1000 IP
False      0.0159    0.996667
           0.0211    0.996667
           0.0282    0.996667
           0.0376    0.986667
           0.0500    0.996667
           0.0668    0.873333
           0.0892    0.666667
           0.1188    0.476667
Name: Above1000 : len, dtype: float64
```

Now we can plot the new statistic.


```
flow.Stats1DView(
    statistic = ("Above1000", "proportion"),
    variable = "IP",
    variable_scale = "log",
    huefacet = "Above1000").plot(ex4)
```

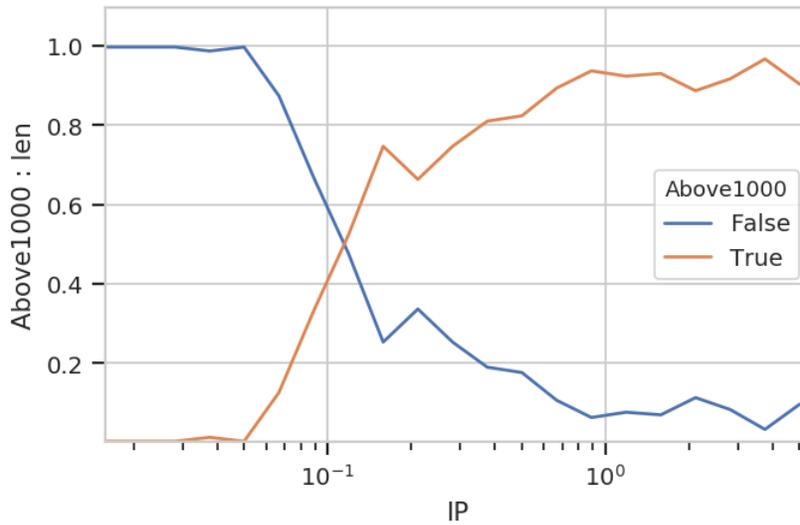

Note that by default we get all the values in the statistic; in this case, it's both the proportion that's above 1000 (True) and the proportion that is below it (False). We can pass a subset attribute to the Stats1DView to look at just one or the other.

```
flow.Stats1DView(
    statistic = ("Above1000", "proportion"),
    variable = "IP",
    variable_scale = "log",
    subset = "Above1000 == True").plot(ex4)
```

```
/home/brian/src/cytoflow/cytoflow/views/base_views.py:751: CytoflowViewWarning: Only one
↳ value for level Above1000; dropping it.
```

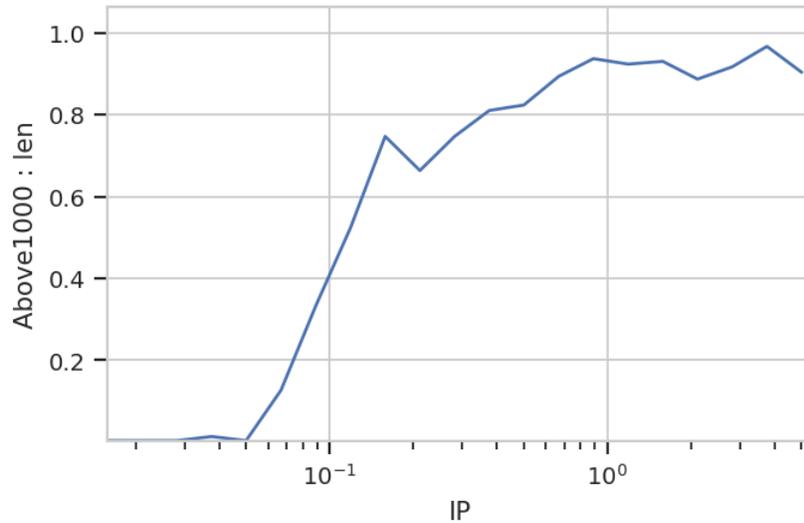

Note the warning. Because the index level `Above1000` is always `True` in this subset, it gets dropped from the index. Note also that we don't have to specify it as a variable or facet anywhere.

Statistics from data-driven modules

One of the most exciting aspects of statistics in `cytoflow` is that other data-driven modules can add them to an `Experiment`, too. For example, the `GaussianMixtureOp` adds several statistics for each component of the mixture model it fits, containing the mean, standard deviation and proportion of observations in each component:

```
inputs = {
  "Yeast_B1_B01.fcs" : 5.0,
  "Yeast_B2_B02.fcs" : 3.75,
  "Yeast_B3_B03.fcs" : 2.8125,
  "Yeast_B4_B04.fcs" : 2.109,
  "Yeast_B5_B05.fcs" : 1.5820,
  "Yeast_B6_B06.fcs" : 1.1865,
  "Yeast_B7_B07.fcs" : 0.8899,
  "Yeast_B8_B08.fcs" : 0.6674,
  "Yeast_B9_B09.fcs" : 0.5,
  "Yeast_B10_B10.fcs" : 0.3754,
  "Yeast_B11_B11.fcs" : 0.2816,
  "Yeast_B12_B12.fcs" : 0.2112,
  "Yeast_C1_C01.fcs" : 0.1584,
  "Yeast_C2_C02.fcs" : 0.1188,
  "Yeast_C3_C03.fcs" : 0.0892,
  "Yeast_C4_C04.fcs" : 0.0668,
  "Yeast_C5_C05.fcs" : 0.05,
  "Yeast_C6_C06.fcs" : 0.0376,
  "Yeast_C7_C07.fcs" : 0.0282,
  "Yeast_C8_C08.fcs" : 0.0211,
  "Yeast_C9_C09.fcs" : 0.0159
}
```

(continues on next page)


(continued from previous page)

```
tubes = []
for filename, ip in inputs.items():
    tubes.append(flow.Tube(file = "data/" + filename, conditions = {'IP' : ip}))

ex = flow.ImportOp(conditions = {'IP' : "float"},
                  tubes = tubes).apply()
```

```
op = flow.GaussianMixtureOp(name = "Gauss",
                           channels = ["FITC-A"],
                           scale = {"FITC-A" : 'logicle'},
                           by = ["IP"],
                           num_components = 1)

op.estimate(ex)
ex2 = op.apply(ex)
op.default_view(xfacet = "IP").plot(ex2, col_wrap = 3)
```

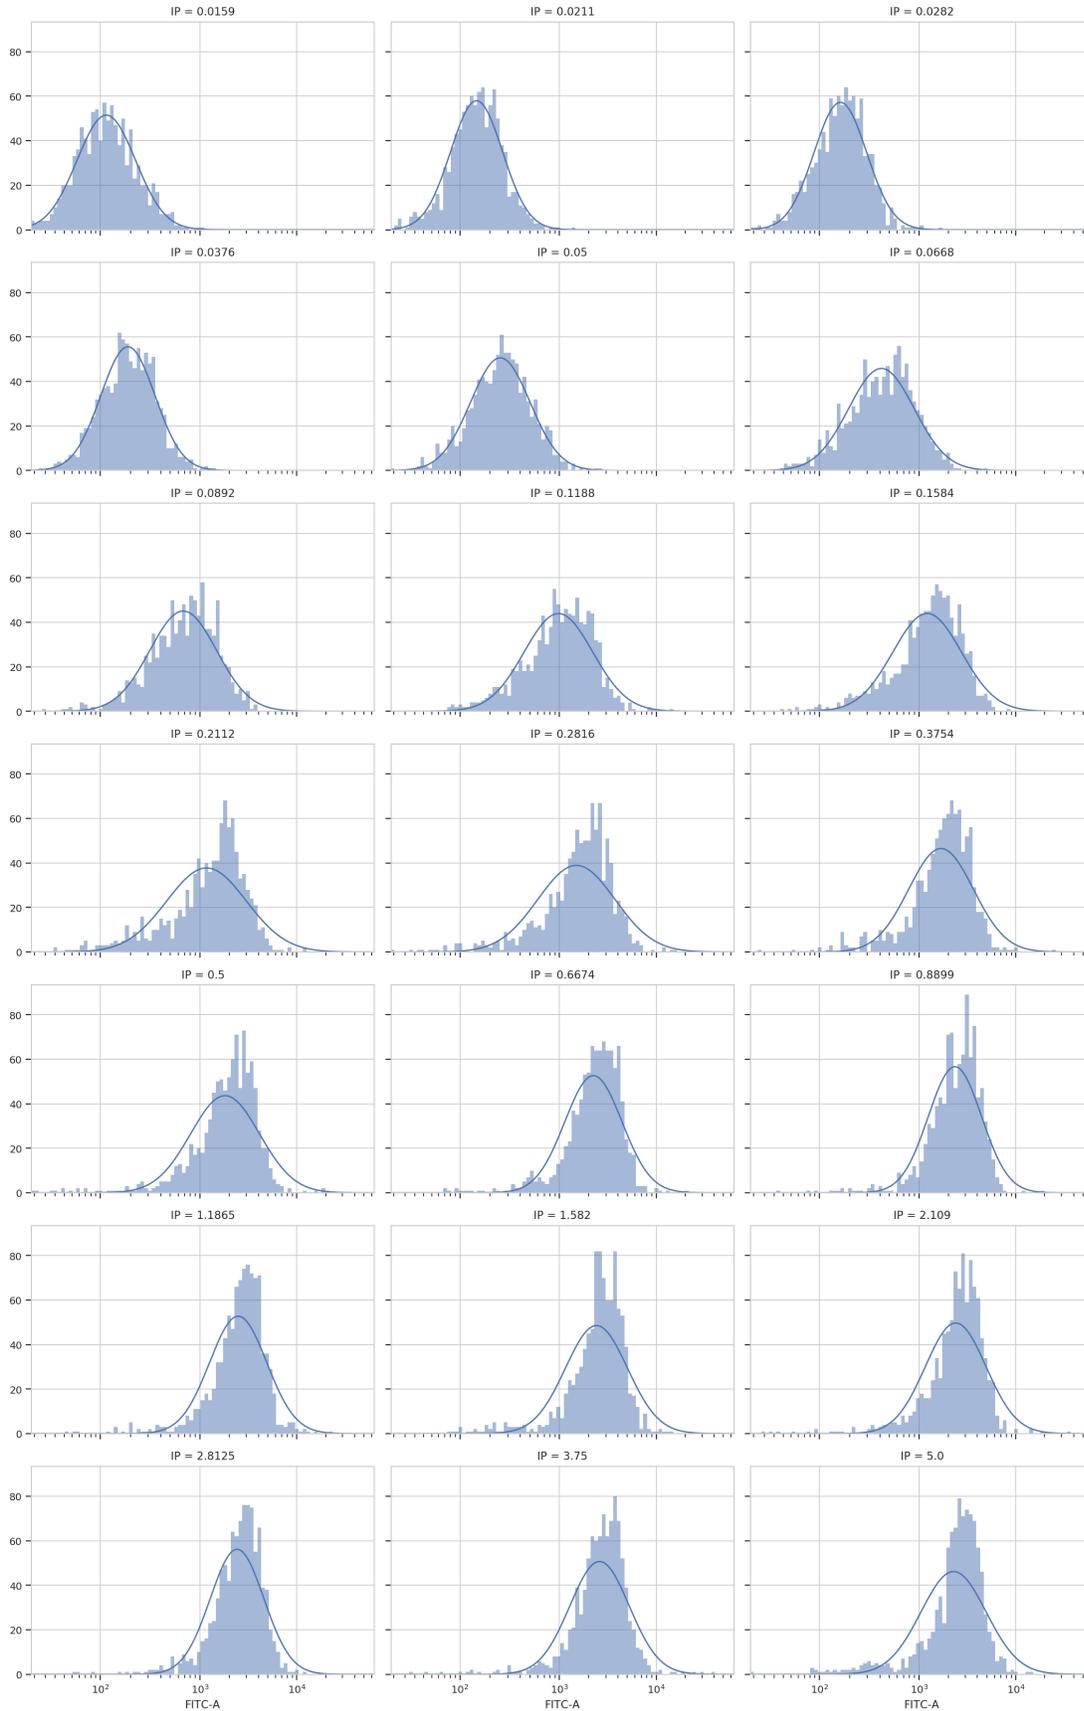

```
ex2.statistics.keys()
```

```
dict_keys([('Gauss', 'mean'), ('Gauss', 'sigma'), ('Gauss', 'interval')])
```

```
ex2.statistics[("Gauss", 'mean')]
```

| IP | Component | Channel | |
|--------|-----------|---------|-------------|
| 0.0159 | 1 | FITC-A | 114.867593 |
| 0.0211 | 1 | FITC-A | 146.760865 |
| 0.0282 | 1 | FITC-A | 161.831942 |
| 0.0376 | 1 | FITC-A | 188.241811 |
| 0.0500 | 1 | FITC-A | 252.533895 |
| 0.0668 | 1 | FITC-A | 415.359435 |
| 0.0892 | 1 | FITC-A | 675.335896 |
| 0.1188 | 1 | FITC-A | 976.574632 |
| 0.1584 | 1 | FITC-A | 1212.127491 |
| 0.2112 | 1 | FITC-A | 1169.357113 |
| 0.2816 | 1 | FITC-A | 1491.938821 |
| 0.3754 | 1 | FITC-A | 1683.611714 |
| 0.5000 | 1 | FITC-A | 1812.128528 |
| 0.6674 | 1 | FITC-A | 2233.860489 |
| 0.8899 | 1 | FITC-A | 2341.076532 |
| 1.1865 | 1 | FITC-A | 2474.300525 |
| 1.5820 | 1 | FITC-A | 2401.710245 |
| 2.1090 | 1 | FITC-A | 2383.285932 |
| 2.8125 | 1 | FITC-A | 2411.122019 |
| 3.7500 | 1 | FITC-A | 2584.007182 |
| 5.0000 | 1 | FITC-A | 2265.732416 |

Name: Gauss : mean, dtype: float64

```
ex2.statistics[("Gauss", 'interval')]
```

| IP | Component | Channel | |
|--------|-----------|---------|--|
| 0.0159 | 1 | FITC-A | (56.94459866110697, 224.1783518669721) |
| 0.0211 | 1 | FITC-A | (80.36534657785384, 265.7842407147643) |
| 0.0282 | 1 | FITC-A | (88.27508462690886, 295.4218184072569) |
| 0.0376 | 1 | FITC-A | (101.18497543667104, 350.4182139054138) |
| 0.0500 | 1 | FITC-A | (127.95204222704295, 502.06564927968213) |
| 0.0668 | 1 | FITC-A | (195.2351392293184, 894.5712089072493) |
| 0.0892 | 1 | FITC-A | (310.61832832262314, 1484.6617729462246) |
| 0.1188 | 1 | FITC-A | (437.6150673574889, 2200.017570462604) |
| 0.1584 | 1 | FITC-A | (542.1024597233911, 2732.4410991530126) |
| 0.2112 | 1 | FITC-A | (459.2685949581729, 3011.3302773605374) |
| 0.2816 | 1 | FITC-A | (601.1140138003304, 3736.1069195737864) |
| 0.3754 | 1 | FITC-A | (784.0312198090705, 3635.8937650247603) |
| 0.5000 | 1 | FITC-A | (802.3248292365361, 4117.843046843494) |
| 0.6674 | 1 | FITC-A | (1134.2954460750368, 4414.715040960627) |
| 0.8899 | 1 | FITC-A | (1246.7333023687233, 4408.716470275269) |
| 1.1865 | 1 | FITC-A | (1256.858649306397, 4886.57964348989) |
| 1.5820 | 1 | FITC-A | (1151.7297619649949, 5027.751372108821) |
| 2.1090 | 1 | FITC-A | (1161.983752683322, 4906.469724482335) |


(continues on next page)

(continued from previous page)

```
2.8125 1 FITC-A (1276.8361886540924, 4566.1348774856815)
3.7500 1 FITC-A (1277.3600413588333, 5244.721547284582)
5.0000 1 FITC-A (1046.8993940886585, 4925.741101423763)
Name: Gauss : interval, dtype: object
```

```
flow.Stats1DView(statistic = ("Gauss", "mean"),
                 variable = "IP",
                 variable_scale = "log",
                 scale = "log",
                 error_statistic = ("Gauss", "interval")).plot(ex2, shade_error = True)
```

```
/home/brian/src/cytoflow/cytoflow/views/base_views.py:751: CytoflowViewWarning: Only one
↳value for level Component; dropping it.
/home/brian/src/cytoflow/cytoflow/views/base_views.py:751: CytoflowViewWarning: Only one
↳value for level Channel; dropping it.
```

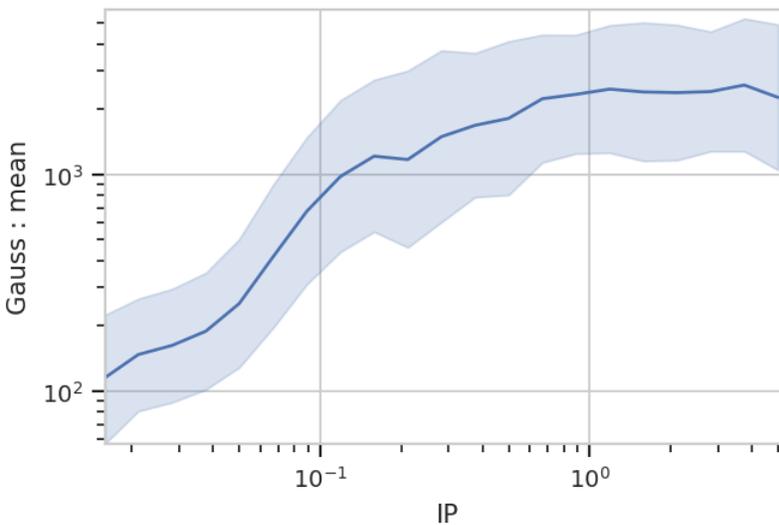

Yeast Dosage-Response Curve

This is data from a real experiment, measuring the dose response of an engineered yeast line to isopentyladenine, or IP. The yeast is engineered with a basic GFP reporter, and GFP fluorescence is measured after 12 hours, at which time we expect the cells to be at steady-state.

(Reference: [Chen et al, Nature Biotech 2005](#))

Set up the Jupyter matplotlib integration, and import the cytoflow module.

```
# in some buggy versions of the Jupyter notebook, this needs to be in its OWN CELL.
%matplotlib inline
```

```
import cytoflow as flow
```

(continues on next page)

(continued from previous page)

```
# if your figures are too big or too small, you can scale them by changing matplotlib's
↳DPI
import matplotlib
matplotlib.rc('figure', dpi = 160)
```

First we set up the Experiment. This is primarily the mapping between the flow data (wells on a microtitre plate, here) and the metadata (experimental conditions, in this case the IP concentration.)

For this experiment, I did a serial dilution with three dilutions per log. Note that I specify that this metadata is of type `log`, which is represented internally as a `numpy` type `float`, but is plotted on a log scale when we go to visualize it.

Also note that, in order to keep the size of the source distribution manageable, I've only included 1000 events from each tube in the example files. The actual data set has 30,000 events from each, which gives a much prettier dose-response curve!

```
inputs = {
    "Yeast_B1_B01.fcs" : 5.0,
    "Yeast_B2_B02.fcs" : 3.75,
    "Yeast_B3_B03.fcs" : 2.8125,
    "Yeast_B4_B04.fcs" : 2.109,
    "Yeast_B5_B05.fcs" : 1.5820,
    "Yeast_B6_B06.fcs" : 1.1865,
    "Yeast_B7_B07.fcs" : 0.8899,
    "Yeast_B8_B08.fcs" : 0.6674,
    "Yeast_B9_B09.fcs" : 0.5,
    "Yeast_B10_B10.fcs" : 0.3754,
    "Yeast_B11_B11.fcs" : 0.2816,
    "Yeast_B12_B12.fcs" : 0.2112,
    "Yeast_C1_C01.fcs" : 0.1584,
    "Yeast_C2_C02.fcs" : 0.1188,
    "Yeast_C3_C03.fcs" : 0.0892,
    "Yeast_C4_C04.fcs" : 0.0668,
    "Yeast_C5_C05.fcs" : 0.05,
    "Yeast_C6_C06.fcs" : 0.0376,
    "Yeast_C7_C07.fcs" : 0.0282,
    "Yeast_C8_C08.fcs" : 0.0211,
    "Yeast_C9_C09.fcs" : 0.0159
}

tubes = []
for filename, ip in inputs.items():
    tubes.append(flow.Tube(file = "data/" + filename, conditions = {'IP' : ip}))

ex = flow.ImportOp(conditions = {'IP' : "float"},
                  tubes = tubes).apply()
```

Set `logicle` as the default plot scale:


```
flow.set_default_scale("logicle")
```

The first step in most cytometry workflows is to filter out debris and aggregates based on morphological parameters (the forward- and side-scatter measurements.) So let's have a look at the FSC-A and SSC-A channels.

Remember, because we're not specifying otherwise, this is a plot of *all of the data* in the experiment, not a single tube!

```
flow.ScatterplotView(xchannel = "FSC-A",
                    ychannel = "SSC-A").plot(ex, alpha = 0.05)
```

```
/home/brian/src/cytoflow/cytoflow/utility/logicle_scale.py:307: CytoflowWarning: Channel
↳ FSC-A doesn't have any negative data. Try a log transform instead.
```

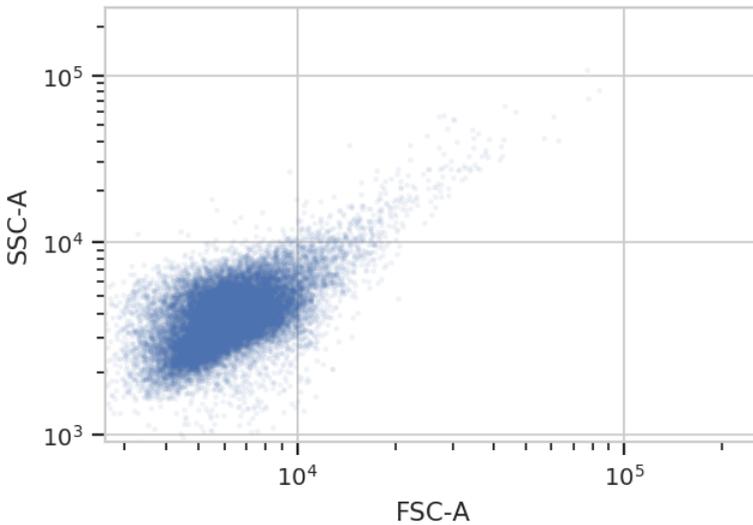

Oops! The biexponential scale is really intended for channels that have events around 0, with some negative events; let's use a log scale on both FSC-A and SSC-A in the future. (The fluorescence channels should be fine on a logicle scale, though.)


Because this is yeast growing in log phase on a drum roller, the distributions in FSC-A and SSC-A are pretty tight. Let's fit a 2D gaussian to it, and gate out any data that is more than three standard deviations from the mean.

```
g = flow.GaussianMixtureOp(name = "Debris_Filter",
                          channels = ["FSC-A", "SSC-A"],
                          scale = {'FSC-A' : 'log',
                                   'SSC-A' : 'log'},
                          num_components = 1,
                          sigma = 3)

g.estimate(ex)
g.default_view().plot(ex, alpha = 0.05)

ex2 = g.apply(ex)
```

```
/home/brian/src/cytoflow/cytoflow/operations/gaussian.py:528: RuntimeWarning: invalid
↳ value encountered in less_equal
```

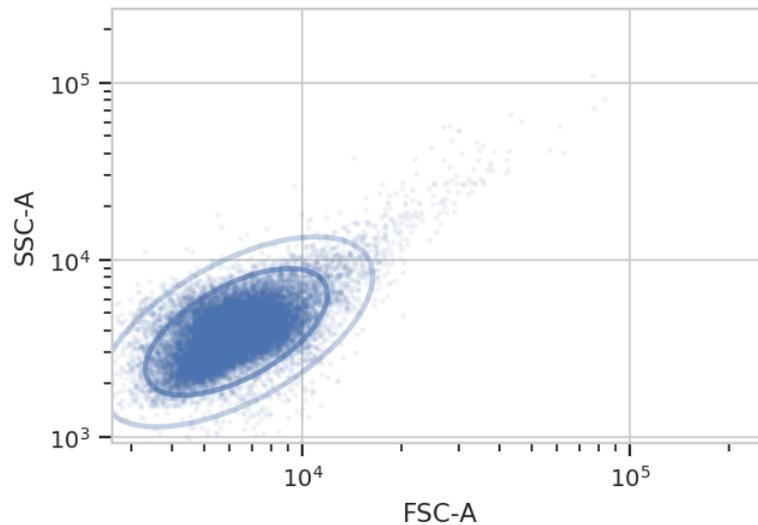


One thing to note: if you've read the Machine Learning notebook, you know that a `GaussianMixtureOp` adds categorical metadata as well. In this case, we have a new boolean column named `Debris_Filter_1`, which is `True` if the event is less than `sigma` from the centroid and `False` otherwise.

```
ex2.data.head()
```


Now, let's look at the FITC-A channel, which is the one we're interested in. First of all, just check histograms of the FITC-A distribution in each tube. Make sure to set the `subset` trait to only include the events that aren't debris!

```
flow.HistogramView(channel = "FITC-A",  
                   xfacet = "IP",  
                   subset = "Debris_Filter_1 == True").plot(ex2, col_wrap = 3)
```

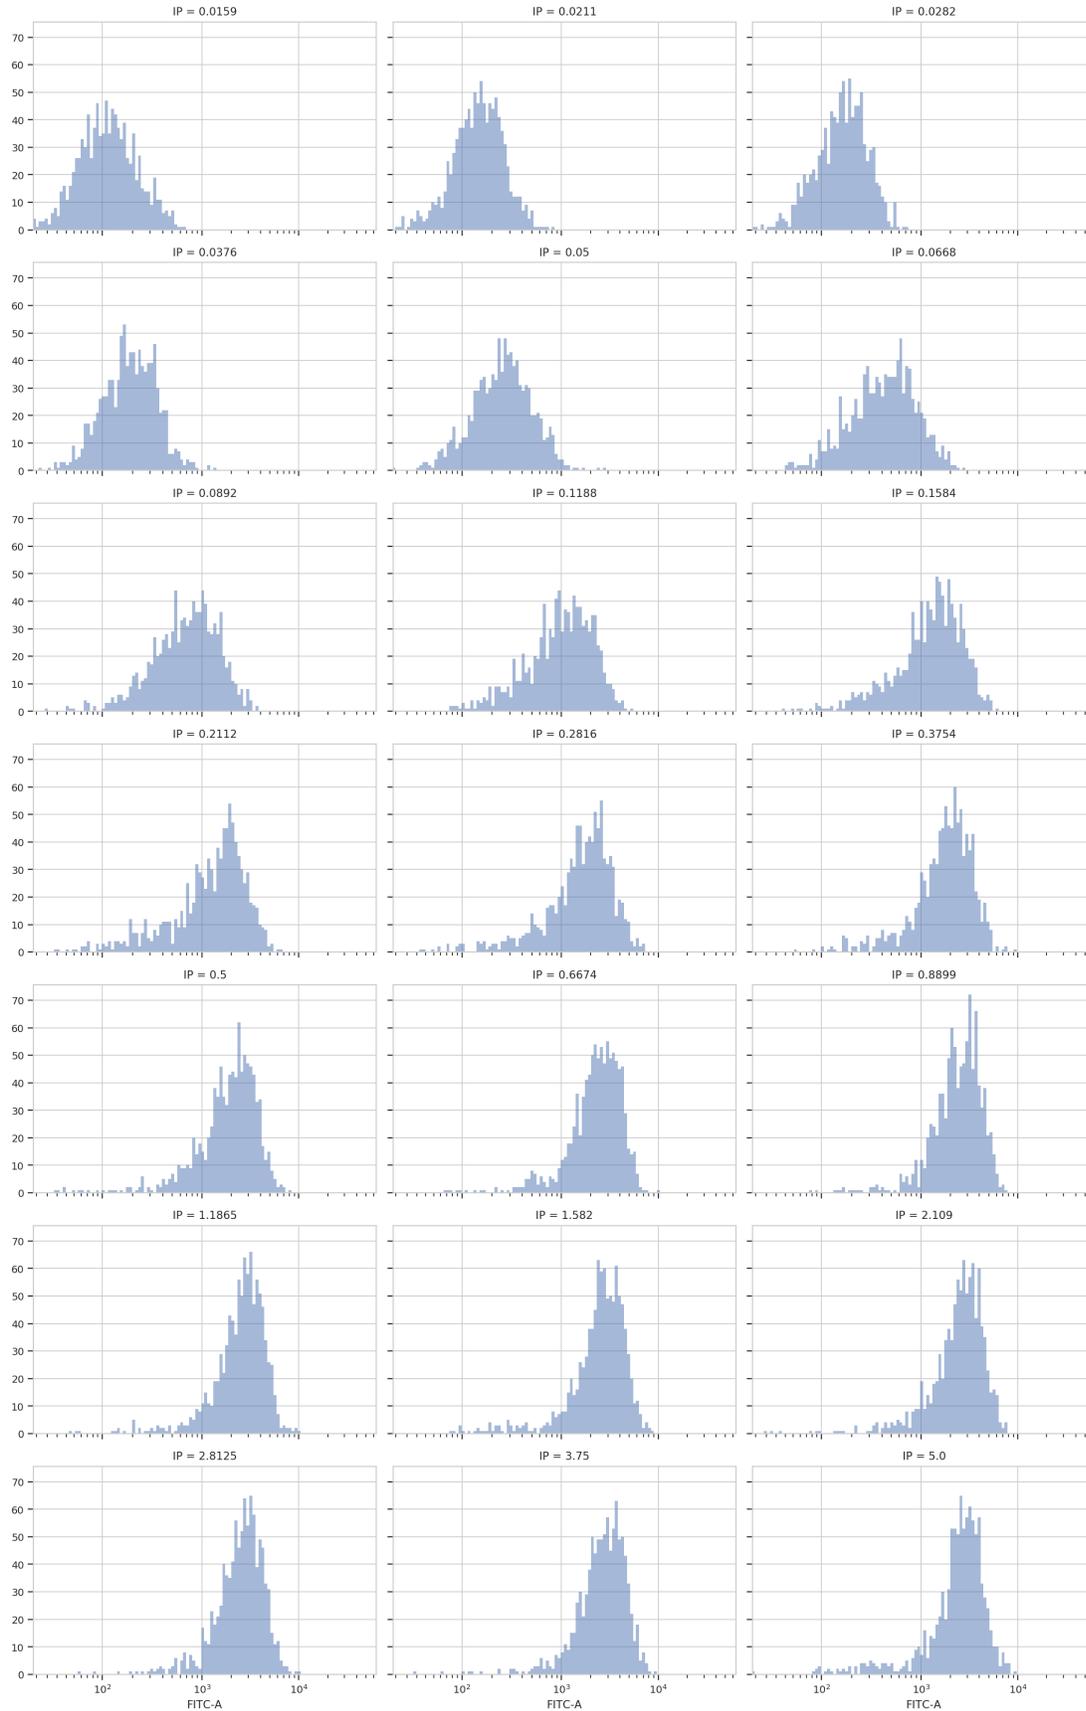


Sure enough, looking at the plots, it's clear that the histogram peak moves to the right as the IP concentration increases. We can get a more compact representation of the same data with one of cytoflow's fancier plots, a violin plot:

```
flow.ViolinPlotView(variable = "IP",
                    channel = "FITC-A",
                    scale = "logicle",
                    subset = "Debris_Filter_1 == True").plot(ex2)
```

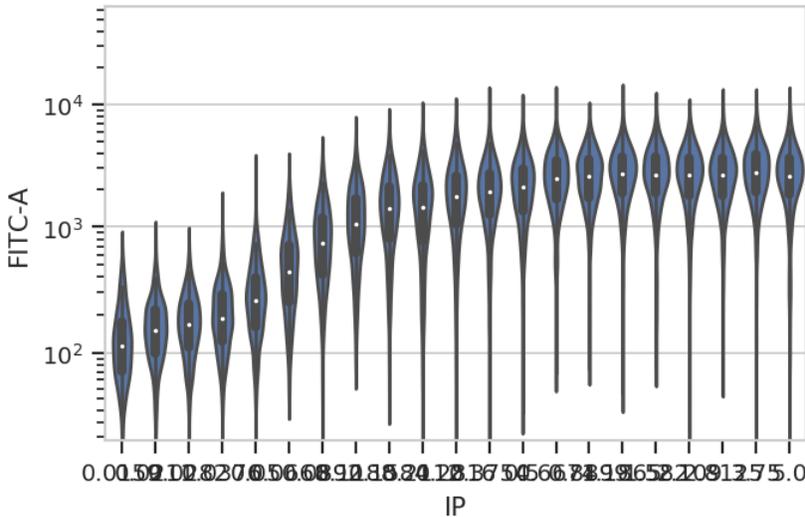

A quick aside - sometimes you get ugly axes because of overlapping labels. In this case, we want a wider plot. While we can directly specify the height of a plot, we can't directly specify its width, only its aspect ratio (the ratio of the width to the height.) cytoflow defaults to 1.5; in this case, let's widen it out to 4. If this results in a plot that's wider than your browser, the Jupyter notebook will scale it down for you.

```
flow.ViolinPlotView(variable = "IP",
                    channel = "FITC-A",
                    scale = "logicle",
                    subset = "Debris_Filter_1 == True").plot(ex2, aspect = 4)
```

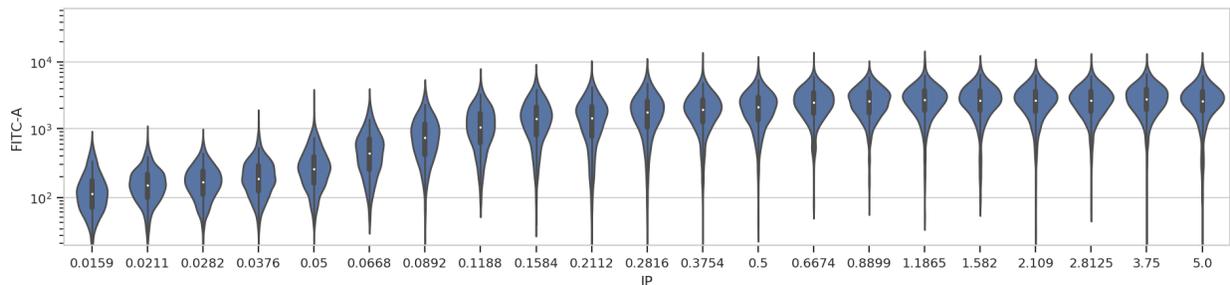

At least on my screen that's better, but a violin plot is really best for categorical data (with a modest number of categories.) Instead, let's make a true dose-response curve. The ChannelStatisticsOp divides the data into subsets by different values of the IP variable and applies flow.geom_mean to each subset. Then, the Stats1DView plots that statistic.


(Confused? Have a look at the Statistics example notebook for a more in-depth discussion.)

```

ex3 = flow.ChannelStatisticOp(name = "ByIP",
                             channel = "FITC-A",
                             by = ["IP"],
                             function = flow.geom_mean,
                             subset = "Debris_Filter_1 == True").apply(ex2)

flow.Stats1DView(statistic = ("ByIP", "geom_mean"),
                 scale = "log",
                 variable = "IP",
                 variable_scale = "log").plot(ex3)

```

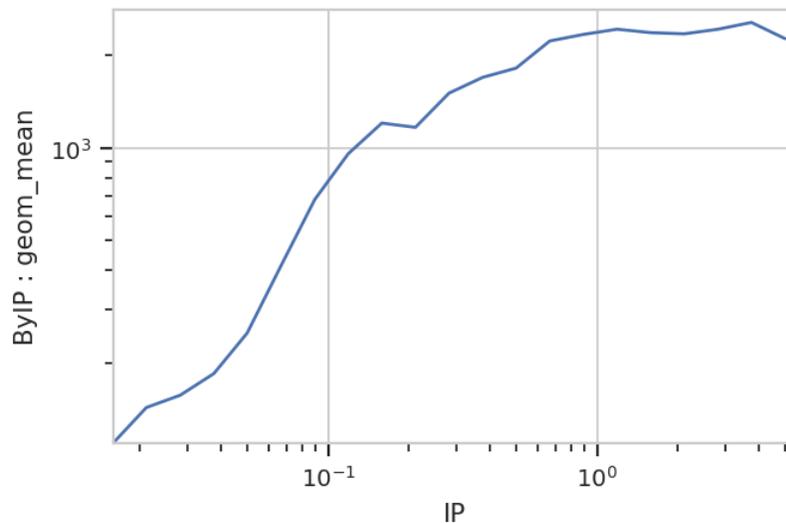

And of course, because the underlying data is just a `pandas.DataFrame`, we can manipulate it with the rest of the Scientific Python ecosystem. Here, we get the compute the geometric means using `pandas.DataFrame.groupby`.

```

(ex2.data.query("Debris_Filter_1 == True")[['IP', 'FITC-A']]
 .groupby('IP')
 .agg(flow.geom_mean))

```

Examples

These examples illustrate some of the advanced capabilities of the *cytoflow* library. They are generated from the example notebooks and data sets in the `cytoflow-$VERSION-examples-advanced.zip` file, available from the Releases tab at the [project homepage](#). Feel free to fire up a [Jupyter notebook](#) and follow along!

Yeast induction timecourse

This notebook demonstrates a real-world multidimensional analysis example. The yeast strain responds to the small molecule isopentyladenine (IP) by expressing green fluorescent protein (GFP), which we measure using a flow cytometer in the FITC-A channel.

This experiment was designed to determine the dynamics of the IP → GFP response. So, we induced several yeast cultures with different amounts of IP, then took readings on the cytometer every 30 minutes for 8 hours. The outline of the experimental setup is below.

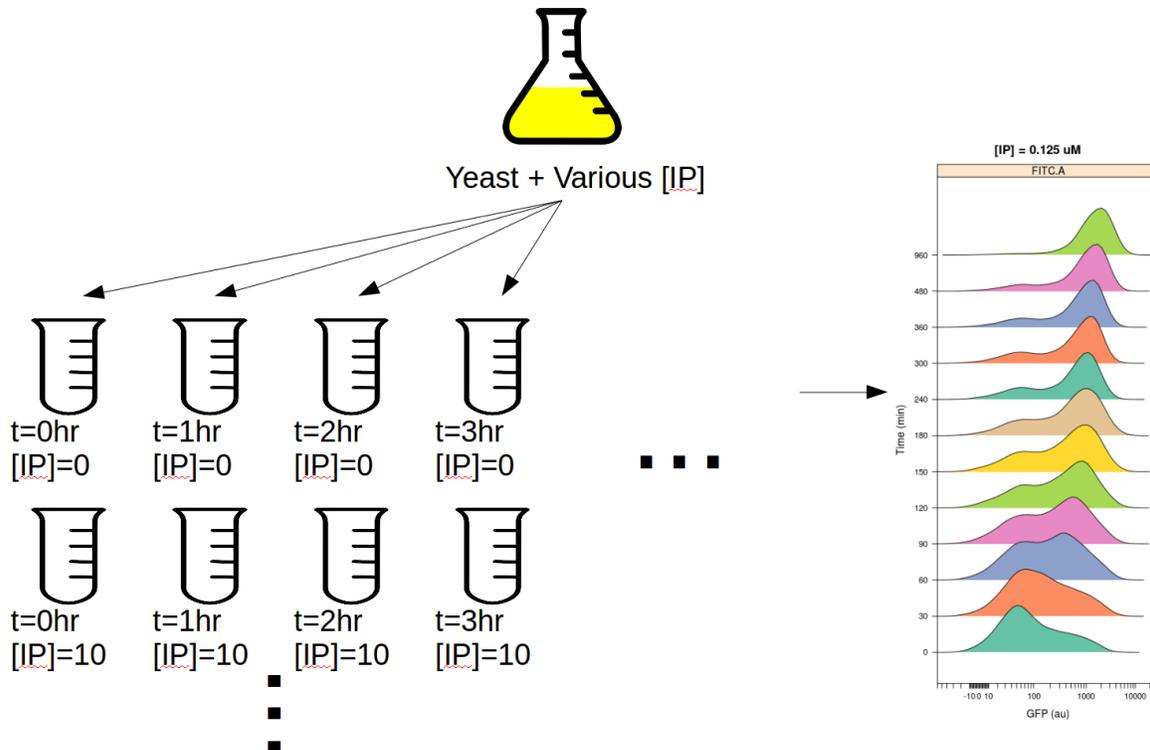


Fig. 3: Induction experiment

Setup the notebook's matplotlib integration, and import cytoflow.

```
# in some buggy versions of the Jupyter notebook, this needs to be in its OWN CELL.
%matplotlib inline
```

```
import cytoflow as flow

# if your figures are too big or too small, you can scale them by changing matplotlib's
↳ DPI
import matplotlib
matplotlib.rc('figure', dpi = 160)
```

In this instance, the amount of IP and the time is actually encoded in the FCS filename. So, use `glob` to iterate through all the FCS files in the directory and re extract the IP concentration and timepoint from the filename.

NB. Many FCS files already have a channel named “Time” which encodes how long since the acquisition start an event was collected. So it is inadvisable to use “Time” as a condition name.

```
# In this instance, I have encoded the experimental conditions in the filenames.
# So, use glob to get the files and parse the conditions back out.

import glob, re
tubes = []


for f in glob.glob("*.fcs"):
    r = re.search("IP_(.*?)_Minutes_(.*?)\.fcs", f)
    ip = r.group(1)
    minutes = r.group(2)

    tube = flow.Tube(file = f, conditions = {"IP" : float(ip), "Minutes" : int(minutes)})
    tubes.append(tube)

ex = flow.ImportOp(tubes = tubes,
                  conditions = {"IP" : "float",
                              "Minutes" : "int"},
                  events = 1000).apply()
```

Take a quick look at the morphological parameters.

```
flow.DensityView(xchannel = "FSC-A",
                xscale = "log",
                ychannel = "SSC-A",
                yscale = "log").plot(ex)
```

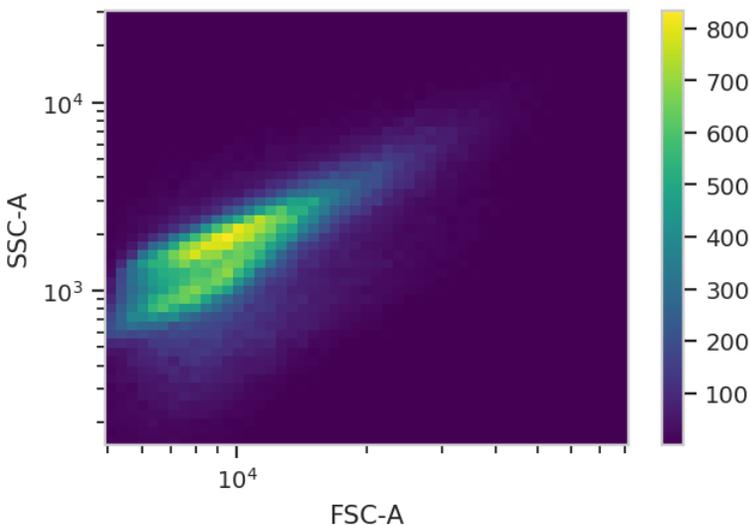

There does seem to be a little bit of structure here, but in general the distribution is quite tight. So, we’ll use a 2D gaussian mixture model to get single cells, keeping the events that are within two standard deviations of the distribution mean.

```
gm = flow.GaussianMixtureOp(name = "GM",
                            channels = ['FSC-A', 'SSC-A'],
                            scale = {'FSC-A' : 'log',
```

(continues on next page)

(continued from previous page)

```

        'SSC-A' : 'log'},
        num_components = 1,
        sigma = 2)
gm.estimate(ex)
ex_gm = gm.apply(ex)

```


A diagnostic plot of the GMM.

```
gm.default_view().plot(ex_gm, alpha = 0.02)
```

```

/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'GM_1'

```

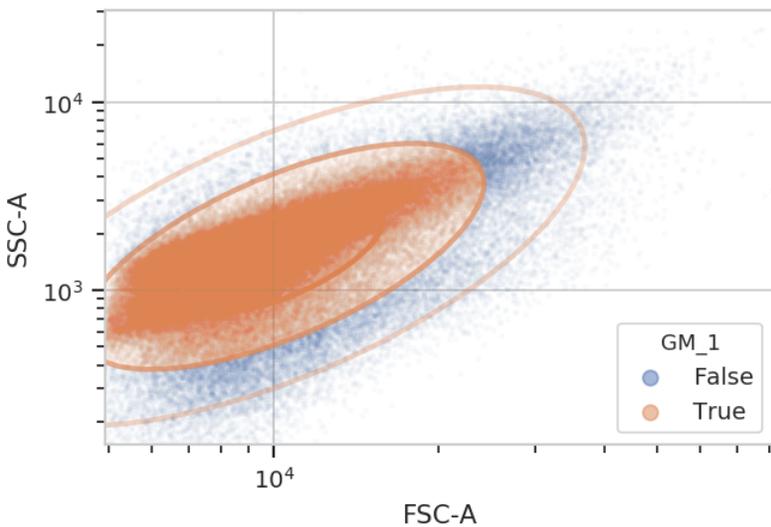

Yep, that looks fine. Now compute the geometric mean in the FITC-A channel to see how GFP expression varies with IP concentration and time since induction.

```

ex_stat = flow.ChannelStatisticOp(name = 'GFP',
                                channel = 'FITC-A',
                                function = flow.geom_mean,
                                by = ['IP', 'Minutes'],
                                subset = 'GM_1 == True').apply(ex_gm)


```

And plot it. Could you use pandas and seaborn to do this instead? Absolutely.

```


flow.Stats1DView(statistic = ('GFP', 'geom_mean'),
                 variable = 'Minutes',
                 scale = 'log',
                 huefacet = 'IP',
                 huescale = 'log').plot(ex_stat,
                                       ylabel = 'Geometric mean of GFP (au)')

```

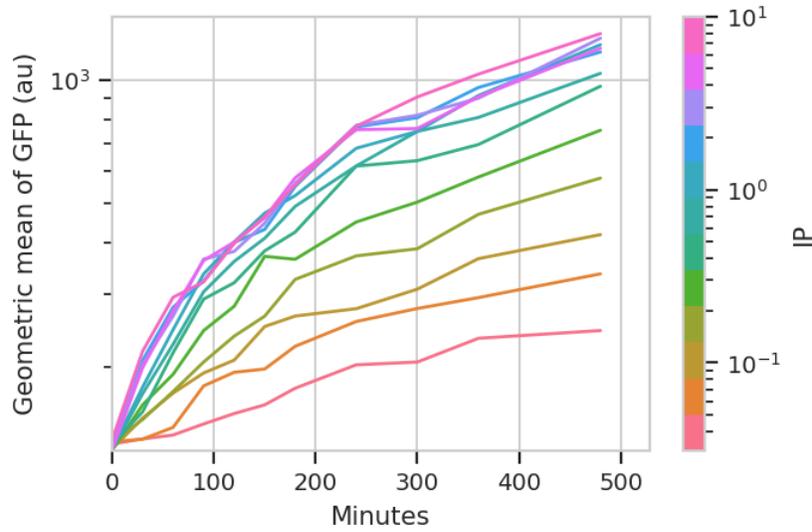


A geometric mean is only an appropriate summary statistic if the unimodal in log space. Is this actually true? Let's look at the histogram of each [IP]/time combination to find out.

```
flow.HistogramView(channel = 'FITC-A',
                  xfacet = 'Minutes',
                  yfacet = 'IP',
                  scale = 'logicle',
                  subset = 'GM_1 == True').plot(ex_gm)
```

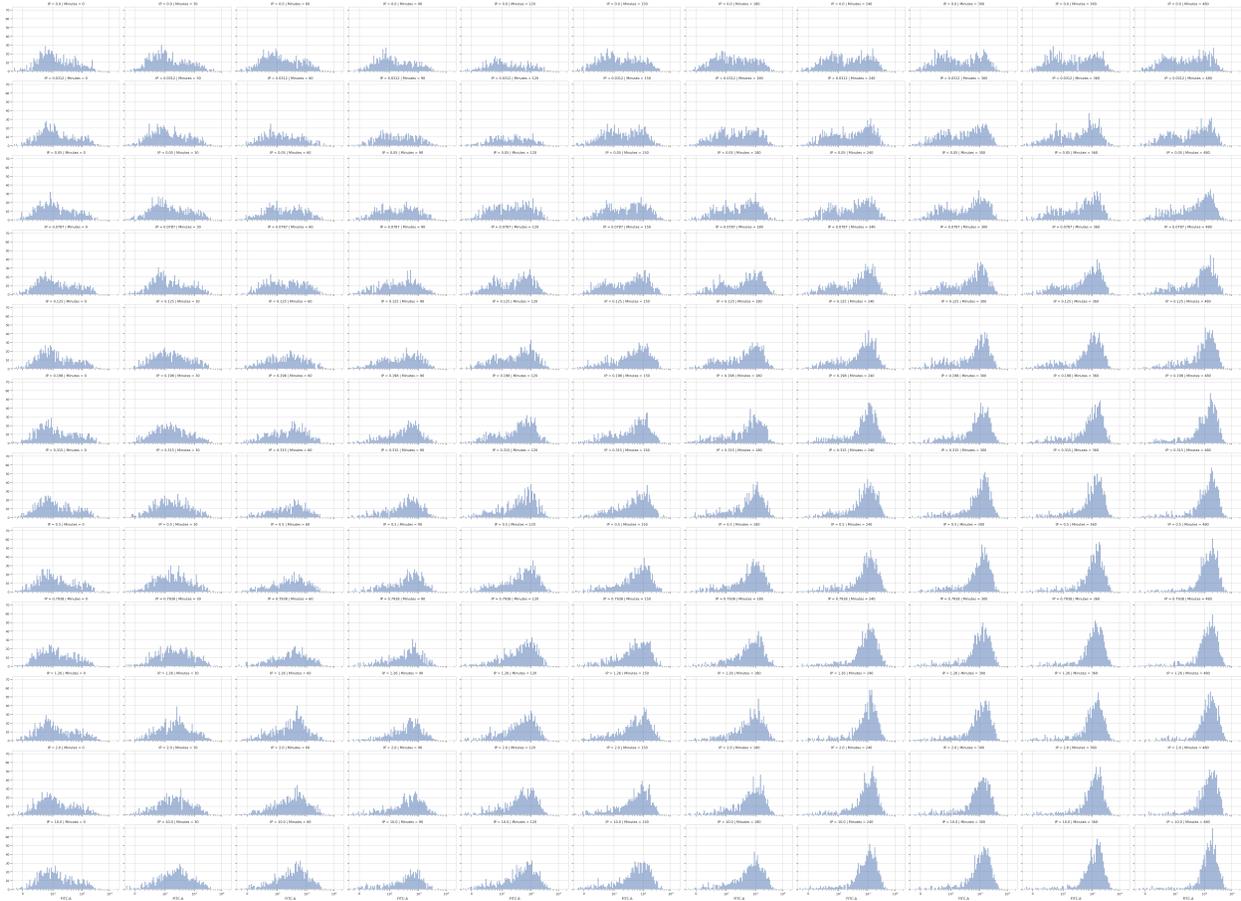

Wow! That's a lot of plots, and reading the axes is impossible. I maybe could use `matplotlib.pyplot` to change the plot parameters and get something useful, but instead let's put [IP] on the hue facet instead of the Y facet. Then, we can wrap the X facet into three columns and actually see each plot.

```
flow.Kde1DView(channel = 'FITC-A',
               xfacet = 'Minutes',
               huefacet = 'IP',
               scale = 'logicle',
               huescale = 'log',
               subset = 'GM_1 == True').plot(ex_gm, col_wrap = 3, shade = False)
```

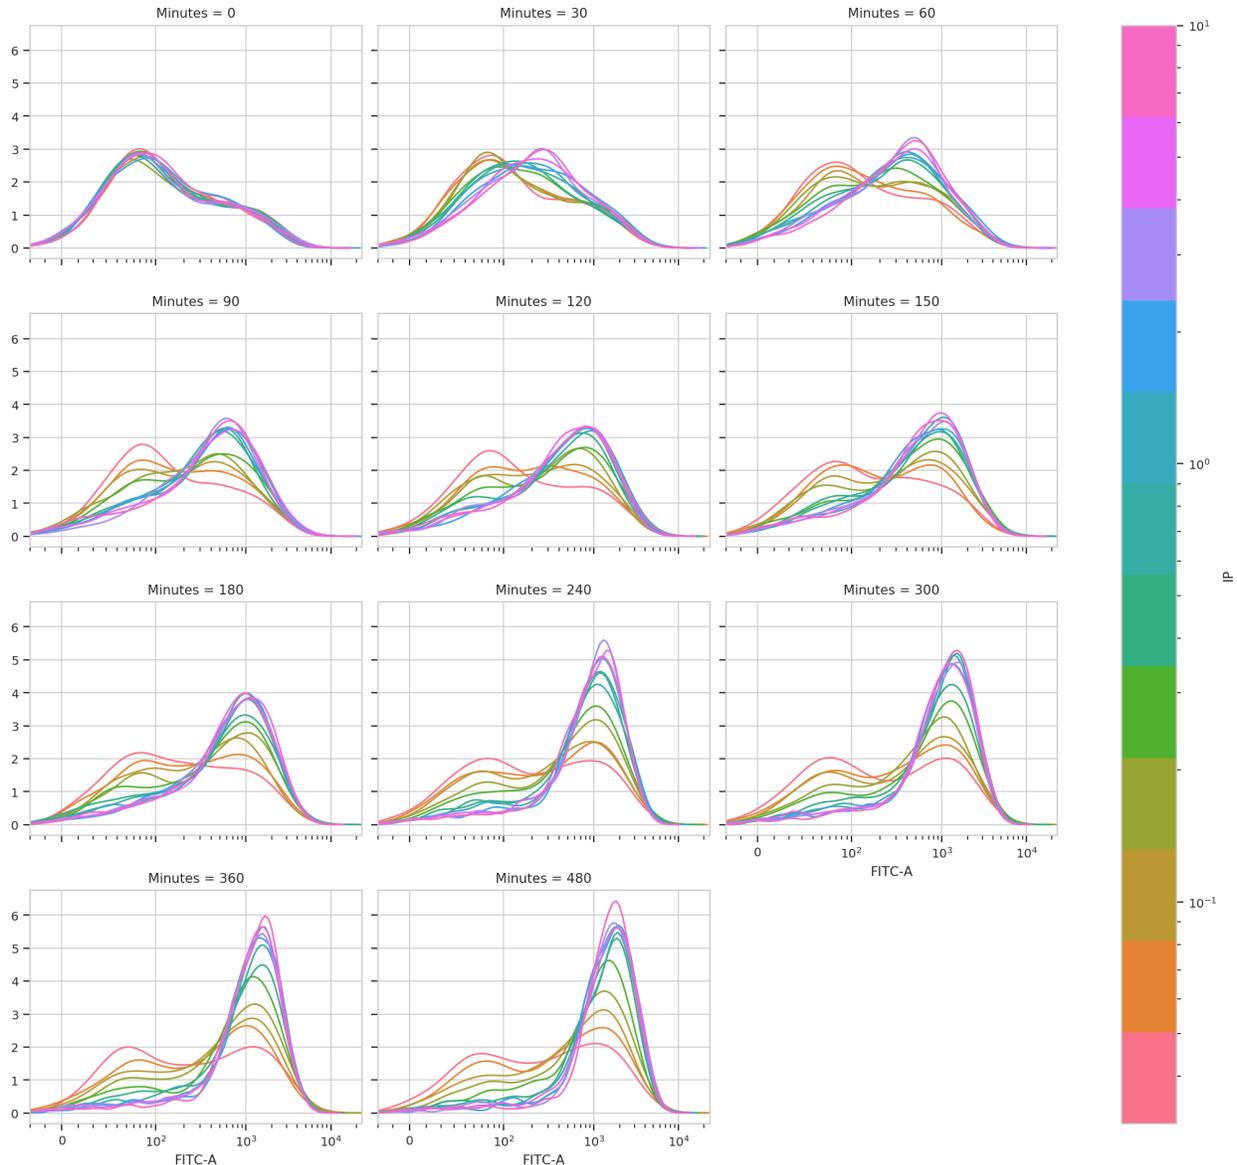

This is very, very interesting! There appears to be significant structure to this data. It's almost as if there are two populations, one that is "off" and one that is "on" – and that higher [IP] influences the rate at which cells switch from the off population to the on population.

We can model this mixture of gaussians using a class we've already seen, `GaussianMixtureOp`. We'll estimate two components, and we won't specify `sigma`. We'll also say `by = ['IP', 'Minutes']` to fit a different model to each unique combination of [IP] and time.

```
gm_fitc = flow.GaussianMixtureOp(name = "GM_FITC",
                                channels = ['FITC-A'],
                                scale = {'FITC-A' : 'log'},
                                by = ['IP', 'Minutes'],
                                num_components = 2)
gm_fitc.estimate(ex_gm, subset = 'GM_1 == True')
```

```
ex_stat_2 = gm_fitc.apply(ex_gm)
```

Most data-driven operations add summary statistics to the experiment as well. Let's have a look at which statistics are defined for this experiment.

```
ex_stat_2.statistics.keys()
```

```
dict_keys([('GM', 'mean'), ('GM', 'sigma'), ('GM', 'interval'), ('GM', 'correlation'), (
↳ 'GM_FITC', 'mean'), ('GM_FITC', 'sigma'), ('GM_FITC', 'interval'), ('GM_FITC',
↳ 'proportion')])
```

The statistic ('GM_FITC', 'proportion') looks promising.

```
ex_stat_2.statistics[('GM_FITC', 'proportion')]
```

| IP | Minutes | Component | |
|--------|---------|-----------|----------|
| 0.0000 | 0 | 1 | 0.689475 |
| | | 2 | 0.310525 |
| | 30 | 1 | 0.689704 |
| | | 2 | 0.310296 |
| | 60 | 1 | 0.667829 |
| | | 2 | 0.332171 |
| | 90 | 1 | 0.677261 |
| | | 2 | 0.322739 |
| | 120 | 1 | 0.651504 |
| | | 2 | 0.348496 |
| | 150 | 1 | 0.573523 |
| | | 2 | 0.426477 |
| | 180 | 1 | 0.585170 |
| | | 2 | 0.414830 |
| | 240 | 1 | 0.576592 |
| | | 2 | 0.423408 |
| | 300 | 1 | 0.589542 |
| | | 2 | 0.410458 |
| | 360 | 1 | 0.531817 |
| | | 2 | 0.468183 |
| | 480 | 1 | 0.527385 |
| | | 2 | 0.472615 |
| 0.0312 | 0 | 1 | 0.763097 |
| | | 2 | 0.236903 |
| | 30 | 1 | 0.648558 |
| | | 2 | 0.351442 |
| | 60 | 1 | 0.625895 |
| | | 2 | 0.374105 |
| | 90 | 1 | 0.585238 |
| | | 2 | 0.414762 |
| | | | ... |
| 2.0000 | 240 | 1 | 0.189016 |
| | | 2 | 0.810984 |
| | 300 | 1 | 0.155909 |
| | | 2 | 0.844091 |
| | 360 | 1 | 0.152130 |
| | | 2 | 0.847870 |

(continues on next page)

(continued from previous page)


| | | | |
|---------|-----|---|----------|
| | 480 | 1 | 0.127653 |
| | | 2 | 0.872347 |
| 10.0000 | 0 | 1 | 0.699984 |
| | | 2 | 0.300016 |
| | 30 | 1 | 0.471701 |
| | | 2 | 0.528299 |
| | 60 | 1 | 0.385929 |
| | | 2 | 0.614071 |
| | 90 | 1 | 0.294833 |
| | | 2 | 0.705167 |
| | 120 | 1 | 0.305929 |
| | | 2 | 0.694071 |
| | 150 | 1 | 0.248707 |
| | | 2 | 0.751293 |
| | 180 | 1 | 0.259084 |
| | | 2 | 0.740916 |
| | 240 | 1 | 0.140860 |
| | | 2 | 0.859140 |
| | 300 | 1 | 0.166703 |
| | | 2 | 0.833297 |
| | 360 | 1 | 0.112013 |
| | | 2 | 0.887987 |
| | 480 | 1 | 0.080634 |
| | | 2 | 0.919366 |

Name: GM_FITC : proportion, Length: 264, dtype: float64

Great, we've got the proportions of component 1 and 2, at each IP concentration and timepoint. Plot the proportion in component 2 with "Minutes" on the X axis and "IP" on the hue facet.

```
flow.Stats1DView(
    statistic = ("GM_FITC", "proportion"),
    variable = "Minutes",
    huefacet = "IP",
    huescale = "log",
    subset = "Component == 2").plot(ex_stat_2)
```


```
/home/brian/src/cytosflow/cytosflow/views/base_views.py:751: CytosflowViewWarning: Only one
↪ value for level Component; dropping it.
```

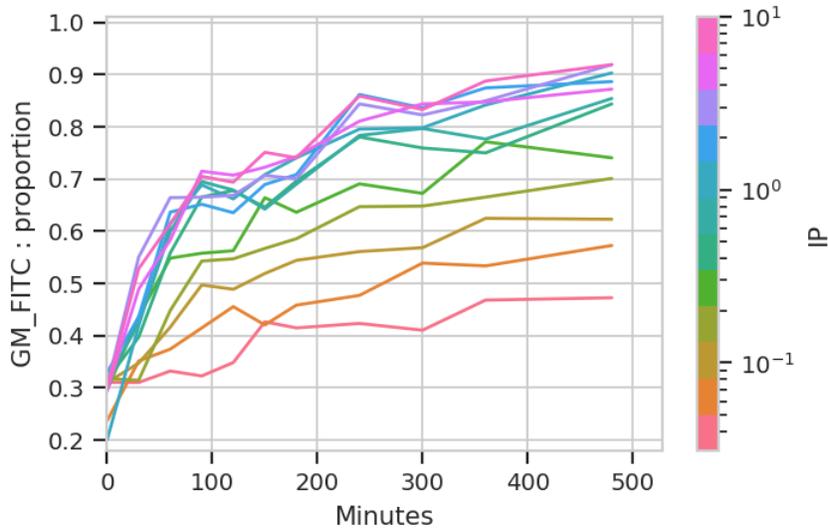

Ignore the “jagged” nature of the plot. The original data set is hundreds of megabytes big, and in that data set the curves are much smoother (-;

The important question is: is this any different than the geometric mean? Let’s re-plot the geometric mean plot so we can look at both.

```
flow.Stats1DView(statistic = ('GFP', 'geom_mean'),
                 variable = 'Minutes',
                 scale = 'log',
                 huefacet = 'IP',
                 huescale = 'log').plot(ex_stat,
                                       ylabel = 'Geometric mean of GFP (au)')
```

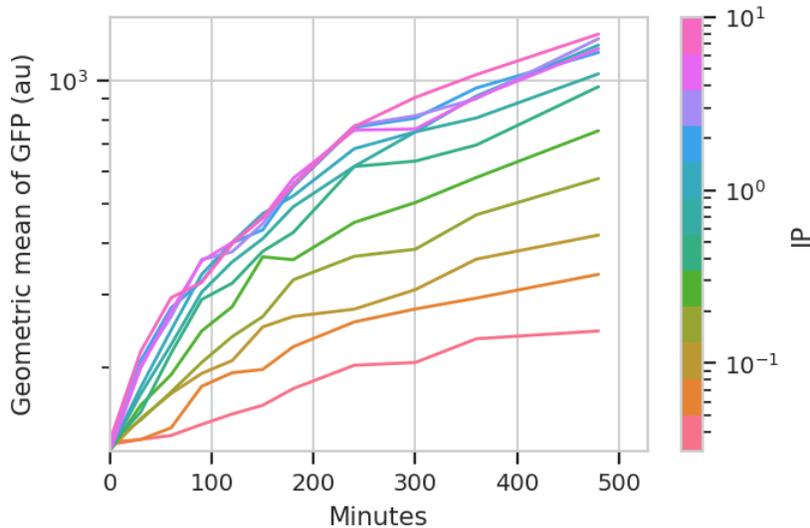

I think those dynamics look significantly different. For one thing, the mixture model “saturates” much more quickly – both in time and in [IP]. The geometric mean model indicates saturation at about 5 uM, while the mixture model seems to saturate one or two steps earlier. Things also stop changing quite as dramatically by about 240 minutes, whereas the geometric mean hasn’t reached anything like a steady state by 480 minutes (the end of the experiment.)

I hope this has demonstrated a non-trivial insight into the dynamics of this biological system that are gained by looking at it through a quantitative lens, with some machine learning thrown in there as well.

Kiani et al, Nature Methods 2014

This example reproduces Figure 2, part (a), from Kiani et al, Nature Methods 11: 723 (2014).

In order to keep download sizes reasonable, the files only have about 10% of the original events.

Experimental Layout

This experiment uses a dCas9 fusion to repress the output of a yellow fluorescent reporter. The dCas9 is directed to the repressible promoter by a guide RNA under the control of rtTA3, a transcriptional activator controlled with the small molecule inducer doxycycline (Dox).

The plasmids that were co-transfected are shown below (reproduced from the above publication's Supplementary Figure 6a.)

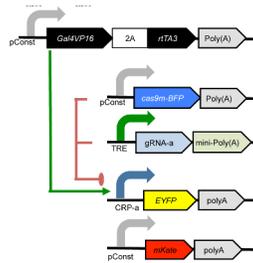


Fig. 4: Genetic circuit

The experiment compares three different conditions: - No dCas9 / no gRNA - No gRNA - The full gene network
Each condition was induced with 0, 100, 500, and 4000 uM Dox.

```
# change "inline" --> "notebook" if you want to interact with the plots.
# in some buggy versions of the Jupyter notebook, this needs to be in its OWN CELL.
```

```
%matplotlib inline
```

```
import cytoflow as flow
```

```
# if your figures are too big or too small, you can scale them by changing matplotlib's
↔ DPI
```

```
import matplotlib
matplotlib.rc('figure', dpi = 160)
```

As is usual with cytoflow, we start by mapping the files to the experimental conditions. We have three different conditions; four different Dox concentrations; and three replicates.

```
# (Condition, [Dox]) --> filename
inputs = {
    ("Full_Circuit", 0.0) : "Specimen_002_A1_A01.fcs",
    ("Full_Circuit", 100.0) : "Specimen_002_A2_A02.fcs",
```

(continues on next page)

(continued from previous page)

```

("Full_Circuit", 500.0) : "Specimen_002_A3_A03.fcs",
("Full_Circuit", 4000.0) : "Specimen_002_A4_A04.fcs",
("No_gRNA", 0.0) : "Specimen_002_C5_C05.fcs",
("No_gRNA", 100.0) : "Specimen_002_C6_C06.fcs",
("No_gRNA", 500.0) : "Specimen_002_C7_C07.fcs",
("No_gRNA", 4000.0) : "Specimen_002_C8_C08.fcs",
("No_Cas9", 0.0) : "Specimen_002_D1_D01.fcs",
("No_Cas9", 100.0) : "Specimen_002_D2_D02.fcs",
("No_Cas9", 500.0) : "Specimen_002_D3_D03.fcs",
("No_Cas9", 4000.0) : "Specimen_002_D4_D04.fcs"}

tubes = []

for repl, path in {1 : "repl1", 2 : "repl2", 3 : "repl3"}.items():
    for (condition, dox), filename in inputs.items():
        tube = flow.Tube(file = path + "/" + filename,
                        conditions = {'Condition' : condition,
                                    'Dox' : dox,
                                    'Replicate' : repl})

        tubes.append(tube)

import_op = flow.ImportOp(conditions = {'Condition' : "category",
                                        'Dox' : "float",
                                        'Replicate' : "int"},
                          tubes = tubes)

ex = import_op.apply()


```

Have a look at the morphological parameters.

```

flow.DensityView(xchannel = "FSC-A",
                ychannel = "SSC-A",
                xscale = 'log',
                yscale = 'log').plot(ex, min_quantile = 0.005)

```

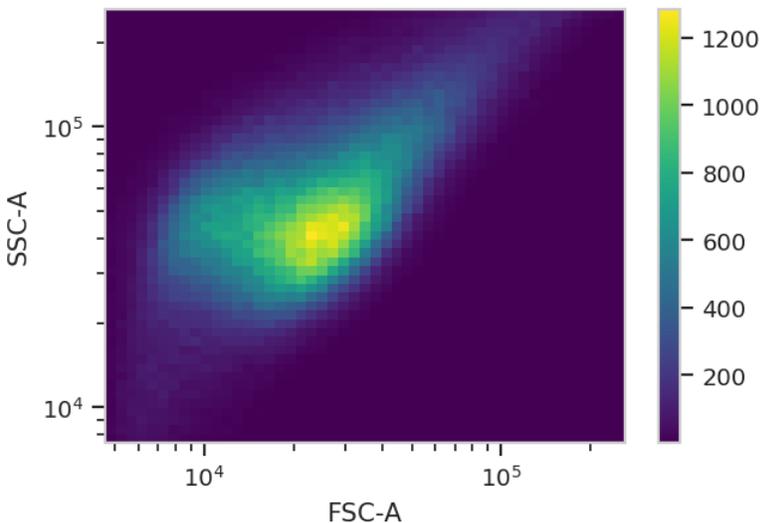

This looks like it's been pre-gated (ie, there's not a mixture of populations.) It's also pushed up against the top axes in both SSC-A and FSC-A, which is a little concerning.

Let's see how many events we're getting piled up.


```
(ex['SSC-A'] == ex['SSC-A'].max()).sum()
```

```
5434
```

Alright. Some events (~5,000 out of 360,000) but not enough to be concerning.

The next thing we usually do is select for positively transfected cells. mKate is the transfection marker, so look at the red channel.

```
flow.HistogramView(channel = "PE-TxRed YG-A",
                    scale = 'logicle').plot(ex)
```

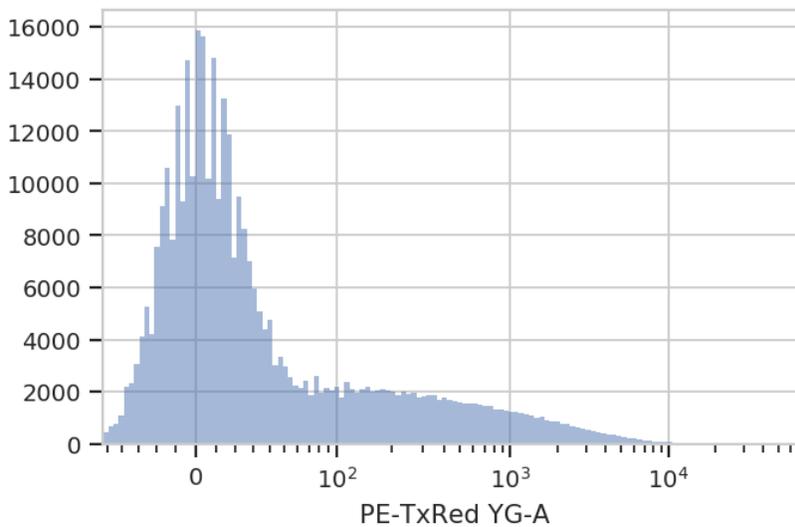


Let's fit a mixture-of-gaussians, for a nice principled way of separating the transfected population from the untransfected population.

```
gm = flow.GaussianMixtureOp(name = "GM",
                             channels = ["PE-TxRed YG-A"],
                             scale = {'PE-TxRed YG-A' : 'logicle'},
                             num_components = 2)

gm.estimate(ex)
ex_gm = gm.apply(ex)
gm.default_view().plot(ex_gm)
```

```
/home/brian/src/cytoflow/cytoflow/operations/base_op_views.py:341: CytoflowViewWarning:
↳ Setting 'huefacet' to 'GM'
```

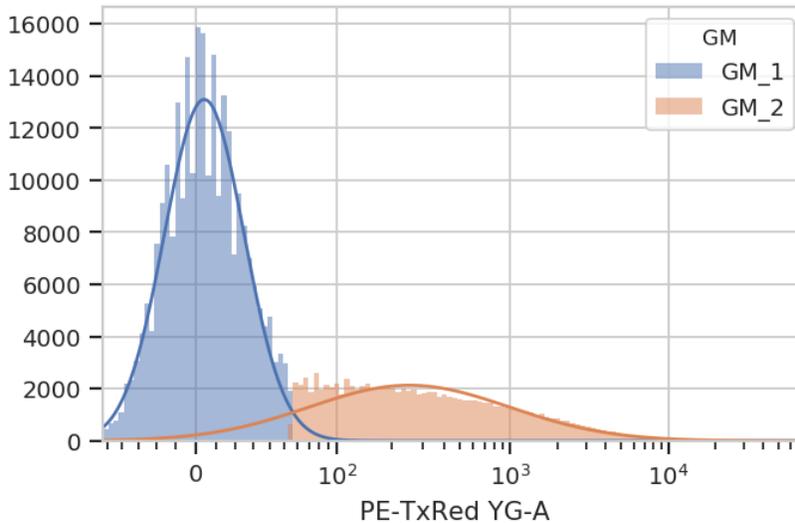

Looks good: the events with `GM == 'GM_2'` are the cells in the transfected population. Let's see how many events were in each population.

```
ex_gm.data.groupby(['GM']).size()
```

```
GM
GM_1    262010
GM_2    97990
dtype: int64
```

Let's make a new condition, `Transfected`, to be a boolean value with whether the cell was in `GM_2` or not. **Note:** `add_condition` acts on the `Experiment` in-place.

```
ex_gm.add_condition(name = 'Transfected',
                    dtype = 'bool',
                    data = (ex_gm['GM'] == 'GM_2'))
```

Now, we can reproduce the bar chart in the publication by taking the output (EYFP, in the FITC-A channel) geometric mean of the positively transfected cells, split out by condition and [Dox]. Don't forget to look at just the *transfected* cells (using `subset`). We'll compute the geometric mean across circuit and [Dox], and then split it out by replicate so we can compute an SEM.

Please note: This is a **terrible** place to use error bars. See:

<https://www.nature.com/nature/journal/v492/n7428/full/492180a.html>

and

<http://jcb.rupress.org/content/177/1/7>

for the reason why. I'm using them here to demonstrate the capability, rather than argue that you should perform your analysis this way.

```
ex_stat = flow.ChannelStatisticOp(name = "FITC_mean",
                                channel = "FITC-A",
                                by = ["Condition", "Dox"],
                                function = flow.geom_mean,
                                subset = "Transfected == True").apply(ex_gm)
```

(continues on next page)

(continued from previous page)


```

ex_stat = flow.ChannelStatisticOp(name = "FITC_by_replicate",
                                channel = "FITC-A",
                                by = ["Condition", "Dox", "Replicate"],
                                function = flow.geom_mean,
                                subset = "Transfected == True").apply(ex_stat)

ex_stat = flow.TransformStatisticOp(name = "FITC_by_replicate",
                                    statistic = ("FITC_by_replicate", "geom_mean"),
                                    by = ["Condition", "Dox"],
                                    function = flow.geom_sd_range).apply(ex_stat)

flow.BarChartView(statistic = ("FITC_mean", "geom_mean"),
                  error_statistic = ("FITC_by_replicate", "geom_sd_range"),
                  variable = "Condition",
                  scale = "log",
                  huefacet = "Dox").plot(ex_stat,
                                         xlabel = 'Circuit',
                                         ylabel = 'EYFP Geometric Mean (au)',
                                         capsized = 5,
                                         errwidth = 1)

```

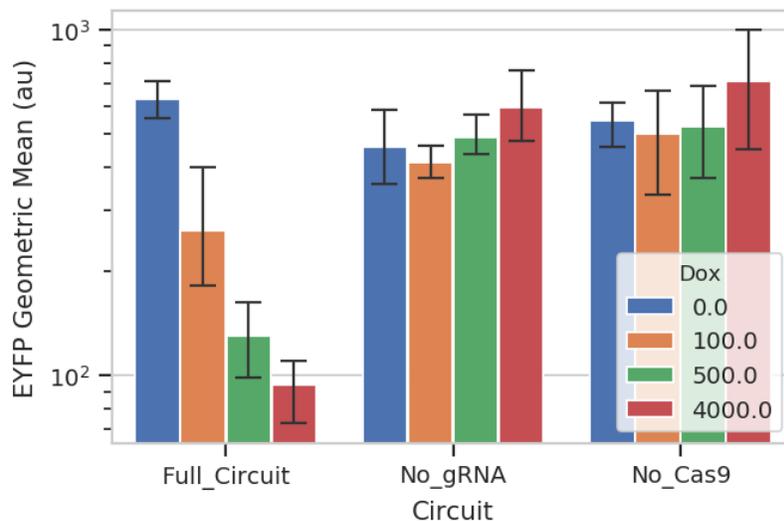

So that's useful, but maybe there's more in this data. We've noticed in our lab that gene circuit behavior frequently changes as copy number changes. Is this the case here? We can bin the data by transfection level, and see if the behavior changes as the bin number increases. We can also ask that the number of events per bin be included as another piece of metadata, so we can exclude bins with a small number of events.

```

bin_op = flow.BinningOp(name = "Transfection_Bin",
                        channel = "PE-TxRed YG-A",
                        bin_width = 0.1,
                        scale = "log",
                        bin_count_name = "Transfection_Bin_Count")


ex_bin = bin_op.apply(ex_gm)

```

(continues on next page)

(continued from previous page)

```
flow.HistogramView(channel = "PE-TxRed YG-A",
                  huefacet = "Transfection_Bin",
                  scale = 'log',
                  huescale = 'log',
                  subset = "Transfected == True & "
                        "Transfection_Bin_Count > 1000").plot(ex_bin,
                                                            lim = (80, 10000),
                                                            xlabel = 'mKate2 (au)')
```

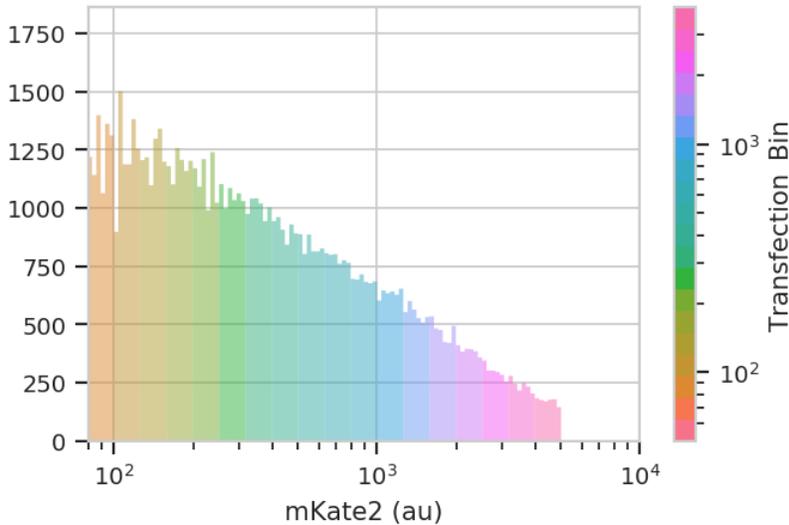

Now plot a line plot with transfection bin on the X-axis and mean FITC output on the Y-axis.

```
ex_stat = flow.ChannelStatisticOp(name = "FITC_mean",
                                channel = "FITC-A",
                                by = ["Condition", "Dox", "Transfection_Bin"],
                                function = flow.geom_mean,
                                subset = "Transfected == True & "
                                        "Transfection_Bin_Count > 500").apply(ex_bin)

ex_stat = flow.ChannelStatisticOp(name = "FITC_by_repl",
                                channel = "FITC-A",
                                by = ["Condition", "Dox", "Transfection_Bin",
↪ "Replicate"],
                                function = flow.geom_mean,
                                subset = "Transfected == True & "
                                        "Transfection_Bin_Count > 500").apply(ex_stat)




ex_stat = flow.TransformStatisticOp(name = "FITC_by_repl",
                                   statistic = ("FITC_by_repl", "geom_mean"),
                                   by = ["Condition", "Dox", "Transfection_Bin"],
                                   function = flow.geom_sd_range).apply(ex_stat)

flow.Stats1DView(statistic = ("FITC_mean", "geom_mean"),
                 error_statistic = ("FITC_by_repl", "geom_sd_range"),
                 variable = "Transfection_Bin",
```

(continues on next page)

(continued from previous page)

```
huefacet = "Dox",
variable_scale = 'linear',
scale = 'log',
yfacet = "Condition").plot(ex_stat,
                           xlabel = 'mKate2 Geometric Mean (au)',
                           ylabel = 'EYFP Geometric Mean (au)',
                           sharex = False,
                           capsize = 3)
```

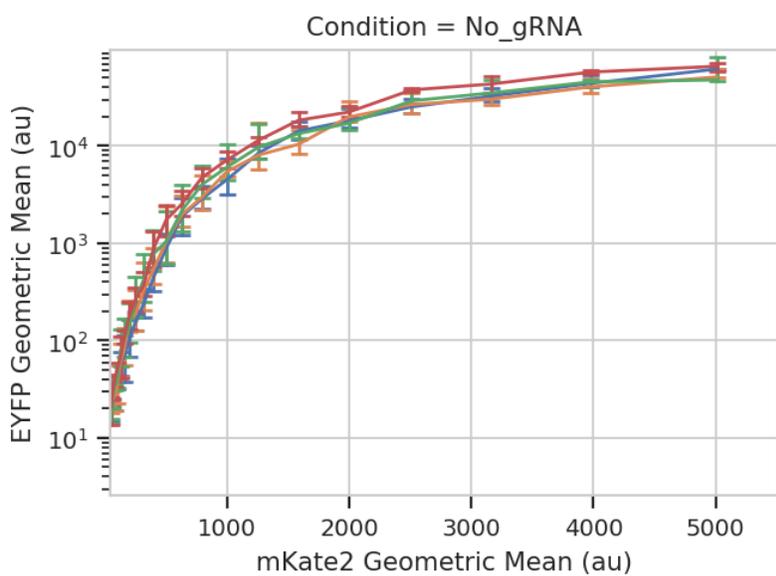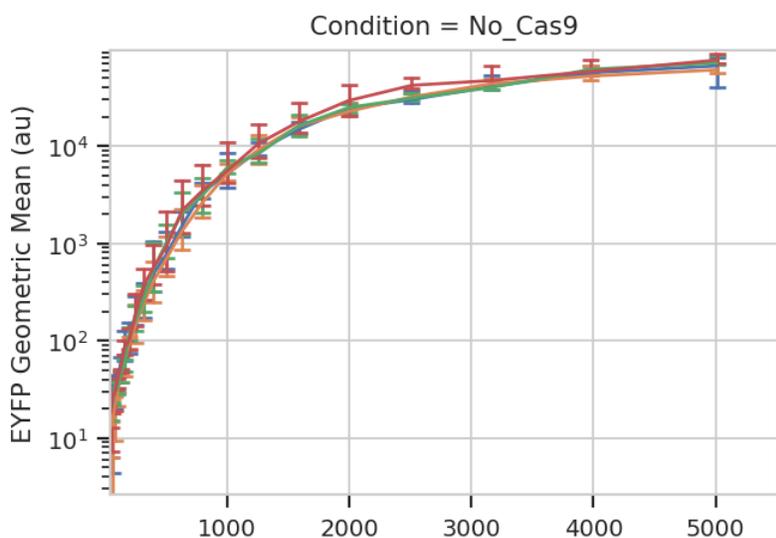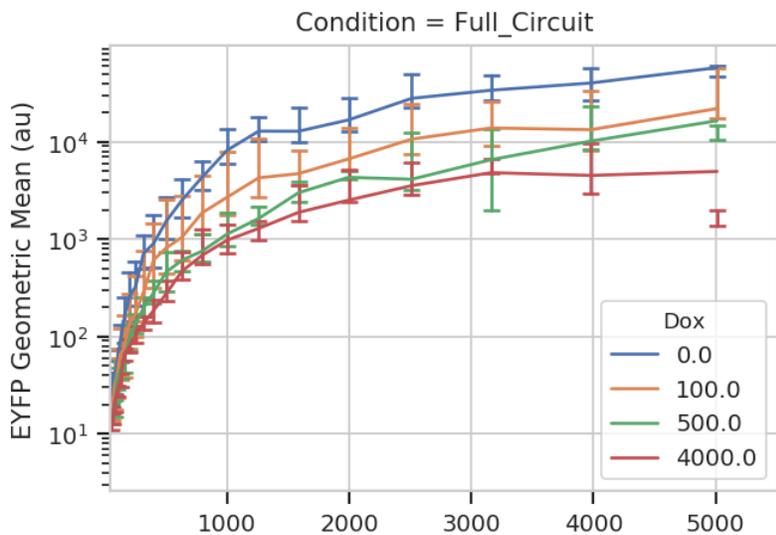

TASBE Workflow Example

This notebook demonstrates using cytoflow for doing calibrated flow cytometry, converting the arbitrary units from the flow cytometer to Molecules Equivalent Fluorescein (MEFLs).

Our implementation closely follows that described in [Beal et al](#) and its application in [Davidsohn et al.](#). It consists of four steps:

- Autofluorescence correction.
- Spectral bleedthrough correction.
- Calibration to physical units (MEFLs, etc.)
- Mapping to the same logical units (MEFLs in the FITC channel).

Each step requires a particular set of controls. They'll be described in more detail below, but they are (in short): * Blank (unstained, untransfected, untransformed) cells (to do autofluorescence removal) * One-color controls for each channel (to do spectral bleedthrough correction) * Calibration beads (to do physical unit calibration) * Two-color controls (or perhaps 3- or 4-color controls) to do logical unit mapping.

Experimental Layout

The experiment whose data we'll be analyzing characterizes a TALE transcriptional repressor (TAL14, from [Li et al](#)). The experiment is a multi-plasmid transient transfection in mammalian cells, depicted below:




Fig. 5: Genetic circuit

The small molecule doxycycline (“Dox”) drives the transcriptional activator rTA3 to activate the transcriptional repressor (“R1” in the diagram), which then represses output of the yellow fluorescent protein EYFP. rTA3 also drives expression of a blue fluorescent protein, eBFP, which serves as a proxy for the amount of repressor. Finally, since we’re doing transient transfection, there’s a huge amount of variability in the level of transfection; we measure transfection level with a constitutively expressed red fluorescent protein, mKate.

Setup

Connect matplotlib to the IPython notebook, and load some modules.

```
# change "inline" to "notebook" if you want ot interact with the plots.
# this command needs to happen in its OWN CELL.
%matplotlib inline
```

```
# load the cytoflow library
import cytoflow as flow
```

```
# if your figures are too big or too small, you can scale them by changing matplotlib's
↪ DPI
import matplotlib
matplotlib.rc('figure', dpi = 160)
```

As is usual with `cytoflow`, we start by mapping the files to experimental conditions. Here, we only vary the amount of Doxycycline, the small molecule inducer of the repressor.

```
# [Dox] --> filename
inputs = {
    0.0 : 'TAL14_1.fcs',
    0.1 : 'TAL14_2.fcs',
    0.2 : 'TAL14_3.fcs',
    0.5 : 'TAL14_4.fcs',
    1.0 : 'TAL14_5.fcs',
    2.0 : 'TAL14_6.fcs',
    5.0 : 'TAL14_7.fcs',
    10.0 : 'TAL14_8.fcs',
    20.0 : 'TAL14_9.fcs',
    50.0 : 'TAL14_10.fcs',
    100.0 : 'TAL14_11.fcs',
    200.0 : 'TAL14_12.fcs',
    500.0 : 'TAL14_13.fcs',
    1000.0 : 'TAL14_14.fcs',
    2000.0 : 'TAL14_15.fcs'}

tubes = []

for dox, filename in inputs.items():
    tube = flow.Tube(file = filename,
                    conditions = {'Dox' : dox})
    tubes.append(tube)


import_op = flow.ImportOp(conditions = {'Dox' : "float"},
                          tubes = tubes)

ex = import_op.apply()
```

Morphological gate

Start by gating out the cells that we want. We can apply this gate to the controls, too.


```
flow.ScatterplotView(xchannel = "FSC-A",
                    ychannel = "SSC-A",
                    yscale = "log").plot(ex, alpha = 0.01)
```

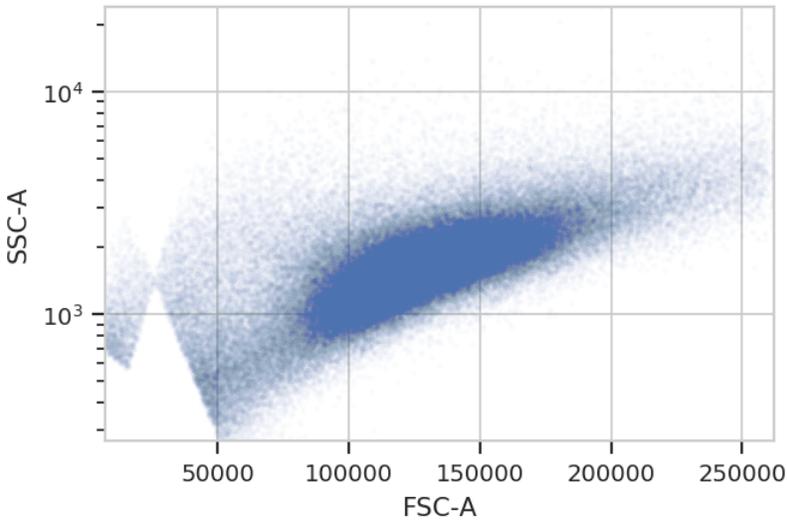

```
gm_1 = flow.GaussianMixtureOp(name = "Morpho1",
                               channels = ["FSC-A", "SSC-A"],
                               scale = {"SSC-A" : "log"},
                               num_components = 2,
                               sigma = 2)

gm_1.estimate(ex)
ex_morpho = gm_1.apply(ex)

flow.ScatterplotView(xchannel = "FSC-A",
                    ychannel = "SSC-A",
                    yscale = "log",
                    huefacet = "Morpho1_2").plot(ex_morpho, alpha = 0.01)
```

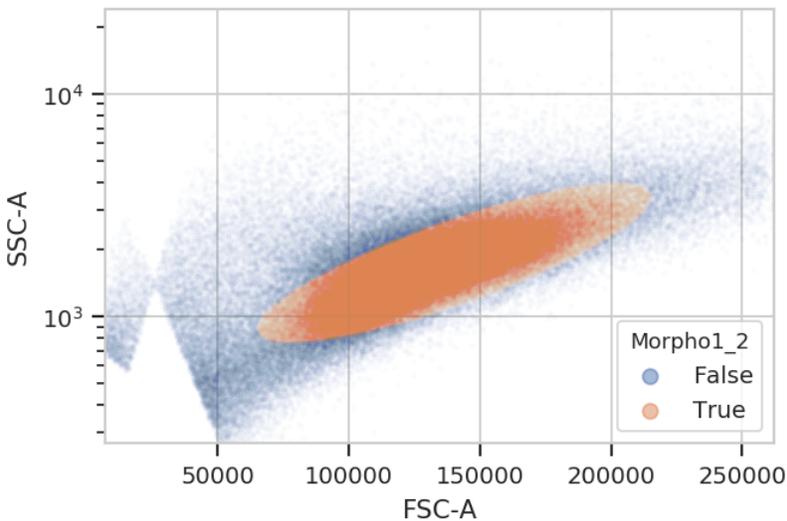


Autofluorescence correction

To account for autofluorescence, we measure a tube of *blank cells* (unstained, untransfected, untransformed – not fluorescing.) The autofluorescence operation finds the (arithmetic) median of the blank cells' distributions in the fluorescence channels and subtracts it from all the observations in the experimental data.

The diagnostic plot just shows the fluorescence histograms and the medians. Make sure that they're unimodal and the median is at the peak.

```
af_op = flow.AutofluorescenceOp()
af_op.blank_file = "controls/Blank-1_H12_H12_P3.fcs"
af_op.channels = ["Pacific Blue-A", "FITC-A", "PE-Tx-Red-YG-A"]

af_op.estimate(ex_morpho, subset = "Morpho1_2 == True")
af_op.default_view().plot(ex_morpho)
```

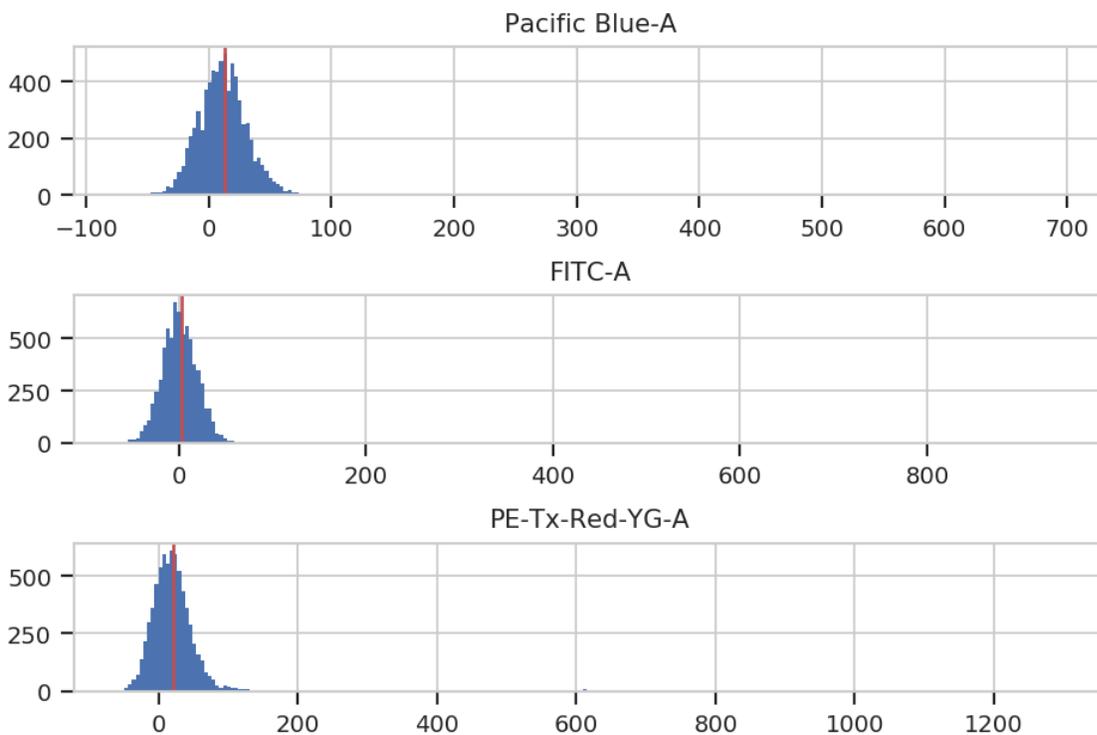

```
ex_af = af_op.apply(ex_morpho)
```


Spectral bleedthrough correction

This operation characterizes how much a fluorophore's signal shows up in channels other than the one you are using to detect it. For example, EYFP is primarily measured in the (yellow) FITC channel, but some signal also shows up in the (red) PE-Texas Red channel.

The controls for this operation are single-fluorescent controls – either single fluorescent proteins or singly-stained cells. They should fluoresce brightly, so as to best-characterize bleedthrough.

```
bl_op = flow.BleedthroughLinearOp()
bl_op.controls = {'Pacific Blue-A' : 'controls/EBFP2-1_H9_H09_P3.fcs',
                 'FITC-A' : 'controls/EYFP-1_H10_H10_P3.fcs',
                 'PE-Tx-Red-YG-A' : 'controls/mkate-1_H8_H08_P3.fcs'}

bl_op.estimate(ex_af, subset = "Morpho1_2 == True")
bl_op.default_view().plot(ex_af)
```

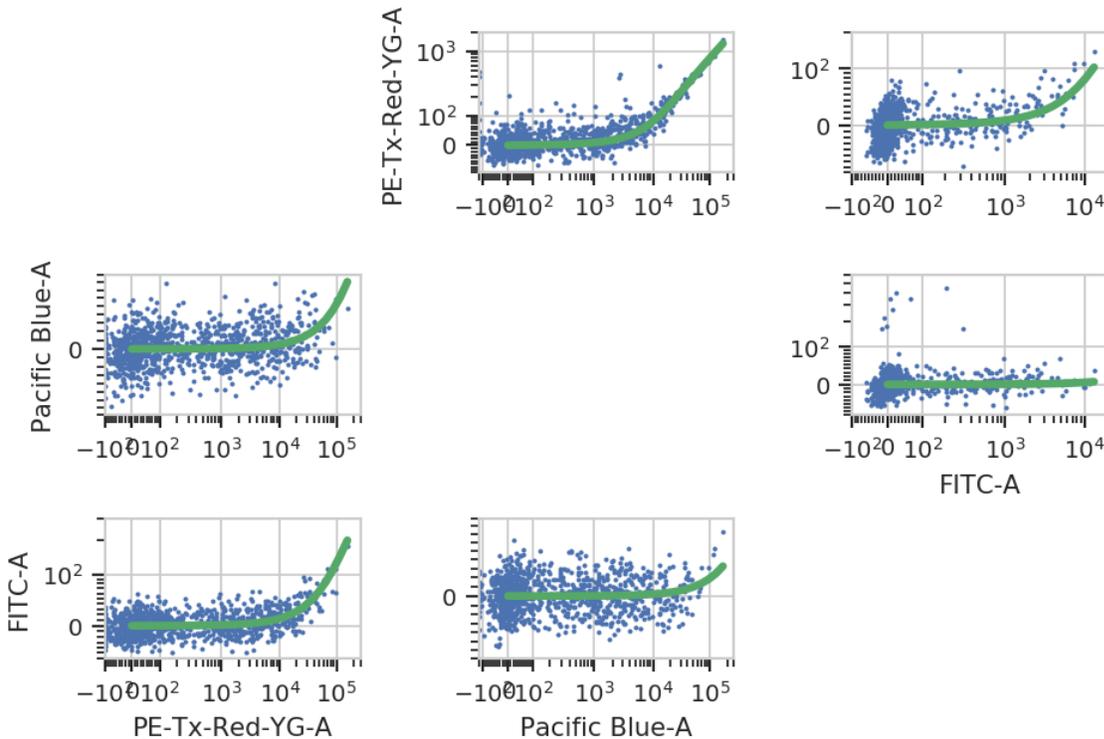

```
ex_bl = bl_op.apply(ex_af)
```

Bead Calibration

Unfortunately, the raw measurements from a flow cytometer are sensitive to many factors. These range from the precise optical configuration, to the laser power, to the PMT voltage, to the last time the instrument was cleaned and calibrated. Thus, the measurements taken on one instrument are not directly compatible with those taken on another. (Sometimes, even day-to-day variation on the same instrument is enough to ruin comparisons.)

One way around this is to calibrate your measurements against a stable calibrant. Our favorite is a set of stable fluorescent beads, such as the Spherotech RCP-30-5As. This module calibrates measurements to molecules of equivalent fluorophores, which can make calibrations (more) comparable. Read the beads' documentation for more details.

NB: Adding new beads is easy! See the `bead_calibration` module's source code.

```
bead_op = flow.BeadCalibrationOp()
bead_op.beads = flow.BeadCalibrationOp.BEADS["Spherotech RCP-30-5A Lot AA01-AA04, AB01, ↵
↵AB02, AC01, GAA01-R"]
bead_op.units = {"Pacific Blue-A" : "MEBFP",
```

(continues on next page)

(continued from previous page)


```

    "FITC-A" : "MEFL",
    "PE-Tx-Red-YG-A" : "MEPTR"}

bead_op.beads_file = "controls/BEADS-1_H7_H07_P3.fcs"
bead_op.estimate(ex_bl)

bead_op.default_view().plot(ex_bl)

```

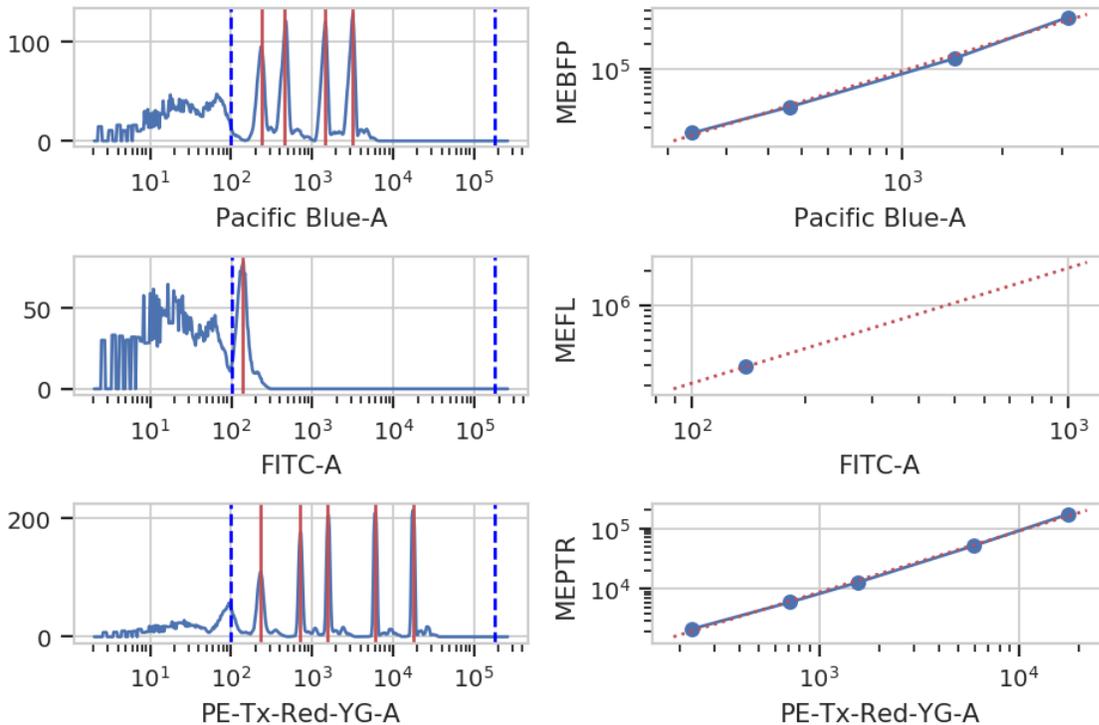

```
ex_beads = bead_op.apply(ex_bl)
```

Color Translation

At the end of the day, we want to be able to compare signals collected in the yellow channel to signals from the blue and red channels in comparable units. Unfortunately, different fluorescent proteins mature at different rates, have different quantum efficiencies, etc – so even if we measure the same absolute fluorescence (in photon flux, say), we still can't say that the number of molecules is the same.

One way around this is to use a biological control where you are relatively certain that the number of molecules *is* the same to compute a conversion factor. For example, EYFP and mKate and EBFP2 all expressed under the same promoter in the same cell line should produce the same amounts of RNA and comparable amounts of protein. This module lets you use a set of controls like this to convert between *biological* signals.

```


ct_op = flow.ColorTranslationOp()
ct_op.controls = {("Pacific Blue-A", "FITC-A") : "controls/RBY-1_H11_H11_P3.fcs",
                  ("PE-Tx-Red-YG-A", "FITC-A") : "controls/RBY-1_H11_H11_P3.fcs"}
ct_op.mixture_model = True

```

(continues on next page)

(continued from previous page)

```
ct_op.estimate(ex_beads, subset = "Morpho1_2 == True")
ct_op.default_view().plot(ex_beads)
```

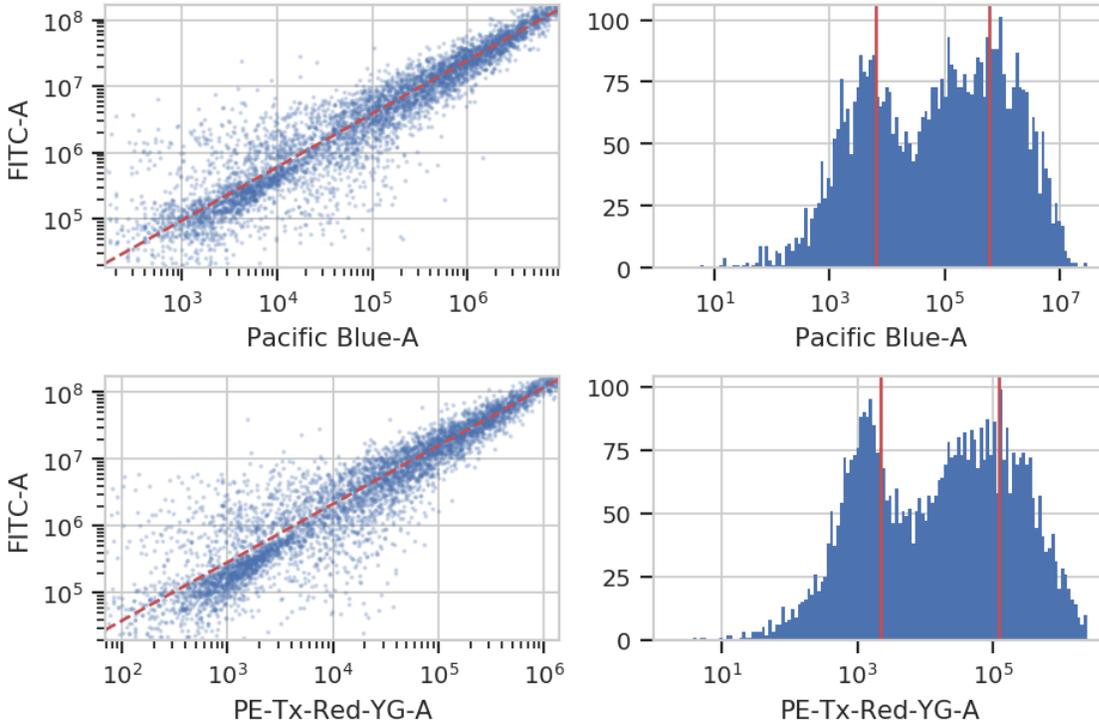


```
ex_calib = ct_op.apply(ex_beads)
```

Binned Analysis

As described above, the example data in this notebook is from a transient transfection of mammalian cells in tissue culture. What this means is that there's a really broad distribution of fluorescence, corresponding to a broad distribution of transfection levels.

```
flow.HistogramView(channel = "PE-Tx-Red-YG-A",
                  scale = "log",
                  subset = "Morpho1_2 == True").plot(ex_calib,
                                                    title = "Constitutive Fluorescence",
                                                    xlabel = "mKate2 fluorescence",
                                                    ylabel = "MEFL")
```

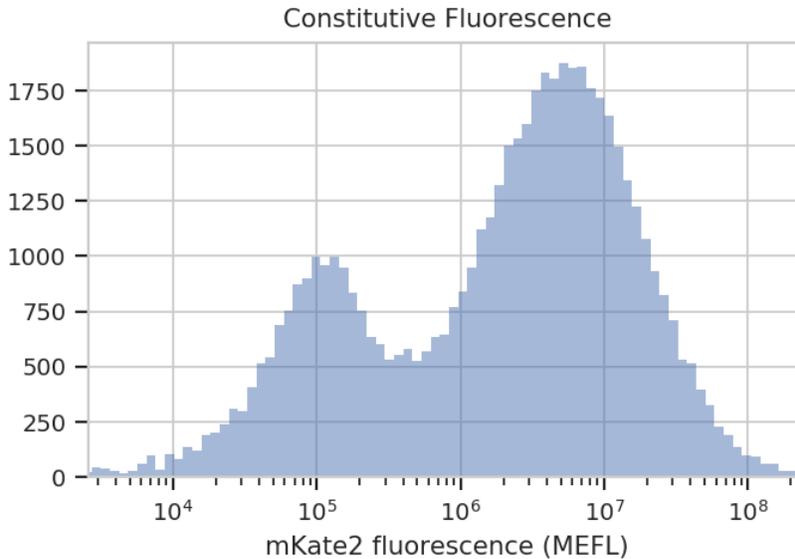


See? The left peak is cells that are untransfected; the right peak is cells that were. The cells that were transfected seem to range from about 3×10^5 MEFL up to 10^8 MEFL, over two orders of magnitude.

The way we handle this data is by dividing the cells into bins depending on their transfection levels. We find that cells that received few plasmids frequently behave differently (quantitatively speaking) than cells that received many plasmids. The `BinningOp` module applies evenly spaced bins; in this example, we're going to apply them on a log scale, every 0.1 log-units.

```
ex_bin = flow.BinningOp(name = "CFP_Bin",
                        bin_count_name = "CFP_Bin_Count",
                        channel = "PE-Tx-Red-YG-A",
                        scale = "log",
                        bin_width = 0.1).apply(ex_calib)

flow.HistogramView(channel = "PE-Tx-Red-YG-A",
                  huefacet = "CFP_Bin",
                  huescale = "log",
                  scale = "log",
                  subset = "Morphol_2 == True and "
                        "PE_Tx_Red_YG_A >= 200000 and CFP_Bin_Count > 1000").plot(ex_
↪bin,
↪xlabel = "mKate (MEFL)",
↪title = "Const. fluorescence (binned)",
↪lim = (2e5, 1e8))
```

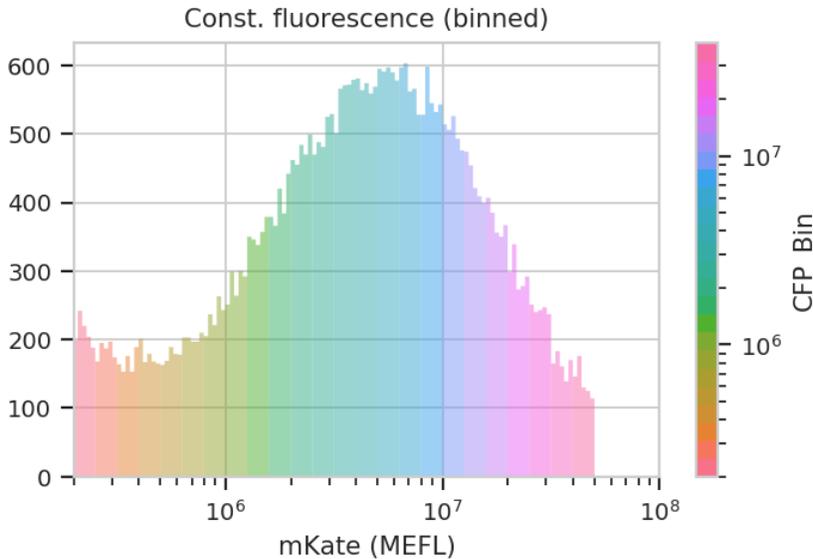

Now we can start our analysis properly. For each unique combination of [Dox] and bin, we compute four statistics: - The geometric mean of the Pacific Blue channel, the “input fluorescent protein” or IFP - The geometric mean of the ratio of IFP and PE-Texas Red channels - The geometric mean of the FITC channel, the “output fluorescent protein” or OFP - The geometric mean of the ratio of the FITC and PE-Texas Red channels

Remember, because we calibrated the measurements, the CFP, IFP and OFP channels are on the same scale, which makes comparisons between them (ratios, etc) meaningful.

```
ex_stats = flow.ChannelStatisticOp(name = "IFP",
                                  channel = "Pacific Blue-A",
                                  by = ["Dox", "CFP_Bin"],
                                  function = flow.geom_mean,
                                  subset = "Morphol_2 == True and "
                                          "PE_Tx_Red_YG_A > 200000 and CFP_Bin_Count >
→1000").apply(ex_bin)

ex_stats = flow.FrameStatisticOp(name = "IFP",
                                  by = ["Dox", "CFP_Bin"],
                                  function = lambda x: flow.geom_mean(x["Pacific Blue-A"]
→ / x["PE-Tx-Red-YG-A"]),
                                  statistic_name = "geom_mean_per_cfp",
                                  subset = "Morphol_2 == True and "
                                          "PE_Tx_Red_YG_A > 200000 and CFP_Bin_Count >
→1000").apply(ex_stats)

ex_stats = flow.ChannelStatisticOp(name = "OFP",
                                  channel = "FITC-A",
                                  by = ["Dox", "CFP_Bin"],
                                  function = flow.geom_mean,
                                  subset = "Morphol_2 == True and "
                                          "PE_Tx_Red_YG_A > 200000 and CFP_Bin_Count >
→1000").apply(ex_stats)

ex_stats = flow.FrameStatisticOp(name = "OFP",
                                  by = ["Dox", "CFP_Bin"],
```

(continues on next page)

(continued from previous page)

```

function = lambda x: flow.geom_mean(x["FITC-A"] / x["PE-
↳Tx-Red-YG-A"]),
statistic_name = "geom_mean_per_cfp",
subset = "Morpho1_2 == True and "
      "PE_Tx_Red_YG_A > 200000 and CFP_Bin_Count >_
↳1000").apply(ex_stats)


```

Let's start with our input fluorescent protein, EBFP2. Do we see more of it as we increase [Dox]? Is the response different in different bins (i.e. different transfection levels?)

```

flow.Stats1DView(statistic = ("IFP", "geom_mean"),
variable = "Dox",
variable_scale = "log",
scale = "log",
huefacet = "CFP_Bin",
huescale = "log").plot(ex_stats,
xlabel = "[Dox] (uM)",
ylabel = "IFP (MEFL)",
hue = "CFP (MEFL)",
title = "Raw Dox transfer curve, colored by_
↳plasmid bin")

```

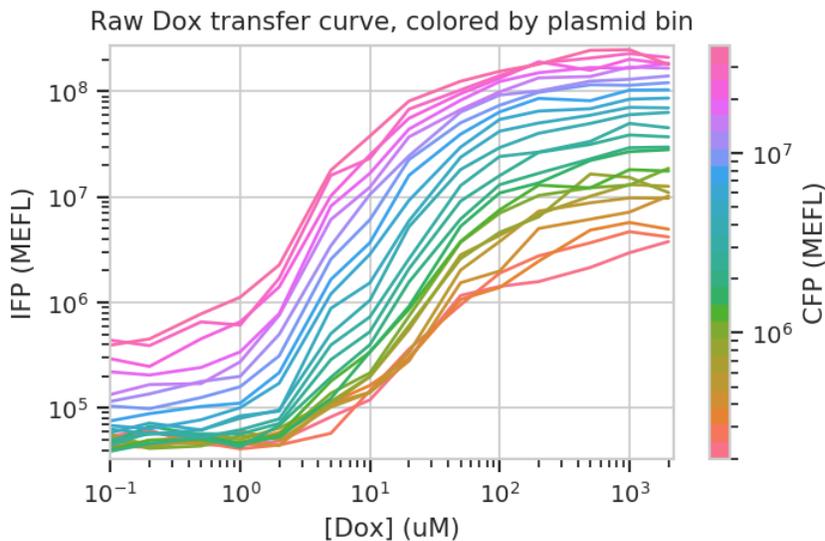

The answer to both questions is “yes”: there is an increase in IFP signal as we increase [Dox], and the precise quantitative character of the curve is different depending on which bin we select. Of particular interest is how moderately transfected bins (say, 10^5 through 10^6) have greater on-off ratios than bins on either side of the transfection distribution.

Does this hold when we normalize by transfection (ie, divide by CFP)?

```

flow.Stats1DView(statistic = ("IFP", "geom_mean_per_cfp"),
variable = "Dox",
scale = "log",
variable_scale = "log",
huefacet = "CFP_Bin").plot(ex_stats,

```


(continues on next page)

(continued from previous page)

```

xlabel = "[Dox] (uM)",
ylabel = "IFP / plasmid (MEFL)",
hue = "CFP (MEFL)",
title = "Normalized Dox transfer curve,
colored by plasmid bin")

```

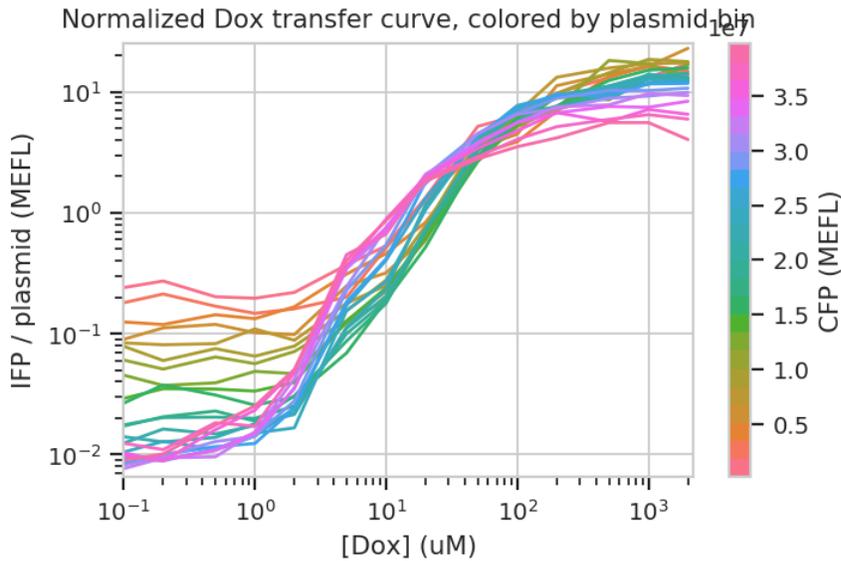


Sure enough, the moderately transfected curves fall right on top of each other, making it really obvious that the fold induction of different bins is different.

Things get really interesting when we start plotting different statistics against each other. To do so, the statistics must have the same indices (i.e, the same values passed to by in the module that created the statistic.) In the example below, we plot how the geometric mean of each bin's IFP and OFP change as we vary Dox. There is one line plotted per bin.

```


flow.Stats2DView(xstatistic = ("IFP", "geom_mean"),
                 ystatistic = ("OFP", "geom_mean"),
                 variable = "Dox",
                 xscale = "log",
                 yscale = "log",
                 huescale = "log",
                 huefacet = "CFP_Bin").plot(ex_stats,
xlabel = "IFP (MEFL)",
ylabel = "OFP (MEFL)",
hue = "CFP (MEFL)",
title = "Raw transfer curve, colored by CFP
bin")

```

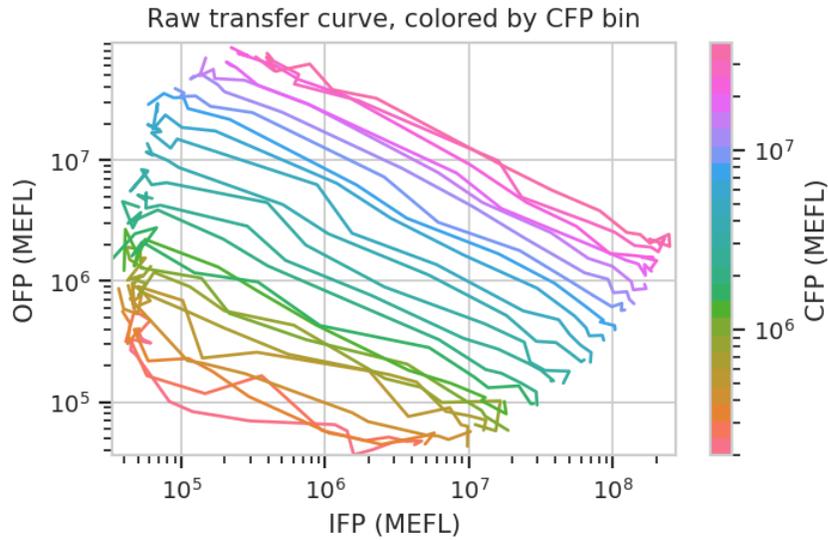

We can do the same thing with the scaled statistics, too.

```
flow.Stats2DView(xstatistic = ("IFP", "geom_mean_per_cfp"),
                 ystatistic = ("OFP", "geom_mean_per_cfp"),
                 variable = "Dox",
                 xscale = "log",
                 yscale = "log",
                 huescale = "log",
                 huefacet = "CFP_Bin").plot(ex_stats,
                                           xlabel = "IFP / CFP (MEFL)",
                                           ylabel = "OFP / CFP (MEFL)",
                                           hue = "CFP (MEFL)",
                                           title = "OFP normalized transfer curve,
→colored by CFP bin")
```

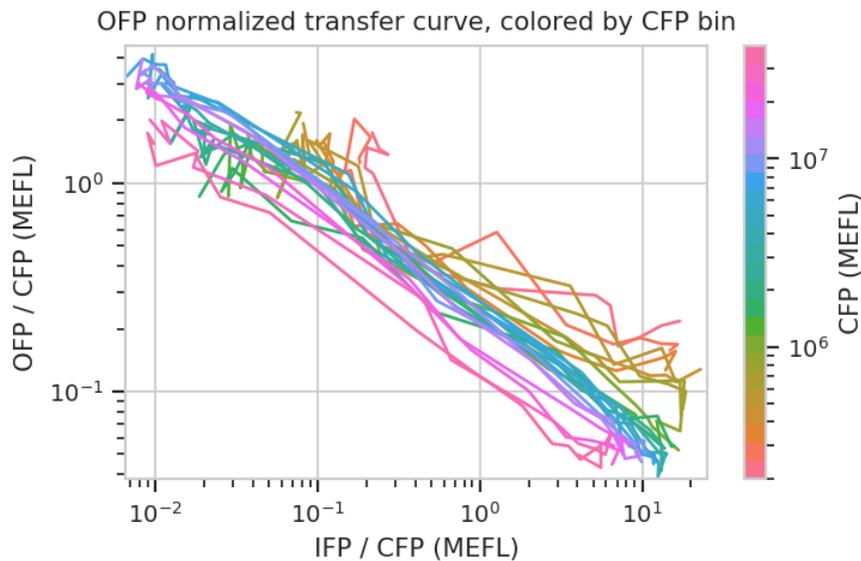

How-To Guides for Developers and Contributors

HOWTO: Install Cytoflow Modules

To use the Cytoflow modules in a Jupyter notebook or your own code

Cytoflow is available as a package for the Anaconda scientific Python distribution. You can install *cytoflow* through the Anaconda Navigator, or by using the command line.


This is not the only way to get Cytoflow up and running, but it is by far the most straightforward.

Installing from the Anaconda Navigator


- Start by installing the Anaconda Python distribution. **Make sure to install a 64-bit version, unless you will be building *cytoflow* yourself and you know what you're doing.**

[Download Anaconda here](#)


- Either from the Start Menu (Windows) or the Finder (Mac), run the Anaconda Navigator
- Click the Channels button.

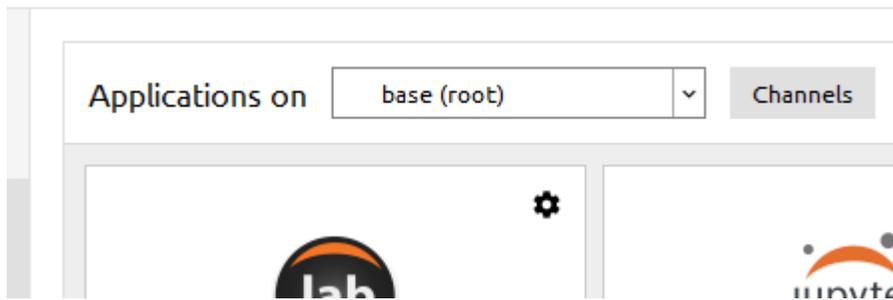


- Click Add... and type cytoflow. Select "Update channels."

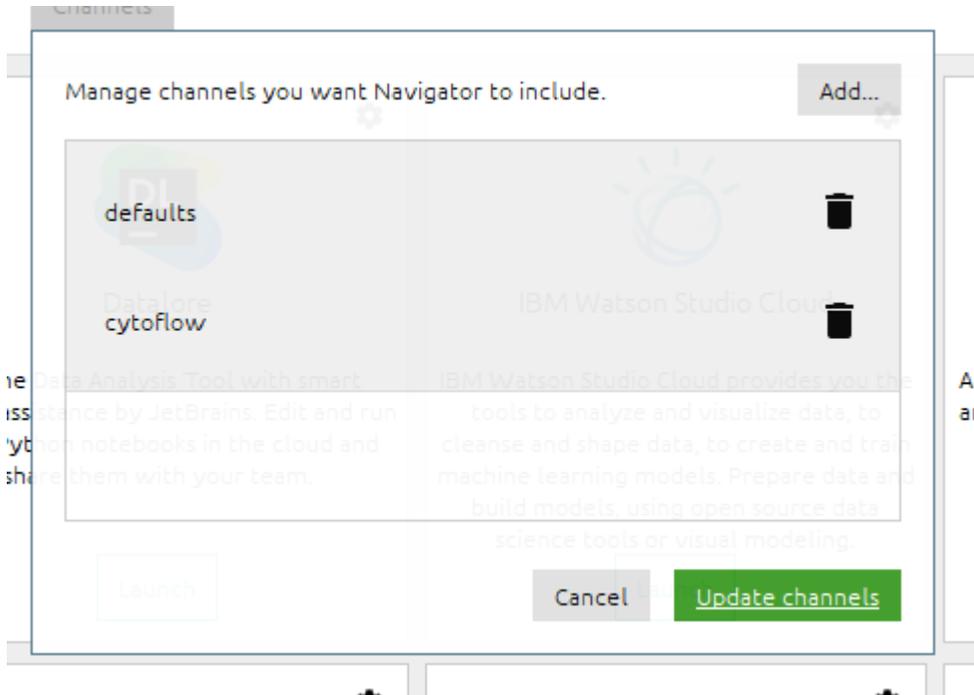

- The application cytoflow should appear in the launcher. Click the Install button.

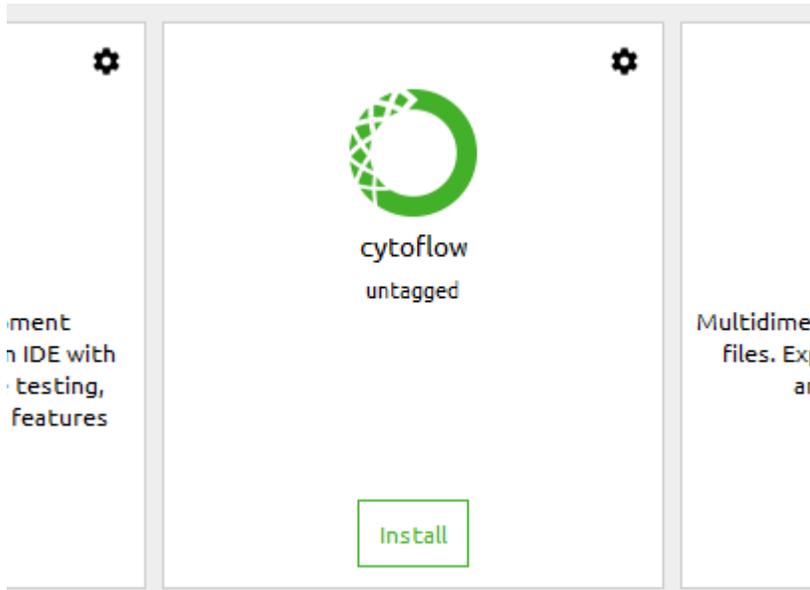

- Navigator asks if you'd like to install in a new environment. Say Yes..

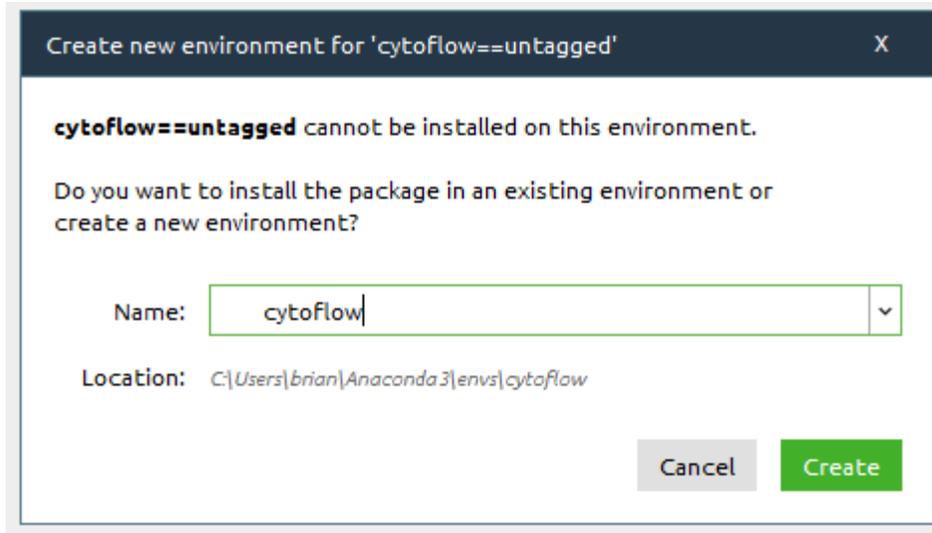

NOTE: Be patient. Anaconda Navigator is slow. NOTE: Make sure that you choose an environment that does not already exist!

- To verify installation, start a Jupyter notebook.
 - First, *make sure you have the ``cytoflow`` environment selected.*
 - From the Anaconda Navigator, install and then launch Jupyter notebook.
 - Create a new *Python 3* notebook.
 - In the first cell, type `import cytoflow` and press `Shift+Enter`. If Python doesn't complain, you're good to go. (If it does, please submit a bug report at <https://github.com/cytoflow/cytoflow/issues>)
- **Note: When you install Cytoflow this way, the point-and-click application is installed as well.** Launching it from the Anaconda Navigator will be significantly faster than downloading the pre-packaged binary.

Installing from the command line

- Start Anaconda Prompt from the Start Menu (Windows) or Finder (Mac).
- Add the cytoflow channel:

```
conda config --add channels cytoflow
```

- Create a new environment and install cytoflow and the Jupyter notebook. In this example, the new environment will be called `cf` – feel free to choose a different name:

```
conda create --name cf cytoflow notebook
```

- Activate the new environment:

```
conda activate cf
```

- Launch the Jupyter notebook:

```
jupyter notebook
```

- Create a new *Python 3* notebook. In the first cell, type `import cytoflow` and press `Shift+Enter`. If Python doesn't complain, you're good to go. (If it does, please submit a bug report!)

- This method ALSO installs the GUI. You should be able to run it by activating your new environment and running the cytoflow script.

To hack on the code

Cytoflow depends on a huge number of libraries from the Scientific Python ecosystem, and a change in any one of their APIs will break the cytoflow library. So, I have pinned the versions of all of cytoflow's dependencies, which all but guarantees that you'll need to install into a virtual environment. This will ensure that the rest of your Python installation doesn't break.

I strongly recommend using Anaconda to install the proper dependencies. A PyPI package (installable using pip) is also available. The following instructions assume that you have installed Anaconda (as above) and launched an Anaconda prompt.

Finally, cytoflow relies on one C++ extension. On Linux, installing the requirements for building it is straightforward. On MacOS it is harder, and on Windows it is extremely difficult. Instead, as part of rolling a new release, the appropriate files are made available on [the GitHub releases page](#). The procedure below includes instructions for downloading and installing the appropriate file.

- Install the development dependencies
 - On Ubuntu: `apt-get git swig python-dev`
 - On Windows: Install a copy of git. I use [git-for-windows](#)
 - On MacOS: Install a copy of git from [the Git website](#).
- If you haven't, add the cytoflow channel to conda:

```
conda config --add channels cytoflow
```

- Clone the repository:

```
git clone --recurse-submodules https://github.com/cytoflow/cytoflow.git
```

- Create a new environment. In this example, I have called it cf_dev. In the new repository you just cloned, say:

```
conda env create --name cf_dev --file environment.yml
```

Note: On Windows, you must edit `environment.yml` before you execute `conda env create`. Remove the last line, the one that reads `- nomkl # [not win]`

- Activate the new environment:

```
conda activate cf_dev
```

- **On Windows and MacOS only**, do the following to prevent cytoflow from trying to build the C++ extension.

- **On Windows (in CMD):**

```
set NO_LOGICLE=True
```

- **On MacOS (or on Windows bash):**

```
export NO_LOGICLE=True
```

- Install cytoflow in developer's mode:

```
python setup.py develop
```

- From the [GitHub releases](#) page download the appropriate extension file for the version you're installing.
 - **On Windows (64-bit):** `_Logicle.cp38-win_amd64.pyd`
 - **On MacOS:** `_Logicle.cpython-38m-darwin.so`
- Copy the file you just download into the `cytoflow/utility/logicle_ext/` folder in your source tree.
- Test that everything works. Start a python interpreter and say:

```
import cytoflow
```

If you don't get any errors, you're good to go.

Running the point-and-click GUI program

There are pre-built bundles available at <http://cytoflow.github.io/>

Alternately, you can follow the instructions above for installing the Anaconda package, then run `cytoflow` through the Anaconda Navigator or via the command line.

HOWTO: Spin a new release

Tests

- We use two continuous integration platforms to run tests and build binaries and documentations: [GitHub Actions](#), [ReadTheDocs](#).
- Finished releases are published to [GitHub releases](#), [Anaconda Cloud](#), and the [Python Package Index](#).

- Make sure that the `cytoflow` tests pass, both locally and on GitHub:

```
nose2 -c package/nose2.cfg cytoflow.tests -N 8
```

- Make sure the `cytoflowgui` tests pass. **You must do this locally; I'm still working on why it doesn't run on the CI platform.**

```
nose2 -c package/nose2.cfg cytoflowgui.tests -N 8
```

- Make sure the GitHub Actions are running to completion, at <https://github.com/cytoflow/cytoflow/actions>

Documentation

- Build the developers' manual and check it for completeness:

```
conda install "sphinx==4.2.0" pandoc
python setup.py build_sphinx
```

- Build the user manual and check it for completeness:

```
sphinx-build docs/user_manual/reference cytoflowgui/help
```

- Make sure that the ReadTheDocs build is working at <https://readthedocs.org/projects/cytoflow/builds/>

Test the packaging

- Build the conda package locally:

```
conda build package/conda_recipes/cytoflow
```

- Install the local package in a new environment:

```
conda create --name cytoflow.test --use-local cytoflow
```

- Activate the test environment, make sure you can import cytoflow, and make sure the GUI runs:

```
conda activate cytoflow.test
python -c "import cytoflow"
cytoflow
```

- Make sure that the pyinstaller distribution will build on your local machine (back in your development environment).

```
pip install pyinstaller==4.8
pyinstaller package/pyinstaller.spec
```

- Make sure that pyinstaller built the executables on all three supported platforms. On each of the three supported platforms?
 - Download the one-click from GitHub Actions. Make sure it starts and can execute a basic workflow.
 - Download the conda package from GitHub Actions. Create a local anaconda environment and install it. Check that it runs as both a module and a GUI

```
conda env create --name cf.test -f environment.yml
conda activate cf.test
conda install ./cytoflow-*****-tar.bz2
python -c "import cytoflow"
cytoflow
```

Versioning and dependencies

- We're using `versioneer` to manage versions. No manual versions required.
- If there are dependencies that don't have packages on Anaconda, add recipes to `package/conda_recipes` (using `conda skeleton`) and upload them to the Anaconda Cloud. Unless there's a really (really!) good reason, please make them no-arch.
- Make sure `install_requires` in `setup.py` matches `requirements.txt`
- Update the `README.rst` from the `README.md`. From the project root, say:

```
pandoc --from=markdown --to=rst --output=README.rst README.md
```

Tag and upload the release

- Push the updated docs to GitHub. Give the CI builders ~30 minutes, then check the build status on GitHub and ReadTheDocs.
- Create a new tag on the master branch. This will re-build everything on the CI builders.
- Download the artifacts.

Sign the Windows installer

To get rid of the “Unknown developer” warning in Windows, we sign the installer. This requires a hardware crypto token, so it must be done locally.

- Setup: If not done already, download and install the Windows Platform SDK. I’m using 8.1 because I couldn’t get 10 to install.
- Download the Windows installer from Github.
- Open a terminal in C:\Program Files\Microsoft Platform SDK\Bin.
- Start the signing wizard:

```
signtool.exe signwizard
```

- Select the installer binary.
- Under “Signing options”, choose “Typical”
- Under “Signature Certificate”, choose “Select from store...”. If the hardware key is installed and set up properly, Windows should find the correct certificate.
- Add a description such as “Flow cytometry software”. For “Web location”, specify “<http://cytoflow.readthedocs.org>”
- Check the box next to “Add a timestamp to data”. Enter “<http://time.certum.pl>”. (Probably could use digicert or some other service.)
- When prompted, enter the Common Profile PIN.
- After the wizard closes, double-check that the signing process was completed by right-clicking on the executable and checking the “Digital Signatures” tab.

Upload the artifacts and update the homepage

- Upload artifacts as appropriate to GitHub, Anaconda, and the Python Package Index. (Make sure that in the case of Anaconda, you’re uploading to the organization account, not your personal account!) The GitHub action should take care of the GitHub and Anaconda packages, but not PyPI.
- At <https://github.com/cytoflow/cytoflow.github.io>, update the version in `_config.yml`. Push these changes to update the main download links on <http://cytoflow.github.io/>
- Verify that the download links at <http://cytoflow.github.io/> still work!

HOWTO: Use the `logicle` scale in other `matplotlib` plots

`cytoflow` implements an interesting scaling routine called `logicle`. It's a biexponential function that is "linear" near zero and transitions smoothly to a logarithmic scale. This is particularly useful for flow cytometry data, which often has data clustered around zero where a log-base-10 scale would introduce aliasing. (See the papers referenced below for rationale and implementation details; `cytoflow` uses the C++ code from the second paper.)

I have been asked several times how to use a `logicle` scale for other `matplotlib` plots. This is difficult because, unlike the `log` scale, `logicle` is *parameterized* – the precise location of the linear-to-log transition, how many decades of negative data, etc. all need to be specified in order to create a usable scaling function.

However, I recognize that there are occasions when you may want to use a plot that is not baked into `cytoflow`. Here's a code fragment that should get you pointed in the right direction. However, this is an *explicitly unsupported use-case* – please don't file bug reports if you're having trouble with this:

```
import matplotlib.pyplot as plt
import cytoflow as flow

x = range(1, 1000)
y = range(1, 1000)


tube1 = flow.Tube(file = 'data/RFP_Well_A3.fcs',
                  conditions = {'Dox' : 10.0})
tube2 = flow.Tube(file='data/CFP_Well_A4.fcs',
                  conditions = {'Dox' : 1.0})

import_op = flow.ImportOp(conditions = {'Dox' : 'float'},
                          tubes = [tube1, tube2])

ex = import_op.apply()
logicle = flow.utility.scale_factory('logicle', ex, channel = 'V2-A')

# the channel = 'V2-A' parameter in the scale_factory() call tells
# the logicle scale instance to use that channel to estimate its
# parameters.  if you want to use a condition or statistic, say
# condition = ..... or statistic = ..... instead.

plt.scatter(x, y)
ax = plt.gca()
plt.gca().set_xscale('logicle',
                    **logicle.get_mpl_params(ax.get_xaxis()))
```

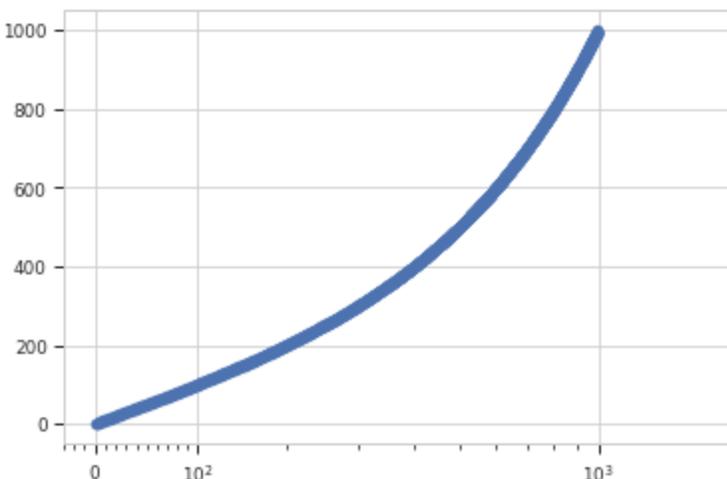

References

[1] **A new “Logicle” display method avoids deceptive effects of logarithmic** scaling for low signals and compensated data. Parks DR, Roederer M, Moore WA. *Cytometry A*. 2006 Jun;69(6):541-51. PMID: 16604519 <http://onlinelibrary.wiley.com/doi/10.1002/cyto.a.20258/full>

[2] **Update for the logicle data scale including operational code** implementations. Moore WA, Parks DR. *Cytometry A*. 2012 Apr;81(4):273-7. doi: 10.1002/cyto.a.22030 PMID: 22411901 <http://onlinelibrary.wiley.com/doi/10.1002/cyto.a.22030/full>

Topic Guides

These documents help you understand the Cytoflow codebase at a high level, which is useful for implementing your own modules.

Design Guide

This document explains how Cytoflow is laid out and the justifications for some of the design decisions.

Project Structure

The source is organized into two main components.

- The *cytoflow* package. This package contains the actual tools for operating on cytometry data. Key modules and subpackages:
 - The *Experiment* class is the primary container for cytometry data. See the module docstrings for its use. Modify this class’s API only with care, please!
 - The *cytoflow.operations* subpackage. This is where operations on data go, like transformations and gates. Adding a new operation is quite straightforward: see the documentation for *adding a new operation*.
 - The *cytoflow.views* subpackage. This is where visualizations go. These can be traditional visualizations (dotplots, histograms); or statistical summary views (bar plots of population means). There is a significant amount of class hierarchy here – see the documentation for *adding a new view*.

- The `cytoflow.utility` subpackage. Useful functions and classes, like `geom_mean()`.
- The `cytoflowgui` package. Implements the GUI.
 - The `cytoflowgui.op_plugins` subpackage. Contains instances of `envisage.Plugin` that wrap the operations. See the documentation for *adding a new operation GUI plugin*.
 - The `cytoflowgui.op_views` subpackage. Contains instances of `envisage.Plugin` that wrap the views. See the documentation if you want to *add a new view GUI plugin*.

Design decisions & justifications

- Cytometry analysis as a workflow – an analysis is a set of operations applied sequentially to a dataset. I think this is kind of obvious; it just formalizes the way of doing things that everyone else pretty much already uses.
- Instead of keeping “tubes” or “wells” as first-class objects, represent all the events from all the samples as a big long `pandas.DataFrame`, distinguishing events from different tubes via their varying experimental conditions. Most of my flow analysis experience is with the R Bioconductor package’s `flowCore`, which treats tubes as first-class objects akin to separate microarrays. That’s fine if you’ve got just a few tubes (or a few microarrays), but it rapidly gets cumbersome if you’ve got multiple plates of samples, each plate of which has two or three experimental variables; I ended up spending more time and code specifying metadata than I did actually doing analysis.

Cytoflow pushes the metadata down to the event level, doing away entirely with the concept of tubes or wells (after you get your data imported, of course.) This hews much more closely to Hadley Wickham’s concept of `Tidy Data`, and is also (!) much easier to vectorize computations on using `pandas` and `numpy` and `numexpr`. Now, you can access all the events that are, say Dox-induced, by just saying `experiment['Dox']` without having to keep track of which tubes are induced and which weren’t.

Note: If you have tubes that are replicates, just add another experimental condition, perhaps called “replicate”. You can specify that condition to the statistics views to get a standard error.

- Gates don’t actually subset data (delete or copy it); they just add metadata. I struggled for a long time with the question of how to store and manipulate different subsets of data after gating. Again, my own experience is with Bioconductor’s `flowCore`, which defines a tree structure by data that is included or excluded by gates; if a node is a gate, then its children are the subpopulations produced by that gate. Navigating that tree, though, is really difficult, especially if you want to re-combine data after gating (for plotting, for example.)

Then there was the issue of how to track and manipulate this structure as additional operations were performed. Keep just a single copy and operate on it in-place? Or copy the output of one operation for the input of the next, with the space penalties that implies?

I finally realized I didn’t have to choose; when you copy a `pandas.DataFrame`, you get a “shallow” copy, with the actual data just linked to by reference. This was perfect; if I needed to transform the data from one copy to another, I could just replace the transformed channels; and “gating” events didn’t have to create new subsets or containers, it could just add another column specifying the gate membership of each event.

- `cytoflow` discourages wholesale transformation of the underlying data, ie. taking the log of the data set. This is of a part with `cytoflow` enabling *quantitative* analysis – if you want a measure of center of data that is log-normal, you should use the geometric mean instead of log-transforming and taking the arithmetic mean. It is frequently useful to transform data before viewing it, or gating it, etc – those transformations can be passed as parameters to the view modules.

The obvious exceptions here, of course, are things like bleedthrough correction and calibration using beads. These operations transform the data, but they don’t cause the same sorts of shift in data *structure* you see with

a log transform. Data that is distributed log-normally before bleedthrough correction, will be distributed log-normally after.

- Easy computation and plotting of summary statistics. The `ChannelStatisticOp` and `FrameStatisticOp` operations create new statistics and add them to the `Experiment.statistics`; and `BarChartView`, `Stats1DView` and `Stats2DView` make it easy to plot them. (A statistic is just a `pandas.Series` with a hierarchical index that encodes data subsets and the value of a summary statistic for each group.) This may be more useful in the GUI, because `pandas.DataFrame.groupby()` provides similar functionality in a notebook setting.
- As is made pretty clear in the example Jupyter notebooks, the semantics for views and operations are
 1. Instantiate a new operation or view
 2. Parameterize the operation or view (possibly by estimating parameters from a provided data set).
 3. Apply the operation or view to an `Experiment`. If applying an operation, `apply()` returns a new `Experiment`.

The justification for these semantics is that it makes the *state* of the interacting objects really obvious. An operation or view's state doesn't depend on the data it's applied to; if its parameters do depend on data, those parameters' estimation is a separate operation.

It also allows for ready separation of the workflow from the data it's applied to, allowing for easy sharing of workflows.

- The module attributes have been replaced by Traits. See the [Traits documentation](#) for a good overview, but in short they give Python some of the benefits of statically typed languages like Java, without much of the mess that a fully statically typed language incurs. Their power doesn't see a whole lot of use internal to the cytosflow package, but they make writing the GUI layer a **whole** lot easier.
- The design of the views are strongly influenced by best-in-class statistics visualization packages from R: `lattice` and `ggplot`. If your data is `tidy`, then each experimental variable you want to plot differently so you can compare them is called a "facet". For example, a facet might be a timepoint or an inducer level (ie an experimental condition); it might also be some metadata added by an operation (ie gate membership or bin). Then, you plot the dataset broken down in various ways by its facets: for example, each timepoint might be put on its own subplot, while each Dox level might be represented by a different color. (Check out the [example Jupyter notebook](#) if this is confusing.

Writing new cytosflow modules

Creating a new module in `cytosflow` ranges from easy (for simple things) to quite involved. I like to think that `cytosflow` follows the Perl philosophy of making the easy jobs easy and the hard jobs possible.

With that in mind, let's look at the process of creating a new module, progressing from easy to involved.

Basics

All the APIs (both public and internal) are built using `Traits`. For operations and views in the `cytosflow` package, basic working knowledge of `traits` is sufficient. For GUI work, trait notification is used extensively.

The GUI wrappers also use `TraitsUI` because it makes wrapping traits with UI elements easy. Have a look at documentation for views, handlers, and of course the trait editors.

Finally, there are some principles that I expect new modules contributed to this codebase to follow:

- **Check for pathological errors and fail early.** I really dislike the tendency of a number of libraries to fail with cryptic errors. (I'm looking at you, `pandas`.) Check for obvious errors and raise a

`CytoflowOpError` or `CytoflowViewError`). If the problem is non-fatal, warn with `CytoflowOpWarning` or `CytoflowViewWarning`. The GUI will also know how to handle these gracefully.

- **Separate experimental data from module state.** There are workflows that require estimating parameters with one data set, then applying those operations to another. Make sure your module supports them.
- **Estimate slow but apply fast.** The GUI re-runs modules' `apply()` methods automatically when parameters change. That means that the `apply()` method must run very quickly.
- **Write tests.** I hate writing unit tests, but they are indispensable for catching bugs. Even in a view's tests are just smoke tests ("It plots something and doesn't crash"), that's better than nothing.

New operations

The base operation API is fairly simple:

- `id` - a required `traits.Constant` containing the UID of the operation
- `friendly_id` - a required `traits.Constant` containing a human-readable name
- `apply()` - takes an `Experiment` and returns a new `Experiment` with the operation applied. `apply()` should `clone()` the old experiment, then modify and return the clone. Don't forget to add the operation to the new `Experiment`'s `history`. A good example of a simple operation is `RatioOp`.

Note: Be aware of the `deep` parameter for `clone()`! It defaults to `True` – **only** set it to `False` if you are only adding columns to the `Experiment`.

Note: The resulting `Experiment` must have a `pandas.RangeIndex` for its index – several modules rely on this! If you add or remove events from the `Experiment`, make sure you call `pandas.DataFrame.reset_index` on `Experiment.data` to make the index monotonic again.

- `estimate()` - You may also wish to estimate the operation's parameters from a data set. Crucially, this *might not be the data set you are eventually applying the operation to*. If your operation relies on estimating parameters, implement the `estimate()` function. This may involve selecting a subset of the data in the `Experiment`, or it may involve loading in an additional FCS file. A good example of the former is `KMeansOp`; a good example of the latter is `AutofluorescenceOp`.

You may also find that you wish to estimate different parameter sets for different sub-populations (as encoded in the `Experiment`'s `conditions`.) By convention, the conditions that you want to estimate different parameters for are passed using a trait named `by`, which takes a list of conditions and groups the data by unique combinations of those conditions' values before estimating a parameter set for each. Look at `KMeansOp` for an example of this behavior.

- `default_view()` - for some operations, you may want to provide a default view. This view may just be a base view parameterized in a particular way (like the `HistogramView` that is the default view of `BinningOp`), or it may be a visualization of the parameters estimated by the `estimate()` function (like the default view of `AutofluorescenceOp`.) In many cases, the view returned by this function is linked back to the operation that produced it.

New views

The base view API is very simple:

- *id* - a required `traits.Constant` containing the UID of the operation
- *friendly_id* - a required `traits.Constant` containing a human-readable name
- *plot()* - plots *Experiment*.

As I wrote more views, however, I noticed a significant amount of code duplication, which led to bugs and lost time. So, I refactored the view code to use a short hierarchy of classes for particular types of views. You can take advantage of this functionality when writing a new module, or you can simply derive your new view from `traits.HasTraits` and implement the simple API above.

The view base classes are:

- *BaseView* – implements a view with row, column and hue facets. After setting up the facet grid, it calls the derived class's `_grid_plot()` to actually do the plotting. `plot()` also has parameters to set the plot style, legend, axis labels, etc.
- *BaseDataView* – implements a view that plots an *Experiment*'s data (as opposed to a statistic.) Includes functionality for subsetting the data before plotting, and determining axis limits and scales.
- *Base1DView* – implements a 1-dimensional data view. See *HistogramView* for an example.
- *Base2DView* – implements a 2-dimensional data view. See *ScatterplotView* for an example.
- *BaseNDView* – implements an N-dimensional data view. See *RadvizView* for an example.
- *BaseStatisticsView* – implements a view that plots a statistic from an *Experiment* (as opposed to the underlying data.) These views have a “primary” *variable*, and can be subset as well.
- *Base1DStatisticsView* – implements a view that plots one dimension of a statistic. See *BarChartView* for an example.
- *Base2DStatisticsView* – implements a view that plots two dimensions of a statistic. See *Stats2DView* for an example.

New GUI operations

Wrapping an operation for the GUI sometimes feels like it requires more work than writing the operation in the first place. A new operation requires at least five things:

- A class derived from the underlying *cytosflow* operation. The derived operation should be placed in a module in `cytosflowgui.workflow.operations`, and it should:
 - Inherit from *WorkflowOperation* to add support for various GUI event-handling bits (as well as the underlying *cytosflow* class, if appropriate)
 - Override attributes in the underlying *cytosflow* class to add metadata that tells the GUI how to react to changes. (See the *IWorkflowOperation* docstring for details.)
 - Provide an implementation of `get_notebook_code()`, to support exporting to Jupyter notebook.
 - If the module has an `estimate()` method, then implement `clear_estimate()` to clear those parameters.
 - If the module has a `default_view()` method, it should be overridden to return a GUI-enabled view class (see below.)
 - Optionally, override `should_apply()` and `should_clear_estimate()` to only do expensive operations when necessary.

- Serialization logic. *cytoflow* uses *camel* for sane YAML serialization; a dumper and loader for the class must save and load the operation’s parameters. These should also go in *cytoflowgui.workflow.operations*.
- A handler class that defines the default `traits.View` and provides supporting logic. This class should be derived from *OpHandler* and should be placed in *cytoflowgui.op_plugins*.
- A plugin class derived from *envisage.plugin.Plugin* and implementing *IOperationPlugin*. It should also derive from *cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin*, which adds support for online help.
- Tests. Because of *cytoflowgui*’s split between processes, testing GUI logic for modules can be kind of a synchronization nightmare. This is by design – because the same synchronization issues are present when running the software. See the *cytoflowgui/tests* directory for (many) examples.
- (Optionally) default view implementations. If the operation has a default view, you should wrap it as well (in the operation plugin module.) See the next section for details.

New GUI views

A new view operation requires at least five things:

- A class derived from the underlying *cytoflow* view. The derived view should be placed in *cytoflowgui.workflow.views*
 - Inherit from *WorkflowView* or one of its children to add support for various GUI event-handling bits
 - Override attributes in the underlying *cytoflow* class to add metadata that tells the GUI how to react to changes. (See the *IWorkflowView* docstring for details.)
 - Provide an implementation of `get_notebook_code()`, to support exporting to Jupyter notebook.
 - Optionally, override `should_plot()` to only plot when necessary.
- Serialization logic. *cytoflow* uses *camel* for sane YAML serialization; a dumper and loader for the class must save and load the operation’s parameters. These should also go in *cytoflowgui.workflow.views*.
- A handler class that defines the default `traits.View` and provides supporting logic. This class should be derived from *ViewHandler* and should be placed in *cytoflowgui.view_plugins*.
- A plugin class derived from *envisage.plugin.Plugin* and implementing *IViewPlugin*. It should also derive from *cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin*, which adds support for online help.
- Plot parameters. The parameters to a view’s `plot()` method are stored in an object that derives from *BasePlotParams* or one of its descendants. Choose data types that are appropriate for the view, and include a default view named `view_params_view` in the handler class. Don’t forget to write serialization code for it as well!
- Tests. Because of *cytoflowgui*’s split between processes, testing GUI logic for modules can be kind of a synchronization nightmare. This is by design – because the same synchronization issues are present when running the software. See the *cytoflowgui/tests* directory for (many) examples. In the case of a view, most of these are “smoke tests”, testing that the view doesn’t crash with various sets of parameters.

Note: Why the split between the classes in *cytoflowgui.op_modules*, *cytoflowgui.workflow.operations*, *cytoflowgui.view_modules*, and *cytoflowgui.workflow.views*? It’s because of the fact that *cytoflow* runs in two processes – one handles the GUI and the other operates on the workflow. If you load a module containing UI bits, even if you don’t explicitly create a *QGuiApplication*, it starts an event loop. That’s why older versions of *Cytoflow*

had two icons in the task bar when running on a Mac. You know how sometimes you go to fix a “little” bug and end up re-writing the whole program? This was one of those times....

Creating multiple plots

TODO: Describe facets / by / enum_plots / plot_name

Also add examples??

Frequently Asked Questions

These are some questions that are commonly asked about Cytoflow’s modules, especially by new users.


Cytoflow seems like it could be useful for analyzing data other than FCS files. Can I do that?

Maybe! Quite a few portions of the package assume that the data is from a flow cytometer. This is quite explicitly baked into the point-and-click GUI; less so with the Python modules. If you want to give it a go (and are using the Python modules), have a look at the `Experiment` class. You’ll have to build one of those manually – instead of creating one with `ImportOp` – and you’ll obviously need to avoid modules that explicitly expect other FCS files to parameterize them. But otherwise, once you’ve got a fully-formed `Experiment`, you should (probably) be fine to use (most of) the rest of the package(?) Let me know how you get on.

How do I save the plots I’ve made with the Python modules?

`cytoflow` uses the `matplotlib.pyplot` stateful interface for making plots. Thus, there are two ways to save the plots. The first is to use the `matplotlib.pyplot.savefig()` – see the `matplotlib` documentation for more details. (This option gives you the greatest flexibility in format, resolution, etc.)

If you are using the Jupyter notebook, the second is to replace the `%matplotlib inline` magic with `%matplotlib notebook`. Then, when you make a plot, the plot remains interactive. Here’s an example:

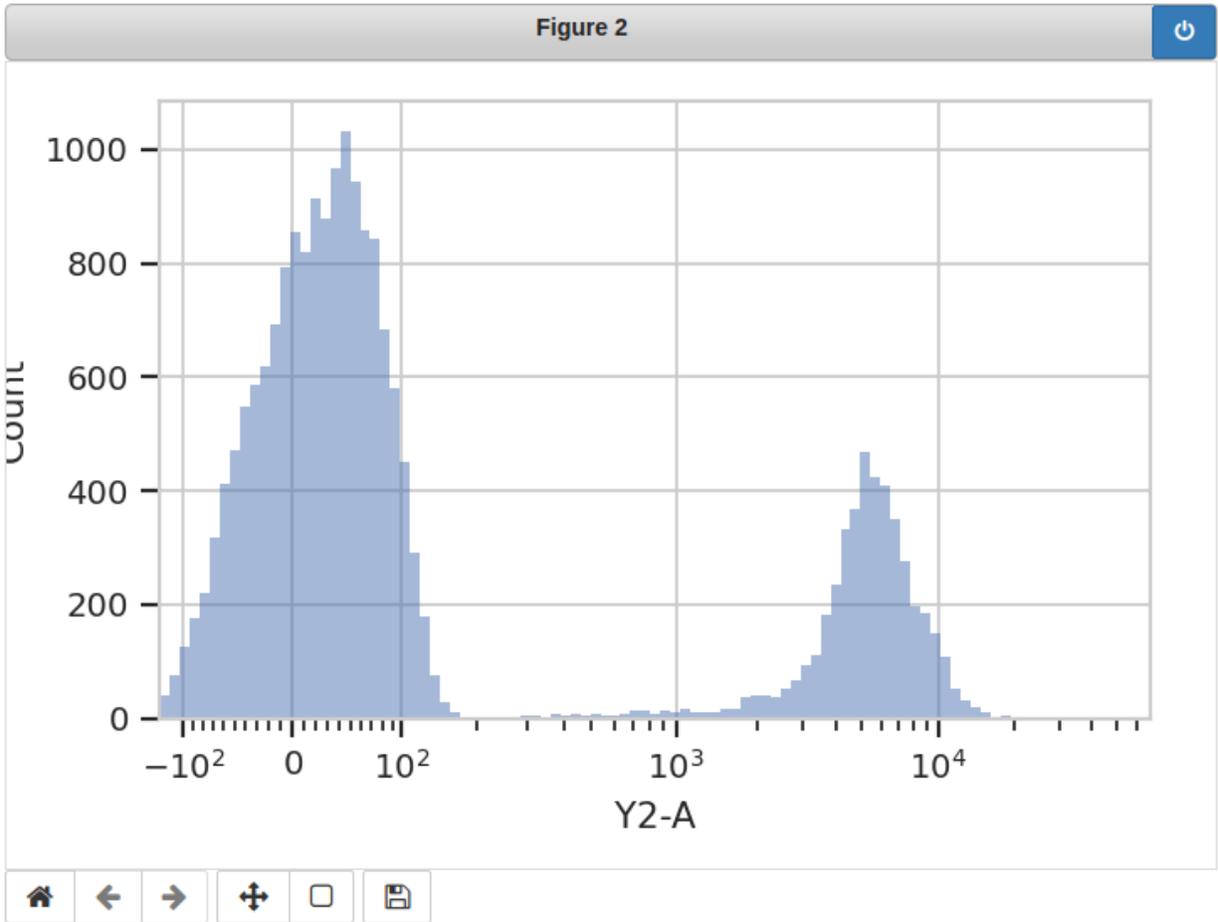

Click the “disk” icon to download a copy of the image.

cytoflow package

cytoflow

cytoflow is a package for quantitative, reproducible analysis of flow cytometry data.

Written by Brian Teague, bpteague@gmail.com

Copyright Massachusetts Institute of Technology 2015-2018

Copyright Brian Teague 2018-2021

Subpackages

cytoflow.operations package

cytoflow.operations

This package contains all *cytoflow* operations – classes implementing *IOperation* whose *IOperation.apply* function takes an *Experiment* and returns an *Experiment*.

Submodules

cytoflow.operations.autofluorescence

The *cytoflow.operations.autofluorescence* module contains two classes:

AutofluorescenceOp – corrects an *Experiment* for autofluorescence

AutofluorescenceDiagnosticView – a diagnostic to make sure that *AutofluorescenceOp* estimated its parameters correctly.

class `cytoflow.operations.autofluorescence.AutofluorescenceOp`

Bases: `traits.has_traits.HasStrictTraits`

Apply autofluorescence correction to a set of fluorescence channels.

The *estimate* function loads a separate FCS file (not part of the input *Experiment*) and computes the untransformed median and standard deviation of the blank cells. Then, *apply* subtracts the median from the experiment data.

To use, set the *blank_file* property to point to an FCS file with unstained or nonfluorescing cells in it; set the *channels* property to a list of channels to correct.

apply also adds the *af_median* and *af_stdev* metadata to the corrected channels, representing the median and standard deviation of the measured blank distributions.

channels

The channels to correct.

Type List(Str)

blank_file

The filename of a file with “blank” cells (not fluorescent). Used to *estimate* the autofluorescence.

Type File

blank_file_conditions

Occasionally, you’ll need to specify the experimental conditions that the blank tube was collected under (to apply the operations in the history.) Specify them here.

Type Dict

Examples

Create a small experiment:

```
>>> import cytosflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "tasbe/rby.fcs")]
>>> ex = import_op.apply()
```

Create and parameterize the operation


```
>>> af_op = flow.AutofluorescenceOp()
>>> af_op.channels = ["Pacific Blue-A", "FITC-A", "PE-Tx-Red-YG-A"]
>>> af_op.blank_file = "tasbe/blank.fcs"
```

Estimate the model parameters

```
>>> af_op.estimate(ex)
```

Plot the diagnostic plot

```
>>> af_op.default_view().plot(ex)
```

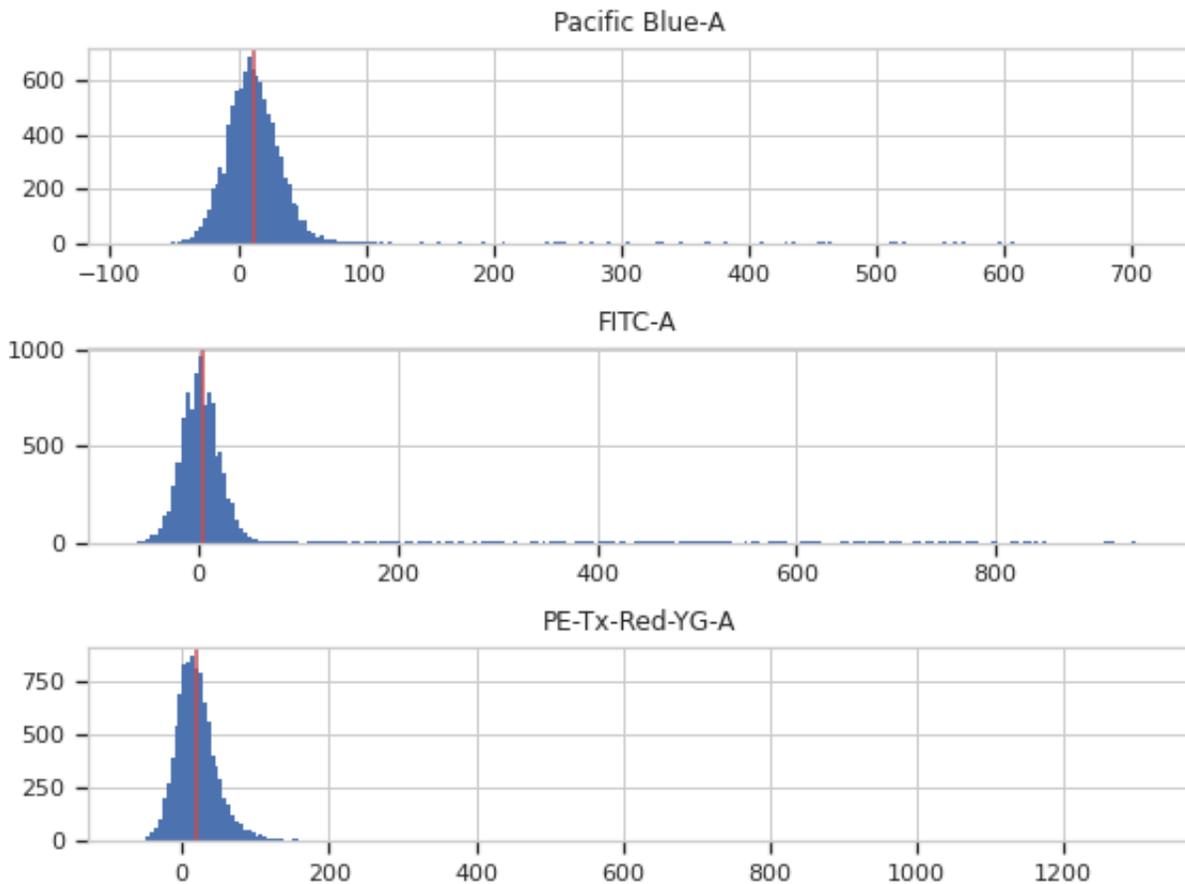

Apply the operation to the experiment

```
>>> ex2 = af_op.apply(ex)
```

estimate(*experiment*, *subset=None*)

Estimate the autofluorescence from *blank_file* in channels specified in *channels*.

Parameters

- **experiment** (*Experiment*) – The experiment to which this operation is applied
- **subset** (*Str (default = “”)*) – An expression that specifies the events used to compute the autofluorescence

apply(*experiment*)

Applies the autofluorescence correction to channels in an experiment.

Parameters **experiment** (*Experiment*) – the experiment to which this op is applied

Returns

a new experiment with the autofluorescence median subtracted. The corrected channels have the following metadata added to them:

- **af_median** : Float The median of the non-fluorescent distribution
- **af_stdev** : Float The standard deviation of the non-fluorescent distribution

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot to see if the autofluorescence estimation is working.

Returns An diagnostic view, call *AutofluorescenceDiagnosticView.plot* to see the diagnostic plots

Return type *IView*

class cytoflow.operations.autofluorescence.**AutofluorescenceDiagnosticView**

Bases: *traits.has_traits.HasStrictTraits*

Plots a histogram of each channel, and its median in red. Serves as a diagnostic for the autofluorescence correction.

op

The *AutofluorescenceOp* whose parameters we’re viewing. Set automatically if you created the instance using *AutofluorescenceOp.default_view*.

Type Instance(*AutofluorescenceOp*)

plot(*experiment*, ***kwargs*)

Plot a faceted histogram view of a channel

cytoflow.operations.base_op_views

Base classes for *IOperation* default views:

OpView – a view that has an operation, *OpView.op*, as an attribute.

Op1DView – an *OpView* that has a *Op1DView.channel* attribute and its attendant *Op1DView.scale*. This class overrides *Base1DView* to delegate those attributes to *OpView.op*.

Op2DView – an *OpView* that has *Op2DView.xchannel* (and *Op2DView.xscale*) and *Op2DView.ychannel* (and *Op2DView.yscale*). This class overrides *Base2DView* to delegate those attributes to *OpView.op*.

ByView – an *OpView* that can plot various plots depending on what is passed to *ByView.plot*’s *plot_name* parameter.

AnnotatingView – An *IView* that plots an underlying data plot, then plots some annotations on top of it.

class `cytoflow.operations.base_op_views.OpView`

Bases: `cytoflow.views.base_views.BaseDataView`

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type `Instance(IOperation)`

class `cytoflow.operations.base_op_views.Op1DView`

Bases: `cytoflow.operations.base_op_views.OpView`, `cytoflow.views.base_views.Base1DView`

channel

The channel this view is viewing. If you created the view using *default_view*, this is already set.

Type `Str`

scale

The way to scale the x axes. If you created the view using *default_view*, this may be already set.

Type `{‘linear’, ‘log’, ‘logicle’}`

class `cytoflow.operations.base_op_views.Op2DView`

Bases: `cytoflow.operations.base_op_views.OpView`, `cytoflow.views.base_views.Base2DView`

xchannel

The channels to use for this view’s X axis. If you created the view using *default_view*, this is already set.

Type `Str`

ychannel

The channels to use for this view’s Y axis. If you created the view using *default_view*, this is already set.

Type `Str`

xscale

The way to scale the x axis. If you created the view using *default_view*, this may be already set.

Type `{‘linear’, ‘log’, ‘logicle’}`

yscale

The way to scale the y axis. If you created the view using *default_view*, this may be already set.

Type `{‘linear’, ‘log’, ‘logicle’}`

class `cytoflow.operations.base_op_views.ByView`

Bases: `cytoflow.operations.base_op_views.OpView`

A view that can plot various plots based on the *plot_name* parameter of *plot*.

facets

A read-only list of the conditions used to facet this view.

Type `List(Str)`

by

A read-only list of the conditions used to group this view’s data before plotting.

Type `List(Str)`

enum_plots(*experiment*)

Returns an iterator over the possible plots that this View can produce. The values returned can be passed to the `plot_name` keyword of `plot`.

Parameters `experiment` (*Experiment*) – The *Experiment* that will be producing the plots.

plot(*experiment*, ***kwargs*)

Make the plot.

Parameters `plot_name` (*Str*) – If this *IView* can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

class `cytoflow.operations.base_op_views.By1DView`

Bases: `cytoflow.operations.base_op_views.ByView`, `cytoflow.operations.base_op_views.Op1DView`

class `cytoflow.operations.base_op_views.By2DView`

Bases: `cytoflow.operations.base_op_views.ByView`, `cytoflow.operations.base_op_views.Op2DView`

class `cytoflow.operations.base_op_views.NullView`

Bases: `cytoflow.views.base_views.BaseDataView`

An *IView* that doesn't actually do any plotting.

class `cytoflow.operations.base_op_views.AnnotatingView`

Bases: `cytoflow.views.base_views.BaseDataView`

A *IView* that plots an underlying data plot, then plots some annotations on top of it. See `gaussian.GaussianMixture1DView` for an example. By default, it assumes that the annotations are to be plotted in the same color as the view's `huefacet`, and sets `huefacet` accordingly if the annotation isn't already set to a different facet.

Note: The `annotation_facet` and `annotation_plot` parameters that the `plot` method consumes are only for internal use, which is why they're not documented in the `plot` docstring.

plot(*experiment*, ***kwargs*)

Parameters `color` (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.

cytoflow.operations.bead_calibration

The `bead_calibration` module contains two classes:

`BeadCalibrationOp` – calibrates the raw measurements in a *Experiment* using fluorescent particles.

`BeadCalibrationDiagnostic` – a diagnostic view to make sure that `BeadCalibrationOp` correctly estimated its parameters.

class `cytoflow.operations.bead_calibration.BeadCalibrationOp`

Bases: `traits.has_traits.HasStrictTraits`

Calibrate arbitrary channels to molecules-of-fluorophore using fluorescent beads (eg, the Spherotech RCP-30-5A rainbow beads.)

Computes a log-linear calibration function that maps arbitrary fluorescence units to physical units (ie molecules equivalent fluorophore, or *MEF*).

To use, set `beads_file` to an FCS file containing events collected *using the same cytometer settings as the data you're calibrating*. Specify which beads you ran by setting `beads` to match one of the values of `BeadCalibrationOp.BEADS`; and set `units` to which channels you want calibrated and in which units. Then, call `estimate` and check the peak-finding with `BeadCalibrationDiagnostic.plot`. If the peak-finding is wacky, try adjusting `bead_peak_quantile` and `bead_brightness_threshold`. When the peaks are successfully identified, call `apply` to scale your experimental data set.

If you can't make the peak finding work, please submit a bug report!

This procedure works best when the beads file is very clean data. It does not do its own gating (maybe a future addition?) In the meantime, I recommend gating the *acquisition* on the FSC/SSC channels in order to get rid of debris, cells, and other noise.

Finally, because you can't have a negative number of fluorescent molecules (MEFLs, etc) (as well as for math reasons), this module filters out negative values.

units

A dictionary specifying the channels you want calibrated (keys) and the units you want them calibrated in (values). The units must be keys of the `beads` attribute.

Type Dict(Str, Str)

beads_file

A file containing the FCS events from the beads.

Type File

beads

The beads' characteristics. Keys are calibrated units (ie, MEFL or MEAP) and values are ordered lists of known fluorophore levels. Common values for this dict are included in `BeadCalibrationOp.BEADS`.

Type Dict(Str, List(Float))

bead_peak_quantile

The quantile threshold used to choose bead peaks.

Type Int (default = 80)

bead_brightness_threshold

How bright must a bead peak be to be considered?

Type Float (default = 100)

bead_brightness_cutoff

If a bead peak is above this, then don't consider it. Takes care of clipping saturated detection. Defaults to 70% of the detector range.

Type Float

bead_histogram_bins

The number of bins to use in computing the bead histogram. Tweak this if the peak find is having difficulty, or if you have a small number of events

Type Int (default = 512)

force_linear

A linear fit in log space doesn't always go through the origin, which means that the calibration function isn't strictly a multiplicative scaling operation. Set `force_linear` to force the such behavior. Keep an eye on the diagnostic plot, though, to see how much error you're introducing!

Type Bool (default = False)

Notes

The peak finding is rather sophisticated.

For each channel, a 256-bin histogram is computed on the log-transformed bead data, and then the histogram is smoothed with a Savitzky-Golay filter (with a window length of 5 and a polynomial order of 1).

Next, a wavelet-based peak-finding algorithm is used: it convolves the smoothed histogram with a series of wavelets and looks for relative maxima at various length-scales. The parameters of the smoothing algorithm were arrived at empirically, using beads collected at a wide range of PMT voltages.

Finally, the peaks are filtered by height (the histogram bin has a quantile greater than *bead_peak_quantile*) and intensity (brighter than *bead_brightness_threshold*).

How to convert from a series of peaks to mean equivalent fluorochrome? If there's one peak, we assume that it's the brightest peak. If there are two peaks, we assume they're the brightest two. If there are $n \geq 3$ peaks, we check all the contiguous n -subsets of the bead intensities and find the one whose linear regression (in log space!) has the smallest norm (square-root sum-of-squared-residuals.)

There's a slight subtlety in the fact that we're performing the linear regression in log-space: if the relationship in log₁₀-space is $Y=aX + b$, then the same relationship in linear space is $x = 10^{**X}$, $y = 10^{**y}$, and $y = (10^{**b}) * (x ** a)$.

Note: Adding a new set of beads is easy! Please don't add them directly to *BEADS*, though – instead, add them to *beads.csv*, then run the *cytoflow.scripts.parse_beads* script to convert it into a dict.

Examples

Create a small experiment:

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "tasbe/rby.fcs")]
>>> ex = import_op.apply()
```

Create and parameterize the operation

```
>>> bead_op = flow.BeadCalibrationOp()
>>> beads = 'RCP-30-5A Lot AA01, AA02, AA03, AA04, AB01, AB02, AC01 & GAA01-R'
>>> bead_op.beads = flow.BeadCalibrationOp.BEADS[beads]
>>> bead_op.units = {"Pacific Blue-A" : "MEBFP",
...                 "FITC-A" : "MEFL",
...                 "PE-Tx-Red-YG-A" : "MEPTR"}
>>>
>>> bead_op.beads_file = "tasbe/beads.fcs"
```


Estimate the model parameters

```
>>> bead_op.estimate(ex)
```

Plot the diagnostic plot

```
>>> bead_op.default_view().plot(ex)
```

Apply the operation to the experiment

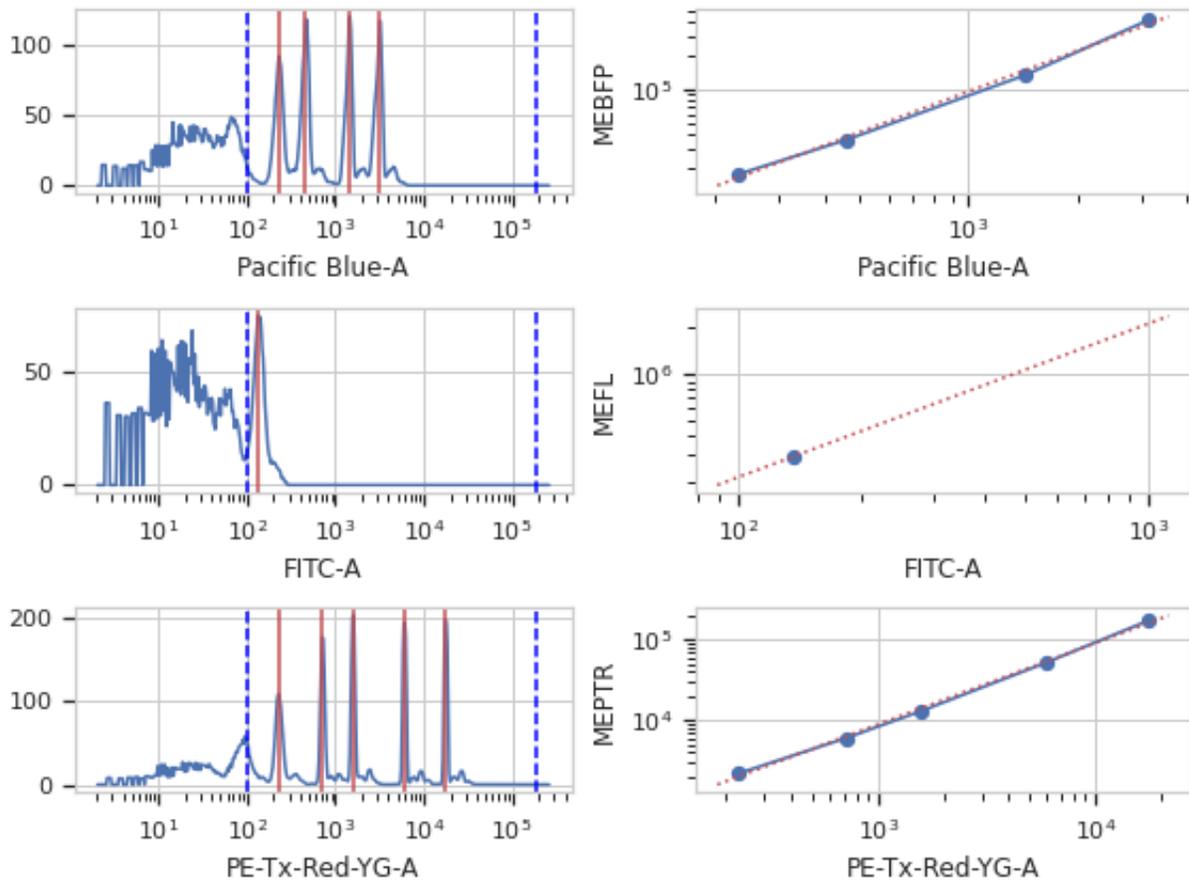

```
>>> ex = bead_op.apply(ex)
```

estimate(*experiment*)

Estimate the calibration coefficients from the beads file.

Parameters **experiment** (*Experiment*) – The experiment used to compute the calibration.

apply(*experiment*)

Applies the bleedthrough correction to an experiment.

Parameters **experiment** (*Experiment*) – the experiment to which this operation is applied

Returns

A new experiment with the specified channels calibrated in physical units. The calibrated channels also have new metadata:

- **bead_calibration_fn** [Callable (*pandas.Series* → *pandas.Series*)] The function to calibrate raw data to bead units
- **bead_units** [Str] The units this channel was calibrated to

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot to see if the peak finding is working.

Returns An diagnostic view, call *BeadCalibrationDiagnostic.plot* to see the diagnostic plots

Return type *IView*

```

BEADS = {'ACP 30-2K': {'MEAP': [7880.0, 17400.0, 53100.0, 130000.0, 208000.0]},
'RCP-30-5 Lot AA01, AB01, AB02, AC01 & AD01': {'MEAP': [6720.0, 17962.0, 30866.0,
51704.0, 146080.0], 'MECY': [12901.0, 36837.0, 76621.0, 261671.0, 1069858.0],
'MEFL': [6028.0, 17493.0, 35674.0, 126907.0, 290983.0], 'MEPE': [4974.0, 13118.0,
26757.0, 94930.0, 250470.0], 'MEPTR': [2198.0, 6063.0, 12887.0, 51686.0, 170219.0]},
'RCP-30-5 Lot AM02, AM01, AL01, AH01, AG01, AF01 & AD03': {'MEA700':
[7850.64102564103, 26574.358974359, 87058.33333333333, 232771.153846154,
428898.076923077], 'MEA750': [643.319414830418, 1682.85038466727, 4905.43254465399,
15637.5278759487, 44664.1560269625], 'MEAP': [2395.0, 8273.0, 27652.0, 75669.0,
145428.0], 'MECY5.5': [8737.0, 28177.0, 93996.0, 334087.0, 1023447.0], 'MEFL':
[4447.0, 14227.0, 46322.0, 133924.0, 276897.0], 'MEKO': [4100.1862606147,
13503.2020463521, 45019.6494865316, 152691.355293162, 391037.895005993], 'MEPB':
[902.826150264251, 2543.25777035562, 7577.3103315121, 19902.1552759773,
35490.1854343577], 'MEPCY7': [4447.52977431211, 12826.6344100731, 41676.365575392,
149440.701418692, 474797.252391984], 'MEPE': [3236.0, 10754.0, 34842.0, 104483.0,
245894.0], 'METR': [1486.0, 5112.0, 17664.0, 60371.0, 179787.0]}, 'RCP-30-5A
(Euroflow) Lot EAK01, EAG01, EAE01 & EAF01': {'MEAP': [1366.0, 4706.0, 14822.0,
58161.0, 140920.0, 204810.0, 280646.0], 'MEAPCY7': [12540.2912310804,
27790.424415523, 57114.7530172427, 137792.795419592, 245420.419831163,
312870.988997371, 387104.388350457], 'MEAXL700': [1180.89572037678,
3930.96580785077, 11270.6100091203, 45502.2217551306, 109122.081384077,
151781.075700287, 237988.013854553], 'MEBFP': [2584.06901535744, 5291.27272439487,
11909.3205931143, 38804.9157590269, 107470.790614424, 359515.748179449,
736906.777253776], 'MECSB': [3827.07306877147, 6410.85503814999, 12405.91715676,
37097.3178176766, 92487.7710023634, 267142.304767532, 499972.639106986], 'MECY':
[1276.0, 3603.0, 9520.0, 35518.0, 102755.0, 328185.0, 1052496.0], 'MEFL': [806.0,
2159.0, 5640.0, 19900.0, 52630.0, 172155.0, 345870.0], 'MEPCY7': [9726.6114174626,
25173.4200339912, 57085.1373522142, 136728.333019744, 324682.702797253], 'MEPE':
[409.0, 1250.0, 3428.0, 12229.0, 34294.0, 113118.0, 256134.0], 'MEPTR': [171.0,
538.0, 1514.0, 5659.0, 16972.0, 64615.0, 183897.0]}, 'RCP-30-5A (Euroflow) Lot EAM02
& EAM01': {'MEAP': [736.0, 1892.0, 4804.0, 14248.0, 42425.0, 113026.0, 227044.0],
'MEAPCY7': [558.0, 1417.0, 3224.0, 8309.0, 20779.0, 48391.0, 89183.0], 'MEAXL700':
[682.0, 1276.0, 2352.0, 4724.0, 9284.0, 17217.0, 26930.0], 'MEBFP': [1295.0, 2398.0,
4884.0, 13920.0, 34027.0, 95282.0, 172500.0], 'MECSB': [480.0, 698.0, 1192.0,
2947.0, 6546.0, 15893.0, 27382.0], 'MECY': [998.0, 3064.0, 8614.0, 28030.0, 90459.0,
298273.0, 849431.0], 'MEFL': [789.0, 1896.0, 4872.0, 15619.0, 47116.0, 143912.0,
333068.0], 'MEPCY7': [106.0, 343.0, 1088.0, 4215.0, 15949.0, 62905.0, 208319.0],
'MEPE': [507.0, 1204.0, 3171.0, 10440.0, 34385.0, 114122.0, 311207.0], 'MEPTR':
[187.0, 543.0, 1536.0, 5423.0, 17825.0, 63989.0, 207649.0]}, 'RCP-30-5A Lot AA01,
AA02, AA03, AA04, AB01, AB02, AC01 & GAA01-R': {'MEAP': [578.0, 2433.0, 6720.0,
17962.0, 30866.0, 51704.0, 146080.0], 'MEAPCY7': [718.0, 1920.0, 5133.0, 9324.0,
14210.0, 26735.0], 'MEBFP': [700.0, 1705.0, 4262.0, 17546.0, 35669.0, 133387.0,
412089.0], 'MECSB': [179.0, 400.0, 993.0, 3203.0, 6083.0, 17777.0, 36331.0], 'MECY':
[1437.0, 4693.0, 12901.0, 36837.0, 76621.0, 261671.0, 1069858.0], 'MEFL': [692.0,
2192.0, 6028.0, 17493.0, 35674.0, 126907.0, 290983.0], 'MEPCY7': [32907.0,
107787.0, 503797.0], 'MEPE': [505.0, 1777.0, 4974.0, 13118.0, 26757.0, 94930.0,
250470.0], 'MEPTR': [207.0, 750.0, 2198.0, 6063.0, 12887.0, 51686.0, 170219.0]},
'RCP-30-5A Lot AC02, AC03 & AD01': {'MEAP': [1184.0, 4024.0, 8892.0, 20919.0,
35336.0, 62371.0, 160356.0], 'MEAPCY7': [1638.44517911143, 4232.87970031999,
8021.74368319802, 14091.8060342384, 27002.3850136509], 'MEAmC': [689.818391446723,
1645.66379392412, 4353.99728581043, 17956.9358902402, 37196.3751279619,
136964.361513719, 422642.751819192], 'MECY': [1434.98342378079, 4725.12552939372,
12977.4579084514, 34975.0986132135, 71893.2990690699, 258366.215367105,
1120607.11147369], 'MEFL': [694.316757280561, 2095.54714141499, 6077.97998121964,
18079.7185767491, 37488.3221945023, 127548.70589779, 292408.003430039], 'MEPB':
[179.490842861769, 399.130271822164, 1004.33041842402, 3326.09220035309,
6280.9781554728, 18181.900886873, 37446.4126347345], 'MEPCY7': [145.580421939,
31336.9778664833, 107223.701409309, 519777.268051615], 'MEPE': [525.988079665053,
1735.72870920068, 5023.48980798513, 13251.1367386049, 27327.3892526052,
96552.680798141, 259880.668965796], 'MEPTR': [218.12305864236, 737.206689077331,

```

are:

- Spherotech ACP 30-2K
- Spherotech RCP-30-5A Lot AN04, AN03, AN02, AN01, AM02, AM01, AL01, AK04, AK03 & AK02**
- Spherotech RCP-30-5A (Euroflow) Lot EAM02 & EAM01
- Sphreotech RCP-30-5A (Euroflow) Lot EAK01, EAG01, EAE01 & EAF01
- Spherotech RCP-30-5A Lot AK01, AJ01, AH02, AH01, AF02, AF01, AD04 & AE01
- Spherotech RCP-30-5A Lot AG01
- Spherotech RCP-30-5A Lot AA01, AA02, AA03, AA04, AB01, AB02, AC01 & GAA01-R
- Spherotech RCP-30-5A Lot AC02, AC03 & AD01
- Spherotech RCP-30-5A Lot Z02 and Z03
- Spherotech RCP-30-5 Lot AA01, AB01, AB02, AC01 & AD01
- Spherotech RCP-30-5 Lot AM02, AM01, AL01, AH01, AG01, AF01 & AD03
- Spherotech RCP-60-5
- Spherotech URCP 38-2K
- Spherotech URCP 38-2K Lot AN01, AM01, AL02, AL01, AK03, AK02, AK01, AJ02 & AJ03
- Spherotech URCP 50-2K Lot AM01 & AJ01
- Spherotech URCP 50-2K

The Spherotech fluorophores labels and the laser / filter sets (that I know about) are:

- **MECSB** (Cascade Blue, 405 → 450/50)
- **MEBFP** (BFP, 405 → 530/40)
- **MEFL** (Fluroscein, 488 → 530/40)
- **MEPE** (Phycoerythrin, 488 → 575/25)
- **MEPTR** (PE-Texas Red, 488 → 613/20)
- **MECY** (Cy5, 488 → 680/30)
- **MEPCY7** (PE-Cy7, 488 → 750 LP)
- **MEAP** (APC, 633 → 665/20)
- **MEAPCY7** (APC-Cy7, 635 → 750 LP)

class cytoflow.operations.bead_calibration.BeadCalibrationDiagnostic

Bases: `traits.has_traits.HasStrictTraits`

A diagnostic view for `BeadCalibrationOp`.

Plots the smoothed histogram of the bead data; the peak locations; a scatter plot of the raw bead fluorescence values vs the calibrated unit values; and a line plot of the model that was computed. Make sure that the relationship is linear; if it's not, it likely isn't a good calibration!

op

The operation instance whose parameters we're plotting. Set automatically if you created the instance using `BeadCalibrationOp.default_view`.

Type Instance(`BeadCalibrationOp`)

`plot(experiment)`

Plots the diagnostic view.

Parameters `experiment` (*Experiment*) – The experiment used to create the diagnostic plot.

cytoflow.operations.binning

binning has two classes:

BinningOp – divides events in a channel into bins of equal width (after applying an optional scale)

BinningView – a default view to display the bins.

class `cytoflow.operations.binning.BinningOp`

Bases: `traits.has_traits.HasStrictTraits`

Bin data along an axis.

This operation creates equally spaced bins (in linear or log space) along an axis and adds a condition assigning each event to a bin. The value of the event's condition is the left end of the bin's interval in which the event is located.

name

The operation name. Used to name the new metadata field in the experiment that's created by `apply()`

Type `Str`

channel

The name of the channel along which to bin.

Type `Str`

scale

Make the bins equidistant along what scale?

Type `{"linear", "log", "logicle"}`

bin_width

The width of the bins. If *scale* is `log`, *bin_width* is in log-10 units; if *scale* is `logicle`, an error is thrown because the units are ill-defined.

Type `Float`

Examples

Create a small experiment:

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "tasbe/rby.fcs")]
>>> ex = import_op.apply()
```

Create and parameterize the operation


```
>>> bin_op = flow.BinningOp()
>>> bin_op.name = "Bin"
>>> bin_op.channel = "FITC-A"
>>> bin_op.scale = "log"
>>> bin_op.bin_width = 0.2
```

Apply the operation to the experiment

```
>>> ex2 = bin_op.apply(ex)
```

Plot the result

```
>>> bin_op.default_view().plot(ex2)
```

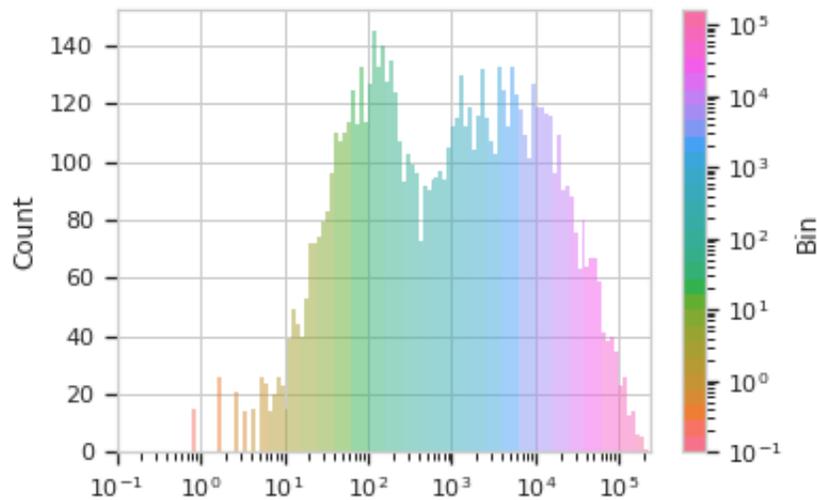

apply(*experiment*)

Applies the binning to an experiment.

Parameters *experiment* (*Experiment*) – the old experiment to which this op is applied

Returns A new experiment with a condition column named *name*, which contains the location of the left-most edge of the bin that the event is in.

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot to check the binning.

Returns An view instance, call *plot()* to plot the bins.

Return type *IView*

class cytoflow.operations.binning.**BinningView**

Bases: *cytoflow.operations.base_op_views.Op1DView*, *cytoflow.operations.base_op_views.AnnotatingView*, *cytoflow.views.histogram.HistogramView*

Plots a histogram of the current binning op. By default, the different bins are shown in different colors.

channel

The channel this view is viewing. If you created the view using *default_view*, this is already set.

Type Str

scale

The way to scale the x axes. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type Instance(*IOperation*)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type { 'linear', 'log', 'logicle' }

plot(*experiment*, ***kwargs*)

Plot the histogram.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0

- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **num_bins** (*int*) – The number of bins to plot in the histogram. Clipped to [100, 1000]
- **histtype** (*{‘stepfilled’, ‘step’, ‘bar’}*) – The type of histogram to draw. `stepfilled` is the default, which is a line plot with a color filled under the curve.
- **density** (*bool*) – If `True`, re-scale the histogram to form a probability density function, so the area under the histogram is 1.
- **linewidth** (*float*) – The width of the histogram line (in points)
- **linestyle** (*[‘-’ | ‘-.’ | ‘.’ | ‘:’ | “None”]*) – The style of the line to plot
- **alpha** (*float (default = 0.5)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.

cytosflow.operations.bleedthrough_linear

The `bleedthrough_linear` module contains two classes:

`BleedthroughLinearOp` – compensates for spectral bleedthrough in a `Experiment` using single-color controls

`BleedthroughLinearDiagnostic` – a diagnostic view to make sure that `BleedthroughLinearOp` correctly estimated its parameters.

class `cytosflow.operations.bleedthrough_linear.BleedthroughLinearOp`

Bases: `traits.has_traits.HasStrictTraits`

Apply matrix-based bleedthrough correction to a set of fluorescence channels.

This is a traditional matrix-based compensation for bleedthrough. For each pair of channels, the user specifies the proportion of the first channel that bleeds through into the second; then, the module performs a matrix multiplication to compensate the raw data.

The module can also estimate the bleedthrough matrix using one single-color control per channel.

This works best on data that has had autofluorescence removed first; if that is the case, then the autofluorescence will be subtracted from the single-color controls too.

To use, set up the *controls* dict with the single color controls; call *estimate* to parameterize the operation; check that the bleedthrough plots look good by calling *BleedthroughLinearDiagnostic.plot* on the *BleedthroughLinearDiagnostic* instance returned by *default_view*; and then *apply* on an *Experiment*.

controls

The channel names to correct, and corresponding single-color control FCS files to estimate the correction splines with. Must be set to use *estimate*.

Type Dict(Str, File)

spillover

The spillover “matrix” to use to correct the data. The keys are pairs of channels, and the values are proportions of spectral overlap. If ("channel1", "channel2") is present as a key, ("channel2", "channel1") must also be present. The module does not assume that the matrix is symmetric.

Type Dict(Tuple(Str, Str), Float)

control_conditions

Occasionally, you’ll need to specify the experimental conditions that the bleedthrough tubes were collected under (to apply the operations in the history.) Specify them here. The key is the channel name; they value is a dictionary of the conditions (same as you would specify for a *cytoflow.operations.import_op.Tube*)

Type Dict(Str, Dict(Str, Any))

Examples

Create a small experiment:

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "tasbe/rby.fcs")]
>>> ex = import_op.apply()
```

Correct for autofluorescence


```
>>> af_op = flow.AutofluorescenceOp()
>>> af_op.channels = ["Pacific Blue-A", "FITC-A", "PE-Tx-Red-YG-A"]
>>> af_op.blank_file = "tasbe/blank.fcs"
```

```
>>> af_op.estimate(ex)
>>> af_op.default_view().plot(ex)
```

```
>>> ex2 = af_op.apply(ex)
```

Create and parameterize the operation

```
>>> bl_op = flow.BleedthroughLinearOp()
>>> bl_op.controls = {'Pacific Blue-A' : 'tasbe/ebfp.fcs',
...                  'FITC-A' : 'tasbe/eyfp.fcs',
...                  'PE-Tx-Red-YG-A' : 'tasbe/mkate.fcs'}
```

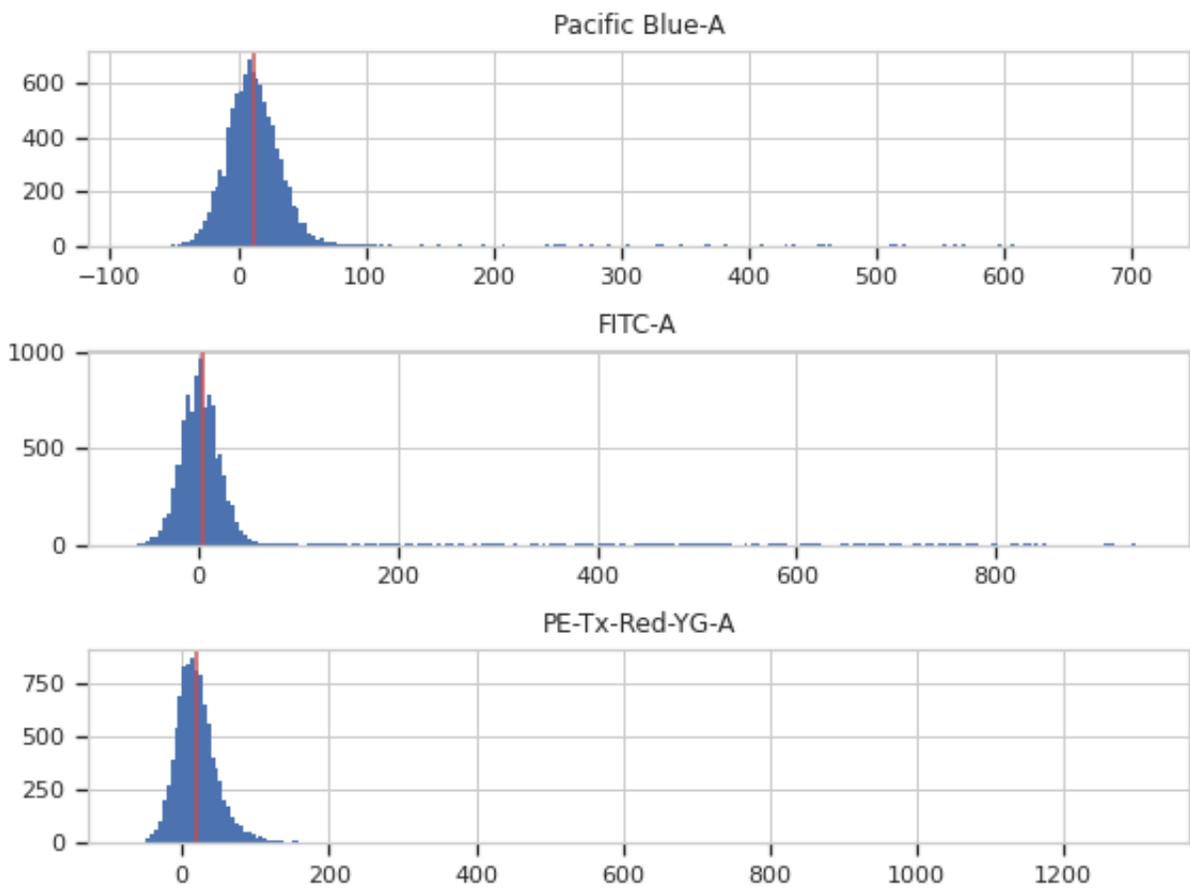


Estimate the model parameters

```
>>> bl_op.estimate(ex2)
```

Plot the diagnostic plot

Note: The diagnostic plots look really bad in the online documentation. They're better in a real-world example, I promise!

```
>>> bl_op.default_view().plot(ex2)
```

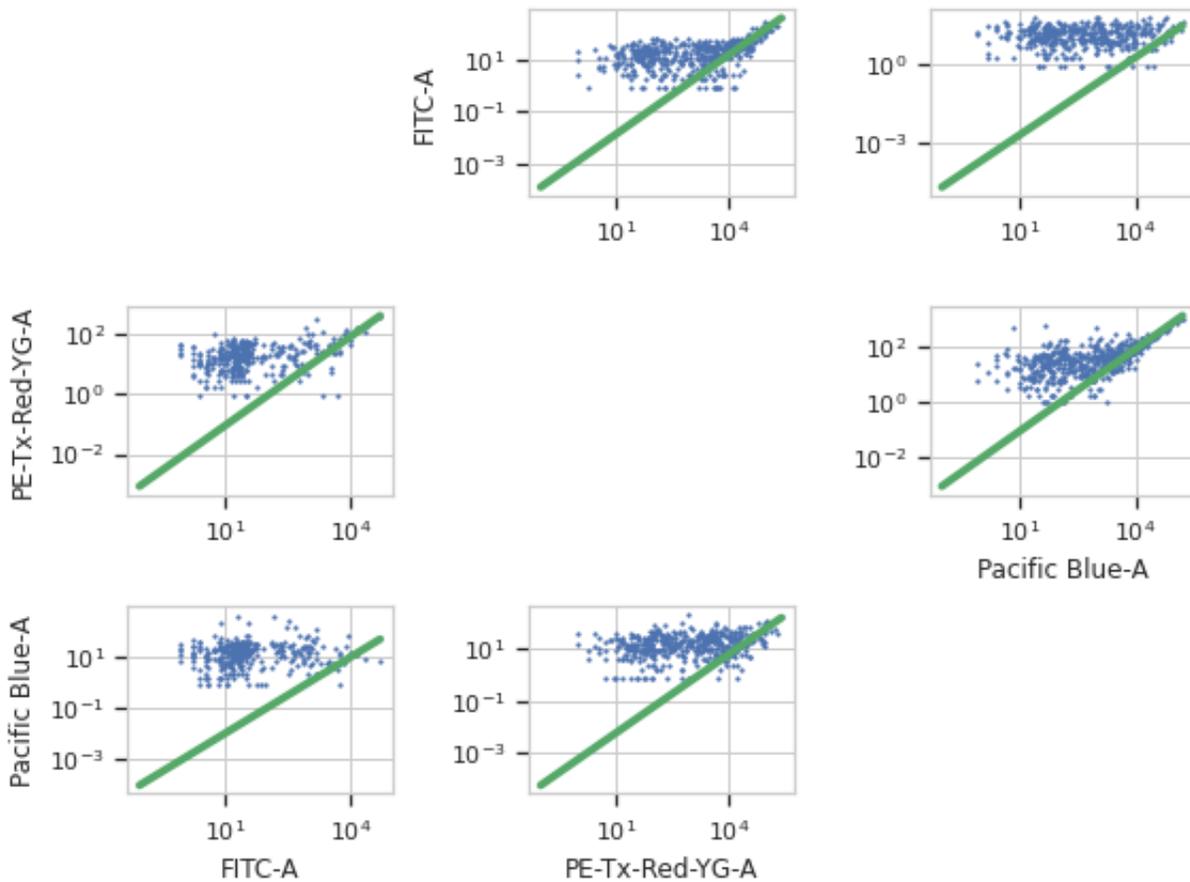

Apply the operation to the experiment

```
>>> ex2 = bl_op.apply(ex2)
```

estimate(*experiment*, *subset=None*)

Estimate the bleedthrough from single-channel controls in *controls*

apply(*experiment*)

Applies the bleedthrough correction to an experiment.

Parameters *experiment* (*Experiment*) – The experiment to which this operation is applied

Returns

A new *Experiment* with the bleedthrough subtracted out. The corrected channels have the following metadata added:

- **linear_bleedthrough** : Dict(Str : Float) The values for spillover from other channels into this channel.
- **bleedthrough_channels** : List(Str) The channels that were used to correct this one.
- **bleedthrough_fn** : Callable (Tuple(Float) → Float) The function that will correct one event in this channel. Pass it the values specified in *controls* and it will return the corrected value for this channel.

Return type *Experiment*

default_view(**kwargs)

Returns a diagnostic plot to make sure spillover estimation is working.

Returns An *IView*, call *BleedthroughLinearDiagnostic.plot* to see the diagnostic plots

Return type *IView*

class cytoflow.operations.bleedthrough_linear.**BleedthroughLinearDiagnostic**

Bases: *traits.has_traits.HasStrictTraits*

Plots a scatterplot of each channel vs every other channel and the bleedthrough line

op

The operation whose parameters we're viewing. If you made the instance with *BleedthroughLinearOp.default_view*, this is set for you already.

Type Instance(BleedthroughPiecewiseOp)

subset

If set, only plot this subset of the underlying data.

Type str

plot(*experiment=None*, **kwargs)

Plot a diagnostic of the bleedthrough model computation.

cytoflow.operations.channel_stat

Creates a new statistic. *channel_stat* has one class:

ChannelStatisticOp – applies a function to subsets of a data set, and adds the resulting statistic to the *Experiment*

class cytoflow.operations.channel_stat.**ChannelStatisticOp**

Bases: *traits.has_traits.HasStrictTraits*

Apply a function to subsets of a data set, and add it as a statistic to the experiment.

The *apply* function groups the data by the variables in *by*, then applies the *function* callable to the *channel* series in each subset. The callable should take a single *pandas.Series* as an argument. The return type is arbitrary, but to be used with the rest of *cytoflow* it should probably be a numeric type or an iterable of numeric types.

name

The operation name. Becomes the first element in the *Experiment.statistics* key tuple.

Type Str

channel

The channel to apply the function to.

Type Str

function

The function used to compute the statistic. *function* must take a `pandas.Series` as its only parameter. The return type is arbitrary, but to be used with the rest of *cytoflow* it should probably be a numeric type or an iterable of numeric types. If *statistic_name* is unset, the name of the function becomes the second in element in the *Experiment.statistics* key tuple.

Warning: Be careful! Sometimes this function is called with an empty input! If this is the case, poorly-behaved functions can return NaN or throw an error. If this happens, it will be reported.

Type Callable

statistic_name

The name of the function; if present, becomes the second element in the *Experiment.statistics* key tuple. Particularly useful if *function* is a lambda expression.

Type Str

by

A list of metadata attributes to aggregate the data before applying the function. For example, if the experiment has two pieces of metadata, Time and Dox, setting `by = ["Time", "Dox"]` will apply *function* separately to each subset of the data with a unique combination of Time and Dox.

Type List(Str)

subset

A Python expression sent to *Experiment.query* to subset the data before computing the statistic.

Type Str

fill

The value to use in the statistic if a slice of the data is empty.

Type Any (default = 0)

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.

```
>>> ch_op = flow.ChannelStatisticOp(name = 'MeanByDox',
...                               channel = 'Y2-A',
...                               function = flow.geom_mean,
...                               by = ['Dox'])
>>> ex2 = ch_op.apply(ex)
```

View the new operation

```
>>> print(ex2.statistics.keys())
dict_keys([('MeanByDox', 'geom_mean')])
```

```
>>> print(ex2.statistics[('MeanByDox', 'geom_mean')])
Dox
1.0      19.805601
10.0     446.981927
dtype: float64
```

apply(*experiment*)

Apply the operation to an *Experiment*.

Parameters *experiment* – The *Experiment* to apply this operation to.

Returns A new *Experiment*, containing a new entry in *Experiment.statistics*. The key of the new entry is a tuple (name, function) (or (name, statistic_name) if *statistic_name* is set.

Return type *Experiment*

cytoflow.operations.color_translation

The *color_translation* module has two classes:

ColorTranslationOp – translates the measurements in one channel to the same scale as another channel, using a two- or three-color control to estimate the transfer function.

ColorTranslationDiagnostic – a diagnostic view showing how the *ColorTranslationOp* operation estimated its parameters.

class cytoflow.operations.color_translation.ColorTranslationOp

Bases: `traits.has_traits.HasStrictTraits`

Translate measurements from one color's scale to another, using a two-color or three-color control.

To use, set up the *controls* dictionary with the channels to convert and the FCS files to compute the mapping. Call *estimate* to parameterize the module; check that the plots look good by calling the *ColorTranslationDiagnostic.plot* method of the *ColorTranslationDiagnostic* instance returned by *default_view*; then call *apply* to apply the translation to an *Experiment*.

controls

Two-color controls used to determine the mapping. They keys are tuples of **from-channel** and **to-channel**. The values are FCS files containing two-color constitutive fluorescent expression data for the mapping.

Type Dict((Str, Str), File)

mixture_model

If True, try to model the **from** channel as a mixture of expressing cells and non-expressing cells (as you would get with a transient transfection), then weight the regression by the probability that the cell is from the top (transfected) distribution. Make sure you check the diagnostic plots to see that this worked!

Type Bool (default = False)

linear_model

Set this to True to get a scaling that is strictly multiplicative, mirroring the TASBE approach. Do check the diagnostic plot, though, to see how well (or poorly) your model fits the data.

Type Bool (default = False)

control_conditions

Occasionally, you'll need to specify the experimental conditions that the bleedthrough tubes were collected under (to apply the operations in the history.) Specify them here. The key is a tuple of channel names; the value is a dictionary of the conditions (same as you would specify for a *cytoflow.operations.import_op.Tube*)

Type Dict((Str, Str), Dict(Str, Any))

Notes

In the TASBE workflow, this operation happens *after* the application of *AutofluorescenceOp* and *BleedthroughLinearOp*. The entire operation history of the *Experiment* that is passed to *estimate* is replayed on the control files in *controls*, so they are also corrected for autofluorescence and bleedthrough, and have metadata for subsetting.

Examples

Create a small experiment:

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "tasbe/mkate.fcs")]
>>> ex = import_op.apply()
```

Create and parameterize the operation

```
>>> color_op = flow.ColorTranslationOp()
>>> color_op.controls = {"Pacific Blue-A", "FITC-A"} : "tasbe/rby.fcs",
...                    ("PE-Tx-Red-YG-A", "FITC-A") : "tasbe/rby.fcs"}
>>> color_op.mixture_model = True
```

Estimate the model parameters

```
>>> color_op.estimate(ex)
```

Plot the diagnostic plot

```
>>> color_op.default_view().plot(ex)
```


Apply the operation to the experiment

```
>>> ex = color_op.apply(ex)
```

estimate(*experiment*, *subset=None*)

Estimate the mapping from the two-channel controls

Parameters

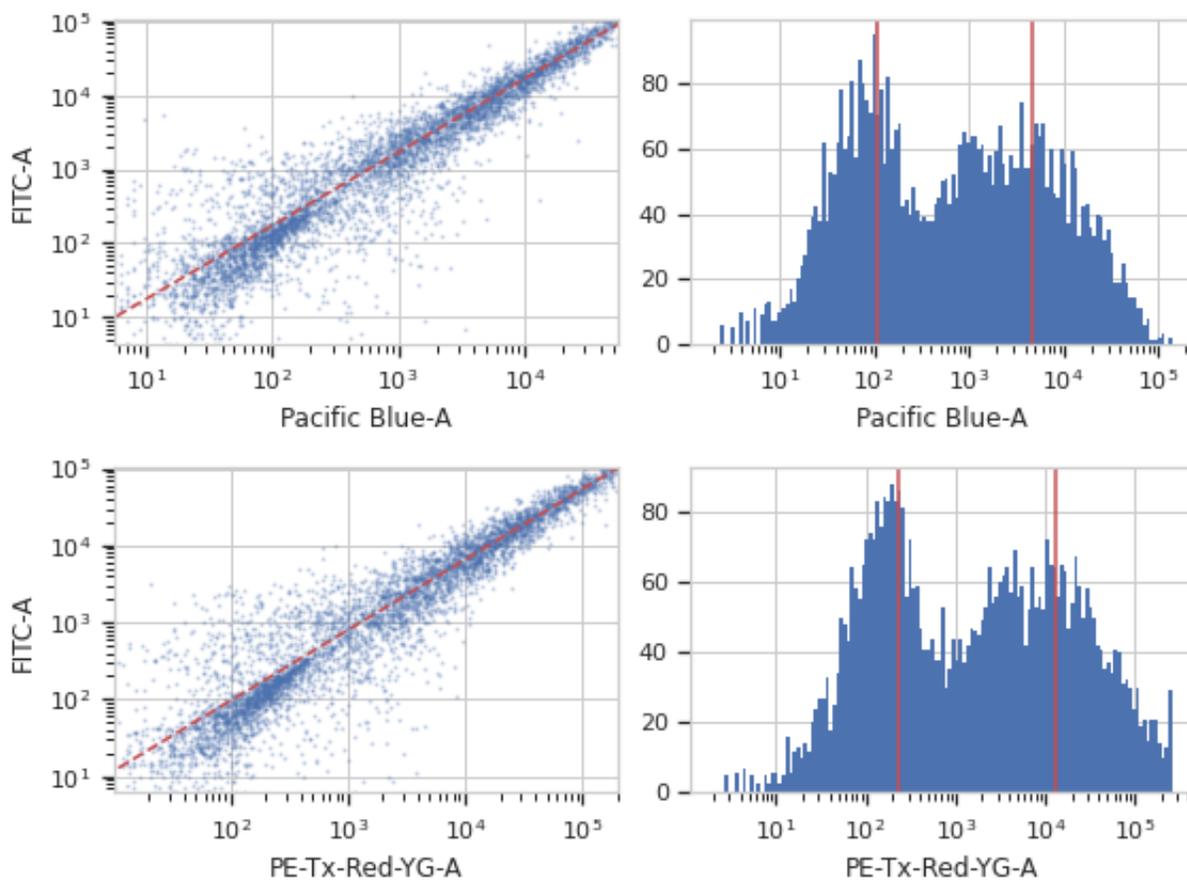

- **experiment** (*Experiment*) – The *Experiment* used to check the voltages, etc. of the control tubes. Also the source of the operation history that is replayed on the control tubes.
- **subset** (*Str*) – A Python expression used to subset the controls before estimating the color translation parameters.

apply(*experiment*)

Applies the color translation to an experiment

Parameters **experiment** (*Experiment*) – the old_experiment to which this op is applied

Returns

a new experiment with the color translation applied. The corrected channels also have the following new metadata:

channel_translation : Str Which channel was this one translated to?

channel_translation_fn : Callable (*pandas.Series* → *pandas.Series*) The function that translated this channel

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot to see if the bleedthrough spline estimation is working.

Returns A diagnostic view, call *ColorTranslationDiagnostic.plot* to see the diagnostic plots

Return type *IView*

class *cytoflow.operations.color_translation.ColorTranslationDiagnostic*

Bases: *traits.has_traits.HasStrictTraits*

name

The instance name (for serialization, UI etc.)

Type Str

op

The op whose parameters we're viewing

Type Instance(*ColorTranslationOp*)

subset

A Python expression specifying a subset of the events in the control FCS files to plot

Type str

plot(*experiment, **kwargs*)

Plot the plots

Parameters **experiment** (*Experiment*)

cytoflow.operations.density

The *density* module has two classes:

DensityGateOp – gates an *Experiment* based on a two-dimensional (smoothed) density plot.

DensityGateView – diagnostic view that plots the gate estimated by the *DensityGateOp*.

class cytoflow.operations.density.DensityGateOp

Bases: `traits.has_traits.HasStrictTraits`

This module computes a gate based on a 2D density plot. The user chooses what proportion of events to keep, and the module creates a gate that selects that proportion of events in the highest-density bins of the 2D density histogram.

name

The operation name; determines the name of the new metadata column

Type Str

xchannel

The X channel to apply the binning to.

Type Str

ychannel

The Y channel to apply the binning to.

Type Str

xscale

Re-scale the data on the X axis before fitting the data?

Type {"linear", "logicle", "log"} (default = "linear")

yscale

Re-scale the data on the Y axis before fitting the data?

Type {"linear", "logicle", "log"} (default = "linear")

keep

What proportion of events to keep? Must be >0 and <1

Type Float (default = 0.9)

bins

How many bins should there be on each axis? Must be positive.

Type Int (default = 100)

min_quantile

Clip values below this quantile

Type Float (default = 0.001)

max_quantile

Clip values above this quantile

Type Float (default = 1.0)

sigma

What standard deviation to use for the gaussian blur?

Type Float (default = 1.0)

by

A list of metadata attributes to aggregate the data before estimating the gate. For example, if the experiment has two pieces of metadata, Time and Dox, setting `by = ["Time", "Dox"]` will fit a separate gate to each subset of the data with a unique combination of Time and Dox.

Type List(Str)

Notes

This gating method was developed by John Sexton, in Jeff Tabor's lab at Rice University.

From http://taborlab.github.io/FlowCal/fundamentals/density_gate.html, the method is as follows:

1. Determines the number of events to keep, based on the user specified gating fraction and the total number of events of the input sample.
2. Divides the 2D channel space into a rectangular grid, and counts the number of events falling within each bin of the grid. The number of counts per bin across all bins comprises a 2D histogram, which is a coarse approximation of the underlying probability density function.
3. Smooths the histogram generated in Step 2 by applying a Gaussian Blur. Theoretically, the proper amount of smoothing results in a better estimate of the probability density function. Practically, smoothing eliminates isolated bins with high counts, most likely corresponding to noise, and smooths the contour of the gated region.
4. Selects the bins with the greatest number of events in the smoothed histogram, starting with the highest and proceeding downward until the desired number of events to keep, calculated in step 1, is achieved.

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.


```
>>> dens_op = flow.DensityGateOp(name = 'Density',
...                               xchannel = 'FSC-A',
...                               xscale = 'log',
...                               ychannel = 'SSC-A',
...                               yscale = 'log',
...                               keep = 0.5)
```

Find the bins to keep

```
>>> dens_op.estimate(ex)
```

Plot a diagnostic view

```
>>> dens_op.default_view().plot(ex)
```

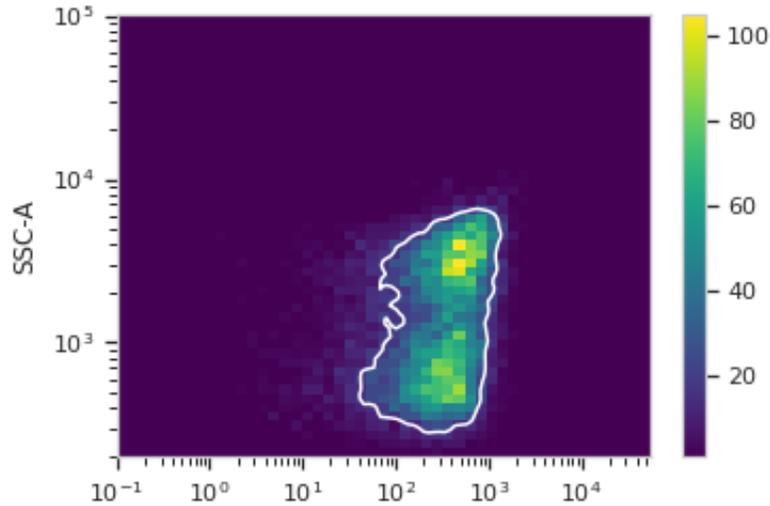

Apply the gate

```
>>> ex2 = dens_op.apply(ex)
```

estimate(*experiment*, *subset=None*)

Split the data set into bins and determine which ones to keep.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to use to estimate the gate parameters.
- **subset** (*Str (default = None)*) – If set, determine the gate parameters on only a subset of the experiment parameter.

apply(*experiment*)

Creates a new condition based on membership in the gate that was parameterized with *estimate*.

Parameters **experiment** (*Experiment*) – the *Experiment* to apply the gate to.

Returns a new *Experiment* with the new gate applied.

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot of the Gaussian mixture model.

Returns a diagnostic view, call *DensityGateView.plot* to see the diagnostic plot.

Return type *IView*

class cytoflow.operations.density.DensityGateView

Bases: *cytoflow.operations.base_op_views.By2DView*, *cytoflow.operations.base_op_views.AnnotatingView*, *cytoflow.views.densityplot.DensityView*

A diagnostic view for *DensityGateOp*. Draws a density plot, then outlines the selected bins in white.

facets

A read-only list of the conditions used to facet this view.

Type List(Str)

by

A read-only list of the conditions used to group this view's data before plotting.

Type List(Str)

xchannel

The channels to use for this view's X axis. If you created the view using *default_view*, this is already set.

Type Str

ychannel

The channels to use for this view's Y axis. If you created the view using *default_view*, this is already set.

Type Str

xscale

The way to scale the x axis. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

yscale

The way to scale the y axis. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type Instance(*IOperation*)

huefacet

You must leave the hue facet unset!

Type None

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to *pandas.DataFrame.query*.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

plot(*experiment*, ****kwargs**)

Plot the plots.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is **True**.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*((float, float))*) – Set the range of the plot’s X axis.
- **ylim** (*((float, float))*) – Set the range of the plot’s Y axis.
- **gridsize** (*int*) – The size of the grid on each axis. Default = 50
- **smoothed** (*bool*) – Should the resulting mesh be smoothed?
- **smoothed_sigma** (*int*) – The standard deviation of the smoothing kernel. default = 1.
- **cmap** (*cmap*) – An instance of `matplotlib.colors.Colormap`. By default, the `viridis` colormap is used
- **under_color** (*matplotlib color*) – Sets the color to be used for low out-of-range values.

- **bad_color** (*matplotlib color*) – Set the color to be used for masked values.
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **plot_name** (*Str*) – If this *IView* can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.
- **contour_props** (*Dict*) – The keyword arguments passed to the `matplotlib.axes.Axes.contour` constructor, which controls the visual properties of the contour that's plotted on top of the density plot. Default: `{'colors' : 'w'}`

cytosflow.operations.flowpeaks

The *flowpeaks* module has the classes that support the **flowPeaks** clustering algorithm. It has four classes:

FlowPeaksOp – an operation that implements the **flowPeaks** algorithm (see the class documentation for a reference.)

FlowPeaks1DView – a diagnostic view that shows how the *FlowPeaksOp* performed its clustering (on a 1D data set, using a histogram).

FlowPeaks2DView – a diagnostic view that shows how the *FlowPeaksOp* performed its clustering (on a 2D data set, using a scatter plot).

FlowPeaks2DDensityView – a diagnostic view that shows how the *FlowPeaksOp* performed its clustering (on a 2D data set, using a density plot).

class cytosflow.operations.flowpeaks.FlowPeaksOp

Bases: `traits.has_traits.HasStrictTraits`

This module uses the **flowPeaks** algorithm to assign events to clusters in an unsupervised manner.

Call `estimate` to compute the clusters.

Calling `apply` creates a new categorical metadata variable named `name`, with possible values `{name}_1 ... name_n` where `n` is the number of clusters estimated.

The same model may not be appropriate for different subsets of the data set. If this is the case, you can use the `by` attribute to specify metadata by which to aggregate the data before estimating (and applying) a model. The number of clusters is a model parameter and it may vary in each subset.

name

The operation name; determines the name of the new metadata column

Type Str

channels

The channels to apply the clustering algorithm to.

Type List(Str)

scale

Re-scale the data in the specified channels before fitting. If a channel is in `channels` but not in `scale`, the current package-wide default (set with `set_default_scale`) is used.

Type Dict(Str : Enum("linear", "logicle", "log"))

by

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, `Time` and `Dox`, setting `by = ["Time", "Dox"]` will fit the model separately to each subset of the data with a unique combination of `Time` and `Dox`.

Type List(Str)

h

A scalar value by which to scale the covariance matrices of the underlying density function. (See Notes, below, for more details.)

Type Float (default = 1.5)

h0

A scalar value by which to smooth the covariance matrices of the underlying density function. (See Notes, below, for more details.)

Type Float (default = 1.0)

tol

How readily should clusters be merged? Must be between 0 and 1. See Notes, below, for more details.

Type Float (default = 0.5)

merge_dist

How far apart can clusters be before they are merged? This is a unit-free scalar, and is approximately the maximum number of k-means clusters between peaks.

Type Float (default = 5)

find_outliers

Should the algorithm use an extra step to identify outliers?

Note: I have disabled this code until I can try to make it faster.

Type Bool (default = False)

Notes

This algorithm uses kmeans to find a large number of clusters, then hierarchically merges those clusters. Thus, the user does not need to specify the number of clusters in advance, and it can find non-convex clusters. It also operates in an arbitrary number of dimensions.

The merging happens in two steps. First, the cluster centroids are used to estimate an underlying density function. Then, the local maxima of the density function are found using a numerical optimization starting from each centroid, and k-means clusters that converge to the same local maximum are merged. Finally, these clusters-of-clusters are merged if their local maxima are (a) close enough, and (b) the density function between them is smooth enough. Thus, the final assignment of each event depends on the k-means cluster it ends up in, and which cluster-of-clusters that k-means centroid is assigned to.

There are a lot of parameters that affect this process. The k-means clustering is pretty robust (though somewhat sensitive to the number of clusters, which is currently not exposed in the API.) The most important are exposed as attributes of the *FlowPeaksOp* class. These include:

- **h, h0:** sometimes the density function is too “rough” to find good local maxima. These parameters smooth it out by widening the covariance matrices. Increasing *h* makes the density rougher; increasing *h0* makes it smoother.
- **tol:** How smooth does the density function have to be between two density maxima to merge them? Must be between 0 and 1.
- **merge_dist:** How close must two maxima be to merge them? This value is a unit-free scalar, and is approximately the number of k-means clusters between the two maxima.

For details and a theoretical justification, see¹

References

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.


```
>>> fp_op = flow.FlowPeaksOp(name = 'Flow',
...                          channels = ['V2-A', 'Y2-A'],
...                          scale = {'V2-A' : 'log',
...                                   'Y2-A' : 'log'},
...                          h0 = 3)
```

Estimate the clusters

```
>>> fp_op.estimate(ex)
```

Plot a diagnostic view of the underlying density

```
>>> fp_op.default_view(density = True).plot(ex)
```

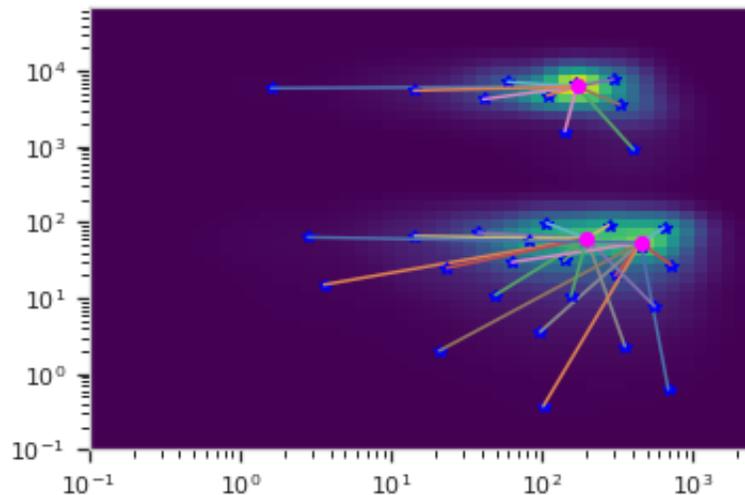


¹ Ge, Yongchao and Sealfon, Stuart C. “flowPeaks: a fast unsupervised clustering for flow cytometry data via K-means and density peak finding” *Bioinformatics* (2012) 28 (15): 2052-2058.

Apply the gate

```
>>> ex2 = fp_op.apply(ex)
```

Plot a diagnostic view with the event assignments

```
>>> fp_op.default_view().plot(ex2)
```

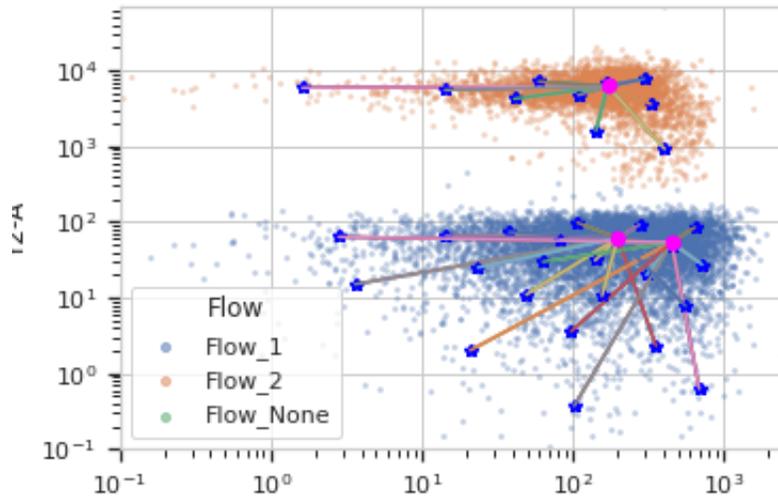

estimate(*experiment*, *subset=None*)

Estimate the k-means clusters, then hierarchically merge them.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to use to estimate the k-means clusters
- **subset** (*str (default = None)*) – A Python expression that specifies a subset of the data in *experiment* to use to parameterize the operation.

apply(*experiment*)

Assign events to a cluster.

Assigns each event to one of the k-means centroids from *estimate*, then groups together events in the same cluster hierarchy.

Parameters *experiment* (*Experiment*) – the *Experiment* to apply the gate to.

Returns A new *Experiment* with the gate applied to it. TODO - document the extra statistics

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot of the Gaussian mixture model.

Parameters

- **channels** (*List(Str)*) – Which channels to plot? Must be contain either one or two channels.
- **scale** (*List({'linear', 'log', 'logicle'})*) – How to scale the channels before plotting them
- **density** (*bool*) – Should we plot a scatterplot or the estimated density function?

Returns an *IView*, call *plot* to see the diagnostic plot.

Return type *IView*

class cytoflow.operations.flowpeaks.FlowPeaks1DView

Bases: *cytoflow.operations.base_op_views.By1DView*, *cytoflow.operations.base_op_views.AnnotatingView*, *cytoflow.views.histogram.HistogramView*

A one-dimensional diagnostic view for *FlowPeaksOp*. Plots a histogram of the channel, then overlays the k-means centroids in blue.

facets

A read-only list of the conditions used to facet this view.

Type List(Str)

by

A read-only list of the conditions used to group this view's data before plotting.

Type List(Str)

channel

The channel this view is viewing. If you created the view using *default_view*, this is already set.

Type Str

scale

The way to scale the x axes. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type Instance(*IOperation*)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to *pandas.DataFrame.query*.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

plot(*experiment*, ***kwargs*)

Plot the plots.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is **True**.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **num_bins** (*int*) – The number of bins to plot in the histogram. Clipped to [100, 1000]
- **histtype** (*{‘stepfilled’, ‘step’, ‘bar’}*) – The type of histogram to draw. **stepfilled** is the default, which is a line plot with a color filled under the curve.
- **density** (*bool*) – If **True**, re-scale the histogram to form a probability density function, so the area under the histogram is 1.

- **linewidth** (*float*) – The width of the histogram line (in points)
- **linestyle** (*[‘-’ | ‘-’ | ‘.’ | ‘:’ | “None”]*) – The style of the line to plot
- **alpha** (*float (default = 0.5)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **plot_name** (*Str*) – If this *IView* can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

class `cytoflow.operations.flowpeaks.FlowPeaks2DView`

Bases: `cytoflow.operations.base_op_views.By2DView`, `cytoflow.operations.base_op_views.AnnotatingView`, `cytoflow.views.scatterplot.ScatterplotView`

A two-dimensional diagnostic view for `FlowPeaksOp`. Plots a scatter-plot of the two channels, then overlays the k-means centroids in blue and the clusters-of-k-means in pink.

facets

A read-only list of the conditions used to facet this view.

Type `List(Str)`

by

A read-only list of the conditions used to group this view’s data before plotting.

Type `List(Str)`

xchannel

The channels to use for this view’s X axis. If you created the view using `default_view`, this is already set.

Type `Str`

ychannel

The channels to use for this view’s Y axis. If you created the view using `default_view`, this is already set.

Type `Str`

xscale

The way to scale the x axis. If you created the view using `default_view`, this may be already set.

Type `{‘linear’, ‘log’, ‘logicle’}`

yscale

The way to scale the y axis. If you created the view using `default_view`, this may be already set.

Type `{‘linear’, ‘log’, ‘logicle’}`

op

The `IOperation` that this view is associated with. If you created the view using `default_view`, this is already set.

Type `Instance(IOperation)`

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type { 'linear', 'log', 'logicle' }

plot(*experiment*, ***kwargs*)

Plot the plots.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.

- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is True.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*(float, float)*) – Set the range of the plot’s X axis.
- **ylim** (*(float, float)*) – Set the range of the plot’s Y axis.
- **alpha** (*float (default = 0.25)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **s** (*int (default = 2)*) – The size in points².
- **marker** (*a matplotlib marker style, usually a string*) – Specifies the glyph to draw for each point on the scatterplot. See `matplotlib.markers` for examples. Default: ‘o’
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **plot_name** (*Str*) – If this *IView* can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

class `cytoflow.operations.flowpeaks.FlowPeaks2DDensityView`

Bases: `cytoflow.operations.base_op_views.By2DView`, `cytoflow.operations.base_op_views.AnnotatingView`, `cytoflow.operations.base_op_views.NullView`

A two-dimensional diagnostic view for `FlowPeaksOp`. Plots the estimated density function of the two channels, then overlays the k-means centroids in blue and the clusters-of-k-means in pink.

facets

A read-only list of the conditions used to facet this view.

Type List(Str)

by

A read-only list of the conditions used to group this view’s data before plotting.

Type List(Str)

xchannel

The channels to use for this view’s X axis. If you created the view using `default_view`, this is already set.

Type Str

ychannel

The channels to use for this view’s Y axis. If you created the view using `default_view`, this is already set.

Type Str

xscale

The way to scale the x axis. If you created the view using `default_view`, this may be already set.

Type {‘linear’, ‘log’, ‘logicle’}

yscale

The way to scale the y axis. If you created the view using `default_view`, this may be already set.

Type { 'linear', 'log', 'logicle' }

op

The `IOperation` that this view is associated with. If you created the view using `default_view`, this is already set.

Type Instance(`IOperation`)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type `String`

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type `String`

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type `String`

huescale

How should the color scale for `huefacet` be scaled?

Type { 'linear', 'log', 'logicle' }

plot(`experiment, **kwargs`)

Plot the plots.

Parameters

- **experiment** (`Experiment`) – The `Experiment` to plot using this view.
- **title** (`str`) – Set the plot title
- **xlabel** (`str`) – Set the X axis label
- **ylabel** (`str`) – Set the Y axis label
- **huelabel** (`str`) – Set the label for the hue facet (in the legend)
- **legend** (`bool`) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (`bool`) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (`bool`) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (`list`) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (`list`) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.

- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **xlim** (*(float, float)*) – Set the range of the plot’s X axis.
- **ylim** (*(float, float)*) – Set the range of the plot’s Y axis.
- **plot_name** (*Str*) – If this *IView* can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

cytoflow.operations.frame_stat

The `frame_stat` module contains one class:

`FrameStatisticOp` – applies a function to subsets of a data set, and adds the resulting statistic to the `Experiment`. Unlike `ChannelStatisticOp`, which operates on a single channel, this operation operates on entire `pandas.DataFrame`.

class `cytoflow.operations.frame_stat.FrameStatisticOp`

Bases: `traits.has_traits.HasStrictTraits`

Apply a function to subsets of a data set, and add it as a statistic to the experiment.

The `apply` function groups the data by the variables in `by`, then applies the `function` callable to each `pandas.DataFrame` subset. The callable should take a `pandas.DataFrame` as its only parameter. The return type is arbitrary, but to be used with the rest of `cytoflow` it should probably be a numeric type or an iterable of numeric types.

name

The operation name. Becomes the first element in the `Experiment.statistics` key tuple.

Type `Str`

function

The function used to compute the statistic. Must take a `pandas.DataFrame` as its only argument. The return type is arbitrary, but to be used with the rest of *cytoflow* it should probably be a numeric type or an iterable of numeric types. If `statistic_name` is unset, the name of the function becomes the second in element in the `Experiment.statistics` key tuple.

Type Callable

statistic_name

The name of the function; if present, becomes the second element in the `Experiment.statistics` key tuple. Particularly useful if `function` is a lambda.

Type Str

by

A list of metadata attributes to aggregate the data before applying the function. For example, if the experiment has two pieces of metadata, Time and Dox, setting `by = ["Time", "Dox"]` will apply `function` separately to each subset of the data with a unique combination of Time and Dox.

Type List(Str)

subset

A Python expression sent to `Experiment.query()` to subset the data before computing the statistic.

Type Str

fill

The value to use in the statistic if a slice of the data is empty.

Type Any (default = 0)

Examples

```
>>> stats_op = FrameStatisticOp(name = "ByDox",
...                             function = lambda x: np.mean(x["FITC-A"]),
...                             statistic_name = "Mean",
...                             by = ["Dox"])
>>> ex2 = stats_op.apply(ex)
```

`apply(experiment)`

cytoflow.operations.gaussian

gaussian contains three classes:

GaussianMixtureOp – an operation that fits a Gaussian mixture model to one or more channels.

GaussianMixture1DView – a diagnostic view that shows how the *GaussianMixtureOp* estimated its model (on a 1D data set, using a histogram).

GaussianMixture2DView – a diagnostic view that shows how the *GaussianMixtureOp* estimated its model (on a 2D data set, using a scatter plot).

class `cytoflow.operations.gaussian.GaussianMixtureOp`

Bases: `traits.has_traits.HasStrictTraits`

This module fits a Gaussian mixture model with a specified number of components to one or more channels.

If `num_components > 1`, `apply` creates a new categorical metadata variable named `name`, with possible values `{name}_1 ... name_n` where `n` is the number of components. An event is assigned to `name_i` category if it has the highest posterior probability of having been produced by component `i`. If an event has a value that is outside the range of one of the channels' scales, then it is assigned to `{name}_None`.

Optionally, if `sigma` is greater than 0, `apply` creates new boolean metadata variables named `{name}_1 ... {name}_n` where `n` is the number of components. The column `{name}_i` is True if the event is less than `sigma` standard deviations from the mean of component `i`. If `num_components` is 1, `sigma` must be greater than 0.

Note: The `sigma` attribute does NOT affect how events are assigned to components in the new `name` variable. That is to say, if an event is more than `sigma` standard deviations from ALL of the components, you might expect it would be labeled as `{name}_None`. It is *not*. An event is only labeled `{name}_None` if it has a value that is outside of the channels' scales.

Optionally, if `posteriors` is True, `apply` creates a new double metadata variables named `{name}_1_posterior ... {name}_n_posterior` where `n` is the number of components. The column `{name}_i_posterior` contains the posterior probability that this event is a member of component `i`.

Finally, the same mixture model (mean and standard deviation) may not be appropriate for every subset of the data. If this is the case, you can use the `by` attribute to specify metadata by which to aggregate the data before estimating (and applying) a mixture model. The number of components must be the same across each subset, though.

name

The operation name; determines the name of the new metadata column

Type Str

channels

The channels to apply the mixture model to.

Type List(Str)

scale

Re-scale the data in the specified channels before fitting. If a channel is in `channels` but not in `scale`, the current package-wide default (set with `set_default_scale`) is used.

Type Dict(Str : {"linear", "logicle", "log"})

num_components

How many components to fit to the data? Must be a positive integer.

Type Int (default = 1)

sigma

If not None, use this operation as a "gate": for each component, create a new boolean variable `{name}_i` and if the event is within `sigma` standard deviations, set that variable to True. If `num_components` is 1, must be > 0.

Type Float

by

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, `Time` and `Dox`, setting `by` to `["Time", "Dox"]` will fit the model separately to each subset of the data with a unique combination of `Time` and `Dox`.

Type List(Str)

posteriors

If True, add columns named {name}_{i}_posterior giving the posterior probability that the event is in component i. Useful for filtering out low-probability events.

Type Bool (default = False)

Notes

We use the Mahalanobis distance as a multivariate generalization of the number of standard deviations an event is from the mean of the multivariate gaussian. If \vec{x} is an observation from a distribution with mean $\vec{\mu}$ and S is the covariance matrix, then the Mahalanobis distance is $\sqrt{(x - \mu)^T \cdot S^{-1} \cdot (x - \mu)}$.

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.

```
>>> gm_op = flow.GaussianMixtureOp(name = 'Gauss',
...                                channels = ['Y2-A'],
...                                scale = {'Y2-A' : 'log'},
...                                num_components = 2)
```

Estimate the clusters

```
>>> gm_op.estimate(ex)
```

Plot a diagnostic view

```
>>> gm_op.default_view().plot(ex)
```

Apply the gate

```
>>> ex2 = gm_op.apply(ex)
```



Plot a diagnostic view with the event assignments

```
>>> gm_op.default_view().plot(ex2)
```

And with two channels:

```
>>> gm_op = flow.GaussianMixtureOp(name = 'Gauss',
...                                channels = ['V2-A', 'Y2-A'],
...                                scale = {'V2-A' : 'log',
...                                        'Y2-A' : 'log'},
```

(continues on next page)

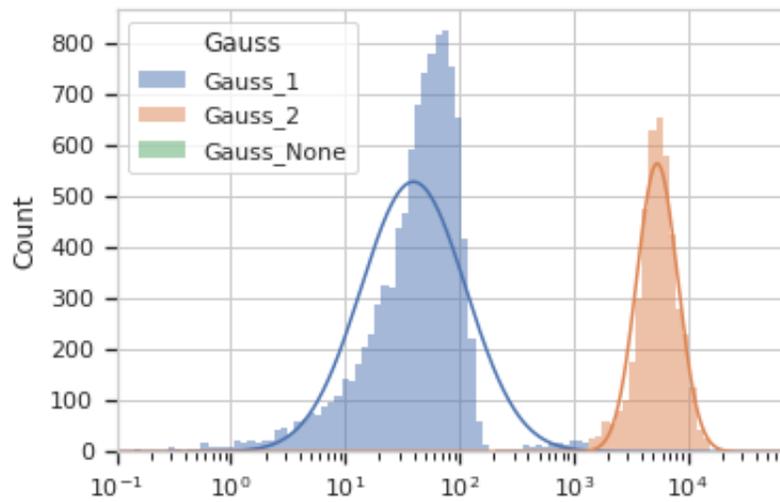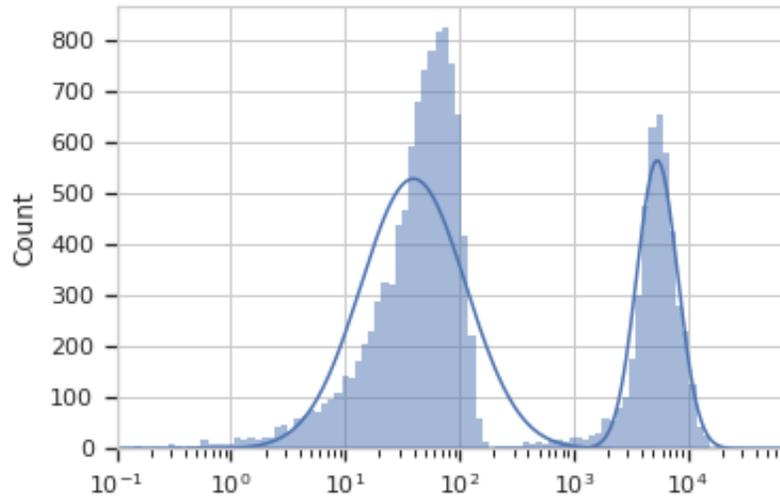


(continued from previous page)

```

...                               num_components = 2)
>>> gm_op.estimate(ex)
>>> ex2 = gm_op.apply(ex)
>>> gm_op.default_view().plot(ex2)

```

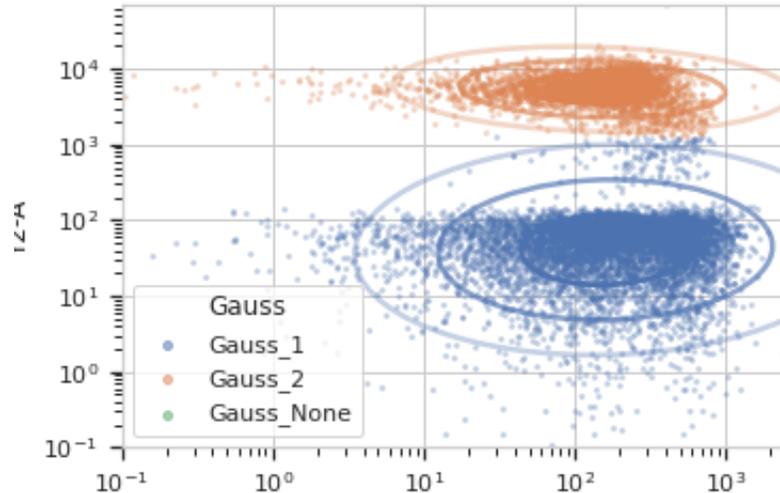

estimate(*experiment*, *subset=None*)

Estimate the Gaussian mixture model parameters

Parameters

- **experiment** (*Experiment*) – The data to use to estimate the mixture parameters
- **subset** (*str (default = None)*) – If set, a Python expression to determine the subset of the data to use to in the estimation.

apply(*experiment*)

Assigns new metadata to events using the mixture model estimated in *estimate*.

Returns

A new *Experiment* with the new condition variables as described in the class documentation. Also adds the following new statistics:

- **mean** [Float] the mean of the fitted gaussian in each channel for each component.
- **sigma** [(Float, Float)] the locations the mean +/- one standard deviation in each channel for each component.
- **correlation** [Float] the correlation coefficient between each pair of channels for each component.
- **proportion** [Float] the proportion of events in each component of the mixture model. only added if *num_components* > 1.

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot of the Gaussian mixture model.

Returns An *IView*, call *plot* to see the diagnostic plot.

Return type *IView*

class `cytoflow.operations.gaussian.GaussianMixture1DView`

Bases: `cytoflow.operations.base_op_views.By1DView`, `cytoflow.operations.base_op_views.AnnotatingView`, `cytoflow.views.histogram.HistogramView`

A default view for `GaussianMixtureOp` that plots the histogram of a single channel, then the estimated Gaussian distributions on top of it.

facets

A read-only list of the conditions used to facet this view.

Type `List(Str)`

by

A read-only list of the conditions used to group this view's data before plotting.

Type `List(Str)`

channel

The channel this view is viewing. If you created the view using `default_view`, this is already set.

Type `Str`

scale

The way to scale the x axes. If you created the view using `default_view`, this may be already set.

Type `{'linear', 'log', 'logicle'}`

op

The `IOperation` that this view is associated with. If you created the view using `default_view`, this is already set.

Type `Instance(IOperation)`

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type `String`

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type `String`

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type `String`

huescale

How should the color scale for `huefacet` be scaled?

Type `{'linear', 'log', 'logicle'}`

plot(*experiment*, ***kwargs*)

Plot the plots.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is **True**.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **num_bins** (*int*) – The number of bins to plot in the histogram. Clipped to [100, 1000]
- **histtype** (*{‘stepfilled’, ‘step’, ‘bar’}*) – The type of histogram to draw. **stepfilled** is the default, which is a line plot with a color filled under the curve.
- **density** (*bool*) – If **True**, re-scale the histogram to form a probability density function, so the area under the histogram is 1.

- **linewidth** (*float*) – The width of the histogram line (in points)
- **linestyle** (*[‘-’ | ‘-’ | ‘.’ | ‘:’ | “None”]*) – The style of the line to plot
- **alpha** (*float (default = 0.5)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **plot_name** (*Str*) – If this *IView* can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

`cytoflow.operations.gaussian.poly_area(x, y)`

class `cytoflow.operations.gaussian.GaussianMixture2DView`

Bases: `cytoflow.operations.base_op_views.By2DView`, `cytoflow.operations.base_op_views.AnnotatingView`, `cytoflow.views.scatterplot.ScatterplotView`

A default view for `GaussianMixtureOp` that plots the scatter plot of a two channels, then the estimated 2D Gaussian distributions on top of it.

facets

A read-only list of the conditions used to facet this view.

Type `List(Str)`

by

A read-only list of the conditions used to group this view’s data before plotting.

Type `List(Str)`

xchannel

The channels to use for this view’s X axis. If you created the view using `default_view`, this is already set.

Type `Str`

ychannel

The channels to use for this view’s Y axis. If you created the view using `default_view`, this is already set.

Type `Str`

xscale

The way to scale the x axis. If you created the view using `default_view`, this may be already set.

Type `{‘linear’, ‘log’, ‘logicle’}`

yscale

The way to scale the y axis. If you created the view using `default_view`, this may be already set.

Type `{‘linear’, ‘log’, ‘logicle’}`

op

The *IOperation* that this view is associated with. If you created the view using `default_view`, this is already set.

Type `Instance(IOperation)`

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {‘linear’, ‘log’, ‘logicle’}

plot(*experiment*, ***kwargs*)

Plot the plots.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.

- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is True.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*(float, float)*) – Set the range of the plot’s X axis.
- **ylim** (*(float, float)*) – Set the range of the plot’s Y axis.
- **alpha** (*float (default = 0.25)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **s** (*int (default = 2)*) – The size in points².
- **marker** (*a matplotlib marker style, usually a string*) – Specifies the glyph to draw for each point on the scatterplot. See `matplotlib.markers` for examples. Default: ‘o’
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **plot_name** (*Str*) – If this `IView` can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

cytoflow.operations.i_operation

`i_operation` contains just one class:

`IOperation` – an `traits.has_traits.Interface` that all operation classes must implement.

```
class cytoflow.operations.i_operation.IOperation(adaptee, default=<class
                                                    'traits.adaptation.adaptation_error.AdaptationError'>)
```

Bases: `traits.has_traits.Interface`

The basic interface for an operation on cytometry data.

id

a unique identifier for this class. prefix: `edu.mit.synbio.cytoflow.operations`

Type Str

friendly_id

The operation’s human-readable id (like `Threshold` or `K-means`). Used for UI implementations.

Type Str

name

The name of this `IOperation` instance (like `Debris_Filter`). Useful for UI implementations; sometimes used for naming gates’ metadata

Type Str

estimate(*experiment, subset=None*)

Estimate this operation’s parameters from some data.

For operations that are data-driven (for example, a mixture model), estimate the operation’s parameters from an experiment.

Parameters

- **experiment** (*Experiment*) – the *Experiment* to use in the estimation.
- **subset** (*Str (optional)*) – a string passed to `pandas.DataFrame.query` to select the subset of data on which to run the parameter estimation.

Raises CytoflowOpException – If the operation can't be completed because of bad op parameters.

apply(*experiment*)

Apply an operation to an experiment.

Parameters **experiment** (*Experiment*) – the *Experiment* to apply this op to

Returns the old *Experiment* with this operation applied

Return type *Experiment*

Raises CytoflowOpException – If the operation can't be completed because of bad op parameters.

default_view(***kwargs*)

Many operations have a “default” view. This can either be a diagnostic for the operation's *estimate* method, an interactive for setting gates, etc. Frequently it makes sense to link the properties of the view to the properties of the *IOperation*; sometimes, *default_view* is the only way to get the view (ie, it's not useful when it doesn't reference an *IOperation* instance.)

Parameters ***kwargs* (*Dict*) – The keyword args passed to the view's constructor

Returns the *IView* instance

Return type *IView*

cytoflow.operations.import_op

import_op has two classes:

Tube – represents a tube in a flow cytometry experiment – an FCS file name and a dictionary of experimental conditions.

ImportOp – the operation that actually creates a new *Experiment* from a list of *Tube*.

There are a few utility functions as well:

- *parse_tube* – parse an FCS file.
- *check_tube* – checks an FCS file's parameters against an *Experiment*.
- *autodetect_name_metadata* – see if \$PnN or \$PnS has the channel names

class `cytoflow.operations.import_op.Tube`

Bases: `traits.has_traits.HasTraits`

Represents a tube or plate well we want to import.

file

The file name of the FCS file to import

Type `File`

conditions

A dictionary containing this tube's experimental conditions. Keys are condition names, values are condition values.

Type `Dict(Str, Any)`

Examples

```
>>> tube1 = flow.Tube(file = 'RFP_Well_A3.fcs', conditions = {"Dox" : 10.0})
>>> tube2 = flow.Tube(file='CFP_Well_A4.fcs', conditions = {"Dox" : 1.0})
```

conditions_equal (*other*)

class cytoflow.operations.import_op.**ImportOp**

Bases: `traits.has_traits.HasStrictTraits`

An operation for importing data and making an *Experiment*.

To use, set the *conditions* dict to a mapping between condition name and NumPy dtype. Useful dtypes include category, float, int, bool.

Next, set *tubes* to a list of *Tube* containing FCS filenames and the corresponding conditions.

If you would rather not analyze every single event in every FCS file, set *events* to the number of events from each FCS file you want to load.

Call *apply* to load the data. The usual *experiment* parameter can be None.

conditions

A dictionary mapping condition names (keys) to NumPy dtype`s (values). Useful ``dtype``s include ``category, float, int, and bool.

Type Dict(Str, Str)

tubes

A list of Tube instances, which map FCS files to their corresponding experimental conditions. Each Tube must have a Tube.conditions dict whose keys match those of *conditions*.

Type List(*Tube*)

channels

If you only need a subset of the channels available in the data set, specify them here. Each (key, value) pair specifies a channel to include in the output experiment. The key is the channel name in the FCS file, and the value is the name of the channel in the Experiment. You can use this to rename channels as you import data (because flow channel names are frequently not terribly informative.) New channel names must be valid Python identifiers: start with a letter or _, and all characters must be letters, numbers or _. If *channels* is empty, load all channels in the FCS files.

Type Dict(Str, Str)

events

If not None, import only a random subset of events of size *events*. Presumably the analysis will go faster but less precisely; good for interactive data exploration. Then, unset *events* and re-run the analysis non-interactively.

Type Int

name_metadata

Which FCS metadata is the channel name? If None, attempt to autodetect.

Type {None, "\$PnN", "\$PnS"} (default = None)

data_set

The FCS standard allows you to encode multiple data sets in a single FCS file. Some software (such as the Beckman-Coulter software) also encode the same data in two different formats – for example, FCS2.0 and FCS3.0. To access a data set other than the first one, set *data_set* to the 0-based index of the data set you would like to use. This will be used for *all FCS files imported by this operation*.

Type Int (default = 0)

ignore_v

cytoflow is designed to operate on an *Experiment* containing tubes that were all collected under the same instrument settings. In particular, the same PMT voltages ensure that data can be compared across samples.

Very rarely, you may need to set up an *Experiment* with different voltage settings on different *Tube* instances. This is likely only to be the case when you are trying to figure out which voltages should be used in future experiments. If so, set *ignore_v* to a list of channel names to ignore particular channels.

Warning: THIS WILL BREAK REAL EXPERIMENTS

Type List(Str)

Examples

```
>>> tube1 = flow.Tube(file = 'RFP_Well_A3.fcs', conditions = {"Dox" : 10.0})
>>> tube2 = flow.Tube(file='CFP_Well_A4.fcs', conditions = {"Dox" : 1.0})
>>> import_op = flow.ImportOp(conditions = {"Dox" : "float"},
...                           tubes = [tube1, tube2])
>>> ex = import_op.apply()
```

apply(*experiment=None, metadata_only=False*)

Load a new *Experiment*.

Parameters

- **experiment** (*Experiment*) – Ignored
- **metadata_only** (*bool (default = False)*) – Only “import” the metadata, creating an *Experiment* with all the expected metadata and structure but 0 events.

Returns

The new *Experiment*. New channels have the following metadata:

- **voltage - int** The voltage that this channel was collected at. Determined by the \$PnV field from the first FCS file.
- **range - int** The maximum range of this channel. Determined by the \$PnR field from the first FCS file.

New experimental conditions do not have **voltage** or **range** metadata, obviously. Instead, they have **experiment** set to True, to distinguish the experimental variables from the conditions that were added by gates, etc.

If *ignore_v* is set, it is added as a key to the *Experiment*-wide metadata.

Return type *Experiment*

cytoflow.operations.import_op.check_tube(*filename, experiment, data_set=0*)

Check to see if an FCS file can be parsed, and that the tube’s parameters are the same as those already in the *Experiment*. If not, raises *CytoflowError*. At the moment, only checks \$PnV, the detector voltages.

Parameters

- **filename** (*string*) – An FCS filename
- **experiment** (*Experiment*) – The *Experiment* to check filename against.

- **data_set** (*int (optional, default = 0)*) – The FCS standard allows for multiple data sets; `data_set` specifies which one to check.

Raises *CytoflowError* – If the FCS file can't be read, or if the voltages in `filename` are different than those in `experiment`.

`cytoflow.operations.import_op.autodetect_name_metadata(filename, data_set=0)`

Tries to determine whether the channel names should come from \$PnN or \$PnS.

Parameters

- **filename** (*string*) – The name of the FCS file to operate on
- **data_set** (*int (optional, default = 0)*) – Which data set in the FCS file to operate on

Returns

- *The name of the parameter to parse channel names from,*
- *either “\$PnN” or “\$PnS”*

`cytoflow.operations.import_op.parse_tube(filename, experiment=None, data_set=0, metadata_only=False)`

Parses an FCS file. A thin wrapper over `fcsparser.parse`.

Parameters

- **filename** (*string*) – The file to parse.
- **experiment** (*Experiment (optional, default: None)*) – If provided, check the tube's parameters against this experiment first.
- **data_set** (*int (optional, default: 0)*) – Which data set in the FCS file to parse?
- **metadata_only** (*bool (optional, default: False)*) – If `True`, only parse the metadata. Because this is at the beginning of the FCS file, this happens much faster than parsing the entire file.

Returns

- **tube_metadata** (*dict*) – The metadata from the FCS file
- **tube_data** (*pandas.DataFrame*) – The actual tabular data from the FCS file. Each row is an event, and each column is a channel.

cytoflow.operations.kmeans

Use k-means clustering to cluster events in any number of dimensions. *kmeans* has three classes:

KMeansOp – the *IOperation* to perform the clustering.

KMeans1DView – a diagnostic view of the clustering (1D, using a histogram)

KMeans2DView – a diagnostic view of the clustering (2D, using a scatterplot)

class `cytoflow.operations.kmeans.KMeansOp`

Bases: `traits.has_traits.HasStrictTraits`

Use a K-means clustering algorithm to cluster events.

Call *estimate* to compute the cluster centroids.

Calling *apply* creates a new categorical metadata variable named *name*, with possible values `{name}_1 ... name_n` where `n` is the number of clusters, specified with *num_clusters*.

The same model may not be appropriate for different subsets of the data set. If this is the case, you can use the *by* attribute to specify metadata by which to aggregate the data before estimating (and applying) a model. The number of clusters is the same across each subset, though.

name

The operation name; determines the name of the new metadata column

Type Str

channels

The channels to apply the clustering algorithm to.

Type List(Str)

scale

Re-scale the data in the specified channels before fitting. If a channel is in *channels* but not in *scale*, the current package-wide default (set with *set_default_scale*) is used.

Note: Sometimes you may see events labeled {name}_None – this results from events for which the selected scale is invalid. For example, if an event has a negative measurement in a channel and that channel’s scale is set to “log”, this event will be set to {name}_None.

Type Dict(Str : {"linear", "logicle", "log"})

num_clusters

How many components to fit to the data? Must be a positive integer.

Type Int (default = 2)

by

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting *by* to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

Type List(Str)

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.


```
>>> km_op = flow.KMeansOp(name = 'KMeans',
...                       channels = ['V2-A', 'Y2-A'],
...                       scale = {'V2-A' : 'log',
...                                'Y2-A' : 'log'},
...                       num_clusters = 2)
```

Estimate the clusters

```
>>> km_op.estimate(ex)
```

Plot a diagnostic view

```
>>> km_op.default_view().plot(ex)
```

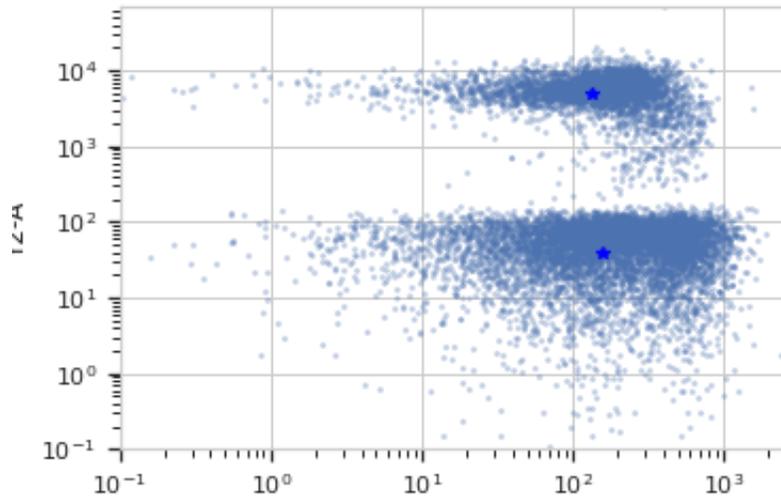


Apply the gate

```
>>> ex2 = km_op.apply(ex)
```

Plot a diagnostic view with the event assignments

```
>>> km_op.default_view().plot(ex2)
```

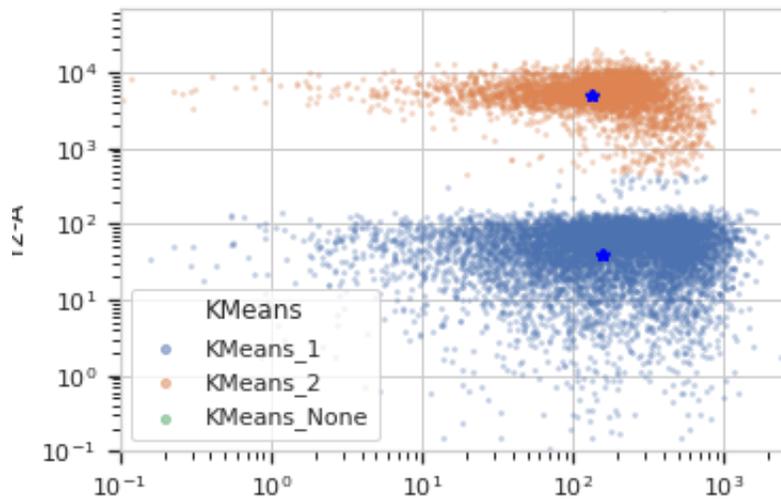

estimate(*experiment*, *subset=None*)

Estimate the k-means clusters

Parameters

- **experiment** (*Experiment*) – The *Experiment* to use to estimate the k-means clusters
- **subset** (*str (default = None)*) – A Python expression that specifies a subset of the data in *experiment* to use to parameterize the operation.

apply(*experiment*)

Apply the KMeans clustering to the data.

Returns

a new *Experiment* with one additional entry in *Experiment.conditions* named *name*, of type *category*. The new category has values *name_1*, *name_2*, etc to indicate which k-means cluster an event is a member of.

The new *Experiment* also has one new statistic called *centers*, which is a list of tuples encoding the centroids of each k-means cluster.

Return type *Experiment*

default_view(***kwargs*)

Returns a diagnostic plot of the k-means clustering.

Returns *IView*

Return type an *IView*, call *KMeans1DView.plot* to see the diagnostic plot.

class `cytosflow.operations.kmeans.KMeans1DView`

Bases: `cytosflow.operations.base_op_views.By1DView`, `cytosflow.operations.base_op_views.AnnotatingView`, `cytosflow.views.histogram.HistogramView`

A diagnostic view for *KMeansOp* (1D, using a histogram)

op

The op whose parameters we're viewing.

Type `Instance(KMeansOp)`

facets

A read-only list of the conditions used to facet this view.

Type `List(Str)`

by

A read-only list of the conditions used to group this view's data before plotting.

Type `List(Str)`

channel

The channel this view is viewing. If you created the view using *default_view*, this is already set.

Type `Str`

scale

The way to scale the x axes. If you created the view using *default_view*, this may be already set.

Type `{'linear', 'log', 'logicle'}`

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type `String`

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type `String`

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type `String`

huescale

How should the color scale for `huefacet` be scaled?

Type `{ 'linear', 'log', 'logicle' }`

plot(`experiment`, `**kwargs`)

Plot the plots.

Parameters

- **experiment** (`Experiment`) – The `Experiment` to plot using this view.
- **title** (`str`) – Set the plot title
- **xlabel** (`str`) – Set the X axis label
- **ylabel** (`str`) – Set the Y axis label
- **hue_label** (`str`) – Set the label for the hue facet (in the legend)
- **legend** (`bool`) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (`bool`) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (`bool`) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (`list`) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (`list`) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (`list`) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (`float`) – The height of *each row* in inches. Default = 3.0
- **aspect** (`float`) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (`int`) – If `xfacet` is set and `yfacet` is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (`{ "darkgrid", "whitegrid", "dark", "white", "ticks" }`) – Which seaborn style to apply to the plot? Default is `whitegrid`.

- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*((float, float))*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **num_bins** (*int*) – The number of bins to plot in the histogram. Clipped to [100, 1000]
- **histtype** (*{‘stepfilled’, ‘step’, ‘bar’}*) – The type of histogram to draw. `stepfilled` is the default, which is a line plot with a color filled under the curve.
- **density** (*bool*) – If `True`, re-scale the histogram to form a probability density function, so the area under the histogram is 1.
- **linewidth** (*float*) – The width of the histogram line (in points)
- **linestyle** (*[‘-’ | ‘-.’ | ‘.’ | ‘:’ | “None”]*) – The style of the line to plot
- **alpha** (*float (default = 0.5)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **plot_name** (*Str*) – If this `IView` can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

class `cytoflow.operations.kmeans.KMeans2DView`

Bases: `cytoflow.operations.base_op_views.By2DView`, `cytoflow.operations.base_op_views.AnnotatingView`, `cytoflow.views.scatterplot.ScatterplotView`

A diagnostic view for `KMeansOp` (2D, using a scatterplot).

op

The op whose parameters we’re viewing.

Type `Instance(KMeansOp)`

facets

A read-only list of the conditions used to facet this view.

Type `List(Str)`

by

A read-only list of the conditions used to group this view’s data before plotting.

Type `List(Str)`

xchannel

The channels to use for this view’s X axis. If you created the view using `default_view`, this is already set.

Type `Str`

ychannel

The channels to use for this view's Y axis. If you created the view using `default_view`, this is already set.

Type Str

xscale

The way to scale the x axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

yscale

The way to scale the y axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for `huefacet` be scaled?

Type {'linear', 'log', 'logicle'}

plot(*experiment*, ***kwargs*)

Plot the plots.

Parameters

- **experiment** (*Experiment*) – The `Experiment` to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.

- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*((float, float))*) – Set the range of the plot’s X axis.
- **ylim** (*((float, float))*) – Set the range of the plot’s Y axis.
- **alpha** (*float (default = 0.25)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **s** (*int (default = 2)*) – The size in points².
- **marker** (*a matplotlib marker style, usually a string*) – Specifies the glyph to draw for each point on the scatterplot. See `matplotlib.markers` for examples. Default: ‘o’
- **color** (*matplotlib color*) – The color to plot the annotations. Overrides the default color cycle.
- **plot_name** (*Str*) – If this `IView` can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

cytosflow.operations.pca

Apply principal component analysis (PCA) to flow data – decomposes the multivariate data set into orthogonal components that explain the maximum amount of variance. *pca* has one class:

PCAOp – the *IOperation* that applies PCA to an *Experiment*.

class cytosflow.operations.pca.PCAOp

Bases: `traits.has_traits.HasStrictTraits`

Use principal components analysis (PCA) to decompose a multivariate data set into orthogonal components that explain a maximum amount of variance.

Call *estimate* to compute the optimal decomposition.

Calling *apply* creates new “channels” named {name}_1 . . . {name}_n, where name is the *name* attribute and n is *num_components*.

The same decomposition may not be appropriate for different subsets of the data set. If this is the case, you can use the *by* attribute to specify metadata by which to aggregate the data before estimating (and applying) a model. The PCA parameters such as the number of components and the kernel are the same across each subset, though.

name

The operation name; determines the name of the new columns.

Type Str

channels

The channels to apply the decomposition to.

Type List(Str)

scale

Re-scale the data in the specified channels before fitting. If a channel is in *channels* but not in *scale*, the current package-wide default (set with *set_default_scale*) is used.

Type Dict(Str : {"linear", "logicle", "log"})

num_components

How many components to fit to the data? Must be a positive integer.

Type Int (default = 2)

by

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting *by* to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

Type List(Str)

whiten

Scale each component to unit variance? May be useful if you will be using unsupervised clustering (such as K-means).

Type Bool (default = False)

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.

```
>>> pca = flow.PCAOp(name = 'PCA',
...                  channels = ['V2-A', 'V2-H', 'Y2-A', 'Y2-H'],
...                  scale = {'V2-A' : 'log',
...                           'V2-H' : 'log',
...                           'Y2-A' : 'log',
...                           'Y2-H' : 'log'},
...                  num_components = 2,
...                  by = ["Dox"])
```

Estimate the decomposition

```
>>> pca.estimate(ex)
```

Apply the operation

```
>>> ex2 = pca.apply(ex)
```



Plot a scatterplot of the PCA. Compare to a scatterplot of the underlying channels.



```
>>> flow.ScatterplotView(xchannel = "V2-A",
...                      xscale = "log",
...                      ychannel = "Y2-A",
...                      yscale = "log",
...                      subset = "Dox == 1.0").plot(ex2)
```

```
>>> flow.ScatterplotView(xchannel = "PCA_1",
...                      ychannel = "PCA_2",
...                      subset = "Dox == 1.0").plot(ex2)
```

```
>>> flow.ScatterplotView(xchannel = "V2-A",
...                      xscale = "log",
...                      ychannel = "Y2-A",
...                      yscale = "log",
...                      subset = "Dox == 10.0").plot(ex2)
```

```
>>> flow.ScatterplotView(xchannel = "PCA_1",
...                      ychannel = "PCA_2",
...                      subset = "Dox == 10.0").plot(ex2)
```

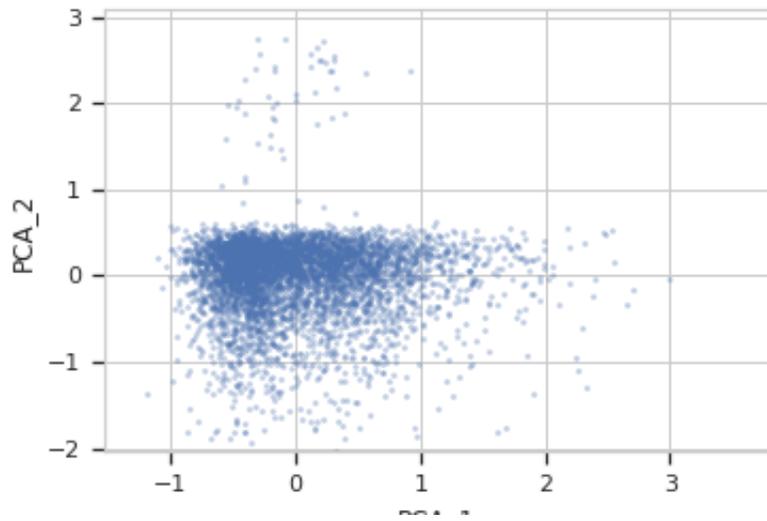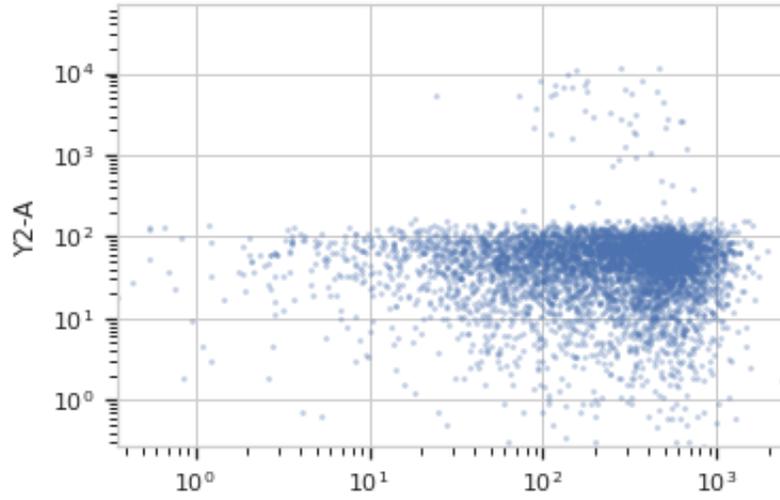

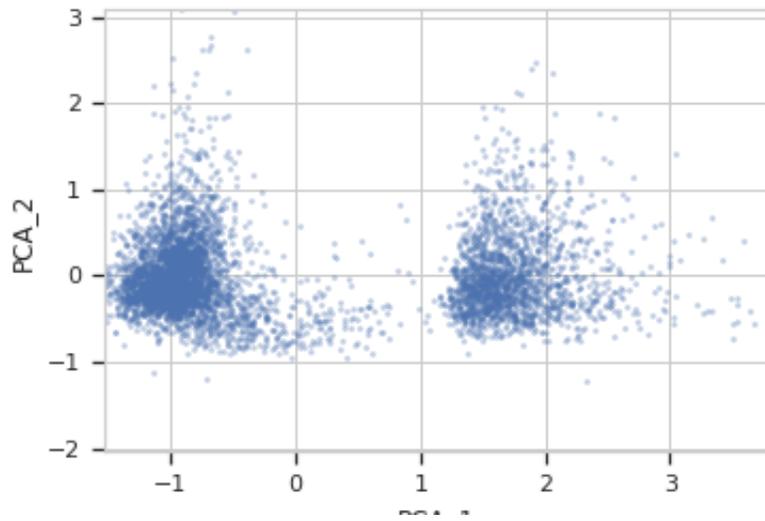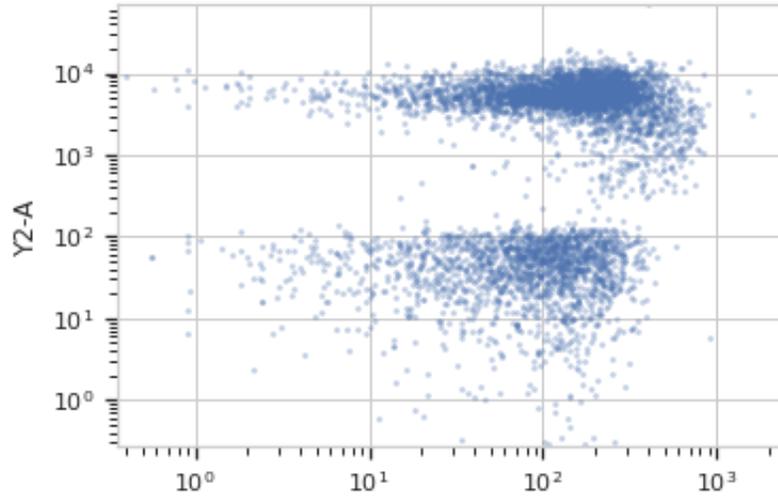

estimate(*experiment*, *subset=None*)

Estimate the decomposition

Parameters

- **experiment** (*Experiment*) – The *Experiment* to use to estimate the k-means clusters
- **subset** (*str (default = None)*) – A Python expression that specifies a subset of the data in *experiment* to use to parameterize the operation.

apply(*experiment*)

Apply the PCA decomposition to the data.

Returns a new *Experiment* with additional *Experiment.channels* named *name_1* ... *name_n*

Return type *Experiment*

cytotflow.operations.polygon

Apply a polygon gate to two channels in an *Experiment*. *polygon* has two classes:

PolygonOp – Applies the gate, given a set of vertices.

ScatterplotPolygonSelectionView – an *IView* that allows you to view the polygon and/or interactively set the vertices on a scatterplot.

DensityPolygonSelectionView – an *IView* that allows you to view the polygon and/or interactively set the vertices on a scatterplot.

class `cytotflow.operations.polygon.PolygonOp`

Bases: `traits.has_traits.HasStrictTraits`

Apply a polygon gate to a cytometry experiment.

name

The operation name. Used to name the new metadata field in the experiment that's created by *apply*

Type `Str`

xchannel, ychannel

The names of the x and y channels to apply the gate.

Type `Str`

xscale, yscale

The scales applied to the data before drawing the polygon.

Type `{ 'linear', 'log', 'logicle' }` (default = 'linear')

vertices

The polygon vertices. An ordered list of 2-tuples, representing the x and y coordinates of the vertices.

Type `List((Float, Float))`

Notes

You can set the vertices by hand, I suppose, but it's much easier to use the interactive view you get from `default_view` to do so. Set `ScatterplotPolygonSelectionView.interactive` to `True`, then single-click to set vertices. Click the first vertex a second time to close the polygon. You'll need to do this in a Jupyter notebook with `%matplotlib notebook` – see the Interactive Plots demo for an example.

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.

```
>>> p = flow.PolygonOp(name = "Polygon",
...                   xchannel = "V2-A",
...                   ychannel = "Y2-A")
>>> p.vertices = [(23.411982294776319, 5158.7027015021222),
...              (102.22182270573683, 23124.058843387455),
...              (510.94519955277201, 23124.058843387455),
...              (1089.5215641232173, 3800.3424832180476),
...              (340.56382570202402, 801.98947404942271),
...              (65.42597937575897, 1119.3133482602157)]
```

Show the default view.


```
>>> df = p.default_view(huefacet = "Dox",
...                   xscale = 'log',
...                   yscale = 'log',
...                   density = True)
```

```
>>> df.plot(ex)
```

Note: If you want to use the interactive default view in a Jupyter notebook, make sure you say `%matplotlib notebook` in the first cell (instead of `%matplotlib inline` or similar). Then call `default_view` with `interactive = True`:

```
df = p.default_view(huefacet = "Dox",
                   xscale = 'log',
                   yscale = 'log',
                   interactive = True)
df.plot(ex)
```

Apply the gate, and show the result

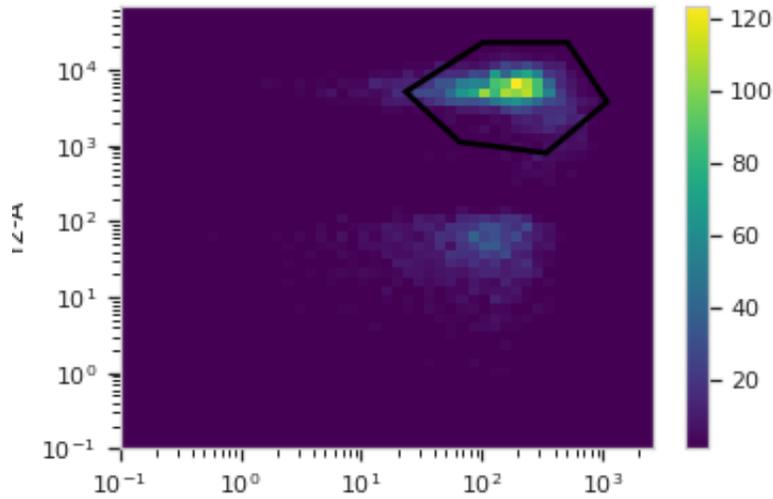


```
>>> ex2 = p.apply(ex)
>>> ex2.data.groupby('Polygon').size()
Polygon
False    15875
True      4125
dtype: int64
```

You can also get (or draw) the polygon on a density plot instead of a scatterplot:

```
>>> df = p.default_view(huefacet = "Dox",
...                     xscale = 'log',
...                     yscale = 'log')
```

```
>>> df.plot(ex)
```

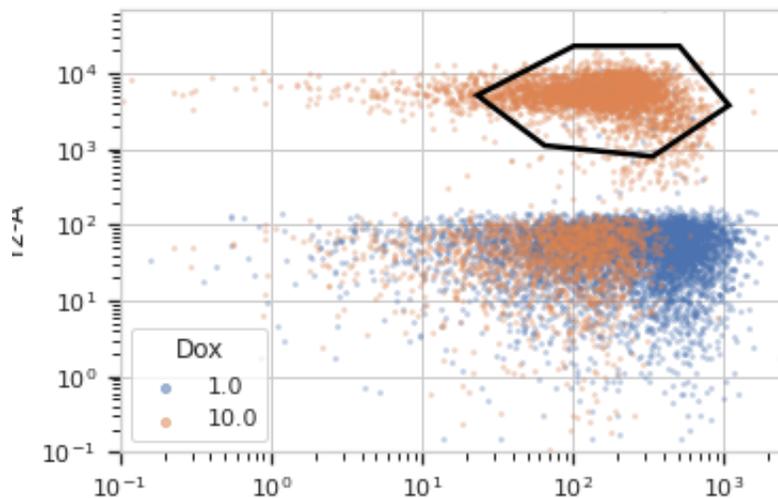

apply(*experiment*)

Applies the threshold to an experiment.

Parameters **experiment** (*Experiment*) – the old *Experiment* to which this op is applied

Returns a new ‘Experiment’, the same as **experiment** but with a new column of type **bool** with the same as the operation name. The bool is **True** if the event’s measurement is within the polygon, and **False** otherwise.

Return type *Experiment*

Raises *CytoflowOpError* – if for some reason the operation can’t be applied to this experiment. The reason is in the **args** attribute.

default_view(***kwargs*)

Returns an *IView* that allows a user to view the polygon or interactively draw it.

Parameters **density** (*bool, default = False*) – If **True**, return a density plot instead of a scatterplot.

class cytoflow.operations.polygon.ScatterplotPolygonSelectionView

Bases: cytoflow.operations.polygon._PolygonSelection, *cytoflow.views.scatterplot.ScatterplotView*

Plots, and lets the user interact with, a 2D polygon selection on a scatterplot.

interactive

is this view interactive? Ie, can the user set the polygon verticies with mouse clicks?

Type **bool**

xchannel

The channels to use for this view’s X axis. If you created the view using *default_view*, this is already set.

Type **Str**

ychannel

The channels to use for this view’s Y axis. If you created the view using *default_view*, this is already set.

Type **Str**

xscale

The way to scale the x axis. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

yscale

The way to scale the y axis. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type Instance(*IOperation*)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to *pandas.DataFrame.query*.

Type **str**

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for `huefacet` be scaled?

Type {'linear', 'log', 'logicle'}

Examples

In a Jupyter notebook with `%matplotlib notebook`

```
>>> s = flow.PolygonOp(xchannel = "V2-A",
...                   ychannel = "Y2-A")
>>> poly = s.default_view()
>>> poly.plot(ex2)
>>> poly.interactive = True
```

plot(*experiment*, ***kwargs*)

Plot the default view, and then draw the selection on top of it.

Parameters

- **experiment** (*Experiment*) – The `Experiment` to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.

- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*(float, float)*) – Set the range of the plot’s X axis.
- **ylim** (*(float, float)*) – Set the range of the plot’s Y axis.
- **alpha** (*float (default = 0.25)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **s** (*int (default = 2)*) – The size in points².
- **marker** (*a matplotlib marker style, usually a string*) – Specifies the glyph to draw for each point on the scatterplot. See `matplotlib.markers` for examples. Default: `‘o’`
- **patch_props** (*Dict*) – The properties of the `matplotlib.patches.Patch` that are drawn on top of the scatterplot or density view. They’re passed directly to the `matplotlib.patches.Patch` constructor. Default: `{edgecolor : ‘black’, linewidth : 2, fill : False}`

class `cytoflow.operations.polygon.DensityPolygonSelectionView`

Bases: `cytoflow.operations.polygon._PolygonSelection`, `cytoflow.views.densityplot.DensityView`

Plots, and lets the user interact with, a 2D polygon selection on a density plot.

interactive

is this view interactive? Ie, can the user set the polygon verticies with mouse clicks?

Type `bool`

xchannel

The channels to use for this view’s X axis. If you created the view using `default_view`, this is already set.

Type `Str`

ychannel

The channels to use for this view’s Y axis. If you created the view using `default_view`, this is already set.

Type `Str`

xscale

The way to scale the x axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

yscale

The way to scale the y axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The `IOperation` that this view is associated with. If you created the view using `default_view`, this is already set.

Type Instance(`IOperation`)

huefacet

You must leave the hue facet unset!

Type None

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huescale

How should the color scale for `huefacet` be scaled?

Type {'linear', 'log', 'logicle'}

Examples

In a Jupyter notebook with `%matplotlib notebook`

```
>>> s = flow.PolygonOp(xchannel = "V2-A",
...                   ychannel = "Y2-A")
>>> poly = s.default_view(density = True)
>>> poly.plot(ex2)
>>> poly.interactive = True
```

plot(*experiment*, ***kwargs*)

Plot the default view, and then draw the selection on top of it.

Parameters `patch_props` (*Dict*) – The properties of the `matplotlib.patches.Patch` that are drawn on top of the scatterplot or density view. They're passed directly to the `matplotlib.patches.Patch` constructor. Default: {`edgecolor` : 'black', `linewidth` : 2, `fill` : False}

cytoflow.operations.quad

Applies a (2D) quad gate to an *Experiment*. *quad* has two classes:

QuadOp – Applies the gate, given a pair of thresholds

ScatterplotQuadSelectionView – an *IView* that allows you to view the quadrants and/or interactively set the thresholds on a scatterplot.

ScatterplotQuadSelectionView – an *IView* that allows you to view the quadrants and/or interactively set the thresholds on a density plot.

class cytoflow.operations.quad.QuadOp

Bases: `traits.has_traits.HasStrictTraits`

Apply a quadrant gate to a cytometry experiment.

Creates a new metadata column named *name*, with values *name_1* (upper-left quadrant), *name_2* (upper-right), *name_3* (lower-left), and *name_4* (lower-right). This ordering is arbitrary, and was chosen to match the FACSDiva order.

name

The operation name. Used to name the new metadata field in the experiment that's created by *apply*

Type Str

xchannel

The name of the first channel to apply the range gate.

Type Str

xthreshold

The threshold in the xchannel to gate with.

Type Float

ychannel

The name of the secon channel to apply the range gate.

Type Str

ythreshold

The threshold in ychannel to gate with.

Type Float

Examples

Make a little data set.

```

>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                    flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()

```

Create and parameterize the operation.

(continued from previous page)

```
Quad_3    8236
Quad_4    7397
dtype: int64
```

apply(*experiment*)

Applies the quad gate to an experiment.

Parameters *experiment* (*Experiment*) – the *Experiment* to which this op is applied**Returns** a new *Experiment*, the same as the old *Experiment* but with a new column the same as the operation *name*. The new column is of type *Category*, with values *name_1*, *name_2*, *name_3*, and *name_4*, applied to events CLOCKWISE from upper-left.**Return type** *Experiment***Raises** *CytoflowOpError* – if for some reason the operation can't be applied to this experiment. The reason is in the *args* attribute of *CytoflowOpError*.**default_view**(***kwargs*)Returns an *IView* that allows a user to view the quad selector or interactively draw it.**Parameters** *density* (*bool*, *default = False*) – If *True*, return a density plot instead of a scatterplot.**class** `cytoflow.operations.quad.ScatterplotQuadSelectionView`Bases: `cytoflow.operations.quad._QuadSelection`, `cytoflow.views.scatterplot.ScatterplotView`

Plots, and lets the user interact with, a quadrant gate.

interactive

is this view interactive? Ie, can the user set the threshold with a mouse click?

Type `Bool`**xchannel**The channels to use for this view's X axis. If you created the view using *default_view*, this is already set.**Type** `Str`**ychannel**The channels to use for this view's Y axis. If you created the view using *default_view*, this is already set.**Type** `Str`**xscale**The way to scale the x axis. If you created the view using *default_view*, this may be already set.**Type** `{'linear', 'log', 'logicle'}`**yscale**The way to scale the y axis. If you created the view using *default_view*, this may be already set.**Type** `{'linear', 'log', 'logicle'}`**op**The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.**Type** `Instance(IOperation)`

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type `String`

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type `String`

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type `String`

huescale

How should the color scale for `huefacet` be scaled?

Type `{'linear', 'log', 'logicle'}`

Examples

In an Jupyter notebook with `%matplotlib notebook`

```
>>> q = flow.QuadOp(name = "Quad",
...                 xchannel = "V2-A",
...                 ychannel = "Y2-A"))
>>> qv = q.default_view()
>>> qv.interactive = True
>>> qv.plot(ex2)
```

plot(*experiment*, ***kwargs*)

Plot the default view, and then draw the quad selection on top of it.

Parameters

- **experiment** (*Experiment*) – The `Experiment` to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huefacet** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.

- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*(float, float)*) – Set the range of the plot’s X axis.
- **ylim** (*(float, float)*) – Set the range of the plot’s Y axis.
- **alpha** (*float (default = 0.25)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **s** (*int (default = 2)*) – The size in points².
- **marker** (*a matplotlib marker style, usually a string*) – Specifies the glyph to draw for each point on the scatterplot. See `matplotlib.markers` for examples. Default: ‘o’
- **line_props** (*Dict*) – The properties of the `matplotlib.lines.Line2D` that are drawn on top of the scatterplot or density view. They’re passed directly to the `matplotlib.lines.Line2D` constructor. Default: `{color : 'black', linewidth : 2}`

class `cytoflow.operations.quad.DensityQuadSelectionView`

Bases: `cytoflow.operations.quad._QuadSelection`, `cytoflow.views.densityplot.DensityView`

Plots, and lets the user interact with, a quadrant gate on a density view

interactive

is this view interactive? Ie, can the user set the threshold with a mouse click?

Type `Bool`

xchannel

The channels to use for this view’s X axis. If you created the view using `default_view`, this is already set.

Type `Str`

ychannel

The channels to use for this view's Y axis. If you created the view using `default_view`, this is already set.

Type Str

xscale

The way to scale the x axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

yscale

The way to scale the y axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The `IOperation` that this view is associated with. If you created the view using `default_view`, this is already set.

Type Instance(`IOperation`)

huefacet

You must leave the hue facet unset!

Type None

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huescale

How should the color scale for `huefacet` be scaled?

Type {'linear', 'log', 'logicle'}

Examples

In an Jupyter notebook with `%matplotlib notebook`

```
>>> q = flow.QuadOp(name = "Quad",
...                 xchannel = "V2-A",
...                 ychannel = "Y2-A"))
>>> qv = q.default_view(density = True)
>>> qv.interactive = True
>>> qv.plot(ex2)
```

plot(*experiment*, ***kwargs*)

Plot the default view, and then draw the quad selection on top of it.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is **True**.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*((float, float))*) – Set the range of the plot’s X axis.
- **ylim** (*((float, float))*) – Set the range of the plot’s Y axis.
- **gridsize** (*int*) – The size of the grid on each axis. Default = 50
- **smoothed** (*bool*) – Should the resulting mesh be smoothed?
- **smoothed_sigma** (*int*) – The standard deviation of the smoothing kernel. default = 1.

- **cmap** (*cmap*) – An instance of `matplotlib.colors.Colormap`. By default, the `viridis` colormap is used
- **under_color** (*matplotlib color*) – Sets the color to be used for low out-of-range values.
- **bad_color** (*matplotlib color*) – Set the color to be used for masked values.
- **line_props** (*Dict*) – The properties of the `matplotlib.lines.Line2D` that are drawn on top of the scatterplot or density view. They're passed directly to the `matplotlib.lines.Line2D` constructor. Default: `{color : 'black', linewidth : 2}`

cytoflow.operations.range

Applies a (1D) range gate to an *Experiment*. *range* has two classes:

RangeOp – Applies the gate, given a pair of thresholds

RangeSelection – an *IView* that allows you to view the range and/or interactively set the thresholds.

class `cytoflow.operations.range.RangeOp`

Bases: `traits.has_traits.HasStrictTraits`

Apply a range gate to a cytometry experiment.

name

The operation name. Used to name the new metadata field in the experiment that's created by *apply*

Type `Str`

channel

The name of the channel to apply the range gate.

Type `Str`

low

The lowest value to include in this gate.

Type `Float`

high

The highest value to include in this gate.

Type `Float`

Examples

Make a little data set.


```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.

```
>>> range_op = flow.RangeOp(name = 'Range',
...                           channel = 'Y2-A',
...                           low = 2000,
...                           high = 10000)
```

Plot a diagnostic view

```
>>> rv = range_op.default_view(scale = 'log')
>>> rv.plot(ex)
```

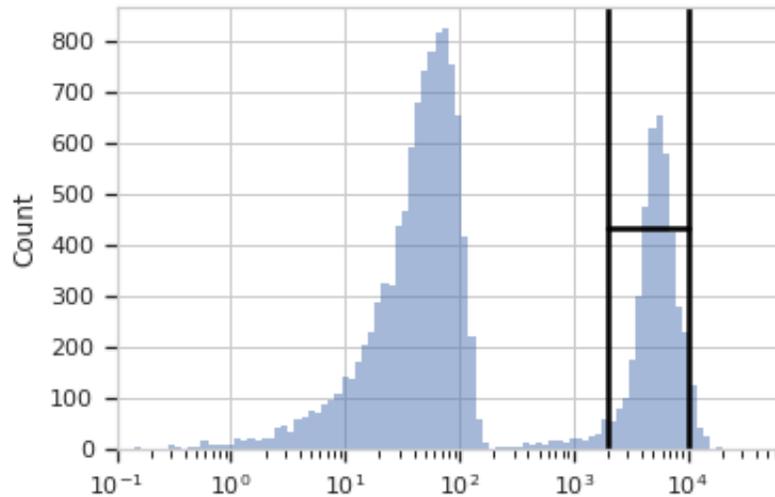

Note: If you want to use the interactive default view in a Jupyter notebook, make sure you say `%matplotlib notebook` in the first cell (instead of `%matplotlib inline` or similar). Then call `default_view()` with `interactive = True`:

```
rv = range_op.default_view(scale = 'log',
...                         interactive = True)
rv.plot(ex)
```

Apply the gate, and show the result

```
>>> ex2 = range_op.apply(ex)
>>> ex2.data.groupby('Range').size()
Range
False    16042
True      3958
dtype: int64
```

apply(*experiment*)

Applies the range gate to an experiment.

Parameters *experiment* (*Experiment*) – the *Experiment* to which this op is applied

Returns a new *Experiment*, the same as old *Experiment* but with a new column of type `bool` with the same as the operation name. The `bool` is `True` if the event's measurement in *channel*

is greater than *low* and less than *high*; it is False otherwise.

Return type *Experiment*

default_view(**kwargs)

class cytoflow.operations.range.RangeSelection

Bases: *cytoflow.operations.base_op_views.Op1DView*, *cytoflow.views.histogram.HistogramView*

Plots, and lets the user interact with, a selection on the X axis.

interactive

is this view interactive? Ie, can the user set min and max with a mouse drag?

Type Bool

channel

The channel this view is viewing. If you created the view using *default_view*, this is already set.

Type Str

scale

The way to scale the x axes. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type Instance(*IOperation*)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to *pandas.DataFrame.query*.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

In an IPython notebook with `%matplotlib notebook`

```
>>> r = RangeOp(name = "RangeGate",
...             channel = 'Y2-A')
>>> rv = r.default_view()
>>> rv.interactive = True
>>> rv.plot(ex2)
>>> ### draw a range on the plot ###
>>> print r.low, r.high
```

`plot(experiment, **kwargs)`

Plot the underlying histogram and then plot the selection on top of it.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.

- **max_quantile** (*float* (>0.0 and <1.0 , *default* = 1.00)) – Clip data that is greater than this quantile.
- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **num_bins** (*int*) – The number of bins to plot in the histogram. Clipped to [100, 1000]
- **histtype** (*{‘stepfilled’, ‘step’, ‘bar’}*) – The type of histogram to draw. `stepfilled` is the default, which is a line plot with a color filled under the curve.
- **density** (*bool*) – If `True`, re-scale the histogram to form a probability density function, so the area under the histogram is 1.
- **linewidth** (*float*) – The width of the histogram line (in points)
- **linestyle** (*[‘-’ | ‘-.’ | ‘.’ | ‘:’ | “None”]*) – The style of the line to plot
- **alpha** (*float* (*default* = 0.5)) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **line_props** (*Dict*) – The properties of the `matplotlib.lines.Line2D` that are drawn on top of the histogram. They’re passed directly to the `matplotlib.lines.Line2D` constructor. Default: `{color : ‘black’, linewidth : 2}`

cytoflow.operations.range2d

Applies a 2D range gate (ie, a rectangle gate) to an *Experiment*. *range2d* has two classes:

Range2DOp – Applies the gate, given four thresholds

ScatterplotRangeSelection2DView – an *IView* that allows you to view the range and/or interactively set the thresholds on a scatterplot.

DensityRangeSelection2DView – an *IView* that allows you to view the range and/or interactively set the thresholds on a scatterplot.

class `cytoflow.operations.range2d.Range2DOp`

Bases: `traits.has_traits.HasStrictTraits`

Apply a 2D range gate to a cytometry experiment.

name

The operation name. Used to name the new metadata field in the experiment that’s created by *apply*

Type `Str`

xchannel

The name of the first channel to apply the range gate.

Type `Str`

xlow

The lowest value in xchannel to include in this gate.

Type `Float`

xhigh

The highest value in xchannel to include in this gate.

Type `Float`

ychannel

The name of the second channel to apply the range gate.

Type Str

ylo

The lowest value in ychannel to include in this gate.

Type Float

yhigh

The highest value in ychannel to include in this gate.

Type Float

Examples

Make a little data set.

```
>>> import cytosflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.

```
>>> r = flow.Range2Dop(name = "Range2D",
...                    xchannel = "V2-A",
...                    xlow = 10,
...                    xhigh = 1000,
...                    ychannel = "Y2-A",
...                    ylow = 1000,
...                    yhigh = 20000)
```


Show the default view.

```
>>> rv = r.default_view(huefacet = "Dox",
...                     xscale = 'log',
...                     yscale = 'log')
```

```
>>> rv.plot(ex)
```

Note: If you want to use the interactive default view in a Jupyter notebook, make sure you say `%matplotlib notebook` in the first cell (instead of `%matplotlib inline` or similar). Then call `default_view()` with `interactive = True`:

```
rv = r.default_view(huefacet = "Dox",
                   xscale = 'log',
                   yscale = 'log',
                   interactive = True)
rv.plot(ex)
```

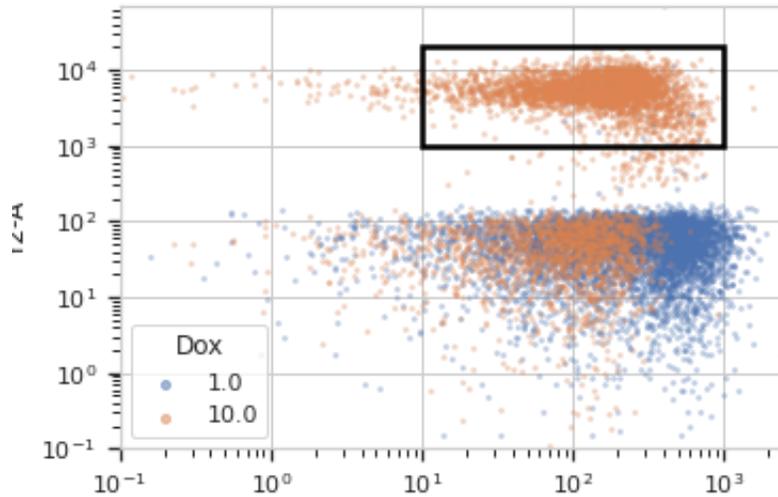

Apply the gate, and show the result

```
>>> ex2 = r.apply(ex)
>>> ex2.data.groupby('Range2D').size()
Range2D
False    16405
True      3595
dtype: int64
```

`apply(experiment)`

Applies the threshold to an experiment.

Parameters `experiment` (*Experiment*) – the *Experiment* to which this op is applied

Returns a new *Experiment*, the same as the old experiment but with a new column with a data type of `bool` and the same as the operation `name`. The `bool` is `True` if the event's measurement in `xchannel` is greater than `xlow` and less than `xhigh`, and the event's measurement in `ychannel` is greater than `ylow` and less than `yhigh`; it is `False` otherwise.

Return type *Experiment*

`default_view(**kwargs)`

Returns an *IView* that allows a user to view the selection or interactively draw it.

Parameters `density` (*bool*, *default = False*) – If `True`, return a density plot instead of a scatterplot.

`class cytoflow.operations.range2d.ScatterplotRangeSelection2DView`

Bases: `cytoflow.operations.range2d._RangeSelection2D`, `cytoflow.views.scatterplot.ScatterplotView`

Plots, and lets the user interact with, a 2D selection.

`interactive`

is this view interactive? Ie, can the user set min and max with a mouse drag?

Type `Bool`

xchannel

The channels to use for this view's X axis. If you created the view using *default_view*, this is already set.

Type Str

ychannel

The channels to use for this view's Y axis. If you created the view using *default_view*, this is already set.

Type Str

xscale

The way to scale the x axis. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

yscale

The way to scale the y axis. If you created the view using *default_view*, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type Instance(*IOperation*)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

In a Jupyter notebook with `%matplotlib notebook`

```
>>> r = flow.Range2Dop(name = "Range2D",
...                   xchannel = "V2-A",
...                   ychannel = "Y2-A")
>>> rv = r.default_view()
>>> rv.interactive = True
>>> rv.plot(ex2)
```

class `cytoflow.operations.range2d.DensityRangeSelection2DView`

Bases: `cytoflow.operations.range2d._RangeSelection2D`, `cytoflow.views.densityplot.DensityView`

Plots, and lets the user interact with, a 2D selection.

interactive

is this view interactive? Ie, can the user set min and max with a mouse drag?

Type Bool

xchannel

The channels to use for this view's X axis. If you created the view using `default_view`, this is already set.

Type Str

ychannel

The channels to use for this view's Y axis. If you created the view using `default_view`, this is already set.

Type Str

xscale

The way to scale the x axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

yscale

The way to scale the y axis. If you created the view using `default_view`, this may be already set.

Type {'linear', 'log', 'logicle'}

op

The *IOperation* that this view is associated with. If you created the view using `default_view`, this is already set.

Type Instance(*IOperation*)

huefacet

You must leave the hue facet unset!

Type None

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

In a Jupyter notebook with `%matplotlib notebook`

```
>>> r = flow.Range2Dop(name = "Range2D",
...                   xchannel = "V2-A",
...                   ychannel = "Y2-A")
>>> rv = r.default_view(density = True)
>>> rv.interactive = True
>>> rv.plot(ex2)
```

cytoflow.operations.ratio

Creates a new “channel” that is the ratio of the measurements in two other channels. *ratio* has one class:

RatioOp – applies the operation.

class `cytoflow.operations.ratio.RatioOp`

Bases: `traits.has_traits.HasStrictTraits`

Create a new “channel” from the ratio of two other channels.

name

The operation name. Also becomes the name of the new channel.

Type Str

numerator

The channel that is the numerator of the ratio.

Type Str

denominator

The channel that is the denominator of the ratio.

Type Str

Examples

```
>>> ratio_op = flow.RatioOp()
>>> ratio_op.numerator = "FITC-A"
>>> ex5 = ratio_op.apply(ex4)
```

apply(*experiment*)

Applies the ratio operation to an experiment

Parameters *experiment* (*Experiment*) – the *Experiment* to which this operation is applied

Returns

a new experiment with the new ratio channel

The new channel also has the following new metadata:

- **numerator** [Str] What was the numerator channel for the new one?
- **denominator** [Str] What was the denominator channel for the new one?

Return type *Experiment*

cytosflow.operations.threshold

Applies a threshold gate to an *Experiment*. *threshold* has two classes:

ThresholdOp – Applies the gate, given a threshold

ThresholdSelection – an *IView* that allows you to view and/or interactively set the threshold.

class cytosflow.operations.threshold.**ThresholdOp**

Bases: `traits.has_traits.HasStrictTraits`

Apply a threshold gate to a cytometry experiment.

name

The operation name. Used to name the new column in the experiment that's created by *apply*

Type Str

channel

The name of the channel to apply the threshold on.

Type Str

threshold

The value at which to threshold this channel.

Type Float

Examples

Make a little data set.


```
>>> import cytosflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and parameterize the operation.

```
>>> thresh_op = flow.ThresholdOp(name = 'Threshold',
...                               channel = 'Y2-A',
...                               threshold = 2000)
```

Plot a diagnostic view

```
>>> tv = thresh_op.default_view(scale = 'log')
>>> tv.plot(ex)
```

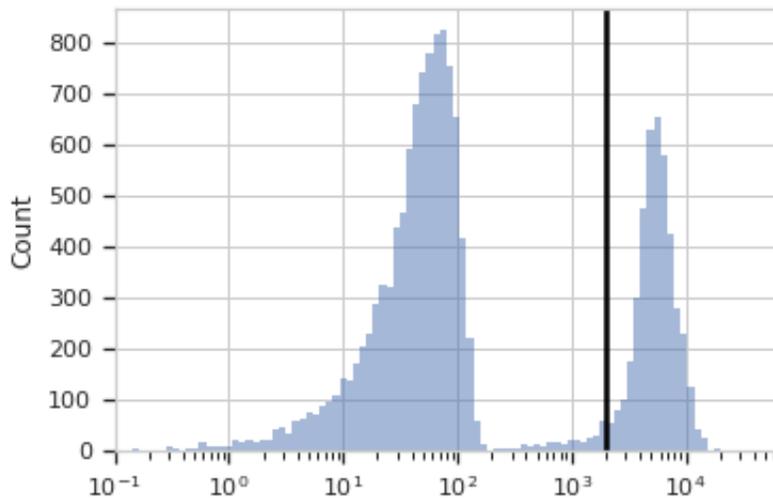

Note: If you want to use the interactive default view in a Jupyter notebook, make sure you say `%matplotlib notebook` in the first cell (instead of `%matplotlib inline` or similar). Then call `default_view()` with `interactive = True`:

```
tv = thresh_op.default_view(scale = 'log',
...                          interactive = True)
tv.plot(ex)
```

Apply the gate, and show the result

```
>>> ex2 = thresh_op.apply(ex)
>>> ex2.data.groupby('Threshold').size()
Threshold
False    15786
True     4214
dtype: int64
```

apply(*experiment*)

Applies the threshold to an experiment.

Parameters *experiment* (*Experiment*) – the *Experiment* to which this operation is applied

Returns a new *Experiment*, the same as the old experiment but with a new column of type `bool` with the same name as the operation *name*. The new condition is `True` if the event's measurement in *channel* is greater than *threshold*; it is `False` otherwise.

Return type *Experiment*

default_view(***kwargs*)

class `cytoflow.operations.threshold.ThresholdSelection`

Bases: `cytoflow.operations.base_op_views.Op1DView`, `cytoflow.views.histogram.HistogramView`

Plots, and lets the user interact with, a threshold on the X axis.

interactive

is this view interactive?

Type `Bool`

channel

The channel this view is viewing. If you created the view using *default_view*, this is already set.

Type `Str`

scale

The way to scale the x axes. If you created the view using *default_view*, this may be already set.

Type `{'linear', 'log', 'logicle'}`

op

The *IOperation* that this view is associated with. If you created the view using *default_view*, this is already set.

Type `Instance(IOperation)`

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type `String`

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

In an Jupyter notebook with `%matplotlib notebook`

```
>>> t = flow.ThresholdOp(name = "Threshold",
...                      channel = "Y2-A")
>>> tv = t.default_view()
>>> tv.plot(ex2)
>>> tv.interactive = True
>>> # .... draw a threshold on the plot
>>> ex3 = thresh.apply(ex2)
```

plot(*experiment*, ***kwargs*)

Plot the histogram and then plot the threshold on top of it.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.

- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **num_bins** (*int*) – The number of bins to plot in the histogram. Clipped to [100, 1000]
- **histtype** (*{‘stepfilled’, ‘step’, ‘bar’}*) – The type of histogram to draw. `stepfilled` is the default, which is a line plot with a color filled under the curve.
- **density** (*bool*) – If `True`, re-scale the histogram to form a probability density function, so the area under the histogram is 1.
- **linewidth** (*float*) – The width of the histogram line (in points)
- **linestyle** (*[‘-’ | ‘-’ | ‘-.’ | ‘.’ | “None”]*) – The style of the line to plot
- **alpha** (*float (default = 0.5)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **line_props** (*Dict*) – The properties of the `matplotlib.lines.Line2D` that are drawn on top of the histogram. They’re passed directly to the `matplotlib.lines.Line2D` constructor. Default: `{color : ‘black’, linewidth : 2}`

cytotflow.operations.xform_stat

Transforms a statistic. `xform_stat` has one class:

`TransformStatisticOp` – apply a function to a statistic, making a new statistic.

class `cytotflow.operations.xform_stat.TransformStatisticOp`

Bases: `traits.has_traits.HasStrictTraits`

Apply a function to a statistic, creating a new statistic. The function can be applied to the entire statistic, or it can be applied individually to groups of the statistic. The function should take a `pandas.Series` as its only argument. Return type is arbitrary, but a to be used with the rest of `cytotflow` it should probably be a numeric type or an iterable of numeric types.

As a special case, if the function returns a `pandas.Series` with the same index that it was passed, it is interpreted as a transformation. The resulting statistic will have the same length, index names and index levels as the original statistic.

name

The operation name. Becomes the first element in the `Experiment.statistics` key tuple.

Type `Str`

statistic

The statistic to apply the function to.

Type Tuple(Str, Str)

function

The function used to transform the statistic. *function* must take a `pandas.Series` as its only parameter. The return type is arbitrary, but to work with the rest of *cytoflow* it should probably be a numeric type or an iterable of numeric types.. If *statistic_name* is unset, the name of the function becomes the second in element in the *Experiment.statistics* key tuple.

Type Callable

statistic_name

The name of the function; if present, becomes the second element in the *Experiment.statistics* key tuple.

Type Str

by

A list of metadata attributes to aggregate the input statistic before applying the function. For example, if the statistic has two indices Time and Dox, setting `by = ["Time", "Dox"]` will apply *function* separately to each subset of the data with a unique combination of Time and Dox.

Type List(Str)

fill

Value to use in the statistic if a slice of the data is empty.

Type Any (default = 0)

Examples

```
>>> stats_op = ChannelStatisticOp(name = "Mean",
...                               channel = "Y2-A",
...                               function = np.mean,
...                               by = ["Dox"])
>>> ex2 = stats_op.apply(ex)
>>> log_op = TransformStatisticOp(name = "LogMean",
...                                statistic = ("Mean", "mean"),
...                                function = np.log)
>>> ex3 = log_op.apply(ex2)
```

apply(experiment)

Applies *function* to a statistic.

Parameters *experiment* (*Experiment*) – The *Experiment* to apply the operation to

Returns The same as the old experiment, but with a new statistic that results from applying *function* to the statistic specified in *statistic*.

Return type *Experiment*

cytoflow.scripts package

Submodules

cytoflow.scripts.channel_voltages

Returns the channel voltages (\$PnV) for the given FCS file.

`cytoflow.scripts.channel_voltages.main()`

cytoflow.scripts.fcs_metadata

Return the FCS metadata (in key : value format) for a given FCS file.

`cytoflow.scripts.fcs_metadata.main()`

cytoflow.scripts.parse_beads

Parse beads.csv into a dict to go in `cytoflow.operations.bead_calibration`. (As new beads are added, please add them to `cytoflow/operations/beads.csv`, then run this and put the result in `cytoflow.operations.bead_calibration`)

`cytoflow.scripts.parse_beads.main()`

cytoflow.scripts.split_fcs

The FCS standard allows multiple datasets to be concatenated into one FCS file. This script splits them, optionally renaming the resulting files using the provided FCS metadata.

`cytoflow.scripts.split_fcs.main()`

cytoflow.utility package

cytoflow.utility

This package contains a bunch of utility functions to support the other modules in *cytoflow*. This includes numeric functions, algorithms, error handling, custom traits, custom `matplotlib` widgets, custom `matplotlib` scales, and docstring handling.

Submodules

cytoflow.utility.algorithms

Useful algorithms.

ci – determine a confidence interval by bootstrapping.

percentiles – find percentiles in an array.

bootstrap – resample (with replacement) and store aggregate values.

`cytoflow.utility.algorithms.ci(data, func, which=95, boots=1000)`

Determine the confidence interval of a function applied to a data set by bootstrapping.

Parameters

- **data** (*pandas.DataFrame*) – The data to resample.
- **func** (*callable*) – A function that is called on a resampled data
- **which** (*int*) – The percentile to use for the confidence interval
- **boots** (*int (default = 1000):*) – How many times to bootstrap

Returns The confidence interval.

Return type (*float, float*)

`cytoflow.utility.algorithms.percentiles(a, pcts, axis=None)`

Like `scipy.stats.scoreatpercentile` but can take and return array of percentiles.

from seaborn: <https://github.com/mwaskom/seaborn/blob/master/seaborn/utls.py>

Parameters

- **a** (*array*) – data
- **pcts** (*sequence of percentile values*) – percentile or percentiles to find score at
- **axis** (*int or None*) – if not None, computes scores over this axis

Returns **scores** – array of scores at requested percentiles first dimension is length of object passed to pcts

Return type *array*

`cytoflow.utility.algorithms.bootstrap(*args, **kwargs)`

Resample one or more arrays with replacement and store aggregate values. Positional arguments are a sequence of arrays to bootstrap along the first axis and pass to a summary function.

Parameters

- **n_boot** (*int, default 10000*) – Number of iterations
- **axis** (*int, default None*) – Will pass axis to **func** as a keyword argument.
- **units** (*array, default None*) – Array of sampling unit IDs. When used the bootstrap resamples units and then observations within units instead of individual datapoints.
- **smooth** (*bool, default False*) – If True, performs a smoothed bootstrap (draws samples from a kernel density estimate); only works for one-dimensional inputs and cannot be used *units* is present.
- **func** (*callable, default np.mean*) – Function to call on the args that are passed in.
- **random_seed** (*int | None, default None*) – Seed for the random number generator; useful if you want reproducible resamples.

Returns

- *array* – array of bootstrapped statistic values
- **from seaborn** (<https://github.com/mwaskom/seaborn/blob/master/seaborn/algorithms.py>)

`cytoflow.utility.algorithms.is_inside_sm(polygon, point)`

`cytoflow.utility.algorithms.polygon_contains(points, polygon)`

cytoflow.utility.custom_traits

Custom traits for *cytoflow*

PositiveInt, *PositiveFloat* – versions of `traits.trait_types.Int` and `traits.trait_types.Float` that must be positive (and optionally 0).

PositiveCInt, *PositiveCFloat* – versions of `traits.trait_types.CInt`, `traits.trait_types.CFloat` that must be positive (and optionally 0).

IntOrNone, *FloatOrNone* – versions of `traits.trait_types.Int` and `traits.trait_types.Float` that may also hold the value `None`.

CIntOrNone, *CFloatOrNone* – versions of `traits.trait_types.CInt` and `traits.trait_types.CFloat` that may also hold the value `None`.

ScaleEnum – an enumeration whose value is one of the registered scales.

Removed – a trait that was present in a previous version but was removed.

Deprecated – a trait that was present in a previous version but was renamed.

```
class cytoflow.utility.custom_traits.PositiveInt(default_value=<traits.trait_type.NoDefaultSpecifiedType
object>, **metadata)
```

Bases: `traits.trait_types.BaseInt`

Defines a trait whose value must be a positive integer

info_text = 'a positive integer'

A description of the type of value this trait accepts:

validate(obj, name, value)

Validates that a specified value is valid for this trait.

```
class cytoflow.utility.custom_traits.PositiveCInt(default_value=<traits.trait_type.NoDefaultSpecifiedType
object>, **metadata)
```

Bases: `traits.trait_types.BaseCInt`

Defines a trait whose converted value must be a positive integer

info_text = 'a positive integer'

A description of the type of value this trait accepts:

validate(obj, name, value)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

```
class cytoflow.utility.custom_traits.PositiveFloat(default_value=<traits.trait_type.NoDefaultSpecifiedType
object>, **metadata)
```

Bases: `traits.trait_types.BaseFloat`

Defines a trait whose value must be a positive float

info_text = 'a positive float'

A description of the type of value this trait accepts:

validate(obj, name, value)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

```
class cytoflow.utility.custom_traits.PositiveCFloat(default_value=<traits.trait_type.NoDefaultSpecifiedType
object>, **metadata)
```

Bases: `traits.trait_types.BaseCFloat`

Defines a trait whose converted value must be a positive float

info_text = 'a positive float'

A description of the type of value this trait accepts:

validate(*obj, name, value*)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

```
class cytoflow.utility.custom_traits.FloatOrNone(default_value=<traits.trait_type._NoDefaultSpecifiedType
                                               object>, **metadata)
```

Bases: `traits.trait_types.BaseFloat`

Defines a trait whose value must be a float or None

info_text = 'a float or None'

A description of the type of value this trait accepts:

validate(*obj, name, value*)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

```
class cytoflow.utility.custom_traits.CFloatOrNone(default_value=<traits.trait_type._NoDefaultSpecifiedType
                                               object>, **metadata)
```

Bases: `traits.trait_types.BaseCFloat`

Defines a trait whose converted value must be a float or None

info_text = 'a float or None'

A description of the type of value this trait accepts:

validate(*obj, name, value*)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

```
class cytoflow.utility.custom_traits.IntOrNone(default_value=<traits.trait_type._NoDefaultSpecifiedType
                                               object>, **metadata)
```

Bases: `traits.trait_types.BaseInt`

Defines a trait whose value must be an integer or None

info_text = 'an int or None'

A description of the type of value this trait accepts:

validate(*obj, name, value*)

Validates that a specified value is valid for this trait.

```
class cytoflow.utility.custom_traits.CIntOrNone(default_value=<traits.trait_type._NoDefaultSpecifiedType
                                               object>, **metadata)
```

Bases: `traits.trait_types.BaseCInt`

Defines a trait whose converted value must be an integer or None

info_text = 'an int or None'

A description of the type of value this trait accepts:

validate(*obj, name, value*)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

class cytoflow.utility.custom_traits.**ScaleEnum**(*args, **metadata)

Bases: `traits.trait_types.BaseEnum`

Defines an enumeration that contains one of the registered data scales

info_text = 'an enum containing one of the registered scales'

get_default_value()

Get information about the default value.

The default implementation analyzes the value of the trait's `default_value` attribute and determines an appropriate `default_value_type` for the `default_value`. If you need to override this method to provide a different result tuple, the following values are valid values for `default_value_type`:

- 0, 1: The `default_value` item of the tuple is the default value.
- 2: The object containing the trait is the default value.
- 3: A new copy of the list specified by `default_value` is the default value.
- 4: A new copy of the dictionary specified by `default_value` is the default value.
- 5: A new instance of `TraitListObject` constructed using the `default_value` list is the default value.
- 6: A new instance of `TraitDictObject` constructed using the `default_value` dictionary is the default value.
- 7: `default_value` is a tuple of the form: (`callable`, `args`, `kw`), where `callable` is a callable, `args` is a tuple, and `kw` is either a dictionary or `None`. The default value is the result obtained by invoking `callable(*args, **kw)`.
- 8: `default_value` is a callable. The default value is the result obtained by invoking `default_value(object)`, where `object` is the object containing the trait. If the trait has a `validate()` method, the `validate()` method is also called to validate the result.
- 9: A new instance of `TraitSetObject` constructed using the `default_value` set is the default value.

Returns `default_value_type`, `default_value` – The default value information, consisting of an integer, giving the type of default value, and the corresponding default value as described above.

Return type `int`, any

class cytoflow.utility.custom_traits.**Removed**(**metadata)

Bases: `traits.trait_type.TraitType`

Names a trait that was present in a previous version but was removed.

Trait metadata:

- **err_string** : the error string in the error
- **gui** : if True, don't return a backtrace (because it's very slow)
- **warning** [if True, raise a warning when the trait is referenced.] Otherwise, raise an exception.

get(obj, name)

set(obj, name, value)

class cytoflow.utility.custom_traits.**Deprecated**(**metadata)

Bases: `traits.trait_type.TraitType`

Names a trait that was present in a previous version but was renamed. When the trait is accessed, a warning is raised, and the access is passed through to the new trait.

Trait metadata:

- **new** : the name of the new trait
- **err_string** : the error string in the error
- **gui** : if True, don't return a backtrace (because it's very slow)

get(*obj, name*)

set(*obj, name, value*)

cytoflow.utility.cytoflow_errors

Custom errors for *cytoflow*. Allows for custom handling in the GUI.

CytoflowError – a general error

CytoflowOpError – an error raised by an operation

CytoflowViewError – an error raised by a view

CytoflowWarning – a general warning

CytoflowOpWarning – a warning raised by an operation

CytoflowViewWarning – a warning raised by a view

exception `cytoflow.utility.cytoflow_errors.CytoflowError`

Bases: `RuntimeError`

A general error

exception `cytoflow.utility.cytoflow_errors.CytoflowOpError`

Bases: `cytoflow.utility.cytoflow_errors.CytoflowError`

An error raised by an operation.

Parameters

- **args[0]** (*string*) – The attribute or parameter whose bad value caused the error, or None if there isn't one.
- **args[1]** (*string*) – A more verbose error message.

exception `cytoflow.utility.cytoflow_errors.CytoflowViewError`

Bases: `cytoflow.utility.cytoflow_errors.CytoflowError`

An error raised by a view.

Parameters

- **args[0]** (*string*) – The attribute or parameter whose bad value caused the error, or None if there isn't one.
- **args[1]** (*string*) – A more verbose error message.

exception `cytoflow.utility.cytoflow_errors.CytoflowWarning`

Bases: `UserWarning`

A general warning.

exception `cytoflow.utility.cytoflow_errors.CytoflowOpWarning`

Bases: `cytoflow.utility.cytoflow_errors.CytoflowWarning`

A warning raised by an operation.

Parameters `args[0]` (*string*) – A verbose warning message

exception `cytoflow.utility.cytoflow_errors.CytoflowViewWarning`

Bases: `cytoflow.utility.cytoflow_errors.CytoflowWarning`

A warning raised by a view.

Parameters `args[0]` (*string*) – A verbose warning message

cytoflow.utility.docstring

Utility functions for operating on docstrings. They all assume that docstrings are formatted using the NumPy standard style:

<https://numpydoc.readthedocs.io/en/latest/format.html>

`expand_class_attributes` – take entries in the `Attributes` section of a class’s ancestors’ docstrings and adds them to the `Attributes` section of this class’s docstring.

`expand_method_parameters` – expand the `Parameters` section of a method’s docstring with `Parameters` from the overridden methods in the class’s ancestors.

`find_section` – find a named section in a numpy-formatted docstring.

`get_class_attributes` – get the entries from the `Attributes` section of a class’s docstring

`get_method_parameters` – get the entries from the `Parameters` section of a method’s docstring

`cytoflow.utility.docstring.expand_class_attributes`(*cls*)

Takes entries in the `Attributes` section of a class’s ancestors’ docstrings and adds them to the `Attributes` section of this class’s docstring.

All the classes must have docstrings formatted with the using the `numpy` docstring style.

Parameters `cls` (*class*) – The class whose docstring is to be expanded.

`cytoflow.utility.docstring.expand_method_parameters`(*cls, method*)

Expand the `Parameters` section of a method’s docstring with `Parameters` from the overridden methods in the class’s ancestors.

All the methods must have docstrings formatted with the using the `numpy` docstring style.

Parameters

- `cls` (*class*) – The class whose ancestors are to be parsed for more parameters.
- `method` (*callable*) – The method whose docstring is to be expanded.

`cytoflow.utility.docstring.find_section`(*section, lines*)

Find a named section in a numpy-formatted docstring.

Parameters

- `section` (*string*) – The name of the section to find
- `lines` (*array of string*) – The docstring, split into lines

Returns The indices of the first and last lines of the section.

Return type `int, int`

`cytoflow.utility.docstring.get_class_attributes`(*cls*)

Gets the entries from the `Attributes` section of a class’s numpy-formatted docstring.

Parameters `cls` (*class*) – The class whose docstring to parse

Returns

- `name` : the attribute's name
- `type` : the attribute's type
- `body` : the attribute's description body

Return type array of (`name`, `type`, `body`)

`cytoflow.utility.docstring.get_method_parameters(method)`

Gets the entries from the Parameters section of a method's `numpy`-formatted docstring.

Parameters `method` (*callable*) – The method whose docstring to parse.

Returns

- `name` : the attribute's name
- `type` : the attribute's type
- `body` : the attribute's description body

Return type array of (`name`, `type`, `body`)

cytoflow.utility.fcswrite

Write `.fcs` files for flow cytometry

Adapted from <https://github.com/ZELLMECHANIK-DRESDEN/fcswrite>

`cytoflow.utility.fcswrite.write_fcs(filename, chn_names, chn_ranges, data, compat_chn_names=True, compat_percent=True, compat_negative=True, compat_copy=True, verbose=0, **kws)`

Write `numpy` data to an `.fcs` file (FCS3.0 file format)

Parameters

- **filename** (*str*) – Path to the output `.fcs` file
- **chn_names** (*list of str, length C*) – Names of the output channels
- **chn_ranges** (*dictionary*) – Keys: channel names. Values: ranges
- **data** (*2d ndarray of shape (N,C)*) – The `numpy` array data to store as `.fcs` file format.
- **compat_chn_names** (*bool*) – Compatibility mode for 3rd party flow analysis software: The characters “`“`”, “`“?`”, and “`“_`” are removed in the output channel names.
- **compat_percent** (*bool*) – Compatibility mode for 3rd party flow analysis software: If a column in `data` contains values only between 0 and 1, they are multiplied by 100.
- **compat_negative** (*bool*) – Compatibility mode for 3rd party flow analysis software: Flip the sign of `data` if its mean is smaller than zero.
- **compat_copy** (*bool*) – Do not override the input array `data` when modified in compatibility mode.
- **kwargs** (*Str*) – Additional keyword arguments are written as keyword/value pairs in the TEXT segment of the FCS file.

Notes

These commonly used unicode characters are replaced: “μ”, “²”

cytoflow.utility.hlog_scale

A scale that transforms the data using the `hyperlog` function. `hlog_scale` has several classes:

`HlogScale` – implements `IScale`, the `cytoflow` interface for the scale.

`MatplotlibHlogScale` – inherits `matplotlib.scale.ScaleBase`, implements the matplotlib interface

`HlogMajorLocator` – inherits `matplotlib.ticker.Locator`, lets matplotlib know where major tics are along a plot axis.

`HlogMinorLocator` – inherits `matplotlib.ticker.Locator`, lets matplotlib know where minor tics are along a plot axis

`hlog`, `hlog_inv` – the actual functions that perform the scale and inverse

class `cytoflow.utility.hlog_scale.HlogScale(**kwargs)`

Bases: `cytoflow.utility.scale.ScaleMixin`

A scale that transforms the data using the `hyperlog` function.

This scaling method implements a “linear-like” region around 0, and a “log-like” region for large values, with a smooth transition between them.

The transformation has one parameter, `b`, which specifies the location of the transition from linear to log-like. The default, 500, is good for 18-bit scales and not good for other scales.

b

the location of the transition from linear to log-like.

Type Float (default = 500)

References

- [1] **Hyperlog-a flexible log-like transform for negative, zero, and positive** valued data. Bagwell CB. Cytometry A. 2005 Mar;64(1):34-42. PMID: 15700280 <http://onlinelibrary.wiley.com/doi/10.1002/cyto.a.20114/abstract>

name = 'hlog'

inverse(*data*)

Transforms ‘data’ using the inverse of this scale.

clip(*data*)

Clips data to the range of the scale function

norm()

A factory function that returns `matplotlib.colors.Normalize` instance, which normalizes values for a `matplotlib` color palette.

get_mpl_params()

Returns a dict with the traits needed to initialize an instance of `MatplotlibHlogScale`

class `cytoflow.utility.hlog_scale.MatplotlibHlogScale(axis, **kwargs)`

Bases: `traits.has_traits.HasTraits`, `matplotlib.scale.ScaleBase`

A class that inherits from `matplotlib.scale.ScaleBase`, which implements all the bits for `matplotlib` to use a new scale.

name = 'hlog'

get_transform()

Returns the `matplotlib.transform` instance that does the actual transformation

set_default_locators_and_formatters(*axis*)

Set the locators and formatters to reasonable defaults for linear scaling.

class HlogTransform(***kwargs*)

Bases: `traits.has_traits.HasTraits`, `matplotlib.transforms.Transform`

A class that implements the actual transformation

input_dims = 1

The number of input dimensions of this transform. Must be overridden (with integers) in the subclass.

output_dims = 1

The number of output dimensions of this transform. Must be overridden (with integers) in the subclass.

is_separable = True

True if this transform is separable in the x- and y- dimensions.

has_inverse = True

True if this transform has a corresponding inverse transform.

transform_non_affine(*values*)

Apply only the non-affine part of this transformation.

`transform(values)` is always equivalent to `transform_affine(transform_non_affine(values))`.

In non-affine transformations, this is generally equivalent to `transform(values)`. In affine transformations, this is always a no-op.

Parameters *values* (*array*) – The input values as NumPy array of length *input_dims* or shape (N x *input_dims*).

Returns The output values as NumPy array of length *input_dims* or shape (N x *output_dims*), depending on the input.

Return type *array*

inverted()

Return the corresponding inverse transformation.

It holds `x == self.inverted().transform(self.transform(x))`.

The return value of this method should be treated as temporary. An update to *self* does not cause a corresponding update to its inverted copy.

class InvertedLogicleTransform(***kwargs*)

Bases: `traits.has_traits.HasTraits`, `matplotlib.transforms.Transform`

A class that implements the inverse transformation

input_dims = 1

The number of input dimensions of this transform. Must be overridden (with integers) in the subclass.

output_dims = 1

The number of output dimensions of this transform. Must be overridden (with integers) in the subclass.

is_separable = True

True if this transform is separable in the x- and y- dimensions.

has_inverse = True

True if this transform has a corresponding inverse transform.

transform_non_affine(*values*)

Apply only the non-affine part of this transformation.

`transform(values)` is always equivalent to `transform_affine(transform_non_affine(values))`.

In non-affine transformations, this is generally equivalent to `transform(values)`. In affine transformations, this is always a no-op.

Parameters *values* (*array*) – The input values as NumPy array of length *input_dims* or shape (N x *input_dims*).

Returns The output values as NumPy array of length *input_dims* or shape (N x *output_dims*), depending on the input.

Return type array

inverted()

Return the corresponding inverse transformation.

It holds `x == self.inverted().transform(self.transform(x))`.

The return value of this method should be treated as temporary. An update to *self* does not cause a corresponding update to its inverted copy.

class `cytotflow.utility.hlog_scale.HlogMajorLocator`

Bases: `matplotlib.ticker.Locator`

Determine the tick locations for hlog axes. Based on `matplotlib.LogLocator`

set_params()

Empty

tick_values(*vmin*, *vmax*)

Every decade, including 0 and negative

view_limits(*data_min*, *data_max*)

Try to choose the view limits intelligently

class `cytotflow.utility.hlog_scale.HlogMinorLocator`

Bases: `matplotlib.ticker.Locator`

Determine the tick locations for logicle axes. Based on `matplotlib.LogLocator`

set_params()

Empty

tick_values(*vmin*, *vmax*)

Every tenth decade, including 0 and negative

`cytotflow.utility.hlog_scale.hlog_inv`(*y*, *b*, *r*, *d*)

Inverse of base 10 hyperlog transform.

`cytotflow.utility.hlog_scale.hlog`(*x*, *b*, *r*, *d*)

Base 10 hyperlog transform.

Parameters

- **x** (*num* | *num iterable*) – values to be transformed.
- **b** (*num*) – Parameter controlling the location of the shift from linear to log transformation.
- **r** (*num* (*default* = 10^{*4})) – maximal transformed value.
- **d** (*num* (*default* = $\log_{10}(2^{*18})$)) – \log_{10} of maximal possible measured value. `hlog_inv(r)` = 10^{*d}

Return type Array of transformed values.

cytoflow.utility.linear_scale

A scale that doesn't transform data at all – a “default” scale.

LinearScale – implements a no-op *IScale*

class cytoflow.utility.linear_scale.LinearScale(**kwargs)

Bases: *cytoflow.utility.scale.ScaleMixin*

A scale that doesn't transform the data at all.

name = 'linear'

inverse(data)

clip(data)

norm(vmin=None, vmax=None)

get_mpl_params(ax)

cytoflow.utility.log_scale

A scale that transforms data using a base-10 log.

LogScale – implements *IScale*, the *cytoflow* interface for the scale.

class cytoflow.utility.log_scale.LogScale(**kwargs)

Bases: *cytoflow.utility.scale.ScaleMixin*

name = 'log'

get_mpl_params(ax)

Returns a dict with the traits needed to initialize an instance of *matplotlib.scale.ScaleBase*

inverse(data)

Transforms 'data' using the inverse of this scale.

clip(data)

Clips data to the range of the scale function

norm(vmin=None, vmax=None)

A factory function that returns *matplotlib.colors.Normalize* instance, which normalizes values for a *matplotlib* color palette.

cytoflow.utility.logging

Utilities to help with logging.

MplFilter – a *logging.Filter* that removes nuisance warnings

class cytoflow.utility.logging.MplFilter(name='')

Bases: *logging.Filter*

A *logging.Filter* that removes nuisance warnings

filter(*record*)

Determine if the specified record is to be logged.

Returns True if the record should be logged, or False otherwise. If deemed appropriate, the record may be modified in-place.

cytoflow.utility.logicle_scale

A scale that transforms the data using the `logicle` function.

LogicleScale – implements *IScale*, the *cytoflow* interface for the scale.

MatplotlibLogicleScale – inherits `matplotlib.scale.ScaleBase`, implements the matplotlib interface

LogicleMajorLocator – inherits `matplotlib.ticker.Locator`, lets matplotlib know where major ticks are along a plot axis.

LogicleMinorLocator – inherits `matplotlib.ticker.Locator`, lets matplotlib know where minor ticks are along a plot axis

class `cytoflow.utility.logicle_scale.LogicleScale`

Bases: `traits.has_traits.HasStrictTraits`

A scale that transforms the data using the `logicle` function.

This scaling method implements a “linear-like” region around 0, and a “log-like” region for large values, with a very smooth transition between them. It’s particularly good for compensated data, and data where you have “negative” events (events with a fluorescence of ~0.)

If you don’t have any data around 0, you might be better off with a more traditional log scale.

The transformation has one parameter, *W*, which specifies the width of the “linear” range in log10 decades. By default, the optimal value is estimated from the data; but if you assign a value to *W* it will be used. 0.5 is usually a good start.

experiment

the *Experiment* used to estimate the scale parameters.

Type `Instance(cytoflow.Experiment)`

channel

If set, choose scale parameters from this channel in *experiment*. One of *channel*, *condition* or *statistic* must be set.

Type `Str`

condition

If set, choose scale parameters from this condition in *experiment*. One of *channel*, *condition* or *statistic* must be set.

Type `Str`

statistic

If set, choose scale parameters from this statistic in *experiment*. One of *channel*, *condition* or *statistic* must be set.

Type `Str`

quantiles = Tuple(Float, Float) (default = (0.001, 0.999))

If there are a few very large or very small values, this can throw off matplotlib’s choice of default axis ranges. Set quantiles to choose what part of the data to consider when choosing axis ranges.

W

The width of the linear range, in log10 decades. can estimate from data, or use a fixed value like 0.5.

Type Float (default = estimated from data)

M

The width of the log portion of the display, in log10 decades.

Type Float (default = 4.5)

A

additional decades of negative data to include. the default display usually captures all the data, so 0 is fine to start.

Type Float (default = 0.0)

r

Quantile used to estimate *W*.

Type Float (default = 0.05)

References

- [1] **A new “Logicle” display method avoids deceptive effects of logarithmic** scaling for low signals and compensated data. Parks DR, Roederer M, Moore WA. Cytometry A. 2006 Jun;69(6):541-51. PMID: 16604519 <http://onlinelibrary.wiley.com/doi/10.1002/cyto.a.20258/full>
- [2] **Update for the logicle data scale including operational code** implementations. Moore WA, Parks DR. Cytometry A. 2012 Apr;81(4):273-7. doi: 10.1002/cyto.a.22030 PMID: 22411901 <http://onlinelibrary.wiley.com/doi/10.1002/cyto.a.22030/full>

name = 'logicle'

inverse(*data*)

Transforms ‘data’ using the inverse of this scale.

clip(*data*)

Clips data to the range of the scale function

norm(*vmin=None, vmax=None*)

A factory function that returns `matplotlib.colors.Normalize` instance, which normalizes values for a `matplotlib` color palette.

get_mpl_params(*ax*)

class `cytoflow.utility.logicle_scale.MatplotlibLogicleScale`(*axis, **kwargs*)

Bases: `traits.has_traits.HasTraits`, `matplotlib.scale.ScaleBase`

A class that inherits from `matplotlib.scale.ScaleBase`, which implements all the bits for `matplotlib` to use a new scale.

name = 'logicle'

get_transform()

Returns the `matplotlib.transform` instance that does the actual transformation

set_default_locators_and_formatters(*axis*)

Set the locators and formatters to reasonable defaults for linear scaling.

class `LogicleTransform`(***kwargs*)

Bases: `traits.has_traits.HasTraits`, `matplotlib.transforms.Transform`

input_dims = 1

The number of input dimensions of this transform. Must be overridden (with integers) in the subclass.

output_dims = 1

The number of output dimensions of this transform. Must be overridden (with integers) in the subclass.

is_separable = True

True if this transform is separable in the x- and y- dimensions.

has_inverse = True

True if this transform has a corresponding inverse transform.

transform_non_affine(values)

Apply only the non-affine part of this transformation.

`transform(values)` is always equivalent to `transform_affine(transform_non_affine(values))`.

In non-affine transformations, this is generally equivalent to `transform(values)`. In affine transformations, this is always a no-op.

Parameters *values* (*array*) – The input values as NumPy array of length *input_dims* or shape (N x *input_dims*).

Returns The output values as NumPy array of length *input_dims* or shape (N x *output_dims*), depending on the input.

Return type array

inverted()

Return the corresponding inverse transformation.

It holds `x == self.inverted().transform(self.transform(x))`.

The return value of this method should be treated as temporary. An update to *self* does not cause a corresponding update to its inverted copy.

class InvertedLogicleTransform(kwargs)**

Bases: `traits.has_traits.HasTraits`, `matplotlib.transforms.Transform`

input_dims = 1

The number of input dimensions of this transform. Must be overridden (with integers) in the subclass.

output_dims = 1

The number of output dimensions of this transform. Must be overridden (with integers) in the subclass.

is_separable = True

True if this transform is separable in the x- and y- dimensions.

has_inverse = True

True if this transform has a corresponding inverse transform.

transform_non_affine(values)

Apply only the non-affine part of this transformation.

`transform(values)` is always equivalent to `transform_affine(transform_non_affine(values))`.

In non-affine transformations, this is generally equivalent to `transform(values)`. In affine transformations, this is always a no-op.

Parameters *values* (*array*) – The input values as NumPy array of length *input_dims* or shape (N x *input_dims*).

Returns The output values as NumPy array of length *input_dims* or shape (N x *output_dims*), depending on the input.

Return type array

inverted()

Return the corresponding inverse transformation.

It holds `x == self.inverted().transform(self.transform(x))`.

The return value of this method should be treated as temporary. An update to *self* does not cause a corresponding update to its inverted copy.

class `cytoflow.utility.logicle_scale.LogicleMajorLocator`

Bases: `matplotlib.ticker.Locator`

Determine the tick locations for logicle axes. Based on `matplotlib.LogLocator`

set_params(***kwargs*)

Empty

tick_values(*vmin*, *vmax*)

Every decade, including 0 and negative

view_limits(*data_min*, *data_max*)

Try to choose the view limits intelligently

class `cytoflow.utility.logicle_scale.LogicleMinorLocator`

Bases: `matplotlib.ticker.Locator`

Determine the tick locations for logicle axes. Based on `matplotlib.LogLocator`

set_params()

Empty

tick_values(*vmin*, *vmax*)

Every tenth decade, including 0 and negative

view_limits(*data_min*, *data_max*)

Try to choose the view limits intelligently

cytoflow.utility.scale

Base classes and functions for *cytoflow* scales.

IScale – the `traits.has_traits.Interface` that scales must implement

ScaleMixin – provides useful functionality that scales can inherit

scale_factory – make a new instance of a scale

register_scale – register a new type of scale

set_default_scale, *get_default_scale* – sets and gets the default scale

class `cytoflow.utility.scale.IScale`(*adaptee*, *default=<class 'traits.adaptation.adaptation_error.AdaptationError'>*)

Bases: `traits.has_traits.Interface`

An interface for various ways we could rescale flow data.

name

The name of this view (for serialization, UI, etc.)

Type `Str`

experiment

The experiment this scale is to be applied to. Needed because some scales have parameters estimated from data.

Type `Instance(Experiment)`

channel

Which channel to scale. Needed because some scales have parameters estimated from data.

Type Str

condition

What condition to scale. Needed because some scales have parameters estimated from the a condition. Must be a numeric condition; else instantiating the scale should fail.

Type Str

statistic

What statistic to scale. Needed because some scales have parameters estimated from a statistic. The statistic must be numeric or an iterable of numerics; else instantiating the scale should fail.

Type Tuple(Str, Str)

data

What raw data to scale.

Type array_like

inverse(*data*)

Transforms 'data' using the inverse of this scale. Must know how to handle int, float, and list, tuple, numpy.ndarray and pandas.Series of int or float. Returns the same type as passed.

clip(*data*)

Clips the data to the scale's domain.

norm(*vmin=None, vmax=None*)

Return an instance of matplotlib.colors.Normalize, which normalizes this scale to [0, 1]. Among other things, this is used to correctly scale a color bar.

class cytoflow.utility.scale.**ScaleMixin**(***kwargs*)

Bases: `traits.has_traits.HasStrictTraits`

Provides useful functionality that scales can inherit.

cytoflow.utility.scale.**scale_factory**(*scale, experiment, **scale_params*)

Make a new instance of a named scale.

Parameters

- **scale** (*string*) – The name of the scale to build
- **experiment** (*Experiment*) – The experiment to use to parameterize the new scale.
- ****scale_params** (*kwargs*) – Other parameters to pass to the scale constructor

cytoflow.utility.scale.**register_scale**(*scale_class*)

Register a new scale for the `scale_factory` and `ScaleEnum`.

cytoflow.utility.scale.**set_default_scale**(*scale*)

Set a default scale for `ScaleEnum`

cytoflow.utility.scale.**get_default_scale**()

Get the defaults scale set with `set_default_scale`

cytosflow.utility.util_functions

Useful (mostly numeric) utility functions.

iqr – calculate the interquartile range for an array of numbers

num_hist_bins – calculate the number of histogram bins using Freedman-Diaconis

geom_mean – compute the geometric mean

geom_sd – compute the geometric standard deviation

geom_sd_range – compute [geom_mean / geom_sd, geom_mean * geom_sd]

geom_sem – compute the geometric standard error of the mean

geom_sem_range – compute [geom_mean / geom_sem, geom_mean * geom_sem]

cartesian – generate the cartesian product of input arrays

sanitize_identifier – makes a string a valid Python identifier by replacing all non-safe characters with ‘_’

random_string – Makes a random string of ascii digits and lowercase letters

is_numeric – determine if a `pandas.Series` or `numpy.ndarray` is numeric from its dtype

cov2corr – compute the correlation matrix from the covariance matrix

`cytosflow.utility.util_functions.iqr(a)`

Calculate the inter-quartile range for an array of numbers.

Parameters *a* (*array_like*) – The array of numbers to compute the IQR for.

Returns The IQR of the data.

Return type `float`

`cytosflow.utility.util_functions.num_hist_bins(a)`

Calculate number of histogram bins using Freedman-Diaconis rule.

From <http://stats.stackexchange.com/questions/798/>

Parameters *a* (*array_like*) – The data to make a histogram of.

Returns The number of bins in the histogram

Return type `int`

`cytosflow.utility.util_functions.geom_mean(a)`

Compute the geometric mean for an “arbitrary” data set, ie one that contains zeros and negative numbers.

Parameters *a* (*array-like*) – A `numpy.ndarray`, or something that can be converted to an `ndarray`

Return type The geometric mean of the input array

Notes

The traditional geometric mean can not be computed on a mixture of positive and negative numbers. The approach here, validated rigorously in the cited paper[1], is to compute the geometric mean of the absolute value of the negative numbers separately, and then take a weighted arithmetic mean of that and the geometric mean of the positive numbers. We're going to discard 0 values, operating under the assumption that in this context there are going to be few or no observations with a value of exactly 0.

References

- [1] **Geometric mean for negative and zero values** Elsayed A. E. Habib International Journal of Research and Reviews in Applied Sciences 11:419 (2012) http://www.arpapress.com/Volumes/Vol11Issue3/IJRRAS_11_3_08.pdf

`cytosflow.utility.util_functions.geom_sd(a)`

Compute the geometric standard deviation for an “arbitrary” data set, ie one that contains zeros and negative numbers. Since we're in log space, this gives a *dimensionless scaling factor*, not a measure. If you want traditional “error bars”, don't plot `[geom_mean - geom_sd, geom_mean + geom_sd]`; rather, plot `[geom_mean / geom_sd, geom_mean * geom_sd]`.

Parameters `a` (*array-like*) – A numpy.ndarray, or something that can be converted to an ndarray

Return type The geometric standard deviation of the distribution.

Notes

As with `geom_mean`, non-positive numbers pose a problem. The approach here, though less rigorously validated than the one above, is to replace negative numbers with their absolute value plus $2 * \text{geom_mean}$, then go about our business as per the Wikipedia page for geometric sd[1].

References

- [1] https://en.wikipedia.org/wiki/Geometric_standard_deviation

`cytosflow.utility.util_functions.geom_sd_range(a)`

A convenience function to compute `[geom_mean / geom_sd, geom_mean * geom_sd]`.

Parameters `a` (*array-like*) – A numpy.ndarray, or something that can be converted to an ndarray

Return type A tuple, with `(geom_mean / geom_sd, geom_mean * geom_sd)`

`cytosflow.utility.util_functions.geom_sem(a)`

Compute the geometric standard error of the mean for an “arbitrary” data set, ie one that contains zeros and negative numbers.

Parameters `a` (*array-like*) – A numpy.ndarray, or something that can be converted to an ndarray

Return type The geometric mean of the distribution.

Notes

As with *geom_mean*, non-positive numbers pose a problem. The approach here, though less rigorously validated than the one above, is to replace negative numbers with their absolute value plus 2 * geometric mean. The geometric SEM is computed as in [1].

References

[1] The Standard Errors of the Geometric and Harmonic Means and Their Application to Index Numbers

Nilan Norris The Annals of Mathematical Statistics Vol. 11, No. 4 (Dec., 1940), pp. 445-448

http://www.jstor.org/stable/2235723?seq=1#page_scan_tab_contents

`cytoflow.utility.util_functions.geom_sem_range(a)`

A convenience function to compute $[\text{geom_mean} / \text{geom_sem}, \text{geom_mean} * \text{geom_sem}]$.

Parameters *a* (*array-like*) – A numpy.ndarray, or something that can be converted to an ndarray

Return type A tuple, with $(\text{geom_mean} / \text{geom_sem}, \text{geom_mean} * \text{geom_sem})$

`cytoflow.utility.util_functions.cartesian(arrays, out=None)`

Generate a cartesian product of input arrays.

Parameters

- **arrays** (*list of array-like*) – 1-D arrays to form the cartesian product of.
- **out** (*ndarray*) – Array to place the cartesian product in.

Returns **out** – 2-D array of shape $(M, \text{len}(\text{arrays}))$ containing cartesian products formed of input arrays.

Return type ndarray

Examples

```
>>> cartesian([[1, 2, 3], [4, 5], [6, 7]])
array([[1, 4, 6],
       [1, 4, 7],
       [1, 5, 6],
       [1, 5, 7],
       [2, 4, 6],
       [2, 4, 7],
       [2, 5, 6],
       [2, 5, 7],
       [3, 4, 6],
       [3, 4, 7],
       [3, 5, 6],
       [3, 5, 7]])
```

References

Originally from <http://stackoverflow.com/a/1235363/4755587>

`cytoflow.utility.util_functions.sanitize_identifier(name)`

Makes name a Python identifier by replacing all unsafe characters with ‘_’

`cytoflow.utility.util_functions.random_string(n)`

Makes a random string of ascii digits and lowercase letters of length n

from <http://stackoverflow.com/questions/2257441/random-string-generation-with-upper-case-letters-and-digits-in-python>

`cytoflow.utility.util_functions.is_numeric(s)`

Determine if a `pandas.Series` or `numpy.ndarray` is numeric from its dtype.

`cytoflow.utility.util_functions.cov2corr(covariance)`

Compute the correlation matrix from the covariance matrix.

From https://github.com/AndreaCensi/procgraph/blob/master/src/procgraph_statistics/cov2corr.py

cytoflow.views package

cytoflow.views

This package contains all *cytoflow* views – classes implementing *IView* whose `plot()` function plots an experiment.

Submodules

cytoflow.views.bar_chart

Plot a bar chart from a statistic.

BarChartView – the *IView* class that makes the plot.

class `cytoflow.views.bar_chart.BarChartView`

Bases: `cytoflow.views.base_views.Base1DStatisticsView`

Plots a bar chart of some summary statistic

statistic

The name of the statistic to plot. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (str, str)

error_statistic

The name of the statistic used to plot error bars. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (str, str)

scale

The scale applied to the data before plotting it.

Type {‘linear’, ‘log’, ‘logicle’}

variable

The condition that varies when plotting this statistic: used for the x axis of line plots, the bar groups in bar plots, etc.

Type str

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for `huefacet` be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Add a threshold gate


```
>>> ex2 = flow.ThresholdOp(name = 'Threshold',
...                        channel = 'Y2-A',
...                        threshold = 2000).apply(ex)
```

Add a statistic

```
>>> ex3 = flow.ChannelStatisticOp(name = "ByDox",
...                               channel = "Y2-A",
...                               by = ['Dox', 'Threshold'],
...                               function = len).apply(ex2)
```

Plot the bar chart

```
>>> flow.BarChartView(Statistic = ("ByDox", "len"),
...                   variable = "Dox",
...                   huefacet = "Threshold").plot(ex3)
```

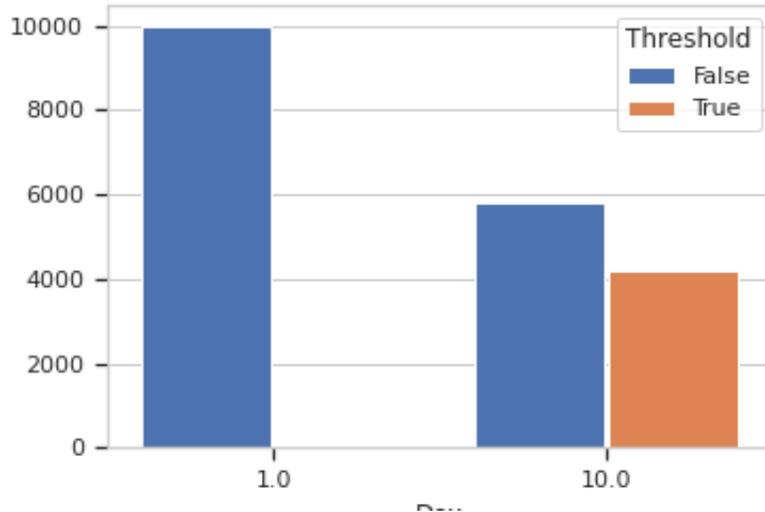

`enum_plots(experiment)`

Returns an iterator over the possible plots that this View can produce. The values returned can be passed to “plot”.

`plot(experiment, plot_name=None, **kwargs)`

Plot a bar chart

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5

- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **plot_name** (*str*) – If this *IView* can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **lim** (*(float, float)*) – Set the range of the plot’s axis.
- **color** (*a matplotlib color*) – Sets the colors of all the bars, even if there is a hue facet
- **errwidth** (*scalar*) – The width of the error bars, in points
- **errcolor** (*a matplotlib color*) – The color of the error bars
- **capsize** (*scalar*) – The size of the error bar caps, in points

Notes

Other kwargs are passed to `matplotlib.axes.Axes.bar`

cytosflow.views.base_views

Base classes for views.

I found, as I wrote a bunch of views, that I was also writing a bunch of shared boiler-plate code. This led to more bugs and a harder-to-maintain codebase. So, I extracted the copied code in a short hierarchy of reusable base classes:

BaseView – implements a view with row, column and hue facets. After setting up the facet grid, it calls the derived class’s `_grid_plot` to actually do the plotting. *BaseView.plot* also has parameters to set the plot style, legend, axis labels, etc.

BaseDataView – implements a view that plots an *Experiment*’s data (as opposed to a statistic.) Includes functionality for subsetting the data before plotting, and determining axis limits and scales.

Base1DView – implements a 1-dimensional data view. See *HistogramView* for an example.

Base2DView – implements a 2-dimensional data view. See *ScatterplotView* for an example.

BaseNDView – implements an N-dimensional data view. See *RadvizView* for an example.

BaseStatisticsView – implements a view that plots a statistic from an *Experiment* (as opposed to the underlying data.) These views have a “primary” *BaseStatisticsView.variable*, and can be subset as well.

Base1DStatisticsView – implements a view that plots one dimension of a statistic. See *BarChartView* for an example.

Base2DStatisticsView – implements a view that plots two dimensions of a statistic. See *Stats2DView* for an example.

class `cytoflow.views.base_views.BaseView`

Bases: `traits.has_traits.HasStrictTraits`

The base class for faceted plotting.

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

plot(*experiment, data, **kwargs*)

Base function for faceted plotting

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5

- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is *whitegrid*.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is *talk*.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is *True*.

Other Parameters

- **cmap** (*matplotlib colormap*) – If plotting a huefacet with many values, use this color map instead of the default.
- **norm** (*matplotlib.colors.Normalize*) – If plotting a huefacet with many values, use this object for color scale normalization.

class `cytoflow.views.base_views.BaseDataView`

Bases: `cytoflow.views.base_views.BaseView`

The base class for data views (as opposed to statistics views).

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

plot(*experiment, **kwargs*)

Plot some data from an experiment. This function takes care of checking for facet name validity and sub-setting, then passes the underlying dataframe to `BaseView.plot`

Parameters

- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.

Other Parameters

- **lim** (*Dict(Str : (float, float))*) – Set the range of each channel’s axis. If unspecified, assume that the limits are the minimum and maximum of the clipped data. Required.
- **scale** (*Dict(Str : IScale)*) – Scale the data on each axis. Required.

class `cytoflow.views.base_views.Base1DView`

Bases: `cytoflow.views.base_views.BaseDataView`

A data view that plots data from a single channel.

channel

The channel to view

Type `Str`

scale

The scale applied to the data before plotting it.

Type { 'linear', 'log', 'logicle' }

plot(*experiment*, ***kwargs*)

Parameters

- **lim** ((*float*, *float*)) – Set the range of the plot's data axis.
- **orientation** ({ 'vertical', 'horizontal' })

class `cytoflow.views.base_views.Base2DView`

Bases: `cytoflow.views.base_views.BaseDataView`

A data view that plots data from two channels.

xchannel

The channel to view on the X axis

Type Str

ychannel

The channel to view on the Y axis

Type Str

xscale

The scales applied to the *xchannel* data before plotting it.

Type { 'linear', 'log', 'logicle' } (default = 'linear')

yscale

The scales applied to the *ychannel* data before plotting it.

Type { 'linear', 'log', 'logicle' } (default = 'linear')

plot(*experiment*, ***kwargs*)

Parameters

- **xlim** ((*float*, *float*)) – Set the range of the plot's X axis.
- **ylim** ((*float*, *float*)) – Set the range of the plot's Y axis.

class `cytoflow.views.base_views.BaseNDView`

Bases: `cytoflow.views.base_views.BaseDataView`

A data view that plots data from one or more channels.

channels

The channels to view

Type List(Str)

scale

Re-scale the data in the specified channels before plotting. If a channel isn't specified, assume that the scale is linear.

Type Dict(Str : { "linear", "logicle", "log" })

plot(*experiment*, ***kwargs*)

Parameters `lim` (*Dict(Str : (float, float))*) – Set the range of each channel’s axis. If unspecified, assume that the limits are the minimum and maximum of the clipped data

class `cytoflow.views.base_views.BaseStatisticsView`

Bases: `cytoflow.views.base_views.BaseView`

The base class for statistics views (as opposed to data views).

variable

The condition that varies when plotting this statistic: used for the x axis of line plots, the bar groups in bar plots, etc.

Type `str`

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

enum_plots(*experiment, data*)

Enumerate the named plots we can make from this set of statistics.

Returns An iterator across the possible plot names. The iterator ALSO has an instance attribute called `by`, which holds a list of the facets that are not yet set (and thus need to be specified in the plot name.)

Return type `iterator`

plot(*experiment, data, plot_name=None, **kwargs*)

Plot some data from a statistic.

This function takes care of checking for facet name validity and subsetting, then passes the dataframe to `BaseView.plot`

Parameters `plot_name` (*str*) – If this `IView` can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

class `cytoflow.views.base_views.Base1DStatisticsView`

Bases: `cytoflow.views.base_views.BaseStatisticsView`

The base class for 1-dimensional statistic views – ie, the `variable` attribute is on the x axis, and the statistic value is on the y axis.

statistic

The name of the statistic to plot. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (`str, str`)

error_statistic

The name of the statistic used to plot error bars. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (`str, str`)

scale

The scale applied to the data before plotting it.

Type {‘linear’, ‘log’, ‘logicle’}

enum_plots(*experiment*)

Enumerate the named plots we can make from this set of statistics.

Returns An iterator across the possible plot names. The iterator ALSO has an instance attribute called `by`, which holds a list of the facets that are not yet set (and thus need to be specified in the plot name.)

Return type iterator

`plot(experiment, plot_name=None, **kwargs)`

Parameters

- **orientation** (`{'vertical', 'horizontal'}`)
- **lim** (`(float, float)`) – Set the range of the plot's axis.

class `cytoflow.views.base_views.Base2DStatisticsView`

Bases: `cytoflow.views.base_views.BaseStatisticsView`

The base class for 2-dimensional statistic views – ie, the `variable` attribute varies independently, and the corresponding values from the x and y statistics are plotted on the x and y axes.

xstatistic

The name of the statistic to plot on the X axis. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (`str, str`)

ystatistic

The name of the statistic to plot on the Y axis. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (`str, str`)

x_error_statistic

The name of the statistic used to plot error bars on the X axis. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (`str, str`)

y_error_statistic

The name of the statistic used to plot error bars on the Y axis. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (`str, str`)

xscale

The scale applied to `xstatistic` before plotting it.

Type `{'linear', 'log', 'logicle'}`

yscale

The scale applied to `ystatistic` before plotting it.

Type `{'linear', 'log', 'logicle'}`

enum_plots(`experiment`)

Enumerate the named plots we can make from this set of statistics.

Returns An iterator across the possible plot names. The iterator ALSO has an instance attribute called `by`, which holds a list of the facets that are not yet set (and thus need to be specified in the plot name.)

Return type iterator

`plot(experiment, plot_name=None, **kwargs)`

Parameters

- **xlim** ((float, float)) – Set the range of the plot’s X axis.
- **ylim** ((float, float)) – Set the range of the plot’s Y axis.

cytoflow.views.densityplot

Plot a 2D density plot.

DensityView – the *IView* class that makes the plot.

class cytoflow.views.densityplot.DensityView

Bases: *cytoflow.views.base_views.Base2DView*

Plots a 2-d density plot.

huefacet

You must leave the hue facet unset!

Type None

xchannel

The channel to view on the X axis

Type Str

ychannel

The channel to view on the Y axis

Type Str

xscale

The scales applied to the *xchannel* data before plotting it.

Type {'linear', 'log', 'logicle'} (default = 'linear')

yscale

The scales applied to the *ychannel* data before plotting it.

Type {'linear', 'log', 'logicle'} (default = 'linear')

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}


Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                               conditions = {'Dox' : 10.0}),
...                    flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                               conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot a density plot

```
>>> flow.DensityView(xchannel = 'V2-A',
...                  xscale = 'log',
...                  ychannel = 'Y2-A',
...                  yscale = 'log').plot(ex)
```

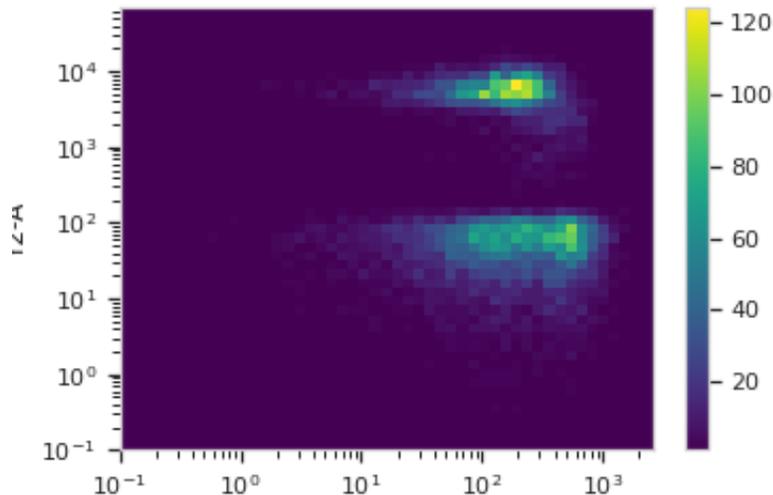

The same plot, smoothed, with a log color scale. *Note - you can change the hue scale, even if you don't have control over the hue facet!*


```
>>> flow.DensityView(xchannel = 'V2-A',
...                  xscale = 'log',
...                  ychannel = 'Y2-A',
...                  yscale = 'log',
...                  huescale = 'log').plot(ex, smoothed = True)
```

`plot(experiment, **kwargs)`

Plot a faceted density plot view of a channel

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title

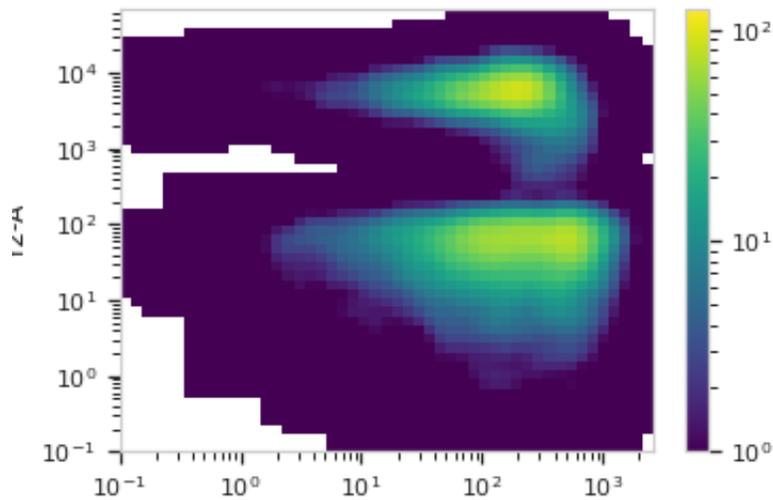

- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If `xfacet` is set and `yfacet` is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (`{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}`) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (`{“paper”, “notebook”, “talk”, “poster”}`) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.

- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*((float, float))*) – Set the range of the plot’s X axis.
- **ylim** (*((float, float))*) – Set the range of the plot’s Y axis.
- **gridsize** (*int*) – The size of the grid on each axis. Default = 50
- **smoothed** (*bool*) – Should the resulting mesh be smoothed?
- **smoothed_sigma** (*int*) – The standard deviation of the smoothing kernel. default = 1.
- **cmap** (*cmap*) – An instance of `matplotlib.colors.Colormap`. By default, the `viridis` colormap is used
- **under_color** (*matplotlib color*) – Sets the color to be used for low out-of-range values.
- **bad_color** (*matplotlib color*) – Set the color to be used for masked values.

Notes

Other kwargs are passed to `matplotlib.axes.Axes.pcolormesh`

cytoflow.views.export_fcs

A “view” that exports events as FCS files.

ExportFCS – the *IView* class that does the exporting.

class `cytoflow.views.export_fcs.ExportFCS`

Bases: `traits.has_traits.HasStrictTraits`

Exports events as FCS files.

This isn’t a traditional view, in that it doesn’t implement *plot*. Instead, use *enum_files* to figure out which files will be created from a particular experiment, and *export* to export the FCS files.

The Cytoflow attributes will be encoded in keywords in the FCS TEXT segment, starting with the characters CF_. Any FCS keywords that are the same across all the input files will also be included.

base

The prefix of the FCS filenames

Type Str

path

The directory to export to.

Type Directory

by

A list of conditions from *Experiment.conditions*; each unique combination of conditions will be exported to an FCS file.

Type List(Str)

keywords

If you want to add more keywords to the FCS files’ TEXT segment, specify them here.

Type Dict(Str, Str)

subset

A Python expression used to select a subset of the data

Type str

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Export the data

```
>>> import tempfile
>>> flow.ExportFCS(path = 'export/',
...               by = ["Dox"],
...               subset = "Dox == 10.0").export(ex)
```

enum_files(*experiment*)

Return an iterator over the file names that this export module will produce from a given experiment.

Parameters *experiment* (*Experiment*) – The *Experiment* to export

export(*experiment*)

Export FCS files from an experiment.

Parameters *experiment* (*Experiment*) – The *Experiment* to export

cytoflow.views.histogram

Plots a histogram.

HistogramView – the *IView* class that makes the plot.

class cytoflow.views.histogram.HistogramView

Bases: *cytoflow.views.base_views.Base1DView*

Plots a one-channel histogram

channel

The channel to view

Type Str

scale

The scale applied to the data before plotting it.

Type {'linear', 'log', 'logicle'}

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type `String`

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type `String`

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type `String`

huescale

How should the color scale for `huefacet` be scaled?

Type `{'linear', 'log', 'logicle'}`

Examples

Make a little data set.

```
>>> import cytosflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot a histogram


```
>>> flow.HistogramView(channel = 'Y2-A',
...                    scale = 'log',
...                    huefacet = 'Dox').plot(ex)
```

plot(*experiment*, ***kwargs*)

Plot a faceted histogram view of a channel

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label

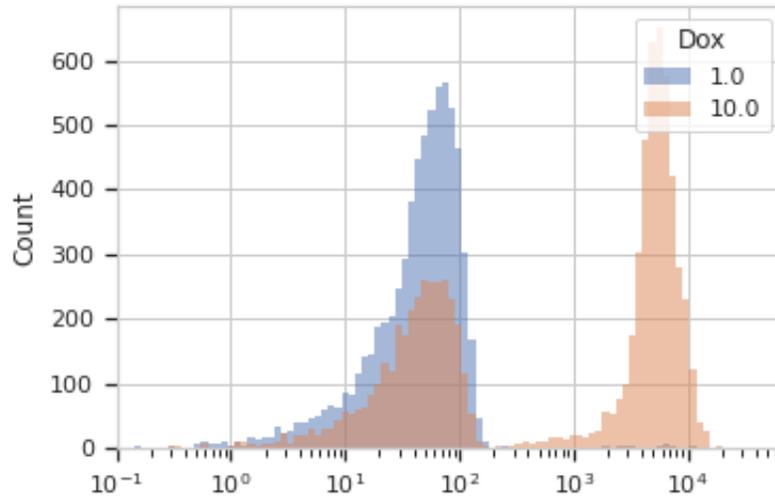

- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If `xfacet` is set and `yfacet` is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (`{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}`) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (`{“paper”, “notebook”, “talk”, “poster”}`) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.

- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **num_bins** (*int*) – The number of bins to plot in the histogram. Clipped to [100, 1000]
- **histtype** (*{‘stepfilled’, ‘step’, ‘bar’}*) – The type of histogram to draw. `stepfilled` is the default, which is a line plot with a color filled under the curve.
- **density** (*bool*) – If `True`, re-scale the histogram to form a probability density function, so the area under the histogram is 1.
- **linewidth** (*float*) – The width of the histogram line (in points)
- **linestyle** (*[‘-’ | ‘-.’ | ‘.’ | ‘:’ | “None”]*) – The style of the line to plot
- **alpha** (*float (default = 0.5)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).

Notes

Other kwargs are passed to `matplotlib.pyplot.hist`

cytosflow.views.histogram_2d

Plot a 2D histogram.

Histogram2DView – the *IView* class that makes the plot.

class `cytosflow.views.histogram_2d.Histogram2DView`

Bases: `cytosflow.views.base_views.Base2DView`

Plots a 2-d histogram. Similar to a density plot, but the number of events in a bin change the bin’s opacity, so you can use different colors.

xchannel

The channel to view on the X axis

Type `Str`

ychannel

The channel to view on the Y axis

Type `Str`

xscale

The scales applied to the *xchannel* data before plotting it.

Type `{‘linear’, ‘log’, ‘logicle’}` (default = ‘linear’)

yscale

The scales applied to the *ychannel* data before plotting it.

Type `{‘linear’, ‘log’, ‘logicle’}` (default = ‘linear’)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type `str`

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot a density plot



```
>>> flow.Histogram2DView(xchannel = 'V2-A',
...                      xscale = 'log',
...                      ychannel = 'Y2-A',
...                      yscale = 'log',
...                      huefacet = 'Dox').plot(ex)
```

The same plot, smoothed, with a log color scale.

```
>>> flow.Histogram2DView(xchannel = 'V2-A',
...                      xscale = 'log',
...                      ychannel = 'Y2-A',
...                      yscale = 'log',
...                      huefacet = 'Dox',
...                      huescale = 'log').plot(ex, smoothed = True)
```

```
id = 'edu.mit.synbio.cytoflow.view.histogram2d'
```

```
friend_id = '2D Histogram'
```

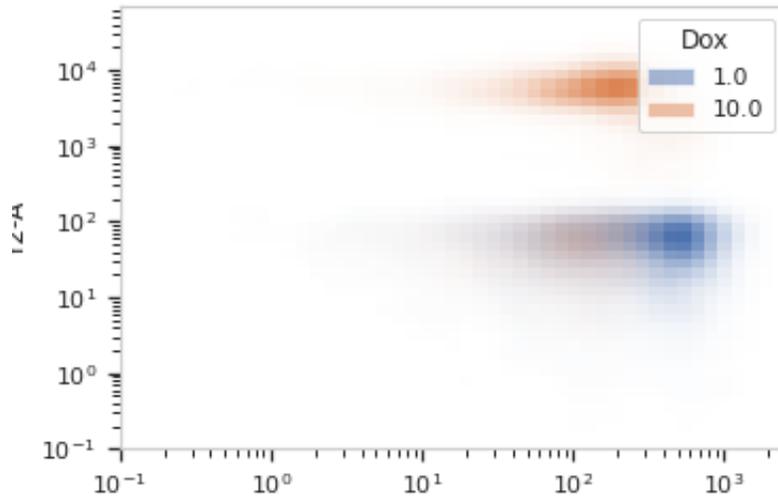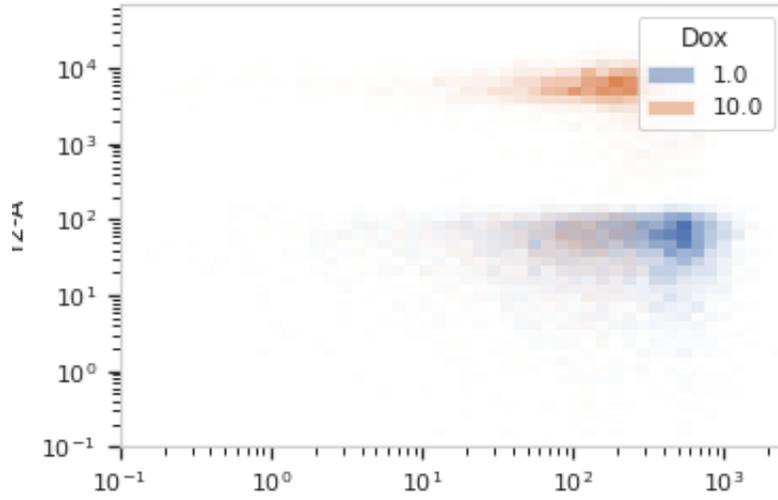

plot(*experiment*, ***kwargs*)

Plot a faceted density plot view of a channel

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is **True**.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*((float, float))*) – Set the range of the plot’s X axis.
- **ylim** (*((float, float))*) – Set the range of the plot’s Y axis.
- **gridsize** (*int*) – The number of bins on the X and Y axis.
- **smoothed** (*bool*) – Should the mesh be smoothed?
- **smoothed_sigma** (*int*) – The standard deviation of the smoothing kernel. default = 1.

Notes

Other kwargs are passed to `matplotlib.axes.Axes.pcolormesh`

```
class cytoflow.views.histogram_2d.AlphaColormap(name, color, min_alpha=0.0, max_alpha=1.0,
                                                N=256)
```

Bases: `matplotlib.colors.Colormap`

cytoflow.views.i_selectionview

ISelectionView – a decorator that lets you add selections to an *IView*.

```
class cytoflow.views.i_selectionview.ISelectionView(adaptee, default=<class
                                                    'traits.adaptation.adaptation_error.AdaptationError'>)
```

Bases: `cytoflow.views.i_view.IView`

A decorator that lets you add (possibly interactive) selections to an *IView*.

Note that this is a Decorator *design pattern*, not a Python `@decorator`.

interactive

Is this view's interactivity turned on?

Type Bool

cytoflow.views.i_view

IView – an interface for the visualization of flow data.

```
class cytoflow.views.i_view.IView(adaptee, default=<class
                                   'traits.adaptation.adaptation_error.AdaptationError'>)
```

Bases: `traits.has_traits.Interface`

An interface for a visualization of flow data.

Could be a histogram, a density plot, a scatter plot, a statistical visualization like a bar chart of population means; even a textual representation like a table.

id

A unique id for this view. Prefix: “edu.mit.cytoflow.views”

Type Constant

friendly_id

The human-readable id of this view: eg, “Histogram”

Type Constant

plot(*experiment*, ***kwargs*)

Plot a visualization of flow data using the pyplot stateful interface

Parameters

- **experiment** (*Experiment*) – the Experiment containing the data to plot
- **kwargs** (*dict*) – additional arguments to pass to the underlying plotting function.

cytoflow.views.kde_1d

A one-channel kernel density estimate (like a smoothed histogram).

Kde1DView – the *IView* class that makes the plot.

class cytoflow.views.kde_1d.Kde1DView

Bases: *cytoflow.views.base_views.Base1DView*

Plots a one-channel kernel density estimate, which is like a smoothed histogram.

channel

The channel to view

Type Str

scale

The scale applied to the data before plotting it.

Type {'linear', 'log', 'logicle'}

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.

```

>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]

```


(continues on next page)

(continued from previous page)

```
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot a histogram

```
>>> flow.Kde1DView(channel = 'Y2-A',
...                 scale = 'log',
...                 huefacet = 'Dox').plot(ex)
```

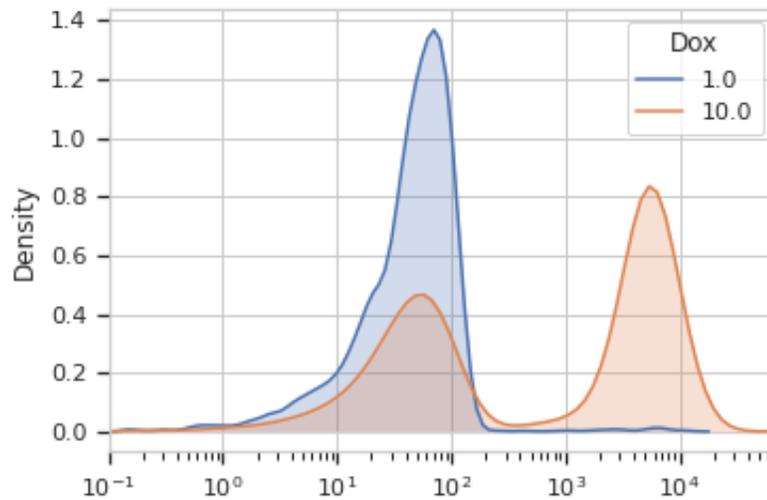

`plot(experiment, **kwargs)`

Plot a smoothed histogram view of a channel

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huefacet** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0

- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **shade** (*bool*) – If `True` (the default), shade the area under the plot.
- **alpha** (*float, >=0 and <= 1*) – The transparency of the shading. 1 is opaque, 0 is transparent. Default = 0.25
- **kernel** (*str*) – The kernel to use for the kernel density estimate. Choices are:
- **bw** (*str or float*) – The bandwidth for the kernel, controls how lumpy or smooth the kernel estimate is. Choices are:
- **gridsize** (*int (default = 100)*) – How many times to compute the kernel?

Notes

Other kwargs are passed to `matplotlib.pyplot.plot`

cytosflow.views.kde_2d

A two-dimensional kernel density estimate – kind of like a data “topo” map.

Kde2DView – the *IView* class that makes the plot.

class `cytosflow.views.kde_2d.Kde2DView`

Bases: `cytosflow.views.base_views.Base2DView`

Plots a 2-d kernel-density estimate. Sort of like a smoothed histogram. The density is visualized with a set of isolines.

xchannel

The channel to view on the X axis

Type `Str`

ychannel

The channel to view on the Y axis

Type Str

xscale

The scales applied to the *xchannel* data before plotting it.

Type {'linear', 'log', 'logicle'} (default = 'linear')

yscale

The scales applied to the *ychannel* data before plotting it.

Type {'linear', 'log', 'logicle'} (default = 'linear')

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}


Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot a density plot

```
>>> flow.Kde2DView(xchannel = 'V2-A',
...                 xscale = 'log',
...                 ychannel = 'Y2-A',
...                 yscale = 'log',
...                 huefacet = 'Dox').plot(ex)
```

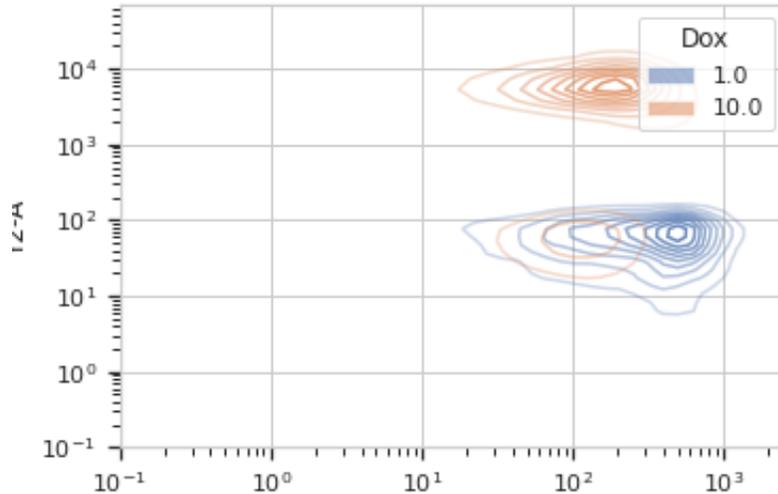

`plot(experiment, **kwargs)`

Plot a faceted 2d kernel density estimate

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5

- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*((float, float))*) – Set the range of the plot’s X axis.
- **ylim** (*((float, float))*) – Set the range of the plot’s Y axis.
- **shade** (*bool*) – Shade the interior of the isoplot? (default = `False`)
- **min_alpha, max_alpha** (*float*) – The minimum and maximum alpha blending values of the isolines, between 0 (transparent) and 1 (opaque).
- **n_levels** (*int*) – How many isolines to draw? (default = 10)
- **bw** (*str or float*) – The bandwidth for the gaussian kernel, controls how lumpy or smooth the kernel estimate is. Choices are:
- **gridsize** (*int*) – How many times to compute the kernel on each axis? (default: 100)

Notes

Other kwargs are passed to `matplotlib.axes.Axes.contour`

cytotflow.views.parallel_coords

A parallel-coordinates plot.

ParallelCoordinatesView – the *IView* class that makes the plot.

class `cytotflow.views.parallel_coords.ParallelCoordinatesView`

Bases: `cytotflow.views.base_views.BaseNDView`

Plots a parallel coordinates plot. PC plots are good for multivariate data; each vertical line represents one attribute, and one set of connected line segments represents one data point.

channels

The channels to view

Type `List(Str)`

scale

Re-scale the data in the specified channels before plotting. If a channel isn’t specified, assume that the scale is linear.

Type Dict(Str : {"linear", "logicle", "log"})

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for `huefacet` be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot the PC plot.


```
>>> flow.ParallelCoordinatesView(channels = ['B1-A', 'V2-A', 'Y2-A', 'FSC-A'],
...                             scale = {'Y2-A' : 'log',
...                                       'V2-A' : 'log',
...                                       'B1-A' : 'log',
...                                       'FSC-A' : 'log'},
...                             huefacet = 'Dox').plot(ex)
```

plot(*experiment*, ***kwargs*)

Plot a faceted parallel coordinates plot

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.

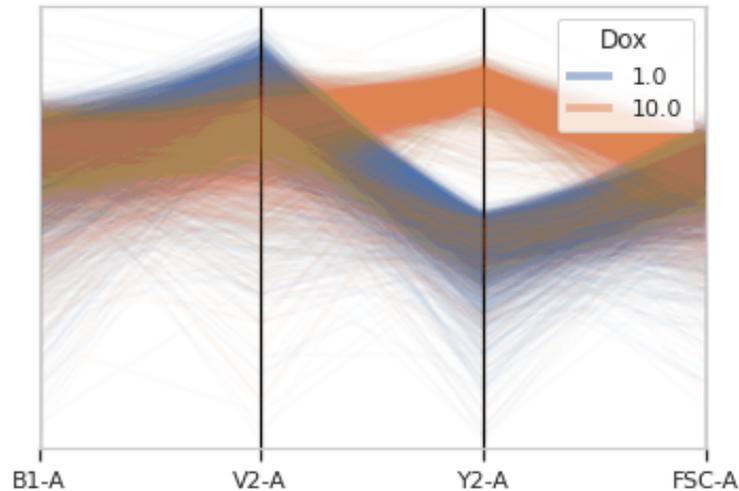

- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If `xfacet` is set and `yfacet` is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (`{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}`) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (`{“paper”, “notebook”, “talk”, “poster”}`) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.

- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*Dict(Str : (float, float))*) – Set the range of each channel’s axis. If unspecified, assume that the limits are the minimum and maximum of the clipped data
- **alpha** (*float (default = 0.02)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **axvlines_kwds** (*dict*) – A dictionary of parameters to pass to `ax.axvline`

Notes

This uses a low-level API for speed; there are far fewer visual options than with other views.

cytoflow.views.radviz

A “Radviz” plot projects multivariate plots into two dimensions.

RadvizView – the *IView* class that makes the plot.

class `cytoflow.views.radviz.RadvizView`

Bases: `cytoflow.views.base_views.BaseNDView`

Plots a Radviz plot. Radviz plots project multivariate plots into two dimensions. Good for looking for clusters.

channels

The channels to view

Type List(Str)

scale

Re-scale the data in the specified channels before plotting. If a channel isn’t specified, assume that the scale is linear.

Type Dict(Str : {“linear”, “logicle”, “log”})

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Notes

The Radviz plot is based on a method of “dimensional anchors”¹. The variables are conceived as points equidistant around a unit circle, and each data point connected to each anchor by a spring whose stiffness corresponds to the value of that data point. The location of the data point is the location where springs’ tensions are minimized. Fortunately, there is fast matrix math to do this.

As per², the order of the anchors can make a huge difference. I’ve adapted the code from the R *radviz* package³ to compute the cosine similarity of all possible circular permutations (“necklaces”). For a moderate number of anchors such as is likely to be encountered here, computing them all is completely feasible.

References

Examples

Make a little data set.

```
>>> import cytosflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot the radviz.

```
>>> flow.RadvizView(channels = ['B1-A', 'V2-A', 'Y2-A'],
...                 scale = {'Y2-A' : 'log',
...                          'V2-A' : 'log',
...                          'B1-A' : 'log'},
...                 huefacet = 'Dox').plot(ex)
```

plot(*experiment*, ***kwargs*)

Plot a faceted Radviz plot


Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label

¹ Hoffman P, Grinstein G, Pinkney D. Dimensional anchors: a graphic primitive for multidimensional multivariate information visualizations. Proceedings of the 1999 workshop on new paradigms in information visualization and manipulation in conjunction with the eighth ACM international conference on Information and knowledge management. 1999 Nov 1 (pp. 9-16). ACM.

² Di Caro L, Frias-Martinez V, Frias-Martinez E. Analyzing the role of dimension arrangement for data visualization in radviz. Advances in Knowledge Discovery and Data Mining. 2010:125-32.

³ <https://github.com/yannabraham/Radviz>

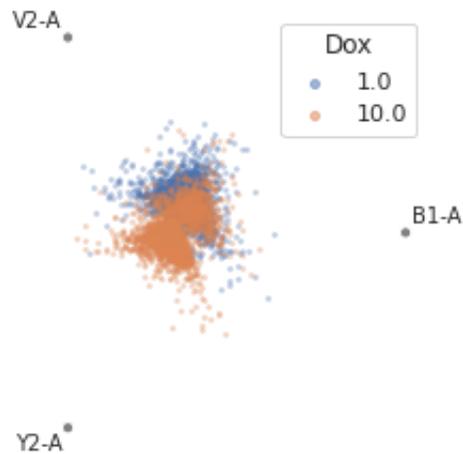

- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If `xfacet` is set and `yfacet` is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.

- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*Dict(Str: (float, float))*) – Set the range of each channel’s axis. If unspecified, assume that the limits are the minimum and maximum of the clipped data
- **alpha** (*float (default = 0.25)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **s** (*int (default = 2)*) – The size in points².
- **marker** (*a matplotlib marker style, usually a string*) – Specifies the glyph to draw for each point on the scatterplot. See [matplotlib.markers](#) for examples. Default: ‘o’

Notes

Other kwargs are passed to `matplotlib.pyplot.scatter`

cytosflow.views.scatterplot

A 2-d scatterplot.

ScatterplotView – the *IView* class that makes the plot.

class `cytosflow.views.scatterplot.ScatterplotView`

Bases: `cytosflow.views.base_views.Base2DView`

Plots a 2-d scatterplot.

xchannel

The channel to view on the X axis

Type Str

ychannel

The channel to view on the Y axis

Type Str

xscale

The scales applied to the *xchannel* data before plotting it.

Type {‘linear’, ‘log’, ‘logicle’} (default = ‘linear’)

yscale

The scales applied to the *ychannel* data before plotting it.

Type {‘linear’, ‘log’, ‘logicle’} (default = ‘linear’)

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.

```
>>> import cytosflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot a density plot


```
>>> flow.ScatterplotView(xchannel = 'V2-A',
...                     xscale = 'log',
...                     ychannel = 'Y2-A',
...                     yscale = 'log',
...                     huefacet = 'Dox').plot(ex)
```

plot(*experiment*, ***kwargs*)

Plot a faceted scatter plot view of a channel

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **huelabel** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.

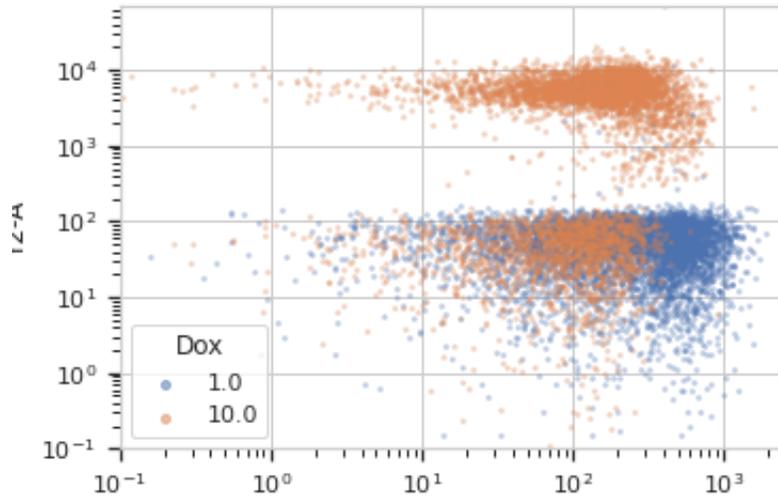

- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **xlim** (*((float, float))*) – Set the range of the plot’s X axis.
- **ylim** (*((float, float))*) – Set the range of the plot’s Y axis.
- **alpha** (*float (default = 0.25)*) – The alpha blending value, between 0 (transparent) and 1 (opaque).
- **s** (*int (default = 2)*) – The size in points².

- **marker** (a *matplotlib* marker style, usually a string) – Specifies the glyph to draw for each point on the scatterplot. See [matplotlib.markers](#) for examples. Default: ‘o’

Notes

Other kwargs are passed to `matplotlib.pyplot.scatter`

cytoflow.views.stats_1d

Plot a statistic with a numeric variable on the X axis.

Stats1DView – the *IView* class that makes the plot.

class `cytoflow.views.stats_1d.Stats1DView`

Bases: `cytoflow.views.base_views.Base1DStatisticsView`

Plot a statistic. The value of the statistic will be plotted on the Y axis; a numeric conditioning variable must be chosen for the X axis. Every variable in the statistic must be specified as either the *variable* or one of the plot facets.

variable_scale

The scale applied to the variable (on the X axis)

Type {‘linear’, ‘log’, ‘logicle’}

statistic

The name of the statistic to plot. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (str, str)

error_statistic

The name of the statistic used to plot error bars. Must be a key in the `Experiment.statistics` attribute of the `Experiment` being plotted.

Type (str, str)

scale

The scale applied to the data before plotting it.

Type {‘linear’, ‘log’, ‘logicle’}

variable

The condition that varies when plotting this statistic: used for the x axis of line plots, the bar groups in bar plots, etc.

Type str

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create and a new statistic.

```
>>> ch_op = flow.ChannelStatisticOp(name = 'MeanByDox',
...                                channel = 'Y2-A',
...                                function = flow.geom_mean,
...                                by = ['Dox'])
>>> ex2 = ch_op.apply(ex)
```

View the new statistic

```
>>> flow.Stats1DView(variable = 'Dox',
...                  statistic = ('MeanByDox', 'geom_mean'),
...                  variable_scale = 'log',
...                  scale = 'log').plot(ex2)
```

enum_plots(*experiment*)


Returns an iterator over the possible plots that this View can produce. The values returned can be passed to *plot*.

plot(*experiment*, *plot_name*=None, ***kwargs*)

Plot a chart of a variable's values against a statistic.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label

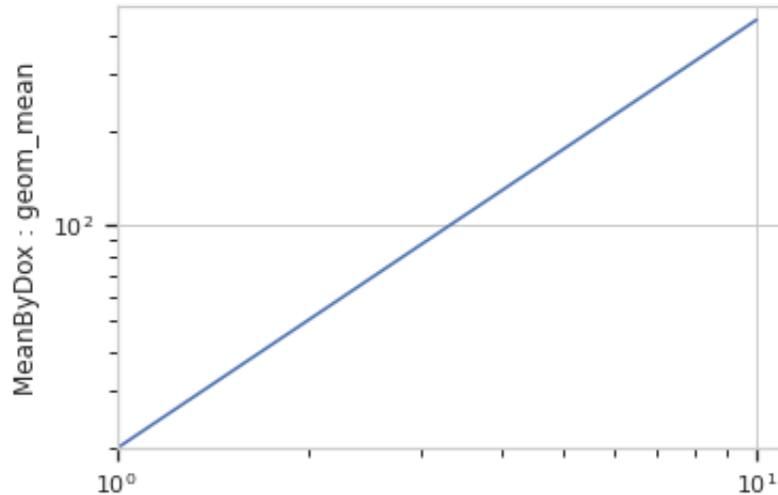

- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If `xfacet` is set and `yfacet` is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.
- **plot_name** (*str*) – If this `IView` can make multiple plots, `plot_name` is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.

- **orientation** (*{'vertical', 'horizontal'}*)
- **lim** (*(float, float)*) – Set the range of the plot's axis.
- **variable_lim** (*(float, float)*) – The limits on the variable axis
- **color** (*a matplotlib color*) – The color to plot with. Overridden if *huefacet* is not *None*
- **linewidth** (*float*) – The width of the line, in points
- **linestyle** (*['solid' | 'dashed', 'dashdot', 'dotted' | (offset, on-off-dash-seq) | '-' | '-' | '-' | '-' | '-' | 'None' | '' | '']*)
- **marker** (*a matplotlib marker style*) – See http://matplotlib.org/api/markers_api.html#module-matplotlib.markers
- **markersize** (*int*) – The marker size in points
- **markerfacecolor** (*a matplotlib color*) – The color to make the markers. Overridden (?) if *huefacet* is not *None*
- **alpha** (*the alpha blending value, from 0.0 (transparent) to 1.0 (opaque)*)
- **capsize** (*scalar*) – The size of the error bar caps, in points
- **shade_error** (*bool*) – If *False* (the default), plot the error statistic as traditional “error bars.” If *True*, plot error statistic as a filled, shaded region.
- **shade_alpha** (*float*) – The transparency of the shaded error region, from 0.0 (transparent) to 1.0 (opaque.) Default is 0.2.

Notes

Other kwargs are passed to `matplotlib.pyplot.plot`

cytoflow.views.stats_2d

Plots two statistics on a scatter plot.

Stats2DView – the *IView* class that makes the plot.

class `cytoflow.views.stats_2d.Stats2DView`

Bases: `cytoflow.views.base_views.Base2DStatisticsView`

Plot two statistics on a scatter plot. A point (X,Y) is drawn for every pair of elements with the same value of *variable*; the X value is from *xstatistic* and the Y value is from *ystatistic*.

xstatistic

The name of the statistic to plot on the X axis. Must be a key in the *Experiment.statistics* attribute of the *Experiment* being plotted.

Type (str, str)

ystatistic

The name of the statistic to plot on the Y axis. Must be a key in the *Experiment.statistics* attribute of the *Experiment* being plotted.

Type (str, str)

x_error_statistic

The name of the statistic used to plot error bars on the X axis. Must be a key in the *Experiment.statistics* attribute of the *Experiment* being plotted.

Type (str, str)

y_error_statistic

The name of the statistic used to plot error bars on the Y axis. Must be a key in the *Experiment.statistics* attribute of the *Experiment* being plotted.

Type (str, str)

xscale

The scale applied to *xstatistic* before plotting it.

Type {'linear', 'log', 'logicle'}

yscale

The scale applied to *ystatistic* before plotting it.

Type {'linear', 'log', 'logicle'}

variable

The condition that varies when plotting this statistic: used for the x axis of line plots, the bar groups in bar plots, etc.

Type str

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the *Experiment.conditions* in the *Experiment*, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the *Experiment.conditions* in the in the *Experiment*, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for *huefacet* be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.


```
>>> import cytosflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Create two new statistics

```
>>> ch_op = flow.ChannelStatisticOp(name = 'MeanByDox',
...                                 channel = 'Y2-A',
...                                 function = flow.geom_mean,
...                                 by = ['Dox'])
>>> ex2 = ch_op.apply(ex)
>>> ch_op_2 = flow.ChannelStatisticOp(name = 'SdByDox',
...                                   channel = 'Y2-A',
...                                   function = flow.geom_sd,
...                                   by = ['Dox'])
>>> ex3 = ch_op_2.apply(ex2)
```

Plot the statistics

```
>>> flow.Stats2DView(variable = 'Dox',
...                   xstatistic = ('MeanByDox', 'geom_mean'),
...                   xscale = 'log',
...                   ystatistic = ('SdByDox', 'geom_sd'),
...                   yscale = 'log').plot(ex3)
```

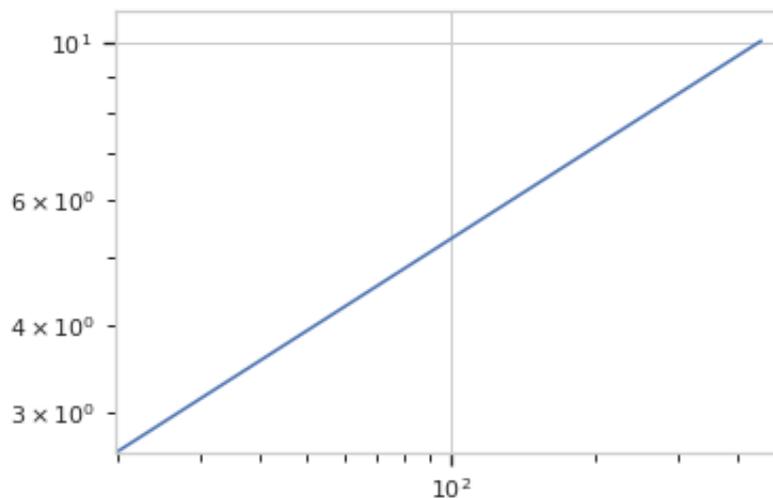

enum_plots(*experiment*)

Returns an iterator over the possible plots that this View can produce. The values returned can be passed to `plot`.

plot(*experiment*, *plot_name=None*, ***kwargs*)

Plot a chart of two statistics' values as a common variable changes.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title
- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to **True**.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to **True**.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to **True**.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If *xfacet* is set and *yfacet* is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (*{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}*) – Which seaborn style to apply to the plot? Default is **whitegrid**.
- **sns_context** (*{“paper”, “notebook”, “talk”, “poster”}*) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is **talk**.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is **True**.
- **plot_name** (*str*) – If this *IView* can make multiple plots, *plot_name* is the name of the plot to make. Must be one of the values retrieved from `enum_plots`.
- **xlim** (*((float, float))*) – Set the range of the plot's X axis.
- **ylim** (*((float, float))*) – Set the range of the plot's Y axis.
- **color** (*a matplotlib color*) – The color to plot with. Overridden if *huefacet* is not **None**
- **linestyle** (*{‘solid’ | ‘dashed’, ‘dashdot’, ‘dotted’ | (offset, on-off-dash-seq) | ‘-’ | ‘-.’ | ‘.’ | ‘:’ | ‘None’ | ‘ ‘ | ‘ ’}*)

- **marker** (a *matplotlib* marker style) – See http://matplotlib.org/api/markers_api.html#module-matplotlib.markers
- **markersize** (*int*) – The marker size in points
- **markerfacecolor** (a *matplotlib* color) – The color to make the markers. Overridden (?) if *huefacet* is not `None`
- **alpha** (the *alpha* blending value, from 0.0 (transparent) to 1.0 (opaque))

Notes

Other kwargs are passed to `matplotlib.pyplot.plot`

cytoflow.views.table

“Plot” a tabular view of a statistic.

TableView – the *IView* class that makes the plot.

class `cytoflow.views.table.TableView`

Bases: `traits.has_traits.HasStrictTraits`

“Plot” a tabular view of a statistic. Mostly useful for GUIs. Each level of the statistic’s index must be used in *row_facet*, *column_facet*, *subrow_facet*, or *subcolumn_facet*. This module can’t “plot” a statistic with more than four index levels unless *subset* is set and that results in extra levels being dropped.

statistic

The name of the statistic to plot. Must be a key in the *Experiment.statistics* attribute of the *Experiment* being plotted. Each level of the statistic’s index must be used in *row_facet*, *column_facet*, *subrow_facet*, or *subcolumn_facet*.

Type (`str`, `str`)

row_facet

The statistic facet to be used as row headers.

Type `str`

column_facet

The statistic facet to be used as column headers.

Type `str`

subrow_facet

The statistic facet to be used as subrow headers.

Type `str`

subcolumn_facet

The statistic facet to be used as subcolumn headers.

Type `str`

subset

A Python expression used to select a subset of the statistic to plot.

Type `str`

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Add a threshold gate

```
>>> ex2 = flow.ThresholdOp(name = 'Threshold',
...                        channel = 'Y2-A',
...                        threshold = 2000).apply(ex)
```

Add a statistic

```
>>> ex3 = flow.ChannelStatisticOp(name = "ByDox",
...                               channel = "Y2-A",
...                               by = ['Dox', 'Threshold'],
...                               function = len).apply(ex2)
```

“Plot” the table

```
>>> flow.TableView(statistic = ("ByDox", "len"),
...                row_facet = "Dox",
...                column_facet = "Threshold").plot(ex3)
```

plot(*experiment*, *plot_name=None*, ***kwargs*)
Plot a table

export(*experiment*, *filename*)
Export the table to a file.

cytoflow.views.violin

A violin plot is a faceted set of kernel density estimates.

ViolinPlotView – the *IView* class that makes the plot.

class cytoflow.views.violin.ViolinPlotView

Bases: *cytoflow.views.base_views.BaseIDView*

Plots a violin plot – a faceted set of kernel density estimates.

variable

the main variable by which we’re faceting

Type Str

channel

The channel to view

Type Str

| | Threshold = 0 | Threshold = 1 |
|----------|---------------|---------------|
| Dox = 1 | 9963 | 37 |
| Dox = 10 | 5823 | 4177 |

scale

The scale applied to the data before plotting it.

Type {'linear', 'log', 'logicle'}

subset

An expression that specifies the subset of the statistic to plot. Passed unmodified to `pandas.DataFrame.query`.

Type str

xfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new column of subplots will be added for every unique value of that condition.

Type String

yfacet

Set to one of the `Experiment.conditions` in the `Experiment`, and a new row of subplots will be added for every unique value of that condition.

Type String

huefacet

Set to one of the `Experiment.conditions` in the in the `Experiment`, and a new color will be added to the plot for every unique value of that condition.

Type String

huescale

How should the color scale for `huefacet` be scaled?

Type {'linear', 'log', 'logicle'}

Examples

Make a little data set.

```
>>> import cytoflow as flow
>>> import_op = flow.ImportOp()
>>> import_op.tubes = [flow.Tube(file = "Plate01/RFP_Well_A3.fcs",
...                             conditions = {'Dox' : 10.0}),
...                   flow.Tube(file = "Plate01/CFP_Well_A4.fcs",
...                             conditions = {'Dox' : 1.0})]
>>> import_op.conditions = {'Dox' : 'float'}
>>> ex = import_op.apply()
```

Plot a violin plot


```
>>> flow.ViolinPlotView(channel = 'Y2-A',
...                     scale = 'log',
...                     variable = 'Dox').plot(ex)
```

plot(*experiment*, ***kwargs*)

Plot a violin plot of a variable

Parameters

- **experiment** (*Experiment*) – The *Experiment* to plot using this view.
- **title** (*str*) – Set the plot title

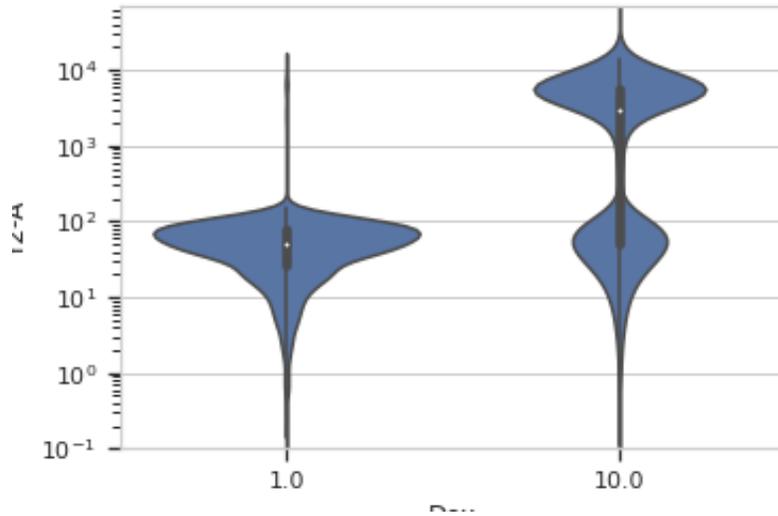

- **xlabel** (*str*) – Set the X axis label
- **ylabel** (*str*) – Set the Y axis label
- **hue_label** (*str*) – Set the label for the hue facet (in the legend)
- **legend** (*bool*) – Plot a legend for the color or hue facet? Defaults to `True`.
- **sharex** (*bool*) – If there are multiple subplots, should they share X axes? Defaults to `True`.
- **sharey** (*bool*) – If there are multiple subplots, should they share Y axes? Defaults to `True`.
- **row_order** (*list*) – Override the row facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **col_order** (*list*) – Override the column facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **hue_order** (*list*) – Override the hue facet value order with the given list. If a value is not given in the ordering, it is not plotted. Defaults to a “natural ordering” of all the values.
- **height** (*float*) – The height of *each row* in inches. Default = 3.0
- **aspect** (*float*) – The aspect ratio of *each subplot*. Default = 1.5
- **col_wrap** (*int*) – If `xfacet` is set and `yfacet` is not set, you can “wrap” the subplots around so that they form a multi-row grid by setting this to the number of columns you want.
- **sns_style** (`{“darkgrid”, “whitegrid”, “dark”, “white”, “ticks”}`) – Which seaborn style to apply to the plot? Default is `whitegrid`.
- **sns_context** (`{“paper”, “notebook”, “talk”, “poster”}`) – Which seaborn context to use? Controls the scaling of plot elements such as tick labels and the legend. Default is `talk`.
- **palette** (*palette name, list, or dict*) – Colors to use for the different levels of the hue variable. Should be something that can be interpreted by `seaborn.color_palette`, or a dictionary mapping hue levels to matplotlib colors.
- **despine** (*Bool*) – Remove the top and right axes from the plot? Default is `True`.

- **min_quantile** (*float (>0.0 and <1.0, default = 0.001)*) – Clip data that is less than this quantile.
- **max_quantile** (*float (>0.0 and <1.0, default = 1.00)*) – Clip data that is greater than this quantile.
- **lim** (*(float, float)*) – Set the range of the plot’s data axis.
- **orientation** (*{‘vertical’, ‘horizontal’}*)
- **bw** (*{‘scott’, ‘silverman’, float}, optional*) – Either the name of a reference rule or the scale factor to use when computing the kernel bandwidth. The actual kernel size will be determined by multiplying the scale factor by the standard deviation of the data within each bin.
- **scale_plot** (*{‘area’, ‘count’, ‘width’}, optional*) – The method used to scale the width of each violin. If *area*, each violin will have the same area. If *count*, the width of the violins will be scaled by the number of observations in that bin. If *width*, each violin will have the same width.
- **scale_hue** (*bool, optional*) – When nesting violins using a hue variable, this parameter determines whether the scaling is computed within each level of the major grouping variable (*scale_hue=True*) or across all the violins on the plot (*scale_hue=False*).
- **gridsize** (*int, optional*) – Number of points in the discrete grid used to compute the kernel density estimate.
- **inner** (*{‘box’, ‘quartile’, None}, optional*) – Representation of the datapoints in the violin interior. If *box*, draw a miniature boxplot. If *quartiles*, draw the quartiles of the distribution. If *point* or *stick*, show each underlying datapoint. Using *None* will draw unadorned violins.
- **split** (*bool, optional*) – When using hue nesting with a variable that takes two levels, setting *split* to *True* will draw half of a violin for each level. This can make it easier to directly compare the distributions.

Submodules

cytoflow.experiment

Defines *Experiment*, *cytoflow*’s main data structure.

Experiment – manages the data and metadata for a flow experiment.

class `cytoflow.experiment.Experiment`

Bases: `traits.has_traits.HasStrictTraits`

An *Experiment* manages all the data and metadata for a flow experiment.

An *Experiment* is the central data structure in *cytoflow*: it wraps a `pandas.DataFrame` containing all the data from a flow experiment. Each row in the table is an event. Each column is either a measurement from one of the detectors (or a “derived” measurement such as a transformed value or a ratio), or a piece of metadata associated with that event: which tube it came from, what the experimental conditions for that tube were, gate membership, etc. The *Experiment* object lets you:

- Add additional metadata to define subpopulations
- Get events that match a particular metadata signature.

Additionally, the *Experiment* object manages channel- and experiment-level metadata in the *metadata* attribute, which is a dictionary. This allows the rest of the modules in *cytotflow* to track and enforce other constraints that are important in doing quantitative flow cytometry: for example, every tube must be collected with the same channel parameters (such as PMT voltage.)

Note: *Experiment* is not responsible for enforcing the constraints; *ImportOp* and the other modules are.

data

All the events and metadata represented by this experiment. Each event is a row; each column is either a measured channel (eg. a fluorescence measurement), a derived channel (eg. the ratio between two channels), or a piece of metadata. Metadata can be either experimental conditions (eg. induction level, time-point) or added by operations (eg. gate membership).

Type `pandas.DataFrame`

metadata

Each column in *data* has an entry in *metadata* whose key is the column name and whose value is a dict of column-specific metadata. Metadata is added by operations, and is occasionally useful if modules are expected to work together. See individual operations' documentation for a list of the metadata that operation adds. The only "required" metadata is *type*, which can be *channel* (if the column is a measured channel, or derived from one) or *condition* (if the column is an experimental condition, gate membership, etc.)

Warning: There may also be experiment-wide entries in *metadata* that are *not* columns in *data*!

Type `Dict(Str : Dict(Str : Any))`

history

The *IOperation* operations that have been applied to the raw data to result in this *Experiment*.

Type `List(IOperation)`

statistics

The statistics and parameters computed by models that were fit to the data. The key is an `(Str, Str)` tuple, where the first `Str` is the name of the operation that supplied the statistic, and the second `Str` is the name of the statistic. The value is a multi-indexed `pandas.Series`: each level of the index is a facet, and each combination of indices is a subset for which the statistic was computed. The values of the series, of course, are the values of the computed parameters or statistics for each subset.

Type `Dict((Str, Str) : pandas.Series)`

channels

The channels that this experiment tracks (read-only).

Type `List(String)`

conditions

The experimental conditions and analysis groups (gate membership, etc) that this experiment tracks. The key is the name of the condition, and the value is a `pandas.Series` with that condition's possible values.

Type `Dict(String : pandas.Series)`

Notes

The OOP programmer in me desperately wanted to subclass `pandas.DataFrame`, add some flow-specific stuff, and move on with my life. (I may still, with something like <https://github.com/dalejung/pandas-composition>). A few things get in the way of directly subclassing `pandas.DataFrame`:

- First, to enable some of the delicious syntactic sugar for accessing its contents, `pandas.DataFrame` redefines `__getattr__` and `__setattr__`, and making it recognize (and maintain across copies) additional attributes is an unsupported (non-public) API feature and introduces other subclassing weirdness.
- Second, many of the operations (like appending!) don't happen in-place; they return copies instead. It's cleaner to simply manage that copying ourselves instead of making the client deal with it. We can pretend to operate on the data in-place.

To maintain the ease of use, we'll override `__getitem__` and pass it to the wrapped `pandas.DataFrame`. We'll do the same with some of the more useful `pandas.DataFrame` API pieces (like `query`); and of course, you can just get the data frame itself with `Experiment.data`.

Examples

```
>>> import cytoflow as flow
>>> tube1 = flow.Tube(file = 'cytoflow/tests/data/Plate01/RFP_Well_A3.fcs',
...                   conditions = {"Dox" : 10.0})
>>> tube2 = flow.Tube(file='cytoflow/tests/data/Plate01/CFP_Well_A4.fcs',
...                   conditions = {"Dox" : 1.0})
>>>
>>> import_op = flow.ImportOp(conditions = {"Dox" : "float"},
...                               tubes = [tube1, tube2])
>>>
>>> ex = import_op.apply()
>>> ex.data.shape
(20000, 17)
>>> ex.data.groupby(['Dox']).size()
Dox
1      10000
10     10000
dtype: int64
```

`subset(conditions, values)`

Returns a subset of this experiment including only the events where each condition in `condition` equals the corresponding value in `values`.

Parameters

- **conditions** (*Str or List(Str)*) – A condition or list of conditions
- **values** (*Any or Tuple(Any)*) – The value(s) of the condition(s)

Returns A new `Experiment` containing only the events specified in `conditions` and `values`.

Return type `Experiment`

Note: This is a wrapper around `pandas.DataFrame.groupby` and `pandas.core.groupby.GroupBy.get_group`. That means you can pass other things in `conditions` – see the `pandas.DataFrame.groupby` documentation for details.

query(*expr*, ***kwargs*)

Return an experiment whose data is a subset of this one where *expr* evaluates to True.

This method “sanitizes” column names first, replacing characters that are not valid in a Python identifier with an underscore `_`. So, the column name `a column` becomes `a_column`, and can be queried with an `a_column == True` or such.

Parameters

- **expr** (*string*) – The expression to pass to `pandas.DataFrame.query`. Must be a valid Python expression, something you could pass to `eval`.
- ****kwargs** (*dict*) – Other named parameters to pass to `pandas.DataFrame.query`.

Returns A new *Experiment*, a clone of this one with the data returned by `pandas.DataFrame.query`

Return type *Experiment*

clone(*deep=True*)

Create a copy of this *Experiment*. *metadata*, *statistics* and *history* are deep copies; whether or not *data* is a deep copy depends on the value of the *deep* parameter.

Warning: The intent is that *deep* is set to `False` by operations that are only adding columns to the underlying `pandas.DataFrame`. This will improve memory performance. However, the resulting *Experiment* **CANNOT BE MODIFIED IN-PLACE**, because doing so will affect the other *Experiment*s that are clones of the one being modified.

add_condition(*name*, *dtype*, *data=None*)

Add a new column of per-event metadata to this *Experiment*.

Note: `add_condition` operates **in place**.

There are two places to call `add_condition`.

- As you’re setting up a new *Experiment*, call `add_condition` with *data* set to `None` to specify the conditions the new events will have.
- If you compute some new per-event metadata on an existing *Experiment*, call `add_condition` to add it.

Parameters

- **name** (*String*) – The name of the new column in *data*. Must be a valid Python identifier: must start with `[A-Za-z_]` and contain only the characters `[A-Za-z0-9_]`.
- **dtype** (*String*) – The type of the new column in *data*. Must be a string that `pandas.Series` recognizes as a *dtype*: common types are `category`, `float`, `int`, and `bool`.
- **data** (`pandas.Series` (*default = None*)) – The `pandas.Series` to add to *data*. Must be the same length as *data*, and it must be convertible to a `pandas.Series` of type *dtype*. If `None`, will add an empty column to the *Experiment* ... but the *Experiment* must be empty to do so!

Raises `.CytosflowError` – If the `pandas.Series` passed in *data* isn’t the same length as *data*, or isn’t convertible to type *dtype*.

Examples

```
>>> import cytoflow as flow
>>> ex = flow.Experiment()
>>> ex.add_condition("Time", "float")
>>> ex.add_condition("Strain", "category")
```

`add_channel`(*name*, *data*=None)

Add a new column of per-event data (as opposed to metadata) to this *Experiment*: ie, something that was measured per cell, or derived from per-cell measurements.

Note: `add_channel` operates *in place*.

Parameters

- **name** (*String*) – The name of the new column to be added to *data*.
- **data** (*pandas.Series*) – The `pandas.Series` to add to *data*. Must be the same length as *data*, and it must be convertible to a dtype of `float64`. If `None`, will add an empty column to the *Experiment* ... but the *Experiment* must be empty to do so!

Raises `.CytoflowError` – If the `pandas.Series` passed in *data* isn't the same length as *data*, or isn't convertible to a dtype `float64`.

Examples

```
>>> ex.add_channel("FSC_over_2", ex.data["FSC-A"] / 2.0)
```

`add_events`(*data*, *conditions*)

Add new events to this *Experiment*. `add_events` operates **in place**, modifying the *Experiment* object that it's called on.

Each new event in *data* is appended to *data*, and its per-event metadata columns will be set with the values specified in *conditions*. Thus, it is particularly useful for adding tubes of data to new experiments, before additional per-event metadata is added by gates, etc.

Note: *Every* column in *data* must be accounted for. Each column of type `channel` must appear in *data*; each column of metadata must have a key:value pair in *conditions*.

Parameters

- **tube** (*pandas.DataFrame*) – A single tube or well's worth of data. Must be a `DataFrame` with the same columns as *channels*
- **conditions** (*Dict(Str, Any)*) – A dictionary of the tube's metadata. The keys must match *conditions*, and the values must be coercable to the relevant numpy dtype.

Raises `.CytoflowError` – `add_events` pukes if: * there are columns in *data* that aren't channels in the experiment, or vice versa. * there are keys in *conditions* that aren't conditions in the experiment, or vice versa. * there is metadata specified in *conditions* that can't be converted to the corresponding metadata dtype.

Examples

```
>>> import cytoflow as flow
>>> from fcsparser import fcsparser
>>> ex = flow.Experiment()
>>> ex.add_condition("Time", "float")
>>> ex.add_condition("Strain", "category")
>>> tube1, _ = fcsparser.parse('CFP_Well_A4.fcs')
>>> tube2, _ = fcsparser.parse('RFP_Well_A3.fcs')
>>> ex.add_events(tube1, {"Time" : 1, "Strain" : "BL21"})
>>> ex.add_events(tube2, {"Time" : 1, "Strain" : "Top10G"})
```

cytoflowgui package

cytoflowgui

The *cytoflowgui* package contains the Qt GUI for *cytoflow*.

Subpackages

cytoflowgui.editors package

cytoflowgui.editors

Custom Qt editors

Submodules

cytoflowgui.editors.color_text_editor

A `traitsui.editors.text_editor.TextEditor` that allows you to set the foreground and background color of the text.

class `cytoflowgui.editors.color_text_editor.ColorTextEditor`(*args: Any, **kwargs: Any)

Bases: `traitsui.api.BasicEditorFactory`

Editor factory for a color text editor

class

alias of `cytoflowgui.editors.color_text_editor._ColorTextEditor`

foreground_color

The foreground color

alias of `traits.trait_types.Str`

background_color

The background color

alias of `traits.trait_types.Str`

cytoflowgui.editors.ext_enum_editor

A `traitsui.editors.enum_editor.EnumEditor` that allows `_names` to be extended with `extra_items` in the factory.

class `cytoflowgui.editors.ext_enum_editor.ExtendableEnumEditor(*args: Any, **kwargs: Any)`

Bases: `traitsui.editors.enum_editor.EnumEditor`

extra_items

The extra items for the enum, beyond what's in `names`

alias of `traits.trait_types.Dict`

cytoflowgui.editors.instance_handler_editor

A `traitsui.editors.instance_editor.InstanceEditor` that allows the handler to be created at runtime, using a factory.

class `cytoflowgui.editors.instance_handler_editor.InstanceHandlerEditor(*args: Any, **kwargs: Any)`

Bases: `traitsui.api.InstanceEditor`

custom_editor_class

alias of `cytoflowgui.editors.instance_handler_editor._InstanceHandlerEditor`

handler_factory

The factory to create this editor's handler

alias of `traits.trait_types.Callable`

custom_editor(*ui, object, name, description, parent*)

Generates an editor using the "custom" style.

cytoflowgui.editors.range_slider

A `QtGui.QSlider` with two carets – allows a range to be specified.

class `cytoflowgui.editors.range_slider.RangeSlider(*args: Any, **kwargs: Any)`

Bases: `pyface.qt.QtGui.QSlider`

A slider for ranges.

This class provides a dual-slider for ranges, where there is a defined maximum and minimum, as is a normal slider, but instead of having a single slider value, there are 2 slider values.

This class emits the same signals as the `QtGui.QSlider` base class, with the exception of `valueChanged`

low()

setLow(*low*)

high()

setHigh(*high*)

sliderOrderForPaint()

sliderOrderForMove()

paintEvent(*event*)

mousePressEvent(*event*)

`mouseMoveEvent(event)`

`mouseReleaseEvent(event)`

cytoflowgui.editors.subset_list_editor

An editor for lists of *ISubset*. For each entry in the list, creates an appropriate instance editor, each set up with appropriate ranges, values, etc. from the experiment conditions and metadata.

class `cytoflowgui.editors.subset_list_editor.SubsetListEditor(*args: Any, **kwargs: Any)`
 Bases: `cytoflowgui.editors.vertical_list_editor.VerticalListEditor`

conditions

The name of the trait containing the names -> values dict

alias of `traits.trait_types.Str`

metadata

The name of the trait containing the metadata dictionary

alias of `traits.trait_types.Str`

when

A string to evaluate on the metadata to see if we include this condition in the editor

alias of `traits.trait_types.Str`

mutable = `<traits.trait_types.Bool object>`

cytoflowgui.editors.tab_list_editor

A `traitsui.editors.enum_editor.EnumEditor` whose widget is a tab bar.

class `cytoflowgui.editors.tab_list_editor.TabListEditor(*args: Any, **kwargs: Any)`
 Bases: `traitsui.editor_factory.EditorWithListFactory`

cytoflowgui.editors.toggle_button

A button that can be toggled off and on.

class `cytoflowgui.editors.toggle_button.ToggleButtonEditor(*args: Any, **kwargs: Any)`
 Bases: `traitsui.basic_editor_factory.BasicEditorFactory`

Editor factory for toggle buttons.

klass

alias of `cytoflowgui.editors.toggle_button._ToggleButton`

value = `<traits.trait_factory.TraitFactory object>`

Value to set when the button is clicked

label

Optional label for the button

alias of `traits.trait_types.Str`

label_value

The name of the external object trait that the button label is synced to

alias of `traits.trait_types.Str`

cytoflowgui.editors.value_bounds_editor

A `traitsui.editors.range_editor.RangeEditor` that allows the user to select a range of values from a list (specified in `values`, naturally).

Uses `RangeSlider` for the widget.

```
class cytoflowgui.editors.value_bounds_editor.ValuesBoundsEditor(*args: Any, **kwargs: Any)
    Bases: traitsui.editor_factory.EditorWithListFactory, traitsui.editors.api.RangeEditor
    A traitsui.editors.range_editor.RangeEditor that uses a list of values instead of low & high range.
```

cytoflowgui.editors.vertical_list_editor

A vertical editor for lists, derived from `traitsui.editors.list_editor.ListEditor`, with the same API.

Note: The difference between this class and the underlying `ListEditor` is that this class doesn't use a scroll area. Instead, as items are added, it expands. To enable this behavior, make sure you ask for the 'simple' editor style, NOT 'custom'!

```
class cytoflowgui.editors.vertical_list_editor.VerticalListEditor(*args: Any, **kwargs: Any)
    Bases: traitsui.api.ListEditor
```

cytoflowgui.editors.vertical_notebook

The model for `cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor`.

```
class cytoflowgui.editors.vertical_notebook.VerticalNotebookPage
    Bases: traits.has_traits.HasPrivateTraits
```

A class representing a vertical page within a notebook.

name

The name of the page (displayed on its 'tab')

description

The description of the page (displayed in smaller text in the button)

ui

The Traits UI associated with this page

data

Optional client data associated with the page

name_object

The HasTraits object whose trait we look at to set the page name

name_object_trait

The name of the `name_object` trait that signals a page name change

description_object

The HasTraits object whose trait we look at to set the page description

description_object_trait

The name of the `description_object` trait that signals a page description change

icon

The icon for the page button – a Str that is the name of an ImageResource

icon_object

The HasTraits object whose trait we look at to set the page icon

icon_object_trait

The name of the *icon_object* trait that signals an icon change

deletable

If the notebook has “delete” buttons, can this page be deleted?

deletable_object

The HasTraits object whose trait we look at to set the delete button enabled or disabled

deletable_object_trait

The name of the *deletable_object* trait that signals a deletable change

parent

The parent window for the client page

is_open

The current open status of the notebook page

min_size

The minimum size for the page

dispose()

Removes this notebook page.

register_name_listener(*model, trait*)

Registers a listener on the specified object trait for a page name change.

register_description_listener(*model, trait*)

Registers a listener on the specified object trait for a page description change

register_icon_listener(*model, trait*)

Registers a listener on the specified object trait for a page icon change

register_deletable_listener(*model, trait*)

Registers a listener on the specified object trait for the delete button enable/disable

class cytoflowgui.editors.vertical_notebook.**VerticalNotebook**

Bases: `traits.has_traits.HasPrivateTraits`

Defines a ThemedVerticalNotebook class for displaying a series of pages organized vertically, as opposed to horizontally like a standard notebook.

multiple_open

Allow multiple open pages at once?

delete

can the editor delete list items?

pages

The pages contained in the notebook

editor

The traits UI editor this notebook is associated with (if any)

create_control(*parent*)

Creates the underlying Qt window used for the notebook.

create_page()

Creates a new **VerticalNotebook** object representing a notebook page and returns it as the result.

open(*page*)
Handles opening a specified notebook page.

close(*page*)
Handles closing a specified notebook page.

cytoflowgui.editors.vertical_notebook_editor

A *cytoflow*-specific re-implementation of the `traitsui.editors.list_editor.ListEditor` in *notebook* mode, but vertically instead of horizontally

class cytoflowgui.editors.vertical_notebook_editor.**VerticalNotebookEditor**(*args: Any, **kwargs: Any)

Bases: `traitsui.basic_editor_factory.BasicEditorFactory`

class

alias of `cytoflowgui.editors.vertical_notebook_editor._VerticalNotebookEditor`

multiple_open = <traits.trait_types.Bool object>

Allow multiple open pages at once?

delete = <traits.trait_types.Bool object>

Include a “delete” button?

page_name

List member trait to read the notebook page name from

alias of `traits.trait_types.Str`

page_description

List member trait to read the notebook page name from

alias of `traits.trait_types.Str`

page_icon

List member trait to read the notebook page icon from If None, then use right-arrow for “closed” and down-arrow for “open” The type of this trait is toolkit-specific; for example, the `pyface.qt` type is a `QtGui.QStyle.StandardPixmap`

alias of `traits.trait_types.Str`

page_deletable

List member trait to specify whether the page is deletable If the “delete” trait, above, is True, then this list member trait will enable or disable the “delete” button

alias of `traits.trait_types.Str`

view

Name of the view to use for each page

handler_factory

A factory to produce a handler from an object

alias of `traits.trait_types.Callable`

selected

Name of the trait to synchronize notebook page selection with

alias of `traits.trait_types.Str`

cytoflowgui.editors.zoomable_html_editor

An HTML “editor” that is high-DPI aware.

Derived from `traitsui.editors.html_editor`

Adapted from: https://github.com/enthought/traitsui/blob/master/traitsui/editors/html_editor.py https://github.com/enthought/traitsui/blob/master/traitsui/qt4/html_editor.py

```
class cytoflowgui.editors.zoomable_html_editor.ZoomableHTMLEditor(*args: Any, **kwargs: Any)
    Bases: traitsui.editors.html_editor.ToolkitEditorFactory
```

Editor factory for zoomable HTML editors.

class

alias of `cytoflowgui.editors.zoomable_html_editor._ZoomableHTMLEditor`

cytoflowgui.op_plugins package

cytoflowgui.op_plugins

`envisage.plugin.Plugin` classes and GUI `traitsui.handler.Controller` classes to adapt modules from `cytoflowgui.workflow.operations` to the Qt / `traitsui` GUI.

The module docstrings are also the ones that are used for the GUI help panel.

Submodules

cytoflowgui.op_plugins.autofluorescence

Apply autofluorescence correction to a set of fluorescence channels.

This module estimates the arithmetic median fluorescence from cells that are not fluorescent, then subtracts the median from the experimental data.

Check the diagnostic plot to make sure that the sample is actually non-fluorescent, and that the module found the population median.

Channels

The channels to correct

Blank file

The FCS file containing measurements of blank cells.


Note: You cannot have any operations before this one which estimate model parameters based on experimental conditions. (Eg, you can't use a **Density Gate** to choose morphological parameters and set *by* to an experimental condition.) If you need this functionality, you can access it using the Python module interface.

```
class cytoflowgui.op_plugins.autofluorescence.AutofluorescenceHandler(*args: Any, **kwargs: Any)
```

Bases: `cytoflowgui.op_plugins.op_plugin_base.OpHandler`

```
class cytoflowgui.op_plugins.autofluorescence.AutofluorescenceViewHandler(*args: Any, **kwargs: Any)
```

Bases: `cytoflowgui.view_plugins.view_plugin_base.ViewHandler`

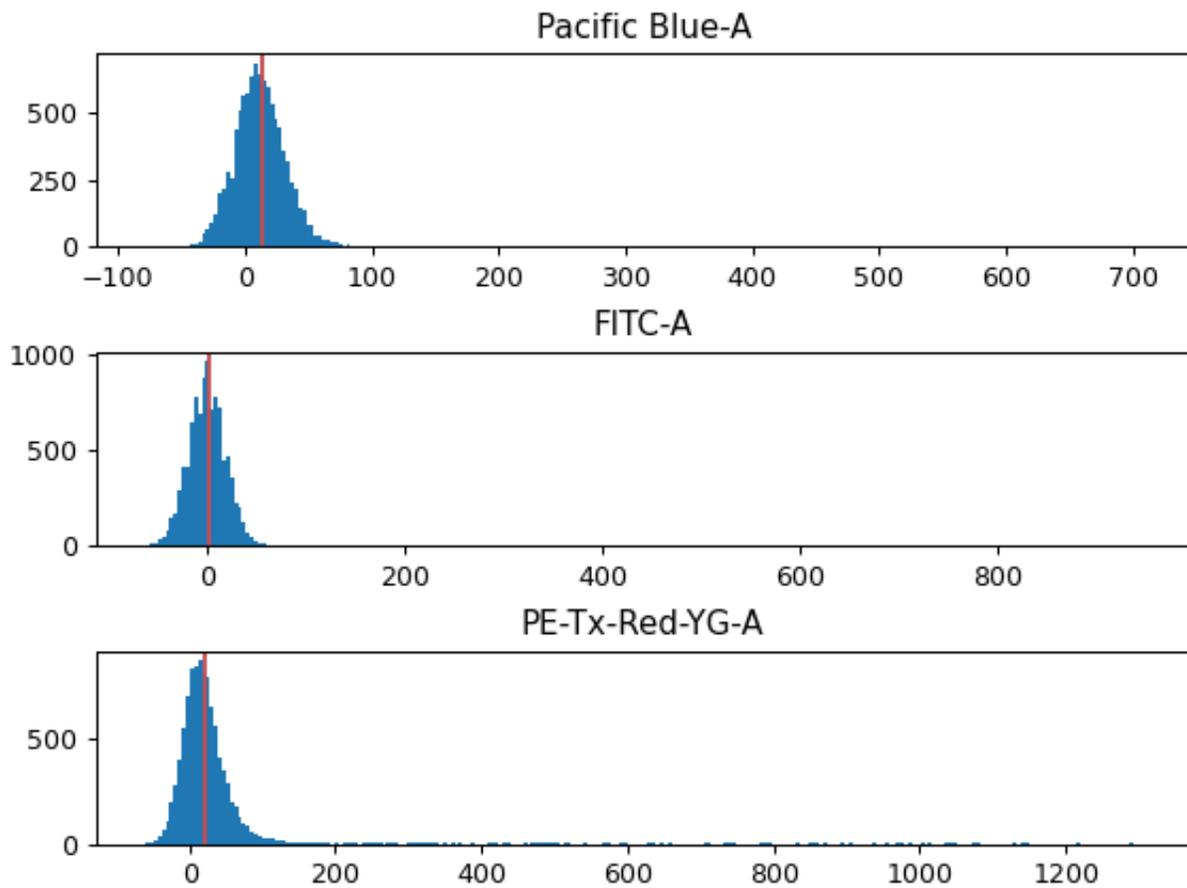

```
class cytoflowgui.op_plugins.autofluorescence.AutofluorescencePlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.autofluorescence'
    view_id = 'edu.mit.synbio.cytoflow.view.autofluorescencediagnosticview'
    short_name = 'Autofluorescence correction'
    menu_group = 'Calibration'
    get_operation()
    get_handler(model, context)
    get_icon()
```

cytoflowgui.op_plugins.bead_calibration

Calibrate arbitrary channels to molecules-of-fluorophore using fluorescent beads (eg, the **Spherotech RCP-30-5A** rainbow beads.)

Computes a log-linear calibration function that maps arbitrary fluorescence units to physical units (ie molecules equivalent fluorophore, or *MEF*).

To use, set **Beads** to the beads you calibrated with (check the lot!) and **Beads File** to an FCS file containing events collected *using the same cytometer settings as the data you're calibrating*. Then, click **Add a channel** to add the channels to calibrate, and set both the channel name and the units you want calibrate to. Click **Estimate**, and *make sure you check the diagnostic plot to see that the correct peaks were found*.

If it didn't find all the peaks (or found too many), try tweaking **Peak Quantile**, **Peak Threshold** and **Peak Cutoff**. If you can't make the peak finding work by tweaking , please submit a bug report!

Beads

The beads you're calibrating with. Make sure to check the lot number!

Beads file

A file containing the FCS events from the beads.

Channels

A list of the channels you want calibrated and the units you want them calibrated in.

Peak Quantile

Peaks must be at least this quantile high to be considered. Default = 80.

Peak Threshold

Don't search for peaks below this brightness. Default = 100.

```
class cytoflowgui.op_plugins.bead_calibration.UnitHandler(*args: Any, **kwargs: Any)
```

```
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.op_plugins.bead_calibration.BeadCalibrationHandler(*args: Any, **kwargs: Any)
```

```
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```


add_channel

```
    alias of traits.trait_types.Event
```

remove_channel

```
    alias of traits.trait_types.Event
```

```
channels = <traits.traits.ForwardProperty object>
```

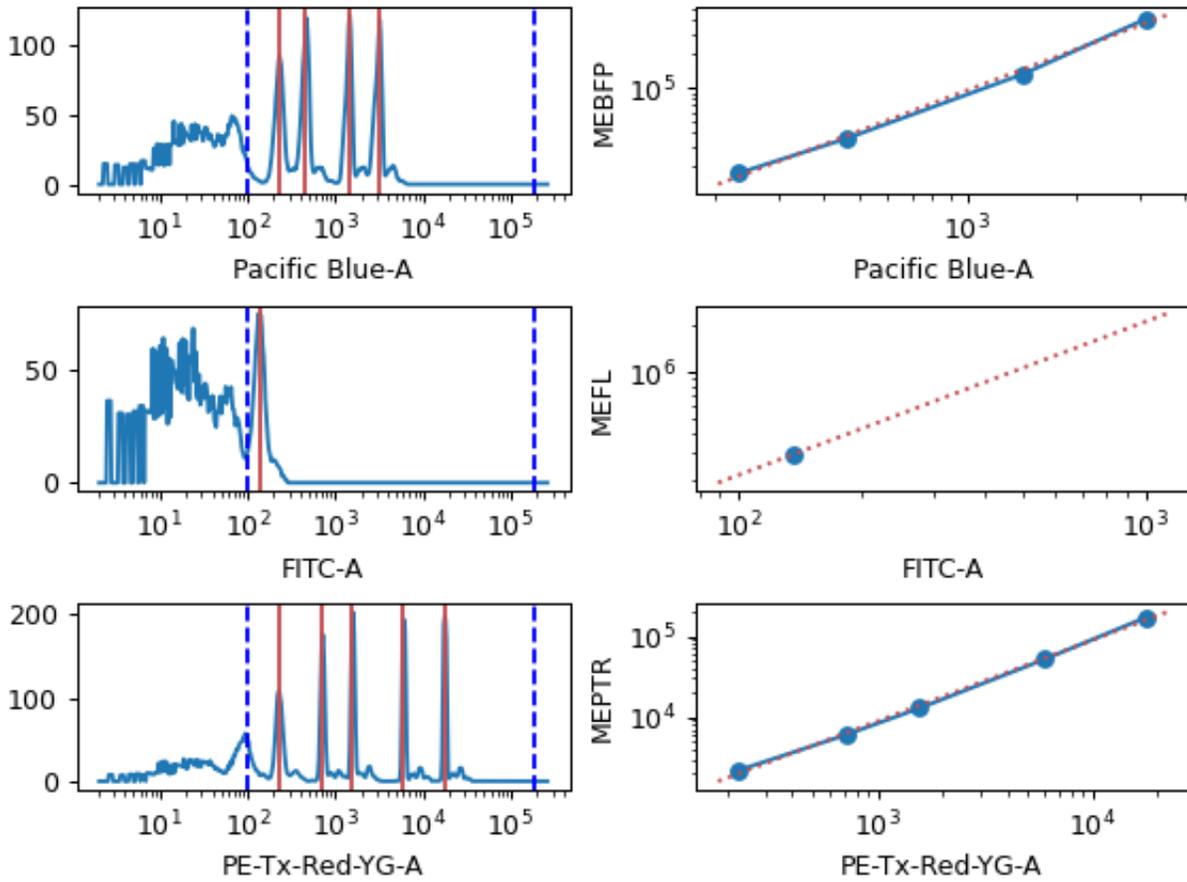

```

    beads_name_choices = <traits.trait_factory.TraitFactory object>
    beads_units = <traits.traits.ForwardProperty object>
class cytoflowgui.op_plugins.bead_calibration.BeadCalibrationViewHandler(*args: Any,
                                                                    **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
class cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.beads_calibrate'
    view_id = 'edu.mit.synbio.cytoflow.view.beadcalibrationdiagnosticview'
    short_name = 'Bead Calibration'
    menu_group = 'Calibration'
    get_operation()
    get_handler(model, context)
    get_icon()

```

cytoflowgui.op_plugins.binning

Bin data along an axis.

This operation creates equally spaced bins (in linear or log space) along an axis and adds a condition assigning each event to a bin. The value of the event's condition is the left end of the bin's interval in which the event is located.

Name

The name of the new condition created by this operation.

Channel

The channel to apply the binning to.

Scale

The scale to apply to the channel before binning.


Bin Width

How wide should each bin be? Can only set if **Scale** is *linear* or *log* (in which case, **Bin Width** is in log10-units.)

```

class cytoflowgui.op_plugins.binning.BinningHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
class cytoflowgui.op_plugins.binning.BinningViewHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
class cytoflowgui.op_plugins.binning.BinningPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.binning'
    view_id = 'edu.mit.synbio.cytoflow.views.binning'
    short_name = 'Binning'
    menu_group = 'Gates'
    get_operation()
    get_handler(model, context)

```

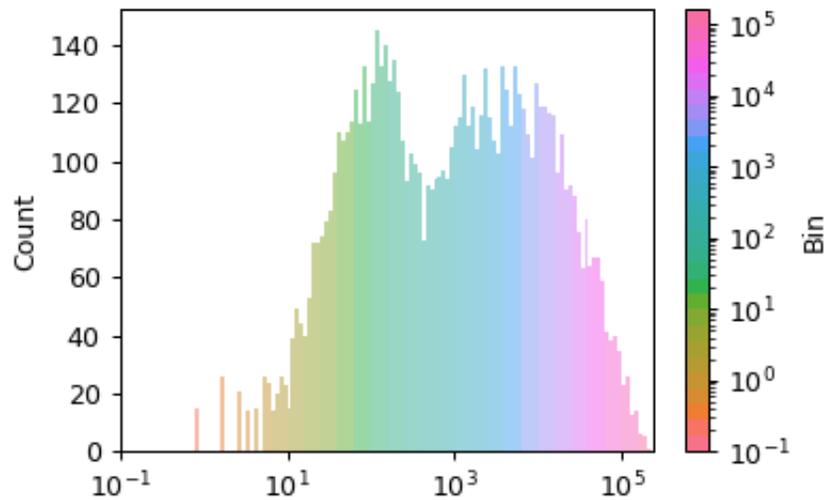

`get_icon()`

cytoflowgui.op_plugins.bleedthrough_linear

Apply matrix-based bleedthrough correction to a set of fluorescence channels.

This is a traditional matrix-based compensation for bleedthrough. For each pair of channels, the module estimates the proportion of the first channel that bleeds through into the second, then performs a matrix multiplication to compensate the raw data.

This works best on data that has had autofluorescence removed first; if that is the case, then the autofluorescence will be subtracted from the single-color controls too.

To use, specify the single-color control files and which channels they should be measured in, then click **Estimate**. Check the diagnostic plot to make sure the estimation looks good. There must be at least two channels corrected.

Add Control, Remove Control

Add or remove single-color controls.

Note: You cannot have any operations before this one which estimate model parameters based on experimental conditions. (Eg, you can't use a **Density Gate** to choose morphological parameters and set *by* to an experimental condition.) If you need this functionality, you can access it using the Python module interface.

```
class cytoflowgui.op_plugins.bleedthrough_linear.ControlHandler(*args: Any, **kwargs: Any)
```

```
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearHandler(*args: Any,
                                                                            **kwargs: Any)
```


```
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```

```
    add_control
```

```
        alias of traits.trait_types.Event
```

```
    remove_control
```

```
        alias of traits.trait_types.Event
```

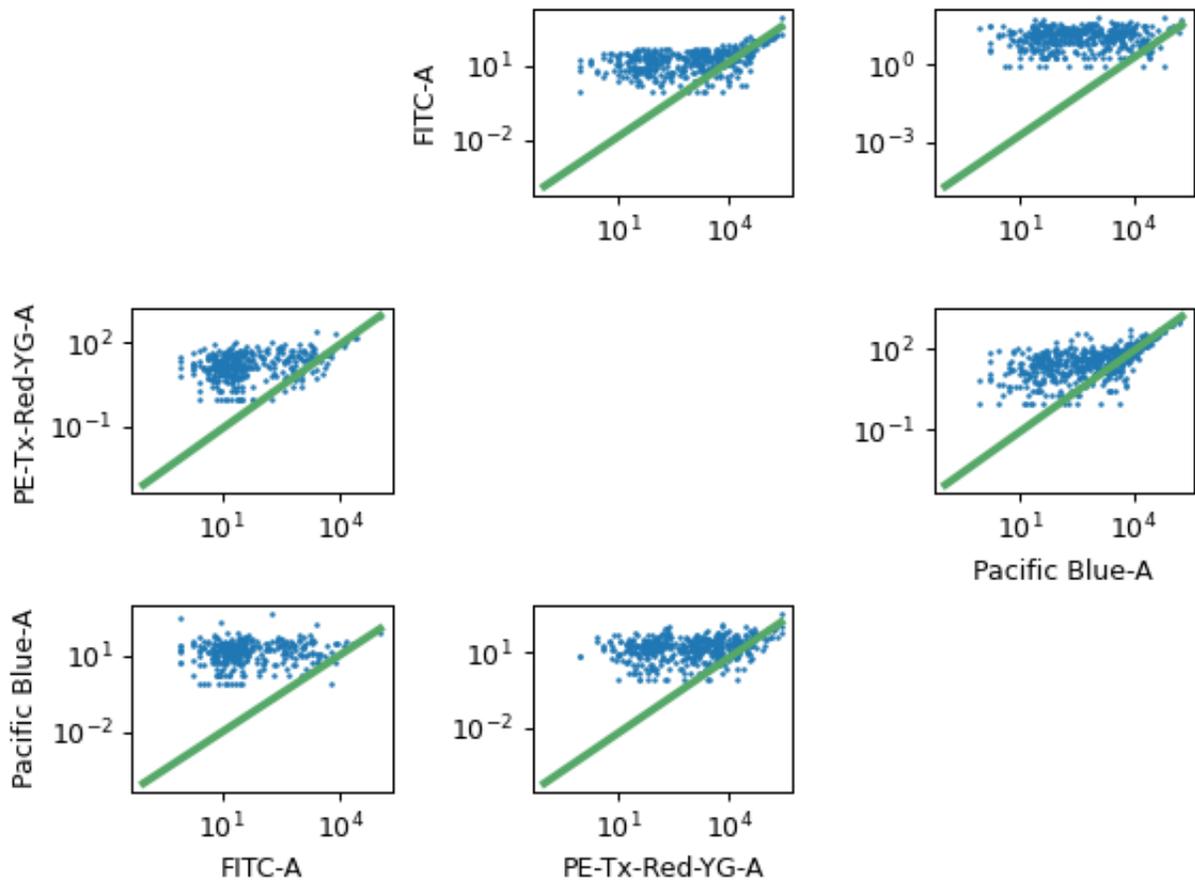

```

    channels = <traits.traits.ForwardProperty object>
class cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearViewHandler(*args: Any,
                                                                              **kwargs:
                                                                              Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
class cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.bleedthrough_linear'
    view_id = 'edu.mit.synbio.cytoflow.view.linearbleedthroughdiagnostic'
    short_name = 'Linear Compensation'
    menu_group = 'Gates'
    get_operation()
    get_handler(model, context)
    get_icon()

```

cytoflowgui.op_plugins.channel_stat

Apply a function to subsets of a data set, and add it as a statistic to the experiment.

First, the module groups the data by the unique values of the variables in **By**, then applies **Function** to the **Channel** in each group.

Name

The operation name. Becomes the first part of the new statistic's name.

Channel

The channel to apply the function to.

Function

The function to compute on each group.

Subset

Only apply the function to a subset of the data. Useful if the function is very slow.

```

class cytoflowgui.op_plugins.channel_stat.ChannelStatisticHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

```

```

class cytoflowgui.op_plugins.channel_stat.ChannelStatisticPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.channel_statistic'
    view_id = None
    short_name = 'Channel Statistic'
    menu_group = 'Gates'
    get_operation()
    get_handler(model, context)
    get_icon()

```

cytoflowgui.op_plugins.color_translation

Translate measurements from one color's scale to another, using a two-color or three-color control.

To use, set up the **Controls** list with the channels to convert and the FCS files to compute the mapping. Click **Estimate** and make sure to check that the diagnostic plots look good.


Add Control, Remove Control

Add and remove controls to compute the channel mappings.

Use mixture model?

If **True**, try to model the **from** channel as a mixture of expressing cells and non-expressing cells (as you would get with a transient transfection), then weight the regression by the probability that the cell is from the top (transfected) distribution. Make sure you check the diagnostic plots to see that this worked!

Note: You cannot have any operations before this one which estimate model parameters based on experimental conditions. (Eg, you can't use a **Density Gate** to choose morphological parameters and set *by* to an experimental condition.) If you need this functionality, you can access it using the Python module interface.

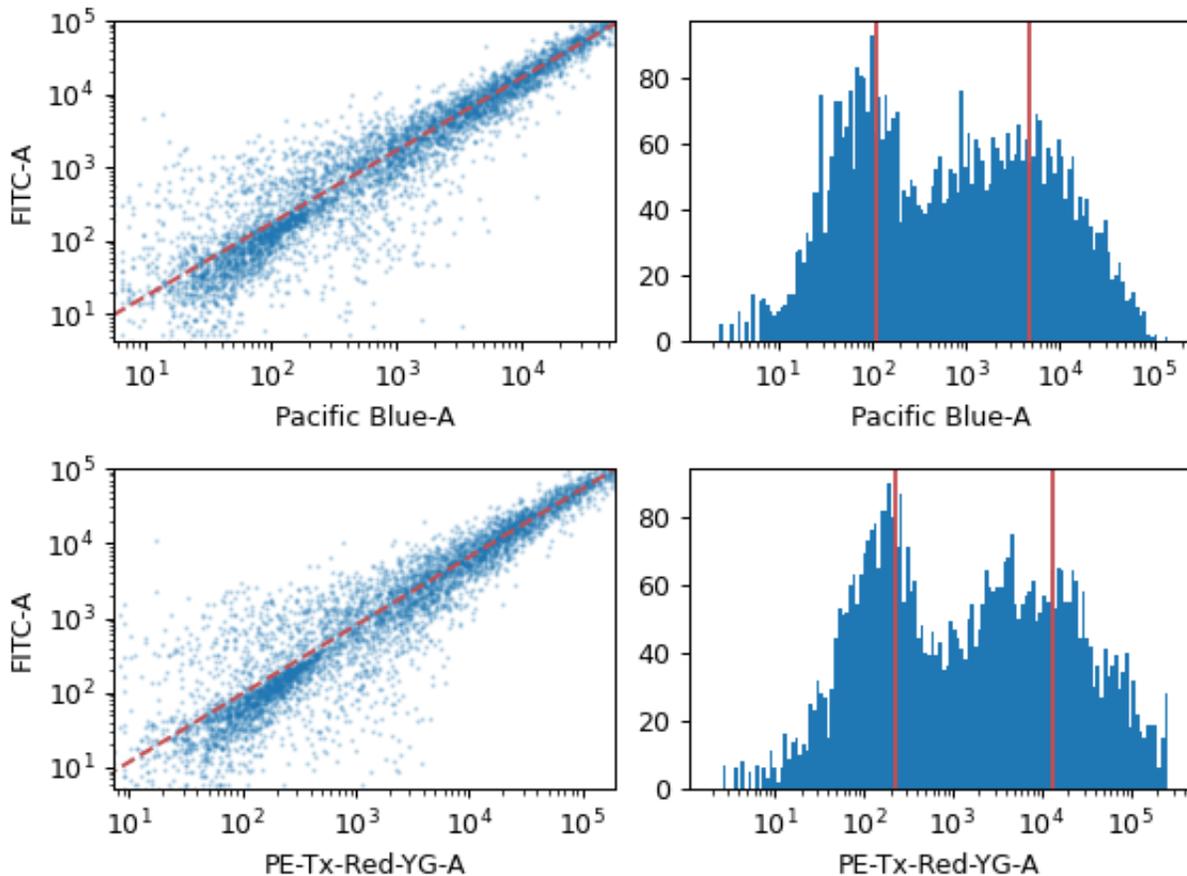

```
class cytoflowgui.op_plugins.color_translation.ControlHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```

class cytoflowgui.op_plugins.color_translation.ColorTranslationHandler(*args: Any, **kwargs:
    Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
    add_control
        alias of traits.trait_types.Event
    remove_control
        alias of traits.trait_types.Event
    channels = <traits.traits.ForwardProperty object>
class cytoflowgui.op_plugins.color_translation.ColorTranslationViewHandler(*args: Any,
    **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
class cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.color_translation'
    view_id = 'edu.mit.synbio.cytoflow.view.colortranslationdiagnostic'
    short_name = 'Color Translation'
    menu_group = 'Gates'
    get_operation()
    get_handler(model, context)
    get_icon()

```

cytoflowgui.op_plugins.density

Computes a gate based on a 2D density plot. The user chooses what proportion of events to keep, and the module creates a gate that selects those events in the highest-density bins of a 2D density histogram.

A single gate may not be appropriate for an entire experiment. If this is the case, you can use **By** to specify metadata by which to aggregate the data before computing and applying the gate.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale

Re-scale the data in **Channel** before fitting.

Keep

The proportion of events to keep in the gate. Defaults to 0.9.

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting **by** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

```


class cytoflowgui.op_plugins.density.DensityGateHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

```

```

class cytoflowgui.op_plugins.density.DensityGateViewHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

```

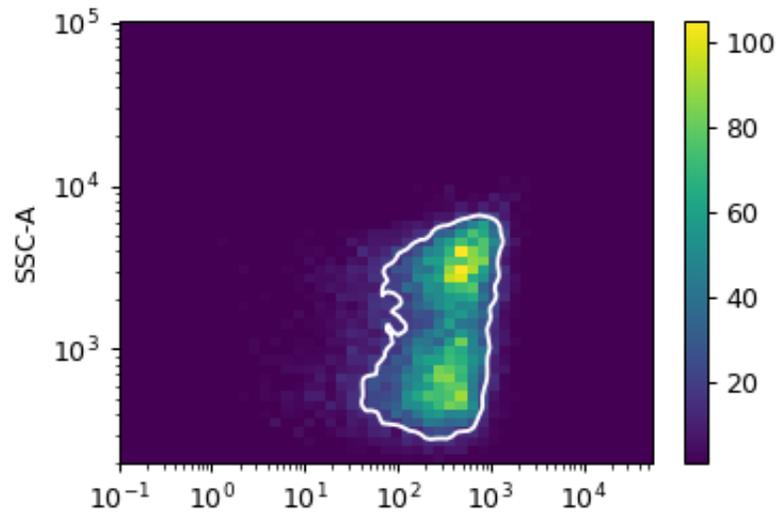

```

class cytoflowgui.op_plugins.density.DensityGatePlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.density'
    view_id = 'edu.mit.synbio.cytoflow.view.densitygateview'
    short_name = 'Density Gate'
    menu_group = 'Gates'
    get_operation()
    get_handler(model, context)
    get_icon()
    
```

cytoflowgui.op_plugins.flowpeaks

This module uses the **flowPeaks** algorithm to assign events to clusters in an unsupervised manner.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale

Re-scale the data in **Channel** before fitting.

h, h0

Scalar values that control the smoothness of the estimated distribution. Increasing **h** makes it “rougher,” while increasing **h0** makes it smoother.

tol



How readily should clusters be merged? Must be between 0 and 1.

Merge Distance

How far apart can clusters be before they are merged?

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

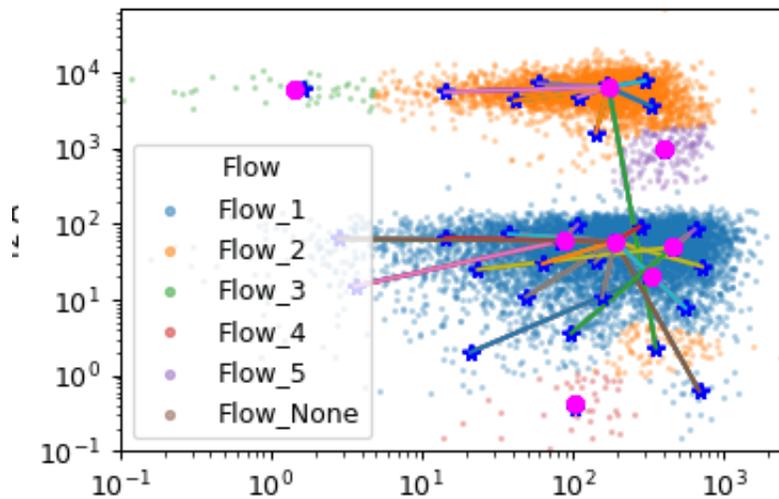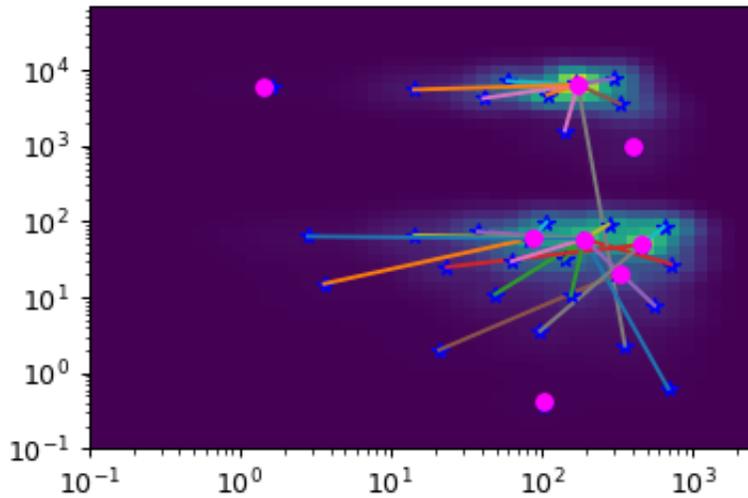

```

class cytoflowgui.op_plugins.flowpeaks.FlowPeaksHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

class cytoflowgui.op_plugins.flowpeaks.FlowPeaksViewHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

class cytoflowgui.op_plugins.flowpeaks.FlowPeaksPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.flowpeaks'
    view_id = 'edu.mit.synbio.cytoflowgui.op_plugins.flowpeaks'
    
```

```

short_name = 'Flow Peaks'
menu_group = 'Gates'
get_operation()
get_handler(model, context)
get_icon()

```

cytoflowgui.op_plugins.gaussian_1d

Fit a Gaussian mixture model with a specified number of components to one channel.

If **Num Components** is greater than 1, then this module creates a new categorical metadata variable named **Name**, with possible values {name}_1 ... name_n where n is the number of components. An event is assigned to name_i category if it has the highest posterior probability of having been produced by component i. If an event has a value that is outside the range of one of the channels' scales, then it is assigned to {name}_None.

Additionally, if **Sigma** is greater than 0, this module creates new boolean metadata variables named {name}_1 ... {name}_n where n is the number of components. The column {name}_i is True if the event is less than **Sigma** standard deviations from the mean of component i. If **Num Components** is 1, **Sigma** must be greater than 0.

Finally, the same mixture model (mean and standard deviation) may not be appropriate for every subset of the data. If this is the case, you can use **By** to specify metadata by which to aggregate the data before estimating and applying a mixture model.

Note: **Num Components** and **Sigma** withh be the same for each subset.

Name

The operation name; determines the name of the new metadata

Channel

The channels to apply the mixture model to.

Scale

Re-scale the data in **Channel** before fitting.

Num Components

How many components to fit to the data? Must be a positive integer.

Sigma

How many standard deviations on either side of the mean to include in the boolean variable {name}_i? Must be None or > 0.0. If **Num Components** is 1, must be > 0.

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

```

class cytoflowgui.op_plugins.gaussian_1d.GaussianMixture1DHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

```

```


class cytoflowgui.op_plugins.gaussian_1d.GaussianMixture1DViewHandler(*args: Any, **kwargs:
    Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

```

```

class cytoflowgui.op_plugins.gaussian_1d.GaussianMixture1DPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin

```

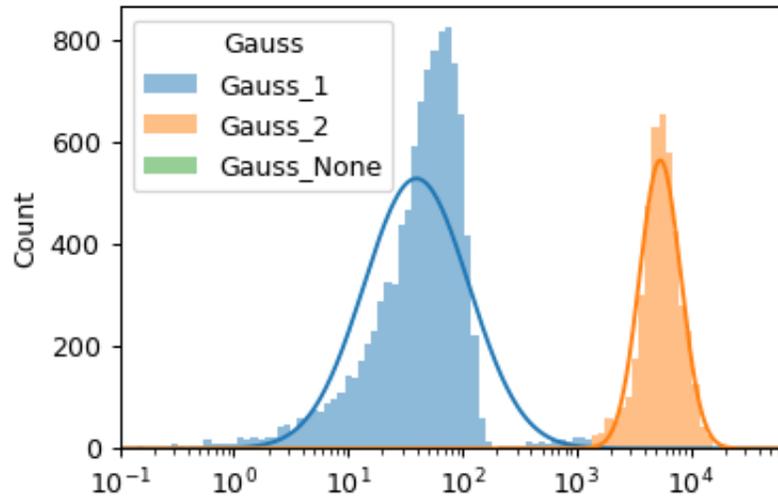

```

operation_id = 'edu.mit.synbio.cytoflowgui.operations.gaussian_1d'
view_id = 'edu.mit.synbio.cytoflow.view.gaussianmixture1dview'
short_name = '1D Mixture Model'
menu_group = 'Gates'
get_operation()
get_handler(model, context)
get_icon()

```

cytoflowgui.op_plugins.gaussian_2d

Fit a Gaussian mixture model with a specified number of components to two channels.

If **Num Components** is greater than 1, then this module creates a new categorical metadata variable named **Name**, with possible values `{name}_1 ... name_n` where `n` is the number of components. An event is assigned to `name_i` category if it has the highest posterior probability of having been produced by component `i`. If an event has a value that is outside the range of one of the channels' scales, then it is assigned to `{name}_None`.

Additionally, if **Sigma** is greater than 0, this module creates new boolean metadata variables named `{name}_1 ... {name}_n` where `n` is the number of components. The column `{name}_i` is `True` if the event is less than **Sigma** standard deviations from the mean of component `i`. If **Num Components** is 1, **Sigma** must be greater than 0.

Finally, the same mixture model (mean and standard deviation) may not be appropriate for every subset of the data. If this is the case, you can use **By** to specify metadata by which to aggregate the data before estimating and applying a mixture model.

Note: **Num Components** and **Sigma** will be the same for each subset.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale

Re-scale the data in **Channel** before fitting.

Num Components


How many components to fit to the data? Must be a positive integer.

Sigma

How many standard deviations on either side of the mean to include in the boolean variable {name}_i? Must be ≥ 0.0 . If **Num Components** is 1, must be > 0 .

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

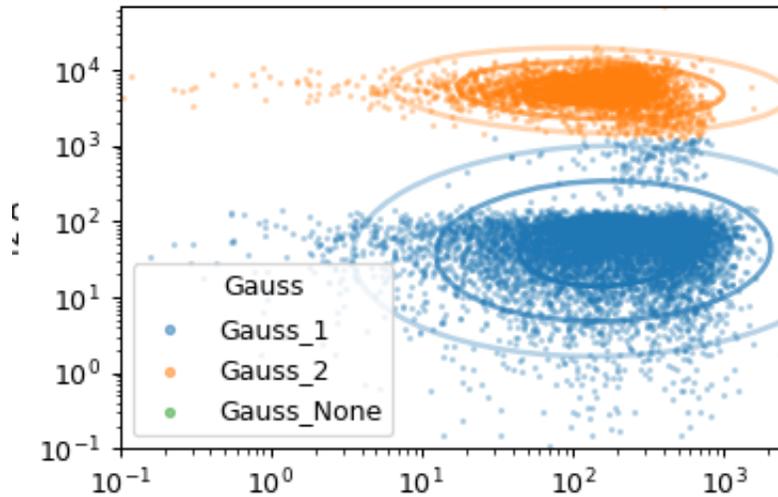

```
class cytoflowgui.op_plugins.gaussian_2d.GaussianMixture2DHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```

```
class cytoflowgui.op_plugins.gaussian_2d.GaussianMixture2DViewHandler(*args: Any, **kwargs:
    Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

```
class cytoflowgui.op_plugins.gaussian_2d.GaussianMixture2DPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
```

```
operation_id = 'edu.mit.synbio.cytoflowgui.operations.gaussian_2d'
```

```
view_id = 'edu.mit.synbio.cytoflow.view.gaussianmixture2dview'
```

```
short_name = '2D Mixture Model'
```

```
menu_group = 'Gates'
```

```
get_operation()
```

```
get_handler(model, context)
```

```
get_icon()
```

cytoflowgui.op_plugins.i_op_plugin

```
class cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin(adaptee, default=<class
                                                         'traits.adaptation.adaptation_error.AdaptationError'>)
```

Bases: `traits.has_traits.Interface`

id

The Envisage ID used to refer to this plugin

Type Constant

operation_id

Same as the `id` attribute of the `IOperation` this plugin wraps.

Type Constant

short_name

The operation's short name - for menus and toolbar tool tips

Type Constant

get_operation()

Makes an instance of the `IWorkflowOperation` that this plugin wraps.

Return type `IWorkflowOperation`

get_handler(model)

Makes an instance of a Controller for the operation.

Parameters `model` (`IWorkflowOperation`) – The model that this handler handles.

Return type `traitsui.handler.Controller`

get_icon()

Gets the icon for this operation.

Returns The SVG icon

Return type `pyface.i_image_resource.IImageResource`

get_help()

Gets the HTML help text for this plugin, deriving the filename from the class name. Probably best to use the default implementation in `cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin`

Returns The HTML help, in a single string.

Return type string

```
class cytoflowgui.op_plugins.i_op_plugin.OpPluginManager
```

Bases: `envisage.plugin.Plugin`

cytoflowgui.op_plugins.import_op

Import FCS files and associate them with experimental conditions (metadata.)

Channels

Here, you can rename channels to use names that are more informative, or remove channels you don't need. Names must be valid Python identifiers (must contain only letters, numbers and underscores and must start with a letter or underscore.)

Reset channel names

Reset the channels and channel names.


Events per sample

For very large data sets, *Cytoflow*'s interactive operation may be too slow. By setting **Events per sample**, you can tell *Cytoflow* to import a smaller number of events from each FCS file, which will make interactive data exploration much faster. When you're done setting up your workflow, set **Events per sample** to empty or 0 and *Cytoflow* will re-run your workflow with the entire data set.

Set up experiment....

Open the sample editor dialog box.

The sample editor dialog



dev_manual/api/images/import.png

Allows you to specify FCS files in the experiment, and the experimental conditions that each tube (or well) was subject to.

Note: You can select sort the table by clicking on a row header.

Note: You can select multiple entries in a column by clicking one, holding down *Shift*, and clicking another (to select a range); or, by holding down *Ctrl* and clicking multiple additional cells in the table. If multiple cells are selected, typing a value will update all of them.

Note: **Each tube must have a unique set of experimental conditions.** If a tube's conditions are not unique, the row is red and you will not be able to click "OK".

Add tubes

Opens a file selector to add tubes.

```
class cytoflowgui.op_plugins.import_op.ChannelHandler(*args: Any, **kwargs: Any)
```

```
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.op_plugins.import_op.ImportHandler(*args: Any, **kwargs: Any)
```

```
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```

```
    setup_event = <traits.trait_types.Button object>
```

```
    reset_channels_event = <traits.trait_types.Event object>
```

```
    samples = <traits.traits.ForwardProperty object>
```

```
    dialog_model = <traits.trait_types.Instance object>
```

```
class cytoflowgui.op_plugins.import_op.ImportPlugin
```

```
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
```

```
    operation_id = 'edu.mit.synbio.cytoflow.operations.import'
```

```
    view_id = None
```

```
    short_name = 'Import data'
```

```
    menu_group = 'TOP'
```

```

get_operation()
get_handler(model, context)
get_icon()

```

cytoflowgui.op_plugins.kmeans

This module uses the **KMeans** algorithm to assign events to clusters in an unsupervised manner.

Name

The operation name; determines the name of the new metadata

X Channel, Y Channel

The channels to apply the mixture model to.

X Scale, Y Scale


Re-scale the data in **Channel** before fitting.

Num Clusters

How many clusters to assign the data to.

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of Time and Dox.

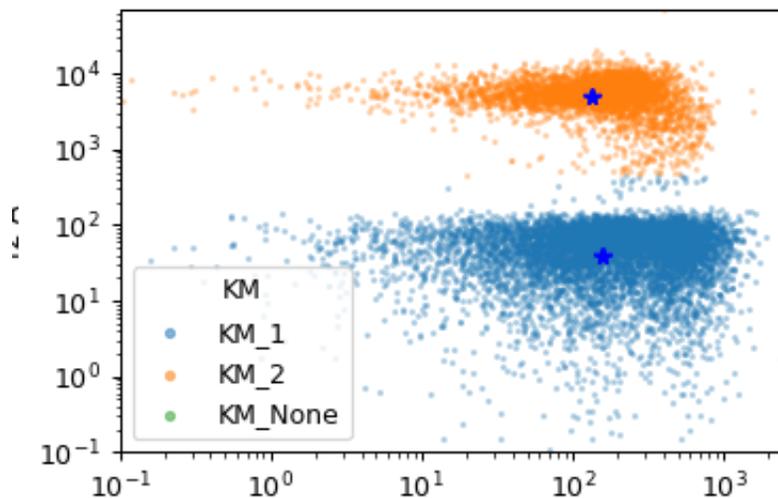

```

class cytoflowgui.op_plugins.kmeans.KMeansHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

```

```

class cytoflowgui.op_plugins.kmeans.KMeansViewHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

```

```

class cytoflowgui.op_plugins.kmeans.KMeansPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin

```

```

    operation_id = 'edu.mit.synbio.cytoflow.operations.kmeans'

```

```

    view_id = 'edu.mit.synbio.cytoflowgui.op_plugins.kmeans'

```

```

short_name = 'KMeans'
menu_group = 'Gates'
get_operation()
get_handler(model, context)
get_icon()

```

cytoflowgui.op_plugins.op_plugin_base

@author: brian

```

class cytoflowgui.op_plugins.op_plugin_base.OpHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller

```

Base class for operation handlers.

context = <traits.trait_types.Instance object>

```

class cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    Bases: traits.has_traits.HasTraits

```

get_help()

Gets the HTML help for this module, deriving the filename from the class name.

Returns The HTML help, in a single string.

Return type string

cytoflowgui.op_plugins.pca

Use principal components analysis (PCA) to decompose a multivariate data set into orthogonal components that explain a maximum amount of variance.

Creates new “channels” named {name}_1 . . . {name}_n, where name is the **Name** attribute and n is **Num components**.

The same decomposition may not be appropriate for different subsets of the data set. If this is the case, you can use the **By** attribute to specify metadata by which to aggregate the data before estimating (and applying) a model. The PCA parameters such as the number of components and the kernel are the same across each subset, though.

Name

The operation name; determines the name of the new columns.

Channels

The channels to apply the decomposition to.

Scale

Re-scale the data in the specified channels before fitting.

Num components

How many components to fit to the data? Must be a positive integer.

By

A list of metadata attributes to aggregate the data before estimating the model. For example, if the experiment has two pieces of metadata, **Time** and **Dox**, setting **By** to ["Time", "Dox"] will fit the model separately to each subset of the data with a unique combination of **Time** and **Dox**.

Whiten

Scale each component to unit variance? May be useful if you will be using unsupervised clustering (such as K-means).

```
class cytoflowgui.op_plugins.pca.ChannelHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.op_plugins.pca.PCAHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```

```
add_channel
    alias of traits.trait_types.Event
```

```
remove_channel
    alias of traits.trait_types.Event
```

```
channels = <traits.traits.ForwardProperty object>
```

```
class cytoflowgui.op_plugins.pca.PCAPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
```

```
operation_id = 'edu.mit.synbio.cytoflow.operations.pca'
```

```
view_id = None
```

```
short_name = 'Principal Component Analysis'
```

```
menu_group = 'Calibration'
```

```
get_operation()
```

```
get_handler(model, context)
```

```
get_icon()
```

cytoflowgui.op_plugins.polygon

Draw a polygon gate. To add vertices, use a single-click; to close the polygon, click the first vertex a second time.

Name

The operation name. Used to name the new metadata field that's created by this module.

X Channel

The name of the channel on the gate's X axis.

Y Channel

The name of the channel on the gate's Y axis.

X Scale

The scale of the X axis for the interactive plot.

Y Scale

The scale of the Y axis for the interactive plot


Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

```
class cytoflowgui.op_plugins.polygon.PolygonHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```

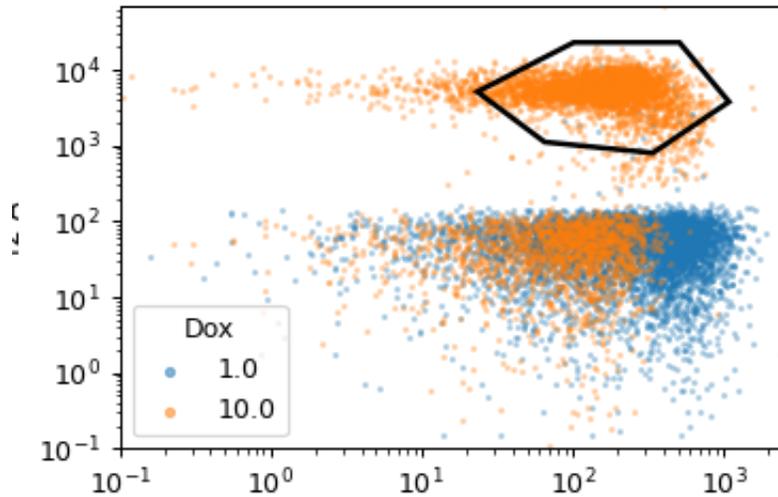

```
class cytoflowgui.op_plugins.polygon.PolygonViewHandler(*args: Any, **kwargs: Any)
```

Bases: `cytoflowgui.view_plugins.view_plugin_base.ViewHandler`

```
class cytoflowgui.op_plugins.polygon.PolygonPlugin
```

Bases: `envisage.plugin.Plugin`, `cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin`

```
operation_id = 'edu.mit.synbio.cytoflow.operations.polygon'
```

```
view_id = 'edu.mit.synbio.cytoflow.views.polygon'
```

```
short_name = 'Polygon Gate'
```

```
menu_group = 'Gates'
```

```
get_operation()
```

```
get_handler(model, context)
```

```
get_icon()
```

cytoflowgui.op_plugins.quad

Draw a “quadrant” gate. To create a new gate, just click where you’d like the intersection to be. Creates a new meta-data column named *name*, with values name_1 (upper-left quadrant), name_2 (upper-right), name_3 (lower-left), and name_4 (lower-right).

Note: This matches the order of FACSDiva quad gates.

Name

The operation name. Used to name the new metadata field that’s created by this operation.

X channel

The name of the channel on the X axis.

X threshold

The threshold in the X channel.

Y channel

The name of the channel on the Y axis.

Y threshold

The threshold in the Y channel.

X Scale

The scale of the X axis for the interactive plot.

Y Scale


The scale of the Y axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

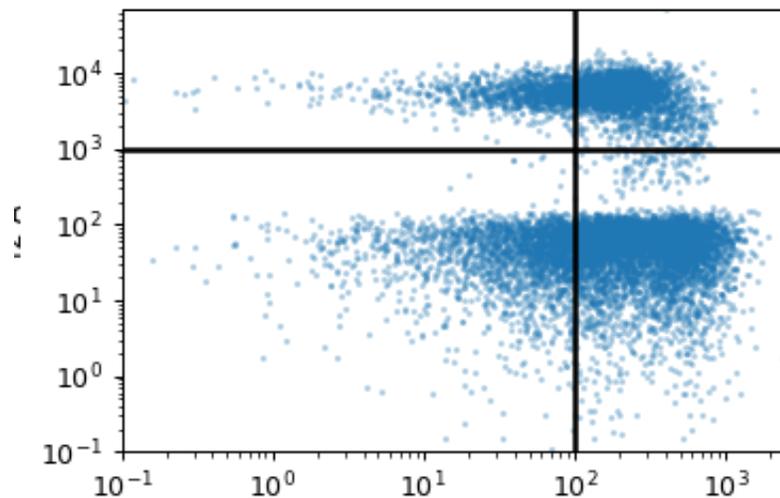

```
class cytoflowgui.op_plugins.quad.QuadHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

class cytoflowgui.op_plugins.quad.QuadViewHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

class cytoflowgui.op_plugins.quad.QuadPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.quad'
    view_id = 'edu.mit.synbio.cytoflow.views.quad'
    short_name = 'Quad'
    menu_group = 'Gates'
    get_operation()
    get_handler(model, context)
    get_icon()
```

cytoflowgui.op_plugins.range

Draw a range gate. To draw a new range, click-and-drag across the plot.

Name

The operation name. Used to name the new metadata field that's created by this module.

Channel

The name of the channel to apply the gate to.

Low

The low threshold of the gate.

High

The high threshold of the gate.

Scale


The scale of the axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

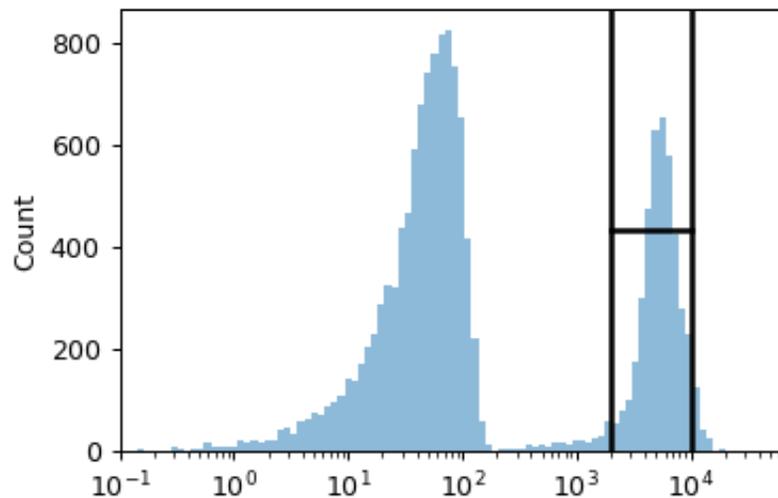

```
class cytoflowgui.op_plugins.range.RangeHandler(*args: Any, **kwargs: Any)
```

```
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```

```
class cytoflowgui.op_plugins.range.RangeViewHandler(*args: Any, **kwargs: Any)
```

```
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

```
class cytoflowgui.op_plugins.range.RangePlugin
```

```
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
```

```
    operation_id = 'edu.mit.synbio.cytoflow.operations.range'
```

```
    view_id = 'edu.mit.synbio.cytoflow.views.range'
```

```
    short_name = 'Range'
```

```
    menu_group = 'Gates'
```

```

get_operation()
get_handler(model, context)
get_icon()

```

cytoflowgui.op_plugins.range2d

Draw a 2-dimensional range gate (eg, a rectangle). To set the gate, click-and-drag on the plot.

Name

The operation name. Used to name the new metadata field that's created by this operation.

X channel

The name of the channel on the X axis.

X Low

The low threshold in the X channel.

X High

The high threshold in the X channel.

Y channel

The name of the channel on the Y axis.

Y Low

The low threshold in the Y channel.

Y High

The high threshold in the Y channel.

X Scale

The scale of the X axis for the interactive plot.

Y Scale

The scale of the Y axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

```
class cytoflowgui.op_plugins.range2d.Range2DHandler(*args: Any, **kwargs: Any)
```

Bases: *cytoflowgui.op_plugins.op_plugin_base.OpHandler*

```
class cytoflowgui.op_plugins.range2d.Range2DViewHandler(*args: Any, **kwargs: Any)
```

Bases: *cytoflowgui.view_plugins.view_plugin_base.ViewHandler*

```
class cytoflowgui.op_plugins.range2d.Range2DPlugin
```

Bases: *envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin*

class docs


```
operation_id = 'edu.mit.synbio.cytoflow.operations.range2d'
```

```
view_id = 'edu.mit.synbio.cytoflow.views.range2d'
```

```
short_name = 'Range 2D'
```

```
menu_group = 'Gates'
```

```
get_operation()
```

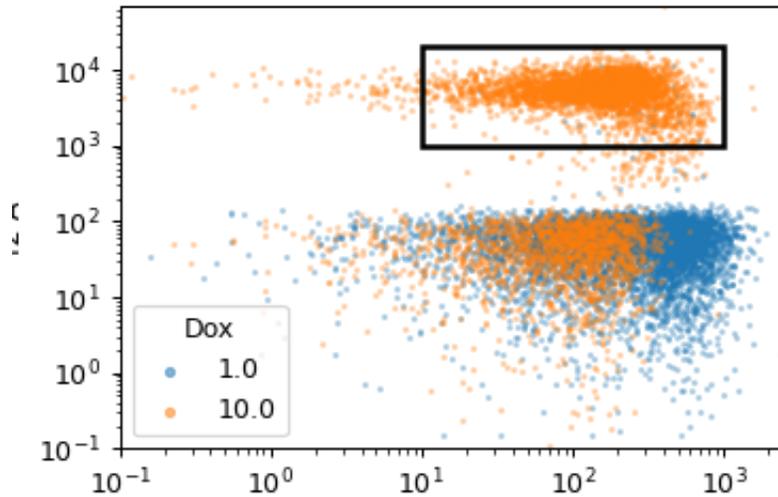

`get_handler(model, context)`

`get_icon()`

cytoflowgui.op_plugins.ratio

Adds a new “channel” to the workflow, where the value of the channel is the ratio of two other channels.

Name

The name of the new channel.

Numerator

The numerator for the ratio.

Denominator

The denominator for the ratio.

`class cytoflowgui.op_plugins.ratio.RatioHandler(*args: Any, **kwargs: Any)`

Bases: `cytoflowgui.op_plugins.op_plugin_base.OpHandler`

`class cytoflowgui.op_plugins.ratio.RatioPlugin`

Bases: `envisage.plugin.Plugin`, `cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin`

`operation_id = 'edu.mit.synbio.cytoflow.operations.ratio'`

`view_id = None`

`short_name = 'Ratio'`

`menu_group = 'Data'`

`get_operation()`

`get_handler(model, context)`

`get_icon()`

cytoflowgui.op_plugins.tasbe

This module combines all of the other calibrated flow cytometry modules (autofluorescence, bleedthrough compensation, bead calibration, and channel translation) into one easy-use-interface.


Channels

Which channels are you calibrating?

Autofluorescence

Blank File

The FCS file with the blank (unstained or untransformed) cells, for autofluorescence correction.

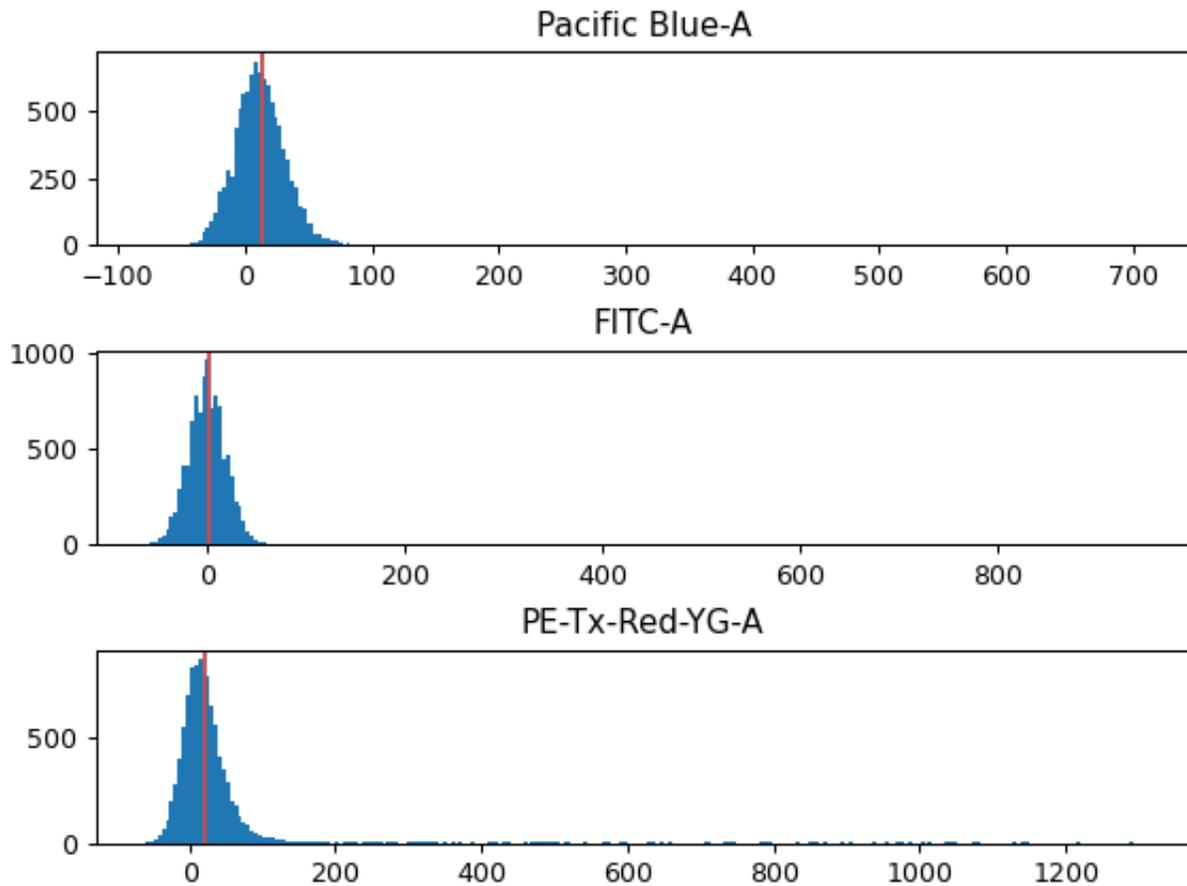

Bleedthrough Correction

A list of single-color controls to use in bleedthrough compensation. There's one entry per channel to compensate.

Channel

The channel that this file is the single-color control for.


File

The FCS file containing the single-color control data.

Bead Calibration

The beads that you used for calibration. Make sure to check the lot number as well!

The FCS file containing the bead data.

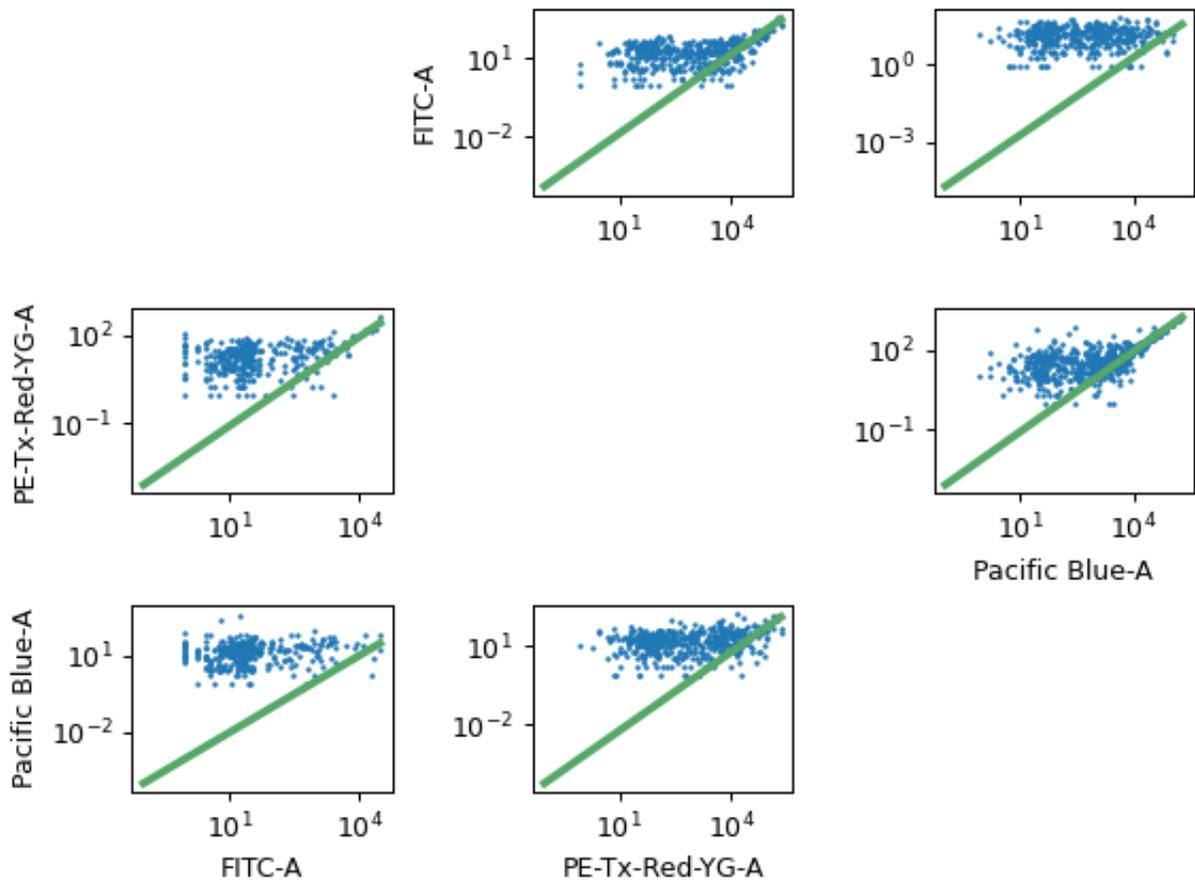

The unit (such as *MEFL*) to calibrate to.

Peak Quantile


The minimum quantile required to call a peak in the bead data. Check the diagnostic plot: if you have peaks that aren't getting called, decrease this. If you have "noise" peaks that are getting called incorrectly, increase this.

Peak Threshold

The minimum brightness where the module will call a peak.

Peak Cutoff

The maximum brightness where the module will call a peak. Use this to remove peaks that are saturating the detector.

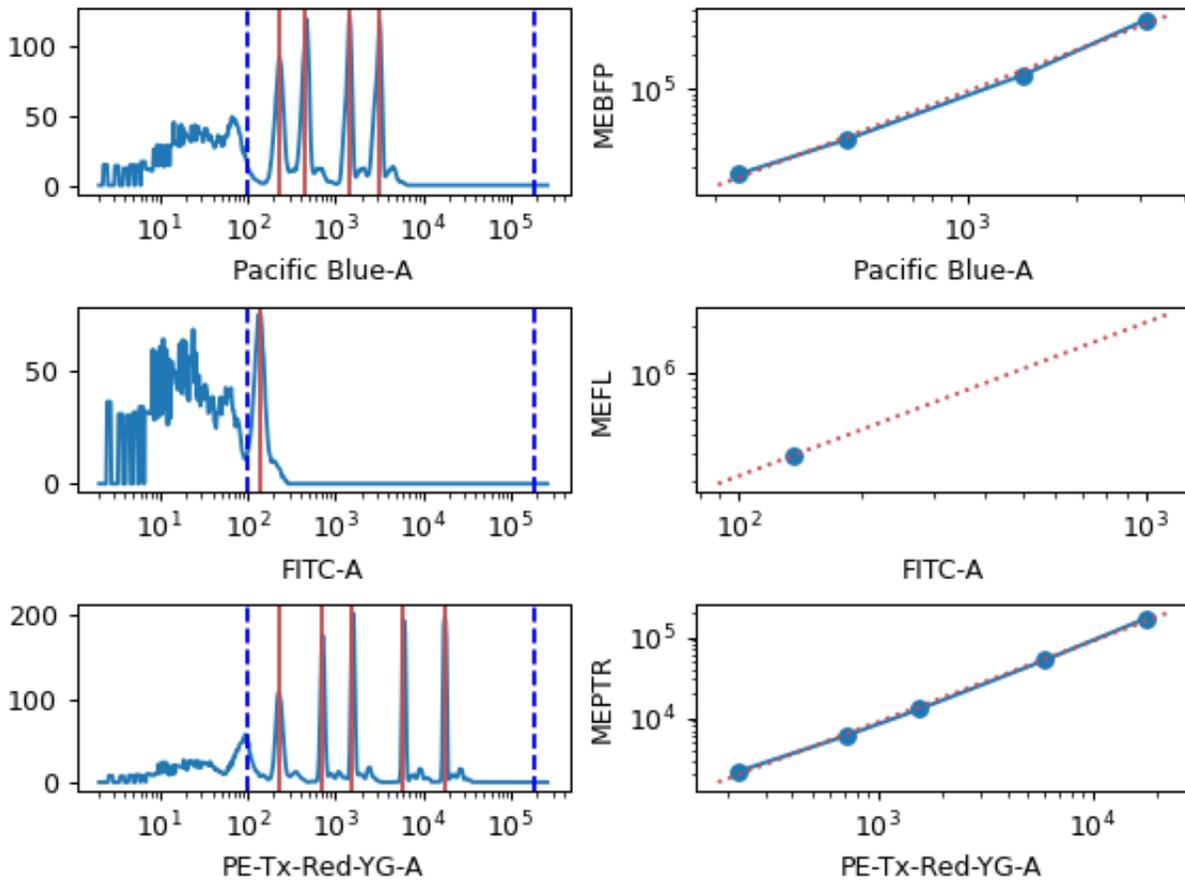

Color Translation

To Channel


Which channel should we rescale all the other channels to?

Use mixture model?

If this is set, the module will try to separate the data using a mixture-of-Gaussians, then only compute the translation using the higher population. This is the kind of behavior that you see in a transient transfection in mammalian cells, for example.

Translation list

Each pair of channels must have a multi-color control from which to compute the scaling factor.

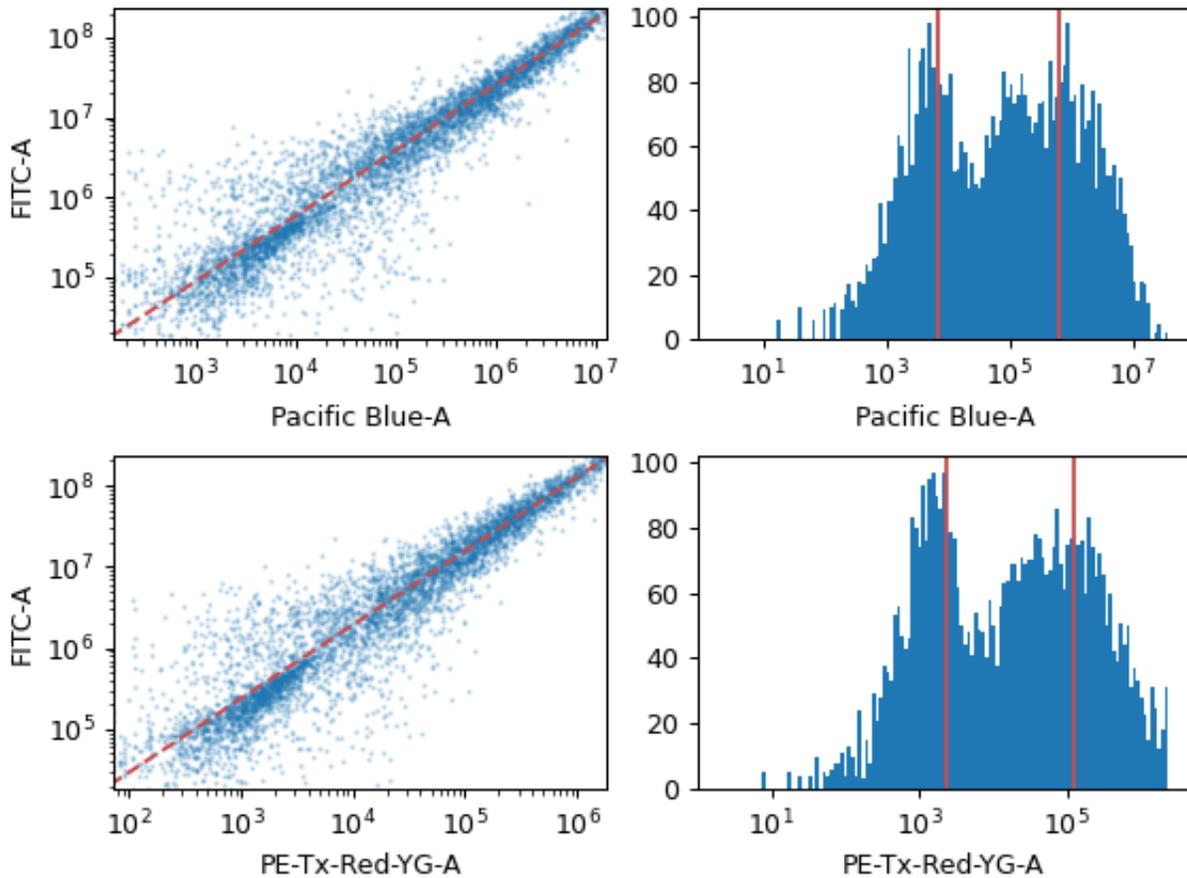

```
class cytoflowgui.op_plugins.tasbe.BleedthroughControlHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.op_plugins.tasbe.TranslationControlHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.op_plugins.tasbe.UnitHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.op_plugins.tasbe.TasbeHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler
```

```
    beads_name_choices = <traits.traits.ForwardProperty object>
```

```
    beads_units = <traits.traits.ForwardProperty object>
```

```
class cytoflowgui.op_plugins.tasbe.TasbeViewHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

```
class cytoflowgui.op_plugins.tasbe.TasbePlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
```

```
    operation_id = 'edu.mit.synbio.cytoflowgui.workflow.operations.tasbe'
```

```
    view_id = 'edu.mit.synbio.cytoflowgui.workflow.operations.tasbeview'
```

```
    short_name = 'TASBE Calibration'
```

```

menu_group = 'Gates'
get_operation()
get_handler(model, context)
get_icon()

```

cytoflowgui.op_plugins.threshold

Draw a threshold gate. To set a new threshold, click on the plot.

Name

The operation name. Used to name the new metadata field that's created by this module.

Channel

The name of the channel to apply the gate to.

Threshold

The threshold of the gate.

Scale


The scale of the axis for the interactive plot

Hue facet

Show different experimental conditions in different colors.

Subset

Show only a subset of the data.

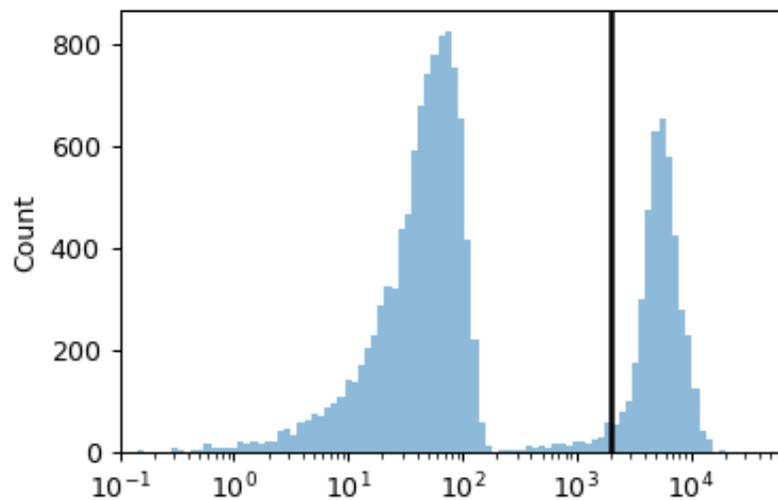

```

class cytoflowgui.op_plugins.threshold.ThresholdHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

```

```

class cytoflowgui.op_plugins.threshold.ThresholdViewHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

```

```

class cytoflowgui.op_plugins.threshold.ThresholdPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin
    operation_id = 'edu.mit.synbio.cytoflow.operations.threshold'

```

```

view_id = 'edu.mit.synbio.cytoflow.views.threshold'
short_name = 'Threshold'
menu_group = 'Gates'
get_operation()
get_handler(model, context)
get_icon()

```

cytoflowgui.op_plugins.xform_stat

Apply a function to a statistic, and add it as a statistic to the experiment.

First, the module groups the data by the unique values of the variables in **By**, then applies **Function** to the statistic in each group.

Note: Statistics are a central part of *Cytoflow*. More documentation is forthcoming.

Name

The operation name. Becomes the first part of the new statistic's name.

Statistic

The statistic to apply the function to.

Function

The function to compute on each group.

Subset

Only apply the function to a subset of the input statistic. Useful if the function is very slow.

```

class cytoflowgui.op_plugins.xform_stat.TransformStatisticHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.op_plugins.op_plugin_base.OpHandler

```

```

indices = <traits.traits.ForwardProperty object>

```

```

levels = <traits.traits.ForwardProperty object>

```

```

class cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.op_plugins.op_plugin_base.PluginHelpMixin

```

```

operation_id = 'edu.mit.synbio.cytoflow.operations.transform_statistic'

```

```

view_id = None

```

```

short_name = 'Transform Statistic'

```

```

menu_group = 'Gates'

```

```

get_operation()

```

```

get_handler(model, context)

```

```

get_icon()

```

cytoflowgui.utility package

cytoflowgui.utility

A few utility modules to support *cytoflowgui*

Submodules

cytoflowgui.utility.event_tracer

Record trait change events in single and multi-threaded environments. Adapted from https://docs.enthought.com/traits/_modules/traits/util/event_tracer.html

class cytoflowgui.utility.event_tracer.SentinelRecord

Bases: `object`

Sentinel record to separate groups of chained change event dispatches.

class cytoflowgui.utility.event_tracer.ChangeMessageRecord(*time, indent, name, old, new, class_name*)

Bases: `object`

Message record for a change event dispatch.

time

Time stamp in UTC.

indent

Depth level in a chain of trait change dispatches.

name

The name of the trait that changed

old

The old value.

new

The new value.

class_name

The name of the class that the trait change took place.

class cytoflowgui.utility.event_tracer.CallingMessageRecord(*time, indent, handler, source*)

Bases: `object`

Message record for a change handler call.

time

Time stamp in UTC.

indent

Depth level of the call in a chain of trait change dispatches.

handler

The traits change handler that is called.

source

The source file where the handler was defined.

class cytoflowgui.utility.event_tracer.**ExitMessageRecord**(*time, indent, handler, exception*)

Bases: `object`

Message record for returning from a change event dispatch.

time

Time stamp in UTC.

indent

Depth level of the exit in a chain of trait change dispatch.

handler

The traits change handler that is called.

exception

The exception type (if one took place)

class cytoflowgui.utility.event_tracer.**RecordContainer**

Bases: `object`

A simple record container.

This class is commonly used to hold records from a single thread.

record(*record*)

Add the record into the container.

save_to_file(*filename*)

Save the records into a file.

class cytoflowgui.utility.event_tracer.**MultiThreadRecordContainer**

Bases: `object`

A container of record containers that are used by separate threads.

Each record container is mapped to a thread name id. When a RecordContainer does not exist for a specific thread a new empty RecordContainer will be created on request.

get_change_event_collector(*thread_name*)

Return the dedicated RecordContainer for the thread.

If no RecordContainer is found for `thread_name` then a new RecordContainer is created.

save_to_directory(*directory_name*)

Save records files into the directory.

Each RecordContainer will dump its records on a separate file named `<thread_name>.trace`.

class cytoflowgui.utility.event_tracer.**ChangeEventRecorder**(*container*)

Bases: `object`

A single thread trait change event recorder.

pre_tracer(*obj, name, old, new, handler*)

Record a string representation of the trait change dispatch

post_tracer(*obj, name, old, new, handler, exception=None*)

Record a string representation of the trait change return

class cytoflowgui.utility.event_tracer.**MultiThreadChangeEventRecorder**(*container*)

Bases: `object`

A thread aware trait change recorder.

The class manages multiple ChangeEventRecorders which record trait change events for each thread in a separate file.

close()

Close and stop all logging.

pre_tracer(*obj, name, old, new, handler*)

The traits pre event tracer.

This method should be set as the global pre event tracer for traits.

post_tracer(*obj, name, old, new, handler, exception=None*)

The traits post event tracer.

This method should be set as the global post event tracer for traits.

cytoflowgui.utility.event_tracer.record_events()

Multi-threaded trait change event tracer.:

```
from trace_recorder import record_events
with record_events() as change_event_container:
    my_model.some_trait = True
change_event_container.save_to_directory('C:\dev\trace')
```

This will install a tracer that will record all events that occur from setting of some_trait on the my_model instance.

The results will be stored in one file per running thread in the directory 'C:devtrace'. The files are named after the thread being traced.

cytoflowgui.utility.logging

Logging utilities for *cytoflowgui*

class cytoflowgui.utility.logging.CallbackHandler(*callback, **kwargs*)

Bases: logging.Handler

emit(*record*)

Do whatever it takes to actually log the specified logging record.

This version is intended to be implemented by subclasses and so raises a NotImplementedError.

cytoflowgui.utility.logging.log_exception()**cytoflowgui.view_plugins package****cytoflowgui.view_plugins**

envisage.plugin.Plugin classes and GUI traitsui.handler.Controller classes to adapt modules from *cytoflowgui.workflow.views* to the Qt / traitsui GUI.

The module docstrings are also the ones that are used for the GUI help panel.

Submodules

cytoflowgui.view_plugins.bar_chart

Plots a bar chart of a statistic.

Each variable in the statistic (ie, each variable chosen in the statistic operation's **Group By**) must be set as **Variable** or as a facet.

Statistic

Which statistic to plot.

Variable

The statistic variable to use as the major bar groups.

Scale

How to scale the statistic plot.

Horizontal Facet

Make multiple plots, with each column representing a subset of the statistic with a different value for this variable.

Vertical Facet

Make multiple plots, with each row representing a subset of the statistic with a different value for this variable.

Hue Facet


Make multiple bars with different colors; each color represents a subset of the statistic with a different value for this variable.

Error Statistic

A statistic to use to make the error bars. Must have the same variables as the statistic in **Statistic**.

Subset

Plot only a subset of the statistic.

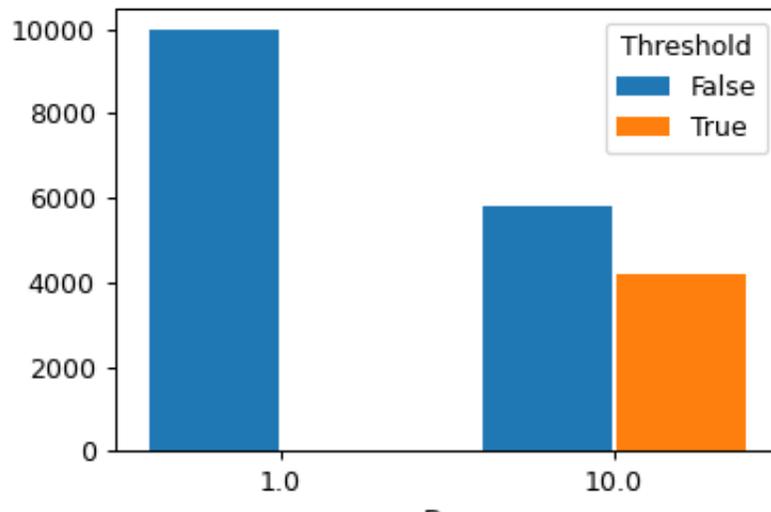

```
class cytoflowgui.view_plugins.bar_chart.BarChartParamsHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.view_plugins.bar_chart.BarChartHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

```

indices = <traits.traits.ForwardProperty object>
levels = <traits.traits.ForwardProperty object>
class cytoflowgui.view_plugins.bar_chart.BarChartPlugin
  Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
  PluginHelpMixin
  view_id = 'edu.mit.synbio.cytoflow.view.barchart'
  short_name = 'Bar Chart'
  get_view()
  get_handler(model, context)
  get_icon()

```

cytoflowgui.view_plugins.density

Plots a 2-dimensional density plot.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Scale

Scale the color palette and the color bar

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

```
class cytoflowgui.view_plugins.density.DensityParamsHandler(*args: Any, **kwargs: Any)
```

```
  Bases: traitsui.api.Controller
```

```
class cytoflowgui.view_plugins.density.DensityHandler(*args: Any, **kwargs: Any)
```

```
  Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

```
class cytoflowgui.view_plugins.density.DensityPlugin
```

```
  Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
  PluginHelpMixin
```


```
  view_id = 'edu.mit.synbio.cytoflow.view.density'
```

```
  short_name = 'Density Plot'
```

```
  get_view()
```

```
  get_handler(model, context)
```

```
  get_icon()
```

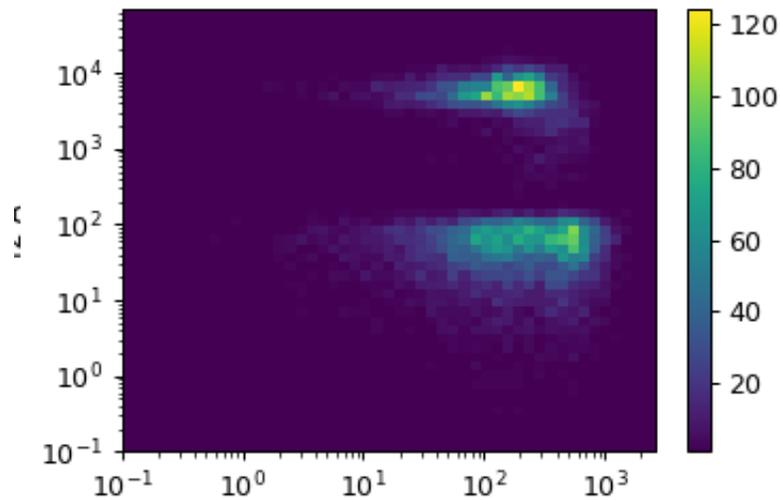

cytoflowgui.view_plugins.export_fcs

Exports FCS files from after this operation. Only really useful if you've done a calibration step or created derivative channels using the ratio option. As you set the options, the main plot shows a table of the files that will be created.

Base

The prefix of the FCS file names

By

A list of metadata attributes to aggregate the data before exporting. For example, if the experiment has two pieces of metadata, Time and Dox, setting **By** to ["Time", "Dox"] will export one file for each subset of the data with a unique combination of Time and Dox.

Keywords

If you want to add more keywords to the FCS files' TEXT segment, specify them here.

Export...

Choose a folder and export the FCS files.

```
class cytoflowgui.view_plugins.export_fcs.ExportFCSHandler(*args: Any, **kwargs: Any)
```

Bases: *cytoflowgui.view_plugins.view_plugin_base.ViewHandler*

```
export = <traits.trait_types.Event object>
```

```
class cytoflowgui.view_plugins.export_fcs.ExportFCSPlugin
```

Bases: *envisage.plugin.Plugin*, *cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin*

```
view_id = 'edu.mit.synbio.cytoflow.view.exportfcs'
```

```
short_name = 'Export FCS'
```

```
get_view()
```

```
get_handler(model, context)
```

```
get_icon()
```

cytoflowgui.view_plugins.histogram

Plots a histogram.

Channel

The channel for the plot.

Scale

How to scale the X axis of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

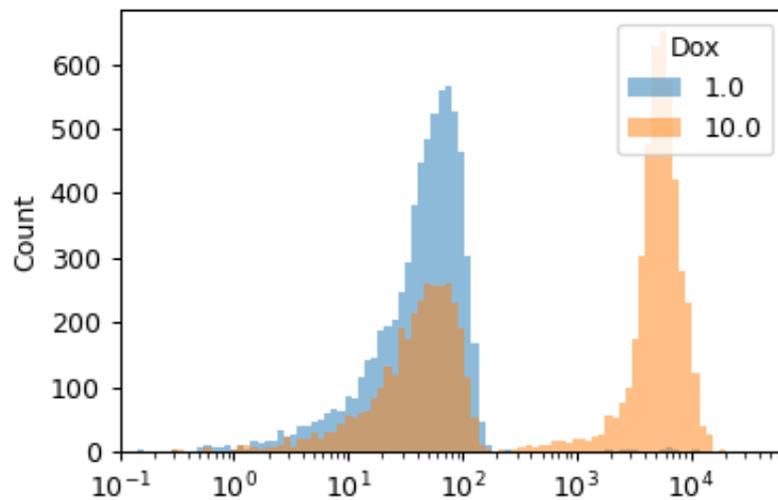

```
class cytoflowgui.view_plugins.histogram.HistogramParamsHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.view_plugins.histogram.HistogramHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

```
class cytoflowgui.view_plugins.histogram.HistogramPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
    PluginHelpMixin
    view_id = 'edu.mit.synbio.cytoflow.view.histogram'
    short_name = 'Histogram'
```

`get_view()`

`get_handler(model, context)`

`get_icon()`

cytoflowgui.view_plugins.histogram_2d

Plots a 2-dimensional histogram. Similar to a density plot, but the number of events in a bin change the bin's opacity, so you can use different colors.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

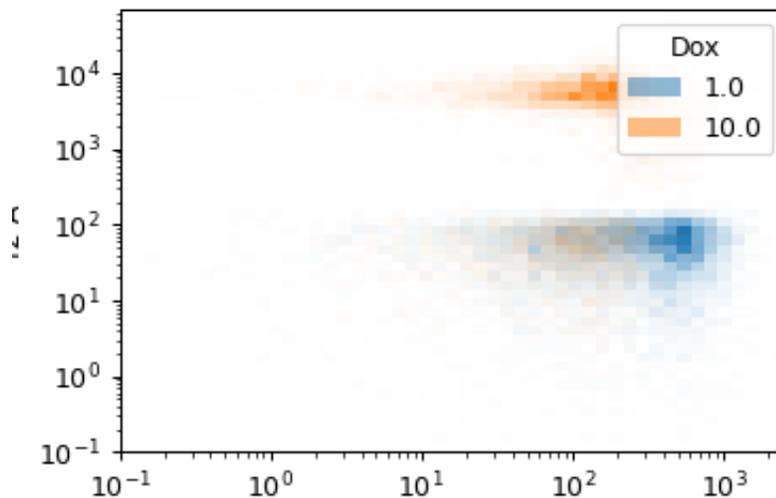

```
class cytoflowgui.view_plugins.histogram_2d.Histogram2DParamsHandler(*args: Any, **kwargs: Any)
```

```
    Bases: traitsui.api.Controller
```

```

class cytoflowgui.view_plugins.histogram_2d.Histogram2DHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

class cytoflowgui.view_plugins.histogram_2d.Histogram2DPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
    PluginHelpMixin

    view_id = 'edu.mit.synbio.cytoflow.view.histogram2d'

    short_name = '2D Histogram'

    get_view()

    get_handler(model, context)

    get_icon()

```

cytoflowgui.view_plugins.i_view_plugin

```

class cytoflowgui.view_plugins.i_view_plugin.IViewPlugin(adaptee, default=<class
    'traits.adaptation.adaptation_error.AdaptationError'>)

    Bases: traits.has_traits.Interface

    id
        The envisage ID used to refer to this plugin

        Type Str

    view_id
        Same as the “id” attribute of the IView this plugin wraps Prefix: edu.mit.synbio.cytoflowgui.view

        Type Str

    short_name
        The view’s “short” name - for menus, toolbar tips, etc.

        Type Str

    get_view()
        Gets the IView instance that this plugin wraps.

        Returns An instance of the view that this plugin wraps

        Return type IView

    get_handler(model)
        Gets an instance of the handler for this view or params model.

        NOTE: You have to check to see what the class of model is, and return an appropriate handler!

        Parameters
            • model (IWorkflowView) – The model to associate with this handler.
            • context (WorkflowItem) – The WorkflowItem that this model is a part of.

        Return type traitsui.handler.Controller

    get_icon()
        Returns an icon for this plugin

        Returns The SVG icon

        Return type pyface.i_image_resource.IImageResource

```

get_help()

Gets the HTML help text for this plugin, deriving the filename from the class name. Probably best to use the default implementation in `cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin`

Returns The HTML help, in a single string.

Return type string

get_plugin()

Returns an instance of `envisage.plugin.Plugin` implementing `IViewPlugin`. Usually returns self.

Return type `envisage.plugin.Plugin`

class `cytoflowgui.view_plugins.i_view_plugin.ViewPluginManager`

Bases: `envisage.plugin.Plugin`

cytoflowgui.view_plugins.kde_1d

Plots a “smoothed” histogram.

Channel

The channel for the plot.

Scale

How to scale the X axis of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale

If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab’s plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

class `cytoflowgui.view_plugins.kde_1d.Kde1DParamsHandler(*args: Any, **kwargs: Any)`

Bases: `traitsui.api.Controller`

class `cytoflowgui.view_plugins.kde_1d.Kde1DHandler(*args: Any, **kwargs: Any)`

Bases: `cytoflowgui.view_plugins.view_plugin_base.ViewHandler`, `traitsui.api.Controller`

class `cytoflowgui.view_plugins.kde_1d.Kde1DPlugin`

Bases: `envisage.plugin.Plugin`, `cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin`


`view_id = 'edu.mit.synbio.cytoflow.view.kde1d'`

`short_name = '1D Kernel Density'`

`get_view()`

`get_handler(model, context)`

`get_icon()`

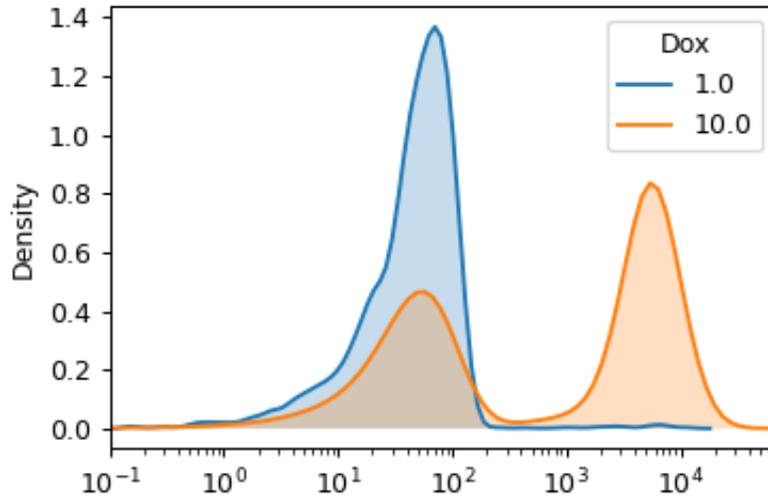

cytoflowgui.view_plugins.kde_2d

Plots a 2-d kernel-density estimate. Sort of like a smoothed histogram. The density is visualized with a set of isolines.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale

If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

```
class cytoflowgui.view_plugins.kde_2d.Kde2DParamsHandler(*args: Any, **kwargs: Any)
```

Bases: traitsui.api.Controller


```
class cytoflowgui.view_plugins.kde_2d.Kde2DHandler(*args: Any, **kwargs: Any)
```

Bases: *cytoflowgui.view_plugins.view_plugin_base.ViewHandler*

```
class cytoflowgui.view_plugins.kde_2d.Kde2DPlugin
```

Bases: *envisage.plugin.Plugin*, *cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin*

```
view_id = 'edu.mit.synbio.cytoflow.view.kde2d'
```

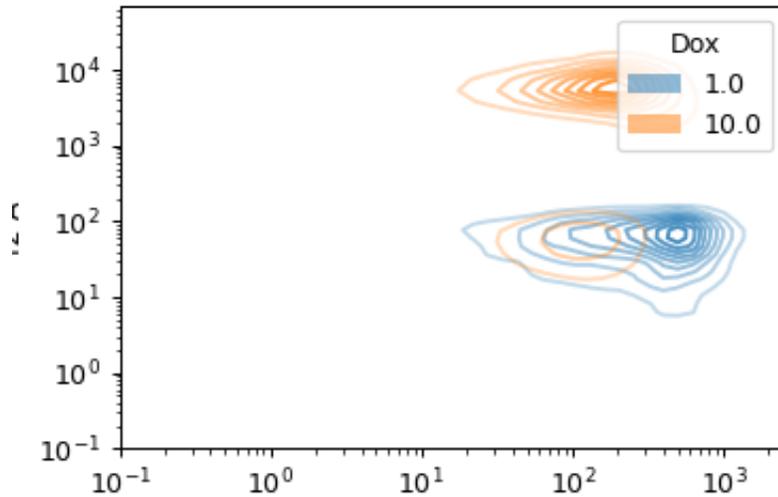

`short_name = '2D Kernel Density Estimate'`

`get_view()`

`get_handler(model, context)`

`get_icon()`

`cytoflowgui.view_plugins.parallel_coords`

Plots a parallel coordinates plot. PC plots are good for multivariate data; each vertical line represents one attribute, and one set of connected line segments represents one data point.

Channels

The channels to plot, and their scales. Drag the blue dot to re-order.

Add Channel, Remove Channel

Add or remove a channel

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot different values of a condition with different colors.

Color Scale


Scale the color palette and the color bar

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

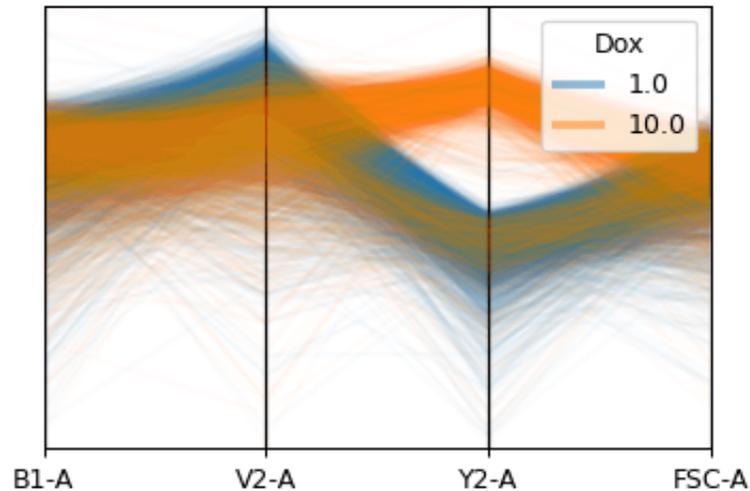

```
class cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesParamsHandler(*args: Any,
                                                                              **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.view_plugins.parallel_coords.ChannelHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesHandler(*args: Any,
                                                                           **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

add_channel

alias of `traits.trait_types.Event`

remove_channel

alias of `traits.trait_types.Event`

channels = <traits.traits.ForwardProperty object>

```
class cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin
```

view_id = 'edu.mit.synbio.cytoflow.view.parallel_coords'

short_name = 'Parallel Coordinates Plot'

get_view()

get_handler(model, context)

get_icon()

cytoflowgui.view_plugins.radviz

Plots a radviz plot. Radviz plots project multivariate plots into two dimensions. Good for looking for clusters.

Channels

The channels to plot, and their scales. Drag the blue dot to re-order.

Add Channel, Remove Channel

Add or remove a channel

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot different values of a condition with different colors.

Color Scale


Scale the color palette and the color bar

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

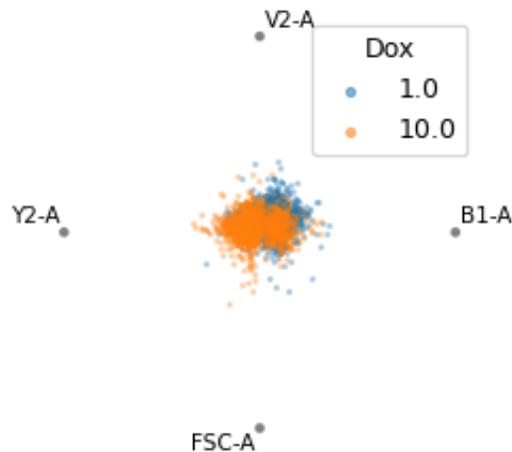

```
class cytoflowgui.view_plugins.radviz.RadvizParamsHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.view_plugins.radviz.ChannelHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

```
class cytoflowgui.view_plugins.radviz.RadvizHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
```

```
add_channel
    alias of traits.trait_types.Event
```

```

remove_channel
    alias of traits.trait_types.Event

channels = <traits.traits.ForwardProperty object>

```

```

class cytoflowgui.view_plugins.radviz.RadvizPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
           PluginHelpMixin

    view_id = 'edu.mit.synbio.cytoflow.view.radviz'
    short_name = 'Radviz Plot'

    get_view()
    get_handler(model, context)
    get_icon()

```

cytoflowgui.view_plugins.scatterplot

Plot a scatterplot.

X Channel, Y Channel

The channels to plot on the X and Y axes.

X Scale, Y Scale

How to scale the X and Y axes of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale

If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

```

class cytoflowgui.view_plugins.scatterplot.ScatterplotParamsHandler(*args: Any, **kwargs:
                                                                    Any)

```

```

    Bases: traitsui.api.Controller

```

```

class cytoflowgui.view_plugins.scatterplot.ScatterplotHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler

```


```

class cytoflowgui.view_plugins.scatterplot.ScatterplotPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
           PluginHelpMixin

    view_id = 'edu.mit.synbio.cytoflow.view.scatterplot'
    short_name = 'Scatter Plot'

    get_view()

```

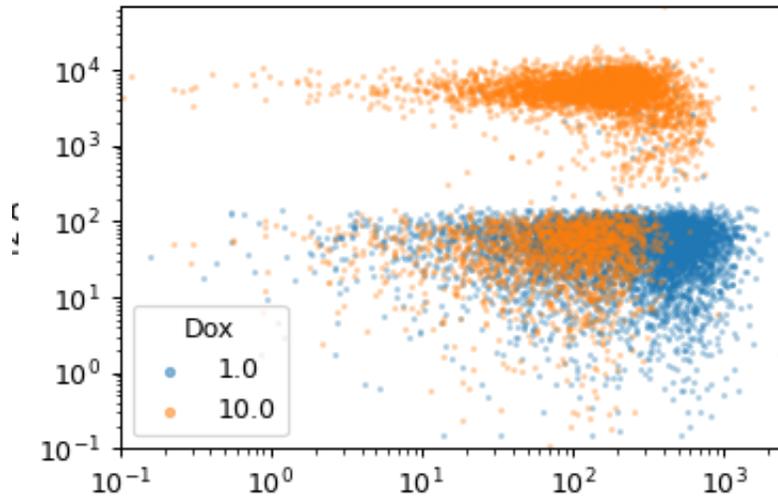

`get_handler(model, context)`

`get_icon()`

`cytoflowgui.view_plugins.stats_1d`

Plots a line plot of a statistic.

Each variable in the statistic (ie, each variable chosen in the statistic operation's **Group By**) must be set as **Variable** or as a facet.

Statistic

Which statistic to plot.

Variable

The statistic variable put on the X axis. Must be numeric.

X Scale, Y Scale

How to scale the X and Y axes.

Horizontal Facet

Make multiple plots, with each column representing a subset of the statistic with a different value for this variable.

Vertical Facet

Make multiple plots, with each row representing a subset of the statistic with a different value for this variable.

Hue Facet

Make multiple bars with different colors; each color represents a subset of the statistic with a different value for this variable.

Color Scale


If **Color Facet** is a numeric variable, use this scale for the color bar.

Error Statistic

A statistic to use to make the error bars. Must have the same variables as the statistic in **Statistic**.

Subset

Plot only a subset of the statistic.

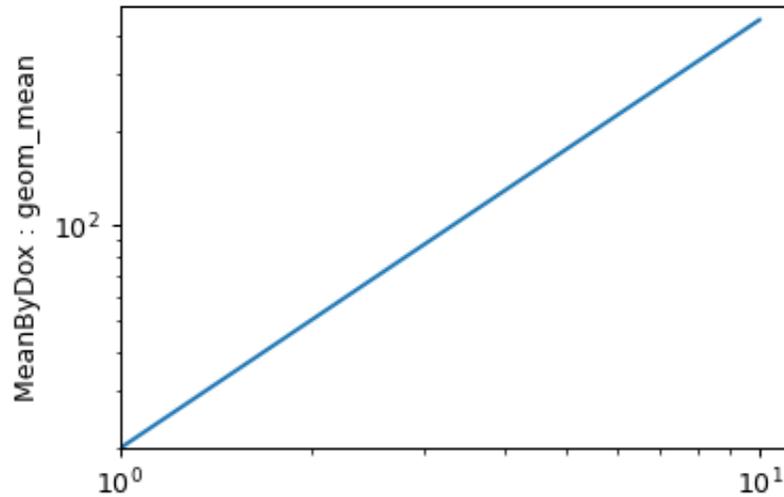

```

class cytoflowgui.view_plugins.stats_1d.Stats1DParamsHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
class cytoflowgui.view_plugins.stats_1d.Stats1DHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
    indices = <traits.traits.ForwardProperty object>
    numeric_indices = <traits.traits.ForwardProperty object>
    levels = <traits.traits.ForwardProperty object>
class cytoflowgui.view_plugins.stats_1d.Stats1DPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
    PluginHelpMixin
    view_id = 'edu.mit.synbio.cytoflow.view.stats1d'
    short_name = '1D Statistics View'
    get_view()
    get_handler(model, context)
    get_icon()

```

cytoflowgui.view_plugins.stats_2d

Plot two statistics on a scatter plot. A point (X,Y) is drawn for every pair of elements with the same value of **Variable**; the X value is from **** X statistic**** and the Y value is from **Y statistic**.

X Statistic

Which statistic to plot on the X axis.

Y Statistic

Which statistic to plot on the Y axis. Must have the same indices as **X Statistic**.

X Scale, Y Scale

How to scale the X and Y axes.

Variable

The statistic variable to put on the plot.

Horizontal Facet

Make multiple plots, with each column representing a subset of the statistic with a different value for this variable.

Vertical Facet

Make multiple plots, with each row representing a subset of the statistic with a different value for this variable.

Color Facet

Make lines on the plot with different colors; each color represents a subset of the statistic with a different value for this variable.

Color Scale

If **Color Facet** is a numeric variable, use this scale for the color bar.

X Error Statistic


A statistic to use to make error bars in the X direction. Must have the same indices as the statistic in **X Statistic**.

Y Error Statistic

A statistic to use to make error bars in the Y direction. Must have the same indices as the statistic in **Y Statistic**.

Subset

Plot only a subset of the statistic.

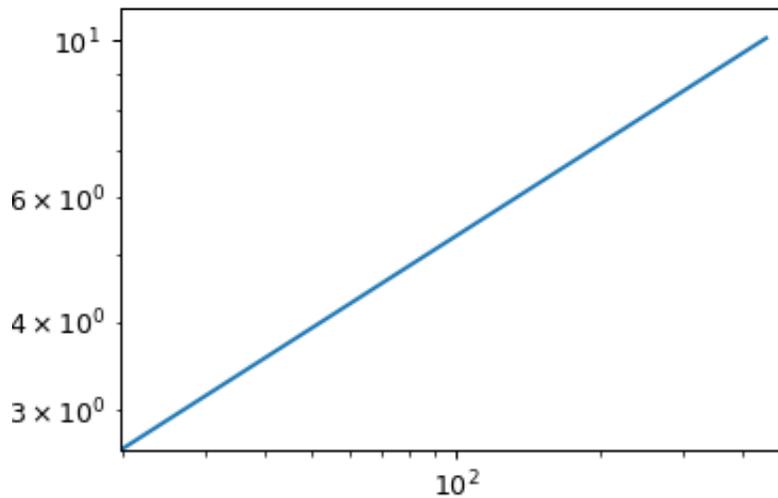

```
class cytoflowgui.view_plugins.stats_2d.Stats2DParamsHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller

class cytoflowgui.view_plugins.stats_2d.Stats2DHandler(*args: Any, **kwargs: Any)
    Bases: cytoflowgui.view_plugins.view_plugin_base.ViewHandler
    indices = <traits.traits.ForwardProperty object>
    numeric_indices = <traits.traits.ForwardProperty object>
    levels = <traits.traits.ForwardProperty object>

class cytoflowgui.view_plugins.stats_2d.Stats2DPlugin
    Bases: envisage.plugin.Plugin, cytoflowgui.view_plugins.view_plugin_base.
    PluginHelpMixin
```

```

view_id = 'edu.mit.synbio.cytoflow.view.stats2d'
short_name = '2D Statistics View'
get_view()
get_handler(model, context)
get_icon()

```

cytoflowgui.view_plugins.table

Make a table out of a statistic. The table can then be exported.

Statistic

Which statistic to view.

Rows

Which variable to use for the rows

Subrows

Which variable to use for subrows.

Columns

Which variable to use for the columns.

Subcolumns

Which variable to use for the subcolumns.

Export

Export the table to a CSV file.

```
class cytoflowgui.view_plugins.table.TableHandler(*args: Any, **kwargs: Any)
```

Bases: *cytoflowgui.view_plugins.view_plugin_base.ViewHandler*

```
indices = <traits.traits.ForwardProperty object>
```

```
levels = <traits.traits.ForwardProperty object>
```

```
export = <traits.trait_types.Event object>
```

```
class cytoflowgui.view_plugins.table.TablePlugin
```

Bases: *envisage.plugin.Plugin*, *cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin*

```
view_id = 'edu.mit.synbio.cytoflow.view.table'
```

```
short_name = 'Table View'
```

```
get_view()
```

```
get_handler(model, context)
```

```
get_icon()
```

| | Threshold = 0 | Threshold = 1 |
|----------|---------------|---------------|
| Dox = 1 | 9963 | 37 |
| Dox = 10 | 5823 | 4177 |

cytoflowgui.view_plugins.view_plugin_base

@author: brian

class cytoflowgui.view_plugins.view_plugin_base.**PluginHelpMixin**

Bases: `traits.has_traits.HasTraits`

A mixin to get online HTML help for a class. It determines the HTML path name from the class name.

get_help()

Gets the HTML help for this class.

Returns The HTML help in a single string.

Return type string

class cytoflowgui.view_plugins.view_plugin_base.**ViewHandler**(*args: Any, **kwargs: Any)

Bases: `traitsui.api.Controller`

Useful bits for view handlers.

context = <traits.trait_types.Instance object>

cytoflowgui.view_plugins.violin

Plots a violin plot, which is a nice way to compare several distributions.

X Variable

The variable to compare on the X axis.

Y Channel

The channel to plot on the Y axis.

Y Channel Scale

How to scale the Y axis of the plot.

Horizontal Facet

Make multiple plots. Each column has a unique value of this variable.

Vertical Facet

Make multiple plots. Each row has a unique value of this variable.

Color Facet

Plot with multiple colors. Each color has a unique value of this variable.

Color Scale

If **Color Facet** is a numeric variable, use this scale for the color bar.

Tab Facet

Make multiple plots in differen tabs; each tab's plot has a unique value of this variable.

Subset

Plot only a subset of the data in the experiment.

class cytoflowgui.view_plugins.violin.**ViolinParamsHandler**(*args: Any, **kwargs: Any)


Bases: `traitsui.api.Controller`

class cytoflowgui.view_plugins.violin.**ViolinHandler**(*args: Any, **kwargs: Any)

Bases: `cytoflowgui.view_plugins.view_plugin_base.ViewHandler`

class cytoflowgui.view_plugins.violin.**ViolinPlotPlugin**

Bases: `envisage.plugin.Plugin`, `cytoflowgui.view_plugins.view_plugin_base.PluginHelpMixin`

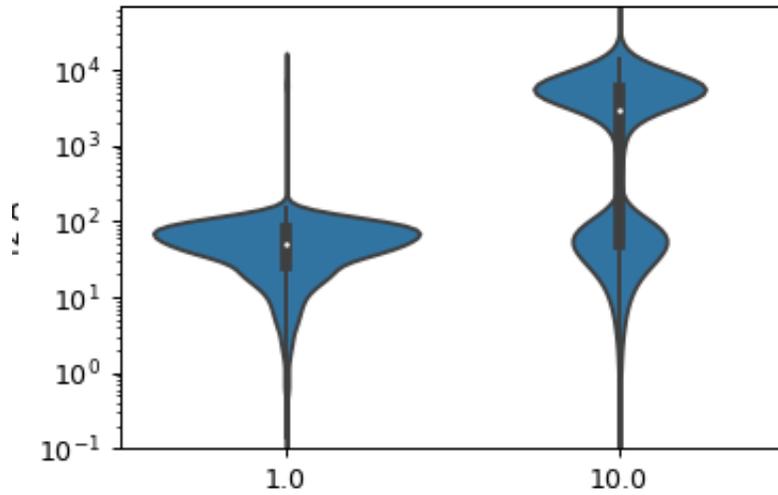

```
view_id = 'edu.mit.synbio.cytoflow.view.violin'
short_name = 'Violin Plot'
get_view()
get_handler(model, context)
get_icon()
```

cytoflowgui.workflow package

cytoflowgui.workflow

```
class cytoflowgui.workflow.Changed
    Bases: object
    APPLY = 'APPLY'
    ESTIMATE = 'ESTIMATE'
    VIEW = 'VIEW'
    ESTIMATE_RESULT = 'ESTIMATE_RESULT'
    OP_STATUS = 'OP_STATUS'
    RESULT = 'RESULT'
    PREV_RESULT = 'PREV_RESULT'
```

Subpackages

cytoflowgui.workflow.operations package

cytoflowgui.workflow.operations

Submodules

cytoflowgui.workflow.operations.autofluorescence

class cytoflowgui.workflow.operations.autofluorescence.**AutofluorescenceWorkflowOp**

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.autofluorescence.AutofluorescenceOp`

default_view(**kwargs)

Returns a diagnostic plot to see if the autofluorescence estimation is working.

Returns An diagnostic view, call `AutofluorescenceDiagnosticView.plot` to see the diagnostic plots

Return type *IView*

estimate(*experiment*)

Estimate the autofluorescence from `blank_file` in channels specified in `channels`.

Parameters

- **experiment** (*Experiment*) – The experiment to which this operation is applied
- **subset** (*Str* (default = “”)) – An expression that specifies the events used to compute the autofluorescence

apply(*experiment*)

Applies the autofluorescence correction to channels in an experiment.

Parameters **experiment** (*Experiment*) – the experiment to which this op is applied

Returns

a new experiment with the autofluorescence median subtracted. The corrected channels have the following metadata added to them:

- **af_median** : Float The median of the non-fluorescent distribution
- **af_stdev** : Float The standard deviation of the non-fluorescent distribution

Return type *Experiment*

clear_estimate()

should_apply(*changed*, *payload*)

should_clear_estimate(*changed*, *payload*)

get_notebook_code(*idx*)

class cytoflowgui.workflow.operations.autofluorescence.**AutofluorescenceWorkflowView**

Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`, `cytoflow.operations.autofluorescence.AutofluorescenceDiagnosticView`

should_plot(*changed, payload*)

Should the owning WorkflowItem refresh the plot when certain things change? *changed* can be: - Changed.VIEW – the view’s parameters changed - Changed.RESULT – this WorkflowItem’s result changed - Changed.PREV_RESULT – the previous WorkflowItem’s result changed - Changed.ESTIMATE_RESULT – the results of calling “estimate” changed

If *should_plot* is called from a notification handler, the payload is the handler event parameter.

get_notebook_code(*idx*)

cytoflowgui.workflow.operations.bead_calibration

class cytoflowgui.workflow.operations.bead_calibration.**Unit**

Bases: `traits.has_traits.HasTraits`

class cytoflowgui.workflow.operations.bead_calibration.**BeadCalibrationWorkflowOp**

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.bead_calibration.BeadCalibrationOp`

default_view(***kwargs*)

Returns a diagnostic plot to see if the peak finding is working.

Returns An diagnostic view, call `BeadCalibrationDiagnostic.plot` to see the diagnostic plots

Return type `IView`

apply(*experiment*)

Applies the bleedthrough correction to an experiment.

Parameters *experiment* (`Experiment`) – the experiment to which this operation is applied

Returns

A new experiment with the specified channels calibrated in physical units. The calibrated channels also have new metadata:

- **bead_calibration_fn** [`Callable (pandas.Series -> pandas.Series)`] The function to calibrate raw data to bead units
- **bead_units** [`Str`] The units this channel was calibrated to

Return type `Experiment`

estimate(*experiment*)

Estimate the calibration coefficients from the beads file.

Parameters *experiment* (`Experiment`) – The experiment used to compute the calibration.

should_clear_estimate(*changed, payload*)

clear_estimate()

get_notebook_code(*idx*)

class cytoflowgui.workflow.operations.bead_calibration.**BeadCalibrationWorkflowView**

Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`, `cytoflow.operations.bead_calibration.BeadCalibrationDiagnostic`

should_plot(*changed, payload*)

Should the owning WorkflowItem refresh the plot when certain things change? *changed* can be: - Changed.VIEW – the view’s parameters changed - Changed.RESULT – this Work-

flowItem's result changed - Changed.PREV_RESULT – the previous WorkflowItem's result changed - Changed.ESTIMATE_RESULT – the results of calling “estimate” changed

If *should_plot* is called from a notification handler, the payload is the handler event parameter.

get_notebook_code(*idx*)

cytoflowgui.workflow.operations.binning

class cytoflowgui.workflow.operations.binning.**BinningWorkflowOp**

Bases: *cytoflowgui.workflow.operations.operation_base.WorkflowOperation*, *cytoflow.operations.binning.BinningOp*

default_view(***kwargs*)

Returns a diagnostic plot to check the binning.

Returns An view instance, call *plot()* to plot the bins.

Return type *IView*

clear_estimate()

get_notebook_code(*idx*)

class cytoflowgui.workflow.operations.binning.**BinningWorkflowView**

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.operations.binning.BinningView*

get_notebook_code(*idx*)

cytoflowgui.workflow.operations.bleedthrough_linear

class cytoflowgui.workflow.operations.bleedthrough_linear.**Control**

Bases: *traits.has_traits.HasTraits*

class cytoflowgui.workflow.operations.bleedthrough_linear.**BleedthroughLinearWorkflowOp**

Bases: *cytoflowgui.workflow.operations.operation_base.WorkflowOperation*, *cytoflow.operations.bleedthrough_linear.BleedthroughLinearOp*

default_view(***kwargs*)

Returns a diagnostic plot to make sure spillover estimation is working.

Returns An *IView*, call *BleedthroughLinearDiagnostic.plot* to see the diagnostic plots

Return type *IView*

estimate(*experiment*)

Estimate the bleedthrough from single-channel controls in *controls*

apply(*experiment*)

Applies the bleedthrough correction to an experiment.

Parameters *experiment* (*Experiment*) – The experiment to which this operation is applied

Returns

A new *Experiment* with the bleedthrough subtracted out. The corrected channels have the following metadata added:

- **linear_bleedthrough** : Dict(Str : Float) The values for spillover from other channels into this channel.

- **bleedthrough_channels** : List(Str) The channels that were used to correct this one.
- **bleedthrough_fn** : Callable (Tuple(Float) → Float) The function that will correct one event in this channel. Pass it the values specified in *controls* and it will return the corrected value for this channel.

Return type *Experiment*

should_clear_estimate(*changed, payload*)

clear_estimate()

get_notebook_code(*idx*)

class cytoflowgui.workflow.operations.bleedthrough_linear.**BleedthroughLinearWorkflowView**
 Bases: *cytoflowgui.workflow.views.view_base.WorkflowView*, *cytoflow.operations.bleedthrough_linear.BleedthroughLinearDiagnostic*

should_plot(*changed, payload*)

Should the owning WorkflowItem refresh the plot when certain things change? *changed* can be: - Changed.VIEW – the view’s parameters changed - Changed.RESULT – this WorkflowItem’s result changed - Changed.PREV_RESULT – the previous WorkflowItem’s result changed - Changed.ESTIMATE_RESULT – the results of calling “estimate” changed

If *should_plot* is called from a notification handler, the payload is the handler event parameter.

get_notebook_code(*idx*)

cytoflowgui.workflow.operations.channel_stat

cytoflowgui.workflow.operations.channel_stat.**mean_95ci**(*x*)

cytoflowgui.workflow.operations.channel_stat.**geomean_95ci**(*x*)

class cytoflowgui.workflow.operations.channel_stat.**ChannelStatisticWorkflowOp**
 Bases: *cytoflowgui.workflow.operations.operation_base.WorkflowOperation*, *cytoflow.operations.channel_stat.ChannelStatisticOp*

apply(*experiment*)

Apply the operation to an *Experiment*.

Parameters *experiment* – The *Experiment* to apply this operation to.

Returns A new *Experiment*, containing a new entry in *Experiment.statistics*. The key of the new entry is a tuple (name, function) (or (name, statistic_name) if *statistic_name* is set.

Return type *Experiment*

clear_estimate()

get_notebook_code(*idx*)

cytoflowgui.workflow.operations.color_translation**class** cytoflowgui.workflow.operations.color_translation.**Control**Bases: `traits.has_traits.HasTraits`**class** cytoflowgui.workflow.operations.color_translation.**ColorTranslationWorkflowOp**Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.color_translation.ColorTranslationOp`**default_view**(**kwargs)

Returns a diagnostic plot to see if the bleedthrough spline estimation is working.

Returns A diagnostic view, call `ColorTranslationDiagnostic.plot` to see the diagnostic plots**Return type** `IView`**estimate**(*experiment*)

Estimate the mapping from the two-channel controls

Parameters

- **experiment** (*Experiment*) – The *Experiment* used to check the voltages, etc. of the control tubes. Also the source of the operation history that is replayed on the control tubes.
- **subset** (*Str*) – A Python expression used to subset the controls before estimating the color translation parameters.

apply(*experiment*)

Applies the color translation to an experiment

Parameters **experiment** (*Experiment*) – the old_experiment to which this op is applied**Returns**

a new experiment with the color translation applied. The corrected channels also have the following new metadata:

channel_translation : `Str` Which channel was this one translated to?**channel_translation_fn** : `Callable (pandas.Series -> pandas.Series)` The function that translated this channel**Return type** *Experiment***should_clear_estimate**(*changed, payload*)**clear_estimate**()**get_notebook_code**(*idx*)**class** cytoflowgui.workflow.operations.color_translation.**ColorTranslationWorkflowView**Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`, `cytoflow.operations.color_translation.ColorTranslationDiagnostic`**should_plot**(*changed, payload*)Should the owning `WorkflowItem` refresh the plot when certain things change? `changed` can be: - `Changed.VIEW` – the view’s parameters changed - `Changed.RESULT` – this `WorkflowItem`’s result changed - `Changed.PREV_RESULT` – the previous `WorkflowItem`’s result changed - `Changed.ESTIMATE_RESULT` – the results of calling “estimate” changedIf `should_plot` is called from a notification handler, the payload is the handler event parameter.**get_notebook_code**(*idx*)

cytoflowgui.workflow.operations.density

class cytoflowgui.workflow.operations.density.DensityGateWorkflowOp

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.density.DensityGateOp`

default_view(**kwargs)

Returns a diagnostic plot of the Gaussian mixture model.

Returns a diagnostic view, call `DensityGateView.plot` to see the diagnostic plot.

Return type `IView`

clear_estimate()

apply(*experiment*)

Creates a new condition based on membership in the gate that was parameterized with *estimate*.

Parameters *experiment* (`Experiment`) – the `Experiment` to apply the gate to.

Returns a new `Experiment` with the new gate applied.

Return type `Experiment`

get_notebook_code(*idx*)

class cytoflowgui.workflow.operations.density.DensityGateWorkflowView

Bases: `cytoflowgui.workflow.views.view_base.WorkflowByView`, `cytoflow.operations.density.DensityGateView`

should_plot(*changed*, *payload*)

Should the owning `WorkflowItem` refresh the plot when certain things change? *changed* can be: - `Changed.VIEW` – the view’s parameters changed - `Changed.RESULT` – this `WorkflowItem`’s result changed - `Changed.PREV_RESULT` – the previous `WorkflowItem`’s result changed - `Changed.ESTIMATE_RESULT` – the results of calling “estimate” changed

If *should_plot* is called from a notification handler, the payload is the handler event parameter.

get_notebook_code(*idx*)

cytoflowgui.workflow.operations.flowpeaks

class cytoflowgui.workflow.operations.flowpeaks.FlowPeaksWorkflowOp

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.flowpeaks.FlowPeaksOp`

default_view(**kwargs)

Returns a diagnostic plot of the Gaussian mixture model.

Parameters

- **channels** (`List(Str)`) – Which channels to plot? Must be contain either one or two channels.
- **scale** (`List({'linear', 'log', 'logicle'})`) – How to scale the channels before plotting them
- **density** (`bool`) – Should we plot a scatterplot or the estimated density function?

Returns an `IView`, call `plot` to see the diagnostic plot.

Return type `IView`

estimate(*experiment*)

Estimate the k-means clusters, then hierarchically merge them.

Parameters

- **experiment** (*Experiment*) – The *Experiment* to use to estimate the k-means clusters
- **subset** (*str (default = None)*) – A Python expression that specifies a subset of the data in *experiment* to use to parameterize the operation.

apply(*experiment*)

Assign events to a cluster.

Assigns each event to one of the k-means centroids from *estimate*, then groups together events in the same cluster hierarchy.

Parameters *experiment* (*Experiment*) – the *Experiment* to apply the gate to.

Returns A new *Experiment* with the gate applied to it. TODO - document the extra statistics

Return type *Experiment*

clear_estimate()

get_notebook_code(*idx*)

class cytoflowgui.workflow.operations.flowpeaks.FlowPeaksWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowByView*, *cytoflow.operations.base_op_views.By2DView*

id = 'edu.mit.synbio.cytoflowgui.op_plugins.flowpeaks'

friendly_id = 'FlowPeaks'

plot(*experiment*, ***kwargs*)

A default *plot* that passes *current_plot* as the plot name.

get_notebook_code(*idx*)

cytoflowgui.workflow.operations.gaussian_1d

class cytoflowgui.workflow.operations.gaussian_1d.GaussianMixture1DWorkflowOp

Bases: *cytoflowgui.workflow.operations.operation_base.WorkflowOperation*, *cytoflow.operations.gaussian.GaussianMixtureOp*

estimate(*experiment*)

Estimate the Gaussian mixture model parameters

Parameters

- **experiment** (*Experiment*) – The data to use to estimate the mixture parameters
- **subset** (*str (default = None)*) – If set, a Python expression to determine the subset of the data to use to in the estimation.

apply(*experiment*)

Assigns new metadata to events using the mixture model estimated in *estimate*.

Returns

A new *Experiment* with the new condition variables as described in the class documentation. Also adds the following new statistics:

- **mean** [Float] the mean of the fitted gaussian in each channel for each component.
- **sigma** [(Float, Float)] the locations the mean +/- one standard deviation in each channel for each component.

- **correlation** [Float] the correlation coefficient between each pair of channels for each component.
- **proportion** [Float] the proportion of events in each component of the mixture model. only added if `num_components > 1`.

Return type *Experiment*

default_view(**kwargs)

Returns a diagnostic plot of the Gaussian mixture model.

Returns An *IView*, call `plot` to see the diagnostic plot.

Return type *IView*

clear_estimate()

get_notebook_code(idx)

class cytoflowgui.workflow.operations.gaussian_1d.**GaussianMixture1DWorkflowView**

Bases: `cytoflowgui.workflow.views.view_base.WorkflowByView`, `cytoflow.operations.gaussian.GaussianMixture1DView`

plot(experiment, **kwargs)

A default `plot` that passes `current_plot` as the plot name.

get_notebook_code(idx)

cytoflowgui.workflow.operations.gaussian_2d

class cytoflowgui.workflow.operations.gaussian_2d.**GaussianMixture2DWorkflowOp**

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.gaussian.GaussianMixtureOp`

default_view(**kwargs)

Returns a diagnostic plot of the Gaussian mixture model.

Returns An *IView*, call `plot` to see the diagnostic plot.

Return type *IView*

estimate(experiment)

Estimate the Gaussian mixture model parameters

Parameters

- **experiment** (*Experiment*) – The data to use to estimate the mixture parameters
- **subset** (*str (default = None)*) – If set, a Python expression to determine the subset of the data to use to in the estimation.

apply(experiment)

Assigns new metadata to events using the mixture model estimated in `estimate`.

Returns

A new *Experiment* with the new condition variables as described in the class documentation. Also adds the following new statistics:

- **mean** [Float] the mean of the fitted gaussian in each channel for each component.
- **sigma** [(Float, Float)] the locations the mean +/- one standard deviation in each channel for each component.

- **correlation** [Float] the correlation coefficient between each pair of channels for each component.
- **proportion** [Float] the proportion of events in each component of the mixture model. only added if `num_components > 1`.

Return type *Experiment*

`clear_estimate()`

`get_notebook_code(idx)`

class `cytoflowgui.workflow.operations.gaussian_2d.GaussianMixture2DWorkflowView`
 Bases: `cytoflowgui.workflow.views.view_base.WorkflowByView`, `cytoflow.operations.gaussian.GaussianMixture2DView`

`plot(experiment, **kwargs)`

A default `plot` that passes `current_plot` as the plot name.

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.import_op

class `cytoflowgui.workflow.operations.import_op.ValidPythonIdentifier` (*default_value=<traits.trait_type.NoDefaultObject>, **metadata*)

Bases: `traits.trait_types.BaseCStr`

info_text = 'a valid python identifier'

A description of the type of value this trait accepts:

validate(*obj, name, value*)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

class `cytoflowgui.workflow.operations.import_op.Channel`

Bases: `traits.has_traits.HasTraits`

class `cytoflowgui.workflow.operations.import_op.ImportWorkflowOp`

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.import_op.ImportOp`

`reset_channels()`

`estimate()`

`apply(*args, **kwargs)`

Load a new *Experiment*.

Parameters

- **experiment** (*Experiment*) – Ignored
- **metadata_only** (*bool (default = False)*) – Only “import” the metadata, creating an Experiment with all the expected metadata and structure but 0 events.

Returns

The new *Experiment*. New channels have the following metadata:

- **voltage - int** The voltage that this channel was collected at. Determined by the \$PnV field from the first FCS file.

- **range - int** The maximum range of this channel. Determined by the \$PnR field from the first FCS file.

New experimental conditions do not have **voltage** or **range** metadata, obviously. Instead, they have **experiment** set to True, to distinguish the experimental variables from the conditions that were added by gates, etc.

If *ignore_v* is set, it is added as a key to the *Experiment*-wide metadata.

Return type *Experiment*

`clear_estimate()`

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.kmeans

class `cytoflowgui.workflow.operations.kmeans.KMeansWorkflowOp`

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflowgui.workflow.operations.kmeans.KMeansOp`

default_view(**kwargs)

Returns a diagnostic plot of the k-means clustering.

Returns *IView*

Return type an *IView*, call `KMeans1DView.plot` to see the diagnostic plot.

estimate(*experiment*)

Estimate the k-means clusters

Parameters

- **experiment** (*Experiment*) – The *Experiment* to use to estimate the k-means clusters
- **subset** (*str* (default = None)) – A Python expression that specifies a subset of the data in *experiment* to use to parameterize the operation.

apply(*experiment*)

Apply the *KMeans* clustering to the data.

Returns

a new *Experiment* with one additional entry in *Experiment.conditions* named *name*, of type category. The new category has values *name_1*, *name_2*, etc to indicate which k-means cluster an event is a member of.

The new *Experiment* also has one new statistic called *centers*, which is a list of tuples encoding the centroids of each k-means cluster.

Return type *Experiment*

`clear_estimate()`

`get_notebook_code(idx)`

class `cytoflowgui.workflow.operations.kmeans.KMeansWorkflowView`

Bases: `cytoflowgui.workflow.views.view_base.WorkflowByView`

`id = 'edu.mit.synbio.cytoflowgui.op_plugins.kmeans'`

`friendly_id = 'KMeans'`

`plot(experiment, **kwargs)`
 A default `plot` that passes `current_plot` as the plot name.

`enum_plots(experiment)`

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.operation_base

```
class cytoflowgui.workflow.operations.operation_base.IWorkflowOperation(adaptee,
                                                                       default=<class
                                                                       'traits.adaptation.adaptation_error.Adap
```

Bases: `cytoflow.operations.i_operation.IOperation`

An interface that extends a `cytoflow` operation with functions required for GUI support.

In addition to implementing the interface below, another common thing to do in the derived class is to override traits of the underlying class in order to add metadata that controls their handling by the workflow. Currently, relevant metadata include:

- **apply** - This trait is used by the operations `apply` method.
- **estimate** - This trait is used by the operation's `estimate` method.
- **estimate_result** - This trait is set as a result of calling `estimate`.
- **status** - Holds status variables like the number of events from the `ImportOp`.
- **transient** - A temporary variable (not copied between processes or serialized).

do_estimate

Firing this event causes the operation's `estimate` method to be called.

Type Event

changed

Used to transmit status information back from the operation to the workflow. Set its value to the name of the trait that was changed

Type Event

should_apply(changed, payload)

Should the owning `WorkflowItem` apply this operation when certain things change? `changed` can be:

- `Changed.APPLY` – the parameters required to run `apply()` changed
- `Changed.PREV_RESULT` – the previous `WorkflowItem`'s result changed
- `Changed.ESTIMATE_RESULT` – the results of calling “estimate” changed

If `should_apply` is called from a notification handler, then `payload` is the event object from the notification handler.

should_clear_estimate(changed, payload)

Should the owning `WorkflowItem` clear the estimated model by calling `op.clear_estimate()`? `changed` can be:

- `Changed.ESTIMATE` – the parameters required to call `estimate` (ie traits with `estimate = True` metadata) have changed
- `Changed.PREV_RESULT` – the previous `WorkflowItem`'s result changed

If `should_clear_estimate` is called from a notification handler, then `payload` is the event object.

`clear_estimate()`

Clear whatever variables hold the results of calling `estimate()`

`get_notebook_code(idx)`

Return Python code suitable for a Jupyter notebook cell that runs this operation.

Parameters `idx` (*integer*) – The index of the *WorkflowItem* that holds this operation.

Returns The Python code that calls this module.

Return type string

`class cytoflowgui.workflow.operations.operation_base.WorkflowOperation`

Bases: `traits.has_traits.HasStrictTraits`

A default implementation of *IWorkflowOperation*

`should_apply(changed, payload)`

`should_clear_estimate(changed, payload)`

`clear_estimate()`

`get_notebook_code(idx)`

`cytoflowgui.workflow.operations.pca`

`class cytoflowgui.workflow.operations.pca.Channel`

Bases: `traits.has_traits.HasTraits`

`class cytoflowgui.workflow.operations.pca.PCAWorkflowOp`

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.pca.PCAOp`

`estimate(experiment)`

Estimate the decomposition

Parameters

- **experiment** (*Experiment*) – The *Experiment* to use to estimate the k-means clusters
- **subset** (*str (default = None)*) – A Python expression that specifies a subset of the data in `experiment` to use to parameterize the operation.

`apply(experiment)`

Apply the PCA decomposition to the data.

Returns a new *Experiment* with additional *Experiment.channels* named `name_1 ... name_n`

Return type *Experiment*

`clear_estimate()`

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.polygon

class cytoflowgui.workflow.operations.polygon.PolygonSelectionView

Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`, `cytoflow.operations.polygon.ScatterplotPolygonSelectionView`

`clear_estimate()`

`get_notebook_code(idx)`

class cytoflowgui.workflow.operations.polygon.PolygonWorkflowOp

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.polygon.PolygonOp`

`default_view(**kwargs)`

Returns an *IView* that allows a user to view the polygon or interactively draw it.

Parameters `density` (*bool*, *default = False*) – If `True`, return a density plot instead of a scatter-plot.

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.quad

class cytoflowgui.workflow.operations.quad.QuadSelectionView

Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`, `cytoflow.operations.quad.ScatterplotQuadSelectionView`

`clear_estimate()`

`get_notebook_code(idx)`

class cytoflowgui.workflow.operations.quad.QuadWorkflowOp

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.quad.QuadOp`

`default_view(**kwargs)`

Returns an *IView* that allows a user to view the quad selector or interactively draw it.

Parameters `density` (*bool*, *default = False*) – If `True`, return a density plot instead of a scatter-plot.

`clear_estimate()`

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.range

class cytoflowgui.workflow.operations.range.RangeSelectionView

Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`, `cytoflow.operations.range.RangeSelection`

`clear_estimate()`

`get_notebook_code(idx)`

class cytoflowgui.workflow.operations.range.RangeWorkflowOp

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.range.RangeOp`

`default_view(**kwargs)`

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.range2d

`class cytoflowgui.workflow.operations.range2d.Range2DSelectionView`

Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`, `cytoflow.operations.range2d.ScatterplotRangeSelection2DView`

`clear_estimate()`

`get_notebook_code(idx)`

`class cytoflowgui.workflow.operations.range2d.Range2DWorkflowOp`

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.range2d.Range2DOp`

`default_view(**kwargs)`

Returns an `IView` that allows a user to view the selection or interactively draw it.

Parameters `density` (*bool*, *default = False*) – If `True`, return a density plot instead of a scatter-plot.

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.ratio

`class cytoflowgui.workflow.operations.ratio.RatioWorkflowOp`

Bases: `cytoflowgui.workflow.operations.operation_base.WorkflowOperation`, `cytoflow.operations.ratio.RatioOp`

`clear_estimate()`

`get_notebook_code(idx)`

cytoflowgui.workflow.operations.tasbe

`class cytoflowgui.workflow.operations.tasbe.BleedthroughControl`

Bases: `traits.has_traits.HasTraits`

`class cytoflowgui.workflow.operations.tasbe.TranslationControl`

Bases: `traits.has_traits.HasTraits`

`class cytoflowgui.workflow.operations.tasbe.BeadUnit`

Bases: `traits.has_traits.HasTraits`

`class cytoflowgui.workflow.operations.tasbe.Progress`

Bases: `object`

`NO_MODEL = 'No model estimated'`

`AUTOFLUORESCENCE = 'Estimating autofluorescence'`

`BLEEDTHROUGH = 'Estimating bleedthrough'`

`BEAD_CALIBRATION = 'Estimating bead calibration'`

`COLOR_TRANSLATION = 'Estimating color translation'`

```
VALID = 'Valid model estimated!'
```

```
class cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOp
```

```
    Bases: cytoflowgui.workflow.operations.operation_base.WorkflowOperation
```

```
    estimate(experiment, subset=None)
```

```
    should_clear_estimate(changed, payload)
```

```
    clear_estimate()
```

```
    apply(experiment)
```

```
    default_view(**kwargs)
```

```
    get_notebook_code(idx)
```

```
class cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView
```

```
    Bases: cytoflowgui.workflow.views.view_base.WorkflowView
```

```
    id = 'edu.mit.synbio.cytoflowgui.workflow.operations.tasbeview'
```

```
    friendly_id = 'TASBE Calibration'
```

```
    enum_plots(experiment)
```

```
    should_plot(changed, payload)
```

Should the owning WorkflowItem refresh the plot when certain things change? `changed` can be: - `Changed.VIEW` – the view’s parameters changed - `Changed.RESULT` – this WorkflowItem’s result changed - `Changed.PREV_RESULT` – the previous WorkflowItem’s result changed - `Changed.ESTIMATE_RESULT` – the results of calling “estimate” changed

If `should_plot` is called from a notification handler, the payload is the handler event parameter.

```
    plot(experiment, **kwargs)
```

```
    get_notebook_code(idx)
```

cytoflowgui.workflow.operations.threshold

```
class cytoflowgui.workflow.operations.threshold.ThresholdSelectionView
```

```
    Bases: cytoflowgui.workflow.views.view_base.WorkflowView, cytoflow.operations.threshold.ThresholdSelection
```

```
    get_notebook_code(idx)
```

```
class cytoflowgui.workflow.operations.threshold.ThresholdWorkflowOp
```

```
    Bases: cytoflowgui.workflow.operations.operation_base.WorkflowOperation, cytoflow.operations.threshold.ThresholdOp
```

```
    default_view(**kwargs)
```

```
    clear_estimate()
```

```
    get_notebook_code(idx)
```

cytoflowgui.workflow.operations.xform_stat

cytoflowgui.workflow.operations.xform_stat.mean_95ci(x)

cytoflowgui.workflow.operations.xform_stat.geomean_95ci(x)

class cytoflowgui.workflow.operations.xform_stat.TransformStatisticWorkflowOp

Bases: [cytoflowgui.workflow.operations.operation_base.WorkflowOperation](#), [cytoflow.operations.xform_stat.TransformStatisticOp](#)

apply(*experiment*)

Applies *function* to a statistic.

Parameters *experiment* (*Experiment*) – The *Experiment* to apply the operation to

Returns The same as the old experiment, but with a new statistic that results from applying *function* to the statistic specified in *statistic*.

Return type *Experiment*

clear_estimate()

get_notebook_code(*idx*)

cytoflowgui.workflow.views package

cytoflowgui.workflow.views

Submodules

cytoflowgui.workflow.views.bar_chart

class cytoflowgui.workflow.views.bar_chart.BarChartPlotParams

Bases: [cytoflowgui.workflow.views.view_base.Stats1DPlotParams](#)

class cytoflowgui.workflow.views.bar_chart.BarChartWorkflowView

Bases: [cytoflowgui.workflow.views.view_base.WorkflowByView](#), [cytoflow.views.bar_chart.BarChartView](#)

get_notebook_code(*idx*)

cytoflowgui.workflow.views.density

class cytoflowgui.workflow.views.density.DensityPlotParams

Bases: [cytoflowgui.workflow.views.view_base.Data2DPlotParams](#)

class cytoflowgui.workflow.views.density.DensityWorkflowView

Bases: [cytoflowgui.workflow.views.view_base.WorkflowFacetView](#), [cytoflow.views.densityplot.DensityView](#)

get_notebook_code(*idx*)

cytoflowgui.workflow.views.export_fcs

class cytoflowgui.workflow.views.export_fcs.**ExportFCSWorkflowView**

Bases: *cytoflowgui.workflow.views.view_base.WorkflowView*, *cytoflow.views.export_fcs.ExportFCS*

enum_conditions_and_files(*experiment*)

Return an iterator over the conditions and file names that this export will produce from a given experiment.

Parameters *experiment* (*Experiment*) – The *Experiment* to export

plot(*experiment*, *plot_name=None*, ***kwargs*)

Plot a table of the conditions, filenames, and number of events

get_notebook_code(*idx*)

cytoflowgui.workflow.views.histogram

class cytoflowgui.workflow.views.histogram.**HistogramPlotParams**

Bases: *cytoflowgui.workflow.views.view_base.Data1DPlotParams*

class cytoflowgui.workflow.views.histogram.**HistogramWorkflowView**

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.views.histogram.HistogramView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.histogram_2d

class cytoflowgui.workflow.views.histogram_2d.**Histogram2DPlotParams**

Bases: *cytoflowgui.workflow.views.view_base.Data2DPlotParams*

class cytoflowgui.workflow.views.histogram_2d.**Histogram2DWorkflowView**

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.views.histogram_2d.Histogram2DView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.kde_1d

class cytoflowgui.workflow.views.kde_1d.**Kde1DPlotParams**

Bases: *cytoflowgui.workflow.views.view_base.Data1DPlotParams*

class cytoflowgui.workflow.views.kde_1d.**Kde1DWorkflowView**

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.views.kde_1d.Kde1DView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.kde_2d

class cytoflowgui.workflow.views.kde_2d.Kde2DPlotParams

Bases: *cytoflowgui.workflow.views.view_base.Data2DPlotParams*

class cytoflowgui.workflow.views.kde_2d.Kde2DWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.views.kde_2d.Kde2DView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.parallel_coords

class cytoflowgui.workflow.views.parallel_coords.ParallelCoordinatesPlotParams

Bases: *cytoflowgui.workflow.views.view_base.DataPlotParams*

class cytoflowgui.workflow.views.parallel_coords.ParallelCoordinatesWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.views.parallel_coords.ParallelCoordinatesView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.radviz

class cytoflowgui.workflow.views.radviz.RadvizPlotParams

Bases: *cytoflowgui.workflow.views.view_base.DataPlotParams*

class cytoflowgui.workflow.views.radviz.Channel

Bases: *traits.has_traits.HasTraits*

class cytoflowgui.workflow.views.radviz.RadvizWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.views.radviz.RadvizView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.scatterplot

class cytoflowgui.workflow.views.scatterplot.ScatterplotPlotParams

Bases: *cytoflowgui.workflow.views.view_base.Data2DPlotParams*

class cytoflowgui.workflow.views.scatterplot.ScatterplotWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowFacetView*, *cytoflow.views.scatterplot.ScatterplotView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.stats_1d

class cytoflowgui.workflow.views.stats_1d.Stats1DPlotParams

Bases: *cytoflowgui.workflow.views.view_base.Stats1DPlotParams*

class cytoflowgui.workflow.views.stats_1d.Stats1DWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowByView*, *cytoflow.views.stats_1d.Stats1DView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.stats_2d

class cytoflowgui.workflow.views.stats_2d.Stats2DPlotParams

Bases: *cytoflowgui.workflow.views.view_base.Stats2DPlotParams*

class cytoflowgui.workflow.views.stats_2d.Stats2DWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowByView*, *cytoflow.views.stats_2d.Stats2DView*

get_notebook_code(*idx*)

cytoflowgui.workflow.views.table

class cytoflowgui.workflow.views.table.TableWorkflowView

Bases: *cytoflowgui.workflow.views.view_base.WorkflowByView*, *cytoflow.views.table.TableView*

plot(*experiment*, ***kwargs*)

A default *plot* that passes *current_plot* as the plot name.

get_notebook_code(*idx*)

cytoflowgui.workflow.views.view_base

class cytoflowgui.workflow.views.view_base.IterWrapper(*iterator*, *by*)

Bases: *object*

class cytoflowgui.workflow.views.view_base.IWorkflowView(*adaptee*, *default=<class*

'traits.adaptation.adaptation_error.AdaptationError'>)

Bases: *cytoflow.views.i_view.IView*

An interface that extends a *cytoflow* view with functions required for GUI support.

In addition to implementing the interface below, another common thing to do in the derived class is to override traits of the underlying class in order to add metadata that controls their handling by the workflow. Currently, relevant metadata include:

- **status** - Holds status variables – only sent from the remote process to the local one, and doesn't re-plot the view. Example: the possible plot names.
- **transient** - A temporary variable (not copied between processes or serialized).

TODO - finish this docstring (plotfacet, plot_params, etc)

changed

Used to transmit status information back from the operation to the workflow. Set its value to the name of the trait that was changed

Type Event

should_plot(*changed, payload*)

Should the owning WorkflowItem refresh the plot when certain things change? *changed* can be: - Changed.VIEW – the view’s parameters changed - Changed.RESULT – this WorkflowItem’s result changed - Changed.PREV_RESULT – the previous WorkflowItem’s result changed - Changed.ESTIMATE_RESULT – the results of calling “estimate” changed

If *should_plot* was called from an event handler, the event is passed in as payload

get_notebook_code(*idx*)

Return Python code suitable for a Jupyter notebook cell that plots this view.

Parameters *idx* (*integer*) – The index of the *WorkflowItem* that holds this view.

Returns The Python code that calls this module.

Return type string

class cytoflowgui.workflow.views.view_base.**WorkflowView**

Bases: `traits.has_traits.HasStrictTraits`

Default implementation of IWorkflowView.

Make sure this class is FIRST in the derived class’s declaration so it shows up earlier in the MRO than the base class from the *cytoflow* module.

current_plot

Passed as the *current_plot* keyword to the underlying *IView.plot*

Type Any

enum_plots(*experiment*)

should_plot(*changed, payload*)

Should the owning WorkflowItem refresh the plot when certain things change? *changed* can be: - Changed.VIEW – the view’s parameters changed - Changed.RESULT – this WorkflowItem’s result changed - Changed.PREV_RESULT – the previous WorkflowItem’s result changed - Changed.ESTIMATE_RESULT – the results of calling “estimate” changed

If *should_plot* is called from a notification handler, the payload is the handler event parameter.

get_notebook_code(*idx*)

class cytoflowgui.workflow.views.view_base.**WorkflowFacetView**

Bases: `cytoflowgui.workflow.views.view_base.WorkflowView`

A *WorkflowView* that subsets the data by a facet before plotting.

plotfacet

What facet should *current_plot* refer to?

Type Str

enum_plots(*experiment*)

plot(*experiment, **kwargs*)

A default *plot* that subsets by the *plotfacet* and *current_plot*. If you need it to do something else, you must override this method!

```
class cytoflowgui.workflow.views.view_base.WorkflowByView
    Bases: cytoflowgui.workflow.views.view_base.WorkflowView
```

```
plot(experiment, **kwargs)
    A default plot that passes current_plot as the plot name.
```

```
enum_plots(experiment)
```

```
class cytoflowgui.workflow.views.view_base.BasePlotParams
    Bases: traits.has_traits.HasStrictTraits
```

```
class cytoflowgui.workflow.views.view_base.DataPlotParams
    Bases: cytoflowgui.workflow.views.view_base.BasePlotParams
```

```
class cytoflowgui.workflow.views.view_base.Data1DPlotParams
    Bases: cytoflowgui.workflow.views.view_base.DataPlotParams
```

```
class cytoflowgui.workflow.views.view_base.Data2DPlotParams
    Bases: cytoflowgui.workflow.views.view_base.DataPlotParams
```

```
class cytoflowgui.workflow.views.view_base.Stats1DPlotParams
    Bases: cytoflowgui.workflow.views.view_base.BasePlotParams
```

```
class cytoflowgui.workflow.views.view_base.Stats2DPlotParams
    Bases: cytoflowgui.workflow.views.view_base.BasePlotParams
```

```
class cytoflowgui.workflow.views.view_base.Channel
    Bases: traits.has_traits.HasStrictTraits
```

cytoflowgui.workflow.views.violin

```
class cytoflowgui.workflow.views.violin.ViolinPlotParams
    Bases: cytoflowgui.workflow.views.view_base.Data1DPlotParams
```

```
class cytoflowgui.workflow.views.violin.ViolinPlotWorkflowView
    Bases: cytoflowgui.workflow.views.view_base.WorkflowFacetView, cytoflow.views.violin.ViolinPlotView
```

```
get_notebook_code(idx)
```

Submodules

cytoflowgui.workflow.serialization

Utility bits that let us use `camel` to serialize a `RemoteWorkflow`.

Many of the dumpers and loaders support serializing `pandas` types, such as `pandas.Series` and `pandas.DataFrame`, or for testing serialization with unit tests.

```
cytoflowgui.workflow.serialization.load_yaml(path)
```

Load a Python object from a YAML file.

Parameters `path` (*string*) – The path to the YAML file to load

Returns The Python object loaded from the YAML file

Return type `object`

```
cytoflowgui.workflow.serialization.save_yaml(data, path, lock_versions={})
```

Save a Python object to a YAML file

Parameters

- **data** (*object*) – The Python object to serialize
- **path** (*string*) – The path to save to
- **lock_versions** (*dict*) – A dictionary of types and versions of dumpers to use when serializing.

`cytoflowgui.workflow.serialization.traits_eq(self, other)`
 Are the copyable traits of two `traits.has_traits.HasTraits` equal?

`cytoflowgui.workflow.serialization.traits_hash(self)`
 Get a unique hash of a `traits.has_traits.HasTraits`

`cytoflowgui.workflow.serialization.traits_repr(obj)`
 A uniform implementation of `__repr__` for `traits.has_traits.HasTraits`

`cytoflowgui.workflow.serialization.traits_str(obj)`
 A uniform implementation of `__str__` for `traits.has_traits.HasTraits`

`cytoflowgui.workflow.subset`

Structured representation of the possible clauses for a **subset** argument to `IOperation.estimate` or `IView.plot`.

ISubset - The top-level `traits.has_traits.Interface`

BoolSubset - represents a subset of True or False values from a boolean condition

CategorySubset - represents a subset of one or more values from a categorical condition.

RangeSubset - represents a subset that is a range of values from a numerical condition.

class `cytoflowgui.workflow.subset.ISubset` (*adaptee, default=<class 'traits.adaptation.adaptation_error.AdaptationError'>*)

Bases: `traits.has_traits.Interface`

The interface that the rest of the subset classes must implement.

class `cytoflowgui.workflow.subset.BoolSubset`

Bases: `traits.has_traits.HasStrictTraits`

A subset that selects either True or False values from a boolean condition

class `cytoflowgui.workflow.subset.CategorySubset`

Bases: `traits.has_traits.HasStrictTraits`

A subset that selects one or more values from a categorical condition

class `cytoflowgui.workflow.subset.RangeSubset`

Bases: `traits.has_traits.HasStrictTraits`

A subset that selects a range from a numerical condition

cytoflowgui.workflow.workflow

The main model for the GUI.

At its core, the model is a list of *WorkflowItem* instances. A *WorkflowItem* wraps an operation, its completion status, the result of applying it to the previous *WorkflowItem*'s result, and *IView*'s on that result. The Workflow also maintains a "current" or selected *WorkflowItem*.

The left panel of the GUI is a View on this object (viewing the list of *WorkflowItem* instances), and the right panel of the GUI is a View of the selected *WorkflowItem*'s current view.

So far, so simple. However, in a single-threaded GUI application, the UI freezes when something processor-intensive is happening. Adding another thread doesn't help matters because of the CPython global interpreter lock; while Python is otherwise computing, the GUI doesn't update. To solve this, the Workflow maintains a copy of itself in a separate process. The *LocalWorkflow* is the one that is viewed by the GUI; the *RemoteWorkflow* is the one that actually loads the data and does the processing. Thus the GUI remains responsive. Changed attributes in either Workflow are noticed by a set of Traits handlers, which send those changes to the other process.

This process is also where the plotting happens. For an explanation of how the plots are ferried back to the GUI, see the module docstring for *cytoflowgui.matplotlib_backend_local* and *cytoflowgui.matplotlib_backend_remote*

class cytoflowgui.workflow.workflow.Msg

Bases: *object*

Messages passed between the local and remote workflows

NEW_WORKFLOW = 'NEW_WORKFLOW'

ADD_ITEMS = 'ADD_ITEMS'

REMOVE_ITEMS = 'REMOVE_ITEMS'

SELECT = 'SELECT'

UPDATE_OP = 'UPDATE_OP'

UPDATE_VIEW = 'UPDATE_VIEW'

CHANGE_CURRENT_VIEW = 'CHANGE_CURRENT_VIEW'

CHANGE_CURRENT_PLOT = 'CHANGE_CURRENT_PLOT'

UPDATE_WI = 'UPDATE_WI'

ESTIMATE = 'ESTIMATE'

APPLY_CALLED = 'APPLY_CALLED'

PLOT_CALLED = 'PLOT_CALLED'

EVAL = 'EVAL'

EXEC = 'EXEC'

RUN_ALL = 'RUN_ALL'

SHUTDOWN = 'SHUTDOWN'

class cytoflowgui.workflow.workflow.UniquePriorityQueue(*maxsize=0*)

Bases: *queue.PriorityQueue*

A *PriorityQueue* that only allows one copy of each item. <http://stackoverflow.com/questions/5997189/how-can-i-make-a-unique-value-priority-queue-in-python>

`cytoflowgui.workflow.workflow.filter_unpicklable(obj)`

Recursively filter unpicklable items from lists and dictionaries

class `cytoflowgui.workflow.workflow.LocalWorkflow(remote_workflow_connection, **kwargs)`

Bases: `traits.has_traits.HasStrictTraits`

The workflow that is maintained in the “local” process – ie, the same one that showing a GUI.

workflow

The list of `WorkflowItems`

selected

The currently-selected `WorkflowItem`

modified

Has this workflow been modified since it was loaded?

message_q

The `queue.Queue` of messages to send to the remote process

recv_thread

The `threading.Thread` that receives messages from the remote process

send_thread

The `threading.Thread` that sends messages to the remote process

recv_main(child_conn)

The method that runs in `recv_thread` to receive messages from the remote process.

send_main(child_conn)

The method that runs in `send_thread` to send messages from `message_q` to the remote process

run_all()

Send the RUN_ALL message to the remote process

remote_eval(expr)

Evaluate an expression in the remote process and return the result

remote_exec(expr)

Execute an expression in the remote process and wait until it completes

wi_sync(wi, variable, value, timeout=30)

Set `WorkflowItem.status` on the remote workflow, then wait for it to propagate here.

wi_waitfor(wi, variable, value, timeout=30)

Waits a configurable amount of time for wi’s status to change to status

shutdown_remote_process(remote_process)

Shut down the remote process

class `cytoflowgui.workflow.workflow.RemoteWorkflow`

Bases: `traits.has_traits.HasStrictTraits`

The workflow that is maintained in the “remote” process – ie, the one that actually does the processing.

workflow

The list of `WorkflowItem`’s

selected

The currently-selected `WorkflowItem`

last_view_plotted

The last `IWorkflowView` that was plotted

send_thread

The `threading.Thread` that sends messages to the local process

recv_thread

The `threading.Thread` that receives messages from the local process

message_q

The `queue.Queue` of messages to send to the local process

matplotlib_events

`threading.Event` to synchronize matplotlib plotting across process boundaries

plot_lock

`threading.Lock` to synchronize matplotlib plotting across process boundaries

run(*parent_workflow_conn*, *parent_mpl_conn=None*)

The method that runs the main loop of the remote process

recv_main(*parent_conn*)

The method that runs in the `recv_thread` to receive messages from the local process.

send_main(*parent_conn*)

The method that runs in `send_thread` to send messages to the local process.

shutdown()

Shut down the remote process

cytoflowgui.workflow.workflow_item

Represents one step in an analysis pipeline. Wraps a single *IOperation* and any *IView* of its result.

class `cytoflowgui.workflow.workflow_item.WorkflowItem`

Bases: `traits.has_traits.HasStrictTraits`

The basic unit of a Workflow: wraps an operation and a list of views. This class is serialized and synchronized between the *LocalWorkflow* and the *RemoteWorkflow*.

Notes

Because we serialize instances of this, we have to pay careful attention to which traits are transient (and aren't serialized). Additionally, traits marked as `status` are only serialized remote → local. For more details about the synchronization, see the module docstring for `cytoflowgui.workflow`

friendly_id

The operation's id

name

The operation's name

operation

The operation that this *WorkflowItem* wraps

views

The *IView*'s associated with this operation

current_view

The currently selected view

result

The *Experiment* that is the result of applying *operation* to the *previous_wi*'s *result*

channels

The channels from *result*

conditions

The conditions from *result*

metadata

The metadata from *result*

statistics

The statistics from *result*

default_view

The default view for this workflow item (if any)

previous_wi

The previous *WorkflowItem* in the workflow

next_wi

The next *WorkflowItem* in the workflow

workflow

The *LocalWorkflow* or *RemoteWorkflow* that this *WorkflowItem* is a part of

status

This *WorkflowItem*'s status

op_error

Errors from *operation*'s *IOperation.apply* method

op_error_trait

The trait that caused the error in *op_error*

op_warning

Warnings from *operation*'s *IOperation.apply* method

op_warning_trait

The trait that caused the warning in *op_warning*

estimate_error

Errors from *operation*'s *IOperation.estimate* method

estimate_warning

Warnings from *operation*'s *IOperation.estimate* method

view_error

Errors from the most recently plotted view's *IView.plot* method

view_error_trait

The trait that caused the error in *view_error*

view_warning

Warnings from the most recently plotted view's *IView.plot* method

view_warning_trait

The trait that caused the warning in *view_warning*

plot_names

The possible values for the **plot_name** parameter of *current_view*'s *IView.plot* method. Retrieved from that view's **enum_plots()** method and updated automatically when *result* or *current_view* changes.

plot_names_label

The GUI label for the element that allows users to select a plot name from *plot_names*. Updated automatically when *result* or *current_view* changes.

matplotlib_events

threading.Event to synchronize matplotlib plotting across process boundaries

plot_lock

threading.Lock to synchronize matplotlib plotting across process boundaries

lock

threading.Lock for updating this *WorkflowItem*'s traits

edit_traits(*view=None, parent=None, kind=None, context=None, handler=None, id="", scrollable=None, **args*)

Override the base *traits.has_traits.HasTraits.edit_traits* to make it go looking for views in the handler.

trait_view(*name=None, view_element=None, handler=None*)

Gets or sets a *ViewElement* associated with an object's class.

If both *name* and *view_element* are specified, the view element is associated with *name* for the current object's class. (That is, *view_element* is added to the *ViewElements* object associated with the current object's class, indexed by *name*.)

If only *name* is specified, the function returns the view element object associated with *name*, or *None* if *name* has no associated view element. View elements retrieved by this function are those that are bound to a class attribute in the class definition, or that are associated with a name by a previous call to this method.

If neither *name* nor *view_element* is specified, the method returns a *View* object, based on the following order of preference:

1. If there is a *View* object named *traits_view* associated with the current object, it is returned.
2. If there is exactly one *View* object associated the current object, it is returned.
3. Otherwise, it returns a *View* object containing items for all the non-event trait attributes on the current object.

Parameters

- **name** (*str*) – Name of a view element
- **view_element** (*ViewElement*) – View element to associate

Return type A view element.

estimate()

Call *operation*'s *IOperation.estimate*

apply()

Calls *operation*'s *IOperation.apply*; applies this *WorkflowItem*'s operation to *previous_wi*'s result

plot()

Call *current_view*'s *IView.plot* on *result*, or on *previous_wi*'s *result* if there's no current *result*.

Submodules

cytoflowgui.cytoflow_application

The `pyface.tasks` application.

CytoflowApplication – the `pyface.tasks.tasks_application.TasksApplication` class for the *cytoflow* Qt GUI

`cytoflowgui.cytoflow_application.gui_handler_callback(msg, app)`

class `cytoflowgui.cytoflow_application.CytoflowApplication(plugins=None, **traits)`

Bases: `envisage.ui.tasks.tasks_application.TasksApplication`

The cytoflow Tasks application

id

The application's GUID

name

The application's user-visible name.

default_layout

The default window-level layout for the application.

always_use_default_layout

Restore the previous application-level layout?

dpi

The application's DPI

debug

Are we debugging?

filename

Filename from the command-line, if present

application_error

If there's an ERROR-level log message, drop it here

application_log

Keep the application log in memory

model

The model that's shared across both tasks

controller

The *WorkflowController*, shared across both tasks

remote_process

The `multiprocessing.Process` containing the remote workflow

remote_workflow_connection

The `multiprocessing.Pipe` to communicate with the remote process

remote_canvas_connection

The `multiprocessing.Pipe` to communicate with the remote `matplotlib` canvas, `FigureCanvasAggRemote``.

canvas

The shared `matplotlib` canvas

run()
 Run the application: configure logging, set up the model, controller and canvas, and initialize the GUI.

show_error(*error_string*)
 GUI error handler

stop()
 Overridden from `envisage.ui.tasks.tasks_application.TasksApplication` to shut down the remote process

preferences_helper
 Cytoflow preferences manager

cytoflowgui.experiment_pane

A dock pane with an experiment browser.

```
class cytoflowgui.experiment_pane.ExperimentBrowserDockPane(*args: Any, **kwargs: Any)
    Bases: pyface.tasks.api.TraitsDockPane
```

A DockPane with a read-only view of some of the traits of the *Experiment* that results from the currently-selected *WorkflowItem*.

```
id = 'edu.mit.synbio.cytoflowgui.experiment_pane'
name = 'Experiment Browser'
handler = <traits.trait_types.Instance object>
closable = True
dock_area = 'left'
floatable = True
movable = True
visible = True
create_contents(parent)
    Create and return the toolkit-specific contents of the dock pane.
```

cytoflowgui.experiment_pane_model

The classes that provide the model for the *ExperimentBrowserDockPane*.

```
class cytoflowgui.experiment_pane_model.WorkflowItemNode(*args: Any, **kwargs: Any)
    Bases: traitsui.api.TreeNodeObject
```

A tree node for the Experiment

```
wi = <traits.trait_types.Instance object>
label = 'WorkflowItem'
tno_get_label()
tno_allows_children(node)
tno_has_children(node)
tno_get_menu()
```

`tno_get_children()`

`class cytoflowgui.experiment_pane_model.ChannelsNode(*args: Any, **kwargs: Any)`

Bases: `traitsui.api.TreeNodeObject`

A tree node for the group of channels

`wi = <traits.trait_types.Instance object>`

`label = 'Channels'`

`tno_get_label(node)`

`tno_allows_children(node)`

`tno_has_children(node)`

`tno_get_menu()`

`tno_get_icon(node, is_expanded)`

`tno_get_children()`

`class cytoflowgui.experiment_pane_model.ChannelNode(*args: Any, **kwargs: Any)`

Bases: `traitsui.api.TreeNodeObject`

A tree node for a single channel

`wi = <traits.trait_types.Instance object>`

The [WorkflowItem](#) that this channel is part of

`channel = <traits.trait_types.Str object>`

`tno_get_label()`

`tno_allows_children()`

`tno_has_children()`

`tno_get_menu()`

`tno_get_icon(node, is_expanded)`

`tno_get_children()`

`class cytoflowgui.experiment_pane_model.ConditionsNode(*args: Any, **kwargs: Any)`

Bases: `traitsui.api.TreeNodeObject`

A tree node for all the conditions

`wi = <traits.trait_types.Instance object>`

`label = 'Conditions'`

`tno_get_label()`

`tno_allows_children(node)`

`tno_has_children(node)`

`tno_get_menu()`

`tno_get_icon(node, is_expanded)`

`tno_get_children()`

`class cytoflowgui.experiment_pane_model.ConditionNode(*args: Any, **kwargs: Any)`

Bases: `traitsui.api.TreeNodeObject`

A tree node for a single condition

```

wi = <traits.trait_types.Instance object>
    The WorkflowItem that this condition is part of
condition = <traits.trait_types.Str object>
tno_get_label()
tno_allows_children()
tno_has_children()
tno_get_menu()
tno_get_icon(node, is_expanded)
tno_get_children()

```

class cytoflowgui.experiment_pane_model.**StatisticsNode**(*args: Any, **kwargs: Any)
 Bases: traitsui.api.TreeNodeObject
 A tree node for all the statistics

```

wi = <traits.trait_types.Instance object>
label = 'Statistics'
tno_get_label()
tno_allows_children(node)
tno_has_children(node)
tno_get_menu()
tno_get_icon(node, is_expanded)
tno_get_children()

```

class cytoflowgui.experiment_pane_model.**StatisticNode**(*args: Any, **kwargs: Any)
 Bases: traitsui.api.TreeNodeObject
 A tree node for a single statistic

```

wi = <traits.trait_types.Instance object>
    The WorkflowItem that this condition is part of
statistic = <traits.trait_types.Tuple object>
tno_get_label()
tno_allows_children()
tno_has_children()
tno_get_menu()
tno_get_icon(node, is_expanded)
tno_get_children()

```

class cytoflowgui.experiment_pane_model.**StringNode**(*args: Any, **kwargs: Any)
 Bases: traitsui.api.TreeNodeObject
 A tree node for strings

```

name = <traits.trait_types.Str object>
    Name of the value

```

label = <traits.trait_types.Str object>
 User-specified override of the default label

value = <traits.trait_types.Str object>
 The value itself

tno_allows_children(node)

tno_has_children(node)

tno_get_menu(_)

tno_get_icon(node, is_expanded)

tno_get_label(node)
 Gets the label to display for a specified object.

format_value(value)
 Returns the formatted version of the value.

cytoflowgui.export_task

The `pyface.tasks` task that exports a figure.

ExportPane – the `pyface.tasks.traits_dock_pane.TraitsDockPane` to determine the width and height of the exported figure.

ExportTaskPane – the central pane of the task, shows the plot.

ExportTask – the `pyface.tasks.task.Task` to export a figure.

ExportFigurePlugin – the `envisage.envisage.plugin.Plugin` that wraps *ExportTask*.

class cytoflowgui.export_task.**ExportPane**(*args, **kwargs)
 Bases: `pyface.tasks.traits_dock_pane.TraitsDockPane`

Determine the width and height of the exported figure.

id = 'edu.mit.synbio.cytoflowgui.export_pane'

name = 'Export'

task = <traits.trait_types.Instance object>

closable = False

dock_area = 'right'

floatable = False

movable = False

visible = True

default_traits_view()

create_contents(parent)

Create and return the toolkit-specific contents of the dock pane.

class cytoflowgui.export_task.**ExportTaskPane**(*args, **kwargs)
 Bases: `pyface.base_toolkit.Toolkit.__call__.<locals>.Unimplemented`

The center pane for the UI; contains the matplotlib canvas for plotting data views.

id = 'edu.mit.synbio.cytoflow.export_task_pane'

```

name = 'Cytometry Data Viewer'
model = <traits.trait_types.Instance object>
    The shared LocalWorkflow model
handler = <traits.trait_types.Instance object>
    The shared WorkflowController
layout = <traits.trait_types.Instance object>
    The center window's layout
canvas = <traits.trait_types.Instance object>
    The shared canvas, an instance of FigureCanvasQTAggLocal
create(parent)
    Create a layout for the tab widget and the main view
activate()

class cytoflowgui.export_task.ExportTask
    Bases: pyface.tasks.task.Task
    classdocs
menu_bar
    The menu bar schema
model
    The shared LocalWorkflow model
handler
    The shared WorkflowController
params_pane
    Plot parameters pane
export_pane
    Pane with size, DPI and buttons
width
    Width, in inches
height
    Height, in inches
dpi
    Resolution, in dots per inch
create_central_pane()
    Create and return the central pane, which must implement ITaskPane.
create_dock_panes()
    Create and return the task's dock panes (IDockPane instances).

    This method is called after create_central_pane() when the task is added to a TaskWindow.
activated()
    Called after the task has been activated in a TaskWindow. Places the shared canvas in the center pane's layout.
activate_cytoflow_task(_)
    Switch to the FlowTask task
on_export(_)
    Shows a dialog to export a file

```

class cytoflowgui.export_task.ExportFigurePlugin

Bases: `envisage.plugin.Plugin`

An Envisage plugin wrapping ExportTask

TASKS = 'envisage.ui.tasks.tasks'

cytoflowgui.help_pane

Defines the dock pane to show a help page for the currently-selected operation or view.

class cytoflowgui.help_pane.HelpDockPane(*args: Any, **kwargs: Any)

Bases: `pyface.tasks.api.TraitsDockPane`

A `pyface.tasks.i_dock_pane.IDockPane` to view help for the current `IWorkflowOperation` or `IWorkflowView`.

id = 'edu.mit.synbio.cytoflowgui.help_pane'

This pane's GUID

name = 'Help'

This pane's name

task = <traits.trait_types.Instance object>

The Task that serves as the controller

view_plugins = <traits.trait_types.List object>

The `IViewPlugins` to search for help pages

op_plugins = <traits.trait_types.List object>

The `IOperationPlugins` to search for help pages

help_id

The GUID of the operation or view whose help we're currently showing

alias of `traits.trait_types.Str`

html = <traits.trait_types.HTML object>

The HTML trait containing the current help page

create_contents(parent)

Create the pane's contents, which is just the view's UI

cytoflowgui.import_dialog

A modal dialog that allows the user to set up their experiment, mapping FCS files to experimental conditions.

There are a few main classes:

- `Tube` – represents one tube (well, an FCS file) in an experiment – the filename and its metadata.
- `TubeTrait` – represents one trait (the trait type and name)
- `ExperimentDialogModel` – the tabular model of tubes, traits, and trait values
- `ExperimentDialogHandler` – the controller which contains the view and the logic for connecting it to the model.

Additionally, there are several utility functions and classes:

- `not_true` and `not_false` – obvious

- `sanitize_metadata` – replaces all non-Python-safe characters in a tube’s metadata with ‘_’
- `eval_bool` – interprets various strings as True or False
- `ConvertingBool` – trait type that uses `eval_bool` to convert strings to boolean values

`cytoflowgui.import_dialog.not_true(value)`

`cytoflowgui.import_dialog.not_false(value)`

`cytoflowgui.import_dialog.sanitize_metadata(meta)`

replaces all non-Python-safe characters in a tube’s metadata with ‘_’

class `cytoflowgui.import_dialog.Tube`

Bases: `traits.has_traits.HasStrictTraits`

The model for a tube in an experiment.

I originally wanted to make the Tube in the ImportDialog and the Tube in the ImportOp the same, but that fell apart when I tried to implement serialization (dynamic traits don’t survive pickling when sending tubes to the remote process) (well, their values do, but neither the trait type nor the metadata do.)

Oh well.

This model depends on duck-typing (“if it walks like a duck, and quacks like a duck...”). Because we want to use all of the TableEditor’s nice features, each row needs to be an instance, and each column a Trait. So, each Tube instance represents a single tube, and each experimental condition (as well as the tube name, its file, and optional plate row and col) are traits. These traits are dynamically added to Tube INSTANCES (NOT THE TUBE CLASS.) Then, we add appropriate columns to the table editor to access these traits.

We also derive traits from tubes’ FCS metadata. One can make a new column from metadata, then convert it into a condition to use in the analysis.

We also use the “transient” flag to specify traits that shouldn’t be displayed in the editor. This matches well with the traits that every HasTraits-derived class has by default (all of which are transient.)

index

The tube index

file

The FCS filename

parent

Which model are we part of?

conditions

A Dict of the conditions (for hashing)

metadata

The FCS metadata

all_conditions_set

Do all of the conditions have a value?

conditions_hash()

Return a hash of this tube’s conditions (for equality testing)

class `cytoflowgui.import_dialog.ExperimentColumn(*args: Any, **kwargs: Any)`

Bases: `traitsui.table_column.ObjectColumn`

A `traitsui.table_column.ObjectColumn` with settable color

`get_cell_color(obj)`

`cytoflowgui.import_dialog.eval_bool(x)`

Evaluate “f”, “false”, “n” or “no” as `False`; and “t”, “true”, “y” or “yes” as `True`

class `cytoflowgui.import_dialog.ConvertingBool` (*default_value=<traits.trait_type.NoDefaultSpecifiedType object>, ****metadata***)

Bases: `traits.trait_types.BaseCBool`

A trait that converts “f”, “false”, “n”, or “no” to `False` and “t”, “true”, “y” or “yes” to `True`

evaluate()

Evaluate “f”, “false”, “n” or “no” as `False`; and “t”, “true”, “y” or “yes” as `True`

validate(*_, name, value*)

Validates that a specified value is valid for this trait.

Note: The ‘fast validator’ version performs this check in C.

class `cytoflowgui.import_dialog.TubeTrait`

Bases: `traits.has_traits.HasStrictTraits`

A class representing a trait on a tube. A trait has an underlying `traits.trait_type.TraitType`, a name, a type (“metadata”, “category”, “float” or “bool”), and a default view.

model

Which model are we a part of?

name

The name of the trait

type

What type of trait is it?

class `cytoflowgui.import_dialog.ExperimentDialogModel`

Bases: `traits.has_traits.HasStrictTraits`

The model for the Experiment setup dialog.

tubes

The list of Tubes (rows in the table)

tube_traits

A list of the traits that have been added to Tube instances (columns in the table)

tube_traits_dict

A dictionary of trait name → TubeTrait instances

counter

A dictionary of tube hash → # of tubes with that hash; keeps track of whether a tube is unique or not

valid

Are all the tubes unique and filled?

dummy_experiment

A dummy Experiment, with the first Tube and no events, so we can check subsequent tubes for voltage etc. and fail early.

init(*import_op*)

Initializes the model from a pre-existing `ImportOp`

update_import_op(*import_op*)

Update an `ImportOp` with the information in this dialog

is_tube_unique(*tube*)

Is a tube unique?

```
class cytoflowgui.import_dialog.ExperimentDialogHandler(*args: Any, **kwargs: Any)
    Bases: traitsui.api.Controller
```

A controller that contains the import dialog’s view and the logic that connects it to the *ExperimentDialogModel*

```
import_op = <traits.trait_types.Instance object>
```

```
add_tubes
```

```
    alias of traits.trait_types.Event
```

```
remove_tubes
```

```
    alias of traits.trait_types.Event
```

```
add_variable
```

```
    alias of traits.trait_types.Event
```

```
import_csv
```

```
    alias of traits.trait_types.Event
```

```
selected_tubes
```

```
    alias of traits.trait_types.List
```

```
table_editor = <traits.trait_types.Instance object>
```

```
updating = <traits.trait_types.Bool object>
```

```
init(info)
```

```
close(info, is_ok)
```

Handles the user attempting to close a dialog-based user interface.

This method is called when the user attempts to close a window, by clicking an **OK** or **Cancel** button, or clicking a Close control on the window). It is called before the window is actually destroyed. Override this method to perform any checks before closing a window.

While Traits UI handles “OK” and “Cancel” events automatically, you can use the value of the *is_ok* parameter to implement additional behavior.

Parameters

- **info** (*UIInfo object*) – The UIInfo object associated with the view
- **is_ok** (*Boolean*) – Indicates whether the user confirmed the changes (such as by clicking **OK**.)

Returns `allow_close` – A Boolean, indicating whether the window should be allowed to close.

Return type `bool`

```
closed(info, is_ok)
```

cytoflowgui.matplotlib_backend_local

A matplotlib backend that renders across a process boundary. This module has the “local” canvas – the part that actually renders to a (Qt) window.

By default, matplotlib only works in one thread. For a GUI application, this is a problem because when matplotlib is working (ie, scaling a bunch of data points) the GUI freezes.

This module and *matplotlib_backend_remote* implement a matplotlib backend where the plotting done in one process (ie via pyplot, etc) shows up in a canvas running in another process (the GUI). The canvas is the interface across the process boundary: a “local” canvas, which is a GUI widget (in this case a QWidget) and a “remote” canvas

(running in the process where `pyplot.plot()` etc. are used.) The remote canvas is a subclass of the Agg renderer; when `draw()` is called, the remote canvas pulls the current buffer out of the renderer and pushes it through a pipe to the local canvas, which draws it on the screen. `blit()` is implemented too.

This takes care of one direction of data flow, and would be enough if we were just plotting. However, we want to use matplotlib widgets as well, which means there's data flowing from the local canvas to the remote canvas too. The local canvas is a subclass of `matplotlib.backends.backend_qt5agg.FigureCanvasQTAgg`, which is itself a subclass of `QWidget`. The local canvas overrides several of the event handlers, passing the event information to the remote canvas which in turn runs the matplotlib event handlers.

class `cytoflowgui.matplotlib_backend_local.Msg`

Bases: `object`

Messages sent between the local and remote canvases. There is an identical class in `matplotlib_backend_remote` because we don't want these two modules requiring one another

`DRAW = 'DRAW'`

`BLIT = 'BLIT'`

`WORKING = 'WORKING'`

`RESIZE_EVENT = 'RESIZE'`

`MOUSE_PRESS_EVENT = 'MOUSE_PRESS'`

`MOUSE_MOVE_EVENT = 'MOUSE_MOVE'`

`MOUSE_RELEASE_EVENT = 'MOUSE_RELEASE'`

`MOUSE_DOUBLE_CLICK_EVENT = 'MOUSE_DOUBLE_CLICK'`

`DPI = 'DPI'`

`PRINT = 'PRINT'`

`cytoflowgui.matplotlib_backend_local.log_exception()`

Catch and log exceptions (with their tracebacks)

class `cytoflowgui.matplotlib_backend_local.FigureCanvasQTAggLocal`(*figure, child_conn, working_pixmap*)

Bases: `matplotlib.backends.backend_qt5agg.FigureCanvasQTAgg`

The local canvas; ie, the one in the GUI.

listen_for_remote()

The main method for the thread that listens for messages from the remote canvas

send_to_remote()

The main method for the thread that sends messages to the remote canvas

leaveEvent(*event*)

Override the Qt event `leaveEvent`

mousePressEvent(*event*)

Override the Qt event `mousePressEvent`

mouseDoubleClickEvent(*event*)

Override the Qt event `mouseDoubleClickEvent`

mouseMoveEvent(*event*)

Override the Qt event `mouseMoveEvent`

mouseReleaseEvent(*event*)

Override the Qt event `mouseReleaseEvent`

resizeEvent(*event*)

Override the Qt event `resizeEvent`

paintEvent(*e*)

Copy the image from the buffer to the `qt.drawable`. In Qt, all drawing should be done inside of here when a widget is shown onscreen.

print_figure(**args*, ***kwargs*)

Pass a “print” request to the remote canvas (actually this is for rastering a figure and saving it to disk)

cytoflowgui.matplotlib_backend_remote

A matplotlib backend that renders across a process boundary. This file has the “remote” canvas – the Agg renderer into which `pyplot.plot()` renders.

By default, matplotlib only works in one thread. For a GUI application, this is a problem because when matplotlib is working (ie, scaling a bunch of data points) the GUI freezes.

This module implements a matplotlib backend where the plotting done in one process (ie via `pyplot`, etc) shows up in a canvas running in another process (the GUI). The canvas is the interface across the process boundary: a “local” canvas, which is a GUI widget (in this case a `QWidget`) and a “remote” canvas (running in the process where `pyplot.plot()` etc. are used.) The remote canvas is a subclass of the Agg renderer; when `draw()` is called, the remote canvas pulls the current buffer out of the renderer and pushes it through a pipe to the local canvas, which draws it on the screen. `blit()` is implemented too.

This takes care of one direction of data flow, and would be enough if we were just plotting. However, we want to use matplotlib widgets as well, which means there’s data flowing from the local canvas to the remote canvas too. The local canvas is a subclass of `FigureCanvasQTAgg`, which is itself a subclass of `QWidget`. The local canvas overrides several of the event handlers, passing the event information to the remote canvas which in turn runs the matplotlib event handlers.

class `cytoflowgui.matplotlib_backend_remote.Msg`

Bases: `object`

Messages sent between the local and remote canvases. There is an identical class in `matplotlib_backend_local` because we don’t want these two modules requiring one another

`DRAW = 'DRAW'`

`BLIT = 'BLIT'`

`WORKING = 'WORKING'`

`RESIZE_EVENT = 'RESIZE'`

`MOUSE_PRESS_EVENT = 'MOUSE_PRESS'`

`MOUSE_MOVE_EVENT = 'MOUSE_MOVE'`

`MOUSE_RELEASE_EVENT = 'MOUSE_RELEASE'`

`MOUSE_DOUBLE_CLICK_EVENT = 'MOUSE_DOUBLE_CLICK'`

`DPI = 'DPI'`

`PRINT = 'PRINT'`

`cytoflowgui.matplotlib_backend_remote.log_exception()`

Catch and log exceptions (with their tracebacks)

class `cytoflowgui.matplotlib_backend_remote.FigureCanvasAggRemote`(*parent_conn, process_events, plot_lock, figure*)

Bases: `matplotlib.backends.backend_agg.FigureCanvasAgg`

The canvas the figure renders into in the remote process (ie, the one where someone is calling `pyplot.plot()`)

listen_for_local()

The main method for the thread that listens for messages from the local canvas

send_to_local()

The main method for the thread that sends messages to the local canvas

draw(*args, **kwargs)

When the canvas is instructed to draw itself, copy the Agg buffer out to a numpy array and send it to the local process.

blit(bbox=None)

When instructed to blit a bounding box, copy the region in the bounding box to a numpy array and send it to the local canvas.

set_working(working)

`cytoflowgui.matplotlib_backend_remote.new_figure_manager`(num, *args, **kwargs)

Create a new figure manager instance. This maintains the remote canvas as a singleton – else, each new canvas would need a copy of the pipes, locks, etc.

`cytoflowgui.matplotlib_backend_remote.draw_if_interactive`()

`cytoflowgui.matplotlib_backend_remote.show`()

`cytoflowgui.matplotlib_backend_remote.FigureCanvas`

alias of `cytoflowgui.matplotlib_backend_remote.FigureCanvasAggRemote`

`cytoflowgui.matplotlib_backend_remote.tight_layout`(self, *args, **kwargs)

cytoflowgui.preferences

Skeleton preferences manager. At the moment, the only preference is whether to always use the default application layout.

class `cytoflowgui.preferences.CytoflowPreferences`(**traits)

Bases: `apptools.preferences.preferences_helper.PreferencesHelper`

The preferences helper for the Cytoflow application.

preferences_path

The path to the preference node that contains the preferences.

always_use_default_layout

Whether to always apply the default application layout.

class `cytoflowgui.preferences.CytoflowPreferencesPane`(*args: Any, **kwargs: Any)

Bases: `envisage.ui.tasks.preferences_pane.PreferencesPane`

The preferences pane for the Cytoflow application.

model_factory

The factory to use for creating the preferences model object.

alias of `cytoflowgui.preferences.CytoflowPreferences`

view

The view for the preferences dialog box

cytoflowgui.run

The entry-point for the GUI – sets up and starts the remote process, configures logging, loads the Envisage plugins, and starts the GUI loop.

`cytoflowgui.run.log_notification_handler(, trait_name, old, new)`
Exception handler for traits notifications

`cytoflowgui.run.log_excepthook(typ, val, tb)`
Exception handler for global exceptions

`cytoflowgui.run.run_gui()`
Run the GUI!

`cytoflowgui.run.monitor_remote_process(proc)`
The main method for the (local) thread that monitors the remote process

`cytoflowgui.run.start_remote_process()`
Start the remote process. Creates pipes and synchronization primitives, sets up logging, and starts the remote process and the monitoring thread.

`cytoflowgui.run.remote_main(parent_workflow_conn, parent_mpl_conn, log_q, running_event)`
The main method for the remote process. Configures logging, sets up the matplotlib backend, and instantiates the *RemoteWorkflow*.

cytoflowgui.subset_controllers

Instances of `traitsui.handler.Controller` for the various *ISubset* classes. These contain the `traitsui.view.Views` for them. Also a utility function to return the appropriate handler for an arbitrary *ISubset* model.

class `cytoflowgui.subset_controllers.BoolSubsetHandler(*args: Any, **kwargs: Any)`
Bases: `traitsui.api.Controller`

Controller for *BoolSubset*

`subset_view()`

class `cytoflowgui.subset_controllers.CategorySubsetHandler(*args: Any, **kwargs: Any)`
Bases: `traitsui.api.Controller`

Controller for *CategorySubset*

`subset_view()`

class `cytoflowgui.subset_controllers.RangeSubsetHandler(*args: Any, **kwargs: Any)`
Bases: `traitsui.api.Controller`

Controller for *RangeSubset*

`subset_view()`

`cytoflowgui.subset_controllers.subset_handler_factory(model)`
A factory method to produce the right handler for a given implementation of *ISubset*

cytoflowgui.util

A few utility classes for *cytoflowgui*

```
class cytoflowgui.util.DefaultFileDialog(*args: Any, **kwargs: Any)
    Bases: pyface.ui.qt4.file_dialog.FileDialog
```

A `pyface.ui.qt4.file_dialog.FileDialog` with a default suffix

```
default_suffix
    alias of traits.trait_types.Str
```

```
class cytoflowgui.util.HintedMainWindow(*args: Any, **kwargs: Any)
    Bases: pyface.qt.QtGui.QMainWindow
```

When `pyface` makes a new dock pane, it sets the width and height as fixed (from the new layout or from the default). Then, after it's finished setting up, it resets the minimum and maximum widget sizes. In Qt5, this triggers a re-layout according to the widgets' hinted sizes. So, here we keep track of "fixed" sizes, then return those sizes as the size hint to the layout engine.

```
hint_width = None
```

```
hint_height = None
```

```
setFixedWidth(*args, **kwargs)
```

```
setFixedHeight(*args, **kwargs)
```

```
sizeHint(*args, **kwargs)
```

```
class cytoflowgui.util.HintedWidget(*args: Any, **kwargs: Any)
    Bases: pyface.qt.QtGui.QWidget
```

When `pyface` makes a new widget, it sets the width and height as fixed (from the new layout or from the default). Then, after it's finished setting up, it resets the minimum and maximum widget sizes. In Qt5, this triggers a re-layout according to the widgets' hinted sizes. So, here we keep track of "fixed" sizes, then return those sizes as the size hint to the layout engine.

```
hint_width = None
```

```
hint_height = None
```

```
setFixedWidth(*args, **kwargs)
```

```
setFixedHeight(*args, **kwargs)
```

```
sizeHint(*args, **kwargs)
```

cytoflowgui.view_pane

Dock panes for modifying an *IWorkflowViews* traits and the parameters that are passed to *IView.plot*.

- *ViewDockPane* – the dock pane to manipulate the traits of the currently selected view.
- *PlotParamsPane* – the dock pane to manipulate the parameters passed to *IView.plot*.

```
class cytoflowgui.view_pane.ViewDockPane(*args, **kwargs)
    Bases: pyface.tasks.traits_dock_pane.TraitsDockPane
```

A `DockPane` to manipulate the traits of the currently selected view.

```
id = 'edu.mit.synbio.cytoflowgui.view_traits_pane'
```

```
name = 'View Properties'
```

```

task = <traits.trait_types.Instance object>
view_plugins = <traits.trait_types.List object>
handler = <traits.trait_types.Instance object>
image_size = <traits.trait_types.Tuple object>
create_contents(parent)
    Create and return the toolkit-specific contents of the dock pane.
class cytoflowgui.view_pane.PlotParamsPane(*args, **kwargs)
    Bases: pyface.tasks.traits_dock_pane.TraitsDockPane
    id = 'edu.mit.synbio.cytoflowgui.params_pane'
    name = 'Plot Parameters'
    handler = <traits.trait_types.Instance object>
    closable = True
    dock_area = 'right'
    floatable = True
    movable = True
    visible = True
    create_contents(parent)
        Create and return the toolkit-specific contents of the dock pane.

```

cytoflowgui.workflow_controller

Controllers for *LocalWorkflow* and the *WorkflowItems* it contains – these dynamically create the `traitsui.view.View` instances for the workflow’s operations and views.

Perhaps the most confusing thing in the entire codebase is the way that these views are created. The difficulty is that a view for a *WorkflowItem* is polymorphic depending on the *IWorkflowOperation* that it wraps and the *IWorkflowView* that is currently active.

Here’s how this works. The “Workflow” pane contains a view of the *LocalWorkflow* (the model), created by *WorkflowController.workflow_traits_view*. The editor is a *VerticalNotebookEditor*, configured to use *WorkflowController.handler_factory* to create a new *WorkflowItemHandler* for each *WorkflowItem* in the *LocalWorkflow*.

Here’s our opportunity for polymorphism! Because each *WorkflowItem* has its own *WorkflowItemHandler* instance, the *WorkflowItemHandler.operation_traits_view* method can return a `traitsui.view.View` specifically for that *WorkflowItem*’s operation. The `traitsui.view.View` it returns contains an *InstanceHandlerEditor*, which uses *WorkflowItemHandler._get_operation_handler* to get a handler specifically for the *IWorkflowOperation* that this *WorkflowItem* wraps. And this handler, in turn, creates the view specifically for the *IWorkflowOperation* (and contains the logic for connecting it to the *IWorkflowOperation* that is its model.)

The logic for the view traits and view parameters panes is similar. Each pane contains a view of *LocalWorkflow.selected*, the currently-selected *WorkflowItem*. In turn that *WorkflowItem*’s handler creates a view for the currently-displayed *IWorkflowView* (which is in *WorkflowItem.current_view*). This handler, in turn, creates a view for the *IWorkflowView*’s traits or plot parameters.

One last non-obvious thing. Many of the operations and views require choosing a value from the *Experiment*. For example, if an *IWorkflowView* is plotting a histogram, one of its traits is the channel whose histogram is being plotted. These values – channels, conditions, statistics and numeric statistics, for both the current *WorkflowItem.result* and the previous *WorkflowItem.result* – are presented as properties of the *WorkflowItemHandler*. In turn, the *WorkflowItemHandler* appears in the view’s context dictionary as *context*. So, if a view wants to get the previous *WorkflowItem*’s channels, it can refer to them as *context.channels*. (Examples of this pattern are scattered throughout the submodules of *view_plugins*.)

class cytoflowgui.workflow_controller.**WorkflowItemHandler**(*args: Any, **kwargs: Any)

Bases: `traitsui.api.Controller`

A controller for a *WorkflowItem*. It dynamically creates views for the *IWorkflowOperation* and *IWorkflowViews* that are contained, as well as exposing channels, conditions, statistics and numeric statistics as properties (so they can be accessed by the views).

deletable = <traits.traits.ForwardProperty object>

For the vertical notebook view, is this page deletable?

icon = <traits.traits.ForwardProperty object>

The icon for the vertical notebook view

name = <traits.trait_types.DelegatesTo object>

friendly_id = <traits.trait_types.DelegatesTo object>

op_plugins

alias of `traits.trait_types.List`

view_plugins

alias of `traits.trait_types.List`

conditions = <traits.traits.ForwardProperty object>

The conditions in this *WorkflowItem.result*

conditions_names = <traits.traits.ForwardProperty object>

The names of the conditions in this *WorkflowItem.result*

previous_conditions = <traits.traits.ForwardProperty object>

The conditions in the previous *WorkflowItem.result*

previous_conditions_names = <traits.traits.ForwardProperty object>

The names of the conditions in the previous *WorkflowItem.result*

statistics_names = <traits.traits.ForwardProperty object>

The names of the statistics in this *WorkflowItem.result*

numeric_statistics_names = <traits.traits.ForwardProperty object>

The names of the numeric statistics in this *WorkflowItem.result*

previous_statistics_names = <traits.traits.ForwardProperty object>

The names of the statistics in the previous *WorkflowItem.result*

channels = <traits.traits.ForwardProperty object>

The channels in this *WorkflowItem.result*

previous_channels = <traits.traits.ForwardProperty object>

The channels in the previous *WorkflowItem.result*

tree_node = <traits.traits.ForwardProperty object>

operation_traits_view()

Returns the `traitsui.view.View` of the *IWorkflowOperation* that this *WorkflowItem* wraps. The view is actually defined by the operation’s handler’s `operation_traits_view` attribute.

view_traits_view()

Returns the `traitsui.view.View` showing the traits of the current *IWorkflowView*. The view is actually defined by the view's handler's `view_traits_view` attribute.

view_params_view()

Returns the `traitsui.view.View` showing the plot parameters of the current *IWorkflowView*. The view is actually defined by the view's handler's `view_params_view` attribute.

view_plot_name_view()

Returns the `traitsui.view.View` showing the plot names of the current *IWorkflowView*. The view is actually defined by the view's handler's `view_plot_name_view` attribute.

experiment_view()

Returns a `traitsui.view.View` of *LocalWorkflow.selected*, showing some things about the experiment – channels, conditions, statistics, etc.

class cytoflowgui.workflow_controller.**WorkflowController**(*args: Any, **kwargs: Any)

Bases: `traitsui.api.Controller`

A controller for a *LocalWorkflow*. It dynamically creates views for the major panes in the UI: the workflow, the selected view traits, and the selected view parameters. It also contains the logic for adding operations and activating views. Both of which are triggered by the button bars on the sides of their respective panes.

workflow_handlers = <traits.trait_types.Dict object>

op_plugins

alias of `traits.trait_types.List`

view_plugins

alias of `traits.trait_types.List`

workflow_traits_view()

Returns a `traitsui.view.View` of the *LocalWorkflow* for the Workflow pane. Its editor is a *VerticalNotebookEditor*. Each item's instance view is created by *WorkflowItemHandler.operation_traits_view*.

selected_view_traits_view()

Returns a `traitsui.view.View` of *LocalWorkflow.selected* for the View traits pane. The actual view is created by *WorkflowItemHandler.view_traits_view*.

selected_view_params_view()

Returns a `traitsui.view.View` of *LocalWorkflow.selected* for the View parameters pane. The actual view is created by *WorkflowItemHandler.view_params_view*.

selected_view_plot_name_view()

Returns a `traitsui.view.View` of *LocalWorkflow.selected* for the plot names toolbar. The actual view is created by *WorkflowItemHandler.view_plot_name_view*.

experiment_view()

Returns a `traitsui.view.View` of *LocalWorkflow.selected* for the experiment viewer.

handler_factory(wi)

Return an instance of *WorkflowItemHandler* for a *WorkflowItem* in *LocalWorkflow*

add_operation(operation_id)

The logic to add an *IWorkflowOperation* to *LocalWorkflow*. Creates a new *WorkflowItem*, figures out where to add it, inserts it into the model and activates the default view (if present.)

activate_view(view_id)

The logic to activate a view on the selected *WorkflowItem*. Creates a new instance of the view if necessary and makes it the current view; event handlers on *WorkflowItem.current_view* take care of everything else.

cytoflowgui.workflow_pane

The pane that has the operation toolbar and the workflow.

```
class cytoflowgui.workflow_pane.WorkflowDockPane(*args, **kwargs)
    Bases: pyface.tasks.traits_dock_pane.TraitsDockPane

    Workflow dock pane

    id = 'edu.mit.synbio.cytoflowgui.workflow_pane'
    name = 'Workflow'
    plugins = <traits.trait_types.List object>
    handler = <traits.trait_types.Instance object>
    image_size = <traits.trait_types.Tuple object>
    create_contents(parent)
        Create and return the toolkit-specific contents of the dock pane.
```

Indices and tables

- [genindex](#)
- [modindex](#)
- [search](#)

PYTHON MODULE INDEX

C

- cytoflow, 310
- cytoflow.experiment, 473
- cytoflow.operations, 311
 - cytoflow.operations.autofluorescence, 311
 - cytoflow.operations.base_op_views, 313
 - cytoflow.operations.bead_calibration, 315
 - cytoflow.operations.binning, 322
 - cytoflow.operations.bleedthrough_linear, 325
 - cytoflow.operations.channel_stat, 329
 - cytoflow.operations.color_translation, 331
 - cytoflow.operations.density, 334
 - cytoflow.operations.flowpeaks, 340
 - cytoflow.operations.frame_stat, 350
 - cytoflow.operations.gaussian, 351
 - cytoflow.operations.i_operation, 360
 - cytoflow.operations.import_op, 361
 - cytoflow.operations.kmeans, 364
 - cytoflow.operations.pca, 371
 - cytoflow.operations.polygon, 376
 - cytoflow.operations.quad, 382
 - cytoflow.operations.range, 390
 - cytoflow.operations.range2d, 394
 - cytoflow.operations.ratio, 399
 - cytoflow.operations.threshold, 400
 - cytoflow.operations.xform_stat, 404
- cytoflow.scripts, 406
 - cytoflow.scripts.channel_voltages, 406
 - cytoflow.scripts.fcs_metadata, 406
 - cytoflow.scripts.parse_beads, 406
 - cytoflow.scripts.split_fcs, 406
- cytoflow.utility, 406
 - cytoflow.utility.algorithms, 406
 - cytoflow.utility.custom_traits, 407
 - cytoflow.utility.cytoflow_errors, 411
 - cytoflow.utility.docstring, 412
 - cytoflow.utility.fcswrite, 413
 - cytoflow.utility.hlog_scale, 414
 - cytoflow.utility.linear_scale, 417
 - cytoflow.utility.log_scale, 417
 - cytoflow.utility.logging, 417
 - cytoflow.utility.logicle_scale, 418
 - cytoflow.utility.scale, 421
 - cytoflow.utility.util_functions, 422
- cytoflow.views, 426
 - cytoflow.views.bar_chart, 426
 - cytoflow.views.base_views, 429
 - cytoflow.views.densityplot, 435
 - cytoflow.views.export_fcs, 438
 - cytoflow.views.histogram, 439
 - cytoflow.views.histogram_2d, 442
 - cytoflow.views.i_selectionview, 446
 - cytoflow.views.i_view, 446
 - cytoflow.views.kde_1d, 446
 - cytoflow.views.kde_2d, 449
 - cytoflow.views.parallel_coords, 452
 - cytoflow.views.radviz, 455
 - cytoflow.views.scatterplot, 458
 - cytoflow.views.stats_1d, 461
 - cytoflow.views.stats_2d, 464
 - cytoflow.views.table, 468
 - cytoflow.views.violin, 469
- cytoflowgui, 478
 - cytoflowgui.cytoflow_application, 564
 - cytoflowgui.editors, 478
 - cytoflowgui.editors.color_text_editor, 478
 - cytoflowgui.editors.ext_enum_editor, 478
 - cytoflowgui.editors.instance_handler_editor, 479
 - cytoflowgui.editors.range_slider, 479
 - cytoflowgui.editors.subset_list_editor, 480
 - cytoflowgui.editors.tab_list_editor, 480
 - cytoflowgui.editors.toggle_button, 480
 - cytoflowgui.editors.value_bounds_editor, 480
 - cytoflowgui.editors.vertical_list_editor, 481
 - cytoflowgui.editors.vertical_notebook, 481
 - cytoflowgui.editors.vertical_notebook_editor, 483
 - cytoflowgui.editors.zoomable_html_editor, 483
 - cytoflowgui.experiment_pane, 565
 - cytoflowgui.experiment_pane_model, 565
 - cytoflowgui.export_task, 568
 - cytoflowgui.help_pane, 570
 - cytoflowgui.import_dialog, 570

cytoflowgui.matplotlib_backend_local, 573
 cytoflowgui.matplotlib_backend_remote, 575
 cytoflowgui.op_plugins, 484
 cytoflowgui.op_plugins.autofluorescence, 484
 cytoflowgui.op_plugins.bead_calibration, 486
 cytoflowgui.op_plugins.binning, 488
 cytoflowgui.op_plugins.bleedthrough_linear, 489
 cytoflowgui.op_plugins.channel_stat, 491
 cytoflowgui.op_plugins.color_translation, 491
 cytoflowgui.op_plugins.density, 493
 cytoflowgui.op_plugins.flowpeaks, 494
 cytoflowgui.op_plugins.gaussian_1d, 496
 cytoflowgui.op_plugins.gaussian_2d, 497
 cytoflowgui.op_plugins.i_op_plugin, 498
 cytoflowgui.op_plugins.import_op, 499
 cytoflowgui.op_plugins.kmeans, 501
 cytoflowgui.op_plugins.op_plugin_base, 502
 cytoflowgui.op_plugins.pca, 502
 cytoflowgui.op_plugins.polygon, 503
 cytoflowgui.op_plugins.quad, 504
 cytoflowgui.op_plugins.range, 505
 cytoflowgui.op_plugins.range2d, 507
 cytoflowgui.op_plugins.ratio, 508
 cytoflowgui.op_plugins.tasbe, 508
 cytoflowgui.op_plugins.threshold, 513
 cytoflowgui.op_plugins.xform_stat, 514
 cytoflowgui.preferences, 576
 cytoflowgui.run, 576
 cytoflowgui.subset_controllers, 577
 cytoflowgui.util, 577
 cytoflowgui.utility, 515
 cytoflowgui.utility.event_tracer, 515
 cytoflowgui.utility.logging, 517
 cytoflowgui.view_pane, 578
 cytoflowgui.view_plugins, 517
 cytoflowgui.view_plugins.bar_chart, 518
 cytoflowgui.view_plugins.density, 519
 cytoflowgui.view_plugins.export_fcs, 519
 cytoflowgui.view_plugins.histogram, 520
 cytoflowgui.view_plugins.histogram_2d, 522
 cytoflowgui.view_plugins.i_view_plugin, 523
 cytoflowgui.view_plugins.kde_1d, 524
 cytoflowgui.view_plugins.kde_2d, 524
 cytoflowgui.view_plugins.parallel_coords, 526
 cytoflowgui.view_plugins.radviz, 527
 cytoflowgui.view_plugins.scatterplot, 529
 cytoflowgui.view_plugins.stats_1d, 530
 cytoflowgui.view_plugins.stats_2d, 531
 cytoflowgui.view_plugins.table, 533
 cytoflowgui.view_plugins.view_plugin_base, 533
 cytoflowgui.view_plugins.violin, 535
 cytoflowgui.workflow, 536
 cytoflowgui.workflow.operations, 537
 cytoflowgui.workflow.operations.autofluorescence, 537
 cytoflowgui.workflow.operations.bead_calibration, 538
 cytoflowgui.workflow.operations.binning, 539
 cytoflowgui.workflow.operations.bleedthrough_linear, 539
 cytoflowgui.workflow.operations.channel_stat, 540
 cytoflowgui.workflow.operations.color_translation, 540
 cytoflowgui.workflow.operations.density, 541
 cytoflowgui.workflow.operations.flowpeaks, 542
 cytoflowgui.workflow.operations.gaussian_1d, 543
 cytoflowgui.workflow.operations.gaussian_2d, 544
 cytoflowgui.workflow.operations.import_op, 545
 cytoflowgui.workflow.operations.kmeans, 546
 cytoflowgui.workflow.operations.operation_base, 547
 cytoflowgui.workflow.operations.pca, 548
 cytoflowgui.workflow.operations.polygon, 548
 cytoflowgui.workflow.operations.quad, 549
 cytoflowgui.workflow.operations.range, 549
 cytoflowgui.workflow.operations.range2d, 550
 cytoflowgui.workflow.operations.ratio, 550
 cytoflowgui.workflow.operations.tasbe, 550
 cytoflowgui.workflow.operations.threshold, 551
 cytoflowgui.workflow.operations.xform_stat, 551
 cytoflowgui.workflow.serialization, 557
 cytoflowgui.workflow.subset, 558
 cytoflowgui.workflow.views, 552
 cytoflowgui.workflow.views.bar_chart, 552
 cytoflowgui.workflow.views.density, 552
 cytoflowgui.workflow.views.export_fcs, 552
 cytoflowgui.workflow.views.histogram, 553
 cytoflowgui.workflow.views.histogram_2d, 553
 cytoflowgui.workflow.views.kde_1d, 553
 cytoflowgui.workflow.views.kde_2d, 553
 cytoflowgui.workflow.views.parallel_coords, 554
 cytoflowgui.workflow.views.radviz, 554
 cytoflowgui.workflow.views.scatterplot, 554
 cytoflowgui.workflow.views.stats_1d, 554
 cytoflowgui.workflow.views.stats_2d, 555
 cytoflowgui.workflow.views.table, 555
 cytoflowgui.workflow.views.view_base, 555
 cytoflowgui.workflow.views.violin, 557

`cytoflowgui.workflow.workflow`, 558
`cytoflowgui.workflow.workflow_item`, 561
`cytoflowgui.workflow_controller`, 579
`cytoflowgui.workflow_pane`, 581

A

- A (*cytoflow.utility.logicle_scale.LogicleScale* attribute), 419
- activate() (*cytoflowgui.export_task.ExportTaskPane* method), 569
- activate_cytoflow_task() (*cytoflowgui.export_task.ExportTask* method), 569
- activate_view() (*cytoflowgui.workflow_controller.WorkflowController* method), 581
- activated() (*cytoflowgui.export_task.ExportTask* method), 569
- add_channel (*cytoflowgui.op_plugins.bead_calibration.BeadCalibrationHandler* attribute), 486
- add_channel (*cytoflowgui.op_plugins.pca.PCAHandler* attribute), 503
- add_channel (*cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesHandler* attribute), 527
- add_channel (*cytoflowgui.view_plugins.radviz.RadvizHandler* attribute), 528
- add_channel() (*cytoflow.experiment.Experiment* method), 477
- add_condition() (*cytoflow.experiment.Experiment* method), 476
- add_control (*cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearHandler* attribute), 489
- add_control (*cytoflowgui.op_plugins.color_translation.ColorTranslationHandler* attribute), 493
- add_events() (*cytoflow.experiment.Experiment* method), 477
- ADD_ITEMS (*cytoflowgui.workflow.workflow.Msg* attribute), 559
- add_operation() (*cytoflowgui.workflow_controller.WorkflowController* method), 581
- add_tubes (*cytoflowgui.import_dialog.ExperimentDialogHandler* attribute), 573
- add_variable (*cytoflowgui.import_dialog.ExperimentDialogHandler* attribute), 573
- all_conditions_set (*cytoflowgui.import_dialog.Tube* attribute), 571
- AlphaColormap (class in *cytoflow.views.histogram_2d*), 446
- always_use_default_layout (*cytoflowgui.cytoflow_application.CytoflowApplication* attribute), 564
- always_use_default_layout (*cytoflowgui.preferences.CytoflowPreferences* attribute), 576
- AnnotatingView (class in *cytoflow.operations.base_op_views*), 315
- application_error (*cytoflowgui.cytoflow_application.CytoflowApplication* attribute), 564
- application_log (*cytoflowgui.cytoflow_application.CytoflowApplication* attribute), 564
- APPLY (*cytoflowgui.workflow.Changed* attribute), 536
- apply() (*cytoflow.operations.autofluorescence.AutofluorescenceOp* method), 313
- apply() (*cytoflow.operations.bead_calibration.BeadCalibrationOp* method), 319
- apply() (*cytoflow.operations.binning.BinningOp* method), 323
- apply() (*cytoflow.operations.bleedthrough_linear.BleedthroughLinearOp* method), 328
- apply() (*cytoflow.operations.channel_stat.ChannelStatisticOp* method), 331
- apply() (*cytoflow.operations.color_translation.ColorTranslationOp* method), 334
- apply() (*cytoflow.operations.density.DensityGateOp* method), 337
- apply() (*cytoflow.operations.flowpeaks.FlowPeaksOp* method), 343
- apply() (*cytoflow.operations.frame_stat.FrameStatisticOp* method), 351
- apply() (*cytoflow.operations.gaussian.GaussianMixtureOp* method), 355
- apply() (*cytoflow.operations.i_operation.IOOperation* method), 361
- apply() (*cytoflow.operations.import_op.ImportOp* method), 363
- apply() (*cytoflow.operations.kmeans.KMeansOp* method), 367
- apply() (*cytoflow.operations.pca.PCAOp* method), 376
- apply() (*cytoflow.operations.polygon.PolygonOp* method), 378

| | | |
|--------------------------------|--|--|
| apply() | (<i>cytoflow.operations.quad.QuadOp</i> method), 385 | <i>cytoflow.operations.autofluorescence</i>), 311 |
| apply() | (<i>cytoflow.operations.range.RangeOp</i> method), 391 | AutofluorescencePlugin (class in <i>cytoflowgui.op_plugins.autofluorescence</i>), 484 |
| apply() | (<i>cytoflow.operations.range2d.Range2DOp</i> method), 396 | AutofluorescenceViewHandler (class in <i>cytoflowgui.op_plugins.autofluorescence</i>), 484 |
| apply() | (<i>cytoflow.operations.ratio.RatioOp</i> method), 400 | AutofluorescenceWorkflowOp (class in <i>cytoflowgui.workflow.operations.autofluorescence</i>), 537 |
| apply() | (<i>cytoflow.operations.threshold.ThresholdOp</i> method), 402 | AutofluorescenceWorkflowView (class in <i>cytoflowgui.workflow.operations.autofluorescence</i>), 537 |
| apply() | (<i>cytoflow.operations.xform_stat.TransformStatisticOp</i> method), 405 | AutofluorescenceWorkflowView (class in <i>cytoflowgui.workflow.operations.autofluorescence</i>), 537 |
| apply() | (<i>cytoflowgui.workflow.operations.autofluorescence.AutofluorescenceWorkflowOp</i> method), 537 | |
| apply() | (<i>cytoflowgui.workflow.operations.bead_calibration.BeadCalibrationWorkflowOp</i> method), 538 | B |
| apply() | (<i>cytoflowgui.workflow.operations.bleedthrough_lineack.BleedthroughLineackWorkflowOp</i> method), 539 | b (<i>cytoflow.utility.hlog_scale.HlogScale</i> attribute), 414 |
| apply() | (<i>cytoflowgui.workflow.operations.channel_stat.ChannelStatisticWorkflowOp</i> method), 540 | back_color (<i>cytoflowgui.view_plugins.bar_chart.ColorTextEditor</i> attribute), 478 |
| apply() | (<i>cytoflowgui.workflow.operations.color_translation.BarChartParamsWorkflowOp</i> method), 541 | BarChartHandler (class in <i>cytoflowgui.view_plugins.bar_chart</i>), 518 |
| apply() | (<i>cytoflowgui.workflow.operations.density.DensityBarChartWorkflowOp</i> method), 542 | BarChartParamsHandler (class in <i>cytoflowgui.view_plugins.bar_chart</i>), 518 |
| apply() | (<i>cytoflowgui.workflow.operations.flowpeaks.FlowPeakWorkflowOp</i> method), 543 | BarChartParams (class in <i>cytoflowgui.workflow.views.bar_chart</i>), 552 |
| apply() | (<i>cytoflowgui.workflow.operations.gaussian_1d.GaussianMixture1DWorkflowOp</i> method), 543 | BarChartPlugin (class in <i>cytoflowgui.view_plugins.bar_chart</i>), 519 |
| apply() | (<i>cytoflowgui.workflow.operations.gaussian_2d.GaussianMixture2DWorkflowOp</i> method), 544 | BasicMDView (<i>cytoflow.workflow.views.bar_chart</i>), 426 |
| apply() | (<i>cytoflowgui.workflow.operations.import_op.ImportWorkflowOp</i> method), 545 | BarChartWorkflowView (class in <i>cytoflow.workflow.views.bar_chart</i>), 552 |
| apply() | (<i>cytoflowgui.workflow.operations.kmeans.KMeansWorkflowOp</i> method), 546 | base (<i>cytoflow.views.export_fcs.ExportFCS</i> attribute), 428 |
| apply() | (<i>cytoflowgui.workflow.operations.pca.PCAWorkflowOp</i> method), 548 | Base1DStatisticsView (class in <i>cytoflow.views.base_views</i>), 433 |
| apply() | (<i>cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOp</i> method), 551 | Base1DView (class in <i>cytoflow.views.base_views</i>), 431 |
| apply() | (<i>cytoflowgui.workflow.operations.xform_stat.TransformStatisticWorkflowOp</i> method), 552 | Base2DStatisticsView (class in <i>cytoflow.views.base_views</i>), 434 |
| apply() | (<i>cytoflowgui.workflow.workflow_item.WorkflowItem</i> method), 563 | Base2DView (class in <i>cytoflow.views.base_views</i>), 432 |
| APPLY_CALLED | (<i>cytoflowgui.workflow.workflow.Msg</i> attribute), 559 | BaseDataView (class in <i>cytoflow.views.base_views</i>), 431 |
| autodetect_name_metadata() | (in module <i>cytoflow.operations.import_op</i>), 364 | BaseNDView (<i>cytoflow.workflow.views.view_base</i>), 557 |
| AUTOFLUORESCENCE | (<i>cytoflowgui.workflow.operations.tasbe.Progress</i> attribute), 550 | BaseNDView (<i>cytoflow.workflow.views.view_base</i>), 557 |
| AutofluorescenceDiagnosticView | (class in <i>cytoflow.operations.autofluorescence</i>), 313 | BasePlotParams (class in <i>cytoflowgui.workflow.views.view_base</i>), 557 |
| AutofluorescenceHandler | (class in <i>cytoflowgui.op_plugins.autofluorescence</i>), 484 | BaseStatisticsView (class in <i>cytoflow.views.base_views</i>), 433 |
| AutofluorescenceOp | (class in <i>cytoflow.operations.bead_calibration.BeadCalibrationOp</i>), 316 | BaseView (class in <i>cytoflow.views.base_views</i>), 430 |
| | | bead_brightness_cutoff (<i>cytoflow.operations.bead_calibration.BeadCalibrationOp</i> attribute), 316 |
| | | bead_brightness_threshold (<i>cytoflow.operations.bead_calibration.BeadCalibrationOp</i> attribute), 316 |
| | | BEAD_CALIBRATION (<i>cytoflowgui.workflow.operations.tasbe.Progress</i> attribute), 550 |
| | | bead_histogram_bins (<i>cytoflow.operations.bead_calibration.BeadCalibrationOp</i> attribute), 316 |

- `attribute`), 316
- `bead_peak_quantile` (`cytoflow.operations.bead_calibration.BeadCalibrationOp` attribute), 316
- `BeadCalibrationDiagnostic` (class in `cytoflow.operations.bead_calibration`), 321
- `BeadCalibrationHandler` (class in `cytoflowgui.op_plugins.bead_calibration`), 486
- `BeadCalibrationOp` (class in `cytoflow.operations.bead_calibration`), 315
- `BeadCalibrationPlugin` (class in `cytoflowgui.op_plugins.bead_calibration`), 488
- `BeadCalibrationViewHandler` (class in `cytoflowgui.op_plugins.bead_calibration`), 488
- `BeadCalibrationWorkflowOp` (class in `cytoflowgui.workflow.operations.bead_calibration`), 538
- `BeadCalibrationWorkflowView` (class in `cytoflowgui.workflow.operations.bead_calibration`), 538
- `BEADS` (`cytoflow.operations.bead_calibration.BeadCalibrationOp` attribute), 319
- `beads` (`cytoflow.operations.bead_calibration.BeadCalibrationOp` attribute), 316
- `beads_file` (`cytoflow.operations.bead_calibration.BeadCalibrationOp` attribute), 316
- `beads_name_choices` (`cytoflowgui.op_plugins.bead_calibration.BeadCalibrationOp` attribute), 486
- `beads_name_choices` (`cytoflowgui.op_plugins.tasbe.TasbeHandler` attribute), 512
- `beads_units` (`cytoflowgui.op_plugins.bead_calibration.BeadCalibrationOp` attribute), 488
- `beads_units` (`cytoflowgui.op_plugins.tasbe.TasbeHandler` attribute), 512
- `BeadUnit` (class in `cytoflowgui.workflow.operations.tasbe`), 550
- `bin_width` (`cytoflow.operations.binning.BinningOp` attribute), 322
- `BinningHandler` (class in `cytoflowgui.op_plugins.binning`), 488
- `BinningOp` (class in `cytoflow.operations.binning`), 322
- `BinningPlugin` (class in `cytoflowgui.op_plugins.binning`), 488
- `BinningView` (class in `cytoflow.operations.binning`), 323
- `BinningViewHandler` (class in `cytoflowgui.op_plugins.binning`), 488
- `BinningWorkflowOp` (class in `cytoflowgui.workflow.operations.binning`), 539
- `BinningWorkflowView` (class in `cytoflowgui.workflow.operations.binning`), 539
- `bins` (`cytoflow.operations.density.DensityGateOp` attribute), 305
- `blank_file` (`cytoflow.operations.autofluorescence.AutofluorescenceOp` attribute), 311
- `blank_file_conditions` (`cytoflow.operations.autofluorescence.AutofluorescenceOp` attribute), 311
- `BLEEDTHROUGH` (`cytoflowgui.workflow.operations.tasbe.Progress` attribute), 550
- `BleedthroughControl` (class in `cytoflowgui.workflow.operations.tasbe`), 550
- `BleedthroughControlHandler` (class in `cytoflowgui.op_plugins.tasbe`), 512
- `BleedthroughLinearDiagnostic` (class in `cytoflow.operations.bleedthrough_linear`), 329
- `BleedthroughLinearHandler` (class in `cytoflowgui.op_plugins.bleedthrough_linear`), 489
- `BleedthroughLinearOp` (class in `cytoflow.operations.bleedthrough_linear`), 325
- `BleedthroughLinearPlugin` (class in `cytoflowgui.op_plugins.bleedthrough_linear`), 491
- `BleedthroughLinearViewHandler` (class in `cytoflowgui.op_plugins.bleedthrough_linear`), 491
- `BleedthroughLinearWorkflowOp` (class in `cytoflowgui.workflow.operations.bleedthrough_linear`), 539
- `BleedthroughLinearWorkflowView` (class in `cytoflowgui.workflow.operations.bleedthrough_linear`), 540
- `BLIT` (`cytoflowgui.matplotlib_backend_local.Msg` attribute), 574
- `BLIT` (`cytoflowgui.matplotlib_backend_remote.Msg` attribute), 575
- `blit()` (`cytoflowgui.matplotlib_backend_remote.FigureCanvasAggRemote` method), 576
- `BoolSubset` (class in `cytoflowgui.workflow.subset`), 558
- `BoolSubsetHandler` (class in `cytoflowgui.subset_controllers`), 577
- `bootstrap()` (in module `cytoflow.utility.algorithms`), 407
- `by` (`cytoflow.operations.base_op_views.ByView` attribute), 314
- `by` (`cytoflow.operations.channel_stat.ChannelStatisticOp` attribute), 330
- `by` (`cytoflow.operations.density.DensityGateOp` attribute), 335
- `by` (`cytoflow.operations.density.DensityGateView` attribute), 338
- `by` (`cytoflow.operations.flowpeaks.FlowPeaksIDView` at-

- tribute), 344
 - by (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* attribute), 348
 - by (*cytoflow.operations.flowpeaks.FlowPeaks2DView* attribute), 346
 - by (*cytoflow.operations.flowpeaks.FlowPeaksOp* attribute), 340
 - by (*cytoflow.operations.frame_stat.FrameStatisticOp* attribute), 351
 - by (*cytoflow.operations.gaussian.GaussianMixture1DView* attribute), 356
 - by (*cytoflow.operations.gaussian.GaussianMixture2DView* attribute), 358
 - by (*cytoflow.operations.gaussian.GaussianMixtureOp* attribute), 352
 - by (*cytoflow.operations.kmeans.KMeans1DView* attribute), 367
 - by (*cytoflow.operations.kmeans.KMeans2DView* attribute), 369
 - by (*cytoflow.operations.kmeans.KMeansOp* attribute), 365
 - by (*cytoflow.operations.pca.PCAOp* attribute), 372
 - by (*cytoflow.operations.xform_stat.TransformStatisticOp* attribute), 405
 - by (*cytoflow.views.export_fcs.ExportFCS* attribute), 438
 - By1DView* (class in *cytoflow.operations.base_op_views*), 315
 - By2DView* (class in *cytoflow.operations.base_op_views*), 315
 - ByView* (class in *cytoflow.operations.base_op_views*), 314
- C**
- CallbackHandler* (class in *cytoflowgui.utility.logging*), 517
 - CallingMessageRecord* (class in *cytoflowgui.utility.event_tracer*), 515
 - canvas* (*cytoflowgui.cytoflow_application.CytoflowApplication* attribute), 564
 - canvas* (*cytoflowgui.export_task.ExportTaskPane* attribute), 569
 - cartesian()* (in module *cytoflow.utility.util_functions*), 425
 - CategorySubset* (class in *cytoflowgui.workflow.subset*), 558
 - CategorySubsetHandler* (class in *cytoflowgui.subset_controllers*), 577
 - CFloatOrNone* (class in *cytoflow.utility.custom_traits*), 409
 - CHANGE_CURRENT_PLOT* (*cytoflowgui.workflow.workflow.Msg* attribute), 559
 - CHANGE_CURRENT_VIEW* (*cytoflowgui.workflow.workflow.Msg* attribute), 559
 - changed* (class in *cytoflowgui.workflow*), 536
 - changed* (*cytoflowgui.workflow.operations.operation_base.IWorkflowOperation* attribute), 547
 - changed* (*cytoflowgui.workflow.views.view_base.IWorkflowView* attribute), 555
 - ChangeEventRecorder* (class in *cytoflowgui.utility.event_tracer*), 516
 - ChangeMessageRecord* (class in *cytoflowgui.utility.event_tracer*), 515
 - Channel* (class in *cytoflowgui.workflow.operations.import_op*), 545
 - Channel* (class in *cytoflowgui.workflow.operations.pca*), 548
 - Channel* (class in *cytoflowgui.workflow.views.radviz*), 554
 - Channel* (class in *cytoflowgui.workflow.views.view_base*), 557
 - channel* (*cytoflow.operations.base_op_views.Op1DView* attribute), 314
 - channel* (*cytoflow.operations.binning.BinningOp* attribute), 322
 - channel* (*cytoflow.operations.binning.BinningView* attribute), 323
 - channel* (*cytoflow.operations.channel_stat.ChannelStatisticOp* attribute), 329
 - channel* (*cytoflow.operations.flowpeaks.FlowPeaks1DView* attribute), 344
 - channel* (*cytoflow.operations.gaussian.GaussianMixture1DView* attribute), 356
 - channel* (*cytoflow.operations.kmeans.KMeans1DView* attribute), 367
 - channel* (*cytoflow.operations.range.RangeOp* attribute), 390
 - channel* (*cytoflow.operations.range.RangeSelection* attribute), 392
 - channel* (*cytoflow.operations.threshold.ThresholdOp* attribute), 400
 - channel* (*cytoflow.operations.threshold.ThresholdSelection* attribute), 402
 - channel* (*cytoflow.utility.logicle_scale.LogicleScale* attribute), 418
 - channel* (*cytoflow.utility.scale.IScale* attribute), 421
 - channel* (*cytoflow.views.base_views.Base1DView* attribute), 431
 - channel* (*cytoflow.views.histogram.HistogramView* attribute), 439
 - channel* (*cytoflow.views.kde_1d.Kde1DView* attribute), 447
 - channel* (*cytoflow.views.violin.ViolinPlotView* attribute), 469
 - channel* (*cytoflowgui.experiment_pane_model.ChannelNode* attribute), 566
 - ChannelHandler* (class in

- [cytoflowgui.op_plugins.import_op](#)), 500
- [ChannelHandler](#) (class in [cytoflowgui.op_plugins.pca](#)), 503
- [ChannelHandler](#) (class in [cytoflowgui.view_plugins.parallel_coords](#)), 527
- [ChannelHandler](#) (class in [cytoflowgui.view_plugins.radviz](#)), 528
- [ChannelNode](#) (class in [cytoflowgui.experiment_pane_model](#)), 566
- [channels](#) ([cytoflow.experiment.Experiment](#) attribute), 474
- [channels](#) ([cytoflow.operations.autofluorescence.AutofluorescenceOp](#) method), 538
- [channels](#) ([cytoflow.operations.autofluorescence.AutofluorescenceOp](#) attribute), 311
- [channels](#) ([cytoflow.operations.flowpeaks.FlowPeaksOp](#) attribute), 340
- [channels](#) ([cytoflow.operations.gaussian.GaussianMixtureOp](#) attribute), 352
- [channels](#) ([cytoflow.operations.import_op.ImportOp](#) attribute), 362
- [channels](#) ([cytoflow.operations.kmeans.KMeansOp](#) attribute), 365
- [channels](#) ([cytoflow.operations.pca.PCAOp](#) attribute), 372
- [channels](#) ([cytoflow.views.base_views.BaseNDView](#) attribute), 432
- [channels](#) ([cytoflow.views.parallel_coords.ParallelCoordinatesView](#) method), 442
- [channels](#) ([cytoflow.views.parallel_coords.ParallelCoordinatesView](#) attribute), 452
- [channels](#) ([cytoflow.views.radviz.RadvizView](#) attribute), 455
- [channels](#) ([cytoflowgui.op_plugins.bead_calibration.BeadCalibrationHandler](#) attribute), 486
- [channels](#) ([cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearHandler](#) attribute), 489
- [channels](#) ([cytoflowgui.op_plugins.color_translation.ColorTranslationHandler](#) attribute), 493
- [channels](#) ([cytoflowgui.op_plugins.pca.PCAHandler](#) attribute), 503
- [channels](#) ([cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesView](#) attribute), 527
- [channels](#) ([cytoflowgui.view_plugins.radviz.RadvizHandler](#) attribute), 529
- [channels](#) ([cytoflowgui.workflow.workflow_item.WorkflowItem](#) attribute), 561
- [channels](#) ([cytoflowgui.workflow_controller.WorkflowItemHandler](#) attribute), 580
- [ChannelsNode](#) (class in [cytoflowgui.experiment_pane_model](#)), 566
- [ChannelStatisticHandler](#) (class in [cytoflowgui.op_plugins.channel_stat](#)), 491
- [ChannelStatisticOp](#) (class in [cytoflow.operations.channel_stat](#)), 329
- [ChannelStatisticPlugin](#) (class in [cytoflowgui.op_plugins.channel_stat](#)), 491
- [ChannelStatisticWorkflowOp](#) (class in [cytoflowgui.workflow.operations.channel_stat](#)), 540
- [check_tube\(\)](#) (in [cytoflow.operations.import_op](#) module), 363
- [ci\(\)](#) (in [cytoflow.utility.algorithms](#) module), 406
- [CIntOrNone](#) (class in [cytoflow.utility.custom_traits](#)), 409
- [class_name](#) ([cytoflowgui.utility.event_tracer.ChangeMessageRecord](#) attribute), 515
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.autofluorescence.AutofluorescenceOp](#) method), 537
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.bead_calibration.BeadCalibrationHandler](#) method), 538
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.binning.BinningWorkflowOp](#) method), 539
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.bleedthrough_linear.BleedthroughLinearHandler](#) method), 540
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.channel_stat.ChannelStatisticOp](#) method), 540
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.color_translation.ColorTranslationHandler](#) method), 541
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.density.DensityGateWorkflowOp](#) method), 542
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.flowpeaks.FlowPeakWorkflowOp](#) method), 543
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.gaussian_1d.Gaussian1DWorkflowOp](#) method), 544
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.gaussian_2d.Gaussian2DWorkflowOp](#) method), 545
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.import_op.ImportWorkflowOp](#) method), 546
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.kmeans.KMeansWorkflowOp](#) method), 547
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.operation_base.IWorkflowOp](#) method), 548
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.operation_base.WorkflowOp](#) method), 548
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.pca.PCAWorkflowOp](#) method), 548
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.polygon.PolygonSelectionWorkflowOp](#) method), 549
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.quad.QuadSelectionWorkflowOp](#) method), 549
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.quad.QuadWorkflowOp](#) method), 549
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.range.RangeSelectionWorkflowOp](#) method), 549
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.range2d.Range2DSelectionWorkflowOp](#) method), 550
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.ratio.RatioWorkflowOp](#) method), 550
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOp](#) method), 551
- [clear_estimate\(\)](#) ([cytoflowgui.workflow.operations.threshold.ThresholdWorkflowOp](#) method), 551

method), 551

clear_estimate() (cytoflowgui.workflow.operations.xform_stat.TransformStat WorkflowOp method), 552

clip() (cytoflow.utility.hlog_scale.HlogScale method), 414

clip() (cytoflow.utility.linear_scale.LinearScale method), 417

clip() (cytoflow.utility.log_scale.LogScale method), 417

clip() (cytoflow.utility.logicle_scale.LogicleScale method), 419

clip() (cytoflow.utility.scale.IScale method), 422

clone() (cytoflow.experiment.Experiment method), 476

closable (cytoflowgui.experiment_pane.ExperimentBrowser attribute), 565

closable (cytoflowgui.export_task.ExportPane attribute), 568

closable (cytoflowgui.view_pane.PlotParamsPane attribute), 579

close() (cytoflowgui.editors.vertical_notebook.VerticalNotebook method), 483

close() (cytoflowgui.import_dialog.ExperimentDialogHandler method), 573

close() (cytoflowgui.utility.event_tracer.MultiThreadChangeEventTracer method), 516

closed() (cytoflowgui.import_dialog.ExperimentDialogHandler method), 573

COLOR_TRANSLATION (cytoflowgui.workflow.operations.task_plugins.task_plugin_base.OpHandler attribute), 550

ColorTextEditor (class in cytoflowgui.editors.color_text_editor), 478

ColorTranslationDiagnostic (class in cytoflow.operations.color_translation), 334

ColorTranslationHandler (class in cytoflowgui.op_plugins.color_translation), 492

ColorTranslationOp (class in cytoflow.operations.color_translation), 331

ColorTranslationPlugin (class in cytoflowgui.op_plugins.color_translation), 493

ColorTranslationViewHandler (class in cytoflowgui.op_plugins.color_translation), 493

ColorTranslationWorkflowOp (class in cytoflowgui.workflow.operations.color_translation), 541

ColorTranslationWorkflowView (class in cytoflowgui.workflow.operations.color_translation), 541

column_facet (cytoflow.views.table.TableView attribute), 468

condition (cytoflow.utility.logicle_scale.LogicleScale attribute), 418

condition (cytoflow.utility.scale.IScale attribute), 422

condition (cytoflowgui.experiment_pane_model.ConditionNode attribute), 566

ConditionNode (class in cytoflowgui.experiment_pane_model), 566

conditions (cytoflow.experiment.Experiment attribute), 474

conditions (cytoflow.operations.import_op.ImportOp attribute), 362

conditions (cytoflow.operations.import_op.Tube attribute), 361

conditions (cytoflowgui.editors.subset_list_editor.SubsetListEditor attribute), 480

conditions (cytoflowgui.import_dialog.Tube attribute), 571

conditions (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 562

conditions (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580

conditions_equal() (cytoflow.operations.import_op.Tube method), 362

conditions_hash() (cytoflowgui.import_dialog.Tube method), 571

conditions_node (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580

ConditionsNode (class in cytoflowgui.experiment_pane_model), 566

control (cytoflowgui.op_plugins.op_plugin_base.OpHandler attribute), 502

context (cytoflowgui.view_plugins.view_plugin_base.ViewHandler attribute), 535

Control (class in cytoflowgui.workflow.operations.bleedthrough_linear), 539

Control (class in cytoflowgui.workflow.operations.color_translation), 541

control_conditions (cytoflow.operations.bleedthrough_linear.Bleedthrough attribute), 326

control_conditions (cytoflow.operations.color_translation.ColorTranslation attribute), 332

ControlHandler (class in cytoflowgui.op_plugins.bleedthrough_linear), 489

ControlHandler (class in cytoflowgui.op_plugins.color_translation), 492

controller (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564

controls (cytoflow.operations.bleedthrough_linear.BleedthroughLinearOp attribute), 326

controls (cytoflow.operations.color_translation.ColorTranslationOp attribute), 331

ConvertingBool (class in cytoflowgui.import_dialog), 572

counter (cytoflowgui.import_dialog.ExperimentDialogModel attribute), 572

cov2corr() (in module cytoflow.utility.util_functions),
 426
 create() (cytoflowgui.export_task.ExportTaskPane
 method), 569
 create_central_pane()
 (cytoflowgui.export_task.ExportTask method),
 569
 create_contents() (cytoflowgui.experiment_pane.ExperimentPane
 method), 565
 create_contents() (cytoflowgui.export_task.ExportPane
 method), 568
 create_contents() (cytoflowgui.help_pane.HelpDockPane
 method), 570
 create_contents() (cytoflowgui.view_pane.PlotParamsPane
 method), 579
 create_contents() (cytoflowgui.view_pane.ViewDockPane
 method), 579
 create_contents() (cytoflowgui.workflow_pane.WorkflowDockPane
 method), 582
 create_control() (cytoflowgui.editors.vertical_notebook.VerticalNotebook
 method), 482
 create_dock_panes()
 (cytoflowgui.export_task.ExportTask method),
 569
 create_page() (cytoflowgui.editors.vertical_notebook.VerticalNotebook
 method), 482
 current_plot (cytoflowgui.workflow.views.view_base.WorkflowView
 attribute), 556
 current_view (cytoflowgui.workflow.workflow_item.WorkflowItem
 attribute), 561
 custom_editor() (cytoflowgui.editors.instance_handler_editor.InstanceHandlerEditor
 method), 479
 custom_editor_class
 (cytoflowgui.editors.instance_handler_editor.InstanceHandlerEditor
 attribute), 479
 cytoflow
 module, 310
 cytoflow.experiment
 module, 473
 cytoflow.operations
 module, 311
 cytoflow.operations.autofluorescence
 module, 311
 cytoflow.operations.base_op_views
 module, 313
 cytoflow.operations.bead_calibration
 module, 315
 cytoflow.operations.binning
 module, 322
 cytoflow.operations.bleedthrough_linear
 module, 325
 cytoflow.operations.channel_stat
 module, 329
 cytoflow.operations.color_translation
 module, 331
 cytoflow.operations.density
 module, 334
 cytoflow.operations.flowpeaks
 module, 340
 cytoflow.operations.frame_stat
 module, 350
 cytoflow.operations.gaussian
 module, 351
 cytoflow.operations.i_operation
 module, 360
 cytoflow.operations.import_op
 module, 361
 cytoflow.operations.kmeans
 module, 364
 cytoflow.operations.pca
 module, 371
 cytoflow.operations.polygon
 module, 376
 cytoflow.operations.quad
 module, 382
 cytoflow.operations.range
 module, 390
 cytoflow.operations.range2d
 module, 394
 cytoflow.operations.ratio
 module, 399
 cytoflow.operations.threshold
 module, 400
 cytoflow.operations.xform_stat
 module, 404
 cytoflow.scripts
 module, 406
 cytoflow.scripts.channel_voltages
 module, 406
 cytoflow.scripts.fcs_metadata
 module, 406
 cytoflow.scripts.parse_beads
 module, 406
 cytoflow.scripts.split_fcs
 module, 406
 cytoflow.utility
 module, 406
 cytoflow.utility.algorithms
 module, 406
 cytoflow.utility.custom_traits
 module, 407
 cytoflow.utility.cytoflow_errors
 module, 411
 cytoflow.utility.docstring
 module, 412
 cytoflow.utility.fcswrite
 module, 413
 cytoflow.utility.hlog_scale

- module, 414
- cytoflow.utility.linear_scale
 - module, 417
- cytoflow.utility.log_scale
 - module, 417
- cytoflow.utility.logging
 - module, 417
- cytoflow.utility.logicle_scale
 - module, 418
- cytoflow.utility.scale
 - module, 421
- cytoflow.utility.util_functions
 - module, 422
- cytoflow.views
 - module, 426
- cytoflow.views.bar_chart
 - module, 426
- cytoflow.views.base_views
 - module, 429
- cytoflow.views.densityplot
 - module, 435
- cytoflow.views.export_fcs
 - module, 438
- cytoflow.views.histogram
 - module, 439
- cytoflow.views.histogram_2d
 - module, 442
- cytoflow.views.i_selectionview
 - module, 446
- cytoflow.views.i_view
 - module, 446
- cytoflow.views.kde_1d
 - module, 446
- cytoflow.views.kde_2d
 - module, 449
- cytoflow.views.parallel_coords
 - module, 452
- cytoflow.views.radviz
 - module, 455
- cytoflow.views.scatterplot
 - module, 458
- cytoflow.views.stats_1d
 - module, 461
- cytoflow.views.stats_2d
 - module, 464
- cytoflow.views.table
 - module, 468
- cytoflow.views.violin
 - module, 469
- CytoflowApplication (class *in* *cytoflowgui.cytoflow_application*), 564
- CytoflowError, 411
- cytoflowgui
 - module, 478
- cytoflowgui.cytoflow_application
 - module, 564
- cytoflowgui.editors
 - module, 478
- cytoflowgui.editors.color_text_editor
 - module, 478
- cytoflowgui.editors.ext_enum_editor
 - module, 478
- cytoflowgui.editors.instance_handler_editor
 - module, 479
- cytoflowgui.editors.range_slider
 - module, 479
- cytoflowgui.editors.subset_list_editor
 - module, 480
- cytoflowgui.editors.tab_list_editor
 - module, 480
- cytoflowgui.editors.toggle_button
 - module, 480
- cytoflowgui.editors.value_bounds_editor
 - module, 480
- cytoflowgui.editors.vertical_list_editor
 - module, 481
- cytoflowgui.editors.vertical_notebook
 - module, 481
- cytoflowgui.editors.vertical_notebook_editor
 - module, 483
- cytoflowgui.editors.zoomable_html_editor
 - module, 483
- cytoflowgui.experiment_pane
 - module, 565
- cytoflowgui.experiment_pane_model
 - module, 565
- cytoflowgui.export_task
 - module, 568
- cytoflowgui.help_pane
 - module, 570
- cytoflowgui.import_dialog
 - module, 570
- cytoflowgui.matplotlib_backend_local
 - module, 573
- cytoflowgui.matplotlib_backend_remote
 - module, 575
- cytoflowgui.op_plugins
 - module, 484
- cytoflowgui.op_plugins.autofluorescence
 - module, 484
- cytoflowgui.op_plugins.bead_calibration
 - module, 486
- cytoflowgui.op_plugins.binning
 - module, 488
- cytoflowgui.op_plugins.bleedthrough_linear
 - module, 489
- cytoflowgui.op_plugins.channel_stat
 - module, 491

cytoflowgui.op_plugins.color_translation
module, 491

cytoflowgui.op_plugins.density
module, 493

cytoflowgui.op_plugins.flowpeaks
module, 494

cytoflowgui.op_plugins.gaussian_1d
module, 496

cytoflowgui.op_plugins.gaussian_2d
module, 497

cytoflowgui.op_plugins.i_op_plugin
module, 498

cytoflowgui.op_plugins.import_op
module, 499

cytoflowgui.op_plugins.kmeans
module, 501

cytoflowgui.op_plugins.op_plugin_base
module, 502

cytoflowgui.op_plugins.pca
module, 502

cytoflowgui.op_plugins.polygon
module, 503

cytoflowgui.op_plugins.quad
module, 504

cytoflowgui.op_plugins.range
module, 505

cytoflowgui.op_plugins.range2d
module, 507

cytoflowgui.op_plugins.ratio
module, 508

cytoflowgui.op_plugins.tasbe
module, 508

cytoflowgui.op_plugins.threshold
module, 513

cytoflowgui.op_plugins.xform_stat
module, 514

cytoflowgui.preferences
module, 576

cytoflowgui.run
module, 576

cytoflowgui.subset_controllers
module, 577

cytoflowgui.util
module, 577

cytoflowgui.utility
module, 515

cytoflowgui.utility.event_tracer
module, 515

cytoflowgui.utility.logging
module, 517

cytoflowgui.view_pane
module, 578

cytoflowgui.view_plugins
module, 517

cytoflowgui.view_plugins.bar_chart
module, 518

cytoflowgui.view_plugins.density
module, 519

cytoflowgui.view_plugins.export_fcs
module, 519

cytoflowgui.view_plugins.histogram
module, 520

cytoflowgui.view_plugins.histogram_2d
module, 522

cytoflowgui.view_plugins.i_view_plugin
module, 523

cytoflowgui.view_plugins.kde_1d
module, 524

cytoflowgui.view_plugins.kde_2d
module, 524

cytoflowgui.view_plugins.parallel_coords
module, 526

cytoflowgui.view_plugins.radviz
module, 527

cytoflowgui.view_plugins.scatterplot
module, 529

cytoflowgui.view_plugins.stats_1d
module, 530

cytoflowgui.view_plugins.stats_2d
module, 531

cytoflowgui.view_plugins.table
module, 533

cytoflowgui.view_plugins.view_plugin_base
module, 533

cytoflowgui.view_plugins.violin
module, 535

cytoflowgui.workflow
module, 536

cytoflowgui.workflow.operations
module, 537

cytoflowgui.workflow.operations.autofluorescence
module, 537

cytoflowgui.workflow.operations.bead_calibration
module, 538

cytoflowgui.workflow.operations.binning
module, 539

cytoflowgui.workflow.operations.bleedthrough_linear
module, 539

cytoflowgui.workflow.operations.channel_stat
module, 540

cytoflowgui.workflow.operations.color_translation
module, 540

cytoflowgui.workflow.operations.density
module, 541

cytoflowgui.workflow.operations.flowpeaks
module, 542

cytoflowgui.workflow.operations.gaussian_1d
module, 543

cytoflowgui.workflow.operations.gaussian_2d module, 544
 cytoflowgui.workflow.operations.import_op module, 545
 cytoflowgui.workflow.operations.kmeans module, 546
 cytoflowgui.workflow.operations.operation_base module, 547
 cytoflowgui.workflow.operations.pca module, 548
 cytoflowgui.workflow.operations.polygon module, 548
 cytoflowgui.workflow.operations.quad module, 549
 cytoflowgui.workflow.operations.range module, 549
 cytoflowgui.workflow.operations.range2d module, 550
 cytoflowgui.workflow.operations.ratio module, 550
 cytoflowgui.workflow.operations.tasbe module, 550
 cytoflowgui.workflow.operations.threshold module, 551
 cytoflowgui.workflow.operations.xform_stat module, 551
 cytoflowgui.workflow.serialization module, 557
 cytoflowgui.workflow.subset module, 558
 cytoflowgui.workflow.views module, 552
 cytoflowgui.workflow.views.bar_chart module, 552
 cytoflowgui.workflow.views.density module, 552
 cytoflowgui.workflow.views.export_fcs module, 552
 cytoflowgui.workflow.views.histogram module, 553
 cytoflowgui.workflow.views.histogram_2d module, 553
 cytoflowgui.workflow.views.kde_1d module, 553
 cytoflowgui.workflow.views.kde_2d module, 553
 cytoflowgui.workflow.views.parallel_coords module, 554
 cytoflowgui.workflow.views.radviz module, 554
 cytoflowgui.workflow.views.scatterplot module, 554
 cytoflowgui.workflow.views.stats_1d module, 554
 cytoflowgui.workflow.views.stats_2d module, 555
 cytoflowgui.workflow.views.table module, 555
 cytoflowgui.workflow.views.view_base module, 555
 cytoflowgui.workflow.views.violin module, 557
 cytoflowgui.workflow.workflow module, 558
 cytoflowgui.workflow.workflow_item module, 561
 cytoflowgui.workflow_controller module, 579
 cytoflowgui.workflow_pane module, 581
 CytoflowOpError, 411
 CytoflowOpWarning, 411
 CytoflowPreferences (class in *cytoflowgui.preferences*), 576
 CytoflowPreferencesPane (class in *cytoflowgui.preferences*), 576
 CytoflowViewError, 411
 CytoflowViewWarning, 412
 CytoflowWarning, 411

D

data (*cytoflow.experiment.Experiment* attribute), 474
 data (*cytoflow.utility.scale.IScale* attribute), 422
 data (*cytoflowgui.editors.vertical_notebook.VerticalNotebookPage* attribute), 481
 Data1DPlotParams (class in *cytoflowgui.workflow.views.view_base*), 557
 Data2DPlotParams (class in *cytoflowgui.workflow.views.view_base*), 557
 data_set (*cytoflow.operations.import_op.ImportOp* attribute), 362
 DataPlotParams (class in *cytoflowgui.workflow.views.view_base*), 557
 debug (*cytoflowgui.cytoflow_application.CytoflowApplication* attribute), 564
 default_layout (*cytoflowgui.cytoflow_application.CytoflowApplication* attribute), 564
 default_suffix (*cytoflowgui.util.DefaultFileDialog* attribute), 578
 default_traits_view() (*cytoflowgui.export_task.ExportPane* method), 568
 default_view (*cytoflowgui.workflow.workflow_item.WorkflowItem* attribute), 562
 default_view() (*cytoflow.operations.autofluorescence.AutofluorescenceC* method), 313
 default_view() (*cytoflow.operations.bead_calibration.BeadCalibrationC* method), 319

default_view() (cytoflow.operations.binning.BinningOp method), 323

default_view() (cytoflow.operations.bleedthrough_linear_workflow.BleedthroughLinearWorkflowOp method), 329

default_view() (cytoflow.operations.color_translation.ColorTranslationWorkflowOp method), 334

default_view() (cytoflow.operations.density.DensityGateOp method), 337

default_view() (cytoflow.operations.flowpeaks.FlowPeaksOp method), 343

default_view() (cytoflow.operations.gaussian.GaussianMixtureOp method), 355

default_view() (cytoflow.operations.i_operation.IOperation method), 361

default_view() (cytoflow.operations.kmeans.KMeansOp method), 367

default_view() (cytoflow.operations.polygon.PolygonOp method), 379

default_view() (cytoflow.operations.quad.QuadOp method), 385

default_view() (cytoflow.operations.range.RangeOp method), 392

default_view() (cytoflow.operations.range2d.Range2DWorkflowOp method), 396

default_view() (cytoflow.operations.threshold.ThresholdOp method), 402

default_view() (cytoflowgui.workflow.operations.autofluorescence.AutofluorescenceWorkflowOp method), 537

default_view() (cytoflowgui.workflow.operations.bead_counting.BeadCountingWorkflowOp method), 538

default_view() (cytoflowgui.workflow.operations.binning.BinningWorkflowOp method), 539

default_view() (cytoflowgui.workflow.operations.bleedthrough_linear_workflow.BleedthroughLinearWorkflowOp method), 539

default_view() (cytoflowgui.workflow.operations.color_translation.ColorTranslationWorkflowOp method), 541

default_view() (cytoflowgui.workflow.operations.density.DensityGateWorkflowOp method), 542

default_view() (cytoflowgui.workflow.operations.flowpeaks.FlowPeaksWorkflowOp method), 542

default_view() (cytoflowgui.workflow.operations.gaussian.GaussianMixture1DWorkflowOp method), 544

default_view() (cytoflowgui.workflow.operations.gaussian.GaussianMixture2DWorkflowOp method), 544

default_view() (cytoflowgui.workflow.operations.kmeans.KMeansPolygonOp method), 546

default_view() (cytoflowgui.workflow.operations.polygon.PolygonQuadSelectionView method), 549

default_view() (cytoflowgui.workflow.operations.quad.QuadWorkflowOp method), 549

default_view() (cytoflowgui.workflow.operations.range.RangeWorkflowOp method), 549

default_view() (cytoflowgui.workflow.operations.range2d.Range2DWorkflowOp method), 550

default_view() (cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOp method), 551

DefaultView() (cytoflowgui.workflow.operations.threshold.ThresholdWorkflowOp method), 551

DefaultFileDialog (class in cytoflowgui.util), 578

deletable (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 482

deletable (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580

deletable_object (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 482

deletable_object_trait (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 482

delete (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 482

delete (cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor attribute), 483

denominator (cytoflow.operations.ratio.RatioOp attribute), 399

DensityGateHandler (class in cytoflowgui.op_plugins.density), 493

DensityGateOp (class in cytoflow.operations.density), 335

DensityGatePlugin (class in cytoflowgui.op_plugins.density), 493

DensityGateView (class in cytoflowgui.view_plugins.density), 519

DensityGateWorkflowOp (class in cytoflowgui.workflow.operations.density), 493

DensityPolygonOp (class in cytoflow.operations.polygon), 381

DensityQuadSelectionView (class in cytoflow.operations.quad), 387

DensityRangeOp (class in cytoflow.views.densityplot), 435

DensityWorkflowOp (class in cytoflowgui.workflow.views.density), 552

Deprecated (class in cytoflow.utility.custom_traits), 410

description (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 481

description_object (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 481

description_object_trait (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 481

dialog_model (cytoflowgui.op_plugins.import_op.ImportHandler attribute), 500

dispose() (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage method), 482

do_estimate (cytoflowgui.workflow.operations.operation_base.IWorkflowOperation attribute), 547

dock_area (cytoflowgui.experiment_pane.ExperimentBrowserDockPanel attribute), 565

dock_area (cytoflowgui.export_task.ExportPanel attribute), 568

dock_area (cytoflowgui.view_pane.PlotParamsPanel attribute), 579

dpi (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564

dpi (cytoflowgui.export_task.ExportTask attribute), 569

DPI (cytoflowgui.matplotlib_backend_local.Msg attribute), 574

DPI (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575

DRAW (cytoflowgui.matplotlib_backend_local.Msg attribute), 574

DRAW (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575

draw() (cytoflowgui.matplotlib_backend_remote.FigureCanvasAggRenderer method), 576

draw_if_interactive() (in module cytoflowgui.matplotlib_backend_remote), 576

dummy_experiment (cytoflowgui.import_dialog.ExperimentDialog attribute), 572

E

edit_traits() (cytoflowgui.workflow.workflow_item.WorkflowItem method), 563

editor (cytoflowgui.editors.vertical_notebook.VerticalNotebook attribute), 482

emit() (cytoflowgui.utility.logging.CallbackHandler method), 517

enum_conditions_and_files() (cytoflowgui.workflow.views.export_fcs.ExportFCSWorkflowView method), 553

enum_files() (cytoflow.views.export_fcs.ExportFCS method), 439

enum_plots() (cytoflow.operations.base_op_views.ByView method), 314

enum_plots() (cytoflow.views.bar_chart.BarChartView method), 428

enum_plots() (cytoflow.views.base_views.Base1DStatisticsView method), 433

enum_plots() (cytoflow.views.base_views.Base2DStatisticsView method), 434

enum_plots() (cytoflow.views.base_views.BaseStatisticsView method), 433

enum_plots() (cytoflow.views.stats_1d.Stats1DView method), 462

enum_plots() (cytoflow.views.stats_2d.Stats2DView method), 466

enum_plots() (cytoflowgui.workflow.operations.kmeans.KMeansWorkflowView method), 547

enum_plots() (cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView method), 551

enum_plots() (cytoflowgui.workflow.views.view_base.WorkflowByView method), 557

enum_plots() (cytoflowgui.workflow.views.view_base.WorkflowFacetView method), 556

enum_plots() (cytoflowgui.workflow.views.view_base.WorkflowView method), 556

error_statistic (cytoflow.views.bar_chart.BarChartView attribute), 426

error_statistic (cytoflow.views.base_views.Base1DStatisticsView attribute), 433

error_statistic (cytoflow.views.stats_1d.Stats1DView attribute), 461

ESTIMATE (cytoflowgui.workflow.Changed attribute), 536

ESTIMATE (cytoflowgui.workflow.workflow.Msg attribute), 559

estimate() (cytoflow.operations.autofluorescence.AutofluorescenceOperation method), 313

estimate() (cytoflow.operations.bead_calibration.BeadCalibrationOperation method), 319

estimate() (cytoflow.operations.bleedthrough_linear.BleedthroughLinearOperation method), 328

estimate() (cytoflow.operations.color_translation.ColorTranslationOperation method), 332

estimate() (cytoflow.operations.density.DensityGateOperation method), 337

estimate() (cytoflow.operations.flowpeaks.FlowPeaksOperation method), 343

estimate() (cytoflow.operations.gaussian.GaussianMixtureOperation method), 355

estimate() (cytoflow.operations.i_operation.IOperation method), 360

estimate() (cytoflow.operations.kmeans.KMeansOperation method), 366

estimate() (cytoflow.operations.pca.PCAOperation method), 373

estimate() (cytoflowgui.workflow.operations.autofluorescence.AutofluorescenceOperation method), 537

estimate() (cytoflowgui.workflow.operations.bead_calibration.BeadCalibrationOperation method), 538

estimate() (cytoflowgui.workflow.operations.bleedthrough_linear.BleedthroughLinearOperation method), 547

- method), 539
- estimate() (cytoflowgui.workflow.operations.color_translator.ExportDialogModelWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 541
- estimate() (cytoflowgui.workflow.operations.flowpeaks.FlowPeaks1DWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 542
- estimate() (cytoflowgui.workflow.operations.gaussian_1d.ExportMixture1DWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 543
- estimate() (cytoflowgui.workflow.operations.gaussian_2d.ExportMixture2DWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 544
- estimate() (cytoflowgui.workflow.operations.import_op.ImportWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 545
- estimate() (cytoflowgui.workflow.operations.kmeans.KMeansWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 546
- estimate() (cytoflowgui.workflow.operations.pca.PCAWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 548
- estimate() (cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOp (class in cytoflowgui.import_dialog), 572
method), 551
- estimate() (cytoflowgui.workflow.workflow_item.WorkflowItem (class in cytoflowgui.workflow_item), 563
method), 563
- estimate_error (cytoflowgui.workflow.workflow_item.WorkflowItem (class in cytoflowgui.workflow_item), 563
attribute), 562
- ESTIMATE_RESULT (cytoflowgui.workflow.Changed attribute), 536
- estimate_warning (cytoflowgui.workflow.workflow_item.WorkflowItem (class in cytoflowgui.workflow_item), 563
attribute), 562
- EVAL (cytoflowgui.workflow.workflow.Msg attribute), 559
- eval_bool() (in module cytoflowgui.import_dialog), 571
- evaluate() (cytoflowgui.import_dialog.ConvertingBool method), 572
- events (cytoflow.operations.import_op.ImportOp (class in cytoflow.operations.import_op), 362
attribute), 362
- exception (cytoflowgui.utility.event_tracer.ExitMessageRecord (class in cytoflowgui.utility.event_tracer), 515
attribute), 516
- EXEC (cytoflowgui.workflow.workflow.Msg attribute), 559
- ExitMessageRecord (class in cytoflowgui.utility.event_tracer), 515
- expand_class_attributes() (in module cytoflow.utility.docstring), 412
- expand_method_parameters() (in module cytoflow.utility.docstring), 412
- Experiment (class in cytoflow.experiment), 473
- experiment (cytoflow.utility.logicle_scale.LogicleScale attribute), 418
- experiment (cytoflow.utility.scale.IScale attribute), 421
- experiment_view() (cytoflowgui.workflow_controller.WorkflowController (class in cytoflowgui.workflow_controller), 581
method), 581
- experiment_view() (cytoflowgui.workflow_controller.WorkflowItemHandler (class in cytoflowgui.workflow_controller), 581
method), 581
- ExperimentBrowserDockPane (class in cytoflowgui.experiment_pane), 565
- ExperimentColumn (class in cytoflowgui.import_dialog), 571
- ExperimentDialogHandler (class in cytoflowgui.import_dialog), 572
- ExportDialogModelWorkflowOp (class in cytoflowgui.import_dialog), 572
- ExportWorkflowOp (class in cytoflowgui.import_dialog), 572
- ExportFCSHandler (class in cytoflow.views.export_fcs), 438
- ExportFCSHandler (class in cytoflowgui.view_plugins.export_fcs), 520
- ExportFCSPlugin (class in cytoflowgui.view_plugins.export_fcs), 520
- ExportFCSWorkflowView (class in cytoflowgui.workflow.views.export_fcs), 553
- ExportFigurePlugin (class in cytoflowgui.export_task), 569
- ExportPane (class in cytoflowgui.export_task), 568
- ExportTask (class in cytoflowgui.export_task), 569
- ExportTaskPane (class in cytoflowgui.export_task), 568
- ExtendableEnumEditor (class in cytoflowgui.editors.ext_enum_editor), 479
- extra_items (cytoflowgui.editors.ext_enum_editor.ExtendableEnumEditor attribute), 479
- ## F
- facets (cytoflow.operations.base_op_views.ByView attribute), 314
- facets (cytoflow.operations.density.DensityGateView attribute), 337
- facets (cytoflow.operations.flowpeaks.FlowPeaks1DView attribute), 344
- facets (cytoflow.operations.flowpeaks.FlowPeaks2DDensityView attribute), 348
- facets (cytoflow.operations.flowpeaks.FlowPeaks2DView attribute), 346
- facets (cytoflow.operations.gaussian.GaussianMixture1DView attribute), 356
- facets (cytoflow.operations.gaussian.GaussianMixture2DView attribute), 358
- facets (cytoflow.operations.kmeans.KMeans1DView attribute), 367
- facets (cytoflow.operations.kmeans.KMeans2DView attribute), 369
- FigureCanvas (in module cytoflowgui.matplotlib_backend_remote), 576
- FigureCanvasAggRemote (class in cytoflowgui.matplotlib_backend_remote), 575

FigureCanvasQTAggLocal (class in cytoflowgui.matplotlib_backend_local), 574

file (cytoflow.operations.import_op.Tube attribute), 361

file (cytoflowgui.import_dialog.Tube attribute), 571

filename (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564

fill (cytoflow.operations.channel_stat.ChannelStatisticOp attribute), 330

fill (cytoflow.operations.frame_stat.FrameStatisticOp attribute), 351

fill (cytoflow.operations.xform_stat.TransformStatisticOp attribute), 405

filter() (cytoflow.utility.logging.MplFilter method), 417

filter_unpicklable() (in module cytoflowgui.workflow.workflow), 559

find_outliers (cytoflow.operations.flowpeaks.FlowPeaksOp attribute), 341

find_section() (in module cytoflow.utility.docstring), 412

floatable (cytoflowgui.experiment_pane.ExperimentBrowser attribute), 565

floatable (cytoflowgui.export_task.ExportPane attribute), 568

floatable (cytoflowgui.view_pane.PlotParamsPane attribute), 579

FloatOrNone (class in cytoflow.utility.custom_traits), 409

FlowPeaks1DView (class in cytoflow.operations.flowpeaks), 344

FlowPeaks2DDensityView (class in cytoflow.operations.flowpeaks), 348

FlowPeaks2DView (class in cytoflow.operations.flowpeaks), 346

FlowPeaksHandler (class in cytoflowgui.op_plugins.flowpeaks), 495

FlowPeaksOp (class in cytoflow.operations.flowpeaks), 340

FlowPeaksPlugin (class in cytoflowgui.op_plugins.flowpeaks), 495

FlowPeaksViewHandler (class in cytoflowgui.op_plugins.flowpeaks), 495

FlowPeaksWorkflowOp (class in cytoflowgui.workflow.operations.flowpeaks), 542

FlowPeaksWorkflowView (class in cytoflowgui.workflow.operations.flowpeaks), 543

force_linear (cytoflow.operations.bead_calibration.BeadCalibrationOp attribute), 316

foreground_color (cytoflowgui.editors.color_text_editor.ColorTextEditor attribute), 478

format_value() (cytoflowgui.experiment_pane_model.StringNode method), 568

FrameStatisticOp (class in cytoflow.operations.frame_stat), 350

friend_id (cytoflow.views.histogram_2d.Histogram2DView attribute), 443

friendly_id (cytoflow.operations.i_operation.IOperation attribute), 360

friendly_id (cytoflow.views.i_view.IView attribute), 446

friendly_id (cytoflowgui.workflow.operations.flowpeaks.FlowPeaksWorkflowOp attribute), 543

friendly_id (cytoflowgui.workflow.operations.kmeans.KMeansWorkflowView attribute), 546

friendly_id (cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView attribute), 551

friendly_id (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 561

friendly_id (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580

function (cytoflow.operations.channel_stat.ChannelStatisticOp attribute), 330

function (cytoflow.operations.frame_stat.FrameStatisticOp attribute), 350

function (cytoflow.operations.xform_stat.TransformStatisticOp attribute), 405

G

GaussianMixture1DHandler (class in cytoflowgui.op_plugins.gaussian_1d), 496

GaussianMixture1DPlugin (class in cytoflowgui.op_plugins.gaussian_1d), 496

GaussianMixture1DView (class in cytoflow.operations.gaussian), 356

GaussianMixture1DViewHandler (class in cytoflowgui.op_plugins.gaussian_1d), 496

GaussianMixture1DWorkflowOp (class in cytoflowgui.workflow.operations.gaussian_1d), 543

GaussianMixture1DWorkflowView (class in cytoflowgui.workflow.operations.gaussian_1d), 544

GaussianMixture2DHandler (class in cytoflowgui.op_plugins.gaussian_2d), 498

GaussianMixture2DPlugin (class in cytoflowgui.op_plugins.gaussian_2d), 498

GaussianMixture2DView (class in cytoflow.operations.gaussian), 358

GaussianMixture2DViewHandler (class in cytoflowgui.op_plugins.gaussian_2d), 498

GaussianMixture2DWorkflowOp (class in cytoflowgui.workflow.operations.gaussian_2d), 545

GaussianMixture2DWorkflowView (class in cytoflowgui.workflow.operations.gaussian_2d), 545

GaussianMixtureOp (class in `cytoflow.operations.gaussian`), 351

geom_mean() (in module `cytoflow.utility.util_functions`), 423

geom_sd() (in module `cytoflow.utility.util_functions`), 424

geom_sd_range() (in module `cytoflow.utility.util_functions`), 424

geom_sem() (in module `cytoflow.utility.util_functions`), 424

geom_sem_range() (in module `cytoflow.utility.util_functions`), 425

geomean_95ci() (in module `cytoflowgui.workflow.operations.channel_stat`), 540

geomean_95ci() (in module `cytoflowgui.workflow.operations.xform_stat`), 552

get() (`cytoflow.utility.custom_traits.Deprecated` method), 411

get() (`cytoflow.utility.custom_traits.Removed` method), 410

get_cell_color() (`cytoflowgui.import_dialog.ExperimentDialog` method), 571

get_change_event_collector() (`cytoflowgui.utility.event_tracer.MultiThreadRecordContainer` method), 516

get_class_attributes() (in module `cytoflow.utility.docstring`), 412

get_default_scale() (in module `cytoflow.utility.scale`), 422

get_default_value() (`cytoflow.utility.custom_traits.ScaleEnum` method), 410

get_handler() (`cytoflowgui.op_plugins.autofluorescence.AutofluorescencePlugin` method), 486

get_handler() (`cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin` method), 488

get_handler() (`cytoflowgui.op_plugins.binning.BinningPlugin` method), 488

get_handler() (`cytoflowgui.op_plugins.bleedthrough_lineage.BleedthroughLineagePlugin` method), 491

get_handler() (`cytoflowgui.op_plugins.channel_stat.ChannelStatPlugin` method), 491

get_handler() (`cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin` method), 493

get_handler() (`cytoflowgui.op_plugins.density.DensityGatePlugin` method), 494

get_handler() (`cytoflowgui.op_plugins.flowpeaks.FlowPeaksPlugin` method), 496

get_handler() (`cytoflowgui.op_plugins.gaussian_1d.Gaussian1DPlugin` method), 497

get_handler() (`cytoflowgui.op_plugins.gaussian_2d.Gaussian2DPlugin` method), 498

get_handler() (`cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin` method), 499

get_handler() (`cytoflowgui.op_plugins.import_op.ImportPlugin` method), 501

get_handler() (`cytoflowgui.op_plugins.kmeans.KMeansPlugin` method), 502

get_handler() (`cytoflowgui.op_plugins.pca.PCAPlugin` method), 503

get_handler() (`cytoflowgui.op_plugins.polygon.PolygonPlugin` method), 504

get_handler() (`cytoflowgui.op_plugins.quad.QuadPlugin` method), 505

get_handler() (`cytoflowgui.op_plugins.range.RangePlugin` method), 507

get_handler() (`cytoflowgui.op_plugins.range2d.Range2DPlugin` method), 507

get_handler() (`cytoflowgui.op_plugins.ratio.RatioPlugin` method), 508

get_handler() (`cytoflowgui.op_plugins.tasbe.TasbePlugin` method), 513

get_handler() (`cytoflowgui.op_plugins.threshold.ThresholdPlugin` method), 514

get_handler() (`cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin` method), 514

get_handler() (`cytoflowgui.view_plugins.bar_chart.BarChartPlugin` method), 519

get_handler() (`cytoflowgui.view_plugins.density.DensityPlugin` method), 519

get_handler() (`cytoflowgui.view_plugins.export_fcs.ExportFCSPlugin` method), 520

get_handler() (`cytoflowgui.view_plugins.histogram.HistogramPlugin` method), 522

get_handler() (`cytoflowgui.view_plugins.histogram_2d.Histogram2DPlugin` method), 523

get_handler() (`cytoflowgui.view_plugins.i_view_plugin.IViewPlugin` method), 523

get_handler() (`cytoflowgui.view_plugins.kde_1d.Kde1DPlugin` method), 524

get_handler() (`cytoflowgui.view_plugins.kde_2d.Kde2DPlugin` method), 526

get_handler() (`cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesPlugin` method), 527

get_handler() (`cytoflowgui.view_plugins.radviz.RadvizPlugin` method), 529

get_handler() (`cytoflowgui.view_plugins.scatterplot.ScatterplotPlugin` method), 529

get_handler() (`cytoflowgui.view_plugins.stats_1d.Stats1DPlugin` method), 531

get_handler() (`cytoflowgui.view_plugins.stats_2d.Stats2DPlugin` method), 533

get_handler() (`cytoflowgui.view_plugins.table.TablePlugin` method), 533

get_handler() (`cytoflowgui.view_plugins.violin.ViolinPlotPlugin` method), 536

`get_help()` (cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin method), 499
`get_help()` (cytoflowgui.op_plugins.op_plugin_base.PluginMethod method), 502
`get_help()` (cytoflowgui.view_plugins.i_view_plugin.IViewPlugin method), 523
`get_help()` (cytoflowgui.view_plugins.view_plugin_base.PluginMethod method), 535
`get_icon()` (cytoflowgui.op_plugins.autofluorescence.AutoFluorescencePlugin method), 486
`get_icon()` (cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin method), 488
`get_icon()` (cytoflowgui.op_plugins.binning.BinningPlugin method), 488
`get_icon()` (cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearPlugin method), 491
`get_icon()` (cytoflowgui.op_plugins.channel_stat.ChannelStatisticPlugin method), 491
`get_icon()` (cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin method), 493
`get_icon()` (cytoflowgui.op_plugins.density.DensityGatePlugin method), 494
`get_icon()` (cytoflowgui.op_plugins.flowpeaks.FlowPeaksPlugin method), 496
`get_icon()` (cytoflowgui.op_plugins.gaussian_1d.Gaussian1DPlugin method), 497
`get_icon()` (cytoflowgui.op_plugins.gaussian_2d.Gaussian2DPlugin method), 498
`get_icon()` (cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin method), 499
`get_icon()` (cytoflowgui.op_plugins.import_op.ImportOperationPlugin method), 501
`get_icon()` (cytoflowgui.op_plugins.kmeans.KMeansPlugin method), 502
`get_icon()` (cytoflowgui.op_plugins.pca.PCAPlugin method), 503
`get_icon()` (cytoflowgui.op_plugins.polygon.PolygonPlugin method), 504
`get_icon()` (cytoflowgui.op_plugins.quad.QuadPlugin method), 505
`get_icon()` (cytoflowgui.op_plugins.range.RangePlugin method), 507
`get_icon()` (cytoflowgui.op_plugins.range2d.Range2DPlugin method), 508
`get_icon()` (cytoflowgui.op_plugins.ratio.RatioPlugin method), 508
`get_icon()` (cytoflowgui.op_plugins.tasbe.TasbePlugin method), 513
`get_icon()` (cytoflowgui.op_plugins.threshold.ThresholdPlugin method), 514
`get_icon()` (cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin method), 514
`get_icon()` (cytoflowgui.view_plugins.bar_chart.BarChartPlugin method), 519
`get_icon()` (cytoflowgui.view_plugins.density.DensityPlugin method), 519
`get_icon()` (cytoflowgui.view_plugins.export_fcs.ExportFCSPlugin method), 520
`get_icon()` (cytoflowgui.view_plugins.histogram.HistogramPlugin method), 522
`get_icon()` (cytoflowgui.view_plugins.histogram_2d.Histogram2DPlugin method), 523
`get_icon()` (cytoflowgui.view_plugins.i_view_plugin.IViewPlugin method), 523
`get_icon()` (cytoflowgui.view_plugins.kde_1d.Kde1DPlugin method), 524
`get_icon()` (cytoflowgui.view_plugins.kde_2d.Kde2DPlugin method), 526
`get_icon()` (cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesPlugin method), 527
`get_icon()` (cytoflowgui.view_plugins.radviz.RadvizPlugin method), 529
`get_icon()` (cytoflowgui.view_plugins.scatterplot.ScatterplotPlugin method), 530
`get_icon()` (cytoflowgui.view_plugins.stats_1d.Stats1DPlugin method), 531
`get_icon()` (cytoflowgui.view_plugins.stats_2d.Stats2DPlugin method), 533
`get_icon()` (cytoflowgui.view_plugins.table.TablePlugin method), 533
`get_icon()` (cytoflowgui.view_plugins.violin.ViolinPlotPlugin method), 536
`get_method_parameters()` (in module cytoflow.utility.docstring), 413
`get_mpl_params()` (cytoflow.utility.hlog_scale.HlogScale method), 414
`get_mpl_params()` (cytoflow.utility.linear_scale.LinearScale method), 417
`get_mpl_params()` (cytoflow.utility.log_scale.LogScale method), 417
`get_mpl_params()` (cytoflow.utility.logicle_scale.LogicleScale method), 419
`get_notebook_code()` (cytoflowgui.workflow.operations.autofluorescence.AutoFluorescence method), 537
`get_notebook_code()` (cytoflowgui.workflow.operations.autofluorescence.AutoFluorescence method), 538
`get_notebook_code()` (cytoflowgui.workflow.operations.bead_calibration.BeadCalibration method), 538
`get_notebook_code()` (cytoflowgui.workflow.operations.bead_calibration.BeadCalibration method), 539
`get_notebook_code()` (cytoflowgui.workflow.operations.binning.BinningWorkflowOperation method), 539
`get_notebook_code()`

(*cytoflowgui.workflow.operations.binning.BinningWorkflowView*, *cytoflowgui.workflow.operations.operation_base.WorkflowOpera*
method), 539 *method*), 548

get_notebook_code() (*cytoflowgui.workflow.operations.operation_base.WorkflowOpera*
method), 548 *get_notebook_code()* (*cytoflowgui.workflow.operations.pca.PCAWorkflowOp*
method), 548

get_notebook_code() (*cytoflowgui.workflow.operations.pca.PCAWorkflowOp*
method), 548 *get_notebook_code()* (*cytoflowgui.workflow.operations.polygon.PolygonSelectionView*
method), 549

get_notebook_code() (*cytoflowgui.workflow.operations.polygon.PolygonSelectionView*
method), 549 *get_notebook_code()* (*cytoflowgui.workflow.operations.polygon.PolygonWorkflowOp*
method), 549

get_notebook_code() (*cytoflowgui.workflow.operations.polygon.PolygonWorkflowOp*
method), 549 *get_notebook_code()* (*cytoflowgui.workflow.operations.quad.QuadSelectionView*
method), 549

get_notebook_code() (*cytoflowgui.workflow.operations.quad.QuadSelectionView*
method), 549 *get_notebook_code()* (*cytoflowgui.workflow.operations.quad.QuadWorkflowOp*
method), 549

get_notebook_code() (*cytoflowgui.workflow.operations.quad.QuadWorkflowOp*
method), 549 *get_notebook_code()* (*cytoflowgui.workflow.operations.range.RangeSelectionView*
method), 549

get_notebook_code() (*cytoflowgui.workflow.operations.range.RangeSelectionView*
method), 549 *get_notebook_code()* (*cytoflowgui.workflow.operations.range.RangeWorkflowOp*
method), 550

get_notebook_code() (*cytoflowgui.workflow.operations.range.RangeWorkflowOp*
method), 550 *get_notebook_code()* (*cytoflowgui.workflow.operations.range2d.Range2DSelectionView*
method), 550

get_notebook_code() (*cytoflowgui.workflow.operations.range2d.Range2DSelectionView*
method), 550 *get_notebook_code()* (*cytoflowgui.workflow.operations.range2d.Range2DWorkflowOp*
method), 550

get_notebook_code() (*cytoflowgui.workflow.operations.range2d.Range2DWorkflowOp*
method), 550 *get_notebook_code()* (*cytoflowgui.workflow.operations.ratio.RatioWorkflowOp*
method), 550

get_notebook_code() (*cytoflowgui.workflow.operations.ratio.RatioWorkflowOp*
method), 550 *get_notebook_code()* (*cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOp*
method), 551

get_notebook_code() (*cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOp*
method), 551 *get_notebook_code()* (*cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView*
method), 551

get_notebook_code() (*cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView*
method), 551 *get_notebook_code()* (*cytoflowgui.workflow.operations.threshold.ThresholdSelectionView*
method), 551

get_notebook_code() (*cytoflowgui.workflow.operations.threshold.ThresholdSelectionView*
method), 551 *get_notebook_code()* (*cytoflowgui.workflow.operations.threshold.ThresholdWorkflowOp*
method), 551

get_notebook_code() (*cytoflowgui.workflow.operations.threshold.ThresholdWorkflowOp*
method), 551 *get_notebook_code()* (*cytoflowgui.workflow.operations.xform_stat.TransformStatisticW*
method), 552

get_notebook_code() (*cytoflowgui.workflow.operations.xform_stat.TransformStatisticW*
method), 552 *get_notebook_code()* (*cytoflowgui.workflow.views.bar_chart.BarChartWorkflowView*
method), 552

get_notebook_code() (*cytoflowgui.workflow.views.bar_chart.BarChartWorkflowView*
method), 552 *get_notebook_code()* (*cytoflowgui.workflow.views.density.DensityWorkflowView*
method), 552

get_notebook_code() (*cytoflowgui.workflow.views.density.DensityWorkflowView*
method), 552 *get_notebook_code()* (*cytoflowgui.workflow.views.density.DensityWorkflowView*
method), 552

(*cytoflowgui.workflow.views.export_fcs.ExportFCSWorkflowView* method), 494
method), 553
get_notebook_code() (*cytoflowgui.workflow.views.histogram.HistogramWorkflowView* method), 553
get_notebook_code() (*cytoflowgui.workflow.views.histogram_2d.Histogram2DWorkflowView* method), 553
get_notebook_code() (*cytoflowgui.workflow.views.kde_1d.Kde1DWorkflowView* method), 553
get_notebook_code() (*cytoflowgui.workflow.views.kde_2d.Kde2DWorkflowView* method), 554
get_notebook_code() (*cytoflowgui.workflow.views.parallel_coords.ParallelCoordinateWorkflowView* method), 554
get_notebook_code() (*cytoflowgui.workflow.views.radviz.RadvizWorkflowView* method), 554
get_notebook_code() (*cytoflowgui.workflow.views.scatterplot.ScatterplotWorkflowView* method), 554
get_notebook_code() (*cytoflowgui.workflow.views.stats_1d.Stats1DWorkflowView* method), 555
get_notebook_code() (*cytoflowgui.workflow.views.stats_2d.Stats2DWorkflowView* method), 555
get_notebook_code() (*cytoflowgui.workflow.views.table.TableWorkflowView* method), 555
get_notebook_code() (*cytoflowgui.workflow.views.view_base.IWorkflowView* method), 556
get_notebook_code() (*cytoflowgui.workflow.views.view_base.WorkflowView* method), 556
get_notebook_code() (*cytoflowgui.workflow.views.violin.ViolinPlotWorkflowView* method), 557
get_operation() (*cytoflowgui.op_plugins.autofluorescence.AutofluorescencePlugin* method), 486
get_operation() (*cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin* method), 488
get_operation() (*cytoflowgui.op_plugins.binning.BinningPlugin* method), 488
get_operation() (*cytoflowgui.op_plugins.bleedthrough_light_filter.BleedthroughLightFilterPlugin* method), 491
get_operation() (*cytoflowgui.op_plugins.channel_stat.ChannelStatPlugin* method), 491
get_operation() (*cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin* method), 493
get_operation() (*cytoflowgui.op_plugins.density.DensityPlugin* method), 494
get_operation() (*cytoflowgui.op_plugins.flowpeaks.FlowPeaksPlugin* method), 496
get_operation() (*cytoflowgui.op_plugins.gaussian_1d.GaussianMixturePlugin* method), 497
get_operation() (*cytoflowgui.op_plugins.gaussian_2d.GaussianMixturePlugin* method), 498
get_operation() (*cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin* method), 499
get_operation() (*cytoflowgui.op_plugins.import_op.ImportPlugin* method), 500
get_operation() (*cytoflowgui.op_plugins.kmeans.KMeansPlugin* method), 502
get_operation() (*cytoflowgui.op_plugins.pca.PCAPlugin* method), 503
get_operation() (*cytoflowgui.op_plugins.polygon.PolygonPlugin* method), 504
get_operation() (*cytoflowgui.op_plugins.quad.QuadPlugin* method), 505
get_operation() (*cytoflowgui.op_plugins.range.RangePlugin* method), 506
get_operation() (*cytoflowgui.op_plugins.range2d.Range2DPlugin* method), 507
get_operation() (*cytoflowgui.op_plugins.ratio.RatioPlugin* method), 508
get_operation() (*cytoflowgui.op_plugins.tasbe.TasbePlugin* method), 513
get_operation() (*cytoflowgui.op_plugins.threshold.ThresholdPlugin* method), 514
get_operation() (*cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin* method), 514
get_plugin() (*cytoflowgui.view_plugins.i_view_plugin.IViewPlugin* method), 524
get_transform() (*cytoflow.utility.hlog_scale.MatplotlibHlogScale* method), 415
get_transform() (*cytoflow.utility.logicle_scale.MatplotlibLogicleScale* method), 419
get_view() (*cytoflowgui.view_plugins.bar_chart.BarChartPlugin* method), 519
get_view() (*cytoflowgui.view_plugins.density.DensityPlugin* method), 519
get_view() (*cytoflowgui.view_plugins.export_fcs.ExportFCSPlugin* method), 520
get_view() (*cytoflowgui.view_plugins.histogram.HistogramPlugin* method), 522
get_view() (*cytoflowgui.view_plugins.histogram_2d.Histogram2DPlugin* method), 523
get_view() (*cytoflowgui.view_plugins.i_view_plugin.IViewPlugin* method), 523
get_view() (*cytoflowgui.view_plugins.kde_1d.Kde1DPlugin* method), 524
get_view() (*cytoflowgui.view_plugins.kde_2d.Kde2DPlugin* method), 526
get_view() (*cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatePlugin* method), 526

method), 527

get_view() (cytoflowgui.view_plugins.radviz.RadvizPlugin method), 529

get_view() (cytoflowgui.view_plugins.scatterplot.ScatterplotPlugin method), 529

get_view() (cytoflowgui.view_plugins.stats_1d.Stats1DPlugin method), 531

get_view() (cytoflowgui.view_plugins.stats_2d.Stats2DPlugin method), 533

get_view() (cytoflowgui.view_plugins.table.TablePlugin method), 533

get_view() (cytoflowgui.view_plugins.violin.ViolinPlotPlugin method), 536

gui_handler_callback() (in module cytoflowgui.cytoflow_application), 564

H

h (cytoflow.operations.flowpeaks.FlowPeaksOp attribute), 340

h0 (cytoflow.operations.flowpeaks.FlowPeaksOp attribute), 341

handler (cytoflowgui.experiment_pane.ExperimentBrowserDockPane attribute), 565

handler (cytoflowgui.export_task.ExportTask attribute), 569

handler (cytoflowgui.export_task.ExportTaskPane attribute), 569

handler (cytoflowgui.utility.event_tracer.CallingMessageRecord attribute), 515

handler (cytoflowgui.utility.event_tracer.ExitMessageRecord attribute), 516

handler (cytoflowgui.view_pane.PlotParamsPane attribute), 579

handler (cytoflowgui.view_pane.ViewDockPane attribute), 579

handler (cytoflowgui.workflow_pane.WorkflowDockPane attribute), 582

handler_factory (cytoflowgui.editors.instance_handler_editor.InstanceHandlerEditor attribute), 479

handler_factory (cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor attribute), 483

handler_factory() (cytoflowgui.workflow_controller.WorkflowController method), 581

has_inverse (cytoflow.utility.hlog_scale.MatplotlibHlogScale.HlogScale attribute), 415

has_inverse (cytoflow.utility.hlog_scale.MatplotlibHlogScale.InverseLogScale attribute), 415

has_inverse (cytoflow.utility.logicle_scale.MatplotlibLogicleScale.InverseLogicleTransform attribute), 420

has_inverse (cytoflow.utility.logicle_scale.MatplotlibLogicleScale.LogicleTransform attribute), 420

height (cytoflowgui.export_task.ExportTask attribute), 569

help_id (cytoflowgui.help_pane.HelpDockPane attribute), 570

HelpDockPane (class in cytoflowgui.help_pane), 570

high() (cytoflowgui.editors.range_slider.RangeSlider method), 479

hint_height (cytoflowgui.util.HintedMainWindow attribute), 578

hint_height (cytoflowgui.util.HintedWidget attribute), 578

hint_width (cytoflowgui.util.HintedMainWindow attribute), 578

hint_width (cytoflowgui.util.HintedWidget attribute), 578

HintedMainWindow (class in cytoflowgui.util), 578

HintedWidget (class in cytoflowgui.util), 578

Histogram2DHandler (class in cytoflowgui.view_plugins.histogram_2d), 522

Histogram2DParamsHandler (class in cytoflowgui.view_plugins.histogram_2d), 522

Histogram2DPlotParams (class in cytoflowgui.workflow.views.histogram_2d), 553

Histogram2DPlugin (class in cytoflowgui.view_plugins.histogram_2d), 523

Histogram2DView (class in cytoflow.views.histogram_2d), 442

Histogram2DWorkflowView (class in cytoflowgui.workflow.views.histogram_2d), 553

HistogramHandler (class in cytoflowgui.view_plugins.histogram), 521

HistogramParamsHandler (class in cytoflowgui.view_plugins.histogram), 521

HistogramPlotParamsEditor (class in cytoflowgui.workflow.views.histogram), 553

HistogramPlugin (class in cytoflowgui.view_plugins.histogram), 521

HistogramView (class in cytoflow.views.histogram), 439

HistogramWorkflowView (class in cytoflowgui.workflow.views.histogram), 553

history (cytoflow.experiment.Experiment attribute), 474

hlog() (in module cytoflow.utility.hlog_scale), 416

hlog_inv() (in module cytoflow.utility.hlog_scale), 416

HlogMajorLocator (class in cytoflow.utility.hlog_scale), 416

HlogMinorLocator (class in cytoflow.utility.hlog_scale), 416

HlogScale (class in cytoflow.utility.hlog_scale), 414

html (cytoflowgui.help_pane.HelpDockPane attribute), 570

- huefacet (*cytoflow.operations.binning.BinningView* attribute), 324
- huefacet (*cytoflow.operations.density.DensityGateView* attribute), 338
- huefacet (*cytoflow.operations.flowpeaks.FlowPeaks1DView* attribute), 344
- huefacet (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* attribute), 349
- huefacet (*cytoflow.operations.flowpeaks.FlowPeaks2DView* attribute), 347
- huefacet (*cytoflow.operations.gaussian.GaussianMixture1DView* attribute), 356
- huefacet (*cytoflow.operations.gaussian.GaussianMixture2DView* attribute), 359
- huefacet (*cytoflow.operations.kmeans.KMeans1DView* attribute), 368
- huefacet (*cytoflow.operations.kmeans.KMeans2DView* attribute), 370
- huefacet (*cytoflow.operations.polygon.DensityPolygonSelectionView* attribute), 382
- huefacet (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView* attribute), 380
- huefacet (*cytoflow.operations.quad.DensityQuadSelectionView* attribute), 388
- huefacet (*cytoflow.operations.quad.ScatterplotQuadSelectionView* attribute), 386
- huefacet (*cytoflow.operations.range.RangeSelection* attribute), 392
- huefacet (*cytoflow.operations.range2d.DensityRangeSelection2DView* attribute), 398
- huefacet (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView* attribute), 397
- huefacet (*cytoflow.operations.threshold.ThresholdSelection* attribute), 403
- huefacet (*cytoflow.views.bar_chart.BarChartView* attribute), 427
- huefacet (*cytoflow.views.base_views.BaseView* attribute), 430
- huefacet (*cytoflow.views.densityplot.DensityView* attribute), 435
- huefacet (*cytoflow.views.histogram.HistogramView* attribute), 440
- huefacet (*cytoflow.views.histogram_2d.Histogram2DView* attribute), 443
- huefacet (*cytoflow.views.kde_1d.Kde1DView* attribute), 447
- huefacet (*cytoflow.views.kde_2d.Kde2DView* attribute), 450
- huefacet (*cytoflow.views.parallel_coords.ParallelCoordinatesView* attribute), 453
- huefacet (*cytoflow.views.radviz.RadvizView* attribute), 455
- huefacet (*cytoflow.views.scatterplot.ScatterplotView* attribute), 459
- huefacet (*cytoflow.views.stats_1d.Stats1DView* attribute), 462
- huefacet (*cytoflow.views.stats_2d.Stats2DView* attribute), 465
- huefacet (*cytoflow.views.violin.ViolinPlotView* attribute), 471
- huefacet (*cytoflow.operations.binning.BinningView* attribute), 324
- huescale (*cytoflow.operations.density.DensityGateView* attribute), 338
- huescale (*cytoflow.operations.flowpeaks.FlowPeaks1DView* attribute), 344
- huescale (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* attribute), 349
- huescale (*cytoflow.operations.flowpeaks.FlowPeaks2DView* attribute), 347
- huescale (*cytoflow.operations.gaussian.GaussianMixture1DView* attribute), 356
- huescale (*cytoflow.operations.gaussian.GaussianMixture2DView* attribute), 359
- huescale (*cytoflow.operations.kmeans.KMeans1DView* attribute), 368
- huescale (*cytoflow.operations.kmeans.KMeans2DView* attribute), 370
- huescale (*cytoflow.operations.polygon.DensityPolygonSelectionView* attribute), 382
- huescale (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView* attribute), 380
- huescale (*cytoflow.operations.quad.DensityQuadSelectionView* attribute), 388
- huescale (*cytoflow.operations.quad.ScatterplotQuadSelectionView* attribute), 386
- huescale (*cytoflow.operations.range.RangeSelection* attribute), 392
- huescale (*cytoflow.operations.range2d.DensityRangeSelection2DView* attribute), 398
- huescale (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView* attribute), 397
- huescale (*cytoflow.operations.threshold.ThresholdSelection* attribute), 403
- huescale (*cytoflow.operations.range2d.DensityRangeSelection2DView* attribute), 399
- huescale (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView* attribute), 397
- huescale (*cytoflow.operations.threshold.ThresholdSelection* attribute), 403
- huescale (*cytoflow.views.bar_chart.BarChartView* attribute), 427
- huescale (*cytoflow.views.base_views.BaseView* attribute), 430
- huescale (*cytoflow.views.densityplot.DensityView* attribute), 435
- huescale (*cytoflow.views.histogram.HistogramView* attribute), 440
- huescale (*cytoflow.views.histogram_2d.Histogram2DView* attribute), 443
- huescale (*cytoflow.views.kde_1d.Kde1DView* attribute), 447
- huescale (*cytoflow.views.kde_2d.Kde2DView* attribute), 450
- huescale (*cytoflow.views.parallel_coords.ParallelCoordinatesView* attribute), 453
- huescale (*cytoflow.views.radviz.RadvizView* attribute), 455
- huescale (*cytoflow.views.scatterplot.ScatterplotView* attribute), 459

- huescale (cytoflow.views.parallel_coords.ParallelCoordinatesView attribute), 453
- huescale (cytoflow.views.radviz.RadvizView attribute), 456
- huescale (cytoflow.views.scatterplot.ScatterplotView attribute), 459
- huescale (cytoflow.views.stats_1d.Stats1DView attribute), 462
- huescale (cytoflow.views.stats_2d.Stats2DView attribute), 465
- huescale (cytoflow.views.violin.ViolinPlotView attribute), 471
- I
- icon (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 481
- icon (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580
- icon_object (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 482
- icon_object_trait (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 482
- id (cytoflow.operations.i_operation.IOperation attribute), 360
- id (cytoflow.views.histogram_2d.Histogram2DView attribute), 443
- id (cytoflow.views.i_view.IView attribute), 446
- id (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564
- id (cytoflowgui.experiment_pane.ExperimentBrowserDockPane attribute), 565
- id (cytoflowgui.export_task.ExportPane attribute), 568
- id (cytoflowgui.export_task.ExportTaskPane attribute), 568
- id (cytoflowgui.help_pane.HelpDockPane attribute), 570
- id (cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin attribute), 499
- id (cytoflowgui.view_pane.PlotParamsPane attribute), 579
- id (cytoflowgui.view_pane.ViewDockPane attribute), 578
- id (cytoflowgui.view_plugins.i_view_plugin.IViewPlugin attribute), 523
- id (cytoflowgui.workflow.operations.flowpeaks.FlowPeaksWorkflowView attribute), 543
- id (cytoflowgui.workflow.operations.kmeans.KMeansWorkflowView attribute), 546
- id (cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView attribute), 551
- id (cytoflowgui.workflow_pane.WorkflowDockPane attribute), 582
- ignore_v (cytoflow.operations.import_op.ImportOp attribute), 363
- image_size (cytoflowgui.view_pane.ViewDockPane attribute), 579
- image_size (cytoflowgui.workflow_pane.WorkflowDockPane attribute), 582
- import_csv (cytoflowgui.import_dialog.ExperimentDialogHandler attribute), 573
- import_op (cytoflowgui.import_dialog.ExperimentDialogHandler attribute), 573
- ImportHandler (class in cytoflowgui.op_plugins.import_op), 500
- ImportOp (class in cytoflow.operations.import_op), 362
- ImportPlugin (class in cytoflowgui.op_plugins.import_op), 500
- ImportWorkflowOp (class in cytoflowgui.workflow.operations.import_op), 545
- indent (cytoflowgui.utility.event_tracer.CallingMessageRecord attribute), 515
- indent (cytoflowgui.utility.event_tracer.ChangeMessageRecord attribute), 515
- indent (cytoflowgui.utility.event_tracer.ExitMessageRecord attribute), 516
- index (cytoflowgui.import_dialog.Tube attribute), 571
- indices (cytoflowgui.op_plugins.xform_stat.TransformStatisticHandler attribute), 514
- indices (cytoflowgui.view_plugins.bar_chart.BarChartHandler attribute), 518
- indices (cytoflowgui.view_plugins.stats_1d.Stats1DHandler attribute), 531
- indices (cytoflowgui.view_plugins.stats_2d.Stats2DHandler attribute), 532
- indices (cytoflowgui.view_plugins.table.TableHandler attribute), 533
- info_text (cytoflow.utility.custom_traits.CFloatOrNone attribute), 409
- info_text (cytoflow.utility.custom_traits.CIntOrNone attribute), 409
- info_text (cytoflow.utility.custom_traits.FloatOrNone attribute), 409
- info_text (cytoflow.utility.custom_traits.IntOrNone attribute), 409
- info_text (cytoflow.utility.custom_traits.PositiveCFloat attribute), 409
- info_text (cytoflow.utility.custom_traits.PositiveCInt attribute), 408
- info_text (cytoflow.utility.custom_traits.PositiveFloat attribute), 408
- info_text (cytoflow.utility.custom_traits.PositiveInt attribute), 408
- info_text (cytoflow.utility.custom_traits.ScaleEnum attribute), 410
- info_text (cytoflowgui.workflow.operations.import_op.ValidPythonIdentifier attribute), 545
- init () (cytoflowgui.import_dialog.ExperimentDialogHandler method), 573
- init () (cytoflowgui.import_dialog.ExperimentDialogModel method), 573

method), 572

input_dims (cytoflow.utility.hlog_scale.MatplotlibHlogScale.HlogTransform (in module cytoflow.utility.util_functions), 426 attribute), 415

input_dims (cytoflow.utility.hlog_scale.MatplotlibHlogScale.HlogTransform (in module cytoflow.utility.util_functions), 426 attribute), 415

input_dims (cytoflow.utility.logicle_scale.MatplotlibLogicleScale.HlogTransform (in module cytoflow.utility.util_functions), 426 attribute), 420

input_dims (cytoflow.utility.logicle_scale.MatplotlibLogicleScale.HlogTransform (in module cytoflow.utility.util_functions), 426 attribute), 419

InstanceHandlerEditor (class in cytoflowgui.editors.instance_handler_editor), 479

interactive (cytoflow.operations.polygon.DensityPolygonSelectionView attribute), 381

interactive (cytoflow.operations.polygon.ScatterplotPolygonSelectionView attribute), 379

interactive (cytoflow.operations.quad.DensityQuadSelectionView attribute), 387

interactive (cytoflow.operations.quad.ScatterplotQuadSelectionView attribute), 385

interactive (cytoflow.operations.range.RangeSelectionView attribute), 392

interactive (cytoflow.operations.range2d.DensityRangeSelectionView attribute), 398

interactive (cytoflow.operations.range2d.ScatterplotRangeSelectionView attribute), 396

interactive (cytoflow.operations.threshold.ThresholdSelectionView attribute), 402

interactive (cytoflow.views.i_selectionview.ISelectionView attribute), 446

IntOrNone (class in cytoflow.utility.custom_traits), 409

inverse() (cytoflow.utility.hlog_scale.HlogScale method), 414

inverse() (cytoflow.utility.linear_scale.LinearScale method), 417

inverse() (cytoflow.utility.log_scale.LogScale method), 417

inverse() (cytoflow.utility.logicle_scale.LogicleScale method), 419

inverse() (cytoflow.utility.scale.IScale method), 422

inverted() (cytoflow.utility.hlog_scale.MatplotlibHlogScale.HlogTransform method), 415

inverted() (cytoflow.utility.hlog_scale.MatplotlibHlogScale.InvertedLogicleTransform method), 416

inverted() (cytoflow.utility.logicle_scale.MatplotlibLogicleScale.InvertedLogicleTransform method), 420

inverted() (cytoflow.utility.logicle_scale.MatplotlibLogicleScale.LogicleTransform method), 420

IOperation (class in cytoflow.operations.i_operation), 360

IOperationPlugin (class in cytoflowgui.op_plugins.i_op_plugin), 499

iqr() (in module cytoflow.utility.util_functions), 423

is_inside_sm() (in module cytoflow.utility.algorithms), 407

IScale (class in cytoflow.utility.scale), 421

IScalePlugin (class in cytoflowgui.view_plugins.i_scale_plugin), 525

ISelectionView (class in cytoflowgui.view_plugins.i_selectionview), 446

IView (class in cytoflowgui.view_plugins.i_view_plugin), 525

IWorkflowOperation (class in cytoflowgui.workflow.operations.operation_base), 547

IWorkflowView (class in cytoflowgui.workflow.views.view_base), 555

K

Kde1DHandler (class in cytoflowgui.view_plugins.kde_1d), 524

Kde1DParamsHandler (class in cytoflowgui.view_plugins.kde_1d), 524

Kde1DPlotParams (class in cytoflowgui.workflow.views.kde_1d), 553

Kde1DPlugin (class in cytoflowgui.view_plugins.kde_1d), 524

Kde1DView (class in cytoflow.views.kde_1d), 447

Kde1DWorkflowView (class in cytoflowgui.workflow.views.kde_1d), 553

Kde2DHandler (class in cytoflowgui.view_plugins.kde_2d), 525

Kde2DParamsHandler (class in cytoflowgui.view_plugins.kde_2d), 525

Kde2DPlotParams (class in cytoflowgui.workflow.views.kde_2d), 554

Kde2DPlugin (class in cytoflowgui.view_plugins.kde_2d), 525

Kde2DView (class in cytoflow.views.kde_2d), 449

Kde2DWorkflowView (class in cytoflowgui.workflow.views.kde_2d), 554

keep (cytoflow.operations.density.DensityGateOp attribute), 335

keywords (cytoflow.views.export_fcs.ExportFCS attribute), 438

klass (cytoflowgui.editors.color_text_editor.ColorTextEditor attribute), 478

klass (cytoflowgui.editors.toggle_button.ToggleButtonEditor attribute), 480

klass (cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor attribute), 483

klass (cytoflowgui.editors.zoomable_html_editor.ZoomableHTMLEditor attribute), 484

KMeans1DView (class in cytoflow.operations.kmeans), 367

KMeans2DView (class in cytoflow.operations.kmeans), 369

KMeansHandler (class in cytoflowgui.op_plugins.kmeans), 501

KMeansOp (class in cytoflow.operations.kmeans), 364

KMeansPlugin (class in cytoflowgui.op_plugins.kmeans), 501

KMeansViewHandler (class in cytoflowgui.op_plugins.kmeans), 501

KMeansWorkflowOp (class in cytoflowgui.workflow.operations.kmeans), 546

KMeansWorkflowView (class in cytoflowgui.workflow.operations.kmeans), 546

L

label (cytoflowgui.editors.toggle_button.ToggleButtonEditor attribute), 480

label (cytoflowgui.experiment_pane_model.ChannelsNode attribute), 566

label (cytoflowgui.experiment_pane_model.ConditionsNode attribute), 566

label (cytoflowgui.experiment_pane_model.StatisticsNode attribute), 567

label (cytoflowgui.experiment_pane_model.StringNode attribute), 567

label (cytoflowgui.experiment_pane_model.WorkflowItemNode attribute), 565

label_value (cytoflowgui.editors.toggle_button.ToggleButtonEditor attribute), 480

last_view_plotted (cytoflowgui.workflow.workflow.RemoteWorkflow attribute), 560

layout (cytoflowgui.export_task.ExportTaskPane attribute), 569

leaveEvent() (cytoflowgui.matplotlib_backend_local.FigureCanvasQTAggLocal method), 574

levels (cytoflowgui.op_plugins.xform_stat.TransformStatisticsHandler attribute), 514

levels (cytoflowgui.view_plugins.bar_chart.BarChartHandler attribute), 519

levels (cytoflowgui.view_plugins.stats_1d.Stats1DHandler attribute), 531

levels (cytoflowgui.view_plugins.stats_2d.Stats2DHandler attribute), 532

levels (cytoflowgui.view_plugins.table.TableHandler attribute), 533

levels (cytoflow.operations.color_translation.ColorTranslationOp attribute), 332

LinearScale (class in cytoflow.utility.linear_scale), 417

listen_for_local() (cytoflowgui.matplotlib_backend_remote.FigureCanvasQTAggLocal method), 576

listen_for_remote() (cytoflowgui.matplotlib_backend_local.FigureCanvasQTAggLocal method), 574

load_yaml() (in module cytoflowgui.workflow.serialization), 557

LocalWorkflow (class in cytoflowgui.workflow.workflow), 560

lock (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 563

log_excepthook() (in module cytoflowgui.run), 577

log_exception() (in module cytoflowgui.matplotlib_backend_local), 574

log_exception() (in module cytoflowgui.matplotlib_backend_remote), 575

log_exception() (in module cytoflowgui.utility.logging), 517

log_notification_handler() (in module cytoflowgui.run), 577

LogicleMajorLocator (class in cytoflow.utility.logicle_scale), 421

LogicleMinorLocator (class in cytoflow.utility.logicle_scale), 421

LogicleScale (class in cytoflow.utility.logicle_scale), 418

LogScale (class in cytoflow.utility.log_scale), 417

low (cytoflow.operations.range.RangeOp attribute), 390

low() (cytoflowgui.editors.range_slider.RangeSlider method), 479

M

M (cytoflow.utility.logicle_scale.LogicleScale attribute), 419

main() (in module cytoflow.scripts.channel_voltages), 406

main() (in module cytoflow.scripts.fcs_metadata), 406

main() (in module cytoflow.scripts.parse_beads), 406

main() (in module cytoflow.scripts.split_fcs), 406

matplotlib_events (cytoflowgui.workflow.workflow.RemoteWorkflow attribute), 561

[matplotlib_events \(cytoflowgui.workflow.workflow_item.WorkflowItem attribute\), 563](#)
[matplotlib_events \(cytoflowgui.op_plugins.range.RangePlugin attribute\), 506](#)
[MatplotlibHlogScale \(class in menu_group \(cytoflowgui.op_plugins.range2d.Range2DPlugin attribute\), 507\)](#)
[MatplotlibHlogScale.HlogTransform \(class in menu_group \(cytoflowgui.op_plugins.ratio.RatioPlugin attribute\), 508\)](#)
[MatplotlibHlogScale.InvertedLogicleTransform \(class in menu_group \(cytoflowgui.op_plugins.tasbe.TasbePlugin attribute\), 512\)](#)
[MatplotlibLogicleScale \(class in menu_group \(cytoflowgui.op_plugins.threshold.ThresholdPlugin attribute\), 514\)](#)
[MatplotlibLogicleScale.InvertedLogicleTransform \(class in menu_group \(cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin attribute\), 514\)](#)
[MatplotlibLogicleScale.LogicleTransform \(class in menu_group \(cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin attribute\), 514\)](#)
[max_quantile \(cytoflow.operations.density.DensityGateOperation attribute\), 335](#)
[mean_95ci \(\) \(in module message_q \(cytoflowgui.workflow.workflow.LocalWorkflow attribute\), 560\)](#)
[mean_95ci \(\) \(in module message_q \(cytoflowgui.workflow.workflow.RemoteWorkflow attribute\), 561\)](#)
[mean_95ci \(\) \(in module metadata \(cytoflow.experiment.Experiment attribute\), 474\)](#)
[mean_95ci \(\) \(in module metadata \(cytoflowgui.editors.subset_list_editor.SubsetListEditor attribute\), 480\)](#)
[menu_bar \(cytoflowgui.export_task.ExportTask attribute\), 569](#)
[menu_group \(cytoflowgui.op_plugins.autofluorescence.AutoFluorescencePlugin attribute\), 562](#)
[menu_group \(cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin attribute\), 335](#)
[menu_group \(cytoflowgui.op_plugins.binning.BinningPlugin attribute\), 335](#)
[menu_group \(cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearPlugin attribute\), 331](#)
[menu_group \(cytoflowgui.op_plugins.channel_stat.ChannelStatisticPlugin attribute\), 564](#)
[menu_group \(cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin attribute\), 569](#)
[menu_group \(cytoflowgui.op_plugins.density.DensityGateOperation attribute\), 569](#)
[menu_group \(cytoflowgui.op_plugins.flowpeaks.FlowPeaksOperation attribute\), 572](#)
[menu_group \(cytoflowgui.op_plugins.gaussian_1d.GaussianModel1DPlugin attribute\), 576](#)
[menu_group \(cytoflowgui.op_plugins.gaussian_2d.GaussianModel2DPlugin attribute\), 560\)](#)
[menu_group \(cytoflowgui.op_plugins.import_op.ImportOperation attribute\), 500](#)
[menu_group \(cytoflowgui.op_plugins.kmeans.KMeansPlugin attribute\), 310](#)
[menu_group \(cytoflowgui.op_plugins.pca.PCAPlugin attribute\), 473](#)
[menu_group \(cytoflowgui.op_plugins.polygon.PolygonPlugin attribute\), 311](#)
[menu_group \(cytoflowgui.op_plugins.quad.QuadPlugin attribute\), 315](#)
[message_q \(cytoflowgui.workflow.workflow.LocalWorkflow attribute\), 560](#)
[message_q \(cytoflowgui.workflow.workflow.RemoteWorkflow attribute\), 561](#)
[metadata \(cytoflow.experiment.Experiment attribute\), 474](#)
[metadata \(cytoflowgui.editors.subset_list_editor.SubsetListEditor attribute\), 480](#)
[metadata \(cytoflowgui.import_dialog.TubeTrait attribute\), 571](#)
[metadata \(cytoflowgui.workflow.workflow_item.WorkflowItem attribute\), 562](#)
[min_size \(cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute\), 482](#)
[mix_color \(cytoflow.operations.color_translation.ColorTranslationOperation attribute\), 331](#)
[model \(cytoflowgui.export_task.ExportTask attribute\), 569](#)
[model \(cytoflowgui.export_task.ExportTaskPane attribute\), 569](#)
[model \(cytoflowgui.import_dialog.TubeTrait attribute\), 572](#)
[model \(cytoflowgui.preferences.CytoflowPreferencesPane attribute\), 576](#)
[modified \(cytoflowgui.workflow.workflow.LocalWorkflow attribute\), 560](#)
[module cytoflow, 310](#)
[module cytoflow.experiment, 473](#)
[module cytoflow.operations, 311](#)
[module cytoflow.operations.autofluorescence, 311](#)
[module cytoflow.operations.base_op_views, 313](#)
[module cytoflow.operations.bead_calibration, 315](#)
[module cytoflow.operations.binning, 322](#)
[module cytoflow.operations.bleedthrough_linear, 325](#)

cytoflow.operations.channel_stat, 329
 cytoflow.operations.color_translation, 331
 cytoflow.operations.density, 334
 cytoflow.operations.flowpeaks, 340
 cytoflow.operations.frame_stat, 350
 cytoflow.operations.gaussian, 351
 cytoflow.operations.i_operation, 360
 cytoflow.operations.import_op, 361
 cytoflow.operations.kmeans, 364
 cytoflow.operations.pca, 371
 cytoflow.operations.polygon, 376
 cytoflow.operations.quad, 382
 cytoflow.operations.range, 390
 cytoflow.operations.range2d, 394
 cytoflow.operations.ratio, 399
 cytoflow.operations.threshold, 400
 cytoflow.operations.xform_stat, 404
 cytoflow.scripts, 406
 cytoflow.scripts.channel_voltages, 406
 cytoflow.scripts.fcs_metadata, 406
 cytoflow.scripts.parse_beads, 406
 cytoflow.scripts.split_fcs, 406
 cytoflow.utility, 406
 cytoflow.utility.algorithms, 406
 cytoflow.utility.custom_traits, 407
 cytoflow.utility.cytoflow_errors, 411
 cytoflow.utility.docstring, 412
 cytoflow.utility.fcswrite, 413
 cytoflow.utility.hlog_scale, 414
 cytoflow.utility.linear_scale, 417
 cytoflow.utility.log_scale, 417
 cytoflow.utility.logging, 417
 cytoflow.utility.logicle_scale, 418
 cytoflow.utility.scale, 421
 cytoflow.utility.util_functions, 422
 cytoflow.views, 426
 cytoflow.views.bar_chart, 426
 cytoflow.views.base_views, 429
 cytoflow.views.densityplot, 435
 cytoflow.views.export_fcs, 438
 cytoflow.views.histogram, 439
 cytoflow.views.histogram_2d, 442
 cytoflow.views.i_selectionview, 446
 cytoflow.views.i_view, 446
 cytoflow.views.kde_1d, 446
 cytoflow.views.kde_2d, 449
 cytoflow.views.parallel_coords, 452
 cytoflow.views.radviz, 455
 cytoflow.views.scatterplot, 458
 cytoflow.views.stats_1d, 461
 cytoflow.views.stats_2d, 464
 cytoflow.views.table, 468
 cytoflow.views.violin, 469
 cytoflowgui, 478
 cytoflowgui.cytoflow_application, 564
 cytoflowgui.editors, 478
 cytoflowgui.editors.color_text_editor, 478
 cytoflowgui.editors.ext_enum_editor, 478
 cytoflowgui.editors.instance_handler_editor, 479
 cytoflowgui.editors.range_slider, 479
 cytoflowgui.editors.subset_list_editor, 480
 cytoflowgui.editors.tab_list_editor, 480
 cytoflowgui.editors.toggle_button, 480
 cytoflowgui.editors.value_bounds_editor, 480
 cytoflowgui.editors.vertical_list_editor, 481
 cytoflowgui.editors.vertical_notebook, 481
 cytoflowgui.editors.vertical_notebook_editor, 483
 cytoflowgui.editors.zoomable_html_editor, 483
 cytoflowgui.experiment_pane, 565
 cytoflowgui.experiment_pane_model, 565
 cytoflowgui.export_task, 568
 cytoflowgui.help_pane, 570
 cytoflowgui.import_dialog, 570
 cytoflowgui.matplotlib_backend_local, 573
 cytoflowgui.matplotlib_backend_remote, 575
 cytoflowgui.op_plugins, 484
 cytoflowgui.op_plugins.autofluorescence, 484
 cytoflowgui.op_plugins.bead_calibration, 486
 cytoflowgui.op_plugins.binning, 488
 cytoflowgui.op_plugins.bleedthrough_linear, 489
 cytoflowgui.op_plugins.channel_stat, 491
 cytoflowgui.op_plugins.color_translation, 491
 cytoflowgui.op_plugins.density, 493
 cytoflowgui.op_plugins.flowpeaks, 494
 cytoflowgui.op_plugins.gaussian_1d, 496
 cytoflowgui.op_plugins.gaussian_2d, 497
 cytoflowgui.op_plugins.i_op_plugin, 498
 cytoflowgui.op_plugins.import_op, 499
 cytoflowgui.op_plugins.kmeans, 501
 cytoflowgui.op_plugins.op_plugin_base, 502
 cytoflowgui.op_plugins.pca, 502
 cytoflowgui.op_plugins.polygon, 503
 cytoflowgui.op_plugins.quad, 504

cytoflowgui.op_plugins.range, 505
 cytoflowgui.op_plugins.range2d, 507
 cytoflowgui.op_plugins.ratio, 508
 cytoflowgui.op_plugins.tasbe, 508
 cytoflowgui.op_plugins.threshold, 513
 cytoflowgui.op_plugins.xform_stat, 514
 cytoflowgui.preferences, 576
 cytoflowgui.run, 576
 cytoflowgui.subset_controllers, 577
 cytoflowgui.util, 577
 cytoflowgui.utility, 515
 cytoflowgui.utility.event_tracer, 515
 cytoflowgui.utility.logging, 517
 cytoflowgui.view_pane, 578
 cytoflowgui.view_plugins, 517
 cytoflowgui.view_plugins.bar_chart, 518
 cytoflowgui.view_plugins.density, 519
 cytoflowgui.view_plugins.export_fcs, 519
 cytoflowgui.view_plugins.histogram, 520
 cytoflowgui.view_plugins.histogram_2d, 522
 cytoflowgui.view_plugins.i_view_plugin, 523
 cytoflowgui.view_plugins.kde_1d, 524
 cytoflowgui.view_plugins.kde_2d, 524
 cytoflowgui.view_plugins.parallel_coords, 526
 cytoflowgui.view_plugins.radviz, 527
 cytoflowgui.view_plugins.scatterplot, 529
 cytoflowgui.view_plugins.stats_1d, 530
 cytoflowgui.view_plugins.stats_2d, 531
 cytoflowgui.view_plugins.table, 533
 cytoflowgui.view_plugins.view_plugin_base, 533
 cytoflowgui.view_plugins.violin, 535
 cytoflowgui.workflow, 536
 cytoflowgui.workflow.operations, 537
 cytoflowgui.workflow.operations.autofluorescence, 537
 cytoflowgui.workflow.operations.bead_calibration, 538
 cytoflowgui.workflow.operations.binning, 539
 cytoflowgui.workflow.operations.bleedthrough_lyte, 539
 cytoflowgui.workflow.operations.channel_stat, 540
 cytoflowgui.workflow.operations.color_translation, 540
 cytoflowgui.workflow.operations.density, 541
 cytoflowgui.workflow.operations.flowpeaks, 542
 cytoflowgui.workflow.operations.gaussian_1d, 543
 cytoflowgui.workflow.operations.gaussian_2d, 544
 cytoflowgui.workflow.operations.import_op, 545
 cytoflowgui.workflow.operations.kmeans, 546
 cytoflowgui.workflow.operations.operation_base, 547
 cytoflowgui.workflow.operations.pca, 548
 cytoflowgui.workflow.operations.polygon, 548
 cytoflowgui.workflow.operations.quad, 549
 cytoflowgui.workflow.operations.range, 549
 cytoflowgui.workflow.operations.range2d, 550
 cytoflowgui.workflow.operations.ratio, 550
 cytoflowgui.workflow.operations.tasbe, 550
 cytoflowgui.workflow.operations.threshold, 551
 cytoflowgui.workflow.operations.xform_stat, 551
 cytoflowgui.workflow.serialization, 557
 cytoflowgui.workflow.subset, 558
 cytoflowgui.workflow.views, 552
 cytoflowgui.workflow.views.bar_chart, 552
 cytoflowgui.workflow.views.density, 552
 cytoflowgui.workflow.views.export_fcs, 552
 cytoflowgui.workflow.views.histogram, 553
 cytoflowgui.workflow.views.histogram_2d, 553
 cytoflowgui.workflow.views.kde_1d, 553
 cytoflowgui.workflow.views.kde_2d, 553
 cytoflowgui.workflow.views.parallel_coords, 554
 cytoflowgui.workflow.views.radviz, 554
 cytoflowgui.workflow.views.scatterplot, 554
 cytoflowgui.workflow.views.stats_1d, 554
 cytoflowgui.workflow.views.stats_2d, 555
 cytoflowgui.workflow.views.table, 555
 cytoflowgui.workflow.views.view_base, 555
 cytoflowgui.workflow.views.violin, 557
 cytoflowgui.workflow.workflow, 558
 cytoflowgui.workflow.workflow_item, 561
 cytoflowgui.workflow_controller, 579
 cytoflowgui.workflow_pane, 581
 monitor_remote_process() (in module cytoflowgui.run), 577

| | |
|---|---|
| MOUSE_DOUBLE_CLICK_EVENT (cytoflowgui.matplotlib_backend_local.Msg attribute), 574 | MultiThreadRecordContainer (class in cytoflowgui.utility.event_tracer), 516 |
| MOUSE_DOUBLE_CLICK_EVENT (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575 | mutable (cytoflowgui.editors.subset_list_editor.SubsetListEditor attribute), 480 |
| MOUSE_MOVE_EVENT (cytoflowgui.matplotlib_backend_local.Msg attribute), 574 | N |
| MOUSE_MOVE_EVENT (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575 | name (cytoflow.operations.binning.BinningOp attribute), 322 |
| MOUSE_PRESS_EVENT (cytoflowgui.matplotlib_backend_local.Msg attribute), 574 | name (cytoflow.operations.channel_stat.ChannelStatisticOp attribute), 329 |
| MOUSE_PRESS_EVENT (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575 | name (cytoflow.operations.color_translation.ColorTranslationDiagnostic attribute), 334 |
| MOUSE_RELEASE_EVENT (cytoflowgui.matplotlib_backend_local.Msg attribute), 574 | name (cytoflow.operations.density.DensityGateOp at- tribute), 335 |
| MOUSE_RELEASE_EVENT (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575 | name (cytoflow.operations.flowpeaks.FlowPeaksOp attribute), 340 |
| mouseDoubleClickEvent() (cytoflowgui.matplotlib_backend_local.FigureCanvasQTAggLocal method), 574 | name (cytoflow.operations.frame_stat.FrameStatisticOp attribute), 350 |
| mouseMoveEvent() (cytoflowgui.editors.range_slider.RangeSlider method), 480 | name (cytoflow.operations.gaussian.GaussianMixtureOp attribute), 352 |
| mouseMoveEvent() (cytoflowgui.matplotlib_backend_local.FigureCanvasQTAggLocal method), 574 | name (cytoflow.operations.i_operation.IOperation at- tribute), 360 |
| mousePressEvent() (cytoflowgui.editors.range_slider.RangeSlider method), 479 | name (cytoflow.operations.kmeans.KMeansOp attribute), 365 |
| mousePressEvent() (cytoflowgui.matplotlib_backend_local.FigureCanvasQTAggLocal method), 574 | name (cytoflow.operations.pca.PCAOp attribute), 372 |
| mouseReleaseEvent() (cytoflowgui.editors.range_slider.RangeSlider method), 480 | name (cytoflow.operations.polygon.PolygonOp attribute), 376 |
| mouseReleaseEvent() (cytoflowgui.matplotlib_backend_local.FigureCanvasQTAggLocal method), 574 | name (cytoflow.operations.quad.QuadOp attribute), 383 |
| movable (cytoflowgui.experiment_pane.ExperimentBrowserDockPane attribute), 565 | name (cytoflow.operations.range.RangeOp attribute), 390 |
| movable (cytoflowgui.export_task.ExportPane attribute), 568 | name (cytoflow.operations.range2d.Range2DOP at- tribute), 394 |
| movable (cytoflowgui.view_pane.PlotParamsPane attribute), 579 | name (cytoflow.operations.ratio.RatioOp attribute), 399 |
| MplFilter (class in cytoflow.utility.logging), 417 | name (cytoflow.operations.threshold.ThresholdOp at- tribute), 400 |
| Msg (class in cytoflowgui.matplotlib_backend_local), 574 | name (cytoflow.operations.xform_stat.TransformStatisticOp attribute), 404 |
| Msg (class in cytoflowgui.matplotlib_backend_remote), 575 | name (cytoflow.utility.hlog_scale.HlogScale attribute), 414 |
| Msg (class in cytoflowgui.workflow.workflow), 559 | name (cytoflow.utility.hlog_scale.MatplotlibHlogScale at- tribute), 415 |
| multiple_open (cytoflowgui.editors.vertical_notebook.VerticalNotebook attribute), 482 | name (cytoflow.utility.linear_scale.LinearScale attribute), 417 |
| multiple_open (cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor attribute), 483 | name (cytoflow.utility.log_scale.LogScale attribute), 417 |
| MultiThreadChangeEventRecorder (class in cytoflowgui.utility.event_tracer), 516 | name (cytoflow.utility.logicle_scale.LogicleScale at- tribute), 419 |
| | name (cytoflow.utility.logicle_scale.MatplotlibLogicleScale attribute), 419 |
| | name (cytoflow.utility.scale.IScale attribute), 421 |
| | name (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564 |
| | name (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute), 481 |
| | name (cytoflowgui.experiment_pane.ExperimentBrowserDockPane attribute), 565 |

name (*cytoflowgui.experiment_pane_model.StringNode attribute*), 567
name (*cytoflowgui.export_task.ExportPane attribute*), 568
name (*cytoflowgui.export_task.ExportTaskPane attribute*), 568
name (*cytoflowgui.help_pane.HelpDockPane attribute*), 570
name (*cytoflowgui.import_dialog.TubeTrait attribute*), 572
name (*cytoflowgui.utility.event_tracer.ChangeMessageRecord attribute*), 515
name (*cytoflowgui.view_pane.PlotParamsPane attribute*), 579
name (*cytoflowgui.view_pane.ViewDockPane attribute*), 578
name (*cytoflowgui.workflow.workflow_item.WorkflowItem attribute*), 561
name (*cytoflowgui.workflow_controller.WorkflowItemHandler attribute*), 580
name (*cytoflowgui.workflow_pane.WorkflowDockPane attribute*), 582
name_metadata (*cytoflow.operations.import_op.ImportOp attribute*), 362
name_object (*cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute*), 481
name_object_trait (*cytoflowgui.editors.vertical_notebook.VerticalNotebookPage attribute*), 481
new (*cytoflowgui.utility.event_tracer.ChangeMessageRecord attribute*), 515
new_figure_manager() (in module *cytoflowgui.matplotlib_backend_remote*), 576
NEW_WORKFLOW (*cytoflowgui.workflow.workflow.Msg attribute*), 559
next_wi (*cytoflowgui.workflow.workflow_item.WorkflowItem attribute*), 562
NO_MODEL (*cytoflowgui.workflow.operations.tasbe.Progress attribute*), 550
norm() (*cytoflow.utility.hlog_scale.HlogScale method*), 414
norm() (*cytoflow.utility.linear_scale.LinearScale method*), 417
norm() (*cytoflow.utility.log_scale.LogScale method*), 417
norm() (*cytoflow.utility.logicle_scale.LogicleScale method*), 419
norm() (*cytoflow.utility.scale.IScale method*), 422
not_false() (in module *cytoflowgui.import_dialog*), 571
not_true() (in module *cytoflowgui.import_dialog*), 571
NullView (class in *cytoflow.operations.base_op_views*), 315
num_clusters (*cytoflow.operations.kmeans.KMeansOp attribute*), 365
num_components (*cytoflow.operations.gaussian.GaussianMixtureOp attribute*), 352
num_components (*cytoflow.operations.pca.PCAOp attribute*), 372
num_hist_bins() (in module *cytoflow.utility.util_functions*), 423
numerator (*cytoflow.operations.ratio.RatioOp attribute*), 399
numeric_indices (*cytoflowgui.view_plugins.stats_1d.Stats1DHandler attribute*), 531
numeric_indices (*cytoflowgui.view_plugins.stats_2d.Stats2DHandler attribute*), 532
numeric_statistics_names (*cytoflowgui.workflow_controller.WorkflowItemHandler attribute*), 580
O
old (*cytoflowgui.utility.event_tracer.ChangeMessageRecord attribute*), 515
on_export() (*cytoflowgui.export_task.ExportTask method*), 569
op (*cytoflow.operations.autofluorescence.AutofluorescenceDiagnosticView attribute*), 313
op (*cytoflow.operations.base_op_views.OpView attribute*), 314
op (*cytoflow.operations.bead_calibration.BeadCalibrationDiagnosticView attribute*), 389
op (*cytoflow.operations.binning.BinningView attribute*), 323
op (*cytoflow.operations.bleedthrough_linear.BleedthroughLinearDiagnosticView attribute*), 329
op (*cytoflow.operations.color_translation.ColorTranslationDiagnosticView attribute*), 334
op (*cytoflow.operations.density.DensityGateView attribute*), 338
op (*cytoflow.operations.flowpeaks.FlowPeaks1DView attribute*), 344
op (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView attribute*), 349
op (*cytoflow.operations.flowpeaks.FlowPeaks2DView attribute*), 346
op (*cytoflow.operations.gaussian.GaussianMixture1DView attribute*), 356
op (*cytoflow.operations.gaussian.GaussianMixture2DView attribute*), 358
op (*cytoflow.operations.kmeans.KMeans1DView attribute*), 367
op (*cytoflow.operations.kmeans.KMeans2DView attribute*), 369
op (*cytoflow.operations.polygon.DensityPolygonSelectionView attribute*), 382
op (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView attribute*), 379
op (*cytoflow.operations.quad.DensityQuadSelectionView attribute*), 388

`op` (`cytoflow.operations.quad.ScatterplotQuadSelectionView` attribute), 385
`op` (`cytoflow.operations.range.RangeSelection` attribute), 392
`op` (`cytoflow.operations.range2d.DensityRangeSelection2DView` attribute), 398
`op` (`cytoflow.operations.range2d.ScatterplotRangeSelection2DView` attribute), 397
`op` (`cytoflow.operations.threshold.ThresholdSelection` attribute), 402
`Op1DView` (class in `cytoflow.operations.base_op_views`), 314
`Op2DView` (class in `cytoflow.operations.base_op_views`), 314
`op_error` (`cytoflowgui.workflow.workflow_item.WorkflowItem` attribute), 562
`op_error_trait` (`cytoflowgui.workflow.workflow_item.WorkflowItem` attribute), 562
`op_plugins` (`cytoflowgui.help_pane.HelpDockPane` attribute), 570
`op_plugins` (`cytoflowgui.workflow_controller.WorkflowController` attribute), 581
`op_plugins` (`cytoflowgui.workflow_controller.WorkflowItemHandler` attribute), 580
`OP_STATUS` (`cytoflowgui.workflow.Changed` attribute), 536
`op_warning` (`cytoflowgui.workflow.workflow_item.WorkflowItem` attribute), 562
`op_warning_trait` (`cytoflowgui.workflow.workflow_item.WorkflowItem` attribute), 562
`open()` (`cytoflowgui.editors.vertical_notebook.VerticalNotebook` method), 482
`operation` (`cytoflowgui.workflow.workflow_item.WorkflowItem` attribute), 561
`operation_id` (`cytoflowgui.op_plugins.autofluorescence.AutofluorescencePlugin` attribute), 486
`operation_id` (`cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin` attribute), 488
`operation_id` (`cytoflowgui.op_plugins.binning.BinningPlugin` attribute), 488
`operation_id` (`cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearPlugin` attribute), 491
`operation_id` (`cytoflowgui.op_plugins.channel_stat.ChannelStatisticPlugin` attribute), 491
`operation_id` (`cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin` attribute), 493
`operation_id` (`cytoflowgui.op_plugins.density.DensityGatePlugin` attribute), 494
`operation_id` (`cytoflowgui.op_plugins.flowpeaks.FlowPeaksPlugin` attribute), 495
`operation_id` (`cytoflowgui.op_plugins.gaussian_1d.GaussianMixture1DPlugin` attribute), 496
`operation_id` (`cytoflowgui.op_plugins.gaussian_2d.GaussianMixture2DPlugin` attribute), 498
`operation_id` (`cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin` attribute), 499
`operation_id` (`cytoflowgui.op_plugins.import_op.ImportPlugin` attribute), 500
`operation_id` (`cytoflowgui.op_plugins.kmeans.KMeansPlugin` attribute), 501
`operation_id` (`cytoflowgui.op_plugins.pca.PCAPlugin` attribute), 503
`operation_id` (`cytoflowgui.op_plugins.polygon.PolygonPlugin` attribute), 504
`operation_id` (`cytoflowgui.op_plugins.quad.QuadPlugin` attribute), 505
`operation_id` (`cytoflowgui.op_plugins.range.RangePlugin` attribute), 506
`operation_id` (`cytoflowgui.op_plugins.range2d.Range2DPlugin` attribute), 507
`operation_id` (`cytoflowgui.op_plugins.ratio.RatioPlugin` attribute), 508
`operation_id` (`cytoflowgui.op_plugins.tasbe.TasbePlugin` attribute), 512
`operation_id` (`cytoflowgui.op_plugins.threshold.ThresholdPlugin` attribute), 513
`operation_id` (`cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin` attribute), 514
`operation_traits_view()` (`cytoflowgui.workflow_controller.WorkflowItemHandler` method), 580
`OpHandler` (class in `cytoflowgui.op_plugins.op_plugin_base`), 562
`OpPluginManager` (class in `cytoflowgui.op_plugins.op_plugin_base`), 562
`OpView` (class in `cytoflow.operations.base_op_views`), 314
`output_dims` (`cytoflow.utility.hlog_scale.MatplotlibHlogScale.HlogTransformPlugin` attribute), 415
`output_dims` (`cytoflow.utility.hlog_scale.MatplotlibHlogScale.InvertedLogTransformPlugin` attribute), 415
`output_dims` (`cytoflow.utility.logicle_scale.MatplotlibLogicleScale.InvertedLogiclePlugin` attribute), 420
`output_dims` (`cytoflow.utility.logicle_scale.MatplotlibLogicleScale.LogiclePlugin` attribute), 420
`page_deletable` (`cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor` attribute), 483
`page_description` (`cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor` attribute), 483
`page_icon` (`cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor` attribute), 483
`page_name` (`cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor` attribute), 483
`pages` (`cytoflowgui.editors.vertical_notebook.VerticalNotebook` attribute), 482

[paintEvent\(\)](#) (*cytoflowgui.editors.range_slider.RangeSlider* method), 479
[paintEvent\(\)](#) (*cytoflowgui.matplotlib_backend_local.FigureCanvasQt* method), 575
[ParallelCoordinatesHandler](#) (class in *cytoflowgui.view_plugins.parallel_coords*), 527
[ParallelCoordinatesParamsHandler](#) (class in *cytoflowgui.view_plugins.parallel_coords*), 526
[ParallelCoordinatesPlotParams](#) (class in *cytoflowgui.workflow.views.parallel_coords*), 554
[ParallelCoordinatesPlugin](#) (class in *cytoflowgui.view_plugins.parallel_coords*), 527
[ParallelCoordinatesView](#) (class in *cytoflow.views.parallel_coords*), 452
[ParallelCoordinatesWorkflowView](#) (class in *cytoflowgui.workflow.views.parallel_coords*), 554
[params_pane](#) (*cytoflowgui.export_task.ExportTask* attribute), 569
[parent](#) (*cytoflowgui.editors.vertical_notebook.VerticalNotebook* attribute), 482
[parent](#) (*cytoflowgui.import_dialog.Tube* attribute), 571
[parse_tube\(\)](#) (in module *cytoflow.operations.import_op*), 364
[path](#) (*cytoflow.views.export_fcs.ExportFCS* attribute), 438
[PCAHandler](#) (class in *cytoflowgui.op_plugins.pca*), 503
[PCAOp](#) (class in *cytoflow.operations.pca*), 372
[PCAPLugin](#) (class in *cytoflowgui.op_plugins.pca*), 503
[PCAWorkflowOp](#) (class in *cytoflowgui.workflow.operations.pca*), 548
[percentiles\(\)](#) (in module *cytoflow.utility.algorithms*), 407
[plot\(\)](#) (*cytoflow.operations.autofluorescence.Autofluorescence* method), 313
[plot\(\)](#) (*cytoflow.operations.base_op_views.AnnotatingView* method), 315
[plot\(\)](#) (*cytoflow.operations.base_op_views.ByView* method), 315
[plot\(\)](#) (*cytoflow.operations.bead_calibration.BeadCalibration* method), 321
[plot\(\)](#) (*cytoflow.operations.binning.BinningView* method), 324
[plot\(\)](#) (*cytoflow.operations.bleedthrough_linear.BleedthroughLinear* method), 329
[plot\(\)](#) (*cytoflow.operations.color_translation.ColorTranslation* method), 334
[plot\(\)](#) (*cytoflow.operations.density.DensityGateView* method), 338
[plot\(\)](#) (*cytoflow.operations.flowpeaks.FlowPeaks1DView* method), 344
[plot\(\)](#) (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* method), 349
[plot\(\)](#) (*cytoflow.operations.flowpeaks.FlowPeaks2DView* method), 347
[plot\(\)](#) (*cytoflow.operations.gaussian.GaussianMixture1DView* method), 356
[plot\(\)](#) (*cytoflow.operations.gaussian.GaussianMixture2DView* method), 359
[plot\(\)](#) (*cytoflow.operations.kmeans.KMeans1DView* method), 368
[plot\(\)](#) (*cytoflow.operations.kmeans.KMeans2DView* method), 370
[plot\(\)](#) (*cytoflow.operations.polygon.DensityPolygonSelectionView* method), 382
[plot\(\)](#) (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView* method), 380
[plot\(\)](#) (*cytoflow.operations.quad.DensityQuadSelectionView* method), 388
[plot\(\)](#) (*cytoflow.operations.quad.ScatterplotQuadSelectionView* method), 386
[plot\(\)](#) (*cytoflow.operations.range.RangeSelection* method), 393
[plotPage](#) (*cytoflow.operations.threshold.ThresholdSelection* method), 403
[plot\(\)](#) (*cytoflow.views.bar_chart.BarChartView* method), 428
[plot\(\)](#) (*cytoflow.views.base_views.Base1DStatisticsView* method), 434
[plot\(\)](#) (*cytoflow.views.base_views.Base1DView* method), 432
[plot\(\)](#) (*cytoflow.views.base_views.Base2DStatisticsView* method), 434
[plot\(\)](#) (*cytoflow.views.base_views.Base2DView* method), 432
[plot\(\)](#) (*cytoflow.views.base_views.BaseDataView* method), 431
[plot\(\)](#) (*cytoflow.views.base_views.BaseNDView* method), 432
[plot\(\)](#) (*cytoflow.views.base_views.BaseStatisticsView* method), 433
[plot\(\)](#) (*cytoflow.views.base_views.BaseView* method), 430
[plot\(\)](#) (*cytoflow.views.densityplot.DensityView* method), 436
[plot\(\)](#) (*cytoflow.views.histogram.HistogramView* method), 440
[plot\(\)](#) (*cytoflow.views.histogram_2d.Histogram2DView* method), 443
[plot\(\)](#) (*cytoflow.views.i_view.IView* method), 446
[plot\(\)](#) (*cytoflow.views.kde_1d.Kde1DView* method), 448
[plot\(\)](#) (*cytoflow.views.kde_2d.Kde2DView* method), 451
[plot\(\)](#) (*cytoflow.views.parallel_coords.ParallelCoordinatesView* method), 453
[plot\(\)](#) (*cytoflow.views.radviz.RadvizView* method), 456

plot() (cytoflow.views.scatterplot.ScatterplotView method), 459
 plot() (cytoflow.views.stats_1d.Stats1DView method), 462
 plot() (cytoflow.views.stats_2d.Stats2DView method), 467
 plot() (cytoflow.views.table.TableView method), 469
 plot() (cytoflow.views.violin.ViolinPlotView method), 471
 plot() (cytoflowgui.workflow.operations.flowpeaks.FlowPeaksWorkflowView method), 543
 plot() (cytoflowgui.workflow.operations.gaussian_1d.GaussianMixtureOpWorkflowView method), 544
 plot() (cytoflowgui.workflow.operations.gaussian_2d.GaussianMixtureOpWorkflowView method), 545
 plot() (cytoflowgui.workflow.operations.kmeans.KMeansWorkflowView method), 546
 plot() (cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView method), 551
 plot() (cytoflowgui.workflow.views.export_fcs.ExportFCSWorkflowView method), 553
 plot() (cytoflowgui.workflow.views.table.TableWorkflowView method), 555
 plot() (cytoflowgui.workflow.views.view_base.WorkflowByView method), 557
 plot() (cytoflowgui.workflow.views.view_base.WorkflowFacetView method), 556
 plot() (cytoflowgui.workflow.workflow_item.WorkflowItem method), 563
 PLOT_CALLED (cytoflowgui.workflow.workflow.Msg attribute), 559
 plot_lock (cytoflowgui.workflow.workflow.RemoteWorkflow attribute), 561
 plot_lock (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 563
 plot_names (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 562
 plot_names_label (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 562
 plotfacet (cytoflowgui.workflow.views.view_base.WorkflowFacetView attribute), 556
 PlotParamsPane (class in cytoflowgui.view_pane), 579
 PluginHelpMixin (class in cytoflowgui.op_plugins.op_plugin_base), 502
 PluginHelpMixin (class in cytoflowgui.view_plugins.view_plugin_base), 535
 plugins (cytoflowgui.workflow_pane.WorkflowDockPane attribute), 582
 poly_area() (in module cytoflow.operations.gaussian), 358
 polygon_contains() (in module cytoflow.utility.algorithms), 407
 PolygonHandler (class in cytoflowgui.op_plugins.polygon), 503
 PolygonOp (class in cytoflow.operations.polygon), 376
 PolygonPlugin (class in cytoflowgui.op_plugins.polygon), 504
 PolygonSelectionView (class in cytoflowgui.workflow.operations.polygon), 549
 PolygonViewHandler (class in cytoflowgui.op_plugins.polygon), 503
 PolygonWorkflowOp (class in cytoflowgui.workflow.operations.polygon), 549
 PositiveInteger (class in cytoflow.utility.custom_traits), 408
 PositiveFloat (class in cytoflow.utility.custom_traits), 408
 PositiveInt (class in cytoflow.utility.custom_traits), 408
 post_tracer() (cytoflowgui.utility.event_tracer.ChangeEventRecorder method), 516
 post_tracer() (cytoflowgui.utility.event_tracer.MultiThreadChangeEventRecorder method), 517
 posteriors (cytoflow.operations.gaussian.GaussianMixtureOp attribute), 352
 pre_tracer() (cytoflowgui.utility.event_tracer.ChangeEventRecorder method), 516
 pre_tracer() (cytoflowgui.utility.event_tracer.MultiThreadChangeEventRecorder method), 517
 preferences_helper (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 565
 preferences_path (cytoflowgui.preferences.CytoflowPreferences attribute), 576
 PREV_RESULT (cytoflowgui.workflow.Changed attribute), 536
 previous_channels (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580
 previous_conditions (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580
 previous_conditions_names (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580
 previous_statistics_names (cytoflowgui.workflow_controller.WorkflowItemHandler attribute), 580
 previous_wi (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 562
 PRINT (cytoflowgui.matplotlib_backend_local.Msg attribute), 574
 PRINT (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575

print_figure() (cytoflowgui.matplotlib_backend_local.FigureCanvasTkAgg method), 575

Progress (class in cytoflowgui.workflow.operations.task), 550

Q

QuadHandler (class in cytoflowgui.op_plugins.quad), 505

QuadOp (class in cytoflow.operations.quad), 383

QuadPlugin (class in cytoflowgui.op_plugins.quad), 505

QuadSelectionView (class in cytoflowgui.workflow.operations.quad), 549

QuadViewHandler (class in cytoflowgui.op_plugins.quad), 505

QuadWorkflowOp (class in cytoflowgui.workflow.operations.quad), 549

query() (cytoflow.experiment.Experiment method), 475

R

r (cytoflow.utility.logicle_scale.LogicleScale attribute), 419

RadvizHandler (class in cytoflowgui.view_plugins.radviz), 528

RadvizParamsHandler (class in cytoflowgui.view_plugins.radviz), 528

RadvizPlotParams (class in cytoflowgui.workflow.views.radviz), 554

RadvizPlugin (class in cytoflowgui.view_plugins.radviz), 529

RadvizView (class in cytoflow.views.radviz), 455

RadvizWorkflowView (class in cytoflowgui.workflow.views.radviz), 554

random_string() (in module cytoflow.utility.util_functions), 426

Range2DHandler (class in cytoflowgui.op_plugins.range2d), 507

Range2DOp (class in cytoflow.operations.range2d), 394

Range2DPlugin (class in cytoflowgui.op_plugins.range2d), 507

Range2DSelectionView (class in cytoflowgui.workflow.operations.range2d), 550

Range2DViewHandler (class in cytoflowgui.op_plugins.range2d), 507

Range2DWorkflowOp (class in cytoflowgui.workflow.operations.range2d), 550

RangeHandler (class in cytoflowgui.op_plugins.range), 506

RangeOp (class in cytoflow.operations.range), 390

RangePlugin (class in cytoflowgui.op_plugins.range), 506

RangeSelection (class in cytoflow.operations.range), 392

RangeSelectionView (class in cytoflowgui.workflow.operations.range), 549

RangeSlider (class in cytoflowgui.editors.range_slider), 479

RangeSubset (class in cytoflowgui.workflow.subset), 558

RangeSubsetHandler (class in cytoflowgui.subset_controllers), 577

RangeViewHandler (class in cytoflowgui.op_plugins.range), 506

RangeWorkflowOp (class in cytoflowgui.workflow.operations.range), 549

RatioHandler (class in cytoflowgui.op_plugins.ratio), 508

RatioOp (class in cytoflow.operations.ratio), 399

RatioPlugin (class in cytoflowgui.op_plugins.ratio), 508

RatioWorkflowOp (class in cytoflowgui.workflow.operations.ratio), 550

record() (cytoflowgui.utility.event_tracer.RecordContainer method), 516

record_events() (in module cytoflowgui.utility.event_tracer), 517

RecordContainer (class in cytoflowgui.utility.event_tracer), 516

recv_main() (cytoflowgui.workflow.workflow.LocalWorkflow method), 560

recv_main() (cytoflowgui.workflow.workflow.RemoteWorkflow method), 561

recv_thread (cytoflowgui.workflow.workflow.LocalWorkflow attribute), 560

recv_thread (cytoflowgui.workflow.workflow.RemoteWorkflow attribute), 561

register_deletable_listener() (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage method), 482

register_description_listener() (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage method), 482

register_icon_listener() (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage method), 482

register_name_listener() (cytoflowgui.editors.vertical_notebook.VerticalNotebookPage method), 482

register_scale() (in module cytoflow.utility.scale), 422

remote_canvas_connection (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564

remote_eval() (cytoflowgui.workflow.workflow.LocalWorkflow method), 560

remote_exec() (cytoflowgui.workflow.workflow.LocalWorkflow method), 560

remote_main() (in module cytoflowgui.run), 577

remote_process (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564
 remote_workflow_connection (cytoflowgui.cytoflow_application.CytoflowApplication attribute), 564
 RemoteWorkflow (class in cytoflowgui.workflow.workflow), 560
 remove_channel (cytoflowgui.op_plugins.bead_calibrations.BeadCalibrationHandler attribute), 486
 remove_channel (cytoflowgui.op_plugins.pca.PCAHandler attribute), 503
 remove_channel (cytoflowgui.view_plugins.parallel_coordinates.ParallelCoordinatesHandler attribute), 527
 remove_channel (cytoflowgui.view_plugins.radviz.RadvizHandler attribute), 528
 remove_control (cytoflowgui.op_plugins.bleedthrough_lines.BleedthroughLinesHandler attribute), 489
 remove_control (cytoflowgui.op_plugins.color_translations.ColorTranslationsHandler attribute), 493
 REMOVE_ITEMS (cytoflowgui.workflow.workflow.Msg attribute), 559
 remove_tubes (cytoflowgui.import_dialog.ExperimentDialog attribute), 573
 Removed (class in cytoflow.utility.custom_traits), 410
 reset_channels() (cytoflowgui.workflow.operations.import_op.ImportWorkflowOp method), 545
 reset_channels_event (cytoflowgui.op_plugins.import_op.ImportHandler attribute), 500
 RESIZE_EVENT (cytoflowgui.matplotlib_backend_local.FigureCanvas attribute), 574
 RESIZE_EVENT (cytoflowgui.matplotlib_backend_remote.Msg attribute), 575
 resizeEvent() (cytoflowgui.matplotlib_backend_local.FigureCanvas attribute), 574
 RESULT (cytoflowgui.workflow.Changed attribute), 536
 result (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 561
 row_facet (cytoflow.views.table.TableView attribute), 468
 run() (cytoflowgui.cytoflow_application.CytoflowApplication method), 564
 run() (cytoflowgui.workflow.workflow.RemoteWorkflow method), 561
 RUN_ALL (cytoflowgui.workflow.workflow.Msg attribute), 559
 run_all() (cytoflowgui.workflow.workflow.LocalWorkflow method), 560
 run_gui() (in module cytoflowgui.run), 577
S
 samples (cytoflowgui.op_plugins.import_op.ImportHandler attribute), 500
 sanitize_identifier() (in module cytoflow.utility.util_functions), 426
 sanitize_metadata() (in module cytoflowgui.import_dialog), 571
 save_to_directory() (in module cytoflowgui.utility.event_tracer.MultiThreadRecordContainer), 516
 save_yaml() (in module cytoflowgui.workflow.serialization), 557
 save_parallel_coordinates_handler (cytoflowgui.op_plugins.parallel_coordinates.ParallelCoordinatesHandler attribute), 314
 save_scaler (cytoflow.operations.binning.BinningOp attribute), 322
 save_binning (cytoflow.operations.binning.BinningView attribute), 323
 save_flowpeaks_handler (cytoflowgui.op_plugins.flowpeaks.FlowPeaksHandler attribute), 344
 save_flowpeaks_op (cytoflow.operations.flowpeaks.FlowPeaksOp attribute), 340
 save_gaussian_handler (cytoflowgui.op_plugins.gaussian.GaussianHandler attribute), 356
 save_gaussian_op (cytoflow.operations.gaussian.GaussianMixtureOp attribute), 356
 save_kmeans_op (cytoflow.operations.kmeans.KMeansOp attribute), 367
 save_kmeans_handler (cytoflowgui.op_plugins.kmeans.KMeansHandler attribute), 365
 save_pca_op (cytoflow.operations.pca.PCAOp attribute), 372
 save_range_selection (cytoflow.operations.range.RangeSelection attribute), 392
 save_threshold_selection (cytoflow.operations.threshold.ThresholdSelection attribute), 402
 save_bar_chart_op (cytoflowgui.op_plugins.bar_chart.BarChartOp attribute), 426
 save_base_1d_statistics_view (cytoflow.views.base_views.Base1DStatisticsView attribute), 433
 save_base_1d_view (cytoflow.views.base_views.Base1DView attribute), 431
 save_base_nd_view (cytoflow.views.base_views.BaseNDView attribute), 432
 save_histogram_view (cytoflow.views.histogram.HistogramView attribute), 439
 save_kde_1d_view (cytoflow.views.kde_1d.Kde1DView attribute), 447
 save_parallel_coordinates_view (cytoflow.views.parallel_coords.ParallelCoordinatesView attribute), 452
 save_radviz_view (cytoflow.views.radviz.RadvizView attribute), 455
 save_stats_1d_view (cytoflow.views.stats_1d.Stats1DView attribute), 461
 save_violin_plot_view (cytoflow.views.violin.ViolinPlotView attribute), 471
 scale_factory() (in module cytoflow.utility.scale), 422
 ScaleEnum (class in cytoflow.utility.custom_traits), 409

ScaleMixin (class in cytoflow.utility.scale), 422

ScatterplotHandler (class in cytoflowgui.view_plugins.scatterplot), 529

ScatterplotParamsHandler (class in cytoflowgui.view_plugins.scatterplot), 529

ScatterplotPlotParams (class in cytoflowgui.workflow.views.scatterplot), 554

ScatterplotPlugin (class in cytoflowgui.view_plugins.scatterplot), 529

ScatterplotPolygonSelectionView (class in cytoflow.operations.polygon), 379

ScatterplotQuadSelectionView (class in cytoflow.operations.quad), 385

ScatterplotRangeSelection2DView (class in cytoflow.operations.range2d), 396

ScatterplotView (class in cytoflow.views.scatterplot), 458

ScatterplotWorkflowView (class in cytoflowgui.workflow.views.scatterplot), 554

SELECT (cytoflowgui.workflow.workflow.Msg attribute), 559

selected (cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor attribute), 483

selected (cytoflowgui.workflow.workflow.LocalWorkflow attribute), 560

selected (cytoflowgui.workflow.workflow.RemoteWorkflow attribute), 560

selected_tubes (cytoflowgui.import_dialog.ExperimentDialogHandler attribute), 573

selected_view_params_view() (cytoflowgui.workflow_controller.WorkflowController method), 581

selected_view_plot_name_view() (cytoflowgui.workflow_controller.WorkflowController method), 581

selected_view_traits_view() (cytoflowgui.workflow_controller.WorkflowController method), 581

send_main() (cytoflowgui.workflow.workflow.LocalWorkflow attribute), 560

send_main() (cytoflowgui.workflow.workflow.RemoteWorkflow attribute), 561

send_thread (cytoflowgui.workflow.workflow.LocalWorkflow attribute), 560

send_thread (cytoflowgui.workflow.workflow.RemoteWorkflow attribute), 560

send_to_local() (cytoflowgui.matplotlib_backend_remote.FigureCanvasAgg method), 576

send_to_remote() (cytoflowgui.matplotlib_backend_local.FigureCanvasAgg method), 574

SentinelRecord (class in cytoflowgui.utility.event_tracer), 515

set() (cytoflow.utility.custom_traits.Deprecated method), 411

set() (cytoflow.utility.custom_traits.Removed method), 410

set_default_locators_and_formatters() (cytoflow.utility.hlog_scale.MatplotlibHlogScale method), 415

set_default_locators_and_formatters() (cytoflow.utility.logicle_scale.MatplotlibLogicleScale method), 419

set_default_scale() (in module cytoflow.utility.scale), 422

set_params() (cytoflow.utility.hlog_scale.HlogMajorLocator method), 416

set_params() (cytoflow.utility.hlog_scale.HlogMinorLocator method), 416

set_params() (cytoflow.utility.logicle_scale.LogicleMajorLocator method), 421

set_params() (cytoflow.utility.logicle_scale.LogicleMinorLocator method), 421

set_working() (cytoflowgui.matplotlib_backend_remote.FigureCanvasAgg method), 576

setFixedHeight() (cytoflowgui.util.HintedMainWindow method), 578

setFixedHeight() (cytoflowgui.util.HintedWidget method), 578

setFixedWidth() (cytoflowgui.util.HintedMainWindow method), 578

setFixedWidth() (cytoflowgui.util.HintedWidget method), 578

setHigh() (cytoflowgui.editors.range_slider.RangeSlider method), 479

setLow() (cytoflowgui.editors.range_slider.RangeSlider method), 479

setup_event (cytoflowgui.op_plugins.import_op.ImportHandler attribute), 500

short_name (cytoflowgui.op_plugins.autofluorescence.AutofluorescencePlugin attribute), 486

short_name (cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin attribute), 488

short_name (cytoflowgui.op_plugins.binning.BinningPlugin attribute), 488

short_name (cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearPlugin attribute), 491

short_name (cytoflowgui.op_plugins.channel_stat.ChannelStatisticPlugin attribute), 491

short_name (cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin attribute), 493

short_name (cytoflowgui.op_plugins.density.DensityGatePlugin attribute), 494

short_name (cytoflowgui.op_plugins.flowpeaks.FlowPeaksPlugin attribute), 495

short_name (cytoflowgui.op_plugins.gaussian_1d.GaussianMixture1DPlugin attribute), 497

short_name (cytoflowgui.op_plugins.gaussian_2d.GaussianMixture2DPlugin attribute), 498

`short_name` (`cytoflowgui.op_plugins.i_op_plugin.IOperationPlugin` attribute), 499
`should_apply()` (`cytoflowgui.workflow.operations.autofluorescence.AutoFluorescenceOperation` method), 537
`short_name` (`cytoflowgui.op_plugins.import_op.ImportOperationPlugin` attribute), 500
`should_apply()` (`cytoflowgui.workflow.operations.operation_base.IWorkflowOperation` method), 547
`short_name` (`cytoflowgui.op_plugins.kmeans.KMeansPlugin` attribute), 501
`should_apply()` (`cytoflowgui.workflow.operations.operation_base.WorkflowOperation` method), 548
`short_name` (`cytoflowgui.op_plugins.pca.PCAPlugin` attribute), 503
`should_clear_estimate()` (`cytoflowgui.workflow.operations.autofluorescence.AutoFluorescenceOperation` method), 537
`short_name` (`cytoflowgui.op_plugins.polygon.PolygonPlugin` attribute), 504
`should_clear_estimate()` (`cytoflowgui.workflow.operations.bead_calibration.BeadCalibrationOperation` method), 538
`short_name` (`cytoflowgui.op_plugins.quad.QuadPlugin` attribute), 505
`should_clear_estimate()` (`cytoflowgui.workflow.operations.bleedthrough_linear.BleedthroughLinearOperation` method), 540
`short_name` (`cytoflowgui.op_plugins.range.RangePlugin` attribute), 506
`should_clear_estimate()` (`cytoflowgui.workflow.operations.color_translation.ColorTranslationOperation` method), 541
`short_name` (`cytoflowgui.op_plugins.range2d.Range2DPlugin` attribute), 507
`should_clear_estimate()` (`cytoflowgui.workflow.operations.operation_base.IWorkflowOperation` method), 547
`short_name` (`cytoflowgui.op_plugins.ratio.RatioPlugin` attribute), 508
`should_clear_estimate()` (`cytoflowgui.workflow.operations.operation_base.IWorkflowOperation` method), 547
`short_name` (`cytoflowgui.op_plugins.tasbe.TasbePlugin` attribute), 512
`should_clear_estimate()` (`cytoflowgui.workflow.operations.operation_base.IWorkflowOperation` method), 547
`short_name` (`cytoflowgui.op_plugins.threshold.ThresholdPlugin` attribute), 514
`should_clear_estimate()` (`cytoflowgui.workflow.operations.operation_base.WorkflowOperation` method), 548
`short_name` (`cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin` attribute), 514
`should_clear_estimate()` (`cytoflowgui.workflow.operations.tasbe.TasbeWorkflowOperation` method), 551
`short_name` (`cytoflowgui.view_plugins.bar_chart.BarChartPlugin` attribute), 519
`should_plot()` (`cytoflowgui.workflow.operations.autofluorescence.AutoFluorescenceOperation` method), 537
`short_name` (`cytoflowgui.view_plugins.density.DensityPlugin` attribute), 519
`should_plot()` (`cytoflowgui.workflow.operations.bead_calibration.BeadCalibrationOperation` method), 538
`short_name` (`cytoflowgui.view_plugins.export_fcs.ExportFCSPlugin` attribute), 520
`should_plot()` (`cytoflowgui.workflow.operations.bleedthrough_linear.BleedthroughLinearOperation` method), 540
`short_name` (`cytoflowgui.view_plugins.histogram.HistogramPlugin` attribute), 521
`should_plot()` (`cytoflowgui.workflow.operations.color_translation.ColorTranslationOperation` method), 541
`short_name` (`cytoflowgui.view_plugins.histogram_2d.Histogram2DPlugin` attribute), 523
`should_plot()` (`cytoflowgui.workflow.operations.density.DensityGateWorkflowView` method), 542
`short_name` (`cytoflowgui.view_plugins.i_view_plugin.IViewPlugin` attribute), 523
`should_plot()` (`cytoflowgui.workflow.operations.density.DensityGateWorkflowView` method), 542
`short_name` (`cytoflowgui.view_plugins.kde_1d.Kde1DPlugin` attribute), 524
`should_plot()` (`cytoflowgui.workflow.operations.tasbe.TasbeWorkflowView` method), 551
`short_name` (`cytoflowgui.view_plugins.kde_2d.Kde2DPlugin` attribute), 525
`should_plot()` (`cytoflowgui.workflow.views.view_base.IWorkflowView` method), 556
`short_name` (`cytoflowgui.view_plugins.parallel_coords.ParallelCoordinatesPlugin` attribute), 527
`should_plot()` (`cytoflowgui.workflow.views.view_base.WorkflowView` method), 556
`short_name` (`cytoflowgui.view_plugins.radviz.RadvizPlugin` attribute), 529
`show()` (in module `cytoflowgui.matplotlib_backend_remote`), 576
`short_name` (`cytoflowgui.view_plugins.scatterplot.ScatterplotPlugin` attribute), 529
`show_error()` (`cytoflowgui.cytoflow_application.CytoflowApplication` method), 565
`short_name` (`cytoflowgui.view_plugins.stats_1d.Stats1DPlugin` attribute), 531
`SHUTDOWN` (`cytoflowgui.workflow.workflow.Msg` attribute), 559
`short_name` (`cytoflowgui.view_plugins.stats_2d.Stats2DPlugin` attribute), 533
`shutdown()` (`cytoflowgui.workflow.workflow.RemoteWorkflow` method), 561
`short_name` (`cytoflowgui.view_plugins.table.TablePlugin` attribute), 533
`shutdown_remote_process()` (`cytoflowgui.workflow.workflow.LocalWorkflow` method), 560

sigma (cytoflow.operations.density.DensityGateOp attribute), 335
 sigma (cytoflow.operations.gaussian.GaussianMixtureOp attribute), 352
 sizeHint() (cytoflowgui.util.HintedMainWindow method), 578
 sizeHint() (cytoflowgui.util.HintedWidget method), 578
 sliderOrderForMove() (cytoflowgui.editors.range_slider.RangeSlider method), 479
 sliderOrderForPaint() (cytoflowgui.editors.range_slider.RangeSlider method), 479
 source (cytoflowgui.utility.event_tracer.CallingMessageReceiver attribute), 515
 spillover (cytoflow.operations.bleedthrough_linear.BleedthroughLinearDiagnosticOp attribute), 326
 start_remote_process() (in module cytoflowgui.run), 577
 statistic (cytoflow.operations.xform_stat.TransformStatisticOp attribute), 404
 statistic (cytoflow.utility.logicle_scale.LogicleScale attribute), 418
 statistic (cytoflow.utility.scale.IScale attribute), 422
 statistic (cytoflow.views.bar_chart.BarChartView attribute), 426
 statistic (cytoflow.views.base_views.Base1DStatisticsView attribute), 433
 statistic (cytoflow.views.stats_1d.Stats1DView attribute), 461
 statistic (cytoflow.views.table.TableView attribute), 468
 statistic (cytoflowgui.experiment_pane_model.StatisticNode attribute), 567
 statistic_name (cytoflow.operations.channel_stat.ChannelStatisticOp attribute), 330
 statistic_name (cytoflow.operations.frame_stat.FrameStatisticOp attribute), 351
 statistic_name (cytoflow.operations.xform_stat.TransformStatisticOp attribute), 405
 StatisticNode (class in cytoflowgui.experiment_pane_model), 567
 statistics (cytoflow.experiment.Experiment attribute), 474
 statistics (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 562
 statistics_names (cytoflowgui.workflow_controller.WorkflowController attribute), 580
 StatisticsNode (class in cytoflowgui.experiment_pane_model), 567
 Stats1DHandler (class in cytoflowgui.view_plugins.stats_1d), 531
 Stats1DParamsHandler (class in cytoflowgui.view_plugins.stats_1d), 530
 Stats1DPlotParams (class in cytoflowgui.workflow.views.stats_1d), 555
 Stats1DPlotParams (class in cytoflowgui.workflow.views.view_base), 557
 Stats1DPlugin (class in cytoflowgui.view_plugins.stats_1d), 531
 Stats1DView (class in cytoflow.views.stats_1d), 461
 Stats1DWorkflowView (class in cytoflowgui.workflow.views.stats_1d), 555
 Stats2DHandler (class in cytoflowgui.view_plugins.stats_2d), 532
 Stats2DParamsHandler (class in cytoflowgui.view_plugins.stats_2d), 532
 Stats2DPlotParams (class in cytoflowgui.workflow.views.stats_2d), 555
 Stats2DPlotParams (class in cytoflowgui.workflow.views.view_base), 557
 Stats2DPlugin (class in cytoflowgui.view_plugins.stats_2d), 532
 Stats2DView (class in cytoflow.views.stats_2d), 464
 Stats2DWorkflowView (class in cytoflowgui.workflow.views.stats_2d), 555
 status (cytoflowgui.workflow.workflow_item.WorkflowItem attribute), 562
 stop() (cytoflowgui.cytoflow_application.CytoflowApplication method), 565
 StringNode (class in cytoflowgui.experiment_pane_model), 567
 subcolumn_facet (cytoflow.views.table.TableView attribute), 468
 subrow_facet (cytoflow.views.table.TableView attribute), 468
 subset (cytoflow.operations.binning.BinningView attribute), 324
 subset (cytoflow.operations.bleedthrough_linear.BleedthroughLinearDiagnosticOp attribute), 329
 subset (cytoflow.operations.channel_stat.ChannelStatisticOp attribute), 330
 subset (cytoflow.operations.color_translation.ColorTranslationDiagnosticOp attribute), 334
 subset (cytoflow.operations.density.DensityGateView attribute), 338
 subset (cytoflow.operations.flowpeaks.FlowPeaks1DView attribute), 344
 subset (cytoflow.operations.flowpeaks.FlowPeaks2DDensityView attribute), 349
 subset (cytoflow.operations.flowpeaks.FlowPeaks2DView attribute), 346
 subset (cytoflow.operations.frame_stat.FrameStatisticOp attribute), 351
 subset (cytoflow.operations.gaussian.GaussianMixture1DView attribute), 356
 subset (cytoflow.operations.gaussian.GaussianMixture2DView attribute), 356

- attribute*), 358
- subset (*cytoflow.operations.kmeans.KMeans1DView attribute*), 367
- subset (*cytoflow.operations.kmeans.KMeans2DView attribute*), 370
- subset (*cytoflow.operations.polygon.DensityPolygonSelectionView attribute*), 382
- subset (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView attribute*), 379
- subset (*cytoflow.operations.quad.DensityQuadSelectionView attribute*), 388
- subset (*cytoflow.operations.quad.ScatterplotQuadSelectionView attribute*), 385
- subset (*cytoflow.operations.range.RangeSelection attribute*), 392
- subset (*cytoflow.operations.range2d.DensityRangeSelection2DView attribute*), 398
- subset (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView attribute*), 397
- subset (*cytoflow.operations.threshold.ThresholdSelection attribute*), 402
- subset (*cytoflow.views.bar_chart.BarChartView attribute*), 427
- subset (*cytoflow.views.base_views.BaseDataView attribute*), 431
- subset (*cytoflow.views.base_views.BaseStatisticsView attribute*), 433
- subset (*cytoflow.views.densityplot.DensityView attribute*), 435
- subset (*cytoflow.views.export_fcs.ExportFCS attribute*), 439
- subset (*cytoflow.views.histogram.HistogramView attribute*), 439
- subset (*cytoflow.views.histogram_2d.Histogram2DView attribute*), 442
- subset (*cytoflow.views.kde_1d.Kde1DView attribute*), 447
- subset (*cytoflow.views.kde_2d.Kde2DView attribute*), 450
- subset (*cytoflow.views.parallel_coords.ParallelCoordinatesView attribute*), 453
- subset (*cytoflow.views.radviz.RadvizView attribute*), 455
- subset (*cytoflow.views.scatterplot.ScatterplotView attribute*), 458
- subset (*cytoflow.views.stats_1d.Stats1DView attribute*), 461
- subset (*cytoflow.views.stats_2d.Stats2DView attribute*), 465
- subset (*cytoflow.views.table.TableView attribute*), 468
- subset (*cytoflow.views.violin.ViolinPlotView attribute*), 471
- subset () (*cytoflow.experiment.Experiment method*), 475
- subset_handler_factory () (in module *cytoflowgui.subset_controllers*), 577
- subset_view () (*cytoflowgui.subset_controllers.BoolSubsetHandler method*), 577
- subset_view () (*cytoflowgui.subset_controllers.CategorySubsetHandler method*), 577
- subset_view () (*cytoflowgui.subset_controllers.RangeSubsetHandler method*), 577
- SubsetListEditor (class in *cytoflowgui.editors.subset_list_editor*), 480
- table_editor (*cytoflowgui.import_dialog.ExperimentDialogHandler attribute*), 573
- TableHandler (class in *cytoflowgui.view_plugins.table*), 533
- TablePlugin (class in *cytoflowgui.view_plugins.table*), 533
- TableView (class in *cytoflow.views.table*), 468
- TableWorkflowView (class in *cytoflowgui.workflow.views.table*), 555
- TabListEditor (class in *cytoflowgui.editors.tab_list_editor*), 480
- TasbeHandler (class in *cytoflowgui.op_plugins.tasbe*), 512
- TasbePlugin (class in *cytoflowgui.op_plugins.tasbe*), 512
- TasbeViewHandler (class in *cytoflowgui.op_plugins.tasbe*), 512
- TasbeWorkflowOp (class in *cytoflowgui.workflow.operations.tasbe*), 551
- TasbeWorkflowView (class in *cytoflowgui.workflow.operations.tasbe*), 551
- task (*cytoflowgui.export_task.ExportPane attribute*), 568
- task (*cytoflowgui.help_pane.HelpDockPane attribute*), 570
- task (*cytoflowgui.view_pane.ViewDockPane attribute*), 578
- TASKS (*cytoflowgui.export_task.ExportFigurePlugin attribute*), 570
- threshold (*cytoflow.operations.threshold.ThresholdOp attribute*), 400
- ThresholdHandler (class in *cytoflowgui.op_plugins.threshold*), 513
- ThresholdOp (class in *cytoflow.operations.threshold*), 400
- ThresholdPlugin (class in *cytoflowgui.op_plugins.threshold*), 513
- ThresholdSelection (class in *cytoflow.operations.threshold*), 402
- ThresholdSelectionView (class in *cytoflowgui.workflow.operations.threshold*), 551
- ThresholdViewHandler (class in *cytoflowgui.op_plugins.threshold*), 513

[validate\(\)](#) (*cytoflow.utility.custom_traits.PositiveCInt method*), 408
[validate\(\)](#) (*cytoflow.utility.custom_traits.PositiveFloat method*), 408
[validate\(\)](#) (*cytoflow.utility.custom_traits.PositiveInt method*), 408
[validate\(\)](#) (*cytoflowgui.import_dialog.ConvertingBool method*), 572
[validate\(\)](#) (*cytoflowgui.workflow.operations.import_op.ValidPythonIdentifier method*), 545
[ValidPythonIdentifier](#) (class in *cytoflowgui.workflow.operations.import_op*), 545
[value](#) (*cytoflowgui.editors.toggle_button.ToggleButtonEditor attribute*), 480
[value](#) (*cytoflowgui.experiment_pane_model.StringNode attribute*), 568
[ValuesBoundsEditor](#) (class in *cytoflowgui.editors.value_bounds_editor*), 481
[variable](#) (*cytoflow.views.bar_chart.BarChartView attribute*), 426
[variable](#) (*cytoflow.views.base_views.BaseStatisticsView attribute*), 433
[variable](#) (*cytoflow.views.stats_1d.Stats1DView attribute*), 461
[variable](#) (*cytoflow.views.stats_2d.Stats2DView attribute*), 465
[variable](#) (*cytoflow.views.violin.ViolinPlotView attribute*), 469
[variable_scale](#) (*cytoflow.views.stats_1d.Stats1DView attribute*), 461
[VerticalListEditor](#) (class in *cytoflowgui.editors.vertical_list_editor*), 481
[VerticalNotebook](#) (class in *cytoflowgui.editors.vertical_notebook*), 482
[VerticalNotebookEditor](#) (class in *cytoflowgui.editors.vertical_notebook_editor*), 483
[VerticalNotebookPage](#) (class in *cytoflowgui.editors.vertical_notebook*), 481
[vertices](#) (*cytoflow.operations.polygon.PolygonOp attribute*), 376
[view](#) (*cytoflowgui.editors.vertical_notebook_editor.VerticalNotebookEditor attribute*), 483
[view](#) (*cytoflowgui.preferences.CytoflowPreferencesPane attribute*), 576
[VIEW](#) (*cytoflowgui.workflow.Changed attribute*), 536
[view_error](#) (*cytoflowgui.workflow.workflow_item.WorkflowItem attribute*), 562
[view_error_trait](#) (*cytoflowgui.workflow.workflow_item.WorkflowItem attribute*), 562
[view_id](#) (*cytoflowgui.op_plugins.autofluorescence.AutofluorescencePlugin attribute*), 486
[view_id](#) (*cytoflowgui.op_plugins.bead_calibration.BeadCalibrationPlugin attribute*), 488
[view_id](#) (*cytoflowgui.op_plugins.binning.BinningPlugin attribute*), 488
[view_id](#) (*cytoflowgui.op_plugins.bleedthrough_linear.BleedthroughLinearPlugin attribute*), 491
[view_id](#) (*cytoflowgui.op_plugins.channel_stat.ChannelStatisticPlugin attribute*), 491
[view_id](#) (*cytoflowgui.op_plugins.color_translation.ColorTranslationPlugin attribute*), 493
[view_id](#) (*cytoflowgui.op_plugins.density.DensityGatePlugin attribute*), 494
[view_id](#) (*cytoflowgui.op_plugins.flowpeaks.FlowPeaksPlugin attribute*), 495
[view_id](#) (*cytoflowgui.op_plugins.gaussian_1d.GaussianMixture1DPlugin attribute*), 497
[view_id](#) (*cytoflowgui.op_plugins.gaussian_2d.GaussianMixture2DPlugin attribute*), 498
[view_id](#) (*cytoflowgui.op_plugins.import_op.ImportPlugin attribute*), 500
[view_id](#) (*cytoflowgui.op_plugins.kmeans.KMeansPlugin attribute*), 501
[view_id](#) (*cytoflowgui.op_plugins.pca.PCAPlugin attribute*), 503
[view_id](#) (*cytoflowgui.op_plugins.polygon.PolygonPlugin attribute*), 504
[view_id](#) (*cytoflowgui.op_plugins.quad.QuadPlugin attribute*), 505
[view_id](#) (*cytoflowgui.op_plugins.range.RangePlugin attribute*), 506
[view_id](#) (*cytoflowgui.op_plugins.range2d.Range2DPlugin attribute*), 507
[view_id](#) (*cytoflowgui.op_plugins.ratio.RatioPlugin attribute*), 508
[view_id](#) (*cytoflowgui.op_plugins.tasbe.TasbePlugin attribute*), 512
[view_id](#) (*cytoflowgui.op_plugins.threshold.ThresholdPlugin attribute*), 513
[view_id](#) (*cytoflowgui.op_plugins.xform_stat.TransformStatisticPlugin attribute*), 514
[view_id](#) (*cytoflowgui.view_plugins.bar_chart.BarChartPlugin attribute*), 519
[view_id](#) (*cytoflowgui.view_plugins.density.DensityPlugin attribute*), 519
[view_id](#) (*cytoflowgui.view_plugins.export_fcs.ExportFCSPlugin attribute*), 520
[view_id](#) (*cytoflowgui.view_plugins.histogram.HistogramPlugin attribute*), 521
[view_id](#) (*cytoflowgui.view_plugins.histogram_2d.Histogram2DPlugin attribute*), 523
[view_id](#) (*cytoflowgui.view_plugins.i_view_plugin.IViewPlugin attribute*), 523
[view_id](#) (*cytoflowgui.view_plugins.kde_1d.Kde1DPlugin attribute*), 524

view_id(*cytoflowgui.view_plugins.kde_2d.Kde2DPlugin* attribute), 525

view_id(*cytoflowgui.view_plugins.parallel_coords.ParallelCoordsPlugin* attribute), 527

view_id(*cytoflowgui.view_plugins.radviz.RadvizPlugin* attribute), 529

view_id(*cytoflowgui.view_plugins.scatterplot.ScatterplotPlugin* attribute), 529

view_id(*cytoflowgui.view_plugins.stats_1d.Stats1DPlugin* attribute), 531

view_id(*cytoflowgui.view_plugins.stats_2d.Stats2DPlugin* attribute), 532

view_id(*cytoflowgui.view_plugins.table.TablePlugin* attribute), 533

view_id(*cytoflowgui.view_plugins.violin.ViolinPlotPlugin* attribute), 535

view_limits()(*cytoflow.utility.hlog_scale.HlogMajorLocator* method), 416

view_limits()(*cytoflow.utility.logicle_scale.LogicleMajorLocator* method), 421

view_limits()(*cytoflow.utility.logicle_scale.LogicleMinorLocator* method), 421

view_params_view()(*cytoflowgui.workflow_controller.WorkflowItemHandler* method), 581

view_plot_name_view()(*cytoflowgui.workflow_controller.WorkflowItemHandler* method), 581

view_plugins(*cytoflowgui.help_pane.HelpDockPane* attribute), 570

view_plugins(*cytoflowgui.view_pane.ViewDockPane* attribute), 579

view_plugins(*cytoflowgui.workflow_controller.WorkflowController* attribute), 581

view_plugins(*cytoflowgui.workflow_controller.WorkflowItemHandler* attribute), 580

view_traits_view()(*cytoflowgui.workflow_controller.WorkflowItemHandler* method), 580

view_warning(*cytoflowgui.workflow.workflow_item.WorkflowItem* attribute), 562

view_warning_trait(*cytoflowgui.workflow.workflow_item.WorkflowItem* attribute), 562

ViewDockPane(*class in cytoflowgui.view_pane*), 578

ViewHandler(*class in cytoflowgui.view_plugins.view_plugin_base*), 535

ViewPluginManager(*class in cytoflowgui.view_plugins.i_view_plugin*), 524

views(*cytoflowgui.workflow.workflow_item.WorkflowItem* attribute), 561

ViolinHandler(*class in cytoflowgui.view_plugins.violin*), 535

ViolinParamsHandler(*class in cytoflowgui.view_plugins.violin*), 535

ViolinPlotParams(*class in cytoflowgui.workflow.views.violin*), 557

ViolinPlotPlugin(*class in cytoflowgui.view_plugins.violin*), 535

ViolinPlotView(*class in cytoflow.views.violin*), 469

ViolinPlotWorkflowView(*class in cytoflowgui.workflow.views.violin*), 557

visible(*cytoflowgui.experiment_pane.ExperimentBrowserDockPane* attribute), 565

visible(*cytoflowgui.export_task.ExportTask* attribute), 568

visible(*cytoflowgui.view_pane.PlotParamsPane* attribute), 579

W

W(*cytoflow.utility.logicle_scale.LogicleScale* attribute), 418

when(*cytoflowgui.editors.subset_list_editor.SubsetListEditor* attribute), 480

whiten(*cytoflow.operations.pca.PCAOp* attribute), 372

wi(*cytoflowgui.experiment_pane_model.ChannelNode* attribute), 566

wi(*cytoflowgui.experiment_pane_model.ChannelsNode* attribute), 566

wi(*cytoflowgui.experiment_pane_model.ConditionNode* attribute), 566

wi(*cytoflowgui.experiment_pane_model.ConditionsNode* attribute), 566

wi(*cytoflowgui.experiment_pane_model.StatisticNode* attribute), 567

wi(*cytoflowgui.experiment_pane_model.StatisticsNode* attribute), 567

wi(*cytoflowgui.experiment_pane_model.WorkflowItemNode* attribute), 565

wi_sync()(*cytoflowgui.workflow.workflow.LocalWorkflow* method), 560

wi_waitfor()(*cytoflowgui.workflow.workflow.LocalWorkflow* method), 560

width(*cytoflowgui.export_task.ExportTask* attribute), 560

workflow(*cytoflowgui.workflow.workflow.LocalWorkflow* attribute), 560

workflow(*cytoflowgui.workflow.workflow.RemoteWorkflow* attribute), 560

workflow(*cytoflowgui.workflow.workflow_item.WorkflowItem* attribute), 562

workflow_handlers(*cytoflowgui.workflow_controller.WorkflowController* attribute), 581

workflow_traits_view()(*cytoflowgui.workflow_controller.WorkflowController* method), 581

WorkflowByView(*class in cytoflowgui.workflow.views.view_base*), 556

WorkflowController (class *cytoflowgui.workflow_controller*), 581

WorkflowDockPane (class *cytoflowgui.workflow_pane*), 582

WorkflowFacetView (class *cytoflowgui.workflow.views.view_base*), 556

WorkflowItem (class *cytoflowgui.workflow.workflow_item*), 561

WorkflowItemHandler (class *cytoflowgui.workflow_controller*), 580

WorkflowItemNode (class *cytoflowgui.experiment_pane_model*), 565

WorkflowOperation (class *cytoflowgui.workflow.operations.operation_base*), 548

WorkflowView (class *cytoflowgui.workflow.views.view_base*), 556

WORKING (*cytoflowgui.matplotlib_backend_local.Msg* attribute), 574

WORKING (*cytoflowgui.matplotlib_backend_remote.Msg* attribute), 575

write_fcs() (in module *cytoflow.utility.fcswrite*), 413

X

x_error_statistic (*cytoflow.views.base_views.Base2DStatsView* attribute), 434

x_error_statistic (*cytoflow.views.stats_2d.Stats2DView* attribute), 464

xchannel (*cytoflow.operations.base_op_views.Op2DView* attribute), 314

xchannel (*cytoflow.operations.density.DensityGateOp* attribute), 335

xchannel (*cytoflow.operations.density.DensityGateView* attribute), 338

xchannel (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* attribute), 348

xchannel (*cytoflow.operations.flowpeaks.FlowPeaks2DView* attribute), 346

xchannel (*cytoflow.operations.gaussian.GaussianMixture2DView* attribute), 358

xchannel (*cytoflow.operations.kmeans.KMeans2DView* attribute), 369

xchannel (*cytoflow.operations.polygon.DensityPolygonSelectionView* attribute), 381

xchannel (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView* attribute), 379

xchannel (*cytoflow.operations.quad.DensityQuadSelectionView* attribute), 387

xchannel (*cytoflow.operations.quad.QuadOp* attribute), 383

xchannel (*cytoflow.operations.quad.ScatterplotQuadSelectionView* attribute), 385

xchannel (*cytoflow.operations.range2d.DensityRangeSelection2DView* attribute), 398

xchannel (*cytoflow.operations.range2d.Range2DOp* attribute), 394

xchannel (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView* attribute), 396

xchannel (*cytoflow.views.base_views.Base2DView* attribute), 432

xchannel (*cytoflow.views.densityplot.DensityView* attribute), 435

xchannel (*cytoflow.views.histogram_2d.Histogram2DView* attribute), 442

xchannel (*cytoflow.views.kde_2d.Kde2DView* attribute), 449

xchannel (*cytoflow.views.scatterplot.ScatterplotView* attribute), 458

xfacet (*cytoflow.operations.binning.BinningView* attribute), 324

xfacet (*cytoflow.operations.density.DensityGateView* attribute), 338

xfacet (*cytoflow.operations.flowpeaks.FlowPeaks1DView* attribute), 344

xfacet (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* attribute), 349

xfacet (*cytoflow.operations.flowpeaks.FlowPeaks2DView* attribute), 346

xfacet (*cytoflow.operations.gaussian.GaussianMixture1DView* attribute), 356

xfacet (*cytoflow.operations.gaussian.GaussianMixture2DView* attribute), 358

xfacet (*cytoflow.operations.kmeans.KMeans1DView* attribute), 368

xfacet (*cytoflow.operations.kmeans.KMeans2DView* attribute), 370

xfacet (*cytoflow.operations.polygon.DensityPolygonSelectionView* attribute), 382

xfacet (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView* attribute), 379

xfacet (*cytoflow.operations.quad.DensityQuadSelectionView* attribute), 388

xfacet (*cytoflow.operations.quad.ScatterplotQuadSelectionView* attribute), 386

xfacet (*cytoflow.operations.range.RangeSelection* attribute), 392

xfacet (*cytoflow.operations.range2d.DensityRangeSelection2DView* attribute), 398

xfacet (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView* attribute), 397

xfacet (*cytoflow.operations.threshold.ThresholdSelectionView* attribute), 402

xfacet (*cytoflow.views.bar_chart.BarChartView* attribute), 427

xfacet (*cytoflow.views.base_views.BaseView* attribute), 430

xfacet (*cytoflow.views.densityplot.DensityView* attribute), 435

- xfacet** (*cytoflow.views.histogram.HistogramView attribute*), 440
xfacet (*cytoflow.views.histogram_2d.Histogram2DView attribute*), 442
xfacet (*cytoflow.views.kde_1d.Kde1DView attribute*), 447
xfacet (*cytoflow.views.kde_2d.Kde2DView attribute*), 450
xfacet (*cytoflow.views.parallel_coords.ParallelCoordinatesView attribute*), 453
xfacet (*cytoflow.views.radviz.RadvizView attribute*), 455
xfacet (*cytoflow.views.scatterplot.ScatterplotView attribute*), 458
xfacet (*cytoflow.views.stats_1d.Stats1DView attribute*), 461
xfacet (*cytoflow.views.stats_2d.Stats2DView attribute*), 465
xfacet (*cytoflow.views.violin.ViolinPlotView attribute*), 471
xhigh (*cytoflow.operations.range2d.Range2DOp attribute*), 394
xlow (*cytoflow.operations.range2d.Range2DOp attribute*), 394
xscale (*cytoflow.operations.base_op_views.Op2DView attribute*), 314
xscale (*cytoflow.operations.density.DensityGateOp attribute*), 335
xscale (*cytoflow.operations.density.DensityGateView attribute*), 338
xscale (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView attribute*), 348
xscale (*cytoflow.operations.flowpeaks.FlowPeaks2DView attribute*), 346
xscale (*cytoflow.operations.gaussian.GaussianMixture2DView attribute*), 358
xscale (*cytoflow.operations.kmeans.KMeans2DView attribute*), 370
xscale (*cytoflow.operations.polygon.DensityPolygonSelectionView attribute*), 381
xscale (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView attribute*), 379
xscale (*cytoflow.operations.quad.DensityQuadSelectionView attribute*), 388
xscale (*cytoflow.operations.quad.ScatterplotQuadSelectionView attribute*), 385
xscale (*cytoflow.operations.range2d.DensityRangeSelection2DView attribute*), 398
xscale (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView attribute*), 397
xscale (*cytoflow.views.base_views.Base2DStatisticsView attribute*), 434
xscale (*cytoflow.views.base_views.Base2DView attribute*), 432
xscale (*cytoflow.views.densityplot.DensityView attribute*), 435
xscale (*cytoflow.views.histogram_2d.Histogram2DView attribute*), 442
xscale (*cytoflow.views.kde_2d.Kde2DView attribute*), 450
xscale (*cytoflow.views.scatterplot.ScatterplotView attribute*), 458
xscale (*cytoflow.views.stats_2d.Stats2DView attribute*), 465
xstatistic (*cytoflow.views.base_views.Base2DStatisticsView attribute*), 434
xstatistic (*cytoflow.views.stats_2d.Stats2DView attribute*), 464
xthreshold (*cytoflow.operations.quad.QuadOp attribute*), 383
- Y**
- y_error_statistic** (*cytoflow.views.base_views.Base2DStatisticsView attribute*), 434
y_error_statistic (*cytoflow.views.stats_2d.Stats2DView attribute*), 465
ychannel (*cytoflow.operations.base_op_views.Op2DView attribute*), 314
ychannel (*cytoflow.operations.density.DensityGateOp attribute*), 335
ychannel (*cytoflow.operations.density.DensityGateView attribute*), 338
ychannel (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView attribute*), 348
ychannel (*cytoflow.operations.flowpeaks.FlowPeaks2DView attribute*), 346
ychannel (*cytoflow.operations.gaussian.GaussianMixture2DView attribute*), 358
ychannel (*cytoflow.operations.kmeans.KMeans2DView attribute*), 369
ychannel (*cytoflow.operations.polygon.DensityPolygonSelectionView attribute*), 381
ychannel (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView attribute*), 379
ychannel (*cytoflow.operations.quad.DensityQuadSelectionView attribute*), 387
ychannel (*cytoflow.operations.quad.QuadOp attribute*), 383
ychannel (*cytoflow.operations.quad.ScatterplotQuadSelectionView attribute*), 385
ychannel (*cytoflow.operations.range2d.DensityRangeSelection2DView attribute*), 398
ychannel (*cytoflow.operations.range2d.Range2DOp attribute*), 394
ychannel (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView attribute*), 397
ychannel (*cytoflow.views.base_views.Base2DView attribute*), 432

- ychannel (*cytoflow.views.densityplot.DensityView* attribute), 435
- ychannel (*cytoflow.views.histogram_2d.Histogram2DView* attribute), 442
- ychannel (*cytoflow.views.kde_2d.Kde2DView* attribute), 449
- ychannel (*cytoflow.views.scatterplot.ScatterplotView* attribute), 458
- yfacet (*cytoflow.operations.binning.BinningView* attribute), 324
- yfacet (*cytoflow.operations.density.DensityGateView* attribute), 338
- yfacet (*cytoflow.operations.flowpeaks.FlowPeaks1DView* attribute), 344
- yfacet (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* attribute), 349
- yfacet (*cytoflow.operations.flowpeaks.FlowPeaks2DView* attribute), 347
- yfacet (*cytoflow.operations.gaussian.GaussianMixture1DView* attribute), 356
- yfacet (*cytoflow.operations.gaussian.GaussianMixture2DView* attribute), 359
- yfacet (*cytoflow.operations.kmeans.KMeans1DView* attribute), 368
- yfacet (*cytoflow.operations.kmeans.KMeans2DView* attribute), 370
- yfacet (*cytoflow.operations.polygon.DensityPolygonSelectionView* attribute), 382
- yfacet (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView* attribute), 380
- yfacet (*cytoflow.operations.quad.DensityQuadSelectionView* attribute), 388
- yfacet (*cytoflow.operations.quad.ScatterplotQuadSelectionView* attribute), 386
- yfacet (*cytoflow.operations.range.RangeSelection* attribute), 392
- yfacet (*cytoflow.operations.range2d.DensityRangeSelection2DView* attribute), 399
- yfacet (*cytoflow.operations.range2d.ScatterplotRangeSelection2DView* attribute), 397
- yfacet (*cytoflow.operations.threshold.ThresholdSelection* attribute), 402
- yfacet (*cytoflow.views.bar_chart.BarChartView* attribute), 427
- yfacet (*cytoflow.views.base_views.BaseView* attribute), 430
- yfacet (*cytoflow.views.densityplot.DensityView* attribute), 435
- yfacet (*cytoflow.views.histogram.HistogramView* attribute), 440
- yfacet (*cytoflow.views.histogram_2d.Histogram2DView* attribute), 443
- yfacet (*cytoflow.views.kde_1d.Kde1DView* attribute), 447
- yfacet (*cytoflow.views.kde_2d.Kde2DView* attribute), 450
- yfacet (*cytoflow.views.parallel_coords.ParallelCoordinatesView* attribute), 453
- yfacet (*cytoflow.views.radviz.RadvizView* attribute), 455
- yfacet (*cytoflow.views.scatterplot.ScatterplotView* attribute), 458
- yfacet (*cytoflow.views.stats_1d.Stats1DView* attribute), 461
- yfacet (*cytoflow.views.stats_2d.Stats2DView* attribute), 465
- yfacet (*cytoflow.views.violin.ViolinPlotView* attribute), 471
- yhigh (*cytoflow.operations.range2d.Range2DOp* attribute), 395
- ylo (*cytoflow.operations.range2d.Range2DOp* attribute), 395
- yscale (*cytoflow.operations.base_op_views.Op2DView* attribute), 314
- yscale (*cytoflow.operations.density.DensityGateOp* attribute), 335
- yscale (*cytoflow.operations.density.DensityGateView* attribute), 338
- yscale (*cytoflow.operations.flowpeaks.FlowPeaks2DDensityView* attribute), 348
- yscale (*cytoflow.operations.flowpeaks.FlowPeaks2DView* attribute), 346
- yscale (*cytoflow.operations.gaussian.GaussianMixture2DView* attribute), 358
- yscale (*cytoflow.operations.kmeans.KMeans2DView* attribute), 370
- yscale (*cytoflow.operations.polygon.DensityPolygonSelectionView* attribute), 382
- yscale (*cytoflow.operations.polygon.ScatterplotPolygonSelectionView* attribute), 379
- yscale (*cytoflow.operations.quad.DensityQuadSelectionView* attribute), 398
- yscale (*cytoflow.operations.quad.ScatterplotQuadSelectionView* attribute), 397
- yscale (*cytoflow.views.base_views.Base2DStatisticsView* attribute), 434
- yscale (*cytoflow.views.base_views.Base2DView* attribute), 432
- yscale (*cytoflow.views.densityplot.DensityView* attribute), 435
- yscale (*cytoflow.views.histogram_2d.Histogram2DView* attribute), 442
- yscale (*cytoflow.views.kde_2d.Kde2DView* attribute), 450
- yscale (*cytoflow.views.scatterplot.ScatterplotView* attribute), 458

tribute), 458
yscale (*cytoflow.views.stats_2d.Stats2DView* attribute),
465
ystatistic (*cytoflow.views.base_views.Base2DStatisticsView*
attribute), 434
ystatistic (*cytoflow.views.stats_2d.Stats2DView*
attribute), 464
ythreshold (*cytoflow.operations.quad.QuadOp* at-
tribute), 383

Z

ZoomableHTMLEditor (class in
cytoflowgui.editors.zoomable_html_editor),
484