

---

# **CppMicroServices Documentation**

***Release 3.7.4***

**CppMicroServices Contributors**

**Jan 13, 2023**



<b>1</b>	<b>C++ Micro Services</b>	<b>3</b>
1.1	Introduction . . . . .	3
1.2	Requirements . . . . .	3
1.3	Supported Platforms . . . . .	3
1.4	Legal . . . . .	5
1.5	Code of Conduct . . . . .	5
1.6	Quick Start . . . . .	5
1.7	Git Branch Conventions . . . . .	6
1.8	Git Hooks General Information . . . . .	6
1.9	Git Hooks Failure Help . . . . .	6
<b>2</b>	<b>Build Instructions</b>	<b>7</b>
2.1	Prerequisites . . . . .	7
2.2	Configuration . . . . .	7
2.3	Building . . . . .	8
2.4	Integration . . . . .	8
<b>3</b>	<b>Getting Started</b>	<b>11</b>
3.1	The Build System . . . . .	11
3.2	A Simple Service Interface . . . . .	11
3.3	Bundle and BundleContext . . . . .	12
3.4	Publishing a Service . . . . .	13
3.5	Consuming a Service . . . . .	14
3.6	Installing and Starting Bundles . . . . .	16
<b>4</b>	<b>Contributing to C++ Micro Services</b>	<b>19</b>
4.1	Reporting issues . . . . .	19
4.2	CppMicroServices RFCs . . . . .	19
4.3	Contribution guidelines . . . . .	20
4.4	Contributor Covenant Code of Conduct . . . . .	21
<b>5</b>	<b>Legal</b>	<b>23</b>
5.1	Copyright . . . . .	23
5.2	License . . . . .	23
<b>6</b>	<b>Tutorial</b>	<b>29</b>
6.1	Example 1 - Service Event Listener . . . . .	29

6.2	Example 2 - Dictionary Service Bundle . . . . .	33
6.3	Example 2b - Alternative Dictionary Service Bundle . . . . .	37
6.4	Example 3 - Dictionary Client Bundle . . . . .	40
6.5	Example 4 - Robust Dictionary Client Bundle . . . . .	42
6.6	Example 5 - Service Tracker Dictionary Client Bundle . . . . .	47
6.7	Example 6 - Spell Checker Service Bundle . . . . .	50
6.8	Example 7 - Spell Checker Client Bundle . . . . .	56
<b>7</b>	<b>Emulating Singletons</b>	<b>61</b>
7.1	Meyers Singleton . . . . .	61
7.2	Singletons as a Service . . . . .	62
<b>8</b>	<b>Framework</b>	<b>65</b>
8.1	The Resource System . . . . .	65
8.2	Bundle Properties . . . . .	66
8.3	Service Hooks . . . . .	68
8.4	Static Bundles . . . . .	70
<b>9</b>	<b>Http Service</b>	<b>73</b>
<b>10</b>	<b>Web Console</b>	<b>75</b>
10.1	Screenshots . . . . .	75
<b>11</b>	<b>Shell Service</b>	<b>79</b>
<b>12</b>	<b>usResourceCompiler3</b>	<b>81</b>
12.1	Command-Line Reference . . . . .	81
12.2	Example usage . . . . .	82
<b>13</b>	<b>usShell3</b>	<b>85</b>
13.1	Command-Line Reference . . . . .	85
<b>14</b>	<b>CMake Support</b>	<b>87</b>
14.1	usFunctionAddResources . . . . .	87
14.2	usFunctionEmbedResources . . . . .	88
14.3	usFunctionGetResourceSource . . . . .	89
14.4	usFunctionGenerateBundleInit . . . . .	90
<b>15</b>	<b>Framework API</b>	<b>91</b>
15.1	Main . . . . .	91
15.2	Utilities . . . . .	162
15.3	Macros . . . . .	193
<b>16</b>	<b>Declarative Services API</b>	<b>197</b>
16.1	BundleDTO . . . . .	197
16.2	ComponentConfigurationDTO . . . . .	198
16.3	ComponentConstants . . . . .	199
16.4	ComponentContext . . . . .	199
16.5	ComponentDescriptionDTO . . . . .	202
16.6	ComponentException . . . . .	203
16.7	ReferenceDTO . . . . .	204
16.8	SatisfiedReferenceDTO . . . . .	205
16.9	ServiceComponentRuntime . . . . .	206
16.10	ServiceReferenceDTO . . . . .	208
16.11	UnsatisfiedReferenceDTO . . . . .	209

<b>17 Configuration Admin API</b>	<b>211</b>
17.1 Configuration	211
17.2 ConfigurationAdmin	213
17.3 ConfigurationException	215
17.4 ConfigurationListener	215
17.5 ManagedService	217
17.6 ManagedServiceFactory	217
<b>18 LogService API</b>	<b>219</b>
18.1 LogService	219
<b>19 AsyncWorkService API</b>	<b>221</b>
19.1 AsyncWorkService	221
<b>20 Http Service API</b>	<b>223</b>
20.1 HttpServlet	223
20.2 HttpServletRequest	225
20.3 HttpServletResponse	226
20.4 ServletConfig	229
20.5 ServletContainer	230
20.6 ServletContext	231
<b>21 Web Console API</b>	<b>233</b>
21.1 AbstractWebConsolePlugin	233
21.2 SimpleWebConsolePlugin	236
21.3 WebConsoleConstants	237
21.4 WebConsoleDefaultVariableResolver	239
21.5 WebConsoleVariableResolver	239
<b>22 Shell Service API</b>	<b>241</b>
22.1 ShellService	241
<b>23 Change Log</b>	<b>243</b>
23.1 (UNRELEASED) vX.X.X (20XX-XX-XX)	243
23.2 Added	243
23.3 Changed	243
23.4 Removed	243
23.5 Deprecated	243
23.6 Fixed	243
23.7 (UNRELEASED) v3.7.4 (2022-11-02)	243
23.8 Added	244
23.9 Changed	244
23.10 Removed	244
23.11 Deprecated	244
23.12 Fixed	244
23.13 (UNRELEASED) v3.7.3 (2022-08-29)	244
23.14 Added	244
23.15 Changed	244
23.16 Removed	245
23.17 Deprecated	245
23.18 Fixed	245
23.19 v3.7.2 (2022-06-16)	245
23.20 General Note	245
23.21 Added	245
23.22 Changed	246

23.23 Removed . . . . .	246
23.24 Deprecated . . . . .	246
23.25 Fixed . . . . .	246
23.26 v3.6.0 (2020-08-13) . . . . .	247
23.27 Added . . . . .	247
23.28 Changed . . . . .	247
23.29 Removed . . . . .	248
23.30 Deprecated . . . . .	248
23.31 Fixed . . . . .	248
23.32 v3.5.0 (2020-07-04) . . . . .	248
23.33 Added . . . . .	248
23.34 Changed . . . . .	248
23.35 Removed . . . . .	248
23.36 Deprecated . . . . .	248
23.37 Fixed . . . . .	248
23.38 v3.4.0 (2019-12-10) . . . . .	249
23.39 Added . . . . .	249
23.40 Changed . . . . .	249
23.41 Removed . . . . .	249
23.42 Deprecated . . . . .	249
23.43 Fixed . . . . .	249
23.44 v3.3.0 (2018-02-20) . . . . .	250
23.45 Added . . . . .	250
23.46 Fixed . . . . .	250
23.47 v3.2.0 (2017-10-30) . . . . .	250
23.48 Added . . . . .	251
23.49 Changed . . . . .	251
23.50 Fixed . . . . .	251
23.51 v3.1.0 (2017-06-01) . . . . .	251
23.52 v3.0.0 (2017-02-08) . . . . .	252
23.53 v2.1.1 (2014-01-22) . . . . .	253
23.54 v2.1.0 (2014-01-11) . . . . .	253
23.55 v2.0.0 (2013-12-23) . . . . .	254
23.56 v1.0.0 (2013-07-18) . . . . .	254

The CppMicroServices project is a C++ library for creating and managing modular software systems based on ideas from [OSGi](#). The code is open source, and [available on github](#).

The main documentation for the site is organized into a couple sections. Start reading at the top for a quick start.

### Continuous Integration Status

Branch	GCC 7.5.0 and 9.4.0	Visual Studio 2019	
	Clang 9.0	Visual Studio 2022	
	Xcode 13.2	MinGW-w64	
	Xcode 13.4		
master			
development			





[Download](#)

### 1.1 Introduction

The C++ Micro Services project is a collection of components for building modular and dynamic service-oriented applications. It is based on [OSGi](#), but tailored to support native cross-platform solutions.

Proper usage of C++ Micro Services patterns and concepts leads to systems with one or more of the following properties:

- Re-use of software components
- Loose coupling between service providers and consumers
- Separation of concerns, based on a service-oriented design
- Clean APIs based on service interfaces
- Extensible and reconfigurable systems

### 1.2 Requirements

None, except a recent enough C++ compiler. All third-party library dependencies are included and mostly used for implementation details.

### 1.3 Supported Platforms

The library makes use of C++17 language and library features and compiles on many different platforms.

Recommended absolute minimum required compiler versions:

- GCC 7.5.0
- Clang 9.0
- Clang from Xcode 10.0 (not tested)
- Visual Studio 2017 (MSVC++ 15.0) (not tested)

Not all of the absolute minimum compiler versions are tested (as noted). We test and recommend the following compilers:

- GCC 9.4.0
- Clang 9.0
- Clang from Xcode 13.2 and 13.4
- Visual Studio 2019 and 2022

Recommended minimum required CMake version:

- CMake 3.17.0

For all CI builds through GitHub Actions, the CMake version (and version of other provided software) we use is determined by the software provided on the GitHub-hosted runners.

For information about the specific versions of software the runners use, please see the following resources:

- *ubuntu-18.04 Runner Information* <<https://github.com/actions/virtual-environments/blob/main/images/linux/Ubuntu1804-README.md>>
- *ubuntu-20.04 Runner Information* <<https://github.com/actions/virtual-environments/blob/main/images/linux/Ubuntu2004-Readme.md>>
- *macos-11 Runner Information* <<https://github.com/actions/virtual-environments/blob/main/images/macos/macos-11-Readme.md>>
- *macos-12 Runner Information* <<https://github.com/actions/virtual-environments/blob/main/images/macos/macos-12-Readme.md>>
- *windows-2019 Runner Information* <<https://github.com/actions/virtual-environments/blob/main/images/win/Windows2019-Readme.md>>
- *windows-2022 Runner Information* <<https://github.com/actions/virtual-environments/blob/main/images/win/Windows2022-Readme.md>>

Below is a list of tested compiler/OS combinations:

- GCC 7.5.0 (Ubuntu 18.04)
- GCC 9.4.0 (Ubuntu 20.04)
- Clang 9.0 (Ubuntu 18.04)
- Apple Clang, Xcode 13.2.0 (OS X 11.6.8)
- Apple Clang, Xcode 13.4.0 (OS X 12.5.0)
- Visual Studio 2019
- Visual Studio 2022
- MinGW-w64

## 1.4 Legal

The C++ Micro Services project was initially developed at the German Cancer Research Center. Its source code is hosted as a [GitHub Project](#). See the [COPYRIGHT file](#) in the top-level directory for detailed copyright information.

This project is licensed under the [Apache License v2.0](#).

## 1.5 Code of Conduct

CppMicroServices.org welcomes developers with different backgrounds and a broad range of experience. A diverse and inclusive community will create more great ideas, provide more unique perspectives, and produce more outstanding code. Our aim is to make the CppMicroServices community welcoming to everyone.

To provide clarity of what is expected of our members, CppMicroServices has adopted the code of conduct defined by [contributor-covenant.org](#). This document is used across many open source communities, and we believe it articulates our values well.

Please refer to the [Code of Conduct](#) for further details.

## 1.6 Quick Start

Start by cloning the project repository. It is important to note that since the project utilizes git submodules, you must clone the repository with the `-recursive` flag. This will also clone the submodules and place them in their respective directories. For further reading about how git submodules work and how to clone them into an already existing repository on your disk, please see [Git's documentation](#).

Essentially, the C++ Micro Services library provides you with a powerful dynamic service registry on top of a managed lifecycle. The framework manages, among other things, logical units of modularity called *bundles* that are contained in shared or static libraries. Each bundle within a library has an associated `cppmicroservices::BundleContext` object, through which the service registry is accessed.

To query the registry for a service object implementing one or more specific interfaces, the code would look like this:

```
#include "cppmicroservices/BundleContext.h"
#include "SomeInterface.h"

using namespace cppmicroservices;

void UseService(BundleContext context)
{
    auto serviceRef = context.GetServiceReference<SomeInterface>();
    if (serviceRef)
    {
        auto service = context.GetService(serviceRef);
        if (service) { /* do something */ }
    }
}
```

Registering a service object against a certain interface looks like this:

```
#include "cppmicroservices/BundleContext.h"
#include "SomeInterface.h"

using namespace cppmicroservices;
```

```
void RegisterSomeService(BundleContext context, const std::shared_ptr<SomeInterface>&
↪service)
{
    context.RegisterService<SomeInterface>(service);
}
```

The OSGi service model additionally allows to annotate services with properties and using these properties during service look-ups. It also allows to track the life-cycle of service objects. Please see the [Documentation](#) for more examples and tutorials and the API reference. There is also a blog post about [OSGi Lite for C++](#).

## 1.7 Git Branch Conventions

The Git repository contains two eternal branches, [master](#) and [development](#). The master branch contains production quality code and its HEAD points to the latest released version. The development branch is the default branch and contains the current state of development. Pull requests by default target the development branch. See the [CONTRIBUTING](#) file for details about the contribution process.

## 1.8 Git Hooks General Information

The CppMicroServices repository defines its git hooks in the `.githooks` directory. This directory is set as the directory for git hooks via executing `git config core.hooksPath <path>` in our `CMakeLists.txt` file.

## 1.9 Git Hooks Failure Help

If the clang-format pre-commit hook fails because *clang-format* is not installed, please install it and put it on the path. Similarly, if *git-clang-format* is not installed, do the same. *git-clang-format* comes with the LLVM distribution of *clang-format*.

If this is not feasible for you, you can specify `--no-verify` when committing your changes. This is heavily discouraged and you must provide a justification as to why you are unable to format your commit.

We reserve the right to reject any pull requests that are not properly formatted and do not have a valid justification specified.

---

## Build Instructions

---

The C++ Micro Services library provides [CMake](#) build scripts which allow the generation of platform and IDE specific project or *Make* files.

### 2.1 Prerequisites

- [CMake](#) 3.12.4 (users of the latest Visual Studio should typically also use the latest CMake version available)

### 2.2 Configuration

When building the C++ Micro Services project, you have a few configuration options at hand.

- **CMAKE\_INSTALL\_PREFIX** The installation path.
- **US\_ENABLE\_THREADING\_SUPPORT** Enable the use of synchronization primitives (atomics and pthread mutexes or Windows primitives) to make the API thread-safe. All documented guarantees of thread-safety are valid if and only if this option is turned ON. If your application is not multi-threaded, turn this option OFF to get maximum performance.

---

**Note:** In version 3.0 and 3.1 this option only supported the *ON* value. The *OFF* configuration is supported again in version 3.2 and later.

---

- **BUILD\_SHARED\_LIBS** Specify if the library should be build shared or static. See [Static Bundles](#) for detailed information about static CppMicroServices bundles.
- **US\_BUILD\_TESTING** Build unit tests and code snippets.
- **US\_BUILD\_EXAMPLES** Build the tutorial code and other examples.
- **US\_BUILD\_DOC\_HTML** Build the html documentation, as seen on [docs.cppmicroservices.org](https://docs.cppmicroservices.org).
- **US\_BUILD\_DOC\_MAN** Build the man pages. This is typically only enabled on a Unix-like system.

- **US\_ENABLE\_ASAN** Enable the use of Address Sanitizer in builds of CppMicroServices.

---

**Note:** When this setting is enabled for a CppMicroServices build on Windows, the `US_ASAN_USER_DLL` needs to be correctly set. This DLL is typically found at the following location (\$VS is the root Visual Studio install folder): `$VS\2019\Community\VC\Tools\MSVC\<version>\bin\Hostx64\x64\clang_rt.asan_dbg_dynamic-x86_64.dll`.

Additionally, ASAN for Visual Studio is only available in versions 16.9 or later. For more information, please see the *Microsoft documentation* <<https://docs.microsoft.com/en-us/cpp/sanitizers/asan?view=msvc-160>>.

---

- **US\_ASAN\_USER\_DLL** The path to the ASAN DLL which Microsoft Visual Studio ships. This value should only be set on Windows.
- **US\_ENABLE\_TSAN** Enable the use of Thread Sanitizer in builds of CppMicroServices. This boolean should only be set on Linux or Mac.
- **US\_USE\_SYSTEM\_GTEST** Build using an existing installation of Google Test.
- **GTEST\_ROOT** Specify the root directory of the Google Test framework installation to use when building and running tests.

---

**Note:** Building the documentation requires

- a [Python](#) installation,
- the [Doxygen](#) tool,
- the [Sphinx](#) documentation generator,
- and the [breathe](#) and [Read the Docs Sphinx Theme](#) Sphinx extensions

After installing *Python* and *Doxygen*, the remaining dependencies can be installed using `pip`:

```
python -m pip install sphinx breathe sphinx_rtd_theme
```

---

## 2.3 Building

After configuring a build directory with CMake, the project can be built. If you chose e.g. *Unix Makefiles*, just type:

```
make -j
```

in a terminal with the current directory set to the build directory. To install the libraries, header files, and documentation into the configured **CMAKE\_INSTALL\_PREFIX** type:

```
make install
```

## 2.4 Integration

Projects using the C++ Micro Services library need to set-up the correct include paths and link dependencies. Further, each executable or library which needs a *BundleContext* must contain specific initialization code, a `manifest.json` resource, and must be compiled with a unique `US_BUNDLE_NAME` pre-processor definition. See *Getting Started* for an introduction to the basic concepts.

The C++ Micro Services library provides *CMake Support* for CMake based projects but there are no restrictions on the type of build system used for a project.

## 2.4.1 CMake based projects

To easily set-up include paths and linker dependencies, use the common `find_package` mechanism provided by CMake:

```
project(CppMicroServicesExamples)

set(CMAKE_CXX_STANDARD_REQUIRED 1)
set(CMAKE_CXX_STANDARD 17)

find_package(CppMicroServices NO_MODULE REQUIRED)

cmake_minimum_required(VERSION ${US_CMAKE_MINIMUM_REQUIRED_VERSION})
cmake_policy(VERSION ${US_CMAKE_MINIMUM_REQUIRED_VERSION})
```

The CMake code above sets up a basic project (called *CppMicroServicesExamples*) and tries to find the CppMicroServices package and subsequently to set the necessary include directories. Building a shared library might then look like this:

```
# The library name for the bundle
set(_lib_name dictionaryservice)

# A list of source code files
set(_srcs
  Activator.cpp
  IDictionaryService.cpp
)

# Add a special source file to the _srcs variable that
# will enable dependency checking on bundle resources.
usFunctionGetResourceSource(TARGET Tutorial-${_lib_name} OUT _srcs)

# Generate bundle initialization code
usFunctionGenerateBundleInit(TARGET Tutorial-${_lib_name} OUT _srcs)

# Create the library
add_library(Tutorial-${_lib_name} ${_srcs})

# Add the US_BUNDLE_NAME target property
set_property(TARGET Tutorial-${_lib_name} APPEND PROPERTY US_BUNDLE_NAME ${_lib_name})

# Add the required compile definition
set_property(TARGET Tutorial-${_lib_name} APPEND PROPERTY COMPILE_DEFINITIONS US_
↳BUNDLE_NAME=${_lib_name})

# Embed the manifest file
usFunctionEmbedResources(TARGET Tutorial-${_lib_name} WORKING_DIRECTORY resources_
↳FILES manifest.json)

# Link the CppMicroServices library
target_link_libraries(Tutorial-${_lib_name} ${CppMicroServices_LIBRARIES})
```

The call to `usFunctionGenerateBundleInit` generates the proper bundle initialization code and provides access to the bundle specific `BundleContext` instance. Further, the `set_property` command sets the

US\_BUNDLE\_NAME definition.

## 2.4.2 Makefile based projects

The following Makefile is located at `/doc/src/examples/makefile/Makefile` and demonstrates a minimal build script:

```
CXX = $(US_CXX)
CXXFLAGS = -g -Wall -Wno-unused -pedantic -fPIC $(US_CXX_FLAGS)
LDFLAGS = -Wl,-rpath="$(CppMicroServices_ROOT)/lib" -Wl,-rpath=.
LDLIBS = "${US_CPPMICROSERVICES_TARGET}"

INCLUDEDIRS = -I"${CppMicroServices_ROOT}/include/cppmicroservices3"
LIBDIRS = -L"${CppMicroServices_ROOT}/lib" -L.

RC = "${CppMicroServices_ROOT}/bin/usResourceCompiler3"

OBJECTS = bundle.o IDictionaryService.o

all : main libbundle.so

main: libbundle.so main.o
    $(CXX) -o $@ $^ $(CXXFLAGS) $(LDFLAGS) $(INCLUDEDIRS) $(LIBDIRS) $(LDLIBS) -
    ↪ libbundle

libbundle.so: $(OBJECTS) resources.zip
    $(CXX) -shared -o $@ $(OBJECTS) $(CXXFLAGS) $(LDFLAGS) $(INCLUDEDIRS)
    ↪ $(LIBDIRS) $(LDLIBS)
    $(RC) -z resources.zip -b $@

main.o: main.cpp
    $(CXX) $(CXXFLAGS) -DUS_BUNDLE_NAME=main $(INCLUDEDIRS) -c $< -o $@

%.o: %.cpp
    $(CXX) $(CXXFLAGS) -DUS_BUNDLE_NAME=bundle $(INCLUDEDIRS) -c $< -o $@

resources.zip: resources/manifest.json
    $(RC) -m $< -n bundle -o resources.zip

.PHONY : clean

clean:
    rm -f *.o
```

The variable `CppMicroServices_ROOT` is an environment variable and must be set to the CppMicroServices installation directory prior to invoking make. The bundle initialization code for the `libbundle.so` shared library is generated by using the `CPPMICROSERVICES_INITIALIZE_BUNDLE` pre-processor macro at the end of the `bundle.cpp` source file (any source file compiled into the bundle would do):

```
#include "cppmicroservices/BundleInitialization.h"

CPPMICROSERVICES_INITIALIZE_BUNDLE
```

### See also:

See the *Getting Started* section and the general *Framework* documentation to learn more about fundamental concepts.



## CHAPTER 3

---

### Getting Started

---

This section gives you a quick tour of the most important concepts in order to get you started with developing bundles and publishing and consuming services.

We will define a service interface, service implementation, and service consumer. A simple executable then shows how to install and start these bundles.

The complete source code for this example can be found at */doc/src/examples/getting\_started*. It works for both shared and static builds, but only the more commonly used shared build mode is discussed in detail below.

### 3.1 The Build System

These examples come with a complete `CMakeLists.txt` file showing the main usage scenarios of the provided *CMake helper functions*. The script requires the *CppMicroServices* package:

```
project(CppMicroServicesGettingStarted)

find_package(CppMicroServices REQUIRED)
```

### 3.2 A Simple Service Interface

Services implement one or more *service interfaces*. An interface can be any C++ class, but typically contains only pure virtual functions. For our example, we create a separate library containing a service interface that allows us to retrieve the number of elapsed milliseconds since the POSIX epoch:

```
#include <servicetime_export.h>

#include <chrono>

struct SERVICETIME_EXPORT ServiceTime
{
```

```

    virtual ~ServiceTime();

    // Return the number of milliseconds since POSIX epoch time
    virtual std::chrono::milliseconds elapsed() const = 0;
};

```

The CMake code does not require C++ Micro Services specific additions:

```

=====
# A library providing the ServiceTime interface
#-----

# Technically, this is not a bundle.

add_library(ServiceTime
    service_time/ServiceTime.h
    service_time/ServiceTime.cpp
)

target_include_directories(ServiceTime PUBLIC
    ${BUILD_INTERFACE:${CMAKE_CURRENT_SOURCE_DIR}/service_time}
    ${BUILD_INTERFACE:${CMAKE_CURRENT_BINARY_DIR}}
)

generate_export_header(ServiceTime)

if(BUILD_SHARED_LIBS)
    set_target_properties(ServiceTime PROPERTIES
        CXX_VISIBILITY_PRESET hidden
        VISIBILITY_INLINES_HIDDEN 1
    )
endif()

```

### 3.3 Bundle and BundleContext

A *bundle* is the logical set of C++ Micro Services specific initialization code, metadata stored in a *manifest.json resource* file, and other resources and code. Multiple bundles can be part of the same or different (shared or static) library or executable. To create the bundle initialization code, you can either use the *usFunctionGenerateBundleInit* CMake function or the *CPPMICROSERVICES\_INITIALIZE\_BUNDLE* macro directly.

In order to publish and consume a service, we need a *BundleContext* instance, through which a bundle accesses the C++ Micro Services API. Each bundle is associated with a distinct bundle context that is accessible from anywhere in the bundle via the *GetBundleContext()* function:

```

#include <cppmicroservices/GetBundleContext.h>

void Dummy()
{
    auto context = cppmicroservices::GetBundleContext();
}

```

Please note that trying to use *GetBundleContext()* without proper initialization code in the using library will lead to compile or runtime errors.

## 3.4 Publishing a Service

Publishing a service is done by calling the `BundleContext::RegisterService` function. The following code for the `service_time_systemclock` bundle implements the `ServiceTime` interface as a service:

```
#include <ServiceTime.h>

#include <cppmicroservices/BundleActivator.h>

using namespace cppmicroservices;

class ServiceTimeSystemClock : public ServiceTime
{
    std::chrono::milliseconds
    elapsed() const
    {
        auto now = std::chrono::system_clock::now();

        // Relies on the de-facto standard of relying on
        // POSIX time in all known implementations so far.
        return std::chrono::duration_cast<std::chrono::milliseconds>(now.time_since_
↪epoch());
    }
};

class ServiceTimeActivator : public BundleActivator
{
    void
    Start(BundleContext ctx)
    {
        auto service = std::make_shared<ServiceTimeSystemClock>();
        ctx.RegisterService<ServiceTime>(service);
    }

    void
    Stop(BundleContext)
    {
        // Nothing to do
    }
};

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(ServiceTimeActivator)
```

A `std::shared_ptr` holding the service object is passed as the an argument to the `RegisterService<>()` function within a *bundle activator*. The service is registered as long as it is explicitly un-registered or the bundle is stopped. The bundle activator is optional, but if it is declared, its `BundleActivator::Start(BundleContext)` and `BundleActivator::Stop(BundleContext)` functions are called when the bundle is *started* or *stopped*, respectively.

The CMake code for creating our bundle looks like this:

```
#####
# A bundle implementing the ServiceTime interface
#-----

set(_srcs
    service_time_systemclock/ServiceTimeImpl.cpp
)
```

```
# Set up dependencies to resources to track changes
usFunctionGetResourceSource(TARGET ServiceTime_SystemClock OUT _srcs)
# Generate bundle initialization code
usFunctionGenerateBundleInit(TARGET ServiceTime_SystemClock OUT _srcs)

add_library(ServiceTime_SystemClock ${_srcs})

target_link_libraries(ServiceTime_SystemClock CppMicroServices ServiceTime)

set(_bundle_name service_time_systemclock)

set_target_properties(ServiceTime_SystemClock PROPERTIES
# This is required for every bundle
  COMPILE_DEFINITIONS US_BUNDLE_NAME=${_bundle_name}
# This is for convenience, used by other CMake functions
  US_BUNDLE_NAME ${_bundle_name}
)

if(BUILD_SHARED_LIBS)
  set_target_properties(ServiceTime_SystemClock PROPERTIES
    CXX_VISIBILITY_PRESET hidden
    VISIBILITY_INLINES_HIDDEN 1
  )
endif()

# Embed meta-data from a manifest.json file
usFunctionEmbedResources(TARGET ServiceTime_SystemClock
  WORKING_DIRECTORY
    ${CMAKE_CURRENT_SOURCE_DIR}/service_time_systemclock
  FILES
    manifest.json
)
```

In addition to the generated bundle initialization code, we need to specify a unique bundle name by using the `US_BUNDLE_NAME` compile definition as shown above.

We also need to provide the `manifest.json` file, which is added as a resource and contains the following JSON data:

```
{
  "bundle.symbolic_name" : "service_time_systemclock",
  "bundle.activator" : true,
  "bundle.name" : "Service Time SystemClock",
  "bundle.description" : "This bundle uses std::chrono::system_clock"
}
```

Because our bundle provides an activator, we also need to state its existence by setting the `bundle.activator` key to `true`. The last two elements are purely informational and not used directly.

## 3.5 Consuming a Service

The process to consume a service is very similar to the process for publishing a service, except that consumers need to handle some additional error cases.

Again, we use a bundle activator to execute code on bundle start that retrieves and consumes a *ServiceTime* service:

```

#include <cppmicroservices/BundleActivator.h>
#include <cppmicroservices/BundleContext.h>
#include <cppmicroservices/GetBundleContext.h>

#include <ServiceTime.h>

#include <iostream>

using namespace cppmicroservices;

class ServiceTimeConsumerActivator : public BundleActivator
{
    typedef ServiceReference<ServiceTime> ServiceTimeRef;

    void
    Start(BundleContext ctx)
    {
        auto ref = ctx.GetServiceReference<ServiceTime>();

        PrintTime(ref);
    }

    void
    Stop(BundleContext)
    {
        // Nothing to do
    }

    void
    PrintTime(ServiceTimeRef const& ref) const
    {
        if (!ref)
        {
            std::cout << "ServiceTime reference invalid" << std::endl;
            return;
        }

        // We can also get the bundle context like this
        auto ctx = GetBundleContext();

        // Get the ServiceTime service
        auto svc_time = ctx.GetService(ref);
        if (!svc_time)
        {
            std::cout << "ServiceTime not available" << std::endl;
        }
        else
        {
            std::cout << "Elapsed: " << svc_time->elapsed().count() << "ms" <<
↵std::endl;
        }
    }
};

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(ServiceTimeConsumerActivator)

```

Because the C++ Micro Services is a dynamic environment, a particular service might not be available yet. Therefore, we first need to check the validity of some returned objects.

The above code would be sufficient only in the simplest use cases. To avoid bundle start ordering problems (e.g. one bundle assuming the existence of a service published by another bundle), a *ServiceTracker* should be used instead. Such a tracker allows bundles to react on service events and in turn be more robust.

The CMake code for creating a library containing the bundle is very similar to the code for the publishing bundle and thus not included here.

## 3.6 Installing and Starting Bundles

The two bundles above are embedded in separate libraries and need to be installed into a *Framework* and started. This is done by a small example program:

```
#include <cppmicroservices/Bundle.h>
#include <cppmicroservices/BundleContext.h>
#include <cppmicroservices/BundleImport.h>
#include <cppmicroservices/Framework.h>
#include <cppmicroservices/FrameworkFactory.h>

using namespace cppmicroservices;

int
main(int argc, char* argv[])
{
#ifdef US_BUILD_SHARED_LIBS
    if (argc < 2)
    {
        std::cout << "Pass shared libraries as command line arguments" << std::endl;
    }
#endif

    // Create a new framework with a default configuration.
    Framework fw = FrameworkFactory().NewFramework();

    try
    {
        // Initialize the framework, such that we can call
        // GetBundleContext() later.
        fw.Init();
    }
    catch (std::exception const& e)
    {
        std::cout << e.what() << std::endl;
        return 1;
    }

    // The framework inherits from the Bundle class; it is
    // itself a bundle.
    auto ctx = fw.GetBundleContext();
    if (!ctx)
    {
        std::cerr << "Invalid framework context" << std::endl;
        return 1;
    }

    // Install all bundles contained in the shared libraries
    // given as command line arguments.
```

```

    for (int i = 1; i < argc; ++i)
    {
        try
        {
            ctx.InstallBundles(argv[i]);
        }
        catch (std::exception const& e)
        {
            std::cerr << e.what() << std::endl;
        }
    }

    try
    {
        // Start the framework itself.
        fw.Start();

        // Our bundles depend on each other in the sense that the consumer
        // bundle expects a ServiceTime service in its activator Start()
        // function. This is done here for simplicity, but is actually
        // bad practice.
        auto bundles = ctx.GetBundles();
        auto iter = std::find_if(bundles.begin(),
                                bundles.end(),
                                [](Bundle& b) { return b.GetSymbolicName() ==
↪ "service_time_systemclock"; });
        if (iter != bundles.end())
        {
            iter->Start();
        }

        // Now start all bundles.
        for (auto& bundle : bundles)
        {
            bundle.Start();
        }
    }
    catch (std::exception const& e)
    {
        std::cerr << e.what() << std::endl;
    }

    return 0;
}

#ifdef US_BUILD_SHARED_LIBS
CPPMICROSERVICES_IMPORT_BUNDLE(service_time_systemclock)
CPPMICROSERVICES_IMPORT_BUNDLE(service_time_consumer)
#endif

```

The program expects a list of file system paths pointing to installable libraries. It will first construct a new Framework instance and then *install* the given libraries. Next, it will start all available bundles.

When the Framework instance is destroyed, it will automatically shut itself down, essentially stopping all active bundles.

#### See also:

A more detailed [tutorial](#) demonstrating some more advanced features is also available.





---

# Contributing to C++ Micro Services

---

This page contains information about reporting issues as well as some tips and guidelines useful to experienced open source contributors. Make sure you read the contribution guideline before you start participating.

## 4.1 Reporting issues

A great way to contribute to the project is to send a detailed report when you encounter an issue. We always appreciate a well-written, thorough bug report, and will thank you for it!

Check that the [issue database](#) doesn't already include that problem or suggestion before submitting an issue. If you find a match, add a quick "+1" or "I have this problem too." Doing this helps prioritize the most common problems and requests.

When reporting issues, please include your host OS and compiler vendor and version. Please also include the steps required to reproduce the problem if possible and applicable.

## 4.2 CppMicroServices RFCs

Many changes, including bug fixes and documentation improvements can be implemented and reviewed via the normal GitHub pull request workflow.

Some changes though are "substantial", and we ask that these be put through a bit of a design process and produce a consensus among the CppMicroServices core team.

The "RFC" (request for comments) process is intended to provide a consistent and controlled path for new features to enter the framework.

Please refer to the [RFC repository](#) for more information.

## 4.3 Contribution guidelines

This section gives the experienced contributor some tips and guidelines.

### 4.3.1 Conventions

Fork the repository and make changes on your fork in a feature branch:

- If it's a bug fix branch, name it `XXXX-something` where `XXXX` is the number of the issue.
- If it's a feature branch, create an enhancement issue to announce your intentions, and name it `XXXX-something` where `XXXX` is the number of the issue.

Code must be formatted according to our `.clang-format` file, using the clang-format tool.

Submit unit tests for your changes.

Update the documentation when creating or modifying features. Test your documentation changes for clarity, concision, and correctness.

Pull request descriptions should be as clear as possible and include a reference to all the issues that they address. If the pull request is a result of a RFC process, include the link to the corresponding RFC pull request.

Commit messages must start with a capitalized and short summary (max. 50 chars) written in the imperative, followed by an optional, more detailed explanatory text which is separated from the summary by an empty line.

Code review comments may be added to your pull request. Discuss, then make the suggested modifications and push additional commits to your feature branch. Post a comment after pushing. New commits show up in the pull request automatically, but the reviewers are notified only when you comment.

Pull requests must be cleanly rebased on top of *development* without multiple branches mixed into the PR.

---

**Tip: Git tip:** If your PR no longer merges cleanly, use `rebase development` in your feature branch to update your pull request rather than `merge development`.

---

Before you make a pull request, squash your commits into logical units of work using `git rebase -i` and `git push -f`. A logical unit of work is a consistent set of patches that should be reviewed together: for example, upgrading the version of a vendored dependency and taking advantage of its now available new feature constitute two separate units of work. Implementing a new function and calling it in another file constitute a single logical unit of work. The very high majority of submissions should have a single commit, so if in doubt: squash down to one.

After every commit, make sure the test suite passes. Include documentation changes in the same pull request so that a revert would remove all traces of the feature or fix.

Include an issue reference like `Closes #XXXX` or `Fixes #XXXX` in commits that close an issue. Including references automatically closes the issue on a merge.

If your change is large enough to warrant a copyright statement, add yourself to the `COPYRIGHT` file, using the same style as the existing entries.

### 4.3.2 Sign your work

The sign-off is a simple line at the end of the explanation for the patch. Your signature certifies that you wrote the patch or otherwise have the right to pass it on as an open-source patch. The rules are pretty simple: if you can certify the below (from [developercertificate.org](http://developercertificate.org)):

Developer Certificate of Origin  
Version 1.1

Copyright (C) 2004, 2006 The Linux Foundation and its contributors.  
660 York Street, Suite 102,  
San Francisco, CA 94110 USA

Everyone is permitted to copy and distribute verbatim copies of this  
license document, but changing it is not allowed.

Developer's Certificate of Origin 1.1

By making a contribution to this project, I certify that:

- (a) The contribution was created in whole or in part by me and I  
have the right to submit it under the open source license  
indicated in the file; or
- (b) The contribution is based upon previous work that, to the best  
of my knowledge, is covered under an appropriate open source  
license and I have the right under that license to submit that  
work with modifications, whether created in whole or in part  
by me, under the same open source license (unless I am  
permitted to submit under a different license), as indicated  
in the file; or
- (c) The contribution was provided directly to me by some other  
person who certified (a), (b) or (c) and I have not modified  
it.
- (d) I understand and agree that this project and the contribution  
are public and that a record of the contribution (including all  
personal information I submit with it, including my sign-off) is  
maintained indefinitely and may be redistributed consistent with  
this project or the open source license(s) involved.

Then you just add a line to every git commit message:

```
Signed-off-by: Joe Smith <joe.smith@email.com>
```

Use your real name (sorry, no pseudonyms or anonymous contributions).

If you set your `user.name` and `user.email` git configs, you can sign your commit automatically with `git commit -s`.

## 4.4 Contributor Covenant Code of Conduct

### 4.4.1 Our Pledge

In the interest of fostering an open and welcoming environment, we as contributors and maintainers pledge to making participation in our project and our community a harassment-free experience for everyone, regardless of age, body size, disability, ethnicity, gender identity and expression, level of experience, nationality, personal appearance, race, religion, or sexual identity and orientation.

### 4.4.2 Our Standards

Examples of behavior that contributes to creating a positive environment include:

- Using welcoming and inclusive language
- Being respectful of differing viewpoints and experiences
- Gracefully accepting constructive criticism
- Focusing on what is best for the community
- Showing empathy towards other community members

Examples of unacceptable behavior by participants include:

- The use of sexualized language or imagery and unwelcome sexual attention or advances
- Trolling, insulting/derogatory comments, and personal or political attacks
- Public or private harassment
- Publishing others' private information, such as a physical or electronic address, without explicit permission
- Other conduct which could reasonably be considered inappropriate in a professional setting

### 4.4.3 Our Responsibilities

Project maintainers are responsible for clarifying the standards of acceptable behavior and are expected to take appropriate and fair corrective action in response to any instances of unacceptable behavior.

Project maintainers have the right and responsibility to remove, edit, or reject comments, commits, code, wiki edits, issues, and other contributions that are not aligned to this Code of Conduct, or to ban temporarily or permanently any contributor for other behaviors that they deem inappropriate, threatening, offensive, or harmful.

### 4.4.4 Scope

This Code of Conduct applies both within project spaces and in public spaces when an individual is representing the project or its community. Examples of representing a project or community include using an official project e-mail address, posting via an official social media account, or acting as an appointed representative at an online or offline event. Representation of a project may be further defined and clarified by project maintainers.

### 4.4.5 Enforcement

Instances of abusive, harassing, or otherwise unacceptable behavior may be reported by contacting the project team at [info@cppmicroservices.org](mailto:info@cppmicroservices.org). All complaints will be reviewed and investigated and will result in a response that is deemed necessary and appropriate to the circumstances. The project team is obligated to maintain confidentiality with regard to the reporter of an incident. Further details of specific enforcement policies may be posted separately.

Project maintainers who do not follow or enforce the Code of Conduct in good faith may face temporary or permanent repercussions as determined by other members of the project's leadership.

### 4.4.6 Attribution

This Code of Conduct is adapted from the [Contributor Covenant](http://contributor-covenant.org/version/1/4), version 1.4, available at <http://contributor-covenant.org/version/1/4>.

### 5.1 Copyright

```
Source: https://github.com/CppMicroServices/CppMicroServices

Files: * (see the VCS history for detailed change information)
Copyright: 2015 Sascha Zelzer <sascha.zelzer@gmail.com>
Copyright: 2012 - 2015 Sascha Zelzer, German Cancer Research Center <sascha.
↪zelzer@dkfz-heidelberg.de>
License: Apache License 2.0

Files: * (see the VCS history for detailed change information)
Copyright: 2015-2019 The MathWorks, Inc.
License: Apache License 2.0

Files: core/include/usAny.h
Copyright: Kevlin Henney, 2000, 2001, 2002. All rights reserved.
        Extracted from Boost 1.46.1 and adapted for CppMicroServices.
License: See the file header

Files: third_party/*
Copyright: See third_party/README
License: See third_party/README
```

### 5.2 License

```
        Apache License
        Version 2.0, January 2004
        http://www.apache.org/licenses/
```

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

## 1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and

subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
  - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
  - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
  - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
  - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.



To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");  
you may not use this file except in compliance with the License.  
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.



This tutorial creates successively more complex bundles to illustrate most of the features and functionality offered by the C++ Micro Services library. It is heavily base on the Apache Felix OSGi Tutorial.

## 6.1 Example 1 - Service Event Listener

This example creates a simple bundle that listens for service events. This example does not do much at first, because it only prints out the details of registering and unregistering services. In the next example we will create a bundle that implements a service, which will cause this bundle to actually do something. For now, we will just use this example to help us understand the basics of creating a bundle and its activator.

A bundle gains access to the C++ Micro Services API using a unique instance of `cppmicroservices::BundleContext`. In order for a bundle to get its unique bundle context, it must call `GetBundleContext()` or implement the `cppmicroservices::BundleActivator` interface. This interface has two methods, `Start()` and `Stop()`, that both receive the bundle's context and are called when the bundle is started and stopped, respectively.

In the following source code, our bundle implements the `BundleActivator` interface and uses the context to add itself as a listener for service events (in the `eventlistener/Activator.cpp` file):

```
#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"
#include "cppmicroservices/Constants.h"
#include "cppmicroservices/ServiceEvent.h"

#include <iostream>

using namespace cppmicroservices;

namespace
{
    /**
     * This class implements a simple bundle that utilizes the CppMicroServices's
```

```

    * event mechanism to listen for service events. Upon receiving a service event,
    * it prints out the event's details.
    */
class Activator : public BundleActivator
{
private:
    /**
     * Implements BundleActivator::Start(). Prints a message and adds a member
     * function to the bundle context as a service listener.
     *
     * @param context the framework context for the bundle.
     */
    void
    Start(BundleContext context)
    {
        std::cout << "Starting to listen for service events." << std::endl;
        listenerToken
            = context.AddServiceListener(std::bind(&Activator::ServiceChanged,
↪this, std::placeholders::_1));
    }

    /**
     * Implements BundleActivator::Stop(). Prints a message and removes the
     * member function from the bundle context as a service listener.
     *
     * @param context the framework context for the bundle.
     */
    void
    Stop(BundleContext context)
    {
        context.RemoveListener(std::move(listenerToken));
        std::cout << "Stopped listening for service events." << std::endl;

        // Note: It is not required that we remove the listener here,
        // since the framework will do it automatically anyway.
    }

    /**
     * Prints the details of any service event from the framework.
     *
     * @param event the fired service event.
     */
    void
    ServiceChanged(ServiceEvent const& event)
    {
        std::string objectClass = ref_any_cast<std::vector<std::string>>(
            event.GetServiceReference()).
↪GetProperty(Constants::OBJECTCLASS)
            .front();

        if (event.GetType() == ServiceEvent::SERVICE_REGISTERED)
        {
            std::cout << "Ex1: Service of type " << objectClass << " registered."
↪<< std::endl;
        }
        else if (event.GetType() == ServiceEvent::SERVICE_UNREGISTERING)
        {
    
```

```

        std::cout << "Ex1: Service of type " << objectClass << " unregistered.
→" << std::endl;
    }
    else if (event.GetType() == ServiceEvent::SERVICE_MODIFIED)
    {
        std::cout << "Ex1: Service of type " << objectClass << " modified." <
→< std::endl;
    }
}

ListenerToken listenerToken;
};
} // namespace

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)

```

After implementing the C++ source code for the bundle activator, we must *export* the activator as shown in the last line above. This ensures that the C++ Micro Services library can create an instance of the activator and call the `Start()` and `Stop()` methods.

After implementing the source code for the bundle, we must also define a manifest file that contains meta-data needed by the C++ Micro Services framework for manipulating the bundle. The manifest is embedded in the shared library along with the compiled source code. We create a file called `manifest.json` that contains the following:

```

{
  "bundle.symbolic_name" : "eventlistener",
  "bundle.activator" : true
}

```

Next, we need to compile the source code. This example uses CMake as the build system and the top-level `CMakeLists.txt` file could look like this:

```

# [prj-start]
project(CppMicroServicesExamples)

set(CMAKE_CXX_STANDARD_REQUIRED 1)
set(CMAKE_CXX_STANDARD 17)

find_package(CppMicroServices NO_MODULE REQUIRED)

cmake_minimum_required(VERSION ${US_CMAKE_MINIMUM_REQUIRED_VERSION})
cmake_policy(VERSION ${US_CMAKE_MINIMUM_REQUIRED_VERSION})
# [prj-end]

#-----
# Init output directories
#-----

set(CppMicroServicesExamples_ARCHIVE_OUTPUT_DIRECTORY "${PROJECT_BINARY_DIR}/lib")
set(CppMicroServicesExamples_LIBRARY_OUTPUT_DIRECTORY "${PROJECT_BINARY_DIR}/lib")
set(CppMicroServicesExamples_RUNTIME_OUTPUT_DIRECTORY "${PROJECT_BINARY_DIR}/bin")

foreach(_type ARCHIVE LIBRARY RUNTIME)
  if(NOT CMAKE_${_type}_OUTPUT_DIRECTORY)
    set(CMAKE_${_type}_OUTPUT_DIRECTORY ${CppMicroServicesExamples_${_type}_OUTPUT_
→DIRECTORY})
  endif()
endfor()

```

```
endforeach()

function(CreateTutorial _name)
    set(_srcs ${ARGN})

    usFunctionGetResourceSource(TARGET Tutorial-${_name} OUT _srcs)
    usFunctionGenerateBundleInit(TARGET Tutorial-${_name} OUT _srcs)

    add_library(Tutorial-${_name} ${_srcs})
    set_property(TARGET Tutorial-${_name} APPEND PROPERTY COMPILE_DEFINITIONS US_BUNDLE_
↳NAME=${_name})
    set_property(TARGET Tutorial-${_name} PROPERTY DEBUG_POSTFIX "")

    if(${_name}_DEPENDS)
        foreach(_dep ${${_name}_DEPENDS})
            include_directories(${PROJECT_SOURCE_DIR}/tutorial/${_dep})
            target_link_libraries(Tutorial-${_name} Tutorial-${_dep})
        endforeach()
    endif()
    target_link_libraries(Tutorial-${_name} ${CppMicroServices_LIBRARIES})
    set_target_properties(Tutorial-${_name} PROPERTIES
        LABELS Tutorial
        OUTPUT_NAME ${_name}
    )

    usFunctionAddResources(TARGET Tutorial-${_name} BUNDLE_NAME ${_name} WORKING_
↳DIRECTORY ${PROJECT_SOURCE_DIR}/tutorial/${_name}/resources FILES manifest.json)
    usFunctionEmbedResources(TARGET Tutorial-${_name})

endfunction()

add_subdirectory(eventlistener)
```

and the CMakeLists.txt file in the eventlistener subdirectory is:

```
set(_srcs Activator.cpp)

CreateTutorial(eventlistener ${_srcs})
```

The call to *usFunctionGenerateBundleInit* creates required callback functions to be able to manage the bundle within the C++ Micro Services runtime. If you are not using CMake, you have to place a macro call to *CPPMICROSERVICES\_INITIALIZE\_BUNDLE* yourself into the bundle's source code, e.g. in *Activator.cpp*. Have a look at *Build Instructions* for more details about using CMake or other build systems (e.g. Makefiles) when writing bundles.

To run the examples contained in the C++ Micro Services library, we use a small driver program called *usTutorialDriver*:

```
CppMicroServices-build> bin/usTutorialDriver
> h
h                                This help text
start <id | name>                Start the bundle with id <id> or name <name>
stop <id | name>                 Stop the bundle with id <id> or name <name>
status                           Print status information
shutdown                         Shut down the framework
```

Typing *status* at the command prompt lists all installed bundles and their current state. Note that the driver program

pre-installs the example bundles, so they will be listed initially with the `INSTALLED` state. To start the eventlistener bundle, type `start eventlistener` at the command prompt:

```
> status
Id | Symbolic Name          | State
-----
0 | system_bundle          | ACTIVE
1 | eventlistener           | INSTALLED
2 | dictionaryservice       | INSTALLED
3 | frenchdictionary        | INSTALLED
4 | dictionaryclient        | INSTALLED
5 | dictionaryclient2       | INSTALLED
6 | dictionaryclient3       | INSTALLED
7 | spellcheckservice       | INSTALLED
8 | spellcheckclient        | INSTALLED
> start eventlistener
Starting to listen for service events.
>
```

The above command started the eventlistener bundle (implicitly loading its shared library). Keep in mind, that this bundle will not do much at this point since it only listens for service events and we are not registering any services. In the next example we will register a service that will generate an event for this bundle to receive. To exit the `usTutorialDriver`, use the shutdown command.

## 6.2 Example 2 - Dictionary Service Bundle

This example creates a bundle that implements a service. Implementing a service is a two-step process, first we must define the interface of the service and then we must define an implementation of the service interface. In this particular example, we will create a dictionary service that we can use to check if a word exists, which indicates if the word is spelled correctly or not. First, we will start by defining a simple dictionary service interface in a file called `dictionaryservice/IDictionaryService.h`:

```
#include "cppmicroservices/ServiceInterface.h"

#include <string>

#ifdef US_BUILD_SHARED_LIBS
#   ifdef Tutorial_dictionaryservice_EXPORTS
#       define DICTIONARYSERVICE_EXPORT US_ABI_EXPORT
#   else
#       define DICTIONARYSERVICE_EXPORT US_ABI_IMPORT
#   endif
#else
#   define DICTIONARYSERVICE_EXPORT US_ABI_EXPORT
#endif

/**
 * A simple service interface that defines a dictionary service.
 * A dictionary service simply verifies the existence of a word.
 */
struct DICTIONARYSERVICE_EXPORT IDictionaryService
{
    // Out-of-line virtual destructor for proper dynamic cast
    // support with older versions of gcc.
    virtual ~IDictionaryService();
```

```

/**
 * Check for the existence of a word.
 * @param word the word to be checked.
 * @return true if the word is in the dictionary,
 *         false otherwise.
 */
virtual bool CheckWord(std::string const& word) = 0;
};

```

The service interface is quite simple, with only one method that needs to be implemented. Because we provide an empty out-of-line destructor (defined in the file `IDictionaryService.cpp`) we must export the service interface by using the bundle specific `DICTIONARYSERVICE_EXPORT` macro.

In the following source code, the bundle uses its bundle context to register the dictionary service. We implement the dictionary service as an inner class of the bundle activator class, but we could have also put it in a separate file. The source code for our bundle is as follows in a file called `dictionaryservice/Activator.cpp`:

```

#include "IDictionaryService.h"

#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"
#include "cppmicroservices/ServiceProperties.h"

#include <memory>
#include <set>

using namespace cppmicroservices;

namespace
{
    /**
     * This class implements a bundle activator that uses the bundle
     * context to register an English language dictionary service
     * with the C++ Micro Services registry during static initialization
     * of the bundle. The dictionary service interface is
     * defined in a separate file and is implemented by a nested class.
     */
    class US_ABI_LOCAL Activator : public BundleActivator
    {
    private:
        /**
         * A private inner class that implements a dictionary service;
         * see IDictionaryService for details of the service.
         */
        class DictionaryImpl : public IDictionaryService
        {
        // The set of words contained in the dictionary.
        std::set<std::string> m_dictionary;

        public:
            DictionaryImpl()
            {
                m_dictionary.insert("welcome");
                m_dictionary.insert("to");
                m_dictionary.insert("the");
                m_dictionary.insert("micro");
            }
        };
    };
}

```



```

        m_dictionary.insert("services");
        m_dictionary.insert("tutorial");
    }

    /**
     * Implements IDictionaryService::CheckWord(). Determines
     * if the passed in word is contained in the dictionary.
     * @param word the word to be checked.
     * @return true if the word is in the dictionary,
     *         false otherwise.
     */
    bool
    CheckWord(std::string const& word)
    {
        std::string lword(word);
        std::transform(lword.begin(), lword.end(), lword.begin(), ::tolower);

        return m_dictionary.find(lword) != m_dictionary.end();
    }
};

public:
    /**
     * Implements BundleActivator::Start(). Registers an
     * instance of a dictionary service using the bundle context;
     * attaches properties to the service that can be queried
     * when performing a service look-up.
     * @param context the context for the bundle.
     */
    void
    Start(BundleContext context)
    {
        std::shared_ptr<DictionaryImpl> dictionaryService = std::make_shared
        ↪<DictionaryImpl>();
        ServiceProperties props;
        props["Language"] = std::string("English");
        context.RegisterService<IDictionaryService>(dictionaryService, props);
    }

    /**
     * Implements BundleActivator::Stop(). Does nothing since
     * the C++ Micro Services library will automatically unregister any
     ↪registered services.
     * @param context the context for the bundle.
     */
    void
    Stop(BundleContext /*context*/)
    {
        // NOTE: The service is automatically unregistered
    }
};
} // namespace

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)

```

Note that we do not need to unregister the service in the `Stop()` method, because the C++ Micro Services library will automatically do so for us. The dictionary service that we have implemented is very simple; its dictionary is a set of only five words, so this solution is not optimal and is only intended for educational purposes.

**Note:** In this example, the service interface and implementation are both contained in one bundle which exports the interface class. However, service implementations almost never need to be exported and in many use cases it is beneficial to provide the service interface and its implementation(s) in separate bundles. In such a scenario, clients of a service will only have a link-time dependency on the shared library providing the service interface (because of the out-of-line destructor) but not on any bundles containing service implementations.

We must create a `manifest.json` file that contains the meta-data for our bundle; the manifest file contains the following:

```
{
  "bundle.symbolic_name" : "dictionaryservice",
  "bundle.activator" : true
}
```

For an introduction how to compile our source code, see [Example 1 - Service Event Listener](#).

After running the `usTutorialDriver` program we should make sure that the bundle from Example 1 is active. We can use the `status` shell command to get a list of all bundles, their state, and their bundle identifier number. If the Example 1 bundle is not active, we should start the bundle using the `start` command and the bundle's identifier number or symbolic name that is displayed by the `status` command. Now we can start our dictionary service bundle by typing the `start dictionaryservice` command:

```
CppMicroServices-build> bin/usTutorialDriver
> status
Id | Symbolic Name      | State
-----
0 | system_bundle      | ACTIVE
1 | eventlistener       | INSTALLED
2 | dictionaryservice   | INSTALLED
3 | frenchdictionary    | INSTALLED
4 | dictionaryclient     | INSTALLED
5 | dictionaryclient2    | INSTALLED
6 | dictionaryclient3    | INSTALLED
7 | spellcheckservice   | INSTALLED
8 | spellcheckclient    | INSTALLED
> start eventlistener
Starting to listen for service events.
> start dictionaryservice
Ex1: Service of type IDictionaryService registered.
> status
Id | Symbolic Name      | State
-----
0 | system_bundle      | ACTIVE
1 | eventlistener       | ACTIVE
2 | dictionaryservice   | ACTIVE
3 | frenchdictionary    | INSTALLED
4 | dictionaryclient     | INSTALLED
5 | dictionaryclient2    | INSTALLED
6 | dictionaryclient3    | INSTALLED
7 | spellcheckservice   | INSTALLED
8 | spellcheckclient    | INSTALLED
>
```

To stop the bundle, use the `stop 2` command. If the bundle from [Example 1](#) is still active, then we should see it print out the details of the service event it receives when our new bundle registers its dictionary service. Using the `usTutorialDriver` commands `stop` and `start` we can stop and start it at will, respectively. Each time we start

and stop our dictionary service bundle, we should see the details of the associated service event printed from the bundle from Example 1. In [Example 3](#), we will create a client for our dictionary service. To exit `usTutorialDriver`, we use the `shutdown` command.

## 6.3 Example 2b - Alternative Dictionary Service Bundle

This example creates an alternative implementation of the dictionary service defined in [Example 2](#). The source code for the bundle is identical except that:

- Instead of using English words, it uses French words.
- We do not need to define the dictionary service interface again, as we can just link the definition from the bundle in Example 2.

The main point of this example is to illustrate that multiple implementations of the same service may exist; this example will also be of use to us in [Example 5](#).

In the following source code, the bundle uses its bundle context to register the dictionary service. We implement the dictionary service as an inner class of the bundle activator class, but we could have also put it in a separate file. The source code for our bundle is as follows in a file called `dictionaryclient/Activator.cpp`:

```
#include "IDictionaryService.h"

#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"
#include "cppmicroservices/ServiceProperties.h"

#include <algorithm>
#include <memory>
#include <set>

using namespace cppmicroservices;

namespace
{
    /**
     * This class implements a bundle activator that uses the bundle
     * context to register a French language dictionary service
     * with the C++ Micro Services registry during static initialization
     * of the bundle. The dictionary service interface is
     * defined in Example 2 (dictionaryservice) and is implemented by a
     * nested class. This class is identical to the class in Example 2,
     * except that the dictionary contains French words.
     */
    class US_ABI_LOCAL Activator : public BundleActivator
    {
    private:
        /**
         * A private inner class that implements a dictionary service;
         * see DictionaryService for details of the service.
         */
        class DictionaryImpl : public IDictionaryService
        {
        public:
            // The set of words contained in the dictionary.
            std::set<std::string> m_dictionary;
```

```

    public:
        DictionaryImpl()
        {
            m_dictionary.insert("bienvenue");
            m_dictionary.insert("au");
            m_dictionary.insert("tutoriel");
            m_dictionary.insert("micro");
            m_dictionary.insert("services");
        }

        /**
         * Implements DictionaryService.checkWord(). Determines
         * if the passed in word is contained in the dictionary.
         * @param word the word to be checked.
         * @return true if the word is in the dictionary,
         *         false otherwise.
         */
        bool
        CheckWord(std::string const& word)
        {
            std::string lword(word);
            std::transform(lword.begin(), lword.end(), lword.begin(), ::tolower);

            return m_dictionary.find(lword) != m_dictionary.end();
        }
    };

    public:
        /**
         * Implements BundleActivator::Start(). Registers an
         * instance of a dictionary service using the bundle context;
         * attaches properties to the service that can be queried
         * when performing a service look-up.
         * @param context the context for the bundle.
         */
        void
        Start(BundleContext context)
        {
            std::shared_ptr<DictionaryImpl> dictionaryService = std::make_shared
↪ <DictionaryImpl>();
            ServiceProperties props;
            props["Language"] = std::string("French");
            context.RegisterService<IDictionaryService>(dictionaryService, props);
        }

        /**
         * Implements BundleActivator::Stop(). Does nothing since
         * the C++ Micro Services library will automatically unregister any
↪ registered services.
         * @param context the context for the bundle.
         */
        void
        Stop(BundleContext /*context*/)
        {
            // NOTE: The service is automatically unregistered
        }
    };

```

```

} // namespace

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)
    
```

We must create a `manifest.json` file that contains the meta-data for our bundle; the manifest file contains the following:

```

{
  "bundle.symbolic_name" : "frenchdictionary",
  "bundle.activator" : true
}
    
```

For a refresher on how to compile our source code, see [Example 1 - Service Event Listener](#). Because we use the `IDictionaryService` definition from Example 2, we also need to make sure that the proper include paths and linker dependencies are set:

```

set(_srcs Activator.cpp)

set(frenchdictionary_DEPENDS dictionaryservice)
CreateTutorial(frenchdictionary ${_srcs})
    
```

After running the `usTutorialDriver` program, we should make sure that the bundle from Example 1 is active. We can use the `status` shell command to get a list of all bundles, their state, and their bundle identifier number. If the Example 1 bundle is not active, we should start the bundle using the `start` command and the bundle's identifier number or name that is displayed by the `status` command. Now we can start our dictionary service bundle by typing the `start frenchdictionary` command:

```

CppMicroServices-build> bin/usTutorialDriver
> status
Id | Symbolic Name          | State
-----
0 | system_bundle         | ACTIVE
1 | eventlistener         | INSTALLED
2 | dictionaryservice     | INSTALLED
3 | frenchdictionary      | INSTALLED
4 | dictionaryclient      | INSTALLED
5 | dictionaryclient2     | INSTALLED
6 | dictionaryclient3     | INSTALLED
7 | spellcheckservice     | INSTALLED
8 | spellcheckclient      | INSTALLED
> start eventlistener
Starting to listen for service events.
> start frenchdictionary
Ex1: Service of type IDictionaryService registered.
> status
Id | Symbolic Name          | State
-----
0 | system_bundle         | ACTIVE
1 | eventlistener         | ACTIVE
2 | dictionaryservice     | INSTALLED
3 | frenchdictionary      | ACTIVE
4 | dictionaryclient      | INSTALLED
5 | dictionaryclient2     | INSTALLED
6 | dictionaryclient3     | INSTALLED
7 | spellcheckservice     | INSTALLED
8 | spellcheckclient      | INSTALLED
>
    
```

To stop the bundle, use the `stop 3` command. If the bundle from *Example 1* is still active, then we should see it print out the details of the service event it receives when our new bundle registers its dictionary service. Using the `usTutorialDriver` commands `stop` and `start` we can stop and start it at will, respectively. Each time we start and stop our dictionary service bundle, we should see the details of the associated service event printed from the bundle from *Example 1*. In *Example 3*, we will create a client for our dictionary service. To exit `usTutorialDriver`, we use the `shutdown` command.

---

**Note:** Because our French dictionary bundle has a link dependency on the dictionary service bundle from *Example 2*, this bundle's shared library is automatically loaded by the operating system's dynamic loader. However, its status remains *INSTALLED* until it is explicitly started.

---

## 6.4 Example 3 - Dictionary Client Bundle

This example creates a bundle that is a client of the dictionary service implemented in *Example 2*. In the following source code, our bundle uses its bundle context to query for a dictionary service. Our client bundle uses the first dictionary service it finds, and if none are found, it prints a message and stops. Services operate with no additional overhead. The source code for our bundle is as follows in a file called `dictionaryclient/Activator.cpp`:

```
#include "IDictionaryService.h"

#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"

#include <iostream>

using namespace cppmicroservices;

namespace
{
    /**
     * This class implements a bundle activator that uses a dictionary service to
     ↪check for
     * the proper spelling of a word by check for its existence in the dictionary.
     * This bundles uses the first service that it finds and does not monitor the
     * dynamic availability of the service (i.e., it does not listen for the arrival
     * or departure of dictionary services). When starting this bundle, the thread
     * calling the Start() method is used to read words from standard input. You can
     * stop checking words by entering an empty line, but to start checking words
     * again you must unload and then load the bundle again.
     */
    class US_ABI_LOCAL Activator : public BundleActivator
    {
    public:
        /**
         * Implements BundleActivator::Start(). Queries for all available dictionary
         * services. If none are found it simply prints a message and returns,
         * otherwise it reads words from standard input and checks for their
         * existence from the first dictionary that it finds.
         *
         * ↪lengthy
         * \note It is very bad practice to use the calling thread to perform a
         *
         * process like this; this is only done for the purpose of the tutorial.
         */
    };
}
```

```

*
* @param context the bundle context for this bundle.
*/
void
Start(BundleContext context)
{
    // Query for all service references matching any language.
    std::vector<ServiceReference<IDictionaryService>> refs
        = context.GetServiceReferences<IDictionaryService>("(Language=*)");

    if (!refs.empty())
    {
        std::cout << "Enter a blank line to exit." << std::endl;

        // Loop endlessly until the user enters a blank line
        while (std::cin)
        {
            // Ask the user to enter a word.
            std::cout << "Enter word: ";

            std::string word;
            std::getline(std::cin, word);

            // If the user entered a blank line, then
            // exit the loop.
            if (word.empty())
            {
                break;
            }

            // First, get a dictionary service and then check
            // if the word is correct.
            std::shared_ptr<IDictionaryService> dictionary
                = context.GetService<IDictionaryService>(refs.front());
            if (dictionary->CheckWord(word))
            {
                std::cout << "Correct." << std::endl;
            }
            else
            {
                std::cout << "Incorrect." << std::endl;
            }
        }
    }
    else
    {
        std::cout << "Couldn't find any dictionary service..." << std::endl;
    }
}

/**
 * Implements BundleActivator::Stop(). Does nothing since
 * the C++ Micro Services library will automatically unget any used services.
 * @param context the context for the bundle.
 */
void
Stop(BundleContext /*context*/)
{

```

```

        // NOTE: The service is automatically released.
    }
};
} // namespace

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)

```

Note that we do not need to unget or release the service in the `Stop()` method, because the C++ Micro Services library will automatically do so for us. We must create a `manifest.json` file with the meta-data for our bundle, which contains the following:

```

{
  "bundle.symbolic_name" : "dictionaryclient",
  "bundle.activator" : true
}

```

Since we are using the `IDictionaryService` interface defined in Example 1, we must link our bundle to the `dictionaryservice` bundle:

```

set(_srcs Activator.cpp)

set(dictionaryclient_DEPENDS dictionaryservice)
CreateTutorial(dictionaryclient ${_srcs})

```

After running the `usTutorialDriver` executable, and starting the event listener bundle, we can use the `start dictionaryclient` command to start our dictionary client bundle:

```

CppMicroServices-debug> bin/usTutorialDriver
> start eventlistener
Starting to listen for service events.
> start dictionaryclient
Ex1: Service of type IDictionaryService/1.0 registered.
Enter a blank line to exit.
Enter word:

```

The above command starts the pre-installed bundle. When we start the bundle, it will use the main thread to prompt us for words. Enter one word at a time to check the words, and enter a blank line to stop checking words. To reload the bundle, we must first use the `stop dictionaryclient` command to stop the bundle, then the `start dictionaryclient` command to re-start it. To test the dictionary service, enter any of the words in the dictionary (e.g., “welcome”, “to”, “the”, “micro”, “services”, “tutorial”) or any word not in the dictionary.

This example client is simple enough and, in fact, is too simple. What would happen if the dictionary service were to unregister suddenly? Our client would abort with a segmentation fault due to a null pointer access when trying to use the service object. This dynamic service availability issue is a central tenet of the service model. As a result, we must make our client more robust in dealing with such situations. In [Example 4](#), we explore a slightly more complicated dictionary client that dynamically monitors service availability.

## 6.5 Example 4 - Robust Dictionary Client Bundle

In [Example 3](#), we create a simple client bundle for our dictionary service. The problem with that client was that it did not monitor the dynamic availability of the dictionary service, thus an error would occur if the dictionary service disappeared while the client was using it. In this example we create a client for the dictionary service that monitors the dynamic availability of the dictionary service. The result is a more robust client.



The functionality of the new dictionary client is essentially the same as the old client, it reads words from standard input and checks for their existence in the dictionary service. Our bundle uses its bundle context to register itself as a service event listener; monitoring service events allows the bundle to monitor the dynamic availability of the dictionary service. Our client uses the first dictionary service it finds. The source code for our bundle is as follows in a file called `Activator.cpp`:

```
#include "IDictionaryService.h"

#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"
#include "cppmicroservices/Constants.h"
#include "cppmicroservices/ServiceEvent.h"

#include <iostream>

using namespace cppmicroservices;

namespace
{
    /**
     * This class implements a bundle activator that uses a dictionary service to
     ↪check for
     * the proper spelling of a word by checking for its existence in the
     * dictionary. This bundle is more complex than the bundle in Example 3 because
     * it monitors the dynamic availability of the dictionary services. In other
     * words, if the service it is using departs, then it stops using it gracefully,
     * or if it needs a service and one arrives, then it starts using it
     * automatically. As before, the bundle uses the first service that it finds and
     * uses the calling thread of the Start() method to read words from standard
     * input. You can stop checking words by entering an empty line, but to start
     * checking words again you must unload and then load the bundle again.
     */
    class US_ABI_LOCAL Activator : public BundleActivator
    {
    public:
        Activator() : m_context(), m_dictionary(nullptr) {}

        /**
         * Implements BundleActivator::Start(). Adds itself as a listener for service
         * events, then queries for available dictionary services. If any
         * dictionaries are found it gets a reference to the first one available and
         * then starts its "word checking loop". If no dictionaries are found, then
         * it just goes directly into its "word checking loop", but it will not be
         * able to check any words until a dictionary service arrives; any arriving
         * dictionary service will be automatically used by the client if a
         * dictionary is not already in use. Once it has dictionary, it reads words
         * from standard input and checks for their existence in the dictionary that
         * it is using.
         *
         * \note It is very bad practice to use the calling thread to perform a
         *       lengthy process like this; this is only done for the purpose of
         *       the tutorial.
         *
         * @param context the bundle context for this bundle.
         */
        void
```

```

Start(BundleContext context)
{
    m_context = context;

    {
        // Use your favorite thread library to synchronize member
        // variable access within this scope while registering
        // the service listener and performing our initial
        // dictionary service lookup since we
        // don't want to receive service events when looking up the
        // dictionary service, if one exists.
        // MutexLocker lock(&m_mutex);

        // Listen for events pertaining to dictionary services.
        m_context.AddServiceListener(std::bind(&Activator::ServiceChanged,
↪this, std::placeholders::_1),
                                std::string("&(") +
↪Constants::OBJECTCLASS + "="
                                + us_service_interface_iid
↪<IDictionaryService>() + ")"
                                + "(Language=*))");

        // Query for any service references matching any language.
        std::vector<ServiceReference<IDictionaryService>> refs
            = context.GetServiceReferences<IDictionaryService>("(Language=*)
↪");

        // If we found any dictionary services, then just get
        // a reference to the first one so we can use it.
        if (!refs.empty())
        {
            m_ref = refs.front();
            m_dictionary = m_context.GetService(m_ref);
        }
    }

    std::cout << "Enter a blank line to exit." << std::endl;

    // Loop endlessly until the user enters a blank line
    while (std::cin)
    {
        // Ask the user to enter a word.
        std::cout << "Enter word: ";

        std::string word;
        std::getline(std::cin, word);

        // If the user entered a blank line, then
        // exit the loop.
        if (word.empty())
        {
            break;
        }
        // If there is no dictionary, then say so.
        else if (m_dictionary == nullptr)
        {
            std::cout << "No dictionary available." << std::endl;
        }
    }
}

```

```

        // Otherwise print whether the word is correct or not.
        else if (m_dictionary->CheckWord(word))
        {
            std::cout << "Correct." << std::endl;
        }
        else
        {
            std::cout << "Incorrect." << std::endl;
        }
    }
}

/**
 * Implements BundleActivator::Stop(). Does nothing since
 * the C++ Micro Services library will automatically unget any used services.
 * @param context the context for the bundle.
 */
void
Stop(BundleContext /*context*/)
{
    // NOTE: The service is automatically released.
}

/**
 * Implements ServiceListener.serviceChanged(). Checks to see if the service
 * we are using is leaving or tries to get a service if we need one.
 *
 * @param event the fired service event.
 */
void
ServiceChanged(ServiceEvent const& event)
{
    // Use your favorite thread library to synchronize this
    // method with the Start() method.
    // MutexLocker lock(&m_mutex);

    // If a dictionary service was registered, see if we
    // need one. If so, get a reference to it.
    if (event.GetType() == ServiceEvent::SERVICE_REGISTERED)
    {
        if (!m_ref)
        {
            // Get a reference to the service object.
            m_ref = event.GetServiceReference();
            m_dictionary = m_context.GetService(m_ref);
        }
    }
    // If a dictionary service was unregistered, see if it
    // was the one we were using. If so, unget the service
    // and try to query to get another one.
    else if (event.GetType() == ServiceEvent::SERVICE_UNREGISTERING)
    {
        if (event.GetServiceReference() == m_ref)
        {
            // Unget service object and null references.
            m_ref = nullptr;
            m_dictionary.reset();
        }
    }
}

```

```

        // Query to see if we can get another service.
        std::vector<ServiceReference<IDictionaryService>> refs;
        try
        {
            refs = m_context.GetServiceReferences<IDictionaryService>(
↪ " (Language=*) ");
        }
        catch (std::invalid_argument const& e)
        {
            std::cout << e.what() << std::endl;
        }

        if (!refs.empty())
        {
            // Get a reference to the first service object.
            m_ref = refs.front();
            m_dictionary = m_context.GetService(m_ref);
        }
    }
}

private:
    // Bundle context
    BundleContext m_context;

    // The service reference being used
    ServiceReference<IDictionaryService> m_ref;

    // The service object being used
    std::shared_ptr<IDictionaryService> m_dictionary;
};
} // namespace

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)

```

The client listens for service events indicating the arrival or departure of dictionary services. If a new dictionary service arrives, the bundle will start using that service if and only if it currently does not have a dictionary service. If an existing dictionary service disappears, the bundle will check to see if the disappearing service is the one it is using; if it is it stops using it and tries to query for another dictionary service, otherwise it ignores the event.

Like normal, we must create a `manifest.json` file that contains the meta-data for our bundle:

```

{
    "bundle.symbolic_name" : "dictionaryclient2",
    "bundle.activator" : true
}

```

As in Example 3, we must link our bundle to the `dictionaryservice` bundle:

```

set(_srcs Activator.cpp)

set(dictionaryclient2_DEPENDS dictionaryservice)
CreateTutorial(dictionaryclient2 ${_srcs})

```

After running the `usTutorialDriver` executable, and starting the event listener bundle, we can use the `start dictionaryclient2` command to start our robust dictionary client bundle:

```
CppMicroServices-debug> bin/usTutorialDriver
> start eventlistener
Starting to listen for service events.
> start dictionaryclient2
Ex1: Service of type IDictionaryService registered.
Enter a blank line to exit.
Enter word:
```

The above command starts the bundle and it will use the main thread to prompt us for words. Enter one word at a time to check the words and enter a blank line to stop checking words. To reload the bundle, we must first use the `stop dictionaryclient2` command to stop the bundle, then the `start dictionaryclient2` command to re-start it. To test the dictionary service, enter any of the words in the dictionary (e.g., “welcome”, “to”, “the”, “micro”, “services”, “tutorial”) or any word not in the dictionary.

Since this client monitors the dynamic availability of the dictionary service, it is robust in the face of sudden departures of the dictionary service. Further, when a dictionary service arrives, it automatically gets the service if it needs it and continues to function. These capabilities are a little difficult to demonstrate since we are using a simple single-threaded approach, but in a multi-threaded or GUI-oriented application this robustness is very useful.

## 6.6 Example 5 - Service Tracker Dictionary Client Bundle

In *Example 4*, we created a more robust client bundle for our dictionary service. Due to the complexity of dealing with dynamic service availability, even that client may not sufficiently address all situations. To deal with this complexity the C++ Micro Services library provides the `cppmicroservices::ServiceTracker` utility class. In this example we create a client for the dictionary service that uses the `ServiceTracker` class to monitor the dynamic availability of the dictionary service, resulting in an even more robust client.

The functionality of the new dictionary client is essentially the same as the one from Example 4. Our bundle uses its bundle context to create a `ServiceTracker` instance to track the dynamic availability of the dictionary service on our behalf. Our client uses the dictionary service returned by the `ServiceTracker`, which is selected based on a ranking algorithm defined by the C++ Micro Services library. The source code for our bundles is as follows in a file called `dictionaryclient3/Activator.cpp`:

```
#include "IDictionaryService.h"

#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"
#include "cppmicroservices/ServiceTracker.h"

using namespace cppmicroservices;

namespace
{
    /**
     * This class implements a bundle activator that uses a dictionary
     * service to check for the proper spelling of a word by
     * checking for its existence in the dictionary. This bundle
     * uses a service tracker to dynamically monitor the availability
     * of a dictionary service, instead of providing a custom service
     * listener as in Example 4. The bundle uses the service returned
     * by the service tracker, which is selected based on a ranking
     * algorithm defined by the C++ Micro Services library.
     * Again, the calling thread of the Start() method is used to read
     * words from standard input, checking its existence in the dictionary.
     */
}
```

```

    * You can stop checking words by entering an empty line, but
    * to start checking words again you must unload and then load
    * the bundle again.
    */
class US_ABI_LOCAL Activator : public BundleActivator
{
public:
    Activator() : m_context(), m_tracker(nullptr) {}

    /**
     * Implements BundleActivator::Start(). Creates a service
     * tracker to monitor dictionary services and starts its "word
     * checking loop". It will not be able to check any words until
     * the service tracker finds a dictionary service; any discovered
     * dictionary service will be automatically used by the client.
     * It reads words from standard input and checks for their
     * existence in the discovered dictionary.
     *
     * \note It is very bad practice to use the calling thread to perform a
     *       lengthy process like this; this is only done for the purpose of
     *       the tutorial.
     *
     * @param context the bundle context for this bundle.
     */
    void
    Start(BundleContext context)
    {
        m_context = context;

        // Create a service tracker to monitor dictionary services.
        m_tracker = new ServiceTracker<IDictionaryService>(
            m_context,
            LDAPFilter(std::string("&(") + Constants::OBJECTCLASS + "="
                + us_service_interface_iid<IDictionaryService>() + ")" +
↪ "(Language=*)")");
        m_tracker->Open();

        std::cout << "Enter a blank line to exit." << std::endl;

        // Loop endlessly until the user enters a blank line
        while (std::cin)
        {
            // Ask the user to enter a word.
            std::cout << "Enter word: ";

            std::string word;
            std::getline(std::cin, word);

            // Get the selected dictionary, if available.
            std::shared_ptr<IDictionaryService> dictionary = m_tracker->
↪ GetService();

            // If the user entered a blank line, then
            // exit the loop.
            if (word.empty())
            {
                break;
            }
        }
    }
};

```

```

    }
    // If there is no dictionary, then say so.
    else if (!dictionary)
    {
        std::cout << "No dictionary available." << std::endl;
    }
    // Otherwise print whether the word is correct or not.
    else if (dictionary->CheckWord(word))
    {
        std::cout << "Correct." << std::endl;
    }
    else
    {
        std::cout << "Incorrect." << std::endl;
    }
}

// This automatically closes the tracker
delete m_tracker;
}

/**
 * Implements BundleActivator::Stop(). Does nothing since
 * the C++ Micro Services library will automatically unget any used services.
 * @param context the context for the bundle.
 */
void
Stop(BundleContext /*context*/)
{
}

private:
    // Bundle context
    BundleContext m_context;

    // The service tracker
    ServiceTracker<IDictionaryService>* m_tracker;
};
} // namespace

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)

```

Since this client uses the ServiceTracker utility class, it will automatically monitor the dynamic availability of the dictionary service. Like normal, we must create a manifest.json file that contains the meta-data for our bundle:

```

{
    "bundle.symbolic_name" : "dictionaryclient3",
    "bundle.activator" : true
}

```

Again, we must link our bundle to the dictionaryservice bundle:

```

set(_srcs Activator.cpp)

set(dictionaryclient3_DEPENDS dictionaryservice)
CreateTutorial(dictionaryclient3 ${_srcs})

```

After running the usTutorialDriver executable, and starting the event listener bundle, we can use the start

dictionaryclient3 command to start our robust dictionary client bundle:

```
CppMicroServices-debug> bin/usTutorialDriver
> start eventlistener
Starting to listen for service events.
> start dictionaryclient3
Ex1: Service of type IDictionaryService registered.
Enter a blank line to exit.
Enter word:
```

The above command starts the bundle and it will use the main thread to prompt us for words. Enter one word at a time to check the words and enter a blank line to stop checking words. To re-start the bundle, we must first use the `stop dictionaryclient3` command to stop the bundle, then the `start dictionaryclient3` command to re-start it. To test the dictionary service, enter any of the words in the dictionary (e.g., “welcome”, “to”, “the”, “micro”, “services”, “tutorial”) or any word not in the dictionary.

Since this client monitors the dynamic availability of the dictionary service, it is robust in the face of sudden departures of the the dictionary service. Further, when a dictionary service arrives, it automatically gets the service if it needs it and continues to function. These capabilities are a little difficult to demonstrate since we are using a simple single-threaded approach, but in a multi-threaded or GUI-oriented application this robustness is very useful.

## 6.7 Example 6 - Spell Checker Service Bundle

In this example, we complicate things further by defining a new service that uses an arbitrary number of dictionary services to perform its function. More precisely, we define a spell checker service which will aggregate all dictionary services and provide another service that allows us to spell check passages using our underlying dictionary services to verify the spelling of words. Our bundle will only provide the spell checker service if there are at least two dictionary services available. First, we will start by defining the spell checker service interface in a file called `spellcheckservice/ISpellCheckService.h`:

```
#include "cppmicroservices/ServiceInterface.h"

#include <string>
#include <vector>

#ifdef US_BUILD_SHARED_LIBS
#   ifdef Tutorial_spellcheckservice_EXPORTS
#       define SPELLCHECKSERVICE_EXPORT US_ABI_EXPORT
#   else
#       define SPELLCHECKSERVICE_EXPORT US_ABI_IMPORT
#   endif
#else
#   define SPELLCHECKSERVICE_EXPORT US_ABI_EXPORT
#endif

/**
 * A simple service interface that defines a spell check service. A spell check
 * service checks the spelling of all words in a given passage. A passage is any
 * number of words separated by a space character and the following punctuation
 * marks: comma, period, exclamation mark, question mark, semi-colon, and colon.
 */
struct SPELLCHECKSERVICE_EXPORT ISpellCheckService
{
    // Out-of-line virtual destructor for proper dynamic cast
    // support with older versions of gcc.
    virtual ~ISpellCheckService();
```



```

/**
 * Checks a given passage for spelling errors. A passage is any number of
 * words separated by a space and any of the following punctuation marks:
 * comma (,), period (.), exclamation mark (!), question mark (?),
 * semi-colon (;), and colon(:).
 *
 * @param passage the passage to spell check.
 * @return A list of misspelled words.
 */
virtual std::vector<std::string> Check(std::string const& passage) = 0;
};

```

The service interface is quite simple, with only one method that needs to be implemented. Because we provide an empty out-of-line destructor (defined in the file `ISpellCheckService.cpp`) we must export the service interface by using the bundle specific `SPELLCHECKSERVICE_EXPORT` macro.

In the following source code, the bundle needs to create a complete list of all dictionary services; this is somewhat tricky and must be done carefully if done manually via service event listeners. Our bundle makes use of the `cppmicroservices::ServiceTracker` and `cppmicroservices::ServiceTrackerCustomizer` classes to robustly react to service events related to dictionary services. The bundle activator of our bundle now additionally implements the `ServiceTrackerCustomizer` class to be automatically notified of arriving, departing, or modified dictionary services. In case of a newly added dictionary service, our `ServiceTrackerCustomizer::AddingService()` implementation checks if a spell checker service was already registered and if not registers a new `ISpellCheckService` instance if at least two dictionary services are available. If the number of dictionary services drops below two, our `ServiceTrackerCustomizer` implementation un-registers the previously registered spell checker service instance. These actions must be performed in a synchronized manner to avoid interference from service events originating from different threads. The implementation of our bundle activator is done in a file called `spellcheckservice/Activator.cpp`:

```

#include "IDictionaryService.h"
#include "ISpellCheckService.h"

#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"
#include "cppmicroservices/ServiceTracker.h"
#include "cppmicroservices/ServiceTrackerCustomizer.h"

#include <cstring>
#include <map>
#include <memory>

US_MSVC_PUSH_DISABLE_WARNING(4996)

using namespace cppmicroservices;

namespace
{
    /**
     * This class implements a bundle that implements a spell
     * checker service. The spell checker service uses all available
     * dictionary services to check for the existence of words in
     * a given sentence. This bundle uses a ServiceTracker to
     * monitors the dynamic availability of dictionary services,
     * and to aggregate all available dictionary services as they
     * arrive and depart. The spell checker service is only registered
     */
}

```

```

    * if there are dictionary services available, thus the spell
    * checker service will appear and disappear as dictionary
    * services appear and disappear, respectively.
    */
class US_ABI_LOCAL Activator
    : public BundleActivator
    , public ServiceTrackerCustomizer<IDictionaryService>
{

private:
    /**
     * A private inner class that implements a spell check service; see
     * ISpellCheckService for details of the service.
     */
    class SpellCheckImpl : public ISpellCheckService
    {

private:
        typedef std::map<ServiceReference<IDictionaryService>, std::shared_ptr
↪<IDictionaryService>>
            RefToServiceType;
        RefToServiceType m_refToSvcMap;

public:
        /**
         * Implements ISpellCheckService::Check(). Checks the given passage for
         * misspelled words.
         *
         * @param passage the passage to spell check.
         * @return A list of misspelled words.
         */
        std::vector<std::string>
        Check(std::string const& passage)
        {
            std::vector<std::string> errorList;

            // No misspelled words for an empty string.
            if (passage.empty())
            {
                return errorList;
            }

            // Tokenize the passage using spaces and punctuation.
            char const* delimiters = " ,.!?:;";
            char* passageCopy = new char[passage.size() + 1];
            std::memcpy(passageCopy, passage.c_str(), passage.size() + 1);
            char* pch = std::strtok(passageCopy, delimiters);

            {
                // Lock the m_refToSvcMap member using your favorite thread_
↪library here...
                // MutexLocker lock(&m_refToSvcMapMutex)

                // Loop through each word in the passage.
                while (pch)
                {
                    std::string word(pch);

```

```

        bool correct = false;

        // Check each available dictionary for the current word.
        for (RefToServiceType::const_iterator i = m_refToSvcMap.
↪begin();
            (!correct) && (i != m_refToSvcMap.end());
            ++i)
        {
            std::shared_ptr<IDictionaryService> dictionary = i->
↪second;

            if (dictionary->CheckWord(word))
            {
                correct = true;
            }

            // If the word is not correct, then add it
            // to the incorrect word list.
            if (!correct)
            {
                errorList.push_back(word);
            }

            pch = std::strtok(nullptr, delimiters);
        }

        delete[] passageCopy;

        return errorList;
    }

    std::size_t
    AddDictionary(ServiceReference<IDictionaryService> const& ref,
                  std::shared_ptr<IDictionaryService> dictionary)
    {
        // Lock the m_refToSvcMap member using your favorite thread library_
↪here...

        // MutexLocker lock(&m_refToSvcMapMutex)

        m_refToSvcMap.insert(std::make_pair(ref, dictionary));

        return m_refToSvcMap.size();
    }

    std::size_t
    RemoveDictionary(ServiceReference<IDictionaryService> const& ref)
    {
        // Lock the m_refToSvcMap member using your favorite thread library_
↪here...

        // MutexLocker lock(&m_refToSvcMapMutex)

        m_refToSvcMap.erase(ref);

        return m_refToSvcMap.size();
    }
};

```

```

    virtual std::shared_ptr<IDictionaryService>
    AddingService(ServiceReference<IDictionaryService> const& reference)
    {
        std::shared_ptr<IDictionaryService> dictionary = m_context.
↪GetService(reference);
        std::size_t count = m_spellCheckService->AddDictionary(reference, ↪
↪dictionary);
        if (!m_spellCheckReg && count > 1)
        {
            m_spellCheckReg = m_context.RegisterService<ISpellCheckService>(m_
↪spellCheckService);
        }
        return dictionary;
    }

    virtual void
    ModifiedService(ServiceReference<IDictionaryService> const& /*reference*/,
                    std::shared_ptr<IDictionaryService> const& /*service*/)
    {
        // do nothing
    }

    virtual void
    RemovedService(ServiceReference<IDictionaryService> const& reference,
                    std::shared_ptr<IDictionaryService> const& /*service*/)
    {
        if (m_spellCheckService->RemoveDictionary(reference) < 2 && m_
↪spellCheckReg)
        {
            m_spellCheckReg.Unregister();
            m_spellCheckReg = nullptr;
        }
    }

    std::shared_ptr<SpellCheckImpl> m_spellCheckService;
    ServiceRegistration<ISpellCheckService> m_spellCheckReg;

    BundleContext m_context;
    std::unique_ptr<ServiceTracker<IDictionaryService>> m_tracker;

public:
    Activator() : m_context() {}

    /**
     * Implements BundleActivator::Start(). Registers an
     * instance of a dictionary service using the bundle context;
     * attaches properties to the service that can be queried
     * when performing a service look-up.
     *
     * @param context the context for the bundle.
     */
    void
    Start(BundleContext context)
    {
        m_context = context;

        m_spellCheckService.reset(new SpellCheckImpl);
    }

```

```

        m_tracker.reset(new ServiceTracker<IDictionaryService>(context, this));
        m_tracker->Open();
    }

    /**
     * Implements BundleActivator::Stop(). Does nothing since
     * the C++ Micro Services library will automatically unregister any
     * registered services
     * and release any used services.
     *
     * @param context the context for the bundle.
     */
    void
    Stop(BundleContext /*context*/)
    {
        // NOTE: The service is automatically unregistered

        m_tracker->Close();
    }
};
} // namespace

US_MSVC_POP_WARNING

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)

```

Note that we do not need to unregister the service in `Stop()` method, because the C++ Micro Services library will automatically do so for us. The spell checker service that we have implemented is very simple; it simply parses a given passage into words and then loops through all available dictionary services for each word until it determines that the word is correct. Any incorrect words are added to an error list that will be returned to the caller. This solution is not optimal and is only intended for educational purposes. Next, we create a `manifest.json` file that contains the meta-data for our bundle:

```

{
  "bundle.symbolic_name" : "spellcheckservice",
  "bundle.activator" : true
}

```

---

**Note:** In this example, the service interface and implementation are both contained in one bundle which exports the interface class. However, service implementations almost never need to be exported and in many use cases it is beneficial to provide the service interface and its implementation(s) in separate bundles. In such a scenario, clients of a service will only have a link-time dependency on the shared library providing the service interface (because of the out-of-line destructor) but not on any bundles containing service implementations. This often leads to bundles which do not export any symbols at all.

---

For an introduction how to compile our source code, see [Example 1 - Service Event Listener](#).

After running the `usTutorialDriver` program we should make sure that the bundle from Example 1 is active. We can use the `status` shell command to get a list of all bundles, their state, and their bundle identifier number. If the Example 1 bundle is not active, we should start the bundle using the `start` command and the bundle's identifier number or symbolic name that is displayed by the `status` command. Now we can start the spell checker service bundle by entering the `start spellcheckservice` command which will also trigger the starting of the `dictionaryservice` bundle containing the english dictionary:

```
CppMicroServices-build> bin/usTutorialDriver
> start eventlistener
Starting to listen for service events.
> start spellcheckservice
> status
Id | Symbolic Name          | State
-----
0 | system_bundle          | ACTIVE
1 | eventlistener           | ACTIVE
2 | dictionaryservice       | INSTALLED
3 | frenchdictionary        | INSTALLED
4 | dictionaryclient        | INSTALLED
5 | dictionaryclient2       | INSTALLED
6 | dictionaryclient3       | INSTALLED
7 | spellcheckservice       | ACTIVE
8 | spellcheckclient        | INSTALLED
>
```

To trigger the registration of the spell checker service from our bundle, we start the frenchdictionary using the `start frenchdictionary` command. If the bundle from [Example 1](#) is still active, then we should see it print out the details of the service event it receives when our new bundle registers its spell checker service:

```
CppMicroServices-build> bin/usTutorialDriver
> start frenchdictionary
Ex1: Service of type IDictionaryService registered.
Ex1: Service of type ISpellCheckService registered.
>
```

We can experiment with our spell checker service's dynamic availability by stopping the french dictionary service; when the service is stopped, the eventlistener bundle will print that our bundle is no longer offering its spell checker service. Likewise, when the french dictionary service comes back, so will our spell checker service. We create a client for our spell checker service in [Example 7](#). To exit the `usTutorialDriver` program, we use the `shutdown` command.

## 6.8 Example 7 - Spell Checker Client Bundle

In this example we create a client for the spell checker service we implemented in [Example 6](#). This client monitors the dynamic availability of the spell checker service using the Service Tracker and is very similar in structure to the dictionary client we implemented in [Example 5](#). The functionality of the spell checker client reads passages from standard input and spell checks them using the spell checker service. Our bundle uses its bundle context to create a `ServiceTracker` object to monitor spell checker services. The source code for our bundle is as follows in a file called `spellcheckclient/Activator.cpp`:

```
#include "ISpellCheckService.h"

#include "cppmicroservices/BundleActivator.h"
#include "cppmicroservices/BundleContext.h"
#include "cppmicroservices/ServiceTracker.h"

#include <cstring>
#include <iostream>

using namespace cppmicroservices;

namespace
```

```

{

    /**
     * This class implements a bundle that uses a spell checker
     * service to check the spelling of a passage. This bundle
     * is essentially identical to Example 5, in that it uses the
     * Service Tracker to monitor the dynamic availability of the
     * spell checker service. When starting this bundle, the thread
     * calling the Start() method is used to read passages from
     * standard input. You can stop spell checking passages by
     * entering an empty line, but to start spell checking again
     * you must un-load and then load the bundle again.
     */
    class US_ABI_LOCAL Activator : public BundleActivator
    {

    public:
        Activator() : m_context(), m_tracker(nullptr) {}

        /**
         * Implements BundleActivator::Start(). Creates a service
         * tracker object to monitor spell checker services. Enters
         * a spell check loop where it reads passages from standard
         * input and checks their spelling using the spell checker service.
         *
         * \note It is very bad practice to use the calling thread to perform a
         *       lengthy process like this; this is only done for the purpose of
         *       the tutorial.
         *
         * @param context the bundle context for this bundle.
         */
        void
        Start(BundleContext context)
        {
            m_context = context;

            // Create a service tracker to monitor spell check services.
            m_tracker = new ServiceTracker<ISpellCheckService>(m_context);
            m_tracker->Open();

            // std::cout << "Tracker count is :" << m_tracker->GetTrackingCount() <<
            ↪std::endl;
            std::cout << "Enter a blank line to exit." << std::endl;

            // Loop endlessly until the user enters a blank line
            while (std::cin)
            {
                // Ask the user to enter a passage.
                std::cout << "Enter passage: ";

                std::string passage;
                std::getline(std::cin, passage);

                // Get the selected spell check service, if available.
                std::shared_ptr<ISpellCheckService> checker = m_tracker->GetService();

                // If the user entered a blank line, then
                // exit the loop.
            }
        }
    };
}

```

```

        if (passage.empty())
        {
            break;
        }
        // If there is no spell checker, then say so.
        else if (checker == nullptr)
        {
            std::cout << "No spell checker available." << std::endl;
        }
        // Otherwise check passage and print misspelled words.
        else
        {
            std::vector<std::string> errors = checker->Check(passage);

            if (errors.empty())
            {
                std::cout << "Passage is correct." << std::endl;
            }
            else
            {
                std::cout << "Incorrect word(s):" << std::endl;
                for (std::size_t i = 0; i < errors.size(); ++i)
                {
                    std::cout << "    " << errors[i] << std::endl;
                }
            }
        }
    }

    // This automatically closes the tracker
    delete m_tracker;
}

/**
 * Implements BundleActivator::Stop(). Does nothing since
 * the C++ Micro Services library will automatically unget any used services.
 * @param context the context for the bundle.
 */
void
Stop(BundleContext /*context*/)
{
}

private:
    // Bundle context
    BundleContext m_context;

    // The service tracker
    ServiceTracker<ISpellCheckService>* m_tracker;
};
} // namespace

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(Activator)

```

After running the `usTutorialDriver` program use the `status` command to make sure that only the bundles from Example 2, Example 2b, and Example 6 are started; use the `start` (`start <id | name>`) and `stop` (`stop <id | name>`) commands as appropriate to start and stop the various tutorial bundles, respectively. Now we can start our spell checker client bundle by entering `start spellcheckclient`:



```
CppMicroServices-build> bin/usTutorialDriver
> start eventlistener
Starting to listen for service events.
> start spellcheckservice
> status
Id | Symbolic Name          | State
-----
0 | system_bundle          | ACTIVE
1 | eventlistener           | ACTIVE
2 | dictionaryservice       | INSTALLED
3 | frenchdictionary        | INSTALLED
4 | dictionaryclient        | INSTALLED
5 | dictionaryclient2       | INSTALLED
6 | dictionaryclient3       | INSTALLED
7 | spellcheckservice       | ACTIVE
8 | spellcheckclient        | INSTALLED
>
```

To trigger the registration of the spell checker service from our bundle, we start the frenchdictionary using the `start frenchdictionary` command. If the bundle from [Example 1](#) is still active, then we should see it print out the details of the service event it receives when our new bundle registers its spell checker service:

```
CppMicroServices-build> bin/usTutorialDriver
> start spellcheckservice
> start frenchdictionary
> start spellcheckclient
Enter a blank line to exit.
Enter passage:
```

When we start the bundle, it will use the main thread to prompt us for passages; a passage is a collection of words separated by spaces, commas, periods, exclamation points, question marks, colons, or semi-colons. Enter a passage and press the enter key to spell check the passage or enter a blank line to stop spell checking passages. To restart the bundle, we must first use the `stop` command to stop the bundle, then the `start` command to re-start it.

Since this client uses the Service Tracker to monitor the dynamic availability of the spell checker service, it is robust in the scenario where the spell checker service suddenly departs. Further, when a spell checker service arrives, it automatically gets the service if it needs it and continues to function. These capabilities are a little difficult to demonstrate since we are using a simple single-threaded approach, but in a multi-threaded or GUI-oriented application this robustness is very useful.



---

## Emulating Singletons

---

Integrating C++ Micro Services into an existing code-base can be done incrementally, e.g. by starting to convert class singletons to services.

### 7.1 Meyers Singleton

Singletons are a well known pattern to ensure that only one instance of a class exists during the whole life-time of the application. A self-deleting variant is the “Meyers Singleton”:

```
class SingletonOne
{
public:
    static SingletonOne& GetInstance();

    // Just some member
    int a;

private:
    SingletonOne();
    ~SingletonOne();

    // Disable copy constructor and assignment operator.
    SingletonOne(SingletonOne const&);
    SingletonOne& operator=(SingletonOne const&);
};
```

where the `GetInstance()` method is implemented as

```
SingletonOne&
SingletonOne::GetInstance()
{
    static SingletonOne instance;
    return instance;
}
```

If such a singleton is accessed during static deinitialization, your program might crash or even worse, exhibit undefined behavior, depending on your compiler and/or weekday. Such an access might happen in destructors of other objects with static life-time.

For example, suppose that `SingletonOne` needs to call a second Meyers singleton during destruction:

```
SingletonOne::~SingletonOne() { std::cout << "SingletonTwo::b = " <<
↳ SingletonTwo::GetInstance().b << std::endl; }
```

If `SingletonTwo` was destroyed before `SingletonOne`, this leads to the mentioned problems. Note that this problem only occurs for static objects defined in the same shared library.

Since you cannot reliably control the destruction order of global static objects, you must not introduce dependencies between them during static deinitialization. This is one reason why one should consider an alternative approach to singletons (unless you can absolutely make sure that nothing in your shared library will introduce such dependencies. Never.)

Of course you could use something like a *Phoenix singleton* but that will have other drawbacks in certain scenarios. Returning pointers instead of references in `GetInstance()` would open up the possibility to return a `nullptr`, but than again this would not help if you require a non-NULL instance in your destructor.

Another reason for an alternative approach is that singletons are usually not meant to be singletons for eternity. If your design evolves, you might hit a point where you suddenly need multiple instances of your singleton.

## 7.2 Singletons as a Service

C++ Micro Services can be used to emulate the singleton pattern using a non-singleton class. This leaves room for future extensions without the need for heavy refactoring. Additionally, it gives you full control about the construction and destruction order of your “singletons” inside your shared library or executable, making it possible to have dependencies between them during destruction.

### 7.2.1 Converting a Classic Singleton

We modify the previous `SingletonOne` class such that it internally uses the micro services API. The changes are discussed in detail below.

```
class SingletonOneService
{
public:
    // This will return a SingletonOneService instance with the
    // lowest service id at the time this method was called the first
    // time and returned a non-null value (which is usually the instance
    // which was registered first). An empty object is returned if no
    // instance was registered yet.
    //
    // Note: This is a helper method to migrate traditional singletons to
    // services. Do not create a method like this in real world applications.
    static std::shared_ptr<SingletonOneService> GetInstance();

    int a;

    SingletonOneService();
    ~SingletonOneService();
};
```

```
private:
    // Disable copy constructor and assignment operator.
    SingletonOneService(SingletonOneService const&);
    SingletonOneService& operator=(SingletonOneService const&);
};
```

- In the implementation above, the class `SingletonOneService` provides the implementation as well as the interface.
- The `SingletonOneService` class looks like a plain C++ class, no need for hiding constructors and destructor

Let's have a look at the modified `GetInstance()` and `~SingletonOneService()` methods.

```
std::shared_ptr<SingletonOneService>
SingletonOneService::GetInstance()
{
    static ServiceReference<SingletonOneService> serviceRef;
    static auto context = GetBundleContext();

    if (!serviceRef)
    {
        // This is either the first time GetInstance() was called,
        // or a SingletonOneService instance has not yet been registered.
        serviceRef = context.GetServiceReference<SingletonOneService>();
    }

    if (serviceRef)
    {
        // We have a valid service reference. It always points to the service
        // with the lowest id (usually the one which was registered first).
        // This still might return a null pointer, if all SingletonOneService
        // instances have been unregistered (during unloading of the library,
        // for example).
        return context.GetService(serviceRef);
    }
    else
    {
        // No SingletonOneService instance was registered yet.
        return nullptr;
    }
}
```

The inline comments should explain the details. Note that we now had to change the return type to a shared pointer, instead of a reference as in the classic singleton. This is necessary since we can no longer guarantee that an instance always exists. Clients of the `GetInstance()` method must check if the returned object is empty and react appropriately.

**Note:** Newly created “singletons” should not expose a `GetInstance()` method. They should be handled as proper services and hence should be retrieved by clients using the `BundleContext` or `ServiceTracker` API. The `GetInstance()` method is for migration purposes only.

```
SingletonOneService::~SingletonOneService()
{
    std::shared_ptr<SingletonTwoService> singletonTwoService =
    SingletonTwoService::GetInstance();
```

```
// The bundle activator must ensure that a SingletonTwoService instance is
// available during destruction of a SingletonOneService instance.
assert(singletonTwoService != nullptr);
std::cout << "SingletonTwoService::b = " << singletonTwoService->b << std::endl;
}
```

The `SingletonTwoService::GetInstance()` method is implemented exactly as in `SingletonOneService`. Because we know that the bundle activator guarantees that a `SingletonTwoService` instance will always be available during the life-time of a `SingletonOneService` instance (see below), we can assert a non-null pointer. Otherwise, we would have to handle the null-pointer case.

The order of construction/registration and destruction/unregistration of our singletons (or any other services) is defined in the `Start()` and `Stop()` methods of the bundle activator.

```
void
Start(BundleContext context)
{
    // First create and register a SingletonTwoService instance.
    m_SingletonTwo = std::make_shared<SingletonTwoService>();
    m_SingletonTwoReg = context.RegisterService<SingletonTwoService>(m_
↪SingletonTwo);
    // Framework service registry has shared ownership of the SingletonTwoService_
↪instance

    // Now the SingletonOneService constructor will get a valid
// SingletonTwoService instance.
    m_SingletonOne = std::make_shared<SingletonOneService>();
    m_SingletonOneReg = context.RegisterService<SingletonOneService>(m_
↪SingletonOne);
}
```

The `Stop()` method is defined as:

```
void
Stop(BundleContext /*context*/)
{
    // Services are automatically unregistered during unloading of
// the shared library after the call to Stop(BundleContext*)
// has returned.

    // Since SingletonOneService needs a non-null SingletonTwoService
// instance in its destructor, we explicitly unregister and delete the
// SingletonOneService instance here. This way, the SingletonOneService
// destructor will still get a valid SingletonTwoService instance.
    m_SingletonOneReg.Unregister();
    m_SingletonOne.reset();
    // Deletion of the SingletonTwoService instance is handled by the smart_
↪pointer

    // For singletonTwoService, we could rely on the automatic unregistering
// by the service registry and on automatic deletion of service
// instances through smart pointers.
    m_SingletonTwoReg.Unregister();
    m_SingletonTwo.reset();
    // Deletion of the SingletonOneService instance is handled by the smart_
↪pointer
}
```

## 8.1 The Resource System

The C++ Micro Services library provides a generic resource system that allows you to:

- Embed resources in a bundle.
- Access resources at runtime.

The features and limitations of the resource system are described in more detail in the following sections.

### 8.1.1 Embedding Resources in a Bundle

Resources are embedded into a bundle's shared or static library (or into an executable) by using the **usResourceCompiler3** executable. It will create a ZIP archive of all input files and can append it to the bundle file with a configurable compression level. See *usResourceCompiler3* for the command line reference.

### 8.1.2 Accessing Resources at Runtime

Each bundle provides individual resource lookup and access to its embedded resources via the *Bundle* class which provides methods returning *BundleResource* objects. The *BundleResource* class provides a high-level API for accessing resource information and traversing the resource tree.

The *BundleResourceStream* class provides a `std::istream` compatible object for the seamless usage of embedded resource data in third-party libraries.

Resources are managed in a tree hierarchy, modeling the original parent-child relationship on the file-system.

The following example shows how to retrieve a resource from each currently installed bundle whose path is specified by a bundle property:

```
// Check if a bundle defines a "service-component" property
// and use its value to retrieve an embedded resource containing
// a component description.
```

```

for (auto const& bundle : bundleCtx.GetBundles())
{
    if (bundle.GetState() == Bundle::STATE_UNINSTALLED)
        continue;
    auto headers = bundle.GetHeaders();
    auto iter = headers.find("service-component");
    std::string componentPath = (iter == headers.end()) ? std::string() : iter->
↪second.ToString();
    if (!componentPath.empty())
    {
        BundleResource componentResource = bundle.GetResource(componentPath);
        if (!componentResource.IsValid() || componentResource.IsDir())
            continue;

        // Create a std::istream compatible object and parse the
        // component description.
        BundleResourceStream resStream(componentResource);
        parseComponentDefinition(resStream);
    }
}

```

This example could be enhanced to dynamically react to bundles being started and stopped, making use of the popular *extender pattern* from OSGi.

### 8.1.3 Runtime Overhead

The resource system has the following runtime characteristics:

- During bundle install, the bundle's ZIP archive header data (if available) is parsed and stored in memory.
- Querying `Bundle` or `BundleResource` objects for resource information will not extract the embedded resource data and hence only has minimal runtime and memory overhead.
- Creating a `BundleResourceStream` object will allocate memory for the uncompressed resource data and inflate it. The memory will be free'd after the `BundleResourceStream` object is destroyed.

### 8.1.4 Conventions and Limitations

- Resources have a size limitation of 2GB due to the use of the ZIP format.
- Resource entries are stored with case-insensitive names. On case-sensitive file systems, adding resources with the same name but different capitalization will lead to an error.
- Looking up resources by name at runtime *is* case sensitive.
- The CppMicroServices library will search for a valid zip file inside a shared library, starting from the end of the file. If other zip files are embedded in the bundle as well (e.g. as an additional resource embedded via the Windows RC compiler or using other techniques), it will stop at the first valid zip file and use it as the resource container.

## 8.2 Bundle Properties

A C++ Micro Services Bundle provides meta-data in the form of so-called *properties* about itself. Properties are key - value pairs where the key is of type `std::string` and the value of type `Any`. The following properties are always set by the C++ Micro Services library and cannot be altered by the bundle author:



- `bundle.id` - The unique id of the bundle (type `long`)
- `bundle.location` - The full path to the bundle's shared library on the file system (type `std::string`)

Bundle authors must always add the following property to their `manifest.json` file:

- `bundle.symbolic_name` - The human readable name of the bundle (type `std::string`)

C++ Micro Services will not install any bundle which doesn't contain a valid 'bundle.symbolic\_name' property in its `manifest.json` file.

Bundle authors can add custom properties by providing a `manifest.json` file, embedded as a top-level resource into the bundle (see [The Resource System](#)). The root value of the JSON file must be a JSON object. An example `manifest.json` file would be:

```
{
  "bundle.symbolic_name" : "my bundle",
  "bundle.version" : "1.0.2",
  "bundle.description" : "This bundle provides an awesome service",
  "authors" : [ "John Doe", "Douglas Reynolds", "Daniel Cannady" ],
  "rating" : 5
}
```

All JSON member names of the root object will be available as property keys in the bundle containing the `manifest.json` file. The C++ Micro Services library specifies the following standard keys for re-use in `manifest.json` files:

- `bundle.version` - The version of the bundle (type `std::string`). The version string must be a valid version identifier, as specified in the `BundleVersion` class.
- `bundle.vendor` - The vendor name of the bundle (type `std::string`)
- `bundle.description` - A description for the bundle (type `std::string`)

---

**Note:** Some of the properties mentioned above may also be accessed via dedicated methods in the `Bundle` class, e.g. `GetSymbolicName()` or `GetVersion()`.

---

**Attention:** Despite JSON being a case-sensitive format, C++ Micro Services stores bundle properties as case-insensitive to accommodate LDAP queries using `LDAPFilter` and `LDAPProp`. Either keep the JSON case-insensitive or standardize on a convention to ensure queries return the correct results.

When parsing the `manifest.json` file, the JSON types are mapped to C++ types and stored in instances of the `Any` class. The mapping is as follows:

JSON	C++ (Any)
object	<code>std::map</code>
array	<code>std::vector</code>
string	<code>std::string</code>
number	int or double
true	<code>bool</code>
false	<code>bool</code>
null	<code>Any()</code>

## 8.3 Service Hooks

The CppMicroServices library implements the Service Hook Service Specification Version 1.1 from OSGi Core Release 5 for C++. Below is a summary of the concept - consult the OSGi specifications for more details.

Service hooks provide mechanisms for bundle writers to closely interact with the CppMicroServices service registry. These mechanisms are not intended for use by application bundles but rather by bundles in need of *hooking* into the service registry and modifying the behaviour of application bundles.

Some example use cases for service hooks include:

- Proxying of existing services by hiding the original service and registering a *proxy service* with the same properties
- Providing services *on demand* based on registered service listeners from external bundles

### 8.3.1 Event Listener Hook

A bundle can intercept events being delivered to other bundles by registering a `ServiceEventListenerHook` object as a service. The CppMicroServices library will send all service events to all the registered hooks using the reversed ordering of their `ServiceReference` objects.

Note that event listener hooks are called *after* the event was created, but *before* it is filtered by the optional filter expression of the service listeners. Therefore, an event listener hook receives all `SERVICE_REGISTERED`, `SERVICE_MODIFIED`, `SERVICE_UNREGISTERING`, and `SERVICE_MODIFIED_ENDMATCH` events regardless of the presence of a service listener filter. It may then remove bundles or specific service listeners from the `ServiceEventListenerHook::ShrinkableMapType` object passed to the `ServiceEventListenerHook::Event()` method to hide service events.

Implementers of the Event Listener Hook must ensure that bundles continue to see a consistent set of service events.

### 8.3.2 Find Hook

Find Hook objects registered using the `ServiceFindHook` interface will be called when bundles look up service references via the `BundleContext::GetServiceReference()` or `BundleContext::GetServiceReferences()` methods. The order in which the CppMicroServices library calls the find hooks is the reverse operator< ordering of their `ServiceReference` objects. The hooks may remove service references from the `ShrinkableVector` object passed to the `ServiceFindHook::Find()` method to hide services from specific bundles.

### 8.3.3 Listener Hook

The CppMicroServices API provides information about the registration, unregistration, and modification of services. However, it does not directly allow the introspection of bundles to get information about what services a bundle is waiting for.

Bundles may need to wait for a service to arrive (via a registered service listener) before performing their functions. Listener Hooks provide a mechanism to get informed about all existing, newly registered, and removed service listeners.

A Listener Hook object registered using the `ServiceListenerHook` interface will be notified about service listeners by being passed `ServiceListenerHook::ListenerInfo` objects. Each `ListenerInfo` object is related to the registration / unregistration cycle of a specific service listener. That is, registering the same service listener again (even with a different filter) will automatically unregister the previous registration and the newly registered service listener is related to a different `ListenerInfo` object. `ListenerInfo` objects can be stored in

unordered containers and compared with each other- for example, to match `ServiceListenerHook::Added()` and `ServiceListenerHook::Removed()` calls.

The Listener Hooks are called synchronously in the same order of their registration. However, in rare cases the removal of a service listener may be reported before its corresponding addition. To handle this case, the `ListenerInfo::IsRemoved()` method is provided which can be used in the `ServiceListenerHook::Added()` method to detect a delivery that is out of order. A simple strategy is to ignore removed events without corresponding added events and ignore added events where the `ListenerInfo` object is already removed:

```
class MyServiceListenerHook : public ServiceListenerHook
{
private:
    class Tracked
    {
        // Do some work during construction and destruction
    };

    std::unordered_map<ListenerInfo, Tracked> tracked;

public:
    void
    Added(std::vector<ListenerInfo> const& listeners)
    {
        for (std::vector<ListenerInfo>::const_iterator iter = listeners.begin(),
↪endIter = listeners.end();
            iter != endIter;
            ++iter)
        {
            // Lock the tracked object for thread-safe access

            if (iter->IsRemoved())
                return;
            tracked.insert(std::make_pair(*iter, Tracked()));
        }
    }

    void
    Removed(std::vector<ListenerInfo> const& listeners)
    {
        for (std::vector<ListenerInfo>::const_iterator iter = listeners.begin(),
↪endIter = listeners.end();
            iter != endIter;
            ++iter)
        {
            // Lock the tracked object for thread-safe access

            // If we got a corresponding "Added" event before, the Tracked
            // destructor will do some cleanup...
            tracked.erase(*iter);
        }
    }
};
```

### 8.3.4 Architectural Notes

## Ordinary Services

All service hooks are treated as ordinary services. If the CppMicroServices library uses them, their Service References will show that the CppMicroServices bundles are using them, and if a hook is a Service Factory, then the actual instance will be properly created.

The only speciality of the service hooks is that the CppMicroServices library does not use them for the hooks themselves. That is, the Service Event and Service Find Hooks cannot be used to hide the services from the CppMicroServices library.

## Ordering

The hooks are very sensitive to ordering because they interact directly with the service registry. In general, implementers of the hooks must be aware that other bundles can be started before or after the bundle which provides the hooks. To ensure early registration of the hooks, they should be registered within the `BundleActivator::Start()` method of the program executable.

## Multi Threading

All hooks must be thread-safe because the hooks can be called at any time. All hook methods must be re-entrant, as they can be entered at any time and in rare cases in the wrong order. The CppMicroServices library calls all hook methods synchronously, but the calls might be triggered from any user thread interacting with the CppMicroServices API. The CppMicroServices API can be called from any of the hook methods, but implementers must be careful to not hold any lock while calling CppMicroServices methods.

## 8.4 Static Bundles

The normal and most flexible way to add a CppMicroServices bundle to an application is to compile it into a shared library using the `BundleContext::InstallBundles()` function at runtime.

However, bundles can be linked statically to your application or shared library. This makes the deployment of your application less error-prone and in the case of a complete static build, also minimizes its binary size and start-up time. However, in order to add new functionality to your application, you must rebuild and redistribute it.

### 8.4.1 Creating Static Bundles

Static bundles are written just like shared bundles - there are no differences in the usage of the CppMicroServices API or the provided preprocessor macros.

### 8.4.2 Using Static Bundles

Static bundles can be used (imported) in shared or other static libraries, or in the executable itself. For every static bundle you would like to import, you need to add a call to `CPPMICROSERVICES_IMPORT_BUNDLE` or to `CPPMICROSERVICES_INITIALIZE_STATIC_BUNDLE` (if the bundle does not provide an activator) in the source code of the importing library.

---

**Note:** While you can link static bundles to other static bundles, you will still need to import *all* of the static bundles into the final executable to ensure proper initialization.

---

The two main usage scenarios- using a shared or static CppMicroServices library- are explained in the sections below.

## Using a Shared CppMicroServices Library

Building the CppMicroServices library as a shared library allows you to import static bundles into other shared or static bundles, or into the executable.

Listing 8.1: Example code for importing MyStaticBundle1 into another library or executable

```
#include "cppmicroservices/BundleImport.h"

CPPMICROSERVICES_IMPORT_BUNDLE(MyStaticBundle1)
```

## Using a Static CppMicroServices Library

The CppMicroServices library can be built as a static library. In that case, creating shared bundles is not supported. If you create shared bundles that link a static version of the CppMicroServices library, the runtime behavior is undefined.

In this usage scenario, every bundle will be statically built and linked to an executable:

Listing 8.2: Static bundles and CppMicroServices library

```
#include "cppmicroservices/BundleImport.h"

#ifdef US_BUILD_SHARED_LIBS
CPPMICROSERVICES_INITIALIZE_STATIC_BUNDLE(system_bundle)
CPPMICROSERVICES_IMPORT_BUNDLE(MyStaticBundle2)
CPPMICROSERVICES_INITIALIZE_STATIC_BUNDLE(main)
#endif
```

Note that the first `CPPMICROSERVICES_IMPORT_BUNDLE` call imports the static CppMicroServices library. Next, the `MyStaticBundle2` bundle is imported and finally, the executable itself is initialized (this is necessary if the executable itself is a C++ Micro Services bundle).



## CHAPTER 9

---

### Http Service

---

This bundle is based on the Http Service Specification as detailed in the OSGi Compendium. It allows bundle developers to create communication and user interface solutions based on HTTP and web technologies.

For this purpose, the Http Service bundle provides a servlet architecture similar to the Java Servlet API.

**Warning:** This bundle has not reached a stable version yet. Its design and API may change between releases in a backwards incompatible way.





## CHAPTER 10

---

### Web Console

---

This bundle provides a HTML based interface to inspect and manage a C++ Micro Services application using a web browser.

It requires the Http Service bundle to publish a servlet that forwards Http requests to the appropriate Web Console plug-in.

---

**Tip:** After installing and starting the Web Console bundle, go to <http://localhost:8080/us/console> to access the console.

---

**Warning:** This bundle has not reached a stable version yet. Its design and API may change between releases in a backwards incompatible way.

### 10.1 Screenshots

C++ Micro Services			
Bundles			
Services			
Settings			

## Bundles

Id	Name	Version	Status
0	<a href="#">System Bundle (system_bundle)</a>	3.0.0	ACTIVE
1	<a href="#">C++ Micro Services Web Console (usWebConsole)</a>	0.1.0	ACTIVE
2	<a href="#">C++ Micro Services Http Service (usHttpService)</a>	0.1.0	ACTIVE
3	<a href="#">C++ Micro Services Shell Service (usShellService)</a>	0.1.0	ACTIVE

3.0.0
 4
 4

Fig. 10.1: A list of all installed bundles.

C++ Micro Services			
Bundles			
Services			
Settings			

## C++ Micro Services Web Console (usWebConsole)

Back to [Bundles](#)

<a href="#">Manifest</a>	Registered Services	<a href="#">Resources</a>
--------------------------	---------------------	---------------------------

Service ID	Types	Ranking	Scope	Properties
2	[cppmicroservices::HttpServlet]		singleton	▶ { 4 items }
3	[cppmicroservices::HttpServlet]		singleton	▶ { 5 items }
4	[cppmicroservices::HttpServlet]		singleton	▶ { 5 items }
5	[cppmicroservices::HttpServlet]		singleton	▶ { 5 items }

3.0.0
 4
 4

Fig. 10.2: Detailed bundle view.

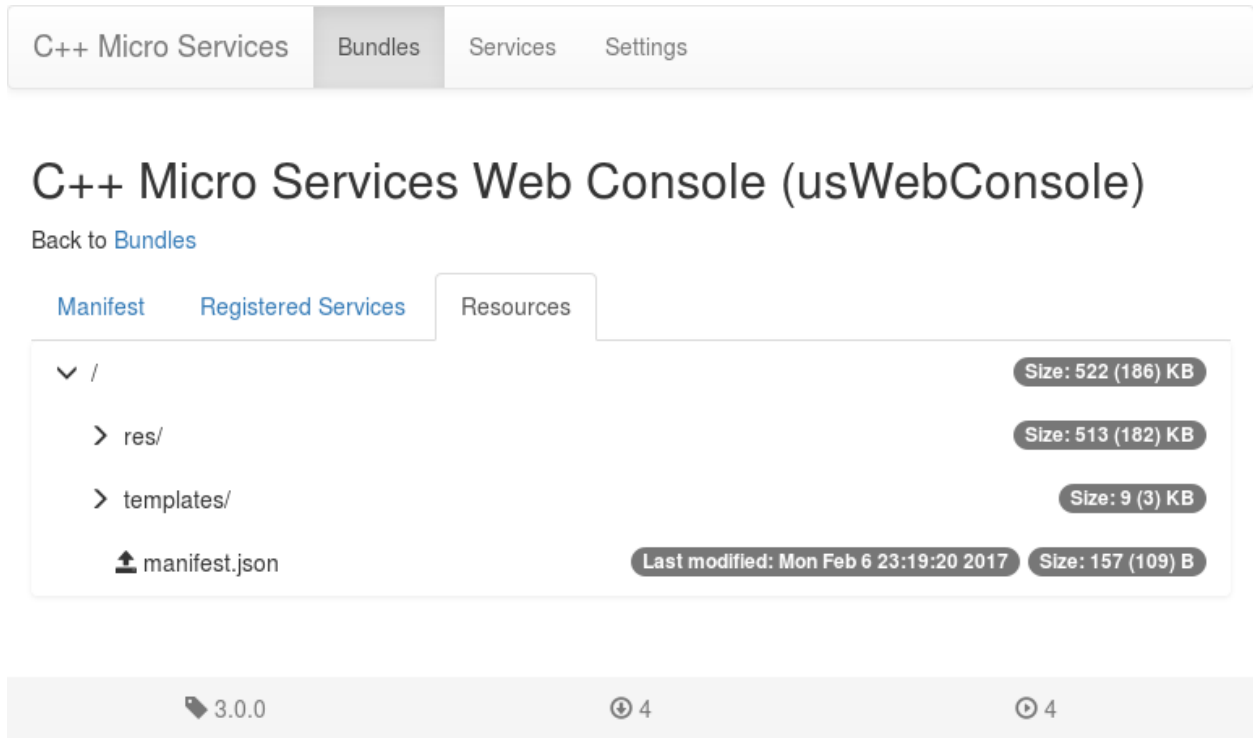


Fig. 10.3: Browse and download bundle resources.

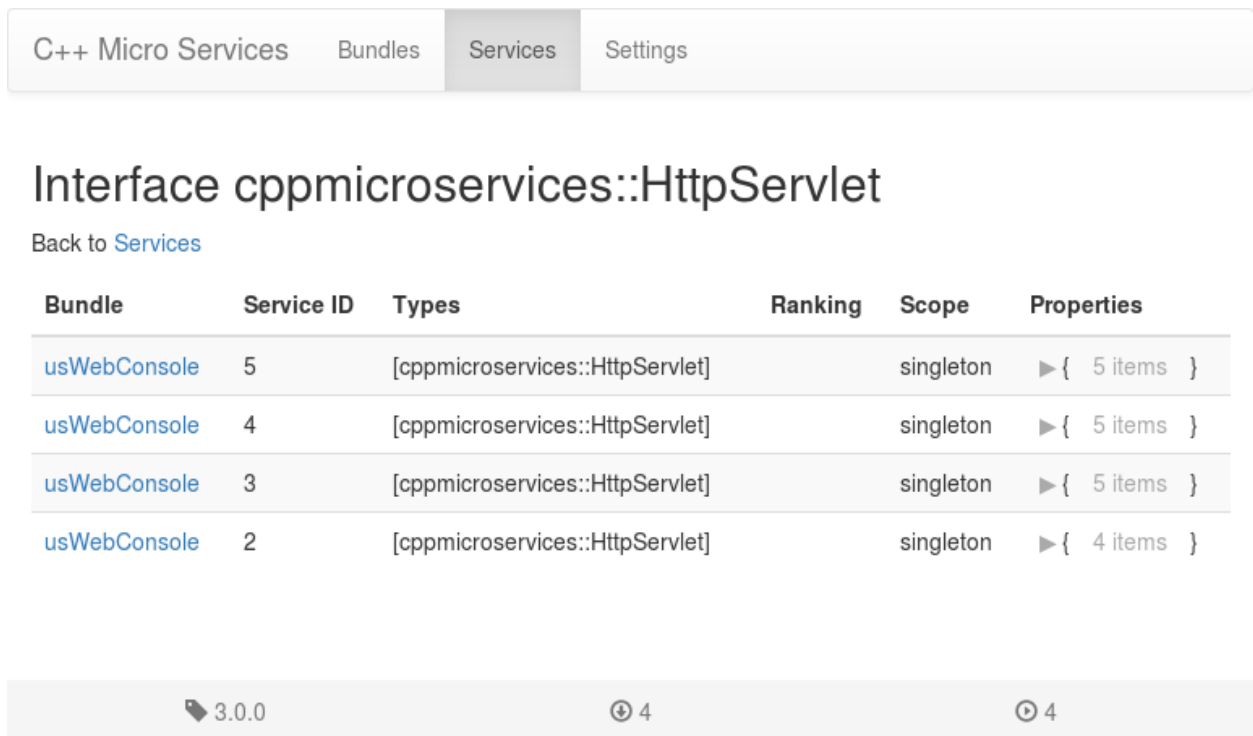


Fig. 10.4: Detailed view on a service interface and registered services implementing it.



# CHAPTER 11

---

## Shell Service

---

The Shell Service provides an interface to interact with and issue commands to a C++ Micro Services framework. See [\*usShell3\*](#) for a client with a textual interface.

**Warning:** This bundle has not reached a stable version yet. Its design and API may change between releases in a backwards incompatible way.



See also *Framework* for a high-level description.

## 12.1 Command-Line Reference

The following options are supported by the **usResourceCompiler3** program:

**--help, -h**

Print usage and exit.

**--verbose, -V**

Run in verbose mode.

**--bundle-name, -n**

The bundle name as specified in the `US_BUNDLE_NAME` compile definition.

**--compression-level, -c**

Compression level used for zip. Value range is 0 to 9. Default value is 6.

**--out-file, -o**

Path to output zip file. If the file exists it will be overwritten. If this option is not provided, a temporary zip file will be created.

**--res-add, -r**

Path to a resource file, relative to the current working directory.

**--zip-add, -z**

Path to a file containing a zip archive to be merged into the output zip file.

**--manifest-add, -m**

Path to the bundle's manifest file. If multiple `--manifest-add` options are specified, all manifest files will be concatenated into one.

**--bundle-file, -b**

Path to the bundle binary. The resources zip file will be appended to this binary.

**Note:**

1. Only options `--res-add`, `--zip-add` and `--manifest-add` can be specified multiple times.
2. If option `--manifest-add` or `--res-add` is specified, option `--bundle-name` must be provided.
3. At-least one of `--bundle-file` or `--out-file` options must be provided.

**Hint:** If you are using CMake, consider using the provided `usFunctionEmbedResources` CMake macro which handles the invocation of the `usResourceCompiler3` executable and sets up the correct file dependencies. Otherwise, you also need to make sure that the set of static bundles linked into a shared bundle or executable is also in the input file list of your `usResourceCompiler3` call for that shared bundle or executable.

Here is a full example creating a bundle and embedding resource data:

```
set(bundle_name "org_me_mybundle")
set(srcs mybundle.cpp)

usFunctionGenerateBundleInit(TARGET mybundle OUT srcs)
usFunctionGetResourceSource(TARGET mybundle OUT srcs)

add_library(mybundle ${srcs})
target_link_libraries(mybundle CppMicroServices)

set_property(TARGET mybundle APPEND PROPERTY COMPILE_DEFINITIONS US_BUNDLE_NAME=${
↪bundle_name})
set_property(TARGET mybundle PROPERTY US_BUNDLE_NAME ${bundle_name})

usFunctionEmbedResources(TARGET mybundle
    FILES hello.txt
)
```

If you are not using CMake, you can run the resource compiler from the command line yourself.

## 12.2 Example usage

Construct a zip blob with contents `mybundle/manifest.json`, merge the contents of zip file `filetomerge.zip` into it and write the resulting blob into `Example.zip`:

```
usResourceCompiler3 --compression-level 9 --verbose --bundle-name mybundle
    --out-file Example.zip --manifest-add manifest.json --zip-add filetomerge.zip
```

Construct a zip blob with contents `mybundle/manifest.json`, merge the contents of zip file `archivetomerge.zip` into it and append the resulting zip blob to `mybundle.dylib`:

```
usResourceCompiler3 -V -n mybundle -b mybundle.dylib -m manifest.json
    -z archivetoembed.zip
```

Append the contents of `archivetoembed.zip` to `mybundle.dll`:

```
usResourceCompiler3.exe -b mybundle.dll -z archivetoembed.zip
```



Construct a zip blob with the contents of `manifest_part1.json` and `auto_generated_manifest.json` concatenated into `mybundle/manifest.json` and embed it into `mybundle.dll`:

```
usResourceCompiler3 -n mybundle -b mybundle.dll -m manifest_part1.json  
-m auto_generated_manifest.json
```



**Warning:** The **usShell13** is experimental and is subject to change in between minor releases.

## 13.1 Command-Line Reference

The following options are supported by the **usShell13** program:

- help, -h**  
Print usage and exit.
- load, -l**  
Load bundle.



CMake support for external projects.

External projects can include the CMake scripts provided by the CppMicroServices library to automatically generate bundle initialization code, import static bundles, and to embed external resources into bundles.

## 14.1 usFunctionAddResources

### **usFunctionAddResources**

Add resources to a library or executable.

```
usFunctionAddResources(TARGET target [BUNDLE_NAME bundle_name]
    [WORKING_DIRECTORY dir] [COMPRESSION_LEVEL level]
    [FILES res1...] [ZIP_ARCHIVES archive1...])
```

This CMake function uses an external command line program to generate a ZIP archive containing data from external resources such as text files or images or other ZIP archives. The created archive file can be appended or linked into the target file using the *usFunctionEmbedResources()* function.

Each bundle can call this function to add resources and make them available at runtime through the Bundle class. Multiple calls to this function append the input files.

In the case of linking static bundles which contain resources to the target bundle, adding the static bundle target name to the ZIP\_ARCHIVES list will merge its resources into the target bundle.

Listing 14.1: Example

```
set(bundle_srcs )
usFunctionAddResources(TARGET mylib
    BUNDLE_NAME org_me_mylib
    FILES config.properties logo.png
)
```

### **One-value keywords**

- **TARGET** (required): The target to which the resource files are added.
- **BUNDLE\_NAME** (required/optional): The bundle name of the target, as specified in the `c_US_BUNDLE_NAME` pre-processor definition of that target. This parameter is optional if a target property with the name `US_BUNDLE_NAME` exists, containing the required bundle name.
- **COMPRESSION\_LEVEL** (optional): The zip compression level (0-9). Defaults to the default zip level. Level 0 disables compression.
- **WORKING\_DIRECTORY** (optional): The root path for all resource files listed after the **FILES** argument. If no or a relative path is given, it is considered relative to the current CMake source directory.

#### Multi-value keywords

- **FILES** (optional): A list of resource files (paths to external files in the file system) relative to the current working directory.
- **ZIP\_ARCHIVES** (optional): A list of zip archives (relative to the current working directory or absolute file paths) whose contents is merged into the target bundle. If a list entry is a valid target name and that target is a static library, its absolute file path is used instead.

See also:

*usFunctionEmbedResources()*

*The Resource System*

## 14.2 usFunctionEmbedResources

### usFunctionEmbedResources

Embed resources in a library or executable.

```
usFunctionEmbedResources(TARGET target [BUNDLE_NAME bundle_name] [APPEND | LINK]
    [WORKING_DIRECTORY dir] [COMPRESSION_LEVEL level]
    [FILES res1...] [ZIP_ARCHIVES archive1...])
```

This CMake function uses an external command line program to generate a ZIP archive containing data from external resources such as text files or images or other ZIP archives. External resources can be added to a bundle using the *usFunctionAddResources()* function or directly using this function using similar parameters. The created archive file is appended or embedded as a binary blob to the target file.

---

**Note:** To set-up correct file dependencies from your bundle target to your resource files, you have to add a special source file to the source list of the target. The source file name can be retrieved by using *usFunctionGetResourceSource()*. This ensures that changed resource files will automatically be re-added to the bundle.

---

There are two different modes for including resources: *APPEND* and *LINK*. In *APPEND* mode, the generated zip file is appended at the end of the target file. In *LINK* mode, the zip file is compiled / linked into the target using platform specific techniques. *LINK* mode is necessary if certain tools make additional assumptions about the object layout of the target file (e.g. codesign on MacOS). *LINK* mode may result in slower bundle initialization and bigger object files. The default mode is *LINK* mode on MacOS and *APPEND* mode on all other platforms.

Listing 14.2: Example

```
usFunctionEmbedResources(TARGET mylib
                        BUNDLE_NAME org_me_mylib
                        FILES config.properties logo.png
                        )
```

#### One-value keywords

- **TARGET** (required): The target to which the resource files are added.
- **BUNDLE\_NAME** (required/optional): The bundle name of the target, as specified in the `US_BUNDLE_NAME` pre-processor definition of that target. This parameter is optional if a target property with the name `US_BUNDLE_NAME` exists, containing the required bundle name.

#### Options

- **APPEND**: Append the resources zip file to the target file.
- **LINK**: Link (embed) the resources zip file if possible.

For the `WORKING_DIRECTORY`, `COMPRESSION_LEVEL`, `FILES`, `ZIP_ARCHIVES` parameters see the documentation of the `usFunctionAddResources` macro which is called with these parameters if set.

See also:

*usFunctionAddResources()*  
*usFunctionGetResourceSource()*  
*The Resource System*

## 14.3 usFunctionGetResourceSource

### usFunctionGetResourceSource

Get a source file name for handling resource dependencies

```
usFunctionGetResourceSource(TARGET target OUT <out_var> [LINK | APPEND])
```

This CMake function retrieves the name of a generated file which has to be added to a bundles source file list to set-up resource file dependencies. This ensures that changed resource files will automatically be re-added to the bundle.

Listing 14.3: Example

```
set(bundle_srcs mylib.cpp)
usFunctionGetResourceSource(TARGET mylib
                           OUT bundle_srcs
                           )
add_library(mylib ${bundle_srcs})
```

#### One-value keywords

- **TARGET** (required): The name of the target to which the resource files are added.
- **OUT** (required): A list variable to which the file name will be appended.

#### Options

- **LINK** (optional): Generate a suitable source file for *LINK* mode.

- APPEND (optional): Generate a suitable source file for *APPEND* mode.

See also:

```
usFunctionAddResources()
usFunctionEmbedResources()
```

## 14.4 usFunctionGenerateBundleInit

### usFunctionGenerateBundleInit

Generate a source file which handles proper initialization of a bundle.

```
usFunctionGenerateBundleInit(TARGET target OUT <out_var>)
```

This CMake function will append the path to a generated source file to the `out_var` variable, which should be compiled into a bundle. The bundles source code must be compiled with the `US_BUNDLE_NAME` pre-processor definition.

Listing 14.4: Example

```
set(bundle_srcs )
usFunctionGenerateBundleInit(TARGET mylib OUT bundle_srcs)
add_library(mylib ${bundle_srcs})
set_property(TARGET ${mylib} APPEND PROPERTY COMPILE_DEFINITIONS US_BUNDLE_
↪NAME=MyBundle)
```

### One-value keywords

- TARGET (required): The name of the target for which the source file is generated.
- OUT (required): A list variable to which the path of the generated source file will be appended.



## 15.1 Main

These classes are the main API to the C++ Micro Services Framework:

### 15.1.1 Bundle

`std::ostream &cppmicroservices::operator<< (std::ostream &os, Bundle const &bundle)`  
Streams a textual representation of `bundle` into the stream `os`.

`std::ostream &cppmicroservices::operator<< (std::ostream &os, Bundle const *bundle)`  
This is the same as calling `os << *bundle`.

`std::ostream &cppmicroservices::operator<< (std::ostream &os, Bundle::State state)`  
Streams a textual representation of the bundle state enumeration.

**class** `cppmicroservices::Bundle`  
`#include <cppmicroservices/Bundle.h>` An installed bundle in the *Framework*.

A `Bundle` object is the access point to define the lifecycle of an installed bundle. Each bundle installed in the `CppMicroServices` environment has an associated `Bundle` object.

A bundle has a unique identity, a `long`, chosen by the *Framework*. This identity does not change during the lifecycle of a bundle. Uninstalling and then reinstalling the bundle creates a new unique identity.

A bundle can be in one of six states:

- `STATE_UNINSTALLED`
- `STATE_INSTALLED`
- `STATE_RESOLVED`
- `STATE_STARTING`
- `STATE_STOPPING`

- STATE\_ACTIVE

Values assigned to these states have no specified ordering; they represent bit values that may be ORed together to determine if a bundle is in one of the valid states.

A bundle should only have active threads of execution when its state is one of STATE\_STARTING, STATE\_ACTIVE, or STATE\_STOPPING. A STATE\_UNINSTALLED bundle can not be set to another state; it is a zombie and can only be reached because references are kept somewhere.

The framework is the only entity that is allowed to create Bundle objects, and these objects are only valid within the *Framework* that created them.

Bundles have a natural ordering such that if two Bundles have the same *bundle id* they are equal. A *Bundle* is less than another *Bundle* if it has a lower *bundle id* and is greater if it has a higher bundle id.

**Remark** This class is thread safe.

Subclassed by *cppmicroservices::Framework*

## Public Types

### enum State

The bundle state.

*Values:*

**STATE\_UNINSTALLED** = 0x00000001

The bundle is uninstalled and may not be used.

The STATE\_UNINSTALLED state is only visible after a bundle is uninstalled; the bundle is in an unusable state but references to the *Bundle* object may still be available and used for introspection.

The value of STATE\_UNINSTALLED is 0x00000001.

**STATE\_INSTALLED** = 0x00000002

The bundle is installed but not yet resolved.

A bundle is in the STATE\_INSTALLED state when it has been installed in the *Framework* but is not or cannot be resolved.

This state is visible if the bundle's code dependencies are not resolved. The *Framework* may attempt to resolve a STATE\_INSTALLED bundle's code dependencies and move the bundle to the STATE\_RESOLVED state.

The value of STATE\_INSTALLED is 0x00000002.

**STATE\_RESOLVED** = 0x00000004

The bundle is resolved and is able to be started.

A bundle is in the STATE\_RESOLVED state when the *Framework* has successfully resolved the bundle's code dependencies. These dependencies include:

- None (this may change in future versions)

Note that the bundle is not active yet. A bundle is put in the STATE\_RESOLVED state before it can be started. The *Framework* may attempt to resolve a bundle at any time.

The value of STATE\_RESOLVED is 0x00000004.

**STATE\_STARTING** = 0x00000008

The bundle is in the process of starting.

A bundle is in the `STATE_STARTING` state when its *Start* method is active. A bundle must be in this state when the bundle's *BundleActivator::Start(BundleContext)* is called. If the *BundleActivator::Start* method completes without exception, then the bundle has successfully started and moves to the `STATE_ACTIVE` state.

If the bundle has a *lazy activation policy*, then the bundle may remain in this state for some time until the activation is triggered.

The value of `STATE_STARTING` is 0x00000008.

**STATE\_STOPPING** = 0x00000010

The bundle is in the process of stopping.

A bundle is in the `STATE_STOPPING` state when its *Stop* method is active. A bundle is in this state when the bundle's *BundleActivator#Stop(BundleContext)* method is called. When the *BundleActivator::Stop* method completes the bundle is stopped and moves to the `STATE_RESOLVED` state.

The value of `STATE_STOPPING` is 0x00000010.

**STATE\_ACTIVE** = 0x00000020

The bundle is now running.

A bundle is in the `STATE_ACTIVE` state when it has been successfully started and activated.

The value of `STATE_ACTIVE` is 0x00000020.

**enum StartOptions**

*Values:*

**START\_TRANSIENT** = 0x00000001

The bundle start operation is transient and the persistent autostart setting of the bundle is not modified.

This bit may be set when calling *Start(uint32\_t)* to notify the framework that the autostart setting of the bundle must not be modified. If this bit is not set, then the autostart setting of the bundle is modified.

See *Start(uint32\_t)*

**Note** This option is reserved for future use and not supported yet.

**START\_ACTIVATION\_POLICY** = 0x00000002

The bundle start operation must activate the bundle according to the bundle's declared *activation policy*.

This bit may be set when calling *Start(uint32\_t)* to notify the framework that the bundle must be activated using the bundle's declared activation policy.

See *Constants::BUNDLE\_ACTIVATIONPOLICY*

See *Start(uint32\_t)*

**Note** This option is reserved for future use and not supported yet.

**enum StopOptions**

*Values:*

**STOP\_TRANSIENT** = 0x00000001

The bundle stop is transient and the persistent autostart setting of the bundle is not modified.

This bit may be set when calling *Stop(uint32\_t)* to notify the framework that the autostart setting of the bundle must not be modified. If this bit is not set, then the autostart setting of the bundle is modified.

See *Stop(uint32\_t)*

**Note** This option is reserved for future use and not supported yet.

**using TimeStamp** = std::chrono::steady\_clock::time\_point

## Public Functions

**Bundle** (*Bundle* const&)

**Bundle** (*Bundle*&&)

*Bundle* &operator= (*Bundle* const&)

*Bundle* &operator= (*Bundle*&&)

**Bundle** ()

Constructs an invalid Bundle object.

Valid bundle objects can only be created by the framework in response to certain calls to a *BundleContext* object. A *BundleContext* object is supplied to a bundle via its *BundleActivator* or as a return value of the *GetBundleContext* () method.

See operator bool() const

**virtual ~Bundle** ()

bool operator== (*Bundle* const &*rhs*) const

Compares this *Bundle* object with the specified bundle.

Valid *Bundle* objects compare equal if and only if they are installed in the same framework instance and their bundle id is equal. Invalid *Bundle* objects are always considered to be equal.

**Return** true if this *Bundle* object is equal to *rhs*, false otherwise.

### Parameters

- *rhs*: The *Bundle* object to compare this object with.

bool operator!= (*Bundle* const &*rhs*) const

Compares this *Bundle* object with the specified bundle for inequality.

**Return** Returns the result of !(\*this == *rhs*).

### Parameters

- *rhs*: The *Bundle* object to compare this object with.

bool operator< (*Bundle* const &*rhs*) const

Compares this *Bundle* with the specified bundle for order.

Bundle objects are ordered first by their framework id and then according to their bundle id. Invalid *Bundle* objects will always compare greater than valid *Bundle* objects.

### Return

### Parameters

- *rhs*: The *Bundle* object to compare this object with.

operator bool () const

Tests this Bundle object for validity.

Invalid *Bundle* objects are created by the default constructor or can be returned by certain framework methods if the bundle has been uninstalled.

**Return** `true` if this `Bundle` object is valid and can safely be used, `false` otherwise.

*Bundle* &**operator=**(std::nullptr\_t)

Releases any resources held or locked by this *Bundle* and renders it invalid.

State **GetState**() **const**

Returns this bundle's current state.

A bundle can be in only one state at any time.

**Return** An element of `STATE_UNINSTALLED`, `STATE_INSTALLED`, `STATE_RESOLVED`, `STATE_STARTING`, `STATE_STOPPING`, `STATE_ACTIVE`.

#### Exceptions

- `std::invalid_argument`: if this bundle is not initialized.

*BundleContext* **GetBundleContext**() **const**

Returns this bundle's *BundleContext*.

The returned *BundleContext* can be used by the caller to act on behalf of this bundle.

If this bundle is not in the `STATE_STARTING`, `STATE_ACTIVE`, or `STATE_STOPPING` states, then this bundle has no valid *BundleContext* and this method will return an invalid *BundleContext* object.

**Return** A valid or invalid *BundleContext* for this bundle.

#### Exceptions

- `std::invalid_argument`: if this bundle is not initialized.

long **GetBundleId**() **const**

Returns this bundle's unique identifier.

This bundle is assigned a unique identifier by the framework when it was installed.

A bundle's unique identifier has the following attributes:

- Is unique.
- Is a `long`.
- Its value is not reused for another bundle, even after a bundle is uninstalled.
- Does not change while a bundle remains installed.
- Does not change when a bundle is re-started.

This method continues to return this bundle's unique identifier while this bundle is in the `STATE_UNINSTALLED` state.

**Return** The unique identifier of this bundle.

#### Exceptions

- `std::invalid_argument`: if this bundle is not initialized.

`std::string GetLocation() const`

Returns this bundle's location.

The location is the full path to the bundle's shared library. This method continues to return this bundle's location while this bundle is in the `STATE_UNINSTALLED` state.

**Return** The string representation of this bundle's location.

**Exceptions**

- `std::invalid_argument`: if this bundle is not initialized.

`void *GetSymbol (void *handle, std::string const &symname) const`

Retrieves the resolved symbol from bundle shared library and returns a function pointer associated with it.

**Return** A function pointer to the desired symbol or `nullptr` if the library is not loaded

**Pre** *Bundle* is already started and active

**Post** The symbol(s) associated with the bundle gets fetched if the library is loaded

**Post** If the symbol does not exist, the API returns `nullptr`

**Parameters**

- `handle`: Handle to the *Bundle*'s shared library
- `symname`: Name of the symbol

**Exceptions**

- `std::runtime_error`: if the bundle is not started or active
- `std::invalid_argument`: if `handle` or `symname` is empty
- `std::invalid_argument`: if this bundle is not initialized

`std::string GetSymbolicName() const`

Returns the symbolic name of this bundle as specified by the `US_BUNDLE_NAME` preprocessor definition.

The bundle symbolic name together with a version must identify a unique bundle.

This method continues to return this bundle's symbolic name while this bundle is in the `STATE_UNINSTALLED` state.

**Return** The symbolic name of this bundle.

**Exceptions**

- `std::invalid_argument`: if this bundle is not initialized.

*BundleVersion* `GetVersion() const`

Returns the version of this bundle as specified in its `manifest.json` file.

If this bundle does not have a specified version then *BundleVersion::EmptyVersion* is returned.

This method continues to return this bundle's version while this bundle is in the `STATE_UNINSTALLED` state.

**Return** The version of this bundle.

**Exceptions**

- `std::invalid_argument`: if this bundle is not initialized.

`std::map<std::string, Any> GetProperties () const`

Returns this bundle's Manifest properties as key/value pairs.

Deprecated since version 3.0: Use `GetHeaders ()` instead.

**See also:**

*Bundle Properties*

**Return** A map containing this bundle's Manifest properties as key/value pairs.

**Exceptions**

- `std::invalid_argument`: if this bundle is not initialized.

*AnyMap* `const &GetHeaders () const`

Returns this bundle's Manifest headers and values.

Manifest header names are case-insensitive. The methods of the returned *AnyMap* object operate on header names in a case-insensitive manner.

If a Manifest header value starts with "%", it is localized according to the default locale. If no localization is found for a header value, the header value without the leading "%" is returned.

This method continues to return Manifest header information while this bundle is in the UNINSTALLED state.

**Note** Localization is not yet supported, hence the leading "%" is always removed.

**Note** The lifetime of the returned reference is bound to the lifetime of this *Bundle* object.

**Return** A map containing this bundle's Manifest headers and values.

**See** *Constants::BUNDLE\_LOCALIZATION*

**Exceptions**

- `std::invalid_argument`: if this bundle is not initialized.

*Any* `GetProperty (std::string const &key) const`

Returns the value of the specified property for this bundle.

If not found, the framework's properties are searched. The method returns an empty *Any* if the property is not found.

Deprecated since version 3.0: Use `GetHeaders ()` or `:any::BundleContext::GetProperty(const std::string&) <cppmicroservices::BundleContext::GetProperty>` instead.

**See also:**

*Bundle Properties*

**Return** The value of the requested property, or an empty string if the property is undefined.

**Parameters**

- `key`: The name of the requested property.

**Exceptions**

- `std::invalid_argument`: if this bundle is not initialized.

`std::vector<std::string> GetPropertyKeys () const`

Returns a list of top-level property keys for this bundle.

Deprecated since version 3.0: Use `GetHeaders ()` instead.

**See also:**

*Bundle Properties*

**Return** A list of available property keys.

**Exceptions**

- `std::invalid_argument`: if this bundle is not initialized.

`std::vector<ServiceReferenceU> GetRegisteredServices () const`

Returns this bundle's *ServiceReference* list for all services it has registered or an empty list if this bundle has no registered services.

The list is valid at the time of the call to this method, however, as the framework is a very dynamic environment, services can be modified or unregistered at anytime.

**Return** A list of *ServiceReference* objects for services this bundle has registered.

**Exceptions**

- `std::logic_error`: If this bundle has been uninstalled, if the *ServiceRegistrationBase* object is invalid, or if the service is unregistered.
- `std::invalid_argument`: if this bundle is not initialized.

`std::vector<ServiceReferenceU> GetServicesInUse () const`

Returns this bundle's *ServiceReference* list for all services it is using or returns an empty list if this bundle is not using any services.

A bundle is considered to be using a service if its use count for that service is greater than zero.

The list is valid at the time of the call to this method, however, as the framework is a very dynamic environment, services can be modified or unregistered at anytime.

**Return** A list of *ServiceReference* objects for all services this bundle is using.

**Exceptions**

- `std::logic_error`: If this bundle has been uninstalled, if the *ServiceRegistrationBase* object is invalid, or if the service is unregistered.
- `std::invalid_argument`: if this bundle is not initialized.

*BundleResource* **GetResource** (std::string const &path) const

Returns the resource at the specified path in this bundle.

The specified path is always relative to the root of this bundle and may begin with '/'. A path value of "/" indicates the root of this bundle.

**Return** A *BundleResource* object for the given path. If the path cannot be found in this bundle an invalid *BundleResource* object is returned.

**Parameters**



- `path`: The path name of the resource.

### Exceptions

- `std::logic_error`: If this bundle has been uninstalled.
- `std::invalid_argument`: if this bundle is not initialized.

`std::vector<BundleResource> FindResources (std::string const &path, std::string const &filePattern, bool recurse) const`

Returns resources in this bundle.

This method is intended to be used to obtain configuration, setup, localization and other information from this bundle.

This method can either return only resources in the specified `path` or recurse into subdirectories returning resources in the directory tree beginning at the specified path.

Examples:

```
auto bundleContext = GetBundleContext();
auto bundle = bundleContext.GetBundle();

// List all XML files in the config directory
std::vector<BundleResource> xmlFiles = bundle.FindResources("config", "*.
↪xml", false);

// Find the resource named vertex_shader.txt starting at the root_
↪directory
std::vector<BundleResource> shaders = bundle.FindResources("", "vertex_
↪shader.txt", true);
```

**Return** A vector of *BundleResource* objects for each matching entry.

### Parameters

- `path`: The path name in which to look. The path is always relative to the root of this bundle and may begin with `'/'`. A path value of `"/"` indicates the root of this bundle.
- `filePattern`: The resource name pattern for selecting entries in the specified path. The pattern is only matched against the last element of the resource path. Substring matching is supported using the wildcard character (`'*'`). If `filePattern` is empty, this is equivalent to `"*"` and matches all resources.
- `recurse`: If `true`, recurse into subdirectories. Otherwise only return resources from the specified path.

### Exceptions

- `std::logic_error`: If this bundle has been uninstalled.
- `std::invalid_argument`: if this bundle is not initialized.

*TimeStamp* `GetLastModified() const`

Returns the time when this bundle was last modified.

A bundle is considered to be modified when it is installed, updated or uninstalled.

**Return** The time when this bundle was last modified.

### Exceptions

- `std::invalid_argument`: if this bundle is not initialized.

void **Start** (uint32\_t *options*)  
 Starts this bundle.

If this bundle's state is `STATE_UNINSTALLED` then a `std::logic_error` is thrown.

The *Framework* sets this bundle's persistent autostart setting to *Started with declared activation* if the `START_ACTIVATION_POLICY` option is set or *Started with eager activation* if not set.

The following steps are executed to start this bundle:

1. If this bundle is in the process of being activated or deactivated, then this method waits for activation or deactivation to complete before continuing. If this does not occur in a reasonable time, a `std::runtime_error` is thrown to indicate this bundle was unable to be started.
2. If this bundle's state is `STATE_ACTIVE`, then this method returns immediately.
3. If the `START_TRANSIENT` option is not set, then set this bundle's autostart setting to *Started with declared activation* if the `START_ACTIVATION_POLICY` option is set or *Started with eager activation* if not set. When the *Framework* is restarted and this bundle's autostart setting is not *Stopped*, this bundle must be automatically started.
4. If this bundle's state is not `STATE_RESOLVED`, an attempt is made to resolve this bundle. If the *Framework* cannot resolve this bundle, a `std::runtime_error` is thrown.
5. If the `START_ACTIVATION_POLICY` option is set and this bundle's declared activation policy is *lazy* then:
  - If this bundle's state is `STATE_STARTING`, then this method returns immediately.
  - This bundle's state is set to `STATE_STARTING`.
  - A bundle event of type `BundleEvent#BUNDLE_LAZY_ACTIVATION` is fired.
  - This method returns immediately and the remaining steps will be followed when this bundle's activation is later triggered.
6. This bundle's state is set to `STATE_STARTING`.
7. A bundle event of type `BundleEvent#BUNDLE_STARTING` is fired.
8. If the bundle is contained in a shared library, the library is loaded and the `BundleActivator#Start(BundleContext)` method of this bundle's `BundleActivator` (if one is specified) is called. If the shared library could not be loaded, or the `BundleActivator` is invalid or throws an exception then:
  - This bundle's state is set to `STATE_STOPPING`.
  - A bundle event of type `BundleEvent#BUNDLE_STOPPING` is fired.
  - Any services registered by this bundle are unregistered.
  - Any services used by this bundle are released.
  - Any listeners registered by this bundle are removed.
  - This bundle's state is set to `STATE_RESOLVED`.
  - A bundle event of type `BundleEvent#BUNDLE_STOPPED` is fired.
  - A `std::runtime_error` exception is then thrown.
9. If this bundle's state is `STATE_UNINSTALLED`, because this bundle was uninstalled while the `BundleActivator::Start` method was running, a `std::logic_error` is thrown.

10. This bundle's state is set to `STATE_ACTIVE`.
11. A bundle event of type `BundleEvent#BUNDLE_STARTED` is fired.

#### Preconditions

1. `GetState()` in { `STATE_INSTALLED`, `STATE_RESOLVED` } or { `STATE_INSTALLED`, `STATE_RESOLVED`, `STATE_STARTING` } if this bundle has a lazy activation policy.

#### Postconditions, no exceptions thrown

1. `Bundle` autostart setting is modified unless the `START_TRANSIENT` option was set.
2. `GetState()` in { `STATE_ACTIVE` } unless the lazy activation policy was used.
3. `BundleActivator::Start()` has been called and did not throw an exception unless the lazy activation policy was used.

#### Postconditions, when an exception is thrown

1. Depending on when the exception occurred, the bundle autostart setting is modified unless the `START_TRANSIENT` option was set.
2. `GetState()` not in { `STATE_STARTING`, `STATE_ACTIVE` }.

#### Parameters

- `options`: The options for starting this bundle. See `START_TRANSIENT` and `START_ACTIVATION_POLICY`. The *Framework* ignores unrecognized options.

#### Exceptions

- `std::runtime_error`: If this bundle could not be started.
- `std::logic_error`: If this bundle has been uninstalled or this bundle tries to change its own state.
- `std::invalid_argument`: if this bundle is not initialized.
- `cppmicroservices::SecurityException`: if the bundle's shared library to be loaded failed a security check.

void **Start** ()

Starts this bundle with no options.

This method performs the same function as calling `Start(0)`.

See `Start(uint32_t)`

#### Exceptions

- `std::runtime_error`: If this bundle could not be started.
- `std::logic_error`: If this bundle has been uninstalled or this bundle tries to change its own state.
- `std::invalid_argument`: if this bundle is not initialized.
- `cppmicroservices::SecurityException`: if the bundle's shared library to be loaded failed a security check.

void **Stop** (uint32\_t *options*)

Stops this bundle.

The following steps are executed when stopping a bundle:

1. If this bundle's state is `STATE_UNINSTALLED` then a `std::logic_error` is thrown.
2. If this bundle is in the process of being activated or deactivated then this method waits for activation or deactivation to complete before continuing. If this does not occur in a reasonable time, a `std::runtime_error` is thrown to indicate this bundle was unable to be stopped.
3. If the *STOP\_TRANSIENT* option is not set then set this bundle's persistent autostart setting to *Stopped*. When the *Framework* is restarted and this bundle's autostart setting is *Stopped*, this bundle will not be automatically started.
4. If this bundle's state is not `STATE_STARTING` or `STATE_ACTIVE` then this method returns immediately.
5. This bundle's state is set to `STATE_STOPPING`.
6. A bundle event of type *BundleEvent#BUNDLE\_STOPPING* is fired.
7. If this bundle's state was `STATE_ACTIVE` prior to setting the state to `STATE_STOPPING`, the *BundleActivator#Stop(BundleContext)* method of this bundle's *BundleActivator*, if one is specified, is called. If that method throws an exception, this method continues to stop this bundle and a `std::runtime_error` is thrown after completion of the remaining steps.
8. Any services registered by this bundle are unregistered.
9. Any services used by this bundle are released.
10. Any listeners registered by this bundle are removed.
11. If this bundle's state is `STATE_UNINSTALLED`, because this bundle was uninstalled while the *BundleActivator::Stop* method was running, a `std::runtime_error` is thrown.
12. This bundle's state is set to `STATE_RESOLVED`.
13. A bundle event of type *BundleEvent#BUNDLE\_STOPPED* is fired.

#### Preconditions

1. *GetState()* in { `STATE_ACTIVE` }.

#### Postconditions, no exceptions thrown

1. *Bundle* autostart setting is modified unless the *STOP\_TRANSIENT* option was set.
2. *GetState()* not in { `STATE_ACTIVE`, `STATE_STOPPING` }.
3. *BundleActivator::Stop* has been called and did not throw an exception.

#### Postconditions, when an exception is thrown

1. *Bundle* autostart setting is modified unless the *STOP\_TRANSIENT* option was set.

#### Parameters

- *options*: The options for stopping this bundle. See *STOP\_TRANSIENT*. The *Framework* ignores unrecognized options.

#### Exceptions

- `std::runtime_error`: If the bundle failed to stop.
- `std::logic_error`: If this bundle has been uninstalled or this bundle tries to change its own state.
- `std::invalid_argument`: if this bundle is not initialized.

void **Stop** ()

Stops this bundle with no options.

This method performs the same function as calling `Stop(0)`.

See [Stop\(uint32\\_t\)](#)

#### Exceptions

- `std::runtime_error`: If the bundle failed to stop.
- `std::logic_error`: If this bundle has been uninstalled or this bundle tries to change its own state.

void **Uninstall** ()

Uninstalls this bundle.

This method causes the [Framework](#) to notify other bundles that this bundle is being uninstalled, and then puts this bundle into the `STATE_UNINSTALLED` state. The [Framework](#) removes any resources related to this bundle that it is able to remove.

The following steps are executed to uninstall a bundle:

1. If this bundle's state is `STATE_UNINSTALLED`, then a `std::logic_error` is thrown.
2. If this bundle's state is `STATE_ACTIVE`, `STATE_STARTING` or `STATE_STOPPING`, this bundle is stopped as described in the [Bundle::Stop](#) method. If [Bundle::Stop](#) throws an exception, a [Framework](#) event of type [FrameworkEvent#FRAMEWORK\\_ERROR](#) is fired containing the exception.
3. This bundle's state is set to `STATE_UNINSTALLED`.
4. A bundle event of type [BundleEvent#BUNDLE\\_UNINSTALLED](#) is fired.
5. This bundle and any persistent storage area provided for this bundle by the [Framework](#) are removed.

#### Preconditions

- [GetState\(\)](#) not in { `STATE_UNINSTALLED` }.

#### Postconditions, no exceptions thrown

- [GetState\(\)](#) in { `STATE_UNINSTALLED` }.
- This bundle has been uninstalled.

#### Postconditions, when an exception is thrown

- [GetState\(\)](#) not in { `STATE_UNINSTALLED` }.
- This [Bundle](#) has not been uninstalled.

See [Stop\(\)](#)

#### Exceptions

- `std::runtime_error`: If the uninstall failed. This can occur if another thread is attempting to change this bundle's state and does not complete in a timely manner.
- `std::logic_error`: If this bundle has been uninstalled or this bundle tries to change its own state.
- `std::invalid_argument`: if this bundle is not initialized.

## Protected Functions

**Bundle** (std::shared\_ptr<BundlePrivate> const &d)

## Protected Attributes

std::shared\_ptr<BundlePrivate> **d**

std::shared\_ptr<CoreBundleContext> **c**

## Friends

**friend gr\_bundle::BundleRegistry**

Bundle **MakeBundle** (std::shared\_ptr<BundlePrivate> const&)

## 15.1.2 BundleActivator

**struct** cppmicroservices::BundleActivator

Customizes the starting and stopping of a CppMicroServices bundle.

BundleActivator is an interface that can be implemented by CppMicroServices bundles. The CppMicroServices library can create instances of a bundle's BundleActivator as required. If an instance's `BundleActivator::Start` method executes successfully, it is guaranteed that the same instance's `BundleActivator::Stop` method will be called when the bundle is to be stopped. The CppMicroServices library does not concurrently call a BundleActivator object.

BundleActivator is an abstract class interface whose implementations must be exported via a special macro. Implementations are usually declared and defined directly in .cpp files.

```
class MyActivator : public BundleActivator
{
public:
    void
    Start(BundleContext /*context*/)
    { /* register stuff */
    }

    void
    Stop(BundleContext /*context*/)
    { /* cleanup */
    }
};

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(MyActivator)
```

The class implementing the BundleActivator interface must have a public default constructor so that a BundleActivator object can be created by the CppMicroServices library.

---

**Note:** A bundle activator needs to be *exported* by using the `CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR` macro. The bundle *manifest.json* resource also needs to contain a

```
"bundle.activator" : true
```

element.

---

## Public Functions

**virtual ~BundleActivator()**

**virtual void Start** (*BundleContext* context) = 0

Called when this bundle is started.

This method can be used to register services or to allocate any resources that this bundle may need globally (during the whole bundle lifetime).

This method must complete and return to its caller in a timely manner.

### Parameters

- context: The execution context of the bundle being started.

### Exceptions

- `std::exception`: If this method throws an exception, this bundle is marked as stopped and the framework will remove this bundle's listeners, unregister all services registered by this bundle, and release all services used by this bundle.

**virtual void Stop** (*BundleContext* context) = 0

Called when this bundle is stopped.

In general, this method should undo the work that the `BundleActivator::Start` method started. There should be no active threads that were started by this bundle when this method returns.

This method must complete and return to its caller in a timely manner.

### Parameters

- context: The execution context of the bundle being stopped.

### Exceptions

- `std::exception`: If this method throws an exception, the bundle is still marked as stopped, and the framework will remove the bundle's listeners, unregister all services registered by the bundle, and release all services used by the bundle.

## 15.1.3 BundleContext

**class** cppmicroservices::**BundleContext**

A bundle's execution context within the framework.

The context is used to grant access to other methods so that this bundle can interact with the framework.

*BundleContext* methods allow a bundle to:

- Install other bundles.
- Subscribe to events published by the framework.
- Register service objects with the framework service registry.

- Retrieve *ServiceReferences* from the framework service registry.
- Get and release service objects for a referenced service.
- Get the list of bundles installed in the framework.
- Get the *Bundle* object for a bundle.

A *BundleContext* object will be created and provided to the bundle associated with this context when it is started using the *BundleActivator::Start* method. The same *BundleContext* object will be passed to the bundle associated with this context when it is stopped using the *BundleActivator::Stop* method. A *BundleContext* object is generally for the private use of its associated bundle and is not meant to be shared with other bundles in the bundle environment.

The *Bundle* object associated with a *BundleContext* object is called the *context bundle*.

The *BundleContext* object is only valid during the execution of its context bundle; that is, during the period when the context bundle is started. If the *BundleContext* object is used subsequently, a `std::runtime_error` is thrown. The *BundleContext* object is never reused after its context bundle is stopped.

The framework is the only entity that can create *BundleContext* objects.

**Remark** This class is thread safe.

## Public Functions

### **BundleContext ()**

Constructs an invalid BundleContext object.

Valid bundle context objects can only be created by the framework and are supplied to a bundle via its *BundleActivator* or as a return value of the *GetBundleContext ()* method.

**See** operator bool() const

### bool **operator==** (*BundleContext* const &rhs) const

Compares this *BundleContext* object with the specified bundle context.

Valid *BundleContext* objects are equal if and only if they represent the same context. Invalid *BundleContext* objects are always considered to be equal.

**Return** true if this *BundleContext* object is equal to rhs, false otherwise.

#### **Parameters**

- rhs: The *BundleContext* object to compare this object with.

### bool **operator!=** (*BundleContext* const &rhs) const

Compares this *BundleContext* object with the specified bundle context for inequality.

**Return** Returns the result of `!(*this == rhs)`.

#### **Parameters**

- rhs: The *BundleContext* object to compare this object with.



**bool operator< (*BundleContext* const &*rhs*) const**

Compares this *BundleContext* with the specified bundle context for order.

How valid *BundleContext* objects are ordered is an implementation detail and must not be relied on. Invalid *BundleContext* objects will always compare greater than valid *BundleContext* objects.

**Return** `true` if this object is ordered before `rhs`, `false` otherwise.

**Parameters**

- `rhs`: The *BundleContext* object to compare this object with.

**operator bool () const**

Tests this *BundleContext* object for validity.

Invalid *BundleContext* objects are created by the default constructor or can be returned by certain framework methods if the context bundle has been uninstalled.

A *BundleContext* object can become invalid by assigning a `nullptr` to it or if the context bundle is stopped.

**Return** `true` if this *BundleContext* object is valid and can safely be used, `false` otherwise.

***BundleContext* &operator= (std::nullptr\_t)**

Releases any resources held or locked by this *BundleContext* and renders it invalid.

***Any* GetProperty (std::string const &*key*) const**

Returns the value of the specified property.

If the key is not found in the *Framework* properties, the method returns an empty *Any*.

**Return** The value of the requested property, or an empty *Any* if the property is undefined.

**Parameters**

- `key`: The name of the requested property.

**Exceptions**

- `std::runtime_error`: If this *BundleContext* is no longer valid.

***AnyMap* GetProperties () const**

Returns all known properties.

**Return** A map of all framework properties.

**Exceptions**

- `std::runtime_error`: If this *BundleContext* is no longer valid.

***Bundle* GetBundle () const**

Returns the *Bundle* object associated with this *BundleContext*.

This bundle is called the context bundle.

**Return** The *Bundle* object associated with this *BundleContext*.

**Exceptions**

- `std::runtime_error`: If this *BundleContext* is no longer valid.

*Bundle* **GetBundle** (long *id*) **const**

Returns the bundle with the specified identifier.

**Return** A *Bundle* object or `nullptr` if the identifier does not match any previously installed bundle.

**Parameters**

- *id*: The identifier of the bundle to retrieve.

**Exceptions**

- `std::logic_error`: If the framework instance is not active.
- `std::runtime_error`: If this *BundleContext* is no longer valid.

`std::vector<Bundle>` **GetBundles** (std::string **const** &*location*) **const**

Get the bundles with the specified bundle location.

**Return** The requested {*Bundle*}s or an empty list.

**Parameters**

- *location*: The location of the bundles to get.

**Exceptions**

- `std::logic_error`: If the framework instance is not active.
- `std::runtime_error`: If the *BundleContext* is no longer valid.

`std::vector<Bundle>` **GetBundles** () **const**

Returns a list of all known bundles.

This method returns a list of all bundles installed in the bundle environment at the time of the call to this method. This list will also contain bundles which might already have been stopped.

**Return** A `std::vector` of *Bundle* objects which will hold one object per known bundle.

**Exceptions**

- `std::runtime_error`: If the *BundleContext* is no longer valid.

ServiceRegistrationU **RegisterService** (InterfaceMapConstPtr **const** &*service*, ServiceProperties **const** &*properties* = ServiceProperties ())

Registers the specified service object with the specified properties under the specified class names into the framework.

A *ServiceRegistration* object is returned. The *ServiceRegistration* object is for the private use of the bundle registering the service and should not be shared with other bundles. The registering bundle is defined to be the context bundle. Other bundles can locate the service by using either the *GetServiceReferences* or *GetServiceReference* method.

A bundle can register a service object that implements the *ServiceFactory* or *PrototypeServiceFactory* interface to have more flexibility in providing service objects to other bundles.

The following steps are taken when registering a service:

1. The framework adds the following service properties to the service properties from the specified *ServiceProperties* (which may be omitted): A property named *Constants::SERVICE\_ID* identifying the registration number of the service A property named *Constants::OBJECTCLASS* containing all the specified classes. A property named *Constants::SERVICE\_SCOPE* identifying the scope of the service. Properties with these names in the specified *ServiceProperties* will be ignored.

2. The service is added to the framework service registry and may now be used by other bundles.
3. A service event of type *ServiceEvent::SERVICE\_REGISTERED* is fired.
4. A *ServiceRegistration* object for this registration is returned.

**Note** This is a low-level method and should normally not be used directly. Use one of the templated *RegisterService* methods instead.

**Return** A *ServiceRegistration* object for use by the bundle registering the service to update the service's properties or to unregister the service.

**See** *ServiceRegistration*

**See** *ServiceFactory*

**See** *PrototypeServiceFactory*

#### Parameters

- *service*: A *shared\_ptr* to a map of interface identifiers to service objects.
- *properties*: The properties for this service. The keys in the properties object must all be *std::string* objects. See *Constants* for a list of standard service property keys. Changes should not be made to this object after calling this method. To update the service's properties the *ServiceRegistration::SetProperties* method must be called. The set of properties may be omitted if the service has no properties.

#### Exceptions

- *std::runtime\_error*: If this *BundleContext* is no longer valid, or if there are case variants of the same key in the supplied properties map.
- *std::invalid\_argument*: If the *InterfaceMap* is empty, or if a service is registered as a null class.

**template** <class I1, class... *Interfaces*, class *Impl*>

*ServiceRegistration*<I1, *Interfaces*...> **RegisterService** (*std::shared\_ptr*<*Impl*> **const** &*impl*, *ServiceProperties* **const** &*properties* = *ServiceProperties* ())

Registers the specified service object with the specified properties using the specified interfaces types with the framework.

This method is provided as a convenience when registering a service under two interface classes whose type is available to the caller. It is otherwise identical to *RegisterService*(*const InterfaceMap*&, *const ServiceProperties*&) but should be preferred since it avoids errors in the string literal identifying the class name or interface identifier.

Example usage:

```
class MyService2
    : public InterfaceA
    , public InterfaceB
{
};
```

```
std::shared_ptr<MyService2> myService = std::make_shared<MyService2>
↪ ();
context.RegisterService<InterfaceA, InterfaceB>(myService);
```

**Return** A *ServiceRegistration* object for use by the bundle registering the service to update the service's properties or to unregister the service.

See `RegisterService(const InterfaceMap&, const ServiceProperties&)`

### Template Parameters

- `I1`: The first interface type under which the service can be located.
- `Interfaces`: Additional interface types under which the service can be located.

### Parameters

- `impl`: A `shared_ptr` to the service object
- `properties`: The properties for this service.

### Exceptions

- `std::logic_error`: If this *BundleContext* is no longer valid.
- *ServiceException*: If the service type `S` is invalid or the `service` object is `nullptr`.

**template <class I1, class... Interfaces>**

*ServiceRegistration*<I1, Interfaces...> **RegisterService** (std::shared\_ptr<*ServiceFactory*> **const** &factory, ServiceProperties **const** &properties = ServiceProperties ())

Registers the specified service factory as a service with the specified properties using the specified template argument as service interface type with the framework.

This method is provided as a convenience when `factory` will only be registered under a single class name whose type is available to the caller. It is otherwise identical to `RegisterService(const InterfaceMap&, const ServiceProperties&)` but should be preferred since it avoids errors in the string literal identifying the class name or interface identifier.

Example usage:

```
class MyService2
    : public InterfaceA
    , public InterfaceB
{
};
```

```
class MyServiceFactory : public ServiceFactory
{
    virtual InterfaceMapConstPtr
    GetService(Bundle const& /*bundle*/, ServiceRegistrationBase_
↳const& /*registration*/)
    {
        return MakeInterfaceMap<InterfaceA, InterfaceB>(std::make_
↳shared<MyService2>());
    }

    virtual void
    UngetService(Bundle const& /*bundle*/,
                  ServiceRegistrationBase const& /*registration*/,
                  InterfaceMapConstPtr const& /*service*/)
    {
    }
};

std::shared_ptr<MyServiceFactory> myServiceFactory = std::make_shared
↳<MyServiceFactory>();
context.RegisterService<InterfaceA, InterfaceB>
↳(ToFactory(myServiceFactory));
```

**Return** A *ServiceRegistration* object for use by the bundle registering the service to update the service's properties or to unregister the service.

**See** `RegisterService(const InterfaceMap&, const ServiceProperties&)`

#### Template Parameters

- `I1`: The first interface type under which the service can be located.
- `Interfaces`: Additional interface types under which the service can be located.

#### Parameters

- `factory`: A `shared_ptr` to the *ServiceFactory* object.
- `properties`: The properties for this service.

#### Exceptions

- `std::logic_error`: If this *BundleContext* is no longer valid.
- *ServiceException*: If the service type `S` is invalid or the service factory object is `nullptr`.

`std::vector<ServiceReferenceU> GetServiceReferences (std::string const &clazz, std::string const &filter = std::string())`

Returns a list of *ServiceReference* objects.

The returned list contains services that were registered under the specified class and match the specified filter expression.

The list is valid at the time of the call to this method. However, since the framework is a very dynamic environment, services can be modified or unregistered at any time.

The specified `filter` expression is used to select the registered services whose service properties contain keys and values that satisfy the filter expression. See *LDAPFilter* for a description of the filter syntax. If the specified `filter` is empty, all registered services are considered to match the filter. If the specified `filter` expression cannot be parsed, an `std::invalid_argument` will be thrown with a human-readable message where the filter became unparsable.

The result is a list of *ServiceReference* objects for all services that meet all of the following conditions:

- If the specified class name, `clazz`, is not empty, the service must have been registered with the specified class name. The complete list of class names with which a service was registered is available from the service's *objectClass* property.
- If the specified `filter` is not empty, the filter expression must match the service.

**Return** A list of *ServiceReference* objects or an empty list if no services are registered that satisfy the search.

#### Parameters

- `clazz`: The class name with which the service was registered or an empty string for all services.
- `filter`: The filter expression or empty for all services.

#### Exceptions

- `std::invalid_argument`: If the specified `filter` contains an invalid filter expression that cannot be parsed.
- `std::runtime_error`: If this *BundleContext* is no longer valid.

- `std::logic_error`: If the *ServiceRegistrationBase* object is invalid, or if the service is un-registered.

**template <class S>**

`std::vector<ServiceReference<S>> GetServiceReferences (std::string const &filter = std::string())`

Returns a list of *ServiceReference* objects.

The returned list contains services that were registered under the interface id of the template argument *S* and match the specified filter expression.

This method is identical to *GetServiceReferences(const std::string&, const std::string&)* except that the class name for the service object is automatically deduced from the template argument.

**Return** A list of *ServiceReference* objects or an empty list if no services are registered which satisfy the search.

**See** *GetServiceReferences(const std::string&, const std::string&)*

#### Template Parameters

- *S*: The type under which the requested service objects must have been registered.

#### Parameters

- *filter*: The filter expression or empty for all services.

#### Exceptions

- `std::invalid_argument`: If the specified *filter* contains an invalid filter expression that cannot be parsed.
- `std::runtime_error`: If this *BundleContext* is no longer valid.
- *ServiceException*: If the service interface id of *S* is empty, see Service Interface.

*ServiceReferenceU* **GetServiceReference** (std::string const &clazz)

Returns a *ServiceReference* object for a service that implements and was registered under the specified class.

The returned *ServiceReference* object is valid at the time of the call to this method. However as the Micro Services framework is a very dynamic environment, services can be modified or unregistered at any time.

This method is the same as calling *BundleContext::GetServiceReferences(const std::string&, const std::string&)* with an empty filter expression. It is provided as a convenience for when the caller is interested in any service that implements the specified class.

If multiple such services exist, the service with the highest ranking (as specified in its *Constants::SERVICE\_RANKING* property) is returned.

If there is a tie in ranking, the service with the lowest service ID (as specified in its *Constants::SERVICE\_ID* property); that is, the service that was registered first is returned.

**Return** A *ServiceReference* object, or an invalid *ServiceReference* if no services are registered which implement the named class.

**See** *GetServiceReferences(const std::string&, const std::string&)*

#### Parameters

- *clazz*: The class name with which the service was registered.

#### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.

**template <class S>**

*ServiceReference*<S> **GetServiceReference** ()

Returns a *ServiceReference* object for a service that implements and was registered under the specified template class argument.

This method is identical to *GetServiceReference(const std::string&)* except that the class name for the service object is automatically deduced from the template argument.

**Return** A *ServiceReference* object, or an invalid *ServiceReference* if no services are registered which implement the type S.

**See** *GetServiceReference(const std::string&)*

**See** *GetServiceReferences(const std::string&)*

#### Template Parameters

- S: The type under which the requested service must have been registered.

#### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.
- *ServiceException*: If the service interface id of S is empty, see Service Interface.

`std::shared_ptr<void>` **GetService** (*ServiceReferenceBase* const &reference)

Returns the service object referenced by the specified *ServiceReferenceBase* object.

A bundle's use of a service is tracked by the bundle's use count of that service. Each call to *GetService(const ServiceReference<S>&)* increments the context bundle's use count by one. The deleter function of the returned `shared_ptr` object is responsible for decrementing the context bundle's use count.

When a bundle's use count for a service drops to zero, the bundle should no longer use that service.

This method will always return an empty object when the service associated with this `reference` has been unregistered.

The *ServiceObjects* object must be used to obtain multiple service objects for services with prototype scope. For services with singleton or bundle scope, the *ServiceObjects::GetService()* method behaves the same as the *GetService(const ServiceReference<S>&)* method. That is, only one, use-counted service object is available from the *ServiceObjects* object.

The following steps are taken to get the service object:

1. If the service has been unregistered, an empty object is returned.
2. The context bundle's use count for this service is incremented by one.
3. If the context bundle's use count for the service is currently one and the service was registered with an object implementing the *ServiceFactory* interface, the *ServiceFactory::GetService* method is called to create a service object for the context bundle. This service object is cached by the framework. While the context bundle's use count for the service is greater than zero, subsequent calls to get the services's service object for the context bundle will return the cached service object. If the *ServiceFactory* object throws an exception, empty object is returned and a warning is logged.
4. A `shared_ptr` to the service object is returned.

**Return** A `shared_ptr` to the service object associated with `reference`. An empty `shared_ptr` is returned if the service is not registered or the *ServiceFactory* threw an exception

**See** *ServiceFactory*

See *ServiceObjects*

#### Parameters

- `reference`: A reference to the service.

#### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.
- `std::invalid_argument`: If the specified *ServiceReferenceBase* is invalid (default constructed).
- `cppmicroservices::SecurityException`: if retrieving a service caused a bundle's shared library to be loaded and the bundle failed a security check.

InterfaceMapConstPtr **GetService** (*ServiceReferenceU* const &reference)

**template** <class S>

`std::shared_ptr<S>` **GetService** (*ServiceReference<S>* const &reference)

Returns the service object referenced by the specified *ServiceReference* object.

This is a convenience method which is identical to void\* *GetService(const ServiceReferenceBase&)* except that it casts the service object to the supplied template argument type

**Return** A `shared_ptr` to the service object associated with `reference`. An empty object is returned if the service is not registered, the *ServiceFactory* threw an exception or the service could not be cast to the desired type.

See *GetService(const ServiceReferenceBase&)*

See *ServiceFactory*

#### Template Parameters

- `S`: The type the service object will be cast to.

#### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.
- `std::invalid_argument`: If the specified *ServiceReference* is invalid (default constructed).
- `cppmicroservices::SecurityException`: if retrieving a service caused a bundle's shared library to be loaded and the bundle failed a security check.

**template** <class S>

*ServiceObjects<S>* **GetServiceObjects** (*ServiceReference<S>* const &reference)

Returns the *ServiceObjects* object for the service referenced by the specified *ServiceReference* object.

The *ServiceObjects* object can be used to obtain multiple service objects for services with prototype scope. For services with singleton or bundle scope, the *ServiceObjects::GetService()* method behaves the same as the *GetService(const ServiceReference<S>&)* method. That is, only one, use-counted service object is available from the *ServiceObjects* object.

**Return** A *ServiceObjects* object for the service associated with the specified reference or an invalid instance if the service is not registered.

See *PrototypeServiceFactory*

#### Template Parameters

- `S`: Type of Service.



### Parameters

- `reference`: A reference to the service.

### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.
- `std::invalid_argument`: If the specified *ServiceReference* is invalid (default constructed or the service has been unregistered)
- `cppmicroservices::SecurityException`: if retrieving a service caused a bundle's shared library to be loaded and the bundle failed a security check.

`ListenerToken AddServiceListener (ServiceListener const &listener, std::string const &filter = std::string())`

Adds the specified `listener` with the specified `filter` to the context bundle's list of listeners.

See *LDAPFilter* for a description of the filter syntax. Listeners are notified when a service has a lifecycle state change.

The framework takes care of removing all listeners registered by this context bundle's classes after the bundle is stopped.

The listener is called if the filter criteria is met. To filter based upon the class of the service, the filter should reference the *Constants::OBJECTCLASS* property. If `filter` is empty, all services are considered to match the filter.

When using a filter, it is possible that the *ServiceEvents* for the complete lifecycle of a service will not be delivered to the listener. For example, if the filter only matches when the property `example_property` has the value 1, the listener will not be called if the service is registered with the property `example_property` not set to the value 1. Subsequently, when the service is modified setting property `example_property` to the value 1, the filter will match and the listener will be called with a *ServiceEvent* of type `SERVICE_MODIFIED`. Thus, the listener will not be called with a *ServiceEvent* of type `SERVICE_REGISTERED`.

**Return** a `ListenerToken` object which can be used to remove the `listener` from the list of registered listeners.

See *ServiceEvent*

See *ServiceListener*

See *RemoveServiceListener()*

### Parameters

- `listener`: *Any* callable object.
- `filter`: The filter criteria.

### Exceptions

- `std::invalid_argument`: If `filter` contains an invalid filter string that cannot be parsed.
- `std::runtime_error`: If this *BundleContext* is no longer valid.

`void RemoveServiceListener (ServiceListener const &listener)`

Removes the specified `listener` from the context bundle's list of listeners.

If the `listener` is not contained in this context bundle's list of listeners, this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use *RemoveListener()* instead.

See [AddServiceListener\(\)](#)

#### Parameters

- `listener`: The callable object to remove.

#### Exceptions

- `std::runtime_error`: If this [BundleContext](#) is no longer valid.

ListenerToken **AddBundleListener** (BundleListener **const** &*listener*)

Adds the specified `listener` to the context bundle's list of listeners.

Listeners are notified when a bundle has a lifecycle state change.

**Return** a ListenerToken object which can be used to remove the `listener` from the list of registered listeners.

See [BundleEvent](#)

See [BundleListener](#)

#### Parameters

- `listener`: *Any* callable object.

#### Exceptions

- `std::runtime_error`: If this [BundleContext](#) is no longer valid.

void **RemoveBundleListener** (BundleListener **const** &*listener*)

Removes the specified `listener` from the context bundle's list of listeners.

If the `listener` is not contained in this context bundle's list of listeners, this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use [RemoveListener\(\)](#) instead.

See [AddBundleListener\(\)](#)

See [BundleListener](#)

#### Parameters

- `listener`: The callable object to remove.

#### Exceptions

- `std::runtime_error`: If this [BundleContext](#) is no longer valid.

ListenerToken **AddFrameworkListener** (FrameworkListener **const** &*listener*)

Adds the specified `listener` to the context bundle's list of framework listeners.

Listeners are notified of framework events.

**Return** a ListenerToken object which can be used to remove the `listener` from the list of registered listeners.

See [FrameworkEvent](#)

See [FrameworkListener](#)

#### Parameters

- `listener`: *Any* callable object.

### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.

void **RemoveFrameworkListener** (FrameworkListener **const** &listener)

Removes the specified `listener` from the context bundle's list of framework listeners.

If the `listener` is not contained in this context bundle's list of listeners, this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use *RemoveListener()* instead.

See *AddFrameworkListener()*

See *FrameworkListener*

### Parameters

- `listener`: The callable object to remove.

### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.

void **RemoveListener** (ListenerToken *token*)

Removes the registered listener associated with the `token`

If the listener associated with the `token` is not contained in this context bundle's list of listeners or if `token` is an invalid token, this method does nothing.

The token can correspond to one of Service, *Bundle* or *Framework* listeners. Using this function to remove the registered listeners is the recommended approach over using any of the other deprecated functions - `Remove{Bundle,Framework,Service}Listener`.

See *AddServiceListener()*

See *AddBundleListener()*

See *AddFrameworkListener()*

### Parameters

- `token`: is an object of type `ListenerToken`.

### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.

template <class R>

**ListenerToken cppmicroservices::BundleContext::AddServiceListener** (R \* **receiver**, void(R

Adds the specified `callback` with the specified `filter` to the context bundles's list of listeners.

See *LDAPFilter* for a description of the filter syntax. Listeners are notified when a service has a lifecycle state change.

You must take care to remove registered listeners before the `receiver` object is destroyed. However, the Micro Services framework takes care of removing all listeners registered by this context bundle's classes after the bundle is stopped.

If the context bundle's list of listeners already contains a pair (`r,c`) of `receiver` and `callback` such that (`r == receiver && c == callback`), then this method replaces that callback's filter (which may be empty) with the specified one (which may be empty).

The callback is called if the filter criteria is met. To filter based upon the class of the service, the filter should reference the `Constants::OBJECTCLASS` property. If `filter` is empty, all services are considered to match the filter.

When using a `filter`, it is possible that the `ServiceEvents` for the complete lifecycle of a service will not be delivered to the callback. For example, if the `filter` only matches when the property `example_property` has the value 1, the callback will not be called if the service is registered with the property `example_property` not set to the value 1. Subsequently, when the service is modified setting property `example_property` to the value 1, the filter will match and the callback will be called with a `ServiceEvent` of type `SERVICE_MODIFIED`. Thus, the callback will not be called with a `ServiceEvent` of type `SERVICE_REGISTERED`.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `std::bind` to bind the member function and then pass the result to `AddServiceListener(const ServiceListener&)`

instead.

**Return** a `ListenerToken` object which can be used to remove the callable from the registered listeners.

**See** `ServiceEvent`

**See** `RemoveServiceListener()`

#### Template Parameters

- `R`: The type of the receiver (containing the member function to be called)

#### Parameters

- `receiver`: The object to connect to.
- `callback`: The member function pointer to call.
- `filter`: The filter criteria.

#### Exceptions

- `std::invalid_argument`: If `filter` contains an invalid filter string that cannot be parsed.
- `std::runtime_error`: If this `BundleContext` is no longer valid.

**template <class R>**

**void cppmicroservices::BundleContext::RemoveServiceListener(R \* receiver, void(R::\*)(**

Removes the specified `callback` from the context bundle's list of listeners.

If the `(receiver, callback)` pair is not contained in this context bundle's list of listeners, this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `RemoveListener()` instead.

**See** `AddServiceListener()`

#### Template Parameters

- `R`: The type of the receiver (containing the member function to be removed)

#### Parameters

- `receiver`: The object from which to disconnect.
- `callback`: The member function pointer to remove.

#### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.

**template <class R>**

**ListenerToken cppmicroservices::BundleContext::AddBundleListener(R \* receiver, void(R:**

Adds the specified `callback` to the context bundle's list of listeners.

Listeners are notified when a bundle has a lifecycle state change.

If the context bundle's list of listeners already contains a pair `(r, c)` of `receiver` and `callback` such that `(r == receiver && c == callback)`, then this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `std::bind` to bind the member function and then pass the result to `AddBundleListener(const BundleListener&)`

instead.

**Return** a `ListenerToken` object which can be used to remove the callable from the registered listeners.

**See** *BundleEvent*

#### Template Parameters

- `R`: The type of the receiver (containing the member function to be called)

#### Parameters

- `receiver`: The object to connect to.
- `callback`: The member function pointer to call.

#### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.

**template <class R>**

**void cppmicroservices::BundleContext::RemoveBundleListener(R \* receiver, void(R::\*)( B**

Removes the specified `callback` from the context bundle's list of listeners.

If the `(receiver, callback)` pair is not contained in this context bundle's list of listeners, this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `RemoveListener()` instead.

**See** `AddBundleListener()`

#### Template Parameters

- `R`: The type of the receiver (containing the member function to be removed)

#### Parameters

- `receiver`: The object from which to disconnect.
- `callback`: The member function pointer to remove.

#### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.

**template <class R>**

**ListenerToken** `cppmicroservices::BundleContext::AddFrameworkListener(R * receiver, void`

Adds the specified `callback` to the context bundle's list of framework listeners.

Listeners are notified of framework events.

If the context bundle's list of listeners already contains a pair `(r, c)` of `receiver` and `callback` such that `(r == receiver && c == callback)`, then this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `std::bind` to bind the member function and then pass the result to `any::AddFrameworkListener(const FrameworkListener&)`

`<cppmicroservices::BundleContext::AddFrameworkListener>` instead.

**Return** a `ListenerToken` object which can be used to remove the callable from the registered listeners.

See [FrameworkEvent](#)

#### Template Parameters

- `R`: The type of the receiver (containing the member function to be called)

#### Parameters

- `receiver`: The object to connect to.
- `callback`: The member function pointer to call.

#### Exceptions

- `std::runtime_error`: If this [BundleContext](#) is no longer valid.

`template <class R>`

**void** `cppmicroservices::BundleContext::RemoveFrameworkListener(R * receiver, void(R::*)`

Removes the specified `callback` from the context bundle's list of framework listeners.

If the `(receiver, callback)` pair is not contained in this context bundle's list of listeners, this method does nothing.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use [RemoveListener\(\)](#) instead.

See [AddFrameworkListener\(\)](#)

#### Template Parameters

- `R`: The type of the receiver (containing the member function to be removed)

#### Parameters

- `receiver`: The object from which to disconnect.
- `callback`: The member function pointer to remove.

#### Exceptions

- `std::runtime_error`: If this [BundleContext](#) is no longer valid.

`std::string` **GetDataFile** (`std::string const &filename`) `const`

Get the absolute path for a file or directory in the persistent storage area provided for the bundle.

The absolute path for the base directory of the persistent storage area provided for the context bundle by the [Framework](#) can be obtained by calling this method with an empty string as `filename`.

**Return** The absolute path to the persistent storage area for the given file name.

### Parameters

- `filename`: A relative name to the file or directory to be accessed.

### Exceptions

- `std::runtime_error`: If this *BundleContext* is no longer valid.
- `std::invalid_argument`: If the input param filename is not a valid UTF-8 string.

```
std::vector<Bundle> InstallBundles (std::string      const    &location,      cppmicroser-
                                vices::AnyMap      const    &bundleManifest    =
                                cppmicroservices::AnyMap      (      cppmicroser-
                                vices::any_map::UNORDERED_MAP_CASEINSENSITIVE_KEYS
                                ))
```

Installs all bundles from the bundle library at the specified location.

The following steps are required to install a bundle:

1. If a bundle containing the same install location is already installed, the *Bundle* object for that bundle is returned.
2. The bundle's associated resources are allocated. The associated resources minimally consist of a unique identifier and a persistent storage area if the platform has file system support. If this step fails, a `std::runtime_error` is thrown.
3. A bundle event of type *BundleEvent::BUNDLE\_INSTALLED* is fired.
4. The *Bundle* object for the newly or previously installed bundle is returned.

**Remark** An install location is an absolute path to a shared library or executable file which may contain several bundles, i. e. acts as a bundle library.

**Remark** If the bundleManifest is passed in, it is installed. In the event that the injected bundle manifest does NOT match the manifest in the bundle's file, the behavior of the system is undefined.

**Remark** If the provided bundleManifest does not match the manifest embedded in the bundle's file the behavior of that bundle in CppMicroServices is undefined.

**Remark** Example JSON representation of manifest *AnyMap*:

**Return** The *Bundle* objects of the installed bundle library.

### Parameters

- `location`: The location of the bundle library to install.
- `bundleManifest`: **OPTIONAL** - the manifest of the bundle at "location". If non-empty this will be used without opening the bundle at "location". Otherwise, the bundle will be opened and the manifest read from there.

### Exceptions

- `std::runtime_error`: If the *BundleContext* is no longer valid, or if the installation failed.
- `std::logic_error`: If the framework instance is no longer active
- `std::invalid_argument`: If the location is not a valid UTF8 string

## 15.1.4 BundleEvent

```
std::ostream &cppmicroservices::operator<< (std::ostream &os, BundleEvent::Type eventType)
    Writes a string representation of eventType to the stream os.
```

```
std::ostream &cppmicroservices::operator<<(std::ostream &os, BundleEvent const &event)
```

Writes a string representation of *event* to the stream *os*.

**class** `cppmicroservices::BundleEvent`

*#include <cppmicroservices/BundleEvent.h>* An event from the Micro Services framework describing a bundle lifecycle change.

*BundleEvent* objects are delivered to listeners connected via *BundleContext::AddBundleListener()* when a change occurs in a bundle's lifecycle. A type code is used to identify the event type for future extendability.

See *BundleContext::AddBundleListener*

## Public Types

### enum Type

The bundle event type.

*Values:*

**BUNDLE\_INSTALLED** = 0x00000001

The bundle has been installed.

The bundle has been installed by the *Framework*.

See *BundleContext::InstallBundles(const std::string&)*

**BUNDLE\_STARTED** = 0x00000002

The bundle has been started.

The bundle's *BundleActivator Start* method has been executed if the bundle has a bundle activator class.

See *Bundle::Start()*

**BUNDLE\_STOPPED** = 0x00000004

The bundle has been stopped.

The bundle's *BundleActivator Stop* method has been executed if the bundle has a bundle activator class.

See *Bundle::Stop()*

**BUNDLE\_UPDATED** = 0x00000008

The bundle has been updated.

**Note** This identifier is reserved for future use and not supported yet.

**BUNDLE\_UNINSTALLED** = 0x00000010

The bundle has been uninstalled.

See *Bundle::Uninstall()*

**BUNDLE\_RESOLVED** = 0x00000020

The bundle has been resolved.

See *Bundle::STATE\_RESOLVED*

**BUNDLE\_UNRESOLVED** = 0x00000040

The bundle has been unresolved.

See *Bundle::BUNDLE\_INSTALLED*



**BUNDLE\_STARTING** = 0x00000080

The bundle is about to be activated.

The bundle's *BundleActivator* *start* method is about to be called if the bundle has a bundle activator class.

See *Bundle::Start()*

**BUNDLE\_STOPPING** = 0x00000100

The bundle is about to be deactivated.

The bundle's *BundleActivator* *stop* method is about to be called if the bundle has a bundle activator class.

See *Bundle::Stop()*

**BUNDLE\_LAZY\_ACTIVATION** = 0x00000200

The bundle will be lazily activated.

The bundle has a *lazy activation policy* and is waiting to be activated. It is now in the *BUNDLE\_STARTING* state and has a valid *BundleContext*.

**Note** This identifier is reserved for future use and not supported yet.

## Public Functions

**BundleEvent** ()

Creates an invalid instance.

**operator bool** () **const**

Can be used to check if this *BundleEvent* instance is valid, or if it has been constructed using the default constructor.

**Return** *true* if this event object is valid, *false* otherwise.

**BundleEvent** (Type *type*, *Bundle* **const** &*bundle*)

Creates a bundle event of the specified type.

### Parameters

- *type*: The event type.
- *bundle*: The bundle which had a lifecycle change. This bundle is used as the origin of the event.

**BundleEvent** (Type *type*, *Bundle* **const** &*bundle*, *Bundle* **const** &*origin*)

Creates a bundle event of the specified type.

### Parameters

- *type*: The event type.
- *bundle*: The bundle which had a lifecycle change.
- *origin*: The bundle which is the origin of the event. For the event type *BUNDLE\_INSTALLED*, this is the bundle whose context was used to install the bundle. Otherwise it is the bundle itself.

*Bundle* **GetBundle** () **const**

Returns the bundle which had a lifecycle change.

**Return** The bundle that had a change occur in its lifecycle.

Type **GetType () const**

Returns the type of lifecycle event.

The type values are:

- *BUNDLE\_INSTALLED*
- *BUNDLE\_RESOLVED*
- *BUNDLE\_LAZY\_ACTIVATION*
- *BUNDLE\_STARTING*
- *BUNDLE\_STARTED*
- *BUNDLE\_STOPPING*
- *BUNDLE\_STOPPED*
- *BUNDLE\_UNRESOLVED*
- *BUNDLE\_UNINSTALLED*

**Return** The type of lifecycle event.

*Bundle* **GetOrigin () const**

Returns the bundle that was the origin of the event.

For the event type *BUNDLE\_INSTALLED*, this is the bundle whose context was used to install the bundle. Otherwise it is the bundle itself.

**Return** The bundle that was the origin of the event.

bool **operator== (BundleEvent const &evt) const**

Compares two bundle events for equality.

**Return** *true* if both events originate from the same bundle, describe a life-cycle change for the same bundle, and are of the same type. *false* otherwise. Two invalid bundle events are considered to be equal.

**Parameters**

- *evt*: The bundle event to compare this event with.

### 15.1.5 BundleEventHook

**struct** cppmicroservices::BundleEventHook

Bundle Event Hook Service.

Bundles registering this service will be called during bundle lifecycle (installed, starting, started, stopping, stopped, uninstalled) operations.

**Remark** Implementations of this interface are required to be thread-safe.

## Public Functions

**virtual ~BundleEventHook ()**

**virtual void Event** (*BundleEvent* const &event, *ShrinkableVector*<*BundleContext*> &contexts) = 0  
*Bundle* event hook method.

This method is called prior to bundle event delivery when a bundle is installed, starting, started, stopping, stopped, and uninstalled. This method can filter the bundles which receive the event.

This method is called one and only one time for each bundle event generated, this includes bundle events which are generated when there are no bundle listeners registered.

### Parameters

- event: The bundle event to be delivered.
- contexts: A list of *Bundle* Contexts for bundles which have listeners to which the specified event will be delivered. The implementation of this method may remove bundle contexts from the list to prevent the event from being delivered to the associated bundles.

## 15.1.6 BundleFindHook

**struct** cppmicroservices::BundleFindHook

Bundle Context Hook Service.

Bundles registering this service will be called during bundle find (get bundles) operations.

**Remark** Implementations of this interface are required to be thread-safe.

## Public Functions

**virtual ~BundleFindHook ()**

**virtual void Find** (*BundleContext* const &context, *ShrinkableVector*<*Bundle*> &bundles) = 0  
 Find hook method.

This method is called for bundle find operations using *BundleContext::GetBundle*(long) and *BundleContext::GetBundles*() methods. The find method can filter the result of the find operation.

**Note** A find operation using the *BundleContext::GetBundle*(const std::string&) method does not cause the find method to be called, neither does any call to the static methods of the *BundleRegistry* class.

### Parameters

- context: The bundle context of the bundle performing the find operation.
- bundles: A list of Bundles to be returned as a result of the find operation. The implementation of this method may remove bundles from the list to prevent the bundles from being returned to the bundle performing the find operation.

## 15.1.7 BundleResource

std::ostream &cppmicroservices::operator<< (std::ostream &os, *BundleResource* const &resource)  
 Streams the resource path into the stream os.

**class** cppmicroservices::BundleResource

*#include <cppmicroservices/BundleResource.h>* Represents a resource (text file, image, etc.) embedded in a CppMicroServices bundle.

A BundleResource object provides information about a resource (external file) which was embedded into this bundle's shared library. BundleResource objects can be obtained by calling *Bundle::GetResource* or *Bundle::FindResources*.

Example code for retrieving a resource object and reading its contents:

```
// Get this bundle's Bundle object
auto bundle = GetBundleContext().GetBundle();

BundleResource resource = bundle.GetResource("config.properties");
if (resource.IsValid())
{
    // Create a BundleResourceStream object
    BundleResourceStream resourceStream(resource);

    // Read the contents line by line
    std::string line;
    while (std::getline(resourceStream, line))
    {
        // Process the content
        std::cout << line << std::endl;
    }
}
else
{
    // Error handling
}
```

BundleResource objects have value semantics and copies are very inexpensive.

**See also:**

*BundleResourceStream*

*The Resource System*

## Public Functions

**BundleResource()**

Creates an invalid BundleResource object.

**See** *IsValid()*

**BundleResource** (*BundleResource* const &resource)

Copy constructor.

**Parameters**

- resource: The object to be copied.

**~BundleResource()**

*BundleResource* &operator= (*BundleResource* const &resource)

Assignment operator.

**Return** A reference to this *BundleResource* instance.

**Parameters**

- resource: The *BundleResource* object which is assigned to this instance.

bool operator< (*BundleResource* const &resource) const

A less then operator using the full resource path as returned by *GetResourcePath()* to define the ordering.

**Return** true if this *BundleResource* object is less then resource, false otherwise.

**Parameters**

- resource: The object to which this *BundleResource* object is compared to.

bool operator== (*BundleResource* const &resource) const

Equality operator for *BundleResource* objects.

**Return** true if this *BundleResource* object is equal to resource, i.e. they are coming from the same bundle (shared or static) and have an equal resource path, false otherwise.

**Parameters**

- resource: The object for testing equality.

bool operator!= (*BundleResource* const &resource) const

Inequality operator for *BundleResource* objects.

**Return** The result of !(\*this == resource).

**Parameters**

- resource: The object for testing inequality.

bool IsValid() const

Tests this *BundleResource* object for validity.

Invalid *BundleResource* objects are created by the default constructor or can be returned by the *Bundle* class if the resource path is not found.

**Return** true if this *BundleResource* object is valid and can safely be used, false otherwise.

operator bool() const

Boolean conversion operator using *IsValid()*.

std::string GetName() const

Returns the name of the resource, excluding the path.

Example:

```
BundleResource resource = bundle->GetResource("/data/archive.tar.gz");
std::string name = resource.GetName(); // name = "archive.tar.gz"
```

**Return** The resource name.

See [GetPath\(\)](#), [GetResourcePath\(\)](#)

std::string **GetPath** () const

Returns the resource's path, without the file name.

Example:

```
BundleResource resource = bundle->GetResource("/data/archive.tar.gz");
std::string path = resource.GetPath(); // path = "/data/"
```

The path will always begin and end with a forward slash.

**Return** The resource path without the name.

See [GetResourcePath\(\)](#), [GetName\(\)](#) and [IsDir\(\)](#)

std::string **GetResourcePath** () const

Returns the resource path including the file name.

**Return** The resource path including the file name.

See [GetPath\(\)](#), [GetName\(\)](#) and [IsDir\(\)](#)

std::string **GetBaseName** () const

Returns the base name of the resource without the path.

Example:

```
BundleResource resource = bundle->GetResource("/data/archive.tar.gz");
std::string base = resource.GetBaseName(); // base = "archive"
```

**Return** The resource base name.

See [GetName\(\)](#), [GetSuffix\(\)](#), [GetCompleteSuffix\(\)](#) and [GetCompleteBaseName\(\)](#)

std::string **GetCompleteBaseName** () const

Returns the complete base name of the resource without the path.

Example:

```
BundleResource resource = bundle->GetResource("/data/archive.tar.gz");
std::string base = resource.GetCompleteBaseName(); // base = "archive.tar"
```

**Return** The resource's complete base name.

See [GetName\(\)](#), [GetSuffix\(\)](#), [GetCompleteSuffix\(\)](#), and [GetBaseName\(\)](#)

std::string **GetSuffix** () const

Returns the suffix of the resource.

The suffix consists of all characters in the resource name after (but not including) the last '.'.

Example:

```
BundleResource resource = bundle->GetResource("/data/archive.tar.gz");
std::string suffix = resource.GetSuffix(); // suffix = "gz"
```

**Return** The resource name suffix.

**See** *GetName()*, *GetCompleteSuffix()*, *GetBaseName()* and *GetCompleteBaseName()*

std::string **GetCompleteSuffix () const**

Returns the complete suffix of the resource.

The suffix consists of all characters in the resource name after (but not including) the first ‘.’.

Example:

```
BundleResource resource = bundle->GetResource("/data/archive.tar.gz");
std::string suffix = resource.GetCompleteSuffix(); // suffix = "tar.gz"
```

**Return** The resource name suffix.

**See** *GetName()*, *GetSuffix()*, *GetBaseName()*, and *GetCompleteBaseName()*

bool **IsDir () const**

Returns `true` if this BundleResource object points to a directory and thus may have child resources.

**Return** `true` if this object points to a directory, `false` otherwise.

bool **IsFile () const**

Returns `true` if this BundleResource object points to a file resource.

**Return** `true` if this object points to an embedded file, `false` otherwise.

std::vector<std::string> **GetChildren () const**

Returns a list of resource names which are children of this object.

The returned names are relative to the path of this BundleResource object and may contain file as well as directory entries.

**Return** A list of child resource names.

std::vector<BundleResource> **GetChildResources () const**

Returns a list of resource objects which are children of this object.

The returned *BundleResource* objects may contain files as well as directory resources.

**Return** A list of child resource objects.

int **GetSize () const**

Returns the (uncompressed) size of the resource data for this BundleResource object.

**Return** The uncompressed resource data size.

int **GetCompressedSize () const**

Returns the compressed size of the resource data for this BundleResource object.

**Return** The compressed resource data size.

time\_t **GetLastModified () const**

Returns the last modified time of this resource in seconds from the epoch.

**Return** Last modified time of this resource.

uint32\_t **GetCrc32** () **const**

Returns the CRC-32 checksum of this resource.

**Return** CRC-32 checksum of this resource.

## Friends

**friend** gr\_bundleresource:::std::hash< BundleResource >

template<>

**struct** std::hash<cppmicroservices::BundleResource>

#include <cppmicroservices/BundleResource.h> Hash functor specialization for *BundleResource* objects.

## 15.1.8 BundleResourceStream

**class** cppmicroservices::BundleResourceStream

An input stream class for *BundleResource* objects.

This class provides access to the resource data embedded in a bundle’s shared library via a STL input stream interface.

See *BundleResource* for an example how to use this class.

Inherits from cppmicroservices::detail::BundleResourceBuffer, std::istream

## Public Functions

**BundleResourceStream** (*BundleResourceStream* const&)

*BundleResourceStream* &operator= (*BundleResourceStream* const&)

**BundleResourceStream** (*BundleResource* const &resource, std::ios\_base::openmode mode = std::ios\_base::in)

Construct a BundleResourceStream object.

## Parameters

- resource: The *BundleResource* object for which an input stream should be constructed.
- mode: The open mode of the stream. If std::ios\_base::binary is used, the resource data will be treated as binary data, otherwise the data is interpreted as text data and the usual platform specific end-of-line translations take place.

## 15.1.9 Framework

**class** cppmicroservices::Framework

A *Framework* instance.

A *Framework* is itself a bundle and is known as the “System Bundle”. The System *Bundle* differs from other bundles in the following ways:

- The system bundle is always assigned a bundle identifier of zero (0).



- The system bundle `GetLocation` method returns the string: “System Bundle”.
- The system bundle’s life cycle cannot be managed like normal bundles. Its life cycle methods behave as follows:
  - Start - Initialize the framework and start installed bundles.
  - Stop - Stops all installed bundles.
  - Uninstall - The *Framework* throws a `std::runtime_error` exception indicating that the system bundle cannot be uninstalled.

*Framework* instances are created using a *FrameworkFactory*. The methods of this class can be used to manage and control the created framework instance.

**Remark** This class is thread-safe.

**See** `FrameworkFactory::NewFramework(const std::map<std::string, Any>& configuration)`

Inherits from *cppmicroservices::Bundle*

## Public Functions

**Framework** (*Bundle* *b*)

Convert a *Bundle* representing the system bundle to a *Framework* instance.

### Parameters

- *b*: The system bundle

### Exceptions

- `std::logic_error`: If the bundle is not the system bundle.

**Framework** (*Framework* const &*fw*)

**Framework** (*Framework* &&*fw*)

*Framework* &**operator=** (*Framework* const &*fw*)

*Framework* &**operator=** (*Framework* &&*fw*)

void **Init** ()

Initialize this *Framework*.

After calling this method, this *Framework* has:

- Generated a new *framework UUID*.
- Moved to the *STATE\_STARTING* state.
- A valid *Bundle* Context.
- Event handling enabled.
- Reified *Bundle* objects for all installed bundles.
- Registered any framework services.

This *Framework* will not actually be started until *Start* is called.

This method does nothing if called when this *Framework* is in the *STATE\_STARTING*, *STATE\_ACTIVE* or *STATE\_STOPPING* states.

## Exceptions

- `std::runtime_error`: If this *Framework* could not be initialized.

*FrameworkEvent* **WaitForStop** (`std::chrono::milliseconds const &timeout`)

Wait until this *Framework* has completely stopped.

The `Stop` method on a *Framework* performs an asynchronous stop of the *Framework* if it was built with threading support.

This method can be used to wait until the asynchronous stop of this *Framework* has completed. This method will only wait if called when this *Framework* is in the *STATE\_STARTING*, *STATE\_ACTIVE*, or *STATE\_STOPPING* states. Otherwise it will return immediately.

A *Framework* Event is returned to indicate why this *Framework* has stopped.

**Return** A *Framework* Event indicating the reason this method returned. The following *FrameworkEvent* types may be returned by this method.

- *FRAMEWORK\_STOPPED* - This *Framework* has been stopped.
- *FRAMEWORK\_ERROR* - The *Framework* encountered an error while shutting down or an error has occurred which forced the framework to shutdown.
- *FRAMEWORK\_WAIT\_TIMEDOUT* - This method has timed out and returned before this *Framework* has stopped.

## Parameters

- `timeout`: Maximum time duration to wait until this *Framework* has completely stopped. A value of zero will wait indefinitely.

## 15.1.10 FrameworkEvent

`std::ostream &cppmicroservices::operator<< (std::ostream &os, FrameworkEvent::Type event-  
Type)`

Writes a string representation of event `Type` to the stream `os`.

`std::ostream &cppmicroservices::operator<< (std::ostream &os, FrameworkEvent const &evt)`

Writes a string representation of `evt` to the stream `os`.

`bool cppmicroservices::operator==( FrameworkEvent const &rhs, FrameworkEvent const &lhs)`

Compares two framework events for equality.

**class** `cppmicroservices::FrameworkEvent`

`#include <cppmicroservices/FrameworkEvent.h>` An event from the Micro Services framework describing a *Framework* event.

*FrameworkEvent* objects are delivered to listeners connected via *BundleContext::AddFrameworkListener()* when an event occurs within the *Framework* which a user would be interested in. A `Type` code is used to identify the event type for future extendability.

See *BundleContext::AddFrameworkListener*

## Public Types

### enum `Type`

A type code used to identify the event type for future extendability.

Values:

**FRAMEWORK\_STARTED** = 0x00000001

The *Framework* has started.

This event is fired when the *Framework* has started after all installed bundles that are marked to be started have been started. The source of this event is the System *Bundle*.

**FRAMEWORK\_ERROR** = 0x00000002

An error has occurred.

There was an error associated with a bundle.

**FRAMEWORK\_WARNING** = 0x00000010

A warning has occurred.

There was a warning associated with a bundle.

**FRAMEWORK\_INFO** = 0x00000020

An informational event has occurred.

There was an informational event associated with a bundle.

**FRAMEWORK\_STOPPED** = 0x00000040

The *Framework* has been stopped.

This event is fired when the *Framework* has been stopped because of a stop operation on the system bundle. The source of this event is the System *Bundle*.

**FRAMEWORK\_STOPPED\_UPDATE** = 0x00000080

The *Framework* is about to be stopped.

This event is fired when the *Framework* has been stopped because of an update operation on the system bundle. The *Framework* will be restarted after this event is fired. The source of this event is the System *Bundle*.

**FRAMEWORK\_WAIT\_TIMEOUT** = 0x00000200

The *Framework* did not stop before the wait timeout expired.

This event is fired when the *Framework* did not stop before the wait timeout expired. The source of this event is the System *Bundle*.

## Public Functions

**FrameworkEvent** ()

Creates an invalid instance.

**operator bool** () const

Returns `false` if the *FrameworkEvent* is empty (i.e invalid) and `true` if the *FrameworkEvent* is not null and contains valid data.

**Return** `true` if this event object is valid, `false` otherwise.

**FrameworkEvent** (Type *type*, *Bundle* const &*bundle*, std::string const &*message*, const std::exception\_ptr *exception* = nullptr)

Creates a *Framework* event of the specified type.

### Parameters

- *type*: The event type.

- `bundle`: The bundle associated with the event. This bundle is also the source of the event.
- `message`: The message associated with the event.
- `exception`: The exception associated with this event. Should be `nullptr` if there is no exception.

*Bundle* **GetBundle () const**

Returns the bundle associated with the event.

**Return** The bundle associated with the event.

`std::string` **GetMessage () const**

Returns the message associated with the event.

**Return** the message associated with the event.

`std::exception_ptr` **GetThrowable () const**

Returns the exception associated with this event.

**Remark** Use `std::rethrow_exception` to throw the exception returned.

**Return** The exception. May be `nullptr` if there is no related exception.

Type **GetType () const**

Returns the type of framework event.

The type values are:

- *FRAMEWORK\_STARTED*
- *FRAMEWORK\_ERROR*
- *FRAMEWORK\_WARNING*
- *FRAMEWORK\_INFO*
- *FRAMEWORK\_STOPPED*
- *FRAMEWORK\_STOPPED\_UPDATE*
- *FRAMEWORK\_WAIT\_TIMEDOUT*

**Return** The type of *Framework* event.

### 15.1.11 PrototypeServiceFactory

**struct** `cppmicroservices::PrototypeServiceFactory`

A factory for *prototype scope* services.

The factory can provide multiple, unique service objects.

When registering a service, a *PrototypeServiceFactory* object can be used instead of a service object, so that the bundle developer can create a unique service object for each caller that is using the service. When a caller uses a *ServiceObjects* to request a service instance, the framework calls the `GetService` method to return a service object specifically for the requesting caller. The caller can release the returned service object and the framework will call the `UngetService` method with the service object. When a bundle uses the *BundleContext::GetService(const ServiceReferenceBase&)* method to obtain a service object, the framework acts as if the service has bundle scope. That is, the framework will call the `GetService` method to obtain a bundle-scoped instance which will be cached and have a use count. See *ServiceFactory*.

A bundle can use both *ServiceObjects* and *BundleContext::GetService(const ServiceReferenceBase&)* to obtain a service object for a service. *ServiceObjects::GetService()* will always return an instance provided by a call to *GetService(const Bundle&, const ServiceRegistrationBase&)* and *BundleContext::GetService(const ServiceReferenceBase&)* will always return the bundle-scoped instance. *PrototypeServiceFactory* objects are only used by the framework and are not made available to other bundles. The framework may concurrently call a *PrototypeServiceFactory*.

See *BundleContext::GetServiceObjects()*

See *ServiceObjects*

Inherits from *cppmicroservices::ServiceFactory*

## Public Functions

InterfaceMapConstPtr **GetService** (*Bundle* const &bundle, *ServiceRegistrationBase* const &registration) = 0

Returns a service object for a caller.

The framework invokes this method for each caller requesting a service object using *ServiceObjects::GetService()*. The factory can then return a specific service object for the caller. The framework checks that the returned service object is valid. If the returned service object is empty or does not contain entries for all the interfaces named when the service was registered, a warning is issued and nullptr is returned to the caller. If this method throws an exception, a warning is issued and nullptr is returned to the caller.

**Return** A service object that must contain entries for all the interfaces named when the service was registered.

See *ServiceObjects::GetService()*

See InterfaceMapConstPtr

### Parameters

- bundle: The bundle requesting the service.
- registration: The *ServiceRegistrationBase* object for the requested service.

void **UngetService** (*Bundle* const &bundle, *ServiceRegistrationBase* const &registration, InterfaceMapConstPtr const &service) = 0

Releases a service object created for a caller.

The framework invokes this method when a service has been released by a bundles such as by calling *ServiceObjects::UngetService()*. The service object may then be destroyed. If this method throws an exception, a warning is issued.

See *ServiceObjects::UngetService()*

### Parameters

- bundle: The bundle releasing the service.
- registration: The *ServiceRegistrationBase* object for the service being released.
- service: The service object returned by a previous call to the *GetService* method.

### 15.1.12 ServiceEvent

`std::ostream &cppmicroservices::operator<< (std::ostream &os, ServiceEvent::Type const &type)`  
 Writes a string representation of `type` to the stream `os`.

`std::ostream &cppmicroservices::operator<< (std::ostream &os, ServiceEvent const &event)`  
 Writes a string representation of `event` to the stream `os`.

**class** `cppmicroservices::ServiceEvent`  
*#include <cppmicroservices/ServiceEvent.h>* An event from the Micro Services framework describing a service lifecycle change.

*ServiceEvent* objects are delivered to listeners connected via *BundleContext::AddServiceListener()* when a change occurs in this service's lifecycle. A type code is used to identify the event type for future extendability.

#### Public Types

##### enum *Type*

The service event type.

*Values:*

**SERVICE\_REGISTERED** = 0x00000001

This service has been registered.

This event is delivered **after** the service has been registered with the framework.

See *BundleContext::RegisterService*

**SERVICE\_MODIFIED** = 0x00000002

The properties of a registered service have been modified.

This event is delivered **after** the service properties have been modified.

See *ServiceRegistration::SetProperties*

**SERVICE\_UNREGISTERING** = 0x00000004

This service is in the process of being unregistered.

This event is delivered **before** the service has completed unregistering.

If a bundle is using a service that is **SERVICE\_UNREGISTERING**, the bundle should release its use of the service when it receives this event. If the bundle does not release its use of the service when it receives this event, the framework will automatically release the bundle's use of the service while completing the service unregistration operation.

See *ServiceRegistration::Unregister*

**SERVICE\_MODIFIED\_ENDMATCH** = 0x00000008

The properties of a registered service have been modified and the new properties no longer match the listener's filter.

This event is delivered **after** the service properties have been modified. This event is only delivered to listeners which were added with a non-empty filter where the filter matched the service properties prior to the modification but the filter does not match the modified service properties.

See *ServiceRegistration::SetProperties*

## Public Functions

**ServiceEvent** ()

Creates an invalid instance.

**operator bool** () **const**

Can be used to check if this *ServiceEvent* instance is valid, or if it has been constructed using the default constructor.

**Return** `true` if this event object is valid, `false` otherwise.

**ServiceEvent** (Type *type*, *ServiceReferenceBase* **const** &*reference*)

Creates a new service event object.

### Parameters

- *type*: The event type.
- *reference*: A *ServiceReference* object to the service that had a lifecycle change.

**ServiceEvent** (*ServiceEvent* **const** &*other*)

*ServiceEvent* &**operator=** (*ServiceEvent* **const** &*other*)

*ServiceReferenceU* **GetServiceReference** () **const**

Returns a reference to the service that had a change occur in its lifecycle.

This reference is the source of the event.

**Return** Reference to the service that had a lifecycle change.

**template** <class *S*>

*ServiceReference*<*S*> **GetServiceReference** () **const**

Type **GetType** () **const**

Returns the type of event.

The event type values are:

- *SERVICE\_REGISTERED*
- *SERVICE\_MODIFIED*
- *SERVICE\_MODIFIED\_ENDMATCH*
- *SERVICE\_UNREGISTERING*

**Return** Type of service lifecycle change.

### 15.1.13 ServiceEventListenerHook

**struct** cppmicroservices::ServiceEventListenerHook

Service Event Listener Hook Service.

Bundles registering this service will be called during service (register, modify, and unregister service) operations.

**Remark** Implementations of this interface are required to be thread-safe.

## Public Types

using **ShrinkableMapType** = *ShrinkableMap*<*BundleContext*, *ShrinkableVector*<*ServiceListenerHook*::*ListenerInfo*>>  
*ShrinkableMap* type for filtering event listeners.

## Public Functions

**virtual ~ServiceEventListenerHook ()**

**virtual void Event** (*ServiceEvent* const &event, *ShrinkableMapType* &listeners) = 0  
 Event listener hook method.

This method is called prior to service event delivery when a publishing bundle registers, modifies or unregisters a service. This method can filter the listeners which receive the event.

### Parameters

- event: The service event to be delivered.
- listeners: A map of *Bundle* Contexts to a list of Listener Infos for the bundle's listeners to which the specified event will be delivered. The implementation of this method may remove bundle contexts from the map and listener infos from the list values to prevent the event from being delivered to the associated listeners.

### 15.1.14 ServiceException

std::ostream &**operator<<** (std::ostream &os, cppmicroservices::ServiceException const &exc)  
 Writes a string representation of exc to the stream os.

**class** cppmicroservices::ServiceException  
*#include* <cppmicroservices/ServiceException.h> A service exception used to indicate that a service problem occurred.

A *ServiceException* object is created by the framework or to denote an exception condition in the service. An enum type is used to identify the exception type for future extendability.

This exception conforms to the general purpose exception chaining mechanism.

Inherits from std::runtime\_error

## Public Types

### enum Type

*Values:*

**UNSPECIFIED** = 0

No exception type is unspecified.

**UNREGISTERED** = 1

The service has been unregistered.

**FACTORY\_ERROR** = 2

The service factory produced an invalid service object.

**FACTORY\_EXCEPTION** = 3

The service factory threw an exception.



**REMOTE = 5**

An error occurred invoking a remote service.

**FACTORY\_RECURSION = 6**

The service factory resulted in a recursive call to itself for the requesting bundle.

## Public Functions

**ServiceException** (std::string const &msg, Type const &type = UNSPECIFIED)

Creates a *ServiceException* with the specified message, type and exception cause.

### Parameters

- msg: The associated message.
- type: The type for this exception.

**ServiceException** (*ServiceException* const &o)

*ServiceException* &operator= (*ServiceException* const &o)

~**ServiceException** ()

Type **GetType** () const

Returns the type for this exception or UNSPECIFIED if the type was unspecified or unknown.

**Return** The type of this exception.

## 15.1.15 ServiceFactory

**class** cppmicroservices::ServiceFactory

A factory for *bundle scope* services.

The factory can provide service objects unique to each bundle.

When registering a service, a *ServiceFactory* object can be used instead of a service object, so that the bundle developer can create a customized service object for each bundle that is using the service.

When a bundle requests the service object, the framework calls the *ServiceFactory::GetService* method to return a service object customized for the requesting bundle. The returned service object is cached by the framework for subsequent calls to *BundleContext::GetService(const ServiceReference&)* until the bundle releases its use of the service.

When the bundle's use count for the service is decremented to zero (including the bundle stopping or the service being unregistered), the framework will call the *ServiceFactory::UngetService* method.

*ServiceFactory* objects are only used by the framework and are not made available to other bundles in the bundle environment. The framework may concurrently call a *ServiceFactory*.

See *BundleContext::GetService*

See *PrototypeServiceFactory*

**Remark** This class is thread safe.

Subclassed by *cppmicroservices::PrototypeServiceFactory*

## Public Functions

**virtual ~ServiceFactory ()**

**virtual** InterfaceMapConstPtr **GetService** (*Bundle* const &bundle, *ServiceRegistrationBase* const &registration) = 0

Returns a service object for a bundle.

The framework invokes this method the first time the specified bundle requests a service object using the *BundleContext::GetService(const ServiceReferenceBase&)* method. The factory can then return a customized service object for each bundle.

The framework checks that the returned service object is valid. If the returned service object is null or does not contain entries for all the classes named when the service was registered, a framework event of type *FrameworkEvent::FRAMEWORK\_ERROR* is fired containing a service exception of type *ServiceException::FACTORY\_ERROR* and null is returned to the bundle. If this method throws an exception, a framework event of type *FrameworkEvent::FRAMEWORK\_ERROR* is fired containing a service exception of type *ServiceException::FACTORY\_EXCEPTION* with the thrown exception as a nested exception and null is returned to the bundle. If this method is recursively called for the specified bundle, a framework event of type *FrameworkEvent::FRAMEWORK\_ERROR* is fired containing a service exception of type *ServiceException::FACTORY\_RECURSION* and null is returned to the bundle.

The framework caches the valid service object, and will return the same service object on any future call to *BundleContext::GetService* for the specified bundle. This means the framework does not allow this method to be concurrently called for the specified bundle.

**Return** A service object that **must** contain entries for all the interfaces named when the service was registered.

**See** *BundleContext::GetService*

**See** InterfaceMapConstPtr

### Parameters

- bundle: The bundle requesting the service.
- registration: The *ServiceRegistrationBase* object for the requested service.

**virtual** void **UngetService** (*Bundle* const &bundle, *ServiceRegistrationBase* const &registration, InterfaceMapConstPtr const &service) = 0

Releases a service object customized for a bundle.

The *Framework* invokes this method when a service has been released by a bundle. If this method throws an exception, a framework event of type *FrameworkEvent::FRAMEWORK\_ERROR* is fired containing a service exception of type *ServiceException::FACTORY\_EXCEPTION* with the thrown exception as a nested exception.

**See** InterfaceMapConstPtr

### Parameters

- bundle: The *Bundle* releasing the service.
- registration: The *ServiceRegistration* object for the service being released.
- service: The service object returned by a previous call to the *ServiceFactory::GetService* method.

### 15.1.16 ServiceFindHook

**struct** cppmicroservices::ServiceFindHook

Service Find Hook Service.

Bundles registering this service will be called during service find (get service references) operations.

**Remark** Implementations of this interface are required to be thread-safe.

#### Public Functions

**virtual** ~ServiceFindHook()

**virtual** void Find(BundleContext const &context, std::string const &name, std::string const &filter, ShrinkableVector<ServiceReferenceBase> &references) = 0  
Find hook method.

This method is called during the service find operation (for example, BundleContext::GetServiceReferences<S>()). This method can filter the result of the find operation.

#### Parameters

- context: The bundle context of the bundle performing the find operation.
- name: The class name of the services to find or an empty string to find all services.
- filter: The filter criteria of the services to find or an empty string for no filter criteria.
- references: A list of Service References to be returned as a result of the find operation. The implementation of this method may remove service references from the list to prevent the references from being returned to the bundle performing the find operation.

### 15.1.17 ServiceInterface

**template** <class T>

std::shared\_ptr<ServiceFactory> cppmicroservices::ToFactory(std::shared\_ptr<T> const &factory)

Cast the argument to a shared pointer of type ServiceFactory.

Useful when calling BundleContext::RegisterService with a service factory, for example:

```
std::shared_ptr<MyServiceFactory> factory = std::make_shared<MyServiceFactory>();
context->RegisterService<ISomeInterface>(ToFactory(factory));
```

**Return** A shared\_ptr object of type ServiceFactory

**See** BundleContext::RegisterService(ServiceFactory\* factory, const ServiceProperties& properties)

#### Parameters

- factory: The service factory shared\_ptr object

**using** cppmicroservices::InterfaceMap = typedef std::unordered\_map<std::string, std::shared\_ptr<T>>

A map containing interfaces ids and their corresponding service object smart pointers.

InterfaceMap instances represent a complete service object which implements one or more service interfaces. For each implemented service interface, there is an entry in the map with the key being the service interface id and the value a smart pointer to the service interface implementation.

To create `InterfaceMap` instances, use the [MakeInterfaceMap](#) helper class.

**Note** This is a low-level type and should only rarely be used.

See [MakeInterfaceMap](#)

**template** <class T>

`std::string const &us_service_interface_iid()`

Returns a unique id for a given type.

By default, the demangled name of T is returned.

This template method may be specialized directly or by using the macro [CPPMICROSERVICES\\_DECLARE\\_SERVICE\\_INTERFACE](#) to return a custom id for each service interface.

**Return** A unique id for the service interface type T.

#### Template Parameters

- T: The service interface type.

**template** <class Interface>

`std::shared_ptr<Interface> cppmicroservices::ExtractInterface (InterfaceMapConstPtr const &map)`

Extract a service interface pointer from a given `InterfaceMap` instance.

**Return** A shared pointer object of type `Interface`. The returned object is empty if the map does not contain an entry for the given type

See [MakeInterfaceMap](#)

#### Parameters

- map: a `InterfaceMap` instance.

`std::shared_ptr<void> cppmicroservices::ExtractInterface (InterfaceMapConstPtr const &map, std::string const &interfaceId)`

Extract a service interface pointer from a given `InterfaceMap` instance.

**Return** The service interface pointer for the service interface id or `nullptr` if map does not contain an entry for the given type.

See [ExtractInterface\(const InterfaceMapConstPtr&\)](#)

#### Parameters

- map: a `InterfaceMap` instance.
- interfaceId: The interface id string.

**template** <class... Interfaces>

**class** `cppmicroservices::MakeInterfaceMap`

`#include <cppmicroservices/ServiceInterface.h>` Helper class for constructing `InterfaceMap` instances based on service implementations or service factories.

Example usage:

```
std::shared_ptr<MyService> service; // implements I1 and I2
InterfaceMap im = MakeInterfaceMap<I1, I2>(service);
```

See [InterfaceMap](#)

## Public Functions

**template <class Impl>**

**MakeInterfaceMap** (std::shared\_ptr<Impl> const &impl)

Constructor taking a service implementation pointer.

### Parameters

- impl: A service implementation pointer, which must be castable to a all specified service interfaces.

**MakeInterfaceMap** (std::shared\_ptr<ServiceFactory> factory)

Constructor taking a service factory.

### Parameters

- factory: A service factory.

**operator InterfaceMapPtr()**

**operator InterfaceMapConstPtr()**

**CPPMICROSERVICES\_DECLARE\_SERVICE\_INTERFACE** (\_service\_interface\_type, \_service\_interface\_id)

Declare a service interface id.

This macro associates the given identifier *\_service\_interface\_id* (a string literal) to the interface class called *\_service\_interface\_type*. The Identifier must be unique. For example:

```
#include "cppmicroservices/ServiceInterface.h"

struct ISomeInterface { ... };

CPPMICROSERVICES_DECLARE_SERVICE_INTERFACE(ISomeInterface, "com.mycompany.service.
↪ISomeInterface/1.0")
```

The usage of this macro is optional and the service interface id which is automatically associated with any type is usually good enough (the demangled type name). However, care must be taken if the default id is compared with a string literal hard-coding a service interface id. E.g. the default id for templated types in the STL may differ between platforms. For user-defined types and templates the ids are typically consistent, but platform specific default template arguments will lead to different ids.

This macro is normally used right after the class definition for *\_service\_interface\_type*, in a header file.

If you want to use *CPPMICROSERVICES\_DECLARE\_SERVICE\_INTERFACE* with interface classes declared in a namespace then you have to make sure the *CPPMICROSERVICES\_DECLARE\_SERVICE\_INTERFACE* macro call is not inside a namespace though. For example:

```
#include "cppmicroservices/ServiceInterface.h"

namespace Foo
{
    struct ISomeInterface { ... };
}

CPPMICROSERVICES_DECLARE_SERVICE_INTERFACE(Foo::ISomeInterface, "com.mycompany.
↪service.ISomeInterface/1.0")
```

#### Parameters

- `_service_interface_type`: The service interface type.
- `_service_interface_id`: A string literal representing a globally unique identifier.

### 15.1.18 ServiceListenerHook

**struct** cppmicroservices::ServiceListenerHook

*#include <cppmicroservices/ServiceListenerHook.h>* Service Listener Hook Service.

Bundles registering this service will be called during service listener addition and removal.

**Remark** Implementations of this interface are required to be thread-safe.

#### Public Functions

**virtual** ~ServiceListenerHook()

**virtual** void **Added**(std::vector<ListenerInfo> const &listeners) = 0  
Added listeners hook method.

This method is called to provide the hook implementation with information on newly added service listeners. This method will be called as service listeners are added while this hook is registered. Also, immediately after registration of this hook, this method will be called to provide the current collection of service listeners which had been added prior to the hook being registered.

#### Parameters

- `listeners`: A collection of *ListenerInfo* objects for newly added service listeners which are now listening to service events.

**virtual** void **Removed**(std::vector<ListenerInfo> const &listeners) = 0  
Removed listeners hook method.

This method is called to provide the hook implementation with information on newly removed service listeners. This method will be called as service listeners are removed while this hook is registered.

#### Parameters

- `listeners`: A collection of *ListenerInfo* objects for newly removed service listeners which are no longer listening to service events.

**struct** ListenerInfo

*#include <cppmicroservices/ServiceListenerHook.h>* Information about a Service Listener.

This class describes the bundle which added the Service Listener and the filter with which it was added.

**Remark** This class is not intended to be implemented by clients.

## Public Functions

**ListenerInfo** ()

**ListenerInfo** (*ListenerInfo* const &other)

**~ListenerInfo** ()

*ListenerInfo* &operator= (*ListenerInfo* const &other)

bool **IsNull** () const

Can be used to check if this *ListenerInfo* instance is valid, or if it has been constructed using the default constructor.

**Return** `true` if this listener object is valid, `false` otherwise.

*BundleContext* **GetBundleContext** () const

Return the context of the bundle which added the listener.

**Return** The context of the bundle which added the listener.

std::string **GetFilter** () const

Return the filter string with which the listener was added.

**Return** The filter string with which the listener was added. This may be empty if the listener was added without a filter.

bool **IsRemoved** () const

Return the state of the listener for this addition and removal life cycle.

Initially this method will return `false` indicating the listener has been added but has not been removed. After the listener has been removed, this method must always return `true`.

There is an extremely rare case in which removed notification to *ServiceListenerHooks* can be made before added notification if two threads are racing to add and remove the same service listener. Because *ServiceListenerHooks* are called synchronously during service listener addition and removal, the CppMicroServices library cannot guarantee in-order delivery of added and removed notification for a given service listener. This method can be used to detect this rare occurrence.

**Return** `false` if the listener has not been removed, `true` otherwise.

bool **operator==** (*ListenerInfo* const &other) const

Compares this *ListenerInfo* to another *ListenerInfo*.

Two *ListenerInfos* are equal if they refer to the same listener for a given addition and removal life cycle. If the same listener is added again, it will have a different *ListenerInfo* which is not equal to this *ListenerInfo*.

**Return** `true` if the other object is a *ListenerInfo* object and both objects refer to the same listener for a given addition and removal life cycle.

### Parameters

- other: The object to compare against this *ListenerInfo*.

## Friends

friend **gr\_servicelistenerhook::std::hash< ServiceListenerHook::ListenerInfo >**

template<>

```
struct std::hash<cppmicroservices::ServiceListenerHook::ListenerInfo>
#include <ServiceListenerHook.h> <cppmicroservices/ServiceListenerHook.h>
```

Hash functor specialization for *ServiceListenerHook::ListenerInfo* objects.

### 15.1.19 ServiceObjects

```
template <class S>
```

```
class cppmicroservices::ServiceObjects
```

```
#include <cppmicroservices/ServiceObjects.h> Allows multiple service objects for a service to be obtained.
```

For services with *prototype* scope, multiple service objects for the service can be obtained. For services with *singleton* or *bundle* scope, only one, use-counted service object is available. *Any* unreleased service objects obtained from this *ServiceObjects* object are automatically released by the framework when the bundles associated with the *BundleContext* used to create this *ServiceObjects* object is stopped.

#### Template Parameters

- S: Type of Service.

Inherits from `cppmicroservices::ServiceObjectsBase`

#### Public Functions

```
ServiceObjects (ServiceObjects const &other)
```

```
ServiceObjects &operator= (ServiceObjects const &other)
```

```
ServiceObjects (ServiceObjects &&other)
```

```
ServiceObjects &operator= (ServiceObjects &&other)
```

```
std::shared_ptr<S> GetService () const
```

Returns a service object for the referenced service.

This *ServiceObjects* object can be used to obtain multiple service objects for the referenced service if the service has *prototype* scope. If the referenced service has *singleton* or *bundle* scope, this method behaves the same as calling the *BundleContext::GetService(const ServiceReferenceBase&)* method for the referenced service. That is, only one, use-counted service object is available from this *ServiceObjects* object.

This method will always return `nullptr` when the referenced service has been unregistered.

For a prototype scope service, the following steps are taken to get the service object:

1. If the referenced service has been unregistered, `nullptr` is returned.
2. The *PrototypeServiceFactory::GetService(const Bundle&, const ServiceRegistrationBase&)* method is called to create a service object for the caller.
3. If the service object (an instance of *InterfaceMap*) returned by the *PrototypeServiceFactory* object is empty, does not contain all the interfaces named when the service was registered or the *PrototypeServiceFactory* object throws an exception, `nullptr` is returned and a warning message is issued.
4. The service object is returned.



**Return** A `shared_ptr` to the service object. The returned `shared_ptr` is empty if the service is not registered, the service object returned by a *ServiceFactory* does not contain all the classes under which it was registered or the *ServiceFactory* threw an exception.

#### Exceptions

- `std::logic_error`: If the *BundleContext* used to create this *ServiceObjects* object is no longer valid.

*ServiceReference*<S> **GetServiceReference** () const  
Returns the *ServiceReference* for this *ServiceObjects* object.

**Return** The *ServiceReference* for this *ServiceObjects* object.

template <>

template<>

class cppmicroservices::ServiceObjects<void>

#include <cppmicroservices/ServiceObjects.h> Allows multiple service objects for a service to be obtained.

This is a specialization of the *ServiceObjects* class template for `void`, which maps to all service interface types.

See *ServiceObjects*

Inherits from `cppmicroservices::ServiceObjectsBase`

#### Public Functions

**ServiceObjects** (*ServiceObjects* const &other)

*ServiceObjects* &operator= (*ServiceObjects* const &other)

**ServiceObjects** (*ServiceObjects* &&other)

*ServiceObjects* &operator= (*ServiceObjects* &&other)

InterfaceMapConstPtr **GetService** () const

Returns a service object as a `InterfaceMap` instance for the referenced service.

This method is the same as *ServiceObjects*<S>::GetService() except for the return type. Further, this method will always return an empty `InterfaceMap` object when the referenced service has been unregistered.

**Return** A `InterfaceMapConstPtr` object for the referenced service, which is empty if the service is not registered, the `InterfaceMap` returned by a *ServiceFactory* does not contain all the classes under which the service object was registered or the *ServiceFactory* threw an exception.

See *ServiceObjects*<S>::GetService()

#### Exceptions

- `std::logic_error`: If the *BundleContext* used to create this *ServiceObjects* object is no longer valid.

*ServiceReferenceU* **GetServiceReference** () const  
Returns the *ServiceReference* for this *ServiceObjects* object.

**Return** The *ServiceReference* for this *ServiceObjects* object.

## 15.1.20 ServiceReference

**typedef** *ServiceReference*<void> cppmicroservices::ServiceReferenceU

A service reference of unknown type, which is not bound to any interface identifier.

std::ostream &cppmicroservices::operator<< (std::ostream &os, *ServiceReferenceBase* const &serviceRef)

Writes a string representation of serviceRef to the stream os.

**template** <class S>

**class** cppmicroservices::ServiceReference

#include <cppmicroservices/ServiceReference.h> A reference to a service.

The framework returns *ServiceReference* objects from the *BundleContext::GetServiceReference* and *BundleContext::GetServiceReferences* methods.

A *ServiceReference* object may be shared between bundles and can be used to examine the properties of the service and to get the service object.

Every service registered in the framework has a unique *ServiceRegistration* object and may have multiple, distinct *ServiceReference* objects referring to it. *ServiceReference* objects associated with a *ServiceRegistration* are considered equal (more specifically, their *operator==()* method will return true when compared).

If the same service object is registered multiple times, *ServiceReference* objects associated with different *ServiceRegistration* objects are not equal.

See *BundleContext::GetServiceReference*

See *BundleContext::GetServiceReferences*

See *BundleContext::GetService*

### Template Parameters

- S: The class type of the service interface

Inherits from *cppmicroservices::ServiceReferenceBase*

### Public Types

template<>

using **ServiceType** = S

### Public Functions

**ServiceReference** ()

Creates an invalid *ServiceReference* object.

You can use this object in boolean expressions and it will evaluate to false.

**ServiceReference** (*ServiceReference* const&)

*ServiceReference* &**operator=** (*ServiceReference* const&)

**ServiceReference** (*ServiceReferenceBase* const &base)

**class** `cppmicroservices::ServiceReferenceBase`  
*#include <cppmicroservices/ServiceReferenceBase.h>* A reference to a service.

---

**Note:** This class is provided as public API for low-level service queries only. In almost all cases you should use the template `ServiceReference` instead.

---

Subclassed by `cppmicroservices::ServiceReference< S >`, `cppmicroservices::ServiceReference< cppmicroservices::service::cm::ConfigurationAdmin >`

## Public Functions

**ServiceReferenceBase** (*ServiceReferenceBase* const &ref)

**operator bool** () const

Converts this *ServiceReferenceBase* instance into a boolean expression.

If this instance was default constructed or the service it references has been unregistered, the conversion returns `false`, otherwise it returns `true`.

*ServiceReferenceBase* &**operator=** (std::nullptr\_t)

Releases any resources held or locked by this *ServiceReferenceBase* and renders it invalid.

**~ServiceReferenceBase** ()

*Any* **GetProperty** (std::string const &key) const

Returns the property value to which the specified property key is mapped in the properties *ServiceProperties* object of the service referenced by this *ServiceReferenceBase* object.

Property keys are case-insensitive.

This method continues to return property values after the service has been unregistered. This is so references to unregistered services can still be interrogated.

**Return** The property value to which the key is mapped; an invalid *Any* if there is no property named after the key.

### Parameters

- key: The property key.

void **GetPropertyKeys** (std::vector<std::string> &keys) const

Returns a list of the keys in the *ServiceProperties* object of the service referenced by this *ServiceReferenceBase* object.

This method will continue to return the keys after the service has been unregistered. This is so references to unregistered services can still be interrogated.

### Parameters

- keys: A vector being filled with the property keys.

std::vector<std::string> **GetPropertyKeys** () const

Returns a list of the keys in the *ServiceProperties* object of the service referenced by this *ServiceReferenceBase* object.

This method will continue to return the keys after the service has been unregistered. This is so references to unregistered services can still be interrogated.

**Return** A vector being filled with the property keys.

*Bundle* **GetBundle () const**

Returns the bundle that registered the service referenced by this *ServiceReferenceBase* object.

This method must return an invalid bundle when the service has been unregistered. This can be used to determine if the service has been unregistered.

**Return** The bundle that registered the service referenced by this *ServiceReferenceBase* object; an invalid bundle if that service has already been unregistered.

**See** BundleContext::RegisterService(const InterfaceMap&, const ServiceProperties&)

**See** *Bundle::operator bool() const*

std::vector<*Bundle*> **GetUsingBundles () const**

Returns the bundles that are using the service referenced by this *ServiceReferenceBase* object.

Specifically, this method returns the bundles whose usage count for that service is greater than zero.

**Return** A list of bundles whose usage count for the service referenced by this *ServiceReferenceBase* object is greater than zero.

std::string **GetInterfaceId () const**

Returns the interface identifier this *ServiceReferenceBase* object is bound to.

A default constructed *ServiceReferenceBase* object is not bound to any interface identifier and calling this method will return an empty string.

**Return** The interface identifier for this *ServiceReferenceBase* object.

bool **IsConvertibleTo (std::string const &interfaceid) const**

Checks whether this *ServiceReferenceBase* object can be converted to another *ServiceReferenceBase* object, which will be bound to the given interface identifier.

*ServiceReferenceBase* objects can be converted if the underlying service implementation was registered under multiple service interfaces.

**Return** true if this *ServiceReferenceBase* object can be converted, false otherwise.

**Parameters**

- interfaceid:

bool **operator< (ServiceReferenceBase const &reference) const**

Compares this *ServiceReferenceBase* with the specified *ServiceReferenceBase* for order.

If this *ServiceReferenceBase* and the specified *ServiceReferenceBase* have the same *service id* they are equal. This *ServiceReferenceBase* is less than the specified *ServiceReferenceBase* if it has a lower *service ranking* and greater if it has a higher service ranking. Otherwise, if this *ServiceReferenceBase* and the specified *ServiceReferenceBase* have the same *service ranking*, this *ServiceReferenceBase* is less than the specified *ServiceReferenceBase* if it has a higher *service id* and greater if it has a lower service id.

**Return** Returns a false or true if this *ServiceReferenceBase* is less than or greater than the specified *ServiceReferenceBase*.

**Parameters**

- reference: The *ServiceReferenceBase* to be compared.

```
bool operator==(ServiceReferenceBase const &reference) const
ServiceReferenceBase &operator=(ServiceReferenceBase const &reference)
```

## Friends

```
friend gr_servicereference:::std::hash< ServiceReferenceBase >
```

```
template<>
struct std::hash<cppmicroservices::ServiceReferenceBase>
#include <ServiceReferenceBase.h> <cppmicroservices/ServiceReferenceBase.h>
```

Hash functor specialization for *ServiceReferenceBase* objects.

## 15.1.21 ServiceRegistration

```
template <class I1, class... Interfaces>
class cppmicroservices::ServiceRegistration
#include <cppmicroservices/ServiceRegistration.h> A registered service.
```

The framework returns a *ServiceRegistration* object when a *BundleContext::RegisterService()* method invocation is successful. The *ServiceRegistration* object is for the private use of the registering bundle and should not be shared with other bundles.

The *ServiceRegistration* object may be used to update the properties of the service or to unregister the service.

See *BundleContext::RegisterService()*

### Template Parameters

- I1: Class type of the first service interface
- Interfaces: Template parameter pack containing zero or more service interfaces

Inherits from *cppmicroservices::ServiceRegistrationBase*

## Public Functions

```
ServiceRegistration()
```

Creates an invalid *ServiceRegistration* object.

You can use this object in boolean expressions and it will evaluate to *false*.

```
template <class Interface>
ServiceReference<Interface> GetReference() const
```

Returns a *ServiceReference* object for a service being registered.

The *ServiceReference* object may be shared with other bundles.

**Return** *ServiceReference* object.

### Exceptions

- `std::logic_error`: If this *ServiceRegistration* object has already been unregistered or if it is invalid.

*ServiceReference*<II> **GetReference()** **const**

Returns a *ServiceReference* object for a service being registered.

The *ServiceReference* object refers to the first interface type and may be shared with other bundles.

**Return** *ServiceReference* object.

**Exceptions**

- `std::logic_error`: If this *ServiceRegistration* object has already been unregistered or if it is invalid.

**class** `cppmicroservices::ServiceRegistrationBase`

*#include <cppmicroservices/ServiceRegistrationBase.h>* A registered service.

The framework returns a *ServiceRegistrationBase* object when a *BundleContext::RegisterService()* method invocation is successful. The *ServiceRegistrationBase* object is for the private use of the registering bundle and should not be shared with other bundles.

The *ServiceRegistrationBase* object may be used to update the properties of the service or to unregister the service.

---

**Note:** This class is provided as public API for low-level service management only. In almost all cases you should use the template *ServiceRegistration* instead.

---

See *BundleContext::RegisterService()*

Subclassed by *cppmicroservices::ServiceRegistration*< II, Interfaces >, *cppmicroservices::ServiceRegistration*< *cppmicroservices::HttpServlet* >

**Public Functions**

**ServiceRegistrationBase** (*ServiceRegistrationBase* **const** &reg)

**ServiceRegistrationBase** (*ServiceRegistrationBase* &&reg)

**operator bool()** **const**

A boolean conversion operator converting this *ServiceRegistrationBase* object to `true` if it is valid and to `false` otherwise.

A *ServiceRegistrationBase* object is invalid if it was default-constructed or was invalidated by assigning 0 to it.

See *operator=(std::nullptr\_t)*

**Return** `true` if this *ServiceRegistrationBase* object is valid, `false` otherwise.

*ServiceRegistrationBase* &**operator=** (std::nullptr\_t)

Releases any resources held or locked by this *ServiceRegistrationBase* and renders it invalid.

**Return** This *ServiceRegistrationBase* object.

**~ServiceRegistrationBase()**

*ServiceReferenceBase* **GetReference** (std::string const &interfaceId = std::string()) const

Returns a *ServiceReferenceBase* object for a service being registered.

The *ServiceReferenceBase* object may be shared with other bundles.

**Return** *ServiceReference* object.

#### Exceptions

- std::logic\_error: If this *ServiceRegistrationBase* object has already been un-registered or if it is invalid.

void **SetProperties** (ServiceProperties const &properties)

Updates the properties associated with a service.

The *Constants::OBJECTCLASS* and *Constants::SERVICE\_ID* keys cannot be modified by this method. These values are set by the framework when the service is registered in the environment.

The following steps are taken to modify service properties:

1. The service's properties are replaced with the provided properties.
2. A service event of type *ServiceEvent::SERVICE\_MODIFIED* is fired.

#### Parameters

- properties: The properties for this service. See ServiceProperties for a list of standard service property keys. Changes should not be made to this object after calling this method. To update the service's properties this method should be called again.

#### Exceptions

- std::logic\_error: If this *ServiceRegistrationBase* object has already been un-registered or if it is invalid.
- std::invalid\_argument: If properties contains case variants of the same key name or if the number of the keys of properties exceeds the value returned by std::numeric\_limits<int>::max().

void **Unregister** ()

Unregisters a service.

Remove a *ServiceRegistrationBase* object from the framework service registry. All *ServiceRegistrationBase* objects associated with this *ServiceRegistrationBase* object can no longer be used to interact with the service once unregistration is complete.

The following steps are taken to unregister a service:

1. The service is removed from the framework service registry so that it can no longer be obtained.
2. A service event of type *ServiceEvent::SERVICE\_UNREGISTERING* is fired so that bundles using this service can release their use of the service. Once delivery of the service event is complete, the *ServiceRegistrationBase* objects for the service may no longer be used to get a service object for the service.
3. For each bundle whose use count for this service is greater than zero: The bundle's use count for this service is set to zero. If the service was registered with a *ServiceFactory* object, the *ServiceFactory::UngetService* method is called to release the service object for the bundle.

#### Exceptions

- `std::logic_error`: If this *ServiceRegistrationBase* object has already been un-registered or if it is invalid.

**bool operator< (ServiceRegistrationBase const &o) const**  
 Compare two *ServiceRegistrationBase* objects.

If both *ServiceRegistrationBase* objects are valid, the comparison is done using the underlying *ServiceReference* object. Otherwise, this *ServiceRegistrationBase* object is less than the other object if and only if this object is invalid and the other object is valid.

**Return** true if this *ServiceRegistrationBase* object is less than the other object.

**Parameters**

- `o`: The *ServiceRegistrationBase* object to compare with.

**bool operator==(ServiceRegistrationBase const &registration) const**  
*ServiceRegistrationBase &operator=(ServiceRegistrationBase const &registration)*  
*ServiceRegistrationBase &operator=(ServiceRegistrationBase &&registration)*

**Friends**

**friend gr\_serviceregistration::std::hash< ServiceRegistrationBase >**

**template<>**  
**struct std::hash<cppmicroservices::ServiceRegistrationBase>**  
*#include <ServiceRegistrationBase.h> <cppmicroservices/ServiceRegistrationBase.h>*  
 Hash functor specialization for *ServiceRegistrationBase* objects.

## 15.1.22 ServiceTracker

**template <class S, class T = S>**  
**class cppmicroservices::ServiceTracker**  
*#include <cppmicroservices/ServiceTracker.h>* The *ServiceTracker* class simplifies using services from the framework's service registry.

A *ServiceTracker* object is constructed with search criteria and a *ServiceTrackerCustomizer* object. A *ServiceTracker* can use a *ServiceTrackerCustomizer* to customize the service objects to be tracked. The *ServiceTracker* can then be opened to begin tracking all services in the framework's service registry that match the specified search criteria. The *ServiceTracker* correctly handles all of the details of listening to *ServiceEvents* and getting and ungetting services.

The `GetServiceReferences` method can be called to get references to the services being tracked. The `GetService` and `GetServices` methods can be called to get the service objects for the tracked service.

Customization of the services to be tracked requires the tracked type to be default constructible and convertible to `bool`. To customize a tracked service using a custom type with value-semantics like

```
struct MyTrackedClass
{
    explicit operator bool() const { return true; }
    /* ... */
};
```



a custom *ServiceTrackerCustomizer* is required. It provides code to associate the tracked service with the custom tracked type:

```
struct MyTrackingCustomizer : public ServiceTrackerCustomizer<IFooService,
↳MyTrackedClass>
{
    virtual std::shared_ptr<MyTrackedClass>
    AddingService(ServiceReference<IFooService> const&)
    {
        return std::shared_ptr<MyTrackedClass>();
    }

    virtual void
    ModifiedService(ServiceReference<IFooService> const&, std::shared_ptr
↳<MyTrackedClass> const&)
    {
    }

    virtual void
    RemovedService(ServiceReference<IFooService> const&, std::shared_ptr
↳<MyTrackedClass> const&)
    {
    }
};
```

Instantiation of a *ServiceTracker* with the custom customizer looks like this:

```
MyTrackingCustomizer myCustomizer;
ServiceTracker<IFooService, MyTrackedClass> tracker(GetBundleContext(), &
↳myCustomizer);
```

**Note** The *ServiceTracker* class is thread-safe. It does not call a *ServiceTrackerCustomizer* while holding any locks. *ServiceTrackerCustomizer* implementations must also be thread-safe.

**Remark** This class is thread safe.

### Template Parameters

- S: The type of the service being tracked. The type S\* must be an assignable datatype.
- T: The tracked object.

Inherits from *cppmicroservices::ServiceTrackerCustomizer< S, T >*

### Public Types

template<>

using **TrackedParamType** = typename *ServiceTrackerCustomizer*::TrackedParamType

The type of the tracked object.

template<>

using **TrackingMap** = std::unordered\_map<*ServiceReference*<S>, std::shared\_ptr<*TrackedParamType*>>

## Public Functions

### `~ServiceTracker()`

Automatically closes the *ServiceTracker*

### `ServiceTracker(BundleContext const &context, ServiceReference<S> const &reference, ServiceTrackerCustomizer<S, T> *customizer = nullptr)`

Create a *ServiceTracker* on the specified *ServiceReference*.

The service referenced by the specified *ServiceReference* will be tracked by this *ServiceTracker*.

#### Parameters

- context: The *BundleContext* against which the tracking is done.
- reference: The *ServiceReference* for the service to be tracked.
- customizer: The customizer object to call when services are added, modified, or removed in this *ServiceTracker*. If customizer is null, then this *ServiceTracker* will be used as the *ServiceTrackerCustomizer* and this *ServiceTracker* will call the *ServiceTrackerCustomizer* methods on itself.

### `ServiceTracker(BundleContext const &context, std::string const &clazz, ServiceTrackerCustomizer<S, T> *customizer = nullptr)`

Create a *ServiceTracker* on the specified class name.

Services registered under the specified class name will be tracked by this *ServiceTracker*.

#### Parameters

- context: The *BundleContext* against which the tracking is done.
- clazz: The class name of the services to be tracked.
- customizer: The customizer object to call when services are added, modified, or removed in this *ServiceTracker*. If customizer is null, then this *ServiceTracker* will be used as the *ServiceTrackerCustomizer* and this *ServiceTracker* will call the *ServiceTrackerCustomizer* methods on itself.

### `ServiceTracker(BundleContext const &context, LDAPFilter const &filter, ServiceTrackerCustomizer<S, T> *customizer = nullptr)`

Create a *ServiceTracker* on the specified *LDAPFilter* object.

Services which match the specified *LDAPFilter* object will be tracked by this *ServiceTracker*.

#### Parameters

- context: The *BundleContext* against which the tracking is done.
- filter: The *LDAPFilter* to select the services to be tracked.
- customizer: The customizer object to call when services are added, modified, or removed in this *ServiceTracker*. If customizer is null, then this *ServiceTracker* will be used as the *ServiceTrackerCustomizer* and this *ServiceTracker* will call the *ServiceTrackerCustomizer* methods on itself.

**ServiceTracker** (*BundleContext* const &context, *ServiceTrackerCustomizer*<S, T> \*customizer = nullptr)

Create a *ServiceTracker* on the class template argument S.

Services registered under the interface name of the class template argument S will be tracked by this *ServiceTracker*.

#### Parameters

- context: The *BundleContext* against which the tracking is done.
- customizer: The customizer object to call when services are added, modified, or removed in this *ServiceTracker*. If customizer is null, then this *ServiceTracker* will be used as the *ServiceTrackerCustomizer* and this *ServiceTracker* will call the *ServiceTrackerCustomizer* methods on itself.

#### Exceptions

- *ServiceException*: If the service interface name is empty.

**virtual void Open ()**

Open this *ServiceTracker* and begin tracking services.

Services which match the search criteria specified when this *ServiceTracker* was created are now tracked by this *ServiceTracker*.

#### Exceptions

- `std::runtime_error`: If the *BundleContext* with which this *ServiceTracker* was created is no longer valid.
- `std::runtime_error`: If the LDAP filter used to construct the *ServiceTracker* contains an invalid filter expression that cannot be parsed.

**virtual void Close ()**

Close this *ServiceTracker*.

This method should be called when this *ServiceTracker* should end the tracking of services.

This implementation calls *GetServiceReferences()* to get the list of tracked services to remove.

#### Exceptions

- `std::runtime_error`: If the *BundleContext* with which this *ServiceTracker* was created is no longer valid.

`std::shared_ptr<TrackedParamType> WaitForService ()`

Wait for at least one service to be tracked by this *ServiceTracker*.

This method will also return when this *ServiceTracker* is closed.

It is strongly recommended that *WaitForService* is not used during the calling of the *BundleActivator* methods. *BundleActivator* methods are expected to complete in a short period of time.

This implementation calls *GetService()* to determine if a service is being tracked.

**Return** The result of *GetService()*.

**template** <class Rep, class Period>

```
std::shared_ptr<TrackedParamType> WaitForService (std::chrono::duration<Rep, Period> const
&rel_time)
```

Wait for at least one service to be tracked by this *ServiceTracker*.

This method will also return when this *ServiceTracker* is closed.

It is strongly recommended that `WaitForService` is not used during the calling of the *BundleActivator* methods. *BundleActivator* methods are expected to complete in a short period of time.

This implementation calls *GetService()* to determine if a service is being tracked.

**Return** The result of *GetService()*.

#### Parameters

- `rel_time`: The relative time duration to wait for a service. If zero, the method will wait indefinitely.

#### Exceptions

- `std::invalid_argument`: exception if `rel_time` is negative.

```
virtual std::vector<ServiceReference<S>> GetServiceReferences () const
```

Return a list of *ServiceReferences* for all services being tracked by this *ServiceTracker*.

**Return** A list of *ServiceReference* objects.

```
virtual ServiceReference<S> GetServiceReference () const
```

Returns a *ServiceReference* for one of the services being tracked by this *ServiceTracker*.

If multiple services are being tracked, the service with the highest ranking (as specified in its `service.ranking` property) is returned. If there is a tie in ranking, the service with the lowest service ID (as specified in its `service.id` property); that is, the service that was registered first is returned. This is the same algorithm used by *BundleContext::GetServiceReference()*.

This implementation calls *GetServiceReferences()* to get the list of references for the tracked services.

**Return** A *ServiceReference* for a tracked service.

#### Exceptions

- *ServiceException*: if no services are being tracked.

```
virtual std::shared_ptr<TrackedParamType> GetService (ServiceReference<S> const &reference)
const
```

Returns the service object for the specified *ServiceReference* if the specified referenced service is being tracked by this *ServiceTracker*.

**Return** A service object or `nullptr` if the service referenced by the specified *ServiceReference* is not being tracked.

#### Parameters

- `reference`: The reference to the desired service.

```
virtual std::vector<std::shared_ptr<TrackedParamType>> GetServices () const
```

Return a list of service objects for all services being tracked by this *ServiceTracker*.

This implementation calls *GetServiceReferences()* to get the list of references for the tracked services and then calls *GetService(const ServiceReference&)* for each reference to get the tracked service object.

**Return** A list of service objects or an empty list if no services are being tracked.

**virtual** std::shared\_ptr<TrackedParamType> **GetService** () **const**

Returns a service object for one of the services being tracked by this *ServiceTracker*.

If any services are being tracked, this implementation returns the result of calling `GetService(GetServiceReference())`.

**Return** A service object or null if no services are being tracked.

**virtual** void **Remove** (*ServiceReference*<S> **const** &reference)

Remove a service from this *ServiceTracker*.

The specified service will be removed from this *ServiceTracker*. If the specified service was being tracked then the *ServiceTrackerCustomizer::RemovedService* method will be called for that service.

#### Parameters

- reference: The reference to the service to be removed.

**virtual** int **Size** () **const**

Return the number of services being tracked by this *ServiceTracker*.

**Return** The number of services being tracked.

**virtual** int **GetTrackingCount** () **const**

Returns the tracking count for this *ServiceTracker*.

The tracking count is initialized to 0 when this *ServiceTracker* is opened. Every time a service is added, modified or removed from this *ServiceTracker*, the tracking count is incremented.

The tracking count can be used to determine if this *ServiceTracker* has added, modified or removed a service by comparing a tracking count value previously collected with the current tracking count value. If the value has not changed, then no service has been added, modified or removed from this *ServiceTracker* since the previous tracking count was collected.

**Return** The tracking count for this *ServiceTracker* or -1 if this *ServiceTracker* is not open.

**virtual** void **GetTracked** (TrackingMap &tracked) **const**

Return a sorted map of the *ServiceReferences* and service objects for all services being tracked by this *ServiceTracker*.

The map is sorted in natural order of *ServiceReference*. That is, the last entry is the service with the highest ranking and the lowest service id.

#### Parameters

- tracked: A TrackingMap with the *ServiceReferences* and service objects for all services being tracked by this *ServiceTracker*. If no services are being tracked, then the returned map is empty.

**virtual** bool **IsEmpty** () **const**

Return if this *ServiceTracker* is empty.

**Return** true if this *ServiceTracker* is not tracking any services.

## Protected Functions

std::shared\_ptr<TrackedParamType> **AddingService** (*ServiceReference*<S> const &reference)

Default implementation of the *ServiceTrackerCustomizer::AddingService* method.

This method is only called when this *ServiceTracker* has been constructed with a nullptr *ServiceTrackerCustomizer* argument.

This implementation returns the result of calling *GetService* on the *BundleContext* with which this *ServiceTracker* was created passing the specified *ServiceReference*.

This method can be overridden in a subclass to customize the service object to be tracked for the service being added. In that case, take care not to rely on the default implementation of *RemovedService* to unget the service.

**Return** The service object to be tracked for the service added to this *ServiceTracker*.

**See** *ServiceTrackerCustomizer::AddingService(const ServiceReference&)*

### Parameters

- *reference*: The reference to the service being added to this *ServiceTracker*.

### Exceptions

- *std::runtime\_error*: If this *BundleContext* is no longer valid.
- *std::invalid\_argument*: If the specified *ServiceReference* is invalid (default constructed).

void **ModifiedService** (*ServiceReference*<S> const &reference, std::shared\_ptr<TrackedParamType> const &service)

Default implementation of the *ServiceTrackerCustomizer::ModifiedService* method.

This method is only called when this *ServiceTracker* has been constructed with a nullptr *ServiceTrackerCustomizer* argument.

This implementation does nothing.

**See** *ServiceTrackerCustomizer::ModifiedService(const ServiceReference&, TrackedArgType)*

### Parameters

- *reference*: The reference to modified service.
- *service*: The service object for the modified service.

void **RemovedService** (*ServiceReference*<S> const &reference, std::shared\_ptr<TrackedParamType> const &service)

Default implementation of the *ServiceTrackerCustomizer::RemovedService* method.

This method is only called when this *ServiceTracker* has been constructed with a nullptr *ServiceTrackerCustomizer* argument.

This method can be overridden in a subclass. If the default implementation of the *AddingService* method was used, this method must unget the service.

**See** *ServiceTrackerCustomizer::RemovedService(const ServiceReferenceType&, TrackedArgType)*

### Parameters

- *reference*: The reference to removed service.

- `service`: The service object for the removed service.

```
template <class S, class T = S>
```

```
struct cppmicroservices::ServiceTrackerCustomizer
```

`#include <cppmicroservices/ServiceTrackerCustomizer.h>` The *ServiceTrackerCustomizer* interface allows a *ServiceTracker* to customize the service objects that are tracked.

A *ServiceTrackerCustomizer* is called when a service is being added to a *ServiceTracker*. The *ServiceTrackerCustomizer* can then return an object for the tracked service. A *ServiceTrackerCustomizer* is also called when a tracked service is modified or has been removed from a *ServiceTracker*.

The methods in this interface may be called as the result of a *ServiceEvent* being received by a *ServiceTracker*. Since *ServiceEvents* are synchronously delivered, it is highly recommended that implementations of these methods do not register (*BundleContext::RegisterService*), modify (*ServiceRegistration::SetProperties*) or unregister (*ServiceRegistration::Unregister*) a service while being synchronized on any object.

**Note** The *ServiceTracker* class implementation of *ServiceTrackerCustomizer* is thread-safe. It does not call a *ServiceTrackerCustomizer* while holding any locks. *ServiceTrackerCustomizer* implementations must also be thread-safe.

**Remark** *ServiceTrackerCustomizer* implementations must also be thread-safe.

#### Template Parameters

- `S`: The type of the service being tracked
- `T`: The type of the tracked object. The default is `S`.

Subclassed by *cppmicroservices::ServiceTracker< S, T >*

#### Public Types

```
template<>
```

```
using TrackedParamType = typename TypeTraits::TrackedParamType
```

#### Public Functions

```
virtual ~ServiceTrackerCustomizer()
```

```
virtual std::shared_ptr<TrackedParamType> AddingService (ServiceReference<S> const &reference) = 0
```

A service is being added to the *ServiceTracker*.

This method is called before a service which matched the search parameters of the *ServiceTracker* is added to the *ServiceTracker*. This method should return the service object to be tracked for the specified *ServiceReference*. The returned service object is stored in the *ServiceTracker* and is available from the *GetService* and *GetServices* methods.

**Return** The service object to be tracked for the specified referenced service or 0 if the specified referenced service should not be tracked.

#### Parameters

- `reference`: The reference to the service being added to the *ServiceTracker*.

```
virtual void ModifiedService (ServiceReference<S> const &reference,
                             std::shared_ptr<TrackedParamType> const &service) = 0
```

A service tracked by the *ServiceTracker* has been modified.

This method is called when a service being tracked by the *ServiceTracker* has had its properties modified.

#### Parameters

- *reference*: The reference to the service that has been modified.
- *service*: The service object for the specified referenced service.

```
virtual void RemovedService (ServiceReference<S> const &reference,
                             std::shared_ptr<TrackedParamType> const &service) = 0
```

A service tracked by the *ServiceTracker* has been removed.

This method is called after a service is no longer being tracked by the *ServiceTracker*.

#### Parameters

- *reference*: The reference to the service that has been removed.
- *service*: The service object for the specified referenced service.

```
struct TypeTraits
    #include <cppmicroservices/ServiceTrackerCustomizer.h>
```

### Public Types

```
template<>
using ServiceType = S

template<>
using TrackedType = T

template<>
using TrackedParamType = T
```

### Public Static Functions

```
template<>
static std::shared_ptr<TrackedType> ConvertToTrackedType (std::shared_ptr<S> const&)
```

## 15.2 Utilities

These classes support the main CppMicroServices API:

### 15.2.1 Any

```
template <typename ValueType>
```



ValueType \*cppmicroservices::any\_cast (Any \*operand)  
any\_cast operator used to extract the ValueType from an Any\*.

Will return a pointer to the stored value.

Example Usage:

```
MyType* pTmp = any_cast<MyType*>(pAny)
```

Will return nullptr if the cast fails, i.e. types don't match.

**template <typename ValueType>**

ValueType const \*cppmicroservices::any\_cast (Any const \*operand)  
any\_cast operator used to extract a const ValueType pointer from an const Any\*.

Will return a const pointer to the stored value.

Example Usage:

```
const MyType* pTmp = any_cast<MyType*>(pAny)
```

Will return nullptr if the cast fails, i.e. types don't match.

**template <typename ValueType>**

ValueType cppmicroservices::any\_cast (Any const &operand)  
any\_cast operator used to extract a copy of the ValueType from an const Any&.

Example Usage:

```
MyType tmp = any_cast<MyType>(anAny)
```

Dont use an any\_cast in combination with references, i.e. MyType& tmp = ... or const MyType& = ... Some compilers will accept this code although a copy is returned. Use the ref\_any\_cast in these cases.

#### Exceptions

- *BadAnyCastException*: if the cast fails.

**template <typename ValueType>**

ValueType cppmicroservices::any\_cast (Any &operand)  
any\_cast operator used to extract a copy of the ValueType from an Any&.

Example Usage:

```
MyType tmp = any_cast<MyType>(anAny)
```

Dont use an any\_cast in combination with references, i.e. MyType& tmp = ... or const MyType& tmp = ... Some compilers will accept this code although a copy is returned. Use the ref\_any\_cast in these cases.

#### Exceptions

- *BadAnyCastException*: if the cast fails.

**template <typename ValueType>**

ValueType const &cppmicroservices::ref\_any\_cast (Any const &operand)  
ref\_any\_cast operator used to return a const reference to the internal data.

Example Usage:

```
const MyType& tmp = ref_any_cast<MyType>(anAny);
```

#### Exceptions

- *BadAnyCastException*: if the cast fails.

**template** <typename ValueType>

ValueType &cppmicroservices::ref\_any\_cast (Any &operand)

ref\_any\_cast operator used to return a reference to the internal data.

Example Usage:

```
MyType& tmp = ref_any_cast<MyType>(anAny);
```

### Exceptions

- *BadAnyCastException*: if the cast fails.

**class** cppmicroservices::Any

#include <cppmicroservices/Any.h> An *Any* class represents a general type and is capable of storing any type, supporting type-safe extraction of the internally stored data.

Code taken from the Boost 1.46.1 library. Original copyright by Kevlin Henney. Modified for CppMicroServices.

### Public Functions

**Any** ()

Creates an empty any type.

**template** <typename ValueType>

**Any** (ValueType const &value)

Creates an *Any* which stores the init parameter inside.

Example:

```
Any a(13);
Any a(string("12345"));
```

### Parameters

- value: The content of the *Any*

**Any** (Any const &other)

Copy constructor, works with empty Anys and initialized *Any* values.

### Parameters

- other: The *Any* to copy

**Any** (Any &&other)

Move constructor.

### Parameters

- other: The *Any* to move

*Any* &Swap (Any &rhs)

Swaps the content of the two Anys.

### Parameters

- rhs: The *Any* to swap this *Any* with.

**template <typename ValueType>**  
**bool operator== (ValueType const &val) const**  
 Compares this *Any* with another value.

If the internal type of this any and of `val` do not match, the comparison always returns false.

**Return** `true` if this *Any* contains value `val`, `false` otherwise.

#### Parameters

- val: The value to compare to.

**bool operator== (Any const &rhs) const**  
 Compares this *Any* with another *Any*.

We accomplish this by forwarding the call to a virtual compare function on the Holder of the value in the `_content` field. The Placeholder subclass of Holder provides an implementation that invokes the above `operator==` with the underlying value of `ValueType`.

**Return** `bool` return true if rhs compares equal to `*this` AND the underlying `ValueType` has an `operator==`, and return false otherwise.

#### Parameters

- rhs: an *Any* to compare against

**template <typename ValueType>**  
**bool operator!= (ValueType const &val) const**  
 Compares this *Any* with another value for inequality.

This is the same as

```
!this->operator==(val)
```

**Return** `true` if this *Any* does not contain value `val`, `false` otherwise.

#### Parameters

- val: The value to compare to.

**template <typename ValueType>**  
*Any* &**operator= (ValueType const &rhs)**  
 Assignment operator for all types `!= Any`.

Example:

```
Any a = 13;  
Any a = string("12345");
```

#### Parameters

- rhs: The value which should be assigned to this *Any*.

*Any* &**operator= (Any const &rhs)**  
 Assignment operator for *Any*.

#### Parameters

- rhs: The *Any* which should be assigned to this *Any*.

*Any* &operator= (*Any* &&*rhs*)

Move assignment operator for *Any*.

**Return** A reference to this *Any*.

#### Parameters

- *rhs*: The *Any* which should be moved into this *Any*.

bool **Empty** () const

returns true if the *Any* is empty

std::string **ToString** () const

Returns a string representation for the content if it is not empty.

Custom types should either provide a `std::ostream& operator<<(std::ostream& os, const CustomType& ct)` function or specialize the `any_value_to_string` template function for meaningful output.

#### Exceptions

- `std::logic_error`: if the *Any* is empty.

std::string **ToStringNoExcept** () const

Returns a string representation for the content.

If the *Any* is empty, an empty string is returned.

Custom types should either provide a `std::ostream& operator<<(std::ostream& os, const CustomType& ct)` function or specialize the `any_value_to_string` template function for meaningful output.

std::string **ToJSON** (const uint8\_t *increment*, const int32\_t *indent*) const

Returns a JSON representation for the content.

Custom types should specialize the `any_value_to_json` template function for meaningful output. The values of `increment` and `indent` are passed around to be able to be used for nicer formatting. The code that makes use of this is in the `any_value_to_json` specializations for the various containers.

To get pretty output, simply pass a value greater than zero in as the first argument of `ToJSON` and the rest of the code will take care of things.

#### Parameters

- *increment*: The amount of extra indentation to add for each level of JSON. An increment of zero indicates no special formatting
- *indent*: The current amount of indent to apply to the current line.

std::string **ToJSON** (bool *prettyPrint* = false) const

std::type\_info const &**Type** () const

Returns the type information of the stored content.

If the *Any* is empty `typeid(void)` is returned. It is suggested to always query an *Any* for its type info before trying to extract data via an `any_cast/ref_any_cast`.

**class** `cppmicroservices::BadAnyCastException`  
`#include <cppmicroservices/Any.h>` The *BadAnyCastException* class is thrown in case of casting an *Any* instance.

Inherits from `std::bad_cast`

### Public Functions

**BadAnyCastException** (`std::string msg = ""`)

**~BadAnyCastException** ()

char const \***what** () const

## 15.2.2 AnyMap

**class** `cppmicroservices::AnyMap`

A map data structure with support for compound keys.

This class adds convenience functions on top of the *any\_map* class. The *any\_map* is a recursive data structure, and its values can be retrieved via standard map functions or by using a dotted key notation specifying a compound key.

See *any\_map*

Inherits from `cppmicroservices::any_map`

### Public Functions

**AnyMap** (`map_type type`)

**AnyMap** (`ordered_any_map const &m`)

**AnyMap** (`ordered_any_map &&m`)

**AnyMap** (`unordered_any_map const &m`)

**AnyMap** (`unordered_any_map &&m`)

**AnyMap** (`unordered_any_cimap const &m`)

**AnyMap** (`unordered_any_cimap &&m`)

map\_type **GetType** () const

Get the underlying STL container type.

**Return** The STL container type holding the map data.

mapped\_type const &**AtCompoundKey** (`key_type const &key`) const

Get a key's value, using a compound key notation.

A compound key consists of one or more key names, concatenated with the '.' (dot) character. Each key except the last requires the referenced *Any* object to be of type *AnyMap* or `std::vector<Any>`. Containers of type `std::vector<Any>` are indexed using 0-based numerical key names.

For example, a *AnyMap* object holding data of the following layout

```
{
  one: 1,
  two: "two",
  three: {
    a: "anton",
    b: [ 3, 8 ]
  }
}
```

can be queried using the following notation:

```
map.AtCompoundKey("one");           // returns Any(1)
map.AtCompoundKey("three.a");       // returns Any(std::string("anton"))
map.AtCompoundKey("three.b.1");     // returns Any(8)
```

**Return** A reference to the key's value.

#### Parameters

- **key:** The key hierarchy to query.

#### Exceptions

- `std::invalid_argument`: if the *Any* value for a given key is not of type *AnyMap* or `std::vector<Any>`.
- `std::out_of_range`: if the key is not found or a numerical index would fall out of the range of an `int` type.

mapped\_type **AtCompoundKey**(key\_type **const** &key, mapped\_type *defaultValue*) **const**

Return a key's value, using a compound key notation if the key is found in the map or return the provided default value if the key is not found.

A compound key consists of one or more key names, concatenated with the '.' (dot) character. Each key except the last requires the referenced *Any* object to be of type *AnyMap* or `std::vector<Any>`. Containers of type `std::vector<Any>` are indexed using 0-based numerical key names.

For example, a *AnyMap* object holding data of the following layout

```
{
  one: 1,
  two: "two",
  three: {
    a: "anton",
    b: [ 3, 8 ]
  }
}
```

can be queried using the following notation:

```
map.AtCompoundKey("one", Any());           // returns Any(1)
map.AtCompoundKey("four", Any());          // returns Any()
map.AtCompoundKey("three.a", Any());        // returns Any(std::string(
↪ "anton"))
map.AtCompoundKey("three.c", Any());        // returns Any()
map.AtCompoundKey("three.b.1", Any());      // returns Any(8)
map.AtCompoundKey("three.b.4", Any());      // returns Any()
```

**Return** A copy of the key's value.

**Parameters**

- `key`: The key hierarchy to query.
- `defaultValue`: is the value to be returned if the key is not found

**class** `cppmicroservices::any_map`

A map data structure which wraps different STL map types.

This is a convenience class providing a STL associative container interface for different underlying container types. Supported underlying types are

- `any_map::ordered_any_map` (a STL map)
- `any_map::unordered_any_map` (a STL unordered map)
- `any_map::unordered_any_cimap` (a STL unordered map with case insensitive key comparison)

This class provides most of the STL functions for associated containers, including forward iterators. It is typically not instantiated by clients directly, but obtained via framework API calls, returning an `AnyMap` sub-class instance.

See `AnyMap`

Subclassed by `cppmicroservices::AnyMap`

## Public Types

**enum** `map_type`

*Values:*

`ORDERED_MAP`

`UNORDERED_MAP`

`UNORDERED_MAP_CASEINSENSITIVE_KEYS`

**using** `key_type` = `std::string`

**using** `mapped_type` = `Any`

**using** `value_type` = `std::pair<const key_type, mapped_type>`

**using** `size_type` = `std::size_t`

**using** `difference_type` = `std::ptrdiff_t`

**using** `reference` = `value_type&`

**using** `const_reference` = `value_type const&`

**using** `pointer` = `value_type *`

**using** `const_pointer` = `value_type const *`

**using** `ordered_any_map` = `std::map<std::string, Any>`

**using** `unordered_any_map` = `std::unordered_map<std::string, Any>`

**using** `unordered_any_cimap` = `std::unordered_map<std::string, Any, detail::any_map_cihash, detail::any_map_ciequal>`

**using** `iterator` = `iter`

```
using const_iterator = const_iter
```

## Public Functions

```
any_map (map_type type)
any_map (ordered_any_map const &m)
any_map (ordered_any_map &&m)
any_map (unordered_any_map const &m)
any_map (unordered_any_map &&m)
any_map (unordered_any_cimap const &m)
any_map (unordered_any_cimap &&m)
any_map (any_map const &m)
any_map &operator= (any_map const &m)
any_map (any_map &&m)
any_map &operator= (any_map &&m)
~any_map ()
iter begin ()
const_iter begin () const
const_iter cbegin () const
iter end ()
const_iter end () const
const_iter cend () const
bool empty () const
size_type size () const
size_type count (key_type const &key) const
void clear ()
mapped_type &at (key_type const &key)
mapped_type const &at (key_type const &key) const
mapped_type &operator[] (key_type const &key)
mapped_type &operator[] (key_type &&key)
std::pair<iterator, bool> insert (value_type const &value)
template <class... Args>
std::pair<iterator, bool> emplace (Args&&... args)
```



*const\_iterator* **find** (*key\_type* const &key) const  
 return the iterator to the value referenced by key

*size\_type* **erase** (*key\_type* const &key)  
 Erase entry for value for 'key'.

**Return** the number of elements erased.

#### Parameters

- key: the key for the entry to Erase

bool **operator==** (*any\_map* const &rhs) const  
 Compare the content of this map with those of rhs.

**Return** bool true rhs contains the same content as this

#### Parameters

- rhs: an *any\_map* to compare

bool **operator!=** (*any\_map* const &rhs) const

## Public Members

*ordered\_any\_map* \*o

*unordered\_any\_map* \*uo

*unordered\_any\_cimap* \*uoci

## Protected Attributes

*map\_type* type

class **const\_iter**  
 Inherits from cppmicroservices::any\_map::iterator\_base

## Public Types

**using reference** = *any\_map::const\_reference*

**using pointer** = *any\_map::const\_pointer*

**using iterator** = *const\_iter*

## Public Functions

**const\_iter**()

**const\_iter** (*iterator* const &it)

**const\_iter** (*iter* const &it)

**~const\_iter**()

```

const_iter (ociter &&it)

const_iter (uociter &&it, iter_type type)

reference operator* () const

pointer operator-> () const

iterator &operator++ ()

iterator operator++ (int)

bool operator== (iterator const &x) const

bool operator!= (iterator const &x) const

```

## Public Members

```

ociter *o

uociter *uo

uocciiter *uoci

```

## class **iter**

Inherits from cppmicroservices::any\_map::iterator\_base

## Public Types

```

using reference = any_map::reference

using pointer = any_map::pointer

using iterator = iter

```

## Public Functions

```

iter ()

iter (iter const &it)

~iter ()

iter (oiter &&it)

iter (uoiter &&it, iter_type type)

reference operator* () const

pointer operator-> () const

iterator &operator++ ()

iterator operator++ (int)

bool operator== (iterator const &x) const

bool operator!= (iterator const &x) const

```

## Public Members

```
oiter *o
uoiter *uo
uociiter *uoci
```

### 15.2.3 BundleVersion

`std::ostream &cppmicroservices::operator<< (std::ostream &os, BundleVersion const &v)`  
Streams the string representation of *v* into the stream *os*, using *BundleVersion::ToString*.

**class** `cppmicroservices::BundleVersion`  
`#include <cppmicroservices/BundleVersion.h>` Version identifier for CppMicroServices bundles.

Version identifiers have four components.

1. Major version. A non-negative integer.
2. Minor version. A non-negative integer.
3. Micro version. A non-negative integer.
4. Qualifier. A text string. See *BundleVersion(const std::string&)* for the format of the qualifier string.

*BundleVersion* objects are immutable.

## Public Functions

**BundleVersion** (unsigned int *majorVersion*, unsigned int *minorVersion*, unsigned int *microVersion*)  
Creates a version identifier from the specified numerical components.

The qualifier is set to the empty string.

### Parameters

- *majorVersion*: Major component of the version identifier.
- *minorVersion*: Minor component of the version identifier.
- *microVersion*: Micro component of the version identifier.

**BundleVersion** (unsigned int *majorVersion*, unsigned int *minorVersion*, unsigned int *microVersion*, `std::string` *qualifier*)  
Creates a version identifier from the specified components.

### Parameters

- *majorVersion*: Major component of the version identifier.
- *minorVersion*: Minor component of the version identifier.
- *microVersion*: Micro component of the version identifier.
- *qualifier*: Qualifier component of the version identifier.

**BundleVersion** (std::string const &version)

Created a version identifier from the specified string.

Here is the grammar for version strings.

There must be no whitespace in version.

#### Parameters

- `version`: string representation of the version identifier.

**BundleVersion** (*BundleVersion* const &version)

Create a version identifier from another.

#### Parameters

- `version`: Another version identifier

bool **IsUndefined** () const

Returns the undefined state of this version identifier.

**Return** true if this version identifier is undefined, false otherwise.

unsigned int **GetMajor** () const

Returns the majorVersion component of this version identifier.

**Return** The majorVersion component.

unsigned int **GetMinor** () const

Returns the minorVersion component of this version identifier.

**Return** The minorVersion component.

unsigned int **GetMicro** () const

Returns the microVersion component of this version identifier.

**Return** The microVersion component.

std::string **GetQualifier** () const

Returns the qualifier component of this version identifier.

**Return** The qualifier component.

std::string **ToString** () const

Returns the string representation of this version identifier.

The format of the version string will be `majorVersion.minorVersion.microVersion` if qualifier is the empty string or `majorVersion.minorVersion.microVersion.qualifier` otherwise.

**Return** The string representation of this version identifier.

bool **operator==** (*BundleVersion* const &object) const

Compares this *BundleVersion* object to another object.

A version is considered to be **equal to** another version if the majorVersion, minorVersion and microVersion components are equal and the qualifier component is equal.

**Return** true if object is a *BundleVersion* and is equal to this object; false otherwise.

#### Parameters

- object: The *BundleVersion* object to be compared.

int **Compare** (*BundleVersion* const &object) const

Compares this *BundleVersion* object to another object.

A version is considered to be **less than** another version if its majorVersion component is less than the other version's majorVersion component, or the majorVersion components are equal and its minorVersion component is less than the other version's minorVersion component, or the majorVersion and minorVersion components are equal and its microVersion component is less than the other version's microVersion component, or the majorVersion, minorVersion and microVersion components are equal and its qualifier component is less than the other version's qualifier component (using `std::string::operator<()`).

A version is considered to be **equal to** another version if the majorVersion, minorVersion and microVersion components are equal and the qualifier component is equal.

**Return** A negative integer, zero, or a positive integer if this object is less than, equal to, or greater than the specified *BundleVersion* object.

#### Parameters

- object: The *BundleVersion* object to be compared.

## Public Static Functions

static *BundleVersion* **EmptyVersion** ()

The empty version "0.0.0".

static *BundleVersion* **UndefinedVersion** ()

Creates an undefined version identifier, representing either infinity or minus infinity.

static *BundleVersion* **ParseVersion** (std::string const &version)

Parses a version identifier from the specified string.

See *BundleVersion(const std::string&)* for the format of the version string.

**Return** A *BundleVersion* object representing the version identifier. If version is the empty string then EmptyVersion will be returned.

#### Parameters

- version: string representation of the version identifier. Leading and trailing whitespace will be ignored.

## 15.2.4 Constants

### `namespace cppmicroservices::Constants`

Defines standard names for the CppMicroServices environment system properties, service properties, and Manifest header attribute keys.

The values associated with these keys are of type `std::string`, unless otherwise indicated.

#### Variables

##### `const std::string SYSTEM_BUNDLE_LOCATION`

Location identifier of the OSGi *system bundle*, which is defined to be “System Bundle”.

##### `const std::string SYSTEM_BUNDLE_SYMBOLICNAME`

Alias for the symbolic name of the OSGi *system bundle*.

It is defined to be “system.bundle”.

##### `const std::string BUNDLE_ACTIVATOR`

Manifest header identifying the bundle’s activator.

The value for this attribute is of type `bool`. `false` - the bundle has no activator `true` - the bundle has an activator The behavior if the attribute is not specified is the same as when it is set to ‘false’.

The header value may be retrieved via the `Bundle::GetProperty` method.

##### `const std::string BUNDLE_CATEGORY`

Manifest header identifying the bundle’s category.

The header value may be retrieved from the `AnyMap` object returned by the `Bundle::GetHeaders()` method.

##### `const std::string BUNDLE_COPYRIGHT`

Manifest header identifying the bundle’s copyright information.

The header value may be retrieved from the `AnyMap` object returned by the `Bundle::GetHeaders()` method.

##### `const std::string BUNDLE_DESCRIPTION`

Manifest header containing a brief description of the bundle’s functionality.

The header value may be retrieved from the `AnyMap` object returned by the `Bundle::GetHeaders()` method.

##### `const std::string BUNDLE_MANIFESTVERSION`

Manifest header identifying the bundle’s manifest version.

The header value may be retrieved from the `AnyMap` object returned by the `Bundle::GetHeaders()` method.

##### `const std::string BUNDLE_NAME`

Manifest header identifying the bundle’s name.

The header value may be retrieved from the `AnyMap` object returned by the `Bundle::GetHeaders()` method.

##### `const std::string BUNDLE_VENDOR`

Manifest header identifying the bundle’s vendor.

The header value may be retrieved from the `AnyMap` object returned by the `Bundle::GetHeaders()` method.

**const** std::string **BUNDLE\_VERSION**

Manifest header identifying the bundle's version.

The header value may be retrieved from the *AnyMap* object returned by the *Bundle::GetHeaders()* method.

**const** std::string **BUNDLE\_DOCURL**

Manifest header identifying the bundle's documentation URL, from which further information about the bundle may be obtained.

The header value may be retrieved from the *AnyMap* object returned by the *Bundle::GetHeaders()* method.

**const** std::string **BUNDLE\_CONTACTADDRESS**

Manifest header identifying the contact address where problems with the bundle may be reported; for example, an email address.

The header value may be retrieved from the *AnyMap* object returned by the *Bundle::GetHeaders()* method.

**const** std::string **BUNDLE\_SYMBOLICNAME**

Manifest header identifying the bundle's symbolic name.

The header value may be retrieved from the *AnyMap* object returned by the *Bundle::GetHeaders()* method.

**const** std::string **BUNDLE\_LOCALIZATION**

Manifest header identifying the base name of the bundle's localization entries.

The header value may be retrieved from the *AnyMap* object returned by the *Bundle::GetHeaders()* method.

See *BUNDLE\_LOCALIZATION\_DEFAULT\_BASENAME*

**const** std::string **BUNDLE\_LOCALIZATION\_DEFAULT\_BASENAME**

Default value for the *bundle.localization* manifest header.

See *BUNDLE\_LOCALIZATION*

**const** std::string **BUNDLE\_ACTIVATIONPOLICY**

Manifest header identifying the bundle's activation policy.

The header value may be retrieved from the *AnyMap* object returned by the *Bundle::GetHeaders()* method.

See *ACTIVATION\_LAZY*

**const** std::string **ACTIVATION\_LAZY**

*Bundle* activation policy declaring the bundle must be activated when the library containing it is loaded into memory.

A bundle with the lazy activation policy that is started with the *START\_ACTIVATION\_POLICY* option will wait in the *STATE\_STARTING* state until its library is loaded. The bundle will then be activated.

The activation policy value is specified as in the *bundle.activation\_policy* manifest header like:

See *BUNDLE\_ACTIVATIONPOLICY*

See *Bundle::Start(uint32\_t)*

See *Bundle::START\_ACTIVATION\_POLICY*

**const** std::string **FRAMEWORK\_VERSION**

*Framework* environment property identifying the *Framework* version.

The header value may be retrieved via the `BundleContext::GetProperty` method.

**const** std::string **FRAMEWORK\_VENDOR**

*Framework* environment property identifying the *Framework* implementation vendor.

The header value may be retrieved via the `BundleContext::GetProperty` method.

**const** std::string **FRAMEWORK\_STORAGE**

*Framework* launching property specifying the persistent storage area used by the framework.

The value of this property must be a valid file path in the file system to a directory. If the specified directory does not exist then the framework will create the directory. If the specified path exists but is not a directory or if the framework fails to create the storage directory, then framework initialization fails. This area can not be shared with anything else.

If this property is not set, the framework uses the “fwdir” directory in the current working directory for the persistent storage area.

**const** std::string **FRAMEWORK\_STORAGE\_CLEAN**

*Framework* launching property specifying if and when the persistent storage area for the framework should be cleaned.

If this property is not set, then the framework storage area must not be cleaned.

See *FRAMEWORK\_STORAGE\_CLEAN\_ONFIRSTINIT*

**const** std::string **FRAMEWORK\_STORAGE\_CLEAN\_ONFIRSTINIT**

Specifies that the framework storage area must be cleaned before the framework is initialized for the first time.

Subsequent inits, starts or updates of the framework will not result in cleaning the framework storage area.

**const** std::string **FRAMEWORK\_THREADING\_SUPPORT**

The framework’s threading support property key name.

This property’s default value is “single”. Valid key values are:

- “single” - The framework APIs are not thread-safe.
- “multi” - The framework APIs are thread-safe.

---

**Note:** This is a read-only property and cannot be altered at run-time. The key’s value is set at compile time by the `US_ENABLE_THREADING_SUPPORT` option. See *Build Instructions* for more information.

---

**const** std::string **FRAMEWORK\_THREADING\_SINGLE**

*Framework* threading support configuration declaring that the framework is configured for single thread usage.

It is not safe to use the framework API concurrently from multiple threads.

**const** std::string **FRAMEWORK\_THREADING\_MULTI**

*Framework* threading support configuration declaring that the framework is configured for multi-thread usage.

The framework API uses internal locks such that it is safe to use the API concurrently from multiple threads.



**const** std::string **FRAMEWORK\_LOG**

The framework's log property key name.

This property's default value is off (boolean 'false').

**const** std::string **FRAMEWORK\_UUID**

*Framework* environment property identifying the *Framework*'s universally unique identifier (UUID).

A UUID represents a 128-bit value. A new UUID is generated by the *Framework#Init()* method each time a framework is initialized. The value of this property conforms to the UUID string representation specified in RFC 4122.

The header value may be retrieved via the *BundleContext::GetProperty* method.

**const** std::string **FRAMEWORK\_WORKING\_DIR**

*Framework* launching property specifying the working directory used for resolving relative path names.

If not set, the framework will use the process current working directory as set during static initialization of the framework library.

**const** std::string **FRAMEWORK\_BUNDLE\_VALIDATION\_FUNC**

*Framework* bundle validation property specifying a function that control whether a shared library is loaded or not into the process.

**const** std::string **OBJECTCLASS**

Service property identifying all of the class names under which a service was registered in the *Framework*.

The value of this property must be of type `std::vector<std::string>`.

This property is set by the *Framework* when a service is registered.

**const** std::string **SERVICE\_ID**

Service property identifying a service's registration number.

The value of this property must be of type `long int`.

The value of this property is assigned by the *Framework* when a service is registered. The *Framework* assigns a unique value that is larger than all previously assigned values since the *Framework* was started. These values are NOT persistent across restarts of the *Framework*.

**const** std::string **SERVICE\_PID**

Service property identifying a service's persistent identifier.

This property may be supplied in the `ServiceProperties` object passed to the *BundleContext::RegisterService* method. The value of this property must be of type `std::string` or `std::vector<std::string>`.

A service's persistent identifier uniquely identifies the service and persists across multiple *Framework* invocations.

By convention, every bundle has its own unique namespace, starting with the bundle's identifier (see *Bundle#GetBundleId()*) and followed by a dot (.). A bundle may use this as the prefix of the persistent identifiers for the services it registers.

**const** std::string **SERVICE\_RANKING**

Service property identifying a service's ranking number.

This property may be supplied in the `ServiceProperties` object passed to the *BundleContext::RegisterService* method. The value of this property must be of type `int`.

The service ranking is used by the framework to determine the *natural order* of services, see `ServiceReference::operator<(const ServiceReference&)`, and the *default* service to be returned from a call to the *BundleContext::GetServiceReference* method.

The default ranking is zero (0). A service with a ranking of `std::numeric_limits<int>::max()` is very likely to be returned as the default service, whereas a service with a ranking of `std::numeric_limits<int>::min()` is very unlikely to be returned.

If the supplied property value is not of type `int`, it is deemed to have a ranking value of zero.

**const** std::string **SERVICE\_VENDOR**

Service property identifying a service's vendor.

This property may be supplied in the properties `ServiceProperties` object passed to the `BundleContext::RegisterService` method.

**const** std::string **SERVICE\_DESCRIPTION**

Service property identifying a service's description.

This property may be supplied in the properties `ServiceProperties` object passed to the `BundleContext::RegisterService` method.

**const** std::string **SERVICE\_SCOPE**

Service property identifying a service's scope.

This property is set by the framework when a service is registered. If the registered object implements *PrototypeServiceFactory*, then the value of this service property will be `SCOPE_PROTOTYPE`. Otherwise, if the registered object implements *ServiceFactory*, then the value of this service property will be `SCOPE_BUNDLE`. Otherwise, the value of this service property will be `SCOPE_SINGLETON`.

**const** std::string **SCOPE\_SINGLETON**

Service scope is singleton.

All bundles using the service receive the same service object.

See *SERVICE\_SCOPE*

**const** std::string **SCOPE\_BUNDLE**

Service scope is bundle.

Each bundle using the service receives a distinct service object.

See *SERVICE\_SCOPE*

**const** std::string **SCOPE\_PROTOTYPE**

Service scope is prototype.

Each bundle using the service receives either a distinct service object or can request multiple distinct service objects via *ServiceObjects*.

See *SERVICE\_SCOPE*

**const** std::string **LIBRARY\_LOAD\_OPTIONS**

Service property that holds optional flags for `dlopen` calls on POSIX systems.

## 15.2.5 FrameworkFactory

**class** cppmicroservices::FrameworkFactory

A factory for creating *Framework* instances.

**Remark** This class is thread-safe.

## Public Functions

*Framework* **NewFramework** (FrameworkConfiguration **const** &configuration, std::ostream \*logger = nullptr)  
Create a new *Framework* instance.

**Return** A new, configured *Framework* instance.

### Parameters

- configuration: The framework properties to configure the new framework instance. If framework properties are not provided by the configuration argument, the created framework instance will use a reasonable default configuration.
- logger: *Any* ostream object which will receive redirected debug log output.

*Framework* **NewFramework** ()  
Create a new *Framework* instance.

This is the same as calling

```
NewFramework(FrameworkConfiguration())
```

**Return** A new, configured *Framework* instance.

*Framework* **NewFramework** (std::map<std::string, *Any*> **const** &configuration, std::ostream \*logger = nullptr)  
Create a new *Framework* instance.

**Return** A new, configured *Framework* instance.

## 15.2.6 GetBundleContext

**static** *BundleContext* cppmicroservices::GetBundleContext ()  
Returns the bundle context of the calling bundle.

This function allows easy access to the *BundleContext* instance from inside a C++ Micro Services bundle.

**Return** The *BundleContext* of the calling bundle. If the caller is not part of an active bundle, an invalid *BundleContext* is returned.

## 15.2.7 LDAPFilter

std::ostream &cppmicroservices::operator<< (std::ostream &os, *LDAPFilter* **const** &filter)  
Streams the string representation of filter into the stream os via *LDAPFilter::ToString()*.

LDAPPropExpr cppmicroservices::LDAPProp::operator== (std::string **const** &s) **const**

LDAPPropExpr cppmicroservices::LDAPProp::operator== (cppmicroservices::Any **const** &s)  
**const**

LDAPPropExpr cppmicroservices::LDAPProp::operator== (bool b) **const**

**template** <class T>

LDAPPropExpr cppmicroservices::LDAPProp::operator== (T **const** &s) **const**

```
LDAPPropExpr cppmicroservices::LDAPProp::operator!=(std::string const &s) const
LDAPPropExpr cppmicroservices::LDAPProp::operator!=(cppmicroservices::Any const &s)
const
template <class T>
LDAPPropExpr cppmicroservices::LDAPProp::operator!=(T const &s) const
LDAPPropExpr cppmicroservices::LDAPProp::operator>=(std::string const &s) const
LDAPPropExpr cppmicroservices::LDAPProp::operator>=(cppmicroservices::Any const &s)
const
template <class T>
LDAPPropExpr cppmicroservices::LDAPProp::operator>=(T const &s) const
LDAPPropExpr cppmicroservices::LDAPProp::operator<=(std::string const &s) const
LDAPPropExpr cppmicroservices::LDAPProp::operator<=(cppmicroservices::Any const &s)
const
template <class T>
LDAPPropExpr cppmicroservices::LDAPProp::operator<=(T const &s) const
LDAPPropExpr cppmicroservices::LDAPProp::Approx(std::string const &s) const
LDAPPropExpr cppmicroservices::LDAPProp::Approx(cppmicroservices::Any const &s) const
template <class T>
LDAPPropExpr cppmicroservices::LDAPProp::Approx(T const &s) const
cppmicroservices::LDAPPropExpr operator&& (cppmicroservices::LDAPPropExpr const &left, cppmi-
croservices::LDAPPropExpr const &right)
```

LDAP logical and ‘&’.

**Return** A LDAP expression

**Parameters**

- left: A LDAP expression.
- right: A LDAP expression.

```
cppmicroservices::LDAPPropExpr operator|| (cppmicroservices::LDAPPropExpr const &left, cppmi-
croservices::LDAPPropExpr const &right)
```

LDAP logical or ‘|’.

**Return** A LDAP expression

**Parameters**

- left: A LDAP expression.
- right: A LDAP expression.

**class** cppmicroservices::LDAPFilter

*#include <cppmicroservices/LDAPFilter.h>* An [RFC 1960](#)-based Filter.

A *LDAPFilter* can be used numerous times to determine if the match argument matches the filter string that was used to create the *LDAPFilter*.

Some examples of LDAP filters are:

- “(cn=Babs Jensen)”
- “(!(cn=Tim Howes))”
- “(&(' + *Constants::OBJECTCLASS* + “=Person)(|(sn=Jensen)(cn=Babs J\*))”

- “(o=univ\*of\*mich\*)”

**Remark** This class is thread safe.

See [LDAPProp](#) for a fluent API generating LDAP filter strings

## Public Functions

### LDAPFilter()

Creates a valid [LDAPFilter](#) object that matches nothing.

### LDAPFilter(std::string const &filter)

Creates a [LDAPFilter](#) object encapsulating the filter string.

This [LDAPFilter](#) object may be used to match a [ServiceReference](#) object or a [ServiceProperties](#) object.

If the filter cannot be parsed, an `std::invalid_argument` will be thrown with a human readable message where the filter became unparsable.

See “Framework specification for a description of the filter string syntax.” TODO!

#### Parameters

- `filter`: The filter string.

#### Exceptions

- `std::invalid_argument`: If `filter` contains an invalid filter string that cannot be parsed.

### LDAPFilter([LDAPFilter](#) const &other)

### ~LDAPFilter()

### operator bool() const

### bool Match([ServiceReferenceBase](#) const &reference) const

Filter using a service’s properties.

This [LDAPFilter](#) is executed using the keys and values of the referenced service’s properties. The keys are looked up in a case insensitive manner.

**Return** `true` if the service’s properties match this [LDAPFilter](#) `false` otherwise.

#### Parameters

- `reference`: The reference to the service whose properties are used in the match.

### bool Match([Bundle](#) const &bundle) const

Filter using a bundle’s manifest headers.

This [LDAPFilter](#) is executed using the keys and values of the bundle’s manifest headers. The keys are looked up in a case insensitive manner.

**Return** `true` if the bundle’s manifest headers match this [LDAPFilter](#) `false` otherwise.

#### Parameters

- `bundle`: The bundle whose manifest’s headers are used in the match.

### Exceptions

- `std::runtime_error`: If the number of keys of the bundle's manifest headers exceeds the value returned by `std::numeric_limits<int>::max()`.

bool **Match** (*AnyMap* const &dictionary) const

Filter using a *AnyMap* object with case insensitive key lookup.

This *LDAPFilter* is executed using the specified *AnyMap*'s keys and values. The keys are looked up in a case insensitive manner.

**Return** true if the *AnyMap*'s values match this filter; false otherwise.

### Parameters

- dictionary: The *AnyMap* whose key/value pairs are used in the match.

### Exceptions

- `std::runtime_error`: If the number of keys in the dictionary exceeds the value returned by `std::numeric_limits<int>::max()`.
- `std::runtime_error`: If the dictionary contains case variants of the same key name.

bool **MatchCase** (*AnyMap* const &dictionary) const

Filter using a *AnyMap*.

This *LDAPFilter* is executed using the specified *AnyMap*'s keys and values. The keys are looked up in a normal manner respecting case.

**Return** true if the *AnyMap*'s values match this filter; false otherwise.

### Parameters

- dictionary: The *AnyMap* whose key/value pairs are used in the match.

### Exceptions

- `std::runtime_error`: If the number of keys in the dictionary exceeds the value returned by `std::numeric_limits<int>::max()`.
- `std::runtime_error`: If the dictionary contains case variants of the same key name.

std::string **Tostring** () const

Returns this *LDAPFilter*'s filter string.

The filter string is normalized by removing whitespace which does not affect the meaning of the filter.

**Return** This *LDAPFilter*'s filter string.

bool **operator==** (*LDAPFilter* const &other) const

Compares this *LDAPFilter* to another *LDAPFilter*.

This implementation returns the result of calling `this->Tostring() == other.Tostring()`.

**Return** Returns the result of calling `this->Tostring() == other.Tostring()`.

### Parameters

- other: The object to compare against this *LDAPFilter*.

*LDAPFilter* &operator= (*LDAPFilter* const &filter)

## Protected Attributes

std::shared\_ptr<LDAPFilterData> d

class cppmicroservices::LDAPPProp

#include <cppmicroservices/LDAPPProp.h> A fluent API for creating LDAP filter strings.

Examples for creating *LDAPFilter* objects:

```
// This creates the filter "(&(name=Ben)!(count=1))"
LDAPFilter filter(LDAPPProp("name") == "Ben" && !(LDAPPProp("count") == 1));

// This creates the filter "(|(presence=*)(!(absence=*)))"
LDAPFilter filter(LDAPPProp("presence") || !LDAPPProp("absence"));

// This creates the filter "(&(ge>=-3)(approx~=hi))"
LDAPFilter filter(LDAPPProp("ge") >= -3 && LDAPPProp("approx").Approx("hi"));
```

See *LDAPFilter*

## Public Functions

**LDAPPProp** (std::string *property*)

Create a *LDAPPProp* instance for the named LDAP property.

### Parameters

- *property*: The name of the LDAP property.

LDAPPropExpr **operator==** (std::string const &*s*) const

LDAPPropExpr **operator==** (cppmicroservices::Any const &*s*) const

LDAPPropExpr **operator==** (bool *b*) const

template <class T>

LDAPPropExpr **operator==** (T const &*s*) const

**operator** LDAPPropExpr () const

LDAPPropExpr **operator!** () const

States the absence of the LDAP property.

**Return** A LDAP expression object.

LDAPPropExpr **operator!=** (std::string const &*s*) const

LDAPPropExpr **operator!=** (cppmicroservices::Any const &*s*) const

template <class T>

LDAPPropExpr **operator!=** (T const &*s*) const

LDAPPropExpr **operator>=** (std::string const &*s*) const

LDAPPropExpr **operator>=** (cppmicroservices::Any const &*s*) const

```

template <class T>
LDAPPropExpr operator>= (T const &s) const

LDAPPropExpr operator<= (std::string const &s) const

LDAPPropExpr operator<= (cppmicroservices::Any const &s) const
template <class T>
LDAPPropExpr operator<= (T const &s) const

LDAPPropExpr Approx (std::string const &s) const

LDAPPropExpr Approx (cppmicroservices::Any const &s) const
template <class T>
LDAPPropExpr Approx (T const &s) const

```

## 15.2.8 Listeners

using `cppmicroservices::ServiceListener` = typedef `std::function<void(ServiceEvent const&)>`  
A *ServiceEvent* listener.

A *ServiceListener* can be any callable object and is registered with the *Framework* using the *BundleContext#AddServiceListener(const ServiceListener&, const std::string&)* method. *ServiceListener* instances are called with a *ServiceEvent* object when a service has been registered, unregistered, or modified.

See *ServiceEvent*

using `cppmicroservices::BundleListener` = typedef `std::function<void(BundleEvent const&)>`  
A *BundleEvent* listener.

When a *BundleEvent* is fired, it is asynchronously (if threading support is enabled) delivered to a *BundleListener*. The *Framework* delivers *BundleEvent* objects to a *BundleListener* in order and does not concurrently call a *BundleListener*.

A *BundleListener* can be any callable object and is registered with the *Framework* using the *BundleContext#AddBundleListener(const BundleListener&)* method. *BundleListener* instances are called with a *BundleEvent* object when a bundle has been installed, resolved, started, stopped, updated, unresolved, or uninstalled.

See *BundleEvent*

using `cppmicroservices::FrameworkListener` = typedef `std::function<void(FrameworkEvent const&)`  
A *FrameworkEvent* listener.

When a *BundleEvent* is fired, it is asynchronously (if threading support is enabled) delivered to a *FrameworkListener*. The *Framework* delivers *FrameworkEvent* objects to a *FrameworkListener* in order and does not concurrently call a *FrameworkListener*.

A *FrameworkListener* can be any callable object and is registered with the *Framework* using the *BundleContext#AddFrameworkListener(const FrameworkListener&)* method. *FrameworkListener* instances are called with a *FrameworkEvent* object when a framework life-cycle event or notification message occurred.

See *FrameworkEvent*

```

template <class R>
ServiceListener cppmicroservices::ServiceListenerMemberFunctor(R * receiver, void(R::*)(ServiceEvent const&))

```

A convenience function that binds the member function callback of an object of type *R* and returns a *ServiceListener* object.



This object can then be passed into `AddServiceListener()`.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `std::bind` instead.

**Return** a `ServiceListener` object.

#### Template Parameters

- `R`: The type containing the member function.

#### Parameters

- `receiver`: The object of type `R`.
- `callback`: The member function pointer.

**template <class R>**

**BundleListener** `cppmicroservices::BundleListenerMemberFunctor(R * receiver, void(R::*)(BundleListener)`

A convenience function that binds the member function `callback` of an object of type `R` and returns a `BundleListener` object.

This object can then be passed into `AddBundleListener()`.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `std::bind` instead.

**Return** a `BundleListener` object.

#### Template Parameters

- `R`: The type containing the member function.

#### Parameters

- `receiver`: The object of type `R`.
- `callback`: The member function pointer.

**template <class R>**

**FrameworkListener** `cppmicroservices::BindFrameworkListenerToFunctor(R * receiver, void(R::*)(FrameworkListener)`

A convenience function that binds the member function `callback` of an object of type `R` and returns a `FrameworkListener` object.

This object can then be passed into `AddFrameworkListener()`.

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `std::bind` instead.

**Return** a `FrameworkListener` object.

#### Template Parameters

- `R`: The type containing the member function.

#### Parameters

- `receiver`: The object of type `R`.
- `callback`: The member function pointer.

## 15.2.9 SharedLibrary

**class** cppmicroservices::**SharedLibrary**

The *SharedLibrary* class loads shared libraries at runtime.

### Public Functions

**SharedLibrary**()

**SharedLibrary**(*SharedLibrary* const &other)

**SharedLibrary**(std::string const &libPath, std::string const &name)

Construct a *SharedLibrary* object using a library search path and a library base name.

#### Parameters

- libPath: An absolute path containing the shared library
- name: The base name of the shared library, without prefix and suffix.

**SharedLibrary**(std::string const &absoluteFilePath)

Construct a *SharedLibrary* object using an absolute file path to the shared library.

Using this constructor effectively disables all setters except *SetFilePath()*.

#### Parameters

- absoluteFilePath: The absolute path to the shared library.

**~SharedLibrary**()

Destroys this object but does not unload the shared library.

*SharedLibrary* &**operator=**(*SharedLibrary* const &other)

void **Load**()

Loads the shared library pointed to by this *SharedLibrary* object.

On POSIX systems dlopen() is called with the RTLD\_LAZY and RTLD\_LOCAL flags unless the compiler is gcc 4.4.x or older. Then the RTLD\_LAZY and RTLD\_GLOBAL flags are used to load the shared library to work around RTTI problems across shared library boundaries.

#### Exceptions

- std::logic\_error: If the library is already loaded.
- std::system\_error: If loading the library failed.

void **Load**(int flags)

Loads the shared library pointed to by this *SharedLibrary* object, using the specified flags on POSIX systems.

#### Exceptions

- std::logic\_error: If the library is already loaded.
- std::system\_error: If loading the library failed.

void **Unload** ()

Un-loads the shared library pointed to by this *SharedLibrary* object.

#### Exceptions

- `std::runtime_error`: If an error occurred while un-loading the shared library.

void **SetName** (std::string const &name)

Sets the base name of the shared library.

Does nothing if the shared library is already loaded or the *SharedLibrary(const std::string&)* constructor was used.

#### Parameters

- name: The base name of the shared library, without prefix and suffix.

std::string **GetName** () const

Gets the base name of the shared library.

**Return** The shared libraries base name.

std::string **GetFilePath** (std::string const &name) const

Gets the absolute file path for the shared library with base name name, using the search path returned by *GetLibraryPath()*.

**Return** The absolute file path of the shared library.

#### Parameters

- name: The shared library base name.

void **SetFilePath** (std::string const &absoluteFilePath)

Sets the absolute file path of this *SharedLibrary* object.

Using this methods with a non-empty `absoluteFilePath` argument effectively disables all other set-  
ters.

#### Parameters

- `absoluteFilePath`: The new absolute file path of this *SharedLibrary* object.

std::string **GetFilePath** () const

Gets the absolute file path of this *SharedLibrary* object.

**Return** The absolute file path of the shared library.

void **SetLibraryPath** (std::string const &path)

Sets a new library search path.

Does nothing if the shared library is already loaded or the *SharedLibrary(const std::string&)* constructor was used.

#### Parameters

- path: The new shared library search path.

std::string **GetLibraryPath** () const

Gets the library search path of this *SharedLibrary* object.

**Return** The library search path.

void **SetSuffix** (std::string const &suffix)

Sets the suffix for shared library names (e.g.

lib). Does nothing if the shared library is already loaded or the *SharedLibrary(const std::string&)* constructor was used.

**Parameters**

- suffix: The shared library name suffix.

std::string **GetSuffix** () const

Gets the file name suffix of this *SharedLibrary* object.

**Return** The file name suffix of the shared library.

void **SetPrefix** (std::string const &prefix)

Sets the file name prefix for shared library names (e.g.

.dll or .so). Does nothing if the shared library is already loaded or the *SharedLibrary(const std::string&)* constructor was used.

**Parameters**

- prefix: The shared library name prefix.

std::string **GetPrefix** () const

Gets the file name prefix of this *SharedLibrary* object.

**Return** The file name prefix of the shared library.

void \***GetHandle** () const

Gets the internal handle of this *SharedLibrary* object.

**Return** nullptr if the shared library is not loaded, the operating system specific handle otherwise.

bool **IsLoaded** () const

Gets the loaded/unloaded stated of this *SharedLibrary* object.

**Return** true if the shared library is loaded, false otherwise.

## 15.2.10 ShrinkableMap

template <class Key, class T>

class cppmicroservices::ShrinkableMap

A std::map style associative container allowing query and removal operations only.

## Public Types

```

template<>
using container_type = std::map<Key, T>

template<>
using iterator = typename container_type::iterator

template<>
using const_iterator = typename container_type::const_iterator

template<>
using size_type = typename container_type::size_type

template<>
using key_type = typename container_type::key_type

template<>
using mapped_type = typename container_type::mapped_type

template<>
using value_type = typename container_type::value_type

template<>
using reference = typename container_type::reference

template<>
using const_reference = typename container_type::const_reference

```

## Public Functions

```

ShrinkableMap ()

iterator begin ()

const_iterator begin () const

iterator end ()

const_iterator end () const

void erase (iterator pos)

void erase (iterator first, iterator last)

size_type erase (Key const &key)

bool empty () const

void clear ()

size_type size () const

size_type max_size () const

T &operator [] (Key const &key)

```

Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be removed in the next major release. Use `at (size_type pos)` instead.

```

T &at (Key const &key)

T const &at (Key const &key) const

size_type count (Key const &key) const

iterator find (Key const &key)

const_iterator find (Key const &key) const

std::pair<iterator, iterator> equal_range (Key const &key)

std::pair<const_iterator, const_iterator> equal_range (Key const &key) const

iterator lower_bound (Key const &key)

const_iterator lower_bound (Key const &key) const

iterator upper_bound (Key const &key)

const_iterator upper_bound (Key const &key) const

```

### 15.2.11 ShrinkableVector

**template** <class E>

**class** cppmicroservices::ShrinkableVector

A std::vector style container allowing query and removal operations only.

#### Public Types

```

template<>
using container_type = std::vector<E>

template<>
using iterator = typename container_type::iterator

template<>
using const_iterator = typename container_type::const_iterator

template<>
using size_type = typename container_type::size_type

template<>
using reference = typename container_type::reference

template<>
using const_reference = typename container_type::const_reference

template<>
using value_type = typename container_type::value_type

```

#### Public Functions

```

ShrinkableVector ()

iterator begin ()

const_iterator begin () const

```

```

iterator end ()

const_iterator end () const

reference front ()

const_reference front () const

reference back ()

const_reference back () const

iterator erase (iterator pos)

iterator erase (iterator first, iterator last)

void pop_back ()

bool empty () const

void clear ()

size_type size () const

reference at (size_type pos)

const_reference at (size_type pos) const

const_reference operator [] (size_type i) const

    Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be
    removed in the next major release. Use at (size_type pos) instead.

reference operator [] (size_type i)

    Deprecated since version 3.1.0: This function exists only to maintain backwards compatibility and will be
    removed in the next major release. Use at (size_type pos) instead.

```

## 15.3 Macros

Preprocessor macros provided by CppMicroServices.

### 15.3.1 CPPMICROSERVICES\_INITIALIZE\_BUNDLE

#### CPPMICROSERVICES\_INITIALIZE\_BUNDLE

Creates initialization code for a bundle.

Each bundle which wants to register itself with the CppMicroServices library has to put a call to this macro in one of its source files. Further, the bundle's source files must be compiled with the `US_BUNDLE_NAME` pre-processor definition set to a bundle-unique identifier.

Calling the `CPPMICROSERVICES_INITIALIZE_BUNDLE` macro will initialize the bundle for use with the CppMicroServices library.

---

**Hint:** If you are using CMake, consider using the provided CMake macro `usFunctionGenerateBundleInit()`.

---

### 15.3.2 CPPMICROSERVICES\_INITIALIZE\_STATIC\_BUNDLE

**CPPMICROSERVICES\_INITIALIZE\_STATIC\_BUNDLE** (*\_bundle\_name*)

Initialize a static bundle.

This macro initializes the static bundle named *\_bundle\_name*.

#### Parameters

- *\_bundle\_name*: The name of the bundle to initialize.

If the bundle provides an activator, use the *CPPMICROSERVICES\_IMPORT\_BUNDLE* macro instead, to ensure that the activator is referenced and can be called. Do not forget to actually link the static bundle to the importing executable or shared library.

**See also:**

*CPPMICROSERVICES\_IMPORT\_BUNDLE*

*Static Bundles*

### 15.3.3 CPPMICROSERVICES\_IMPORT\_BUNDLE

**CPPMICROSERVICES\_IMPORT\_BUNDLE** (*\_bundle\_name*)

Import a static bundle.

This macro imports the static bundle named *\_bundle\_name*.

#### Parameters

- *\_bundle\_name*: The name of the bundle to import.

Inserting this macro into your application's source code will allow you to make use of a static bundle. It will initialize the static bundle and reference its BundleActivator. If the bundle does not provide an activator, use the *CPPMICROSERVICES\_INITIALIZE\_STATIC\_BUNDLE* macro instead. Do not forget to actually link the static bundle to the importing executable or shared library.

**Example:**

```
#include "cppmicroservices/BundleImport.h"

CPPMICROSERVICES_IMPORT_BUNDLE(MyStaticBundle1)
```

**See also:**

*CPPMICROSERVICES\_INITIALIZE\_STATIC\_BUNDLE*

*Static Bundles*

### 15.3.4 CPPMICROSERVICES\_EXPORT\_BUNDLE\_ACTIVATOR

**CPPMICROSERVICES\_EXPORT\_BUNDLE\_ACTIVATOR** (*\_activator\_type*)

Export a bundle activator class.

Call this macro after the definition of your bundle activator to make it accessible by the CppMicroServices library.

#### Parameters



- `_activator_type`: The fully-qualified type-name of the bundle activator class.

Example:

```
class MyActivator : public BundleActivator
{
    public:
        void
        Start(BundleContext /*context*/)
        { /* register stuff */
        }

        void
        Stop(BundleContext /*context*/)
        { /* cleanup */
        }
};

CPPMICROSERVICES_EXPORT_BUNDLE_ACTIVATOR(MyActivator)
```

### 15.3.5 CPPMICROSERVICES\_DECLARE\_SERVICE\_INTERFACE

**CPPMICROSERVICES\_DECLARE\_SERVICE\_INTERFACE** (`_service_interface_type`, `_service_interface_id`)

Declare a service interface id.

This macro associates the given identifier `_service_interface_id` (a string literal) to the interface class called `_service_interface_type`. The Identifier must be unique. For example:

```
#include "cppmicroservices/ServiceInterface.h"

struct ISomeInterface { ... };

CPPMICROSERVICES_DECLARE_SERVICE_INTERFACE(ISomeInterface, "com.mycompany.service.
↪ISomeInterface/1.0")
```

The usage of this macro is optional and the service interface id which is automatically associated with any type is usually good enough (the demangled type name). However, care must be taken if the default id is compared with a string literal hard-coding a service interface id. E.g. the default id for templated types in the STL may differ between platforms. For user-defined types and templates the ids are typically consistent, but platform specific default template arguments will lead to different ids.

This macro is normally used right after the class definition for `_service_interface_type`, in a header file.

If you want to use [CPPMICROSERVICES\\_DECLARE\\_SERVICE\\_INTERFACE](#) with interface classes declared in a namespace then you have to make sure the [CPPMICROSERVICES\\_DECLARE\\_SERVICE\\_INTERFACE](#) macro call is not inside a namespace though. For example:

```
#include "cppmicroservices/ServiceInterface.h"

namespace Foo
{
    struct ISomeInterface { ... };
}

CPPMICROSERVICES_DECLARE_SERVICE_INTERFACE(Foo::ISomeInterface, "com.mycompany.
↪service.ISomeInterface/1.0")
```

**Parameters**

- `_service_interface_type`: The service interface type.
- `_service_interface_id`: A string literal representing a globally unique identifier.

## 16.1 BundleDTO

**struct** `cppmicroservices::framework::dto::BundleDTO`

*#include <cppmicroservices/servicecomponent/runtime/dto/BundleDTO.hpp>* A representation of a bundle.

### Public Members

unsigned long **id**

The bundle's unique identifier.

**See** *Bundle::GetBundleId()*

unsigned long **lastModified**

The time when the bundle was last modified.

**See** *Bundle::GetLastModified()*

uint32\_t **state**

The bundle's state.

**See** *Bundle::GetState()*

std::string **symbolicName**

The bundle's symbolic name.

**See** *Bundle::GetSymbolicName()*

std::string **version**

The bundle's version.

See *Bundle::GetVersion()*

## 16.2 ComponentConfigurationDTO

**enum** `gr_componentconfigurationdto::ComponentState`

Values:

**UNSATISFIED\_REFERENCE**

The component configuration is unsatisfied due to an unsatisfied reference.

**SATISFIED**

The component configuration is satisfied.

*Any services* declared by the component description are registered.

**ACTIVE**

The component configuration is active.

This is the normal operational state of a component configuration.

**struct** `cppmicroservices::service::component::runtime::dto::ComponentConfigurationDTO`

*#include <cppmicroservices/servicecomponent/runtime/dto/ComponentConfigurationDTO.hpp>* A representation of an actual instance of a declared component description parameterized by component properties.

### Public Members

*ComponentDescriptionDTO* **description**

The representation of the component configuration's component description.

`ComponentState` **state**

The current state of the component configuration.

This is one of *ComponentState::UNSATISFIED\_REFERENCE*, *ComponentState::SATISFIED* or *ComponentState::ACTIVE*.

`unsigned long` **id**

The id of the component configuration.

The id is a non-persistent, unique value assigned at runtime. The id is also available as the `component.id` component property. The value of this field is unspecified if the state of this component configuration is unsatisfied.

`std::unordered_map<std::string, cppmicroservices::Any>` **properties**

The component properties for the component configuration.

See *ComponentContext::GetProperties()*

`std::vector<SatisfiedReferenceDTO>` **satisfiedReferences**

The satisfied references.

Each *SatisfiedReferenceDTO* in the vector represents a satisfied reference of the component configuration. The vector must be empty if the component configuration has no satisfied references.

`std::vector<UnsatisfiedReferenceDTO>` **unsatisfiedReferences**

The unsatisfied references.

Each *UnsatisfiedReferenceDTO* in the vector represents an unsatisfied reference of the component configuration. The vector must be empty if the component configuration has no unsatisfied references.

## 16.3 ComponentConstants

**const** std::string cppmicroservices::service::component::ComponentConstants::SERVICE\_COMPONENT  
Manifest key specifying the Service Component descriptions.

The attribute value may be retrieved from the *cppmicroservices::AnyMap* object returned by the *Bundle::GetHeaders* method.

**const** std::string cppmicroservices::service::component::ComponentConstants::COMPONENT\_NAME  
A component property for a component configuration that contains the name of the component as specified in the name attribute of the component element.

The value of this property must be of type std::string.

**const** std::string cppmicroservices::service::component::ComponentConstants::COMPONENT\_ID  
A component property that contains the generated id for a component configuration.

The value of this property must be of type unsigned long.

The value of this property is assigned by Service Component Runtime when a component configuration is created. Service Component Runtime assigns a unique value that is larger than all previously assigned values since Service Component Runtime was started. These values are NOT persistent across restarts of Service Component Runtime.

**US\_ServiceComponent\_EXPORT const** std::string cppmicroservices::service::component::ComponentConstants::FACTORY  
A service registration property for a Component Factory that contains the value of the

factory

attribute. The value of this property must be of type

std::string

**US\_ServiceComponent\_EXPORT const** std::string cppmicroservices::service::component::ComponentConstants::REFERENCE\_SUFFIX  
The suffix for reference target properties.

These properties contain the filter to select the target services for a reference. The value of this property must be of type std::string.

**US\_ServiceComponent\_EXPORT const** std::string cppmicroservices::service::component::ComponentConstants::REFERENCE\_SCOPE  
Reference scope is prototype\_required.

The reference is satisfied only if the service is registered with PROTOTYPE scope. Each component instance receives a distinct service object.

**US\_ServiceComponent\_EXPORT const** std::string cppmicroservices::service::component::ComponentConstants::CONFIG\_POLICY  
*Constants* used for ComponentMetadata configurationPolicy attribute.

## 16.4 ComponentContext

**class** cppmicroservices::service::component::ComponentContext

#include <cppmicroservices/servicecomponent/ComponentContext.hpp> A Component Context object is used by a component instance to interact with its execution context including locating services by reference name.

Each component instance has a unique Component Context.

A component instance may obtain its Component Context object through its activate, modified, and deactivate methods.

## Public Functions

**virtual ~ComponentContext ()**

**virtual** std::unordered\_map<std::string, cppmicroservices::Any> **GetProperties () const = 0**

Returns the component properties for this Component Context.

**Return** The properties for this Component Context.

**virtual** cppmicroservices::BundleContext **GetBundleContext () const = 0**

Returns the *BundleContext* of the bundle which contains this component.

**Return** The *BundleContext* of the bundle containing this component.

**virtual** cppmicroservices::Bundle **GetUsingBundle () const = 0**

If the component instance is registered as a service using the `servicescope="bundle"` or `servicescope="prototype"` attribute, then this method returns the bundle using the service provided by the component instance.

This method will return an invalid *Bundle* if:

- The component instance is not a service, then no bundle can be using it as a service.
- The component instance is a service but did not specify the `servicescope="bundle"` or `servicescope="prototype"` attribute, then all bundles using the service provided by the component instance will share the same component instance.
- The service provided by the component instance is not currently being used by any bundle.

**Return** The bundle using the component instance as a service or an invalid bundle.

**virtual** void **EnableComponent** (std::string const &name) = 0

Enables the specified component name.

The specified component name must be in the same bundle as this component.

This method must return after changing the enabled state of the specified component name. *Any* actions that result from this, such as activating or deactivating a component configuration, must occur asynchronously to this method call.

### Parameters

- name: The name of a component or empty string to indicate all components in the bundle.

**virtual** void **DisableComponent** (std::string const &name) = 0

Disables the specified component name.

The specified component name must be in the same bundle as this component.

This method must return after changing the enabled state of the specified component name. *Any* actions that result from this, such as activating or deactivating a component configuration, must occur asynchronously to this method call.

### Parameters

- `name`: The name of a component.

**virtual** cppmicroservices::ServiceReferenceBase GetServiceReference () **const** = 0

If the component instance is registered as a service using the `service` element, then this method returns the service reference of the service provided by this component instance.

This method will return an invalid *ServiceReference* object if the component instance is not registered as a service.

**Return** The *ServiceReference* object for the component instance or invalid object if the component instance is not registered as a service.

**template** <class T>

std::shared\_ptr<T> LocateService (std::string **const** &refName) **const**

Returns the service object for the specified reference name and type.

If the cardinality of the reference is `0..n` or `1..n` and multiple services are bound to the reference, the service with the highest ranking (as specified in its *Constants::SERVICE\_RANKING* property) is returned. If there is a tie in ranking, the service with the lowest service id (as specified in its *Constants::SERVICE\_ID* property); that is, the service that was registered first is returned.

**Return** A service object for the referenced service or `nullptr` if the reference cardinality is `0..1` or `0..n` and no bound service is available.

#### Parameters

- `refName`: The name of a reference as specified in a `reference` element in this component's description.

#### Exceptions

- *ComponentException*: If Service Component Runtime catches an exception while activating the bound service.

**template** <class T>

std::vector<std::shared\_ptr<T>> LocateServices (std::string **const** &refName) **const**

Returns the service objects for the specified reference name and type.

**Return** A vector of service objects for the referenced service or empty vector if the reference cardinality is `0..1` or `0..n` and no bound service is available. If the reference cardinality is `0..1` or `1..1` and a bound service is available, the vector will have exactly one element.

#### Parameters

- `refName`: The name of a reference as specified in a `reference` element in this component's description.

#### Exceptions

- *ComponentException*: If Service Component Runtime catches an exception while activating a bound service.

## Protected Functions

**virtual** std::shared\_ptr<void> LocateService (std::string **const** &name, std::string **const** &type) **const** = 0

Returns the service object for the specified reference name and type.

If the cardinality of the reference is 0..n or 1..n and multiple services are bound to the reference, the service with the highest ranking (as specified in its *Constants::SERVICE\_RANKING* property) is returned. If there is a tie in ranking, the service with the lowest service id (as specified in its *Constants::SERVICE\_ID* property); that is, the service that was registered first is returned.

**Return** A service object for the referenced service or `nullptr` if the reference cardinality is 0..1 or 0..n and no bound service is available.

#### Parameters

- `name`: The name of a reference as specified in a reference element in this component's description.
- `type`: The service interface type.

#### Exceptions

- *ComponentException*: If Service Component Runtime catches an exception while activating the bound service.

```
virtual std::vector<std::shared_ptr<void>> LocateServices (std::string const &name, std::string
const &type) const = 0
```

Returns the service objects for the specified reference name and type.

**Return** A vector of service objects for the referenced service or empty vector if the reference cardinality is 0..1 or 0..n and no bound service is available. If the reference cardinality is 0..1 or 1..1 and a bound service is available, the vector will have exactly one element.

#### Parameters

- `name`: The name of a reference as specified in a reference element in this component's description.
- `type`: The service interface type.

#### Exceptions

- *ComponentException*: If Service Component Runtime catches an exception while activating a bound service.

## 16.5 ComponentDescriptionDTO

**struct** cppmicroservices::service::component::runtime::dto::ComponentDescriptionDTO  
`#include <cppmicroservices/servicecomponent/runtime/dto/ComponentDescriptionDTO.hpp>` A representation of a declared component description.

#### Public Members

std::string **name**

The name of the component.

This is declared in the `name` attribute of the `component` element. This must be the default name if the component description does not declare a name.

cppmicroservices::framework::dto::BundleDTO **bundle**

The bundle declaring the component description.



`std::string scope`

The service scope.

This is declared in the `scope` attribute of the `service` element. This must be empty string if the component description does not declare any service interfaces.

`std::string implementationClass`

The fully qualified name of the implementation class.

This is declared in the `implementation-class` element.

`bool defaultEnabled`

The initial enabled state.

This is declared in the `enabled` attribute of the `component` element.

`bool immediate`

The immediate state.

This is declared in the `immediate` attribute of the `component` element.

`std::vector<std::string> serviceInterfaces`

The fully qualified names of the service interfaces.

These are declared in the `interface` attribute of the `provide` elements. The vector must be empty if the component description does not declare any service interfaces.

`std::unordered_map<std::string, cppmicroservices::Any> properties`

The declared component properties.

These are declared in the `property` and `properties` elements.

`std::vector<ReferenceDTO> references`

The referenced services.

These are declared in the `reference` elements. The vector must be empty if the component description does not declare references to any services.

`std::string activate`

The name of the activate method.

This is declared in the `activate` attribute of the `component` element. This must be the default value which is “Activate”, if the component description does not declare an activate method name.

`std::string deactivate`

The name of the deactivate method.

This is declared in the `deactivate` attribute of the `component` element. This must be the default value which is “Deactivate”, if the component description does not declare a deactivate method name.

`std::string modified`

The name of the modified method.

This is declared in the `modified` attribute of the `component` element. This must be the default value which is “Modified”, if the component description does not declare a modified method name.

## 16.6 ComponentException

**class** `cppmicroservices::service::component::ComponentException`

*#include <cppmicroservices/servicecomponent/ComponentException.hpp>* Exception which may be thrown by Service Component Runtime.

Inherits from `std::runtime_error`

## Public Functions

**ComponentException** (std::string const &message)

Construct a new *ComponentException* with the specified message.

### Parameters

- message: The message for the exception.

**ComponentException** (char const \*message)

**virtual ~ComponentException** ()

## 16.7 ReferenceDTO

**struct** cppmicroservices::service::component::runtime::dto::ReferenceDTO

#include <cppmicroservices/servicecomponent/runtime/dto/ReferenceDTO.hpp> A representation of a declared reference to a service.

## Public Members

std::string **name**

The name of the reference.

This is declared in the `name` attribute of the `reference` element. This must be the default name if the component description does not declare a name for the reference.

std::string **interfaceName**

The service interface of the reference.

This is declared in the `interface` attribute of the `reference` element.

std::string **cardinality**

The cardinality of the reference.

This is declared in the `cardinality` attribute of the `reference` element. This must be the default cardinality if the component description does not declare a cardinality for the reference.

std::string **policy**

The policy of the reference.

This is declared in the `policy` attribute of the `reference` element. This must be the default policy if the component description does not declare a policy for the reference.

std::string **policyOption**

The policy option of the reference.

This is declared in the `policy-option` attribute of the `reference` element. This must be the default policy option if the component description does not declare a policy option for the reference.

std::string **target**

The target of the reference.

This is declared in the `target` attribute of the `reference` element. This must be an empty string if the component description does not declare a target for the reference.

`std::string bind`

The name of the bind method of the reference.

This is declared in the `bind` attribute of the `reference` element. This must be an empty string if the component description does not declare a bind method for the reference.

`std::string unbind`

The name of the unbind method of the reference.

This is declared in the `unbind` attribute of the `reference` element. This must be an empty string if the component description does not declare an unbind method for the reference.

`std::string updated`

The name of the updated method of the reference.

This is declared in the `updated` attribute of the `reference` element. This must be an empty string if the component description does not declare an updated method for the reference.

`std::string scope`

The scope of the reference.

This is declared in the `scope` attribute of the `reference` element. This must be the default scope if the component description does not declare a scope for the reference.

## 16.8 SatisfiedReferenceDTO

**struct** `cppmicroservices::service::component::runtime::dto::SatisfiedReferenceDTO`  
`#include <cppmicroservices/servicecomponent/runtime/dto/SatisfiedReferenceDTO.hpp>` A representation of a satisfied reference.

### Public Members

`std::string name`

The name of the declared reference.

This is declared in the `name` attribute of the `reference` element of the component description.

**See** [\*ReferenceDTO::name\*](#)

`std::string target`

The target property of the satisfied reference.

This is the value of the *component property* whose name is the concatenation of the *declared reference name* and ".target". This must be empty string if no target property is set for the reference.

`std::vector<cppmicroservices::framework::dto::ServiceReferenceDTO> boundServices`

The bound services.

Each *ServiceReferenceDTO* in the vector represents a service bound to the satisfied reference. The vector must be empty if there are no bound services.

## 16.9 ServiceComponentRuntime

**class** cppmicroservices::service::component::runtime::ServiceComponentRuntime  
*#include <cppmicroservices/servicecomponent/runtime/ServiceComponentRuntime.hpp>* The *ServiceComponentRuntime* service represents the Declarative Services actor, known as Service Component Runtime (SCR), that manages the service components and their life cycle.

The *ServiceComponentRuntime* service allows introspection of the components managed by Service Component Runtime.

This service differentiates between a *ComponentDescriptionDTO* and a *ComponentConfigurationDTO*. A *ComponentDescriptionDTO* is a representation of a declared component description. A *ComponentConfigurationDTO* is a representation of an actual instance of a declared component description parameterized by component properties.

### Public Functions

**virtual** ~ServiceComponentRuntime ()

**virtual** std::vector<dto::ComponentDescriptionDTO> GetComponentDescriptionDTOs (std::vector<cppmicroservices::Bundle> &bundles = {})  
**const**  
 &bundles  
 dles  
 = {}  
**const** =  
 0

Returns the component descriptions declared by the specified active bundles.

Only component descriptions from active bundles are returned. If the specified bundles have no declared components or are not active, an empty collection is returned.

**Return** The declared component descriptions of the specified active bundles. An empty collection is returned if there are no component descriptions for the specified active bundles.

#### Parameters

- bundles: The bundles whose declared component descriptions are to be returned. Specifying no bundles, or the equivalent of an empty *Bundle* vector, will return the declared component descriptions from all active bundles.

**virtual** dto::ComponentDescriptionDTO GetComponentDescriptionDTO (cppmicroservices::Bundle &bundle, std::string &name) **const** = 0

Returns the *ComponentDescriptionDTO* declared with the specified name by the specified bundle.

Only component descriptions from active bundles are returned. An empty object is returned if no such component is declared by the given bundle or the bundle is not active.

**Return** The declared component description or empty object if the specified bundle is not active or does not declare a component description with the specified name.

#### Parameters

- bundle: The bundle declaring the component description.
- name: The name of the component description.

```
virtual std::vector<dto::ComponentConfigurationDTO> GetComponentConfigurationDTOs (dto::ComponentDescription
                                                                    const
                                                                    &de-
                                                                    scrip-
                                                                    tion)
                                                                    const
                                                                    = 0
```

Returns the component configurations for the specified component description.

**Return** A vector containing a snapshot of the current component configurations for the specified component description. An empty vector is returned if there are none.

#### Parameters

- `description`: The component description.

```
virtual bool IsComponentEnabled (dto::ComponentDescriptionDTO const &description) const = 0
```

Returns whether the specified component description is currently enabled.

The enabled state of a component description is initially set by the *enabled* attribute of the component description.

**Return** `true` if the specified component description is currently enabled. Otherwise, `false`.

See *EnableComponent*

See *DisableComponent*

See `ComponentContext::DisableComponent(std::string)`

See `ComponentContext::EnableComponent(std::string)`

#### Parameters

- `description`: The component description.

```
virtual std::shared_future<void> EnableComponent (dto::ComponentDescriptionDTO const &de-
                                                                    scription) = 0
```

Enables the specified component description.

If the specified component description is currently enabled, this method has no effect.

This method must return after changing the enabled state of the specified component description. *Any* actions that result from this, such as activating or deactivating a component configuration, must occur asynchronously to this method call.

**Remark** The `shared_future<void>` returned can contain a `{ cppmicroservices::SecurityException` if enabling the component caused the bundle's shared library to be loaded and the bundle failed a security check.

**Return** A future that will be ready when the actions that result from changing the enabled state of the specified component have completed.

See *IsComponentEnabled*

#### Parameters

- `description`: The component description to enable.

**virtual** std::shared\_future<void> **DisableComponent** (dto::ComponentDescriptionDTO const &description) = 0

Disables the specified component description.

If the specified component description is currently disabled, this method has no effect.

This method must return after changing the enabled state of the specified component description. *Any* actions that result from this, such as activating or deactivating a component configuration, must occur asynchronously to this method call.

**Return** A future that will be ready when the actions that result from changing the enabled state of the specified component have completed.

**See** *IsComponentEnabled*

**Parameters**

- description: The component description to disable.

## 16.10 ServiceReferenceDTO

**struct** cppmicroservices::framework::dto::ServiceReferenceDTO

*#include <cppmicroservices/servicecomponent/runtime/dto/ServiceReferenceDTO.hpp>* A representation of a satisfied reference.

### Public Members

unsigned long **id**

The id of the service.

**See** *Constants::SERVICE\_ID*

unsigned long **bundle**

The id of the bundle that registered the service.

**See** *ServiceReference::GetBundle()*

std::unordered\_map<std::string, cppmicroservices::Any> **properties**

The properties for the service.

The value type must be a numerical type, Boolean, String or a container of any of the former.

**See** *ServiceReference::GetProperty(String)*

std::vector<unsigned long> **usingBundles**

The ids of the bundles that are using the service.

**See** *ServiceReference::GetUsingBundles()*

## 16.11 UnsatisfiedReferenceDTO

**struct** cppmicroservices::service::component::runtime::dto::UnsatisfiedReferenceDTO  
*#include <cppmicroservices/servicecomponent/runtime/dto/UnsatisfiedReferenceDTO.hpp>* A representation of an unsatisfied reference.

### Public Members

std::string **name**

The name of the declared reference.

This is declared in the `name` attribute of the `reference` element of the component description.

See *ReferenceDTO::name*

std::string **target**

The target property of the unsatisfied reference.

This is the value of the *component property* whose name is the concatenation of the *declared reference name* and ".target". This must be empty string if no target property is set for the reference.

std::vector<cppmicroservices::framework::dto::ServiceReferenceDTO> **targetServices**

The target services.

Each *ServiceReferenceDTO* in the vector represents a target service for the reference. The vector must be empty if there are no target services. The upper bound on the number of target services in the vector is the upper bound on the *cardinality* of the reference.





## 17.1 Configuration

**class** `cppmicroservices::service::cm::Configuration`

*#include <cppmicroservices/cm/Configuration.hpp>* The *Configuration* object (normally obtained as a `std::shared_ptr<Configuration>`) is the principal means for clients of *ConfigurationAdmin* to inspect or update the *Configuration* of a given service or service factory.

### Public Functions

**virtual** `~Configuration()`

**virtual** `std::string GetPid() const = 0`  
Get the PID of this *Configuration*.

**Return** the PID of this *Configuration*

#### Exceptions

- `std::runtime_error`: if this *Configuration* object has been Removed

**virtual** `std::string GetFactoryPid() const = 0`  
Get the Factory PID which is responsible for this *Configuration*.

If this *Configuration* does not belong to any Factory, returns an empty string.

**Return** the Factory PID associated with this *Configuration*, if applicable

#### Exceptions

- `std::runtime_error`: if this *Configuration* object has been Removed

**virtual** *AnyMap* **GetProperties** () **const** = 0

Get the properties of this *Configuration*.

Returns a copy.

**Return** the properties of this *Configuration*

**Exceptions**

- `std::runtime_error`: if this *Configuration* object has been Removed

**virtual** unsigned long **GetChangeCount** () **const** = 0

Get the change count.

Each *Configuration* must maintain a change counter that is incremented with a positive value every time the configuration is updated and its properties are stored. The counter must be incremented before the targets are updated and events are sent out.

**Return** A monotonically increasing value reflecting changes in this *Configuration*.

**Exceptions**

- `std::runtime_error`: if this *Configuration* object has been Removed

**virtual** `std::shared_future<void>` **Update** (*AnyMap* *properties* = `AnyMap { AnyMap::UNORDERED_MAP_CASEINSENSITIVE_KEYS }`) = 0

Update the properties of this *Configuration*.

Invoking this method will trigger the *ConfigurationAdmin* impl to push the updated properties to any *ManagedService* / *ManagedServiceFactory* / *ConfigurationListener* which has a matching PID / Factory PID.

If the properties are empty, the *Configuration* will not be removed, but instead updated with an empty properties map.

**Remark** The `shared_future<void>` returned can contain a `cppmicroservices::SecurityException` if the *Configuration* caused a bundle's shared library to be loaded and the bundle failed a security check.

**Return** a `shared_future<void>` which can be used to wait for the asynchronous operation that pushed the update to a *ManagedService*, *ManagedServiceFactory* or *ConfigurationListener* to complete. If an exception occurs during the execution of the service component's Modified method, this exception is intercepted and logged by Declarative Services. This exception is not returned in the `shared_future`.

**Exceptions**

- `std::runtime_error`: if this *Configuration* object has been Removed

**Parameters**

- *properties*: The properties to update this *Configuration* with.

**virtual** `std::pair<bool, std::shared_future<void>>` **UpdateIfDifferent** (*AnyMap* *properties* = `AnyMap { AnyMap::UNORDERED_MAP_CASEINSENSITIVE_KEYS }`) = 0

Update the properties of this *Configuration* if they differ from the current properties.

Invoking this method will trigger the *ConfigurationAdmin* impl to push the updated properties to any *ManagedService* / *ManagedServiceFactory* / *ConfigurationListener* which has a matching PID / Factory

PID, but only if the properties differ from the current properties. It will return true in this case, and false otherwise.

If the properties are empty, the *Configuration* will not be removed, but instead updated with an empty properties map, unless it already had empty properties.

**Remark** The `shared_future<void>` returned can contain a `cppmicroservices::SecurityException` if the *Configuration* caused a bundle's shared library to be loaded and the bundle failed a security check.

**Return** `std::pair<boolean, std::shared_future<void>>` The boolean indicates whether the properties were updated or not. The `shared_future<void>` allows access to the result of the asynchronous operation that pushed the update operation to a *ManagedService*, *ManagedServiceFactory* or *ConfigurationListener*. If an exception occurs during the execution of the service component's Modified method, this exception is intercepted and logged by Declarative Services. This exception is not returned in the `shared_future`.

#### Exceptions

- `std::runtime_error`: if this *Configuration* object has been Removed

#### Parameters

- `properties`: The properties to update this *Configuration* with (if they differ)

**virtual** `std::shared_future<void> Remove () = 0`

Remove this *Configuration* from *ConfigurationAdmin*.

This will trigger a push to any *ConfigurationListener*. This will also trigger the *ConfigurationAdmin* implementation to update any corresponding *ManagedService* with an empty *AnyMap*. Any corresponding *ManagedServiceFactory* will have its `Removed` method invoked with the corresponding PID.

**Return** a `shared_future<void>` to access the result of the asynchronous operation that pushed the remove operation to a *ManagedService*, *ManagedServiceFactory* or *ConfigurationListener*. If an exception occurs during the execution of the service component's Modified method, this exception is intercepted and logged by Declarative Services. This exception is not returned in the `shared_future`.

#### Exceptions

- `std::runtime_error`: if this *Configuration* object has been Removed already

## 17.2 ConfigurationAdmin

**class** `cppmicroservices::service::cm::ConfigurationAdmin`

*#include <cppmicroservices/cm/ConfigurationAdmin.hpp>* The *ConfigurationAdmin* interface is the means by which applications and services can interact with the *Configuration* objects at runtime.

It can be used to create or obtain *Configuration* objects, which can in turn be queried for their properties or be used to update the properties of a given service or service factory.

#### Public Functions

**virtual** `~ConfigurationAdmin ()`

**virtual** `std::shared_ptr<Configuration> GetConfiguration (std::string const &pid) = 0`

Get an existing or new *Configuration* object.

If the *Configuration* object for this PID does not exist, create a new *Configuration* object for that PID with empty properties.

**Return** the *Configuration* object for this PID

**Parameters**

- `pid`: The PID to get the *Configuration* for

**virtual** `std::shared_ptr<Configuration> CreateFactoryConfiguration (std::string const &factoryPid) = 0`

Create a new *Configuration* object for a *ManagedServiceFactory*.

The `factoryPid` is the PID of the *ManagedServiceFactory* (which must be different from the PIDs of any services it manages) and the `instanceName` will be a randomly-generated, unique name. The *Configuration* object's properties are empty. The returned *Configuration* will have a PID of the form `$factoryPid~$instanceName`.

**Return** a new *Configuration* object for this Factory PID with a randomly-generated unique name

**Parameters**

- `factoryPid`: The Factory PID to create a new *Configuration* for

**virtual** `std::shared_ptr<Configuration> GetFactoryConfiguration (std::string const &factoryPid, std::string const &instanceName) = 0`

Get an existing or new *Configuration* object for a *ManagedServiceFactory*.

The `factoryPid` is the PID of the *ManagedServiceFactory* (which must be different from the PIDs of any services it manages) and the `instanceName` is the unique name of one of those managed services. If the *Configuration* object for this combination of `factoryPid` and `instanceName` does not exist, create a new *Configuration* object for that combination, where properties are empty. The returned *Configuration* will have a PID of the form `$factoryPid~$instanceName`.

**Return** the *Configuration* object for this combination of Factory PID and instance name

**Parameters**

- `factoryPid`: The Factory PID to use to get an existing *Configuration* or create a new *Configuration* for
- `instanceName`: The unique name of an instance of a service managed by the *ManagedServiceFactory*

**virtual** `std::vector<std::shared_ptr<Configuration>> ListConfigurations (std::string const &filter = { }) = 0`

Used to list all of the available configurations.

An LDAP filter expression can be used to filter based on any property of the configuration, including `service.pid` and `service.factoryPid`

**Return** a vector of Configurations matching the filter.

**Parameters**

- `filter`: An optional filter expression to limit the Configurations which are returned, or empty for all.

## 17.3 ConfigurationException

**class** cppmicroservices::service::cm::ConfigurationException

#include <cppmicroservices/cm/ConfigurationException.hpp> Exception which may be thrown by *ManagedService* or *ManagedServiceFactory* subclasses to indicate to the *ConfigurationAdmin* implementation that the *Configuration* they have been given is invalid.

The *ConfigurationAdmin* implementation will log the exception with as much detail as it can. The *ConfigurationException* class is not final to ensure it can be used with `std::throw_with_nested` - the *ConfigurationAdmin* implementation will attempt to print the details of any nested exceptions as well.

Inherits from `std::runtime_error`

### Public Functions

**ConfigurationException** (std::string *rsn*, std::string *prop* = "")

Construct a new *ConfigurationException* with the specified reason and optionally specify which property caused the error.

#### Parameters

- *rsn*: The reason for the exception.
- *prop*: The property which caused the exception, if applicable.

std::string **GetReason** () const

Returns the reason for this exception.

**Return** The reason for this exception.

std::string **GetProperty** () const

Returns the property which was responsible for this exception being thrown, if applicable.

Could be empty.

**Return** The property which caused this exception.

**virtual** ~ConfigurationException ()

## 17.4 ConfigurationListener

**enum** gr\_configurationlistener::ConfigurationEventType

Values:

**CM\_UPDATED** = 1

The *ConfigurationEvent* type for when a *Configuration* object has been updated.

**CM\_DELETED** = 2

The *ConfigurationEvent* type for when a *Configuration* object has been removed.

**class** cppmicroservices::service::cm::ConfigurationEvent

#include <cppmicroservices/cm/ConfigurationListener.hpp> The *ConfigurationEvent* object is passed to the *ConfigurationListener* when the configuration object for any service is updated or removed by *ConfigurationAdmin*.

## Public Functions

**ConfigurationEvent** (*ServiceReference*<*ConfigurationAdmin*> **const** *configAdmin*, **const** *ConfigurationEventType* *type*, **const** std::string *factoryPid*, **const** std::string *pid*)

*ServiceReference*<*ConfigurationAdmin*> **const** &**getReference** () **const**

Get the *ServiceReference* object of the *Configuration* Admin Service that created this event.

**Return** the service reference of this *ConfigurationEvent*

std::string **const** &**getPid** () **const**

Get the PID of this *ConfigurationEvent*.

**Return** the PID of this *ConfigurationEvent*

std::string **const** &**getFactoryPid** () **const**

Get the Factory PID which is responsible for this *Configuration*.

**Return** the FactoryPID of this *ConfigurationEvent*

*ConfigurationEventType* **getType** () **const**

Get the type of this *Configuration*.

**Return** the *ConfigurationEventType* of this *ConfigurationEvent*

**class** cppmicroservices::service::cm::ConfigurationListener

#include <cppmicroservices/cm/ConfigurationListener.hpp> The *ConfigurationListener* interface is the interface that Declarative Services implements to receive updates from the *ConfigurationAdmin* implementation for all configuration object updates.

*ConfigurationAdmin* sends updates for all configuration object updates. It is up to DS to determine if this is a configuration object associated with a service being managed by DS.

## Public Functions

**virtual** void **configurationEvent** (*ConfigurationEvent* **const** &*event*) = 0

Called whenever the *Configuration* for any service is updated or removed from *ConfigurationAdmin*.

**Remark** This class is threadsafe

### Parameters

- *ConfigurationEvent*: object containing the *ConfigurationAdmin* service reference of the *ConfigurationAdmin* service that updated the configuration object, the PID or FactoryPid for the configuration object and the type of the update operation (update or remove)

**virtual** ~**ConfigurationListener** ()

## 17.5 ManagedService

**class** cppmicroservices::service::cm::ManagedService

#include <cppmicroservices/cm/ManagedService.hpp> The *ManagedService* interface is the interface that services should implement to receive updates from the *ConfigurationAdmin* implementation with their *Configuration*.

The *Configuration* will be provided based on the service.pid ServiceProperty of the Service being registered with the CppMicroServices *Framework*. If this isn't provided, the component.name property injected by DeclarativeServices will be used instead. If no *Configuration* is available for either of these, an empty *AnyMap* will be used to call Updated. Per the OSGi Spec, *ManagedService* is intended to be used for services which have singleton scope, where there will only be one implementation of a given interface.

### Public Functions

**virtual** ~ManagedService ()

**virtual** void Updated (AnyMap const &properties) = 0

Called whenever the *Configuration* for this service is updated or removed from *ConfigurationAdmin*, and when the *ManagedService* is first registered with the *Framework*, to provide the initial *Configuration*.

Can throw a *ConfigurationException* if there's a problem with the properties. This exception will be logged by the ConfigurationAdminImpl to aid the application author's investigation into the incorrect configuration.

Will be called asynchronously from the Service's registration or an update to the *Configuration*.

### Exceptions

- *ConfigurationException*: if something is wrong with the properties provided.

### Parameters

- properties: The properties from the new/initial *Configuration* for this *ManagedService*

## 17.6 ManagedServiceFactory

**class** cppmicroservices::service::cm::ManagedServiceFactory

#include <cppmicroservices/cm/ManagedServiceFactory.hpp> The *ManagedServiceFactory* interface is the interface that service factories should implement to receive updates from the *ConfigurationAdmin* implementation with the Configurations for the services that the Factory will provide.

The service.factoryPid ServiceProperty of the *ManagedServiceFactory* (or the component.name which is injected by DeclarativeServices if no service.factoryPid is provided) will be used to select all Configurations applicable to this factory. Per the OSGi Spec, the *ManagedServiceFactory* is intended to be used when multiple instances of a given Service will exist in the *Framework*, but each with different Configurations. For this reason, *ManagedServiceFactory* implementations are encouraged to mirror any properties (excluding security critical properties) into the ServiceProperty map when publishing the service with the *Framework* (if it is going to be published). Clients of the service can then filter on the properties they require.

The Updated method will be invoked once for each initial *Configuration* for this factory and then again whenever any of those Configurations change or whenever any new Configurations for this factory are added.

The Removed method will be invoked whenever any *Configuration* which this factory has previously been configured with is removed from the *ConfigurationAdmin* implementation.

## Public Functions

**virtual ~ManagedServiceFactory ()**

**virtual void Updated** (std::string const &pid, AnyMap const &properties) = 0

Called whenever any *Configuration* for this service factory is updated with *ConfigurationAdmin*, and (possibly multiple times) when the *ManagedServiceFactory* is first registered with the *Framework*.

Can throw a *ConfigurationException* if there's a problem with the properties. This exception will be logged by the *ConfigurationAdminImpl* to aid the application author's investigation into the incorrect configuration.

Will be called asynchronously from the Service registration or an update to the *Configuration*.

The *ManagedServiceFactory* should update the corresponding service instance with the properties provided, and potentially update the properties of that service's registration with the *Framework* (if it is registered).

If a corresponding service instance does not exist for this pid, the *ManagedServiceFactory* should create one with the properties provided. It should also register that new service with the *Framework*, if applicable.

### Exceptions

- *ConfigurationException*: if something is wrong with the properties provided.

### Parameters

- pid: The unique pid for this *Configuration*, of the form "\$FACTORY\_PID~\$INSTANCE\_NAME"
- properties: The properties for this *Configuration*

**virtual void Removed** (std::string const &pid) = 0

Called whenever one of the Configurations for this service is removed from *ConfigurationAdmin*.

Will be called asynchronously from the removal of the *Configuration*.

The *ManagedServiceFactory* should remove the corresponding service instance, and if it is registered with the *Framework*, it should be unregistered.

### Parameters

- pid: The unique pid for the *Configuration* to remove, of the form "\$FACTORY\_PID~\$INSTANCE\_NAME"



## 18.1 LogService

**enum** `gr_logservice::SeverityLevel`

*Values:*

**LOG\_ERROR** = 1

Indicates the bundle or service may not be functional.

Action should be taken to correct this situation.

**LOG\_WARNING** = 2

Indicates a bundle or service is still functioning but may experience problems in the future because of the warning condition.

**LOG\_INFO** = 3

May be the result of any change in the bundle or service and does not indicate a problem.

**LOG\_DEBUG** = 4

Used for problem determination and may be irrelevant to anyone but the bundle developer.

**class** `cppmicroservices::logservice::LogService`

*#include <cppmicroservices/logservice/LogService.hpp>* Provides methods for bundles to write messages to the log.

*LogService* methods are provided to log messages; optionally with a *ServiceReference* object or an exception. Bundles must log messages in the OSGi environment with a severity level according to the following hierarchy:

1. LOG\_ERROR
2. LOG\_WARNING
3. LOG\_INFO
4. LOG\_DEBUG

**Remark** This class is thread safe.

## Public Functions

**virtual ~LogService ()**

**virtual void Log** (SeverityLevel *level*, std::string **const** &*message*) = 0  
 Logs a message.

### Parameters

- *level*: The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.
- *message*: Human readable string describing the condition or empty string.

**virtual void Log** (SeverityLevel *level*, std::string **const** &*message*, **const** std::exception\_ptr *ex*) = 0  
 Logs a message.

### Parameters

- *level*: The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.
- *message*: Human readable string describing the condition or empty string.
- *ex*: The exception that reflects the condition or nullptr.

**virtual void Log** (*ServiceReferenceBase* **const** &*sr*, SeverityLevel *level*, std::string **const** &*message*) = 0  
 Logs a message.

### Parameters

- *sr*: The *ServiceReferenceBase* object of the service that this message is associated with or an invalid object.
- *level*: The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.
- *message*: Human readable string describing the condition or empty string.

**virtual void Log** (*ServiceReferenceBase* **const** &*sr*, SeverityLevel *level*, std::string **const** &*message*, **const** std::exception\_ptr *ex*) = 0  
 Logs a message with an exception associated and a *ServiceReference* object.

### Parameters

- *sr*: The *ServiceReferenceBase* object of the service that this message is associated with or an invalid object.
- *level*: The severity of the message. This should be one of the defined log levels but may be any integer that is interpreted in a user defined way.
- *message*: Human readable string describing the condition or empty string.
- *ex*: The exception that reflects the condition or nullptr.

## 19.1 AsyncWorkService

**class** `cppmicroservices::async::AsyncWorkService`

*#include <cppmicroservices/asyncworkservice/AsyncWorkService.hpp>* Provides a method which controls how DeclarativeServices internally schedules asynchronous work.

Creating an *AsyncWorkService* implementation is not required; this is intended to be used in specialty situations where the client application has requirements that the default asynchronous work scheduling mechanism does not conform to.

**Remark** This class is thread safe.

### Public Functions

**virtual** `~AsyncWorkService()`

**virtual** `void post (std::packaged_task<void>`

`> &&task = 0`Run a `std::packaged_task<void()>` (optionally on another thread asynchronously).

The `std::future<void>` associated with the `std::packaged_task<void()>` task object will contain the result from the task object.

**Note** The caller is required to manage the `std::future<void>` associated with the `std::packaged_task<void()>` in order to wait on the async task.

### Parameters

- `task`: A `std::packaged_task<void()>` wrapping a Callable target to execute asynchronously.



These classes are the main API to the HttpService bundle

**Warning:** The Http Service API is not final and may be incomplete. It also may change between minor releases without backwards compatibility guarantees.

### 20.1 HttpServlet

**class** `cppmicroservices::HttpServlet`  
Inherits from `std::enable_shared_from_this< HttpServlet >`  
Subclassed by `cppmicroservices::AbstractWebConsolePlugin`

#### Public Functions

**HttpServlet** ()

**virtual void Init** (*ServletConfig* const &config)

Called by the servlet container to indicate to a servlet that the servlet is being placed into service.

The servlet container calls the `Init` method exactly once after instantiating the servlet. The `Init` method must complete successfully before the servlet can receive any requests.

The servlet container cannot place the servlet into service if the `Init` method

1. Throws a `ServletException`
2. Does not return within a time period defined by the Web server

**See** `UnavailableException`

**See** `GetServletConfig`

### Parameters

- `config`: a *ServletConfig* object containing the servlet's configuration and initialization parameters

### Exceptions

- *ServletException*: if an exception has occurred that interferes with the servlet's normal operation

### **virtual void Destroy ()**

Called by the servlet container to indicate to a servlet that the servlet is being taken out of service.

This method is only called once all threads within the servlet's `service` method have exited or after a timeout period has passed. After the servlet container calls this method, it will not call the `service` method again on this servlet.

This method gives the servlet an opportunity to clean up any resources that are being held (for example, memory, file handles, threads) and make sure that any persistent state is synchronized with the servlet's current state in memory.

### *ServletConfig* **GetServletConfig () const**

Returns a *ServletConfig* object, which contains initialization and startup parameters for this servlet.

The *ServletConfig* object returned is the one passed to the `Init` method.

**Return** the *ServletConfig* object that initializes this servlet

See *Init*

### **virtual void Service (HttpServletRequest &request, HttpServletResponse &response)**

`std::shared_ptr<ServletContext> GetServletContext () const`

### **virtual ~HttpServlet ()**

## Public Static Attributes

`const std::string PROP_CONTEXT_ROOT`

## Protected Functions

**virtual long long GetLastModified (HttpServletRequest &request)**

**virtual void DoGet (HttpServletRequest &request, HttpServletResponse &response)**

**virtual void DoHead (HttpServletRequest &request, HttpServletResponse &response)**

**virtual void DoDelete (HttpServletRequest &request, HttpServletResponse &response)**

**virtual void DoPost (HttpServletRequest &request, HttpServletResponse &response)**

**virtual void DoPut (HttpServletRequest &request, HttpServletResponse &response)**

**virtual void DoTrace (HttpServletRequest &request, HttpServletResponse &response)**

`std::unique_lock<std::mutex> Lock () const`

## 20.2 `HttpServletRequest`

```
class cppmicroservices::HttpServletRequest
```

### Public Functions

```
~HttpServletRequest ()

HttpServletRequest (HttpServletRequest const &o)

HttpServletRequest &operator= (HttpServletRequest const &o)

std::shared_ptr<ServletContext> GetServletContext () const

Any GetAttribute (std::string const &name) const

std::vector<std::string> GetAttributeNames () const

std::size_t GetContentLength () const

std::string GetContentType () const

std::string GetLocalName () const

std::string GetRemoteHost () const

int GetLocalPort () const

int GetRemotePort () const

std::string GetScheme () const

std::string GetServerName () const

int GetServerPort () const

std::string GetProtocol () const

std::string GetContextPath () const

std::string GetPathInfo () const

std::string GetRequestUri () const

std::string GetRequestUrl () const

std::string GetServletPath () const

std::string GetQueryString () const

std::string GetHeader (std::string const &name) const

long long GetDateHeader (std::string const &name) const

std::vector<std::string> GetHeaderNames () const

std::vector<std::string> GetHeaders (std::string const &name) const

std::string GetMethod () const
```

```
std::vector<std::pair<std::string, float>> GetAcceptHeader () const

void RemoveAttribute (std::string const &name)

void SetAttribute (std::string const &name, Any const &value)
```

## 20.3 HttpServletResponse

```
class cppmicroservices::HttpServletResponse
```

### Public Functions

```
virtual ~HttpServletResponse ()

HttpServletResponse (HttpServletResponse const &o)

HttpServletResponse &operator= (HttpServletResponse const &o)

void FlushBuffer ()

bool IsCommitted () const

std::size_t GetBufferSize () const

std::string GetCharacterEncoding () const

std::string GetContentType () const

std::ostream &GetOutputStream ()

void Reset ()

void ResetBuffer ()

void SetBufferSize (std::size_t size)

void SetCharacterEncoding (std::string const &charset)

void SetContentLength (std::size_t size)

void SetContentType (std::string const &type)

void AddHeader (std::string const &name, std::string const &value)

void SetHeader (std::string const &name, std::string const &value)

void SetDateHeader (std::string const &name, long long date)

void AddIntHeader (std::string const &name, int value)

void SetIntHeader (std::string const &name, int value)

bool ContainsHeader (std::string const &name) const

std::string GetHeader (std::string const &name) const

int GetStatus () const
```



void **SetStatus** (int *statusCode*)

void **SendError** (int *statusCode*, std::string **const** &*msg* = std::string())

void **SendRedirect** (std::string **const** &*location*)

### Public Static Attributes

int **const SC\_CONTINUE**

Status code (100) indicating the client can continue.

int **const SC\_SWITCHING\_PROTOCOLS**

Status code (101) indicating the server is switching protocols according to Upgrade header.

int **const SC\_OK**

Status code (200) indicating the request succeeded normally.

int **const SC\_CREATED**

Status code (201) indicating the request succeeded and created a new resource on the server.

int **const SC\_ACCEPTED**

Status code (202) indicating that a request was accepted for processing, but was not completed.

int **const SC\_NON\_AUTHORITATIVE\_INFORMATION**

Status code (203) indicating that the meta information presented by the client did not originate from the server.

int **const SC\_NO\_CONTENT**

Status code (204) indicating that the request succeeded but that there was no new information to return.

int **const SC\_RESET\_CONTENT**

Status code (205) indicating that the agent SHOULD reset the document view which caused the request to be sent.

int **const SC\_PARTIAL\_CONTENT**

Status code (206) indicating that the server has fulfilled the partial GET request for the resource.

int **const SC\_MULTIPLE\_CHOICES**

Status code (300) indicating that the requested resource corresponds to any one of a set of representations, each with its own specific location.

int **const SC\_MOVED\_PERMANENTLY**

Status code (301) indicating that the resource has permanently moved to a new location, and that future references should use a new URI with their requests.

int **const SC\_FOUND**

Status code (302) indicating that the resource reside temporarily under a different URI.

int **const SC\_MOVED\_TEMPORARILY**

Status code (302) indicating that the resource has temporarily moved to another location, but that future references should still use the original URI to access the resource.

int **const SC\_SEE\_OTHER**

Status code (303) indicating that the response to the request can be found under a different URI.

int **const SC\_NOT\_MODIFIED**

Status code (304) indicating that a conditional GET operation found that the resource was available and not modified.

**int const SC\_USE\_PROXY**

Status code (305) indicating that the requested resource **MUST** be accessed through the proxy given by the Location field.

**int const SC\_TEMPORARY\_REDIRECT**

Status code (307) indicating that the requested resource resides temporarily under a different URI.

**int const SC\_BAD\_REQUEST**

Status code (400) indicating the request sent by the client was syntactically incorrect.

**int const SC\_UNAUTHORIZED**

Status code (401) indicating that the request requires HTTP authentication.

**int const SC\_PAYMENT\_REQUIRED**

Status code (402) reserved for future use.

**int const SC\_FORBIDDEN**

Status code (403) indicating the server understood the request but refused to fulfill it.

**int const SC\_NOT\_FOUND**

Status code (404) indicating that the requested resource is not available.

**int const SC\_METHOD\_NOT\_ALLOWED**

Status code (405) indicating that the method specified in the Request-Line is not allowed for the resource identified by the Request-URI.

**int const SC\_NOT\_ACCEPTABLE**

Status code (406) indicating that the resource identified by the request is only capable of generating response entities which have content characteristics not acceptable according to the accept headers sent in the request.

**int const SC\_PROXY\_AUTHENTICATION\_REQUIRED**

Status code (407) indicating that the client **MUST** first authenticate itself with the proxy.

**int const SC\_REQUEST\_TIMEOUT**

Status code (408) indicating that the client did not produce a request within the time that the server was prepared to wait.

**int const SC\_CONFLICT**

Status code (409) indicating that the request could not be completed due to a conflict with the current state of the resource.

**int const SC\_GONE**

Status code (410) indicating that the resource is no longer available at the server and no forwarding address is known.

**int const SC\_LENGTH\_REQUIRED**

Status code (411) indicating that the request cannot be handled without a defined Content-Length.

**int const SC\_PRECONDITION\_FAILED**

Status code (412) indicating that the precondition given in one or more of the request-header fields evaluated to false when it was tested on the server.

**int const SC\_REQUEST\_ENTITY\_TOO\_LARGE**

Status code (413) indicating that the server is refusing to process the request because the request entity is larger than the server is willing or able to process.

**int const SC\_REQUEST\_URI\_TOO\_LONG**

Status code (414) indicating that the server is refusing to service the request because the Request-URI is longer than the server is willing to interpret.

**int const SC\_UNSUPPORTED\_MEDIA\_TYPE**

Status code (415) indicating that the server is refusing to service the request because the entity of the request is in a format not supported by the requested resource for the requested method.

**int const SC\_REQUESTED\_RANGE\_NOT\_SATISFIABLE**

Status code (416) indicating that the server cannot serve the requested byte range.

**int const SC\_EXPECTATION\_FAILED**

Status code (417) indicating that the server could not meet the expectation given in the Expect request header.

**int const SC\_INTERNAL\_SERVER\_ERROR**

Status code (500) indicating an error inside the HTTP server which prevented it from fulfilling the request.

**int const SC\_NOT\_IMPLEMENTED**

Status code (501) indicating the HTTP server does not support the functionality needed to fulfill the request.

**int const SC\_BAD\_GATEWAY**

Status code (502) indicating that the HTTP server received an invalid response from a server it consulted when acting as a proxy or gateway.

**int const SC\_SERVICE\_UNAVAILABLE**

Status code (503) indicating that the HTTP server is temporarily overloaded, and unable to handle the request.

**int const SC\_GATEWAY\_TIMEOUT**

Status code (504) indicating that the server did not receive a timely response from the upstream server while acting as a gateway or proxy.

**int const SC\_HTTP\_VERSION\_NOT\_SUPPORTED**

Status code (505) indicating that the server does not support or refuses to support the HTTP protocol version that was used in the request message.

## Protected Functions

**HttpServletResponse** (HttpServletResponsePrivate \*d)

**virtual** std::streambuf \***GetOutputStreamBuffer** ()

**void** **SetOutputStreamBuffer** (std::streambuf \*sb)

## Protected Attributes

HttpServletResponsePrivate \*d

## 20.4 ServletConfig

**class** cppmicroservices::**ServletConfig**

A servlet configuration object used by a servlet container to pass information to a servlet during initialization.

## Public Functions

**ServletConfig** ()

**ServletConfig** (*ServletConfig* const &other)

*ServletConfig* &operator= (*ServletConfig* const &other)

**virtual ~ServletConfig** ()

std::string **GetServletName** () const

Returns the name of this servlet instance.

The name may be provided via server administration, assigned in the web application deployment descriptor, or for an unregistered (and thus unnamed) servlet instance it will be the servlet's class name.

**Return** the name of the servlet instance

std::shared\_ptr<*ServletContext*> **GetServletContext** () const

Returns a reference to the *ServletContext* in which the caller is executing.

**Return** a *ServletContext* object, used by the caller to interact with its servlet container

See *ServletContext*

## Protected Functions

void **SetServletName** (std::string const &name)

void **SetServletContext** (std::shared\_ptr<*ServletContext*> const &context)

## 20.5 ServletContainer

class cppmicroservices::ServletContainer

### Public Functions

**ServletContainer** (*BundleContext* bundleCtx, std::string const &contextPath = std::string())

**~ServletContainer** ()

void **SetContextPath** (std::string const &contextPath)

std::string **GetContextPath** () const

void **Start** ()

void **Stop** ()

std::shared\_ptr<*ServletContext*> **GetContext** (std::string const &uripath) const

std::string **GetContextPath** (*ServletContext* const \*context) const

## 20.6 ServletContext

```
class cppmicroservices::ServletContext
```

### Public Functions

```
std::string GetContextPath () const
```

```
std::shared_ptr<ServletContext> GetContext (std::string const &uripath)
```

```
std::string GetMimeType (std::string const &file) const
```



These classes are the main API to the WebConsole bundle

**Warning:** The Web Console API is not final and may be incomplete. It also may change between minor releases without backwards compatibility guarantees.

### 21.1 AbstractWebConsolePlugin

**class** `cppmicroservices::AbstractWebConsolePlugin`

The Web Console can be extended by registering an OSGi service for the interface *HttpServlet* with the service property `org.cppmicroservices.webconsole.label` set to the label (last segment in the URL) of the page.

The respective service is called a Web Console Plugin or a plugin for short.

To help rendering the response the Web Console bundle provides two options. One of the options is to extend the *AbstractWebConsolePlugin* overwriting the *RenderContent(HttpServletRequest&, HttpServletResponse&)* method.

Inherits from *cppmicroservices::HttpServlet*

Subclassed by *cppmicroservices::SimpleWebConsolePlugin*

#### Public Types

**using** `TemplateData` = `Kainjow::Mustache::Data`

## Public Functions

**virtual** std::string **GetLabel** () **const** = 0

Retrieves the label.

This is the last component in the servlet path.

**Return** the label.

**virtual** std::string **GetTitle** () **const** = 0

Retrieves the title of the plug-in.

It is displayed in the page header and is also included in the title of the HTML document.

**Return** the plugin title.

**virtual** std::string **GetCategory** () **const**

This method should return category string which will be used to render the plugin in the navigation menu.

Default implementation returns null, which will result in the plugin link rendered as top level menu item. Concrete implementations wishing to be rendered as a sub-menu item under a category should override this method and return a string or define `org.cppmicroservices.webconsole.category` service property. Currently only single level categories are supported. So, this should be a simple string.

**Return** category

**virtual** std::shared\_ptr<*WebConsoleVariableResolver*> **GetVariableResolver** (*HttpServletRequest* &request)

**virtual** void **SetVariableResolver** (*HttpServletRequest* &request, std::shared\_ptr<*WebConsoleVariableResolver*> **const** &resolver)

## Protected Functions

**virtual** bool **IsHtmlRequest** (*HttpServletRequest* &request)

Detects whether this request is intended to have the headers and footers of this plugin be rendered or not.

This method always returns `true` and may be overwritten by plugins to detect from the actual request, whether or not to render the header and footer.

**Return** `true` if the page should have headers and footers rendered

### Parameters

- `request`: the original request passed from the HTTP server

**virtual** void **DoGet** (*HttpServletRequest* &request, *HttpServletResponse* &response)

Renders the web console page for the request.

This consist of the following five parts called in order:

1. Send back a requested resource
2. *StartResponse*(*HttpServletRequest*&, *HttpServletResponse*&)
3. *RenderTopNavigation*(*HttpServletRequest*&, std::ostream&)



4. *RenderContent(HttpServletRequest&, HttpServletResponse&)*
5. *EndResponse(HttpServletRequest&, std::ostream&)*

---

**Note:** If a resource is sent back for the request only the first step is executed. Otherwise the first step is a null-operation actually and the latter four steps are executed in order.

---

If the *IsHtmlRequest(HttpServletRequest&)* method returns `false` only the *RenderContent(HttpServletRequest&, HttpServletResponse&)* method is called.

See *HttpServlet::DoGet(HttpServletRequest&, HttpServletResponse&)*

**virtual void RenderContent** (*HttpServletRequest &request, HttpServletResponse &response*) = 0  
 This method is used to render the content of the plug-in.

It is called internally from the Web Console.

#### Parameters

- request: the HTTP request send from the user
- response: the HTTP response object, where to render the plugin data.

`std::ostream &StartResponse` (*HttpServletRequest &request, HttpServletResponse &response*)  
 This method is responsible for generating the top heading of the page.

**Return** the stream that was used for generating the response.

See *EndResponse(HttpServletRequest&, std::ostream&)*

#### Parameters

- request: the HTTP request coming from the user
- response: the HTTP response, where data is rendered

**void RenderTopNavigation** (*HttpServletRequest &request, std::ostream &writer*)  
 This method is called to generate the top level links with the available plug-ins.

#### Parameters

- request: the HTTP request coming from the user
- writer: the writer, where the HTML data is rendered

**void EndResponse** (*HttpServletRequest &request, std::ostream &writer*)  
 This method is responsible for generating the footer of the page.

See *StartResponse(HttpServletRequest&, HttpServletResponse&)*

#### Parameters

- request: the HTTP request coming from the user
- writer: the writer, where the HTML data is rendered

`std::vector<std::string> GetCssReferences () const`

Returns a list of CSS reference paths or `null` if no additional CSS files are provided by the plugin.

The result is an array of strings which are used as the value of the `href` attribute of the `<link>` elements placed in the head section of the HTML generated. If the reference is a relative path, it is turned into an absolute path by prepending the value of the `WebConsoleConstants::ATTR_APP_ROOT` request attribute.

**Return** The list of additional CSS files to reference in the head section or an empty list if no such CSS files are required.

`std::string ReadTemplateFile (std::string const &templateFile, cppmicroservices::BundleContext context = cppmicroservices::GetBundleContext ()) const`

## 21.2 SimpleWebConsolePlugin

**class** `cppmicroservices::SimpleWebConsolePlugin`

*SimpleWebConsolePlugin* is a utility class that provides a default implementation of the *AbstractWebConsolePlugin* and supports the following features:

- Methods for (un)registering the web console plugin service
- Default implementation for resource loading

Inherits from *cppmicroservices::AbstractWebConsolePlugin*

### Public Functions

**SimpleWebConsolePlugin** (`std::string const &label`, `std::string const &title`, `std::string category` = `std::string()`, `std::vector<std::string> css` = `std::vector< std::string >()`)  
Creates new Simple Web Console Plugin with the given category.

#### Parameters

- `label`: the front label. See *AbstractWebConsolePlugin::GetLabel()*
- `title`: the plugin title . See *AbstractWebConsolePlugin::GetTitle()*
- `category`: the plugin's navigation category. See *AbstractWebConsolePlugin::GetCategory()*
- `css`: the additional plugin CSS. See *AbstractWebConsolePlugin::GetCssReferences()*

`std::string GetLabel () const`

See *AbstractWebConsolePlugin::GetLabel()*

`std::string GetTitle () const`

See *AbstractWebConsolePlugin::GetTitle()*

`std::string GetCategory () const`

See *AbstractWebConsolePlugin::GetCategory()*

```
std::shared_ptr<SimpleWebConsolePlugin> Register (BundleContext const &context = GetBundle-
Context ())
```

This is an utility method.

It is used to register the plugin service. Don't forget to call *Unregister()* when the plugin is no longer needed.

**Return** A shared pointer to this plugin.

#### Parameters

- context: the bundle context used for service registration.

```
void Unregister ()
```

An utility method that removes the service, registered by the *Register(const BundleContext&)* method.

### Protected Functions

```
std::vector<std::string> GetCssReferences () const
```

See *AbstractWebConsolePlugin::GetCssReferences()*

```
BundleContext GetContext () const
```

## 21.3 WebConsoleConstants

```
struct cppmicroservices::WebConsoleConstants
```

*WebConsoleConstants* provides some common constants that are used by plugin developers.

### Public Static Attributes

```
std::string SERVICE_NAME
```

The name of the service to register as to be used as a “plugin” for the web console (value is “cppmicroservices::HttpServlet”).

```
std::string PLUGIN_LABEL
```

The URI address label under which the Web Console plugin is called (value is “org.cppmicroservices.webconsole.label”).

This service registration property must be set to a single non-empty string value. Otherwise the *Servlet* services will be ignored by the Web Console and not be used as a plugin.

```
std::string PLUGIN_TITLE
```

The title under which the Web Console plugin is called (value is “org.cppmicroservices.webconsole.title”).

For *Servlet* services not extending the *AbstractWebConsolePlugin* this property is required for the service to be used as a plugin. Otherwise the service is just ignored by the Web Console.

For *Servlet* services extending from the *AbstractWebConsolePlugin* abstract class this property is not technically required. To support lazy service access, e.g. for plugins implemented using the *Service Factory* pattern, the use of this service registration property is encouraged.

```
std::string PLUGIN_CATEGORY
```

The category under which the Web Console plugin is listed in the top navigation (value is “org.cppmicroservices.webconsole.category”).

For *Servlet* services not extending the *AbstractWebConsolePlugin* this property is required to declare a specific category. Otherwise the plugin is put into the default category.

For *Servlet* services extending from the *AbstractWebConsolePlugin* abstract class this property is not technically required. To support lazy service access with categorization, e.g. for plugins implemented using the *Service Factory* pattern, the use of this service registration property is strongly encouraged. If the property is missing the *AbstractWebConsolePlugin::GetCategory()* is called which should be overwritten.

std::string **PLUGIN\_CSS\_REFERENCES**

The name of the service registration properties providing references to addition CSS files that should be loaded when rendering the header for a registered plugin.

This property is expected to be a single string value or a vector of string values.

This service registration property is only used for plugins registered as *SERVICE\_NAME* services which do not extend the *AbstractWebConsolePlugin*. Extensions of the *AbstractWebConsolePlugin* should overwrite the *AbstractWebConsolePlugin::GetCssReferences()* method to provide additional CSS resources.

std::string **ATTR\_APP\_ROOT**

The name of the request attribute providing the absolute path of the Web Console root (value is “org.cppmicroservices.webconsole.appRoot”).

This consists of the servlet context path (from *HttpServletRequest::GetContextPath()*) and the Web Console servlet path (from *HttpServletRequest::GetServletPath()*, /us/console by default).

The type of this request attribute is `std::string`.

std::string **ATTR\_PLUGIN\_ROOT**

The name of the request attribute providing the absolute path of the current plugin (value is “org.cppmicroservices.webconsole.pluginRoot”).

This consists of the servlet context path (from *HttpServletRequest::GetContextPath()*), the configured path of the web console root (/us/console by default) and the plugin label *PLUGIN\_LABEL*.

The type of this request attribute is `std::string`.

std::string **ATTR\_LABEL\_MAP**

The name of the request attribute providing a mapping of labels to page titles of registered console plugins (value is “org.cppmicroservices.webconsole.labelMap”).

This map may be used to render a navigation of the console plugins as the *AbstractWebConsolePlugin::RenderTopNavigation(HttpServletRequest&, std::ostream&)* method does.

The type of this request attribute is *AnyMap*.

std::string **ATTR\_CONSOLE\_VARIABLE\_RESOLVER**

The name of the request attribute holding the *WebConsoleVariableResolver* for the request (value is “org.cppmicroservices.webconsole.variable.resolver”).

See *WebConsoleVariableResolver*

See *AbstractWebConsolePlugin::GetVariableResolver*

See *AbstractWebConsolePlugin::SetVariableResolver*

## 21.4 WebConsoleDefaultVariableResolver

**class** cppmicroservices::WebConsoleDefaultVariableResolver

The default Web Console variable resolver class.

This variable resolver uses Mustache template logic to resolve variables.

Inherits from *cppmicroservices::WebConsoleVariableResolver*

### Public Functions

**virtual** std::string **Resolve** (std::string const &variable) const

Returns a replacement value for the named variable.

**Return** The replacement value.

**Parameters**

- variable: The name of the variable for which to return a replacement.

MustacheData &GetData ()

## 21.5 WebConsoleVariableResolver

**struct** cppmicroservices::WebConsoleVariableResolver

The *WebConsoleVariableResolver* interface defines the API for an object which may be provided by plugins to provide replacement values for variables in the generated content.

Plugins should call the *AbstractWebConsolePlugin::SetVariableResolver* method to provide their implementation for variable resolution.

The main use of such a variable resolver is when a plugin is using a static template which provides slots to place dynamically generated content parts.

---

**Note:** The variable resolver must be set in the request *before* the response stream is retrieved calling the *HttpServletResponse::GetOutputStream* method. Otherwise the variable resolver will not be used for resolving variables.

---

**See** *AbstractWebConsolePlugin::GetVariableResolver(HttpServletRequest&)*

**See** *AbstractWebConsolePlugin::SetVariableResolver*

Subclassed by *cppmicroservices::WebConsoleDefaultVariableResolver*

### Public Functions

**virtual** ~WebConsoleVariableResolver ()

**virtual** std::string **Resolve** (std::string const &variable) const = 0

Returns a replacement value for the named variable.

**Return** The replacement value.

**Parameters**

- `variable`: The name of the variable for which to return a replacement.

These classes are the main API to the Shell Service bundle

**Warning:** The Shell Service API is not final and may be incomplete. It also may change between minor releases without backwards compatibility guarantees.

## 22.1 ShellService

```
class cppmicroservices::ShellService
```

### Public Functions

```
ShellService()
```

```
~ShellService()
```

```
void ExecuteCommand(std::string const &cmd)
```

```
std::vector<std::string> GetCompletions(std::string const &in)
```





## CHAPTER 23

---

### Change Log

---

All notable changes to this project will be documented in this file.

The format is based on [Keep a Changelog](#) and this project adheres to [Semantic Versioning](#).

### **23.1 (UNRELEASED) vX.X.X (20XX-XX-XX)**

Full Changelog

#### **23.2 Added**

#### **23.3 Changed**

#### **23.4 Removed**

#### **23.5 Deprecated**

#### **23.6 Fixed**

### **23.7 (UNRELEASED) v3.7.4 (2022-11-02)**

Full Changelog

## 23.8 Added

## 23.9 Changed

## 23.10 Removed

## 23.11 Deprecated

## 23.12 Fixed

- [Configuration Admin] Fix deadlock in ConfigurationAdminImpl::RemoveConfigurations
- [Configuration Admin] configurations using the same pid are not updated properly

## 23.13 (UNRELEASED) v3.7.3 (2022-08-29)

Full Changelog

## 23.14 Added

- Add MSVC analysis to project

## 23.15 Changed

- [Declarative Services] Improve error message that is generated when an appropriate constructor isn't found for the Service Instance.
- [Configuration Admin] Remove automatic config object creation
- Updated CI to use macos-12
- Update CXX\_STANDARD to 17 for doc
- [Core Framework] Upgrade miniz to v3.0
- [Core Framework] Remove manual ref counting for BundleResource
- Add ignore for 3rdparty code for MSVC code analysis
- [Core Framework/Declarative Services] Add log messages when shared library loading throws an exception

## 23.16 Removed

## 23.17 Deprecated

## 23.18 Fixed

- [Declarative Services] Factory Configuration Bug Fix
- [Configuration Admin] Fix race that results in a missed config updated event
- [Core Framework] Fixed sporadic race conditions during framework shutdown
- [Core Framework] Ensure that the ServiceTracker::GetTrackingCount() method returns -1 if the tracker has been opened and then closed.
- Added missing include for <thread>
- [Declarative Services] BugFix when creating instance name for factory components
- [Configuration Admin] Fix race in ConfigurationNotifier::NotifyAllListeners()
- [Configuration Admin] Fix deadlock
- [Core Framework] Improve performance of LDAP matching
- [Core Framework] Fix CFRlogger accessviolation
- Cleaned up some security warnings regarding 'noexcept'
- [Configuration Admin] Multiple services and factory services in bundle dependent on same configuration pid
- Disable code signing for bundle with no c++ code
- Fix compilation issue for arm macOS native compilation
- [Core Framework] Add file handle leak test
- [Configuration Admin] ListConfigurations fix for empty configuration objects.

## 23.19 v3.7.2 (2022-06-16)

Full Changelog

## 23.20 General Note

The last time CppMicroServices was upgraded to a new version on GitHub was two years ago. We think it will not be useful to include every change since then; below we have captured all of the relevant changes between v3.6.0 and v3.7.2.

## 23.21 Added

- [Log Service] LogService Implementation
- [Declarative Services] Added thread pool to DS

- [Core Framework] Anymap erase and compare
- Provide updated manifest.json schema in repo
- [Configuration Admin/Declarative Services] Configadmin ds integration
- GitHub Actions used as CI/CD solution
- [AsyncWorkService] Added AsyncWorkService interface to CppMicroServices
- GitHub Actions runs workflow for clang build with ASAN, TSAN, and UBSAN enabled
- [AsyncWorkService] AsyncWorkService DS Integration
- [AsyncWorkService] AsyncWorkService ConfigAdmin Integration
- [Security/Core Framework] bundle validation mechanism

## 23.22 Changed

- [Core Framework] Migrated all test driver tests to gtest
- Optimize the string creation in `us_service_interface_iid<void>()`
- [Core Framework] Improve the performance of removing service listeners
- [Declarative Services] Reduce possibility for symbol conflicts with autogenerated DS files
- Switch project to c++17
- Upgraded to CMake 3.17
- [Core Framework] Switch code to use `std::string_view` instead of `abseil`
- [Core Framework] Integrate LogService core framework and add more detail to exception messages

## 23.23 Removed

- [Core Framework] Remove Bundle Threads
- TravisCI and Appveyor removed as CI/CD solution

## 23.24 Deprecated

## 23.25 Fixed

- [Core Framework] Fix ServiceTracker race
- [Core Framework] Made ToJSON for strings do proper escaping of special characters
- [Core Framework] Fix issues with line endings in BundleResourceTest.cpp test
- Fix #301 so TSAN builds work on Linux
- [Configuration Admin] ConfigAdmin remove notification when configuration object is created
- [Configuration Admin] Fix TestConcurrentBindUnbind error
- [Core Framework] Fix ServiceTracker race

- [Configuration Admin] RemoveBoundServicesCache fix
- [Declarative Services] Prevent nullptr from being passed to service constructors
- [Declarative Services] fix segfault when service class ctor throws
- [Core Framework] Fix bug when an AddingService method returns nullptr
- [Configuration Admin] Fix deadlock in ConfigAdmin Update, UpdateIfDifferent, and Remove
- [Configuration Admin] Fix ConfigurationAdmin ListConfigurations and Fix Race Conditions in DS
- [Resource Compiler] Allow ResourceCompiler to accept Unicode Command-line arguments
- [Core Framework] service tracker doesn't track services after a close and then open
- Fix warning suppression leakage to non-CppMicroServices code inside translation units
- [Core Framework] Fix leak in ServiceListeners.cpp
- [Core Framework] Ensure that any BundleContext functions do not segfault if the bundle context is invalid
- Fixed issue where DS/CA do not build if US\_BUILD\_TESTING isn't ON
- Fixed build issues when building in "getting\_started" dir
- [Core Framework] Fix check-then-act-race in GetServiceFromFactory
- [Core Framework] Fix bug in FindResources() for data-only bundles
- [Core Framework] Fix check-then-act race for BundleContext
- [Declarative Services] Fix inheritance for ComponentException
- [Core Framework] Add -max-threads flag for core framework mem test
- [Core Framework] Fix leaked file handle

## 23.26 v3.6.0 (2020-08-13)

Full Changelog

### 23.27 Added

- [Declarative Services] Support dynamic policy reference option
- Added initial implementation of Configuration Admin

### 23.28 Changed

- BundleContext::InstallBundles

## 23.29 Removed

## 23.30 Deprecated

## 23.31 Fixed

- Fixed data race in BundleRegistry::Install
- Fixed race condition in Declarative Services
- Removed gtest dependency when not building the tests

## 23.32 v3.5.0 (2020-07-04)

Full Changelog

## 23.33 Added

- Bundle::GetSymbol API
- SharedLibraryException

## 23.34 Changed

- Migrate a handful of tests from the legacy test suite to gtest based test suite
- Improve shared library loading error messages
- c++17 compatible - <https://github.com/CppMicroServices/CppMicroServices/pull/465> - <https://github.com/CppMicroServices/CppMicroServices/pull/479>

## 23.35 Removed

- Remove dead code and partially implemented features
- Remove code with license conflicts

## 23.36 Deprecated

## 23.37 Fixed

- Correctly install Declarative Services and LogService headers
- Infinite loop in GetCurrentWorkingDir
- Use cross build objcopy

- Service reference dependency deadlock
- Instantiating multiple service implementations within the same service component
- Codecov integration
- BundleRegistry deadlock
- Remove unnecessary copying of AnyMap
- Minimum and maximum cardinality values
- Error if duplicate service component reference names are used
- Improve performance of ServiceTrackers

## 23.38 v3.4.0 (2019-12-10)

Full Changelog

### 23.39 Added

- Declarative Services
- Expose checksum from zip archive.
- Framework property (org.cppmicroservices.library.load.options) to control library loading options on macOS and Linux.
- Add gmock

### 23.40 Changed

### 23.41 Removed

### 23.42 Deprecated

- The following Bundle method functions:
  - GetProperties
  - GetProperty
  - GetPropertyKeys

### 23.43 Fixed

- static ServiceTracker object crashes in ServiceTracker::Close()
- Does the ServiceTracker deleter close the service?
- Optimize peak heap allocation when installing bundles
- Change GetHeaders API to return a const ref

- How do service consumers know whether to use `BundleContext::GetService` or `ServiceObjects`?
- Add a testpoint to validate the return value of `ServiceFactory::GetService`
- Invalid Bundle causes crash on method invocation
- Use correct framework event severity and exception types for service factory errors
- Raspberry Pi arm build failing
- Service ctor exception crash
- Update library loading error messages
- Unknown Cmake Command “`add_compile_definitions`”
- `GetChildResources()` should not have a dependency on `GetChildren()`
- Improved code coverage to 90%
- Various performance improvements to:
  - Reduce the number of open file handles
  - Reduce peak heap memory utilization
  - `AtCompoundKey`
  - `ServiceTracker`
  - Service look up
  - Bundle installs

## 23.44 v3.3.0 (2018-02-20)

Full Changelog

## 23.45 Added

- Support constructing long LDAP expressions using concise C++ #246
- Bundle manifest validation #182

## 23.46 Fixed

- Fix seg faults when using default constructed `LDAPFilter` #251

## 23.47 v3.2.0 (2017-10-30)

Full Changelog



## 23.48 Added

- Code coverage metrics. #219
- GTest integration. #200
- Support boolean properties in LDAP filter creation. #224
- Unicode support. #245

## 23.49 Changed

- Re-enable single-threaded build configuration. #239

## 23.50 Fixed

- Fix a race condition when getting and ungetting a service. #202
- Make reading the current working directory thread-safe. #209
- Guard against recursive service factory calls. #213
- Fix LDAP filter match logic to properly handle keys starting with the same sub-string. #227
- Fix seg fault when using a default constructed LDAPFilter instance. #232
- Several fixes with respect to error code handling. #238
- IsConvertibleTo method doesn't check for validity of member. #240

## 23.51 v3.1.0 (2017-06-01)

Full Changelog

### 23.51.1 Changed

- Improved BadAnyCastException message. #181
- Support installing bundles that do not have .DLL/.so/.dylib file extensions. #205

### 23.51.2 Deprecated

- The following BundleContext member functions:
  - RemoveBundleListener
  - RemoveFrameworkListener
  - RemoveServiceListener

And the variants of

- AddBundleListener
- AddFrameworkListener,

- AddServiceListener
- that take member functions.
- The free functions:
  - ServiceListenerMemberFunctor
  - BundleListenerMemberFunctor
  - BindFrameworkListenerToFunctor
- The functions
  - ShrinkableVector::operator[std::size\_t]
  - ShrinkableMap::operator[const Key&]

### 23.51.3 Fixed

- Cannot add more than one listener if its expressed as a lambda. [#95](#)
- Removing Listeners does not work well [#83](#)
- Crash when trying to acquire bundle context [#172](#)
- Fix for unsafe\_any\_cast [#198](#)
- Stopping a framework while bundle threads are still running may deadlock [#210](#)

## 23.52 v3.0.0 (2017-02-08)

### Full Changelog

See the [migration guide](#) for moving from a 2.x release to 3.x.

### 23.52.1 Added

- Added MinGW-w64 to the continuous integration matrix [#168](#)
- Include major version number in library names and install dirs [#144](#)
- Integrated coverity scan reports [#16](#)
- Added OS X to the continuous integration matrix [#136](#)
- Building for Android is now supported [#106](#)
- Enhanced the project structure to support sub-projects [#14](#)
- The bundle life-cycle now supports all states as described by OSGi and is controllable by the user [#25](#)
- Added support for framework listeners and improved logging [#40](#)
- Implemented framework properties [#42](#)
- Static bundles embedded into an executable are now auto-installed [#109](#)
- LDAP queries can now be run against bundle meta-data [#53](#)
- Resources from bundles can now be accessed without loading their shared library [#15](#)
- Support last modified time for embedded resources [#13](#)

### 23.52.2 Changed

- Fix up bundle property and manifest header handling #135
- Introduced C++11 features #35
- Re-organize header files #43, #67
- Improved memory management for framework objects and services #38
- Removed static globals #31
- Switched to using OSGi nomenclature in class names and functions #46
- Improved static bundle support #21
- The resource compiler was ported to C++ and gained improved command line options #55
- Changed System Bundle ID to 0 #45
- Output exception details (if available) for troubleshooting #27
- Using the `US_DECLARE_SERVICE_INTERFACE` macro is now optional #24
- The `Any::ToString()` function now outputs JSON formatted text #12

### 23.52.3 Removed

- The autoload feature was removed from the framework #75

### 23.52.4 Fixed

- Headers with `_p.h` suffix do not get resolved in Xcode for automatic-tracking of counterparts #93
- `usUtils.cpp` - Crash can occur if `FormattedMessage(...)` fails #33
- Using `US_DECLARE_SERVICE_INTERFACE` with Qt does not work #19
- Fixed documentation of public headers. #165

## 23.53 v2.1.1 (2014-01-22)

Full Changelog

### 23.53.1 Fixed

- Resource compiler not found error #11

## 23.54 v2.1.0 (2014-01-11)

Full Changelog

### 23.54.1 Changed

- Use the version number from CMakeLists.txt in the manifest file #10

### 23.54.2 Fixed

- Build fails on Mac OS Mavericks with 10.9 SDK #7
- Comparison of service listener objects is buggy on VS 2008 #9
- Service listener memory leak #8

## 23.55 v2.0.0 (2013-12-23)

### Full Changelog

Major release with backwards incompatible changes. See the [migration guide](#) for a detailed list of changes.

### 23.55.1 Added

- Removed the base class requirement for service objects
- Improved compile time type checking when working with the service registry
- Added a new service factory class for creating multiple service instances based on RFC 195 Service Scopes
- Added ModuleFindHook and ModuleEventHook classes
- Added Service Hooks support
- Added the utility class `us::LDAPProp` for creating LDAP filter strings fluently
- Added support for getting file locations for writing persistent data

### 23.55.2 Removed

- Removed the output stream operator for `us::Any`

### 23.55.3 Fixed

- `US_ABI_LOCAL` and symbol visibility for gcc < 4 #6

## 23.56 v1.0.0 (2013-07-18)

Initial release.

### 23.56.1 Fixed

- Build fails on Windows with VS 2012 RC due to CreateMutex [#5](#)
- usConfig.h not added to framework on Mac [#4](#)
- US\_DEBUG logs even when not in debug mode [#3](#)
- Segmentation error after unloading module [#2](#)
- Build fails on Ubuntu 12.04 [#1](#)



## Symbols

-bundle-file, -b  
     usResourceCompiler3 command line option, 81  
 -bundle-name, -n  
     usResourceCompiler3 command line option, 81  
 -compression-level, -c  
     usResourceCompiler3 command line option, 81  
 -help, -h  
     usResourceCompiler3 command line option, 81  
     usShell3 command line option, 85  
 -load, -l  
     usShell3 command line option, 85  
 -manifest-add, -m  
     usResourceCompiler3 command line option, 81  
 -out-file, -o  
     usResourceCompiler3 command line option, 81  
 -res-add, -r  
     usResourceCompiler3 command line option, 81  
 -verbose, -V  
     usResourceCompiler3 command line option, 81  
 -zip-add, -z  
     usResourceCompiler3 command line option, 81

## C

command

    usFunctionAddResources, 87, 88–90  
     usFunctionEmbedResources, 87, 88, 88, 90  
     usFunctionGenerateBundleInit, 90, 193  
     usFunctionGetResourceSource, 88, 89, 89  
 cppmicroservices::AbstractWebConsolePlugin (C++  
     class), 233  
 cppmicroservices::AbstractWebConsolePlugin::DoGet  
     (C++ function), 234  
 cppmicroservices::AbstractWebConsolePlugin::EndResponse  
     (C++ function), 235  
 cppmicroservices::AbstractWebConsolePlugin::GetCategory  
     (C++ function), 234  
 cppmicroservices::AbstractWebConsolePlugin::GetCssReferences  
     (C++ function), 235

cppmicroservices::AbstractWebConsolePlugin::GetLabel  
     (C++ function), 234  
 cppmicroservices::AbstractWebConsolePlugin::GetTitle  
     (C++ function), 234  
 cppmicroservices::AbstractWebConsolePlugin::GetVariableResolver  
     (C++ function), 234  
 cppmicroservices::AbstractWebConsolePlugin::IsHtmlRequest  
     (C++ function), 234  
 cppmicroservices::AbstractWebConsolePlugin::ReadTemplateFile  
     (C++ function), 236  
 cppmicroservices::AbstractWebConsolePlugin::RenderContent  
     (C++ function), 235  
 cppmicroservices::AbstractWebConsolePlugin::RenderTopNavigation  
     (C++ function), 235  
 cppmicroservices::AbstractWebConsolePlugin::SetVariableResolver  
     (C++ function), 234  
 cppmicroservices::AbstractWebConsolePlugin::StartResponse  
     (C++ function), 235  
 cppmicroservices::AbstractWebConsolePlugin::TemplateData  
     (C++ type), 233  
 cppmicroservices::Any (C++ class), 164  
 cppmicroservices::Any::Any (C++ function), 164  
 cppmicroservices::Any::Empty (C++ function), 166  
 cppmicroservices::Any::operator  
     = (C++ function), 165  
 cppmicroservices::Any::operator= (C++ function), 165,  
     166  
 cppmicroservices::Any::operator== (C++ function), 165  
 cppmicroservices::Any::Swap (C++ function), 164  
 cppmicroservices::Any::ToJSON (C++ function), 166  
 cppmicroservices::Any::ToString (C++ function), 166  
 cppmicroservices::Any::ToStringNoExcept (C++ func-  
     tion), 166  
 cppmicroservices::Any::Type (C++ function), 166  
 cppmicroservices::any\_cast (C++ function), 162, 163  
 cppmicroservices::any\_map (C++ class), 169  
 cppmicroservices::any\_map::~~any\_map (C++ function),  
     170  
 cppmicroservices::any\_map::any\_map (C++ function),  
     170

cppmicroservices::any\_map::at (C++ function), 170  
 cppmicroservices::any\_map::begin (C++ function), 170  
 cppmicroservices::any\_map::cbegin (C++ function), 170  
 cppmicroservices::any\_map::cend (C++ function), 170  
 cppmicroservices::any\_map::clear (C++ function), 170  
 cppmicroservices::any\_map::const\_iter (C++ class), 171  
 cppmicroservices::any\_map::const\_iter::~const\_iter  
   (C++ function), 171  
 cppmicroservices::any\_map::const\_iter::const\_iter (C++  
   function), 171, 172  
 cppmicroservices::any\_map::const\_iter::iterator (C++  
   type), 171  
 cppmicroservices::any\_map::const\_iter::o (C++ mem-  
   ber), 172  
 cppmicroservices::any\_map::const\_iter::operator  
   = (C++ function), 172  
 cppmicroservices::any\_map::const\_iter::operator\* (C++  
   function), 172  
 cppmicroservices::any\_map::const\_iter::operator++  
   (C++ function), 172  
 cppmicroservices::any\_map::const\_iter::operator-> (C++  
   function), 172  
 cppmicroservices::any\_map::const\_iter::operator==  
   (C++ function), 172  
 cppmicroservices::any\_map::const\_iter::pointer (C++  
   type), 171  
 cppmicroservices::any\_map::const\_iter::reference (C++  
   type), 171  
 cppmicroservices::any\_map::const\_iter::uo (C++ mem-  
   ber), 172  
 cppmicroservices::any\_map::const\_iter::uoci (C++ mem-  
   ber), 172  
 cppmicroservices::any\_map::const\_iterator (C++ type),  
   169  
 cppmicroservices::any\_map::const\_pointer (C++ type),  
   169  
 cppmicroservices::any\_map::const\_reference (C++ type),  
   169  
 cppmicroservices::any\_map::count (C++ function), 170  
 cppmicroservices::any\_map::difference\_type (C++ type),  
   169  
 cppmicroservices::any\_map::emplace (C++ function),  
   170  
 cppmicroservices::any\_map::empty (C++ function), 170  
 cppmicroservices::any\_map::end (C++ function), 170  
 cppmicroservices::any\_map::erase (C++ function), 171  
 cppmicroservices::any\_map::find (C++ function), 170  
 cppmicroservices::any\_map::insert (C++ function), 170  
 cppmicroservices::any\_map::iter (C++ class), 172  
 cppmicroservices::any\_map::iter::~iter (C++ function),  
   172  
 cppmicroservices::any\_map::iter::iter (C++ function),  
   172  
 cppmicroservices::any\_map::iter::iterator (C++ type),  
   172  
 cppmicroservices::any\_map::iter::o (C++ member), 173  
 cppmicroservices::any\_map::iter::operator  
   = (C++ function), 172  
 cppmicroservices::any\_map::iter::operator\* (C++ func-  
   tion), 172  
 cppmicroservices::any\_map::iter::operator++ (C++ func-  
   tion), 172  
 cppmicroservices::any\_map::iter::operator-> (C++ func-  
   tion), 172  
 cppmicroservices::any\_map::iter::operator== (C++ func-  
   tion), 172  
 cppmicroservices::any\_map::iter::pointer (C++ type),  
   172  
 cppmicroservices::any\_map::iter::reference (C++ type),  
   172  
 cppmicroservices::any\_map::iter::uo (C++ member), 173  
 cppmicroservices::any\_map::iter::uoci (C++ member),  
   173  
 cppmicroservices::any\_map::iterator (C++ type), 169  
 cppmicroservices::any\_map::key\_type (C++ type), 169  
 cppmicroservices::any\_map::map\_type (C++ type), 169  
 cppmicroservices::any\_map::mapped\_type (C++ type),  
   169  
 cppmicroservices::any\_map::o (C++ member), 171  
 cppmicroservices::any\_map::operator  
   = (C++ function), 171  
 cppmicroservices::any\_map::operator= (C++ function),  
   170  
 cppmicroservices::any\_map::operator== (C++ function),  
   171  
 cppmicroservices::any\_map::operator[] (C++ function),  
   170  
 cppmicroservices::any\_map::ordered\_any\_map (C++  
   type), 169  
 cppmicroservices::any\_map::ORDERED\_MAP (C++  
   class), 169  
 cppmicroservices::any\_map::pointer (C++ type), 169  
 cppmicroservices::any\_map::reference (C++ type), 169  
 cppmicroservices::any\_map::size (C++ function), 170  
 cppmicroservices::any\_map::size\_type (C++ type), 169  
 cppmicroservices::any\_map::type (C++ member), 171  
 cppmicroservices::any\_map::unordered\_any\_cimap  
   (C++ type), 169  
 cppmicroservices::any\_map::unordered\_any\_map (C++  
   type), 169  
 cppmicroservices::any\_map::UNORDERED\_MAP (C++  
   class), 169  
 cppmicroservices::any\_map::UNORDERED\_MAP\_CASEINSENSITIVE\_  
   (C++ class), 169  
 cppmicroservices::any\_map::uo (C++ member), 171  
 cppmicroservices::any\_map::uoci (C++ member), 171  
 cppmicroservices::any\_map::value\_type (C++ type), 169  
 cppmicroservices::AnyMap (C++ class), 167



cppmicroservices::AnyMap::AnyMap (C++ function), 167

cppmicroservices::AnyMap::AtCompoundKey (C++ function), 167, 168

cppmicroservices::AnyMap::GetType (C++ function), 167

cppmicroservices::async::AsyncWorkService (C++ class), 221

cppmicroservices::async::AsyncWorkService::~AsyncWorkService (C++ function), 221

cppmicroservices::async::AsyncWorkService::post (C++ function), 221

cppmicroservices::BadAnyCastException (C++ class), 166

cppmicroservices::BadAnyCastException::~BadAnyCastException (C++ function), 167

cppmicroservices::BadAnyCastException::BadAnyCastException (C++ function), 167

cppmicroservices::BadAnyCastException::what (C++ function), 167

cppmicroservices::Bundle (C++ class), 91

cppmicroservices::Bundle::~~Bundle (C++ function), 94

cppmicroservices::Bundle::Bundle (C++ function), 94, 104

cppmicroservices::Bundle::c (C++ member), 104

cppmicroservices::Bundle::d (C++ member), 104

cppmicroservices::Bundle::FindResources (C++ function), 99

cppmicroservices::Bundle::GetBundleContext (C++ function), 95

cppmicroservices::Bundle::GetBundleId (C++ function), 95

cppmicroservices::Bundle::GetHeaders (C++ function), 97

cppmicroservices::Bundle::GetLastModified (C++ function), 99

cppmicroservices::Bundle::GetLocation (C++ function), 95

cppmicroservices::Bundle::GetProperties (C++ function), 97

cppmicroservices::Bundle::GetProperty (C++ function), 97

cppmicroservices::Bundle::GetPropertyKeys (C++ function), 98

cppmicroservices::Bundle::GetRegisteredServices (C++ function), 98

cppmicroservices::Bundle::GetResource (C++ function), 98

cppmicroservices::Bundle::GetServicesInUse (C++ function), 98

cppmicroservices::Bundle::GetState (C++ function), 95

cppmicroservices::Bundle::GetSymbol (C++ function), 96

cppmicroservices::Bundle::GetSymbolicName (C++ function), 96

cppmicroservices::Bundle::GetVersion (C++ function), 96

cppmicroservices::Bundle::operator = (C++ function), 94

cppmicroservices::Bundle::operator bool (C++ function), 94

cppmicroservices::Bundle::operator= (C++ function), 94

cppmicroservices::Bundle::operator== (C++ function), 94

cppmicroservices::Bundle::operator< (C++ function), 94

cppmicroservices::Bundle::Start (C++ function), 100, 101

cppmicroservices::Bundle::Stop (C++ function), 101, 102

cppmicroservices::Bundle::TimeStamp (C++ type), 93

cppmicroservices::Bundle::Uninstall (C++ function), 103

cppmicroservices::BundleActivator (C++ class), 104

cppmicroservices::BundleActivator::~~BundleActivator (C++ function), 105

cppmicroservices::BundleActivator::Start (C++ function), 105

cppmicroservices::BundleActivator::Stop (C++ function), 105

cppmicroservices::BundleContext (C++ class), 105

cppmicroservices::BundleContext::AddBundleListener (C++ function), 116

cppmicroservices::BundleContext::AddFrameworkListener (C++ function), 116

cppmicroservices::BundleContext::AddServiceListener (C++ function), 115

cppmicroservices::BundleContext::BundleContext (C++ function), 106

cppmicroservices::BundleContext::GetBundle (C++ function), 107

cppmicroservices::BundleContext::GetBundles (C++ function), 108

cppmicroservices::BundleContext::GetDataFile (C++ function), 120

cppmicroservices::BundleContext::GetProperties (C++ function), 107

cppmicroservices::BundleContext::GetProperty (C++ function), 107

cppmicroservices::BundleContext::GetService (C++ function), 113, 114

cppmicroservices::BundleContext::GetServiceObjects (C++ function), 114

cppmicroservices::BundleContext::GetServiceReference (C++ function), 112, 113

cppmicroservices::BundleContext::GetServiceReferences (C++ function), 111, 112

cppmicroservices::BundleContext::InstallBundles (C++ function), 121

cppmicroservices::BundleContext::operator = (C++ function), 106

cppmicroservices::BundleContext::operator bool (C++ function), 107

cppmicroservices::BundleContext::operator= (C++ function), 107

cppmicroservices::BundleContext::operator== (C++ function), 106

cppmicroservices::BundleContext::operator< (C++ function), 106

cppmicroservices::BundleContext::RegisterService (C++ function), 108–110

cppmicroservices::BundleContext::RemoveBundleListener (C++ function), 116

cppmicroservices::BundleContext::RemoveFrameworkListener (C++ function), 117

cppmicroservices::BundleContext::RemoveListener (C++ function), 117

cppmicroservices::BundleContext::RemoveServiceListener (C++ function), 115

cppmicroservices::BundleEvent (C++ class), 122

cppmicroservices::BundleEvent::BundleEvent (C++ function), 123

cppmicroservices::BundleEvent::GetBundle (C++ function), 123

cppmicroservices::BundleEvent::GetOrigin (C++ function), 124

cppmicroservices::BundleEvent::GetType (C++ function), 124

cppmicroservices::BundleEvent::operator bool (C++ function), 123

cppmicroservices::BundleEvent::operator== (C++ function), 124

cppmicroservices::BundleEventHook (C++ class), 124

cppmicroservices::BundleEventHook::~~BundleEventHook (C++ function), 125

cppmicroservices::BundleEventHook::Event (C++ function), 125

cppmicroservices::BundleFindHook (C++ class), 125

cppmicroservices::BundleFindHook::~~BundleFindHook (C++ function), 125

cppmicroservices::BundleFindHook::Find (C++ function), 125

cppmicroservices::BundleResource (C++ class), 125

cppmicroservices::BundleResource::~~BundleResource (C++ function), 126

cppmicroservices::BundleResource::BundleResource (C++ function), 126

cppmicroservices::BundleResource::GetBaseName (C++ function), 128

cppmicroservices::BundleResource::GetChildren (C++ function), 129

cppmicroservices::BundleResource::GetChildResources (C++ function), 129

cppmicroservices::BundleResource::GetCompleteBaseName (C++ function), 128

cppmicroservices::BundleResource::GetCompleteSuffix (C++ function), 129

cppmicroservices::BundleResource::GetCompressedSize (C++ function), 129

cppmicroservices::BundleResource::GetCrc32 (C++ function), 130

cppmicroservices::BundleResource::GetLastModified (C++ function), 129

cppmicroservices::BundleResource::GetName (C++ function), 127

cppmicroservices::BundleResource::GetPath (C++ function), 128

cppmicroservices::BundleResource::GetResourcePath (C++ function), 128

cppmicroservices::BundleResource::GetSize (C++ function), 129

cppmicroservices::BundleResource::GetSuffix (C++ function), 128

cppmicroservices::BundleResource::IsDir (C++ function), 129

cppmicroservices::BundleResource::IsFile (C++ function), 129

cppmicroservices::BundleResource::IsValid (C++ function), 127

cppmicroservices::BundleResource::operator = (C++ function), 127

cppmicroservices::BundleResource::operator bool (C++ function), 127

cppmicroservices::BundleResource::operator= (C++ function), 126

cppmicroservices::BundleResource::operator== (C++ function), 127

cppmicroservices::BundleResource::operator< (C++ function), 127

cppmicroservices::BundleResourceStream (C++ class), 130

cppmicroservices::BundleResourceStream::BundleResourceStream (C++ function), 130

cppmicroservices::BundleResourceStream::operator= (C++ function), 130

cppmicroservices::BundleVersion (C++ class), 173

cppmicroservices::BundleVersion::BundleVersion (C++ function), 173, 174

cppmicroservices::BundleVersion::Compare (C++ function), 175

cppmicroservices::BundleVersion::EmptyVersion (C++ function), 175

cppmicroservices::BundleVersion::GetMajor (C++ function), 174

cppmicroservices::BundleVersion::GetMicro (C++ function), 174

cppmicroservices::BundleVersion::GetMinor (C++ function), 174

cppmicroservices::BundleVersion::GetQualifier (C++

- function), 174
- cppmicroservices::BundleVersion::IsUndefined (C++ function), 174
- cppmicroservices::BundleVersion::operator== (C++ function), 174
- cppmicroservices::BundleVersion::ParseVersion (C++ function), 175
- cppmicroservices::BundleVersion::ToString (C++ function), 174
- cppmicroservices::BundleVersion::UndefinedVersion (C++ function), 175
- cppmicroservices::Constants (C++ type), 176
- cppmicroservices::Constants::ACTIVATION\_LAZY (C++ member), 177
- cppmicroservices::Constants::BUNDLE\_ACTIVATIONPOLICY (C++ member), 177
- cppmicroservices::Constants::BUNDLE\_ACTIVATOR (C++ member), 176
- cppmicroservices::Constants::BUNDLE\_CATEGORY (C++ member), 176
- cppmicroservices::Constants::BUNDLE\_CONTACTADDRESS (C++ member), 177
- cppmicroservices::Constants::BUNDLE\_COPYRIGHT (C++ member), 176
- cppmicroservices::Constants::BUNDLE\_DESCRIPTION (C++ member), 176
- cppmicroservices::Constants::BUNDLE\_DOCURL (C++ member), 177
- cppmicroservices::Constants::BUNDLE\_LOCALIZATION (C++ member), 177
- cppmicroservices::Constants::BUNDLE\_LOCALIZATION\_DEFAULTS (C++ member), 177
- cppmicroservices::Constants::BUNDLE\_MANIFESTVERSION (C++ member), 176
- cppmicroservices::Constants::BUNDLE\_NAME (C++ member), 176
- cppmicroservices::Constants::BUNDLE\_SYMBOLICNAME (C++ member), 177
- cppmicroservices::Constants::BUNDLE\_VENDOR (C++ member), 176
- cppmicroservices::Constants::BUNDLE\_VERSION (C++ member), 176
- cppmicroservices::Constants::FRAMEWORK\_BUNDLE\_VALIDATION\_FUNC (C++ member), 179
- cppmicroservices::Constants::FRAMEWORK\_LOG (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_STORAGE (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_STORAGE\_OPEN (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_STORAGE\_OPEN\_READONLY (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_THREADING (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_THREADING\_SINGLE (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_THREADING\_SUPPORT (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_UUID (C++ member), 179
- cppmicroservices::Constants::FRAMEWORK\_VENDOR (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_VERSION (C++ member), 178
- cppmicroservices::Constants::FRAMEWORK\_WORKING\_DIR (C++ member), 179
- cppmicroservices::Constants::LIBRARY\_LOAD\_OPTIONS (C++ member), 180
- cppmicroservices::Constants::OBJECTCLASS (C++ member), 179
- cppmicroservices::Constants::SCOPE\_BUNDLE (C++ member), 180
- cppmicroservices::Constants::SCOPE\_PROTOTYPE (C++ member), 180
- cppmicroservices::Constants::SCOPE\_SINGLETON (C++ member), 180
- cppmicroservices::Constants::SERVICE\_DESCRIPTION (C++ member), 180
- cppmicroservices::Constants::SERVICE\_ID (C++ member), 179
- cppmicroservices::Constants::SERVICE\_PID (C++ member), 179
- cppmicroservices::Constants::SERVICE\_RANKING (C++ member), 179
- cppmicroservices::Constants::SERVICE\_SCOPE (C++ member), 180
- cppmicroservices::Constants::SERVICE\_VENDOR (C++ member), 180
- cppmicroservices::Constants::SYSTEM\_BUNDLE\_LOCATION (C++ member), 176
- cppmicroservices::Constants::SYSTEM\_BUNDLE\_SYMBOLICNAME (C++ member), 176
- cppmicroservices::ExtractInterface (C++ function), 142
- cppmicroservices::Framework (C++ class), 130
- cppmicroservices::framework::dto::BundleDTO (C++ class), 197
- cppmicroservices::framework::dto::BundleDTO::id (C++ member), 197
- cppmicroservices::framework::dto::BundleDTO::lastModified (C++ member), 197
- cppmicroservices::framework::dto::BundleDTO::state (C++ member), 197
- cppmicroservices::framework::dto::BundleDTO::symbolicName (C++ member), 197
- cppmicroservices::framework::dto::BundleDTO::version (C++ member), 197
- cppmicroservices::framework::dto::ServiceReferenceDTO (C++ class), 208

cppmicroservices::framework::dto::ServiceReferenceDTO::bundle (C++ member), 208

cppmicroservices::framework::dto::ServiceReferenceDTO::id (C++ member), 208

cppmicroservices::framework::dto::ServiceReferenceDTO::properties (C++ member), 208

cppmicroservices::framework::dto::ServiceReferenceDTO::usingBundle (C++ member), 208

cppmicroservices::Framework::Framework (C++ function), 131

cppmicroservices::Framework::Init (C++ function), 131

cppmicroservices::Framework::operator= (C++ function), 131

cppmicroservices::Framework::WaitForStop (C++ function), 132

cppmicroservices::FrameworkEvent (C++ class), 132

cppmicroservices::FrameworkEvent::FrameworkEvent (C++ function), 133

cppmicroservices::FrameworkEvent::GetBundle (C++ function), 134

cppmicroservices::FrameworkEvent::GetMessage (C++ function), 134

cppmicroservices::FrameworkEvent::GetThrowable (C++ function), 134

cppmicroservices::FrameworkEvent::GetType (C++ function), 134

cppmicroservices::FrameworkEvent::operator bool (C++ function), 133

cppmicroservices::FrameworkFactory (C++ class), 180

cppmicroservices::FrameworkFactory::NewFramework (C++ function), 181

cppmicroservices::GetBundleContext (C++ function), 181

cppmicroservices::HttpServlet (C++ class), 223

cppmicroservices::HttpServlet::~~HttpServlet (C++ function), 224

cppmicroservices::HttpServlet::Destroy (C++ function), 224

cppmicroservices::HttpServlet::DoDelete (C++ function), 224

cppmicroservices::HttpServlet::DoGet (C++ function), 224

cppmicroservices::HttpServlet::DoHead (C++ function), 224

cppmicroservices::HttpServlet::DoPost (C++ function), 224

cppmicroservices::HttpServlet::DoPut (C++ function), 224

cppmicroservices::HttpServlet::DoTrace (C++ function), 224

cppmicroservices::HttpServlet::GetLastModified (C++ function), 224

cppmicroservices::HttpServlet::GetServletConfig (C++ function), 224

cppmicroservices::HttpServlet::GetServletContext (C++ function), 224

cppmicroservices::HttpServlet::HttpServlet (C++ function), 223

cppmicroservices::HttpServlet::Init (C++ function), 223

cppmicroservices::HttpServlet::Lock (C++ function), 224

cppmicroservices::HttpServlet::PROP\_CONTEXT\_ROOT (C++ member), 224

cppmicroservices::HttpServlet::Service (C++ function), 224

cppmicroservices::HttpServletRequest (C++ class), 225

cppmicroservices::HttpServletRequest::~~HttpServletRequest (C++ function), 225

cppmicroservices::HttpServletRequest::GetAcceptHeader (C++ function), 226

cppmicroservices::HttpServletRequest::GetAttribute (C++ function), 225

cppmicroservices::HttpServletRequest::GetAttributeNames (C++ function), 225

cppmicroservices::HttpServletRequest::GetContentLength (C++ function), 225

cppmicroservices::HttpServletRequest::GetContentType (C++ function), 225

cppmicroservices::HttpServletRequest::GetContextPath (C++ function), 225

cppmicroservices::HttpServletRequest::GetDateHeader (C++ function), 225

cppmicroservices::HttpServletRequest::GetHeader (C++ function), 225

cppmicroservices::HttpServletRequest::GetHeaderNames (C++ function), 225

cppmicroservices::HttpServletRequest::GetHeaders (C++ function), 225

cppmicroservices::HttpServletRequest::GetLocalName (C++ function), 225

cppmicroservices::HttpServletRequest::GetLocalPort (C++ function), 225

cppmicroservices::HttpServletRequest::GetMethod (C++ function), 225

cppmicroservices::HttpServletRequest::GetPathInfo (C++ function), 225

cppmicroservices::HttpServletRequest::GetProtocol (C++ function), 225

cppmicroservices::HttpServletRequest::GetQueryString (C++ function), 225

cppmicroservices::HttpServletRequest::GetRemoteHost (C++ function), 225

cppmicroservices::HttpServletRequest::GetRemotePort (C++ function), 225

cppmicroservices::HttpServletRequest::GetRequestUri (C++ function), 225

cppmicroservices::HttpServletRequest::GetRequestUrl (C++ function), 225

cppmicroservices::HttpServletRequest::GetScheme (C++

- function), 225
- cppmicroservices::HttpServletRequest::GetServerName (C++ function), 225
- cppmicroservices::HttpServletRequest::GetServerPort (C++ function), 225
- cppmicroservices::HttpServletRequest::GetServletContext (C++ function), 225
- cppmicroservices::HttpServletRequest::GetServletPath (C++ function), 225
- cppmicroservices::HttpServletRequest::HttpServletRequest (C++ function), 225
- cppmicroservices::HttpServletRequest::operator= (C++ function), 225
- cppmicroservices::HttpServletRequest::RemoveAttribute (C++ function), 226
- cppmicroservices::HttpServletRequest::SetAttribute (C++ function), 226
- cppmicroservices::HttpServletResponse (C++ class), 226
- cppmicroservices::HttpServletResponse::~~HttpServletResponse (C++ function), 226
- cppmicroservices::HttpServletResponse::AddHeader (C++ function), 226
- cppmicroservices::HttpServletResponse::AddIntHeader (C++ function), 226
- cppmicroservices::HttpServletResponse::ContainsHeader (C++ function), 226
- cppmicroservices::HttpServletResponse::d (C++ member), 229
- cppmicroservices::HttpServletResponse::FlushBuffer (C++ function), 226
- cppmicroservices::HttpServletResponse::GetBufferSize (C++ function), 226
- cppmicroservices::HttpServletResponse::GetCharacterEncoding (C++ function), 226
- cppmicroservices::HttpServletResponse::GetContentType (C++ function), 226
- cppmicroservices::HttpServletResponse::GetHeader (C++ function), 226
- cppmicroservices::HttpServletResponse::GetOutputStream (C++ function), 226
- cppmicroservices::HttpServletResponse::GetOutputStreamBuffer (C++ function), 229
- cppmicroservices::HttpServletResponse::GetStatus (C++ function), 226
- cppmicroservices::HttpServletResponse::HttpServletRequest (C++ function), 226, 229
- cppmicroservices::HttpServletResponse::IsCommitted (C++ function), 226
- cppmicroservices::HttpServletResponse::operator= (C++ function), 226
- cppmicroservices::HttpServletResponse::Reset (C++ function), 226
- cppmicroservices::HttpServletResponse::ResetBuffer (C++ function), 226
- cppmicroservices::HttpServletResponse::SC\_ACCEPTED (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_BAD\_GATEWAY (C++ member), 229
- cppmicroservices::HttpServletResponse::SC\_BAD\_REQUEST (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_CONFLICT (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_CONTINUE (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_CREATED (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_EXPECTATION\_FAILED (C++ member), 229
- cppmicroservices::HttpServletResponse::SC\_FORBIDDEN (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_FOUND (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_GATEWAY\_TIMEOUT (C++ member), 229
- cppmicroservices::HttpServletResponse::SC\_GONE (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_HTTP\_VERSION\_NOT\_SUPPORTED (C++ member), 229
- cppmicroservices::HttpServletResponse::SC\_INTERNAL\_SERVER\_ERROR (C++ member), 229
- cppmicroservices::HttpServletResponse::SC\_LENGTH\_REQUIRED (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_METHOD\_NOT\_ALLOWED (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_MOVED\_PERMANENTLY (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_MOVED\_TEMPORARILY (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_MULTIPLE\_CHOICES (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_NO\_CONTENT (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_NON\_AUTHORITATIVE\_INFORMATION (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_NOT\_ACCEPTABLE (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_NOT\_FOUND (C++ member), 228
- cppmicroservices::HttpServletResponse::SC\_NOT\_IMPLEMENTED (C++ member), 229
- cppmicroservices::HttpServletResponse::SC\_NOT\_MODIFIED (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_OK (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_PARTIAL\_CONTENT (C++ member), 227
- cppmicroservices::HttpServletResponse::SC\_PAYMENT\_REQUIRED (C++ member), 228



cppmicroservices::HttpServletResponse::SC\_PRECONDITION\_FAILED (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_PROXY\_AUTHENTICATION\_REQUIRED (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_REQUEST\_ENTITY\_TOO\_LARGE (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_REQUEST\_TIMEOUT (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_REQUEST\_URI\_TOO\_LONG (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_REQUESTED\_RANGE\_NOT\_SATISFIABLE (C++ member), 229  
 cppmicroservices::HttpServletResponse::SC\_RESET\_CONTENT (C++ member), 227  
 cppmicroservices::HttpServletResponse::SC\_SEE\_OTHER (C++ member), 227  
 cppmicroservices::HttpServletResponse::SC\_SERVICE\_UNAVAILABLE (C++ member), 229  
 cppmicroservices::HttpServletResponse::SC\_SWITCHING\_PROTOCOLS (C++ member), 227  
 cppmicroservices::HttpServletResponse::SC\_TEMPORARY\_REDIRECT (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_UNAUTHORIZED (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_UNSUPPORTED\_MEDIA\_TYPE (C++ member), 228  
 cppmicroservices::HttpServletResponse::SC\_USE\_PROXY (C++ member), 227  
 cppmicroservices::HttpServletResponse::SendError (C++ function), 227  
 cppmicroservices::HttpServletResponse::SendRedirect (C++ function), 227  
 cppmicroservices::HttpServletResponse::SetBufferSize (C++ function), 226  
 cppmicroservices::HttpServletResponse::SetCharacterEncoding (C++ function), 226  
 cppmicroservices::HttpServletResponse::SetContentLength (C++ function), 226  
 cppmicroservices::HttpServletResponse::SetContentType (C++ function), 226  
 cppmicroservices::HttpServletResponse::SetDateHeader (C++ function), 226  
 cppmicroservices::HttpServletResponse::SetHeader (C++ function), 226  
 cppmicroservices::HttpServletResponse::SetIntHeader (C++ function), 226  
 cppmicroservices::HttpServletResponse::SetOutputStreamBuffer (C++ function), 229  
 cppmicroservices::HttpServletResponse::SetStatus (C++ function), 226  
 cppmicroservices::LDAPFilter (C++ class), 182  
 cppmicroservices::LDAPFilter::~LDAPFilter (C++ function), 183  
 cppmicroservices::LDAPFilter::d (C++ member), 185  
 cppmicroservices::LDAPFilter::LDAPFilter (C++ function), 183  
 cppmicroservices::LDAPFilter::Match (C++ function), 183, 184  
 cppmicroservices::LDAPFilter::MatchCase (C++ function), 184  
 cppmicroservices::LDAPFilter::operator bool (C++ function), 183  
 cppmicroservices::LDAPFilter::operator= (C++ function), 184  
 cppmicroservices::LDAPFilter::operator== (C++ function), 184  
 cppmicroservices::LDAPFilter::ToString (C++ function), 184  
 cppmicroservices::LDAPProp (C++ class), 185  
 cppmicroservices::LDAPProp::Approx (C++ function), 186  
 cppmicroservices::LDAPProp::LDAPProp (C++ function), 185  
 cppmicroservices::LDAPProp::operator (C++ function), 181, 182, 185  
 cppmicroservices::LDAPProp::operator LDAPPropExpr (C++ function), 185  
 cppmicroservices::LDAPProp::operator== (C++ function), 181, 185  
 cppmicroservices::LDAPProp::operator>= (C++ function), 182, 185, 186  
 cppmicroservices::LDAPProp::operator<= (C++ function), 182, 186  
 cppmicroservices::logservice::LogService (C++ class), 219  
 cppmicroservices::logservice::LogService::~LogService (C++ function), 220  
 cppmicroservices::logservice::LogService::Log (C++ function), 220  
 cppmicroservices::MakeInterfaceMap (C++ class), 142  
 cppmicroservices::MakeInterfaceMap::MakeInterfaceMap (C++ function), 143  
 cppmicroservices::MakeInterfaceMap::operator InterfaceMapConstPtr (C++ function), 143  
 cppmicroservices::MakeInterfaceMap::operator InterfaceMapPtr (C++ function), 143  
 cppmicroservices::operator== (C++ function), 132  
 cppmicroservices::operator<< (C++ function), 91, 121, 125, 132, 136, 148, 173, 181  
 cppmicroservices::PrototypeServiceFactory (C++ class), 134  
 cppmicroservices::PrototypeServiceFactory::GetService (C++ function), 135  
 cppmicroservices::PrototypeServiceFactory::UngetService (C++ function), 135  
 cppmicroservices::ref\_any\_cast (C++ function), 163  
 cppmicroservices::service::cm::Configuration (C++

class), 211

cppmicroservices::service::cm::Configuration::~Configuration (C++ function), 211

cppmicroservices::service::cm::Configuration::GetChangeListener (C++ function), 212

cppmicroservices::service::cm::Configuration::GetFactoryPid (C++ function), 211

cppmicroservices::service::cm::Configuration::GetPid (C++ function), 211

cppmicroservices::service::cm::Configuration::GetProperties (C++ function), 211

cppmicroservices::service::cm::Configuration::Remove (C++ function), 213

cppmicroservices::service::cm::Configuration::Update (C++ function), 212

cppmicroservices::service::cm::Configuration::UpdateIfDifferent (C++ function), 212

cppmicroservices::service::cm::ConfigurationAdmin (C++ class), 213

cppmicroservices::service::cm::ConfigurationAdmin::~~ConfigurationAdmin (C++ function), 213

cppmicroservices::service::cm::ConfigurationAdmin::CreateFactoryConfiguration (C++ function), 214

cppmicroservices::service::cm::ConfigurationAdmin::GetConfiguration (C++ function), 213

cppmicroservices::service::cm::ConfigurationAdmin::GetFactoryConfiguration (C++ function), 214

cppmicroservices::service::cm::ConfigurationAdmin::ListConfigurations (C++ function), 214

cppmicroservices::service::cm::ConfigurationEvent (C++ class), 215

cppmicroservices::service::cm::ConfigurationEvent::ConfigurationEvent (C++ function), 216

cppmicroservices::service::cm::ConfigurationEvent::getFactoryPid (C++ function), 216

cppmicroservices::service::cm::ConfigurationEvent::getPid (C++ function), 216

cppmicroservices::service::cm::ConfigurationEvent::getReference (C++ function), 216

cppmicroservices::service::cm::ConfigurationEvent::getType (C++ function), 216

cppmicroservices::service::cm::ConfigurationException (C++ class), 215

cppmicroservices::service::cm::ConfigurationException::~~ConfigurationException (C++ function), 215

cppmicroservices::service::cm::ConfigurationException::ConfigurationException (C++ function), 215

cppmicroservices::service::cm::ConfigurationException::GetProperties (C++ function), 215

cppmicroservices::service::cm::ConfigurationException::GetReason (C++ function), 215

cppmicroservices::service::cm::ConfigurationListener (C++ class), 216

cppmicroservices::service::cm::ConfigurationListener::~~ConfigurationListener (C++ function), 216

cppmicroservices::service::cm::ConfigurationListener::configurationEvent (C++ function), 216

cppmicroservices::service::cm::ManagedService (C++ class), 217

cppmicroservices::service::cm::ManagedService::~~ManagedService (C++ function), 217

cppmicroservices::service::cm::ManagedService::Updated (C++ function), 217

cppmicroservices::service::cm::ManagedServiceFactory (C++ class), 217

cppmicroservices::service::cm::ManagedServiceFactory::~~ManagedServiceFactory (C++ function), 218

cppmicroservices::service::cm::ManagedServiceFactory::Removed (C++ function), 218

cppmicroservices::service::cm::ManagedServiceFactory::Updated (C++ function), 218

cppmicroservices::service::component::ComponentConstants::COMPONENT\_NAME (C++ member), 199

cppmicroservices::service::component::ComponentConstants::COMPONENT\_SYMBOL (C++ member), 199

cppmicroservices::service::component::ComponentConstants::SERVICE\_COMPONENT (C++ member), 199

cppmicroservices::service::component::ComponentContext (C++ class), 199

cppmicroservices::service::component::ComponentContext::~~ComponentContext (C++ function), 200

cppmicroservices::service::component::ComponentContext::DisableComponent (C++ function), 200

cppmicroservices::service::component::ComponentContext::EnableComponent (C++ function), 200

cppmicroservices::service::component::ComponentContext::GetBundleContext (C++ function), 200

cppmicroservices::service::component::ComponentContext::GetProperties (C++ function), 200

cppmicroservices::service::component::ComponentContext::GetServiceReference (C++ function), 201

cppmicroservices::service::component::ComponentContext::GetUsingBundleContext (C++ function), 200

cppmicroservices::service::component::ComponentContext::LocateService (C++ function), 201

cppmicroservices::service::component::ComponentContext::LocateServices (C++ function), 201, 202

cppmicroservices::service::component::ComponentException (C++ class), 203

cppmicroservices::service::component::ComponentException::~~ComponentException (C++ function), 204

cppmicroservices::service::component::ComponentException::ComponentException (C++ function), 204

cppmicroservices::service::component::runtime::dto::ComponentConfiguration (C++ class), 198

cppmicroservices::service::component::runtime::dto::ComponentConfiguration::ComponentConfiguration (C++ member), 198

cppmicroservices::service::component::runtime::dto::ComponentConfiguration::ComponentConfiguration (C++ member), 198





- cppmicroservices::ServiceException (C++ class), 138
- cppmicroservices::ServiceException::~~ServiceException (C++ function), 139
- cppmicroservices::ServiceException::GetType (C++ function), 139
- cppmicroservices::ServiceException::operator= (C++ function), 139
- cppmicroservices::ServiceException::ServiceException (C++ function), 139
- cppmicroservices::ServiceFactory (C++ class), 139
- cppmicroservices::ServiceFactory::~~ServiceFactory (C++ function), 140
- cppmicroservices::ServiceFactory::GetService (C++ function), 140
- cppmicroservices::ServiceFactory::UngetService (C++ function), 140
- cppmicroservices::ServiceFindHook (C++ class), 141
- cppmicroservices::ServiceFindHook::~~ServiceFindHook (C++ function), 141
- cppmicroservices::ServiceFindHook::Find (C++ function), 141
- cppmicroservices::ServiceListenerHook (C++ class), 144
- cppmicroservices::ServiceListenerHook::~~ServiceListenerHook (C++ function), 144
- cppmicroservices::ServiceListenerHook::Added (C++ function), 144
- cppmicroservices::ServiceListenerHook::ListenerInfo (C++ class), 144
- cppmicroservices::ServiceListenerHook::ListenerInfo::~~ListenerInfo (C++ function), 145
- cppmicroservices::ServiceListenerHook::ListenerInfo::GetBundleCost (C++ function), 145
- cppmicroservices::ServiceListenerHook::ListenerInfo::GetFilter (C++ function), 145
- cppmicroservices::ServiceListenerHook::ListenerInfo::IsNotUp (C++ function), 145
- cppmicroservices::ServiceListenerHook::ListenerInfo::IsReady (C++ function), 145
- cppmicroservices::ServiceListenerHook::ListenerInfo::ListenerInfo (C++ function), 145
- cppmicroservices::ServiceListenerHook::ListenerInfo::operator= (C++ function), 145
- cppmicroservices::ServiceListenerHook::ListenerInfo::operator= (C++ function), 145
- cppmicroservices::ServiceListenerHook::Removed (C++ function), 144
- cppmicroservices::ServiceObjects (C++ class), 146
- cppmicroservices::ServiceObjects::GetService (C++ function), 146, 147
- cppmicroservices::ServiceObjects::GetServiceReference (C++ function), 147
- cppmicroservices::ServiceObjects::operator= (C++ function), 146, 147
- cppmicroservices::ServiceObjects::ServiceObjects (C++ function), 146, 147
- cppmicroservices::ServiceObjects<void> (C++ class), 147
- cppmicroservices::ServiceReference (C++ class), 148
- cppmicroservices::ServiceReference::operator= (C++ function), 148
- cppmicroservices::ServiceReference::ServiceReference (C++ function), 148
- cppmicroservices::ServiceReference<S>::ServiceType (C++ type), 148
- cppmicroservices::ServiceReferenceBase (C++ class), 148
- cppmicroservices::ServiceReferenceBase::~~ServiceReferenceBase (C++ function), 149
- cppmicroservices::ServiceReferenceBase::GetBundle (C++ function), 150
- cppmicroservices::ServiceReferenceBase::GetInterfaceId (C++ function), 150
- cppmicroservices::ServiceReferenceBase::GetProperty (C++ function), 149
- cppmicroservices::ServiceReferenceBase::GetPropertyKeys (C++ function), 149
- cppmicroservices::ServiceReferenceBase::GetUsingBundles (C++ function), 150
- cppmicroservices::ServiceReferenceBase::IsConvertibleTo (C++ function), 150
- cppmicroservices::ServiceReferenceBase::operator bool (C++ function), 149
- cppmicroservices::ServiceReferenceBase::operator= (C++ function), 149, 151
- cppmicroservices::ServiceReferenceBase::operator== (C++ function), 151
- cppmicroservices::ServiceReferenceBase::operator< (C++ function), 150
- cppmicroservices::ServiceReferenceBase::ServiceReferenceBase (C++ function), 149
- cppmicroservices::ServiceReferenceU (C++ type), 148
- cppmicroservices::ServiceRegistration (C++ class), 151
- cppmicroservices::ServiceRegistration::GetReference (C++ function), 151, 152
- cppmicroservices::ServiceRegistration::ServiceRegistration (C++ function), 151
- cppmicroservices::ServiceRegistrationBase (C++ class), 152
- cppmicroservices::ServiceRegistrationBase::~~ServiceRegistrationBase (C++ function), 153
- cppmicroservices::ServiceRegistrationBase::GetReference (C++ function), 153
- cppmicroservices::ServiceRegistrationBase::operator bool (C++ function), 152
- cppmicroservices::ServiceRegistrationBase::operator= (C++ function), 152, 154
- cppmicroservices::ServiceRegistrationBase::operator== (C++ function), 154

cppmicroservices::ServiceRegistrationBase::operator< (C++ function), 154

cppmicroservices::ServiceRegistrationBase::ServiceRegistrationBase (C++ function), 162

cppmicroservices::ServiceRegistrationBase::SetProperties (C++ function), 153

cppmicroservices::ServiceRegistrationBase::Unregister (C++ function), 153

cppmicroservices::ServiceTracker (C++ class), 154

cppmicroservices::ServiceTracker::~ServiceTracker (C++ function), 156

cppmicroservices::ServiceTracker::AddingService (C++ function), 160

cppmicroservices::ServiceTracker::Close (C++ function), 157

cppmicroservices::ServiceTracker::GetService (C++ function), 158, 159

cppmicroservices::ServiceTracker::GetServiceReference (C++ function), 158

cppmicroservices::ServiceTracker::GetServiceReferences (C++ function), 158

cppmicroservices::ServiceTracker::GetServices (C++ function), 158

cppmicroservices::ServiceTracker::GetTracked (C++ function), 159

cppmicroservices::ServiceTracker::GetTrackingCount (C++ function), 159

cppmicroservices::ServiceTracker::IsEmpty (C++ function), 159

cppmicroservices::ServiceTracker::ModifiedService (C++ function), 160

cppmicroservices::ServiceTracker::Open (C++ function), 157

cppmicroservices::ServiceTracker::Remove (C++ function), 159

cppmicroservices::ServiceTracker::RemovedService (C++ function), 160

cppmicroservices::ServiceTracker::ServiceTracker (C++ function), 156

cppmicroservices::ServiceTracker::Size (C++ function), 159

cppmicroservices::ServiceTracker::WaitForService (C++ function), 157

cppmicroservices::ServiceTracker<S, T>::TrackedParamType (C++ type), 155

cppmicroservices::ServiceTracker<S, T>::TrackingMap (C++ type), 155

cppmicroservices::ServiceTrackerCustomizer (C++ class), 161

cppmicroservices::ServiceTrackerCustomizer::~ServiceTrackerCustomizer (C++ function), 161

cppmicroservices::ServiceTrackerCustomizer::AddingService (C++ function), 161

cppmicroservices::ServiceTrackerCustomizer::ModifiedService (C++ function), 162

cppmicroservices::ServiceTrackerCustomizer::RemovedService (C++ function), 162

cppmicroservices::ServiceTrackerCustomizer::TypeTraits (C++ class), 162

cppmicroservices::ServiceTrackerCustomizer<S, T>::TrackedParamType (C++ type), 161

cppmicroservices::ServiceTrackerCustomizer<S, T>::TypeTraits::ConvertToTrackedType (C++ function), 162

cppmicroservices::ServiceTrackerCustomizer<S, T>::TypeTraits::ServiceType (C++ type), 162

cppmicroservices::ServiceTrackerCustomizer<S, T>::TypeTraits::TrackedParamType (C++ type), 162

cppmicroservices::ServiceTrackerCustomizer<S, T>::TypeTraits::TrackedType (C++ type), 162

cppmicroservices::ServletConfig (C++ class), 229

cppmicroservices::ServletConfig::~ServletConfig (C++ function), 230

cppmicroservices::ServletConfig::GetServletContext (C++ function), 230

cppmicroservices::ServletConfig::GetServletName (C++ function), 230

cppmicroservices::ServletConfig::operator= (C++ function), 230

cppmicroservices::ServletConfig::ServletConfig (C++ function), 230

cppmicroservices::ServletConfig::SetServletContext (C++ function), 230

cppmicroservices::ServletConfig::SetServletName (C++ function), 230

cppmicroservices::ServletContainer (C++ class), 230

cppmicroservices::ServletContainer::~ServletContainer (C++ function), 230

cppmicroservices::ServletContainer::GetContext (C++ function), 230

cppmicroservices::ServletContainer::GetContextPath (C++ function), 230

cppmicroservices::ServletContainer::ServletContainer (C++ function), 230

cppmicroservices::ServletContainer::SetContextPath (C++ function), 230

cppmicroservices::ServletContainer::Start (C++ function), 230

cppmicroservices::ServletContainer::Stop (C++ function), 230

cppmicroservices::ServletContext (C++ class), 231

cppmicroservices::ServletContext::GetContext (C++ function), 231

cppmicroservices::ServletContext::GetContextPath (C++ function), 231

- cppmicroservices::ServletContext::GetMimeType (C++ function), 231
- cppmicroservices::SharedLibrary (C++ class), 188
- cppmicroservices::SharedLibrary::~~SharedLibrary (C++ function), 188
- cppmicroservices::SharedLibrary::GetFilePath (C++ function), 189
- cppmicroservices::SharedLibrary::GetHandle (C++ function), 190
- cppmicroservices::SharedLibrary::GetLibraryPath (C++ function), 189
- cppmicroservices::SharedLibrary::GetName (C++ function), 189
- cppmicroservices::SharedLibrary::GetPrefix (C++ function), 190
- cppmicroservices::SharedLibrary::GetSuffix (C++ function), 190
- cppmicroservices::SharedLibrary::IsLoaded (C++ function), 190
- cppmicroservices::SharedLibrary::Load (C++ function), 188
- cppmicroservices::SharedLibrary::operator= (C++ function), 188
- cppmicroservices::SharedLibrary::SetFilePath (C++ function), 189
- cppmicroservices::SharedLibrary::SetLibraryPath (C++ function), 189
- cppmicroservices::SharedLibrary::SetName (C++ function), 189
- cppmicroservices::SharedLibrary::SetPrefix (C++ function), 190
- cppmicroservices::SharedLibrary::SetSuffix (C++ function), 190
- cppmicroservices::SharedLibrary::SharedLibrary (C++ function), 188
- cppmicroservices::SharedLibrary::Unload (C++ function), 188
- cppmicroservices::ShellService (C++ class), 241
- cppmicroservices::ShellService::~~ShellService (C++ function), 241
- cppmicroservices::ShellService::ExecuteCommand (C++ function), 241
- cppmicroservices::ShellService::GetCompletions (C++ function), 241
- cppmicroservices::ShellService::ShellService (C++ function), 241
- cppmicroservices::ShrinkableMap (C++ class), 190
- cppmicroservices::ShrinkableMap::at (C++ function), 191, 192
- cppmicroservices::ShrinkableMap::begin (C++ function), 191
- cppmicroservices::ShrinkableMap::clear (C++ function), 191
- cppmicroservices::ShrinkableMap::count (C++ function), 192
- cppmicroservices::ShrinkableMap::empty (C++ function), 191
- cppmicroservices::ShrinkableMap::end (C++ function), 191
- cppmicroservices::ShrinkableMap::equal\_range (C++ function), 192
- cppmicroservices::ShrinkableMap::erase (C++ function), 191
- cppmicroservices::ShrinkableMap::find (C++ function), 192
- cppmicroservices::ShrinkableMap::lower\_bound (C++ function), 192
- cppmicroservices::ShrinkableMap::max\_size (C++ function), 191
- cppmicroservices::ShrinkableMap::operator[] (C++ function), 191
- cppmicroservices::ShrinkableMap::ShrinkableMap (C++ function), 191
- cppmicroservices::ShrinkableMap::size (C++ function), 191
- cppmicroservices::ShrinkableMap::upper\_bound (C++ function), 192
- cppmicroservices::ShrinkableMap<Key, T>::const\_iterator (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::const\_reference (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::container\_type (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::iterator (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::key\_type (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::mapped\_type (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::reference (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::size\_type (C++ type), 191
- cppmicroservices::ShrinkableMap<Key, T>::value\_type (C++ type), 191
- cppmicroservices::ShrinkableVector (C++ class), 192
- cppmicroservices::ShrinkableVector::at (C++ function), 193
- cppmicroservices::ShrinkableVector::back (C++ function), 193
- cppmicroservices::ShrinkableVector::begin (C++ function), 192
- cppmicroservices::ShrinkableVector::clear (C++ function), 193
- cppmicroservices::ShrinkableVector::empty (C++ function), 193
- cppmicroservices::ShrinkableVector::end (C++ function), 193

- cppmicroservices::ShrinkableVector::erase (C++ function), 193
  - cppmicroservices::ShrinkableVector::front (C++ function), 193
  - cppmicroservices::ShrinkableVector::operator[] (C++ function), 193
  - cppmicroservices::ShrinkableVector::pop\_back (C++ function), 193
  - cppmicroservices::ShrinkableVector::ShrinkableVector (C++ function), 192
  - cppmicroservices::ShrinkableVector::size (C++ function), 193
  - cppmicroservices::ShrinkableVector<E>::const\_iterator (C++ type), 192
  - cppmicroservices::ShrinkableVector<E>::const\_reference (C++ type), 192
  - cppmicroservices::ShrinkableVector<E>::container\_type (C++ type), 192
  - cppmicroservices::ShrinkableVector<E>::iterator (C++ type), 192
  - cppmicroservices::ShrinkableVector<E>::reference (C++ type), 192
  - cppmicroservices::ShrinkableVector<E>::size\_type (C++ type), 192
  - cppmicroservices::ShrinkableVector<E>::value\_type (C++ type), 192
  - cppmicroservices::SimpleWebConsolePlugin (C++ class), 236
  - cppmicroservices::SimpleWebConsolePlugin::GetCategory (C++ function), 236
  - cppmicroservices::SimpleWebConsolePlugin::GetContext (C++ function), 237
  - cppmicroservices::SimpleWebConsolePlugin::GetCssReferences (C++ function), 237
  - cppmicroservices::SimpleWebConsolePlugin::GetLabel (C++ function), 236
  - cppmicroservices::SimpleWebConsolePlugin::GetTitle (C++ function), 236
  - cppmicroservices::SimpleWebConsolePlugin::Register (C++ function), 236
  - cppmicroservices::SimpleWebConsolePlugin::SimpleWebConsolePlugin (C++ function), 236
  - cppmicroservices::SimpleWebConsolePlugin::Unregister (C++ function), 237
  - cppmicroservices::ToFactory (C++ function), 141
  - cppmicroservices::WebConsoleConstants (C++ class), 237
  - cppmicroservices::WebConsoleConstants::ATTR\_APP\_ROOT (C++ member), 238
  - cppmicroservices::WebConsoleConstants::ATTR\_CONSOLE\_VARIABLE\_RESOLVER (C++ member), 238
  - cppmicroservices::WebConsoleConstants::ATTR\_LABEL\_MAP (C++ member), 238
  - cppmicroservices::WebConsoleConstants::ATTR\_PLUGIN\_ROOT (C++ member), 238
  - cppmicroservices::WebConsoleConstants::PLUGIN\_CATEGORY (C++ member), 237
  - cppmicroservices::WebConsoleConstants::PLUGIN\_CSS\_REFERENCES (C++ member), 238
  - cppmicroservices::WebConsoleConstants::PLUGIN\_LABEL (C++ member), 237
  - cppmicroservices::WebConsoleConstants::PLUGIN\_TITLE (C++ member), 237
  - cppmicroservices::WebConsoleConstants::SERVICE\_NAME (C++ member), 237
  - cppmicroservices::WebConsoleDefaultVariableResolver (C++ class), 239
  - cppmicroservices::WebConsoleDefaultVariableResolver::GetData (C++ function), 239
  - cppmicroservices::WebConsoleDefaultVariableResolver::Resolve (C++ function), 239
  - cppmicroservices::WebConsoleVariableResolver (C++ class), 239
  - cppmicroservices::WebConsoleVariableResolver::~WebConsoleVariableResolver (C++ function), 239
  - cppmicroservices::WebConsoleVariableResolver::Resolve (C++ function), 239
  - CPPMICROSERVICES\_DECLARE\_SERVICE\_INTERFACE (C macro), 195
  - CPPMICROSERVICES\_EXPORT\_BUNDLE\_ACTIVATOR (C macro), 194
  - CPPMICROSERVICES\_IMPORT\_BUNDLE (C macro), 194
  - CPPMICROSERVICES\_INITIALIZE\_BUNDLE (C macro), 193
  - CPPMICROSERVICES\_INITIALIZE\_STATIC\_BUNDLE (C macro), 194
- ## G
- gr\_bundle::START\_ACTIVATION\_POLICY (C++ class), 93
  - gr\_bundle::START\_TRANSIENT (C++ class), 93
  - gr\_bundle::StartOptions (C++ type), 93
  - gr\_bundle::State (C++ type), 92
  - gr\_bundle::STATE\_ACTIVE (C++ class), 93
  - gr\_bundle::STATE\_INSTALLED (C++ class), 92
  - gr\_bundle::STATE\_RESOLVED (C++ class), 92
  - gr\_bundle::STATE\_STARTING (C++ class), 92
  - gr\_bundle::STATE\_STOPPING (C++ class), 93
  - gr\_bundle::STATE\_UNINSTALLED (C++ class), 92
  - gr\_bundle::STOP\_TRANSIENT (C++ class), 93
  - gr\_bundle::StopOptions (C++ type), 93
  - gr\_bundleevent::BUNDLE\_INSTALLED (C++ class), 122
  - gr\_bundleevent::BUNDLE\_LABEL\_RESOLVER (C++ class), 123
  - gr\_bundleevent::BUNDLE\_LAZY\_ACTIVATION (C++ class), 123
  - gr\_bundleevent::BUNDLE\_RESOLVED (C++ class), 122

- ul style="list-style-type: none; padding-left: 0;">
- gr\_bundleevent::BUNDLE\_STARTED (C++ class), 122
- gr\_bundleevent::BUNDLE\_STARTING (C++ class), 123
- gr\_bundleevent::BUNDLE\_STOPPED (C++ class), 122
- gr\_bundleevent::BUNDLE\_STOPPING (C++ class), 123
- gr\_bundleevent::BUNDLE\_UNINSTALLED (C++ class), 122
- gr\_bundleevent::BUNDLE\_UNRESOLVED (C++ class), 122
- gr\_bundleevent::BUNDLE\_UPDATED (C++ class), 122
- gr\_bundleevent::Type (C++ type), 122
- gr\_componentconfigurationdto::ACTIVE (C++ class), 198
- gr\_componentconfigurationdto::ComponentState (C++ type), 198
- gr\_componentconfigurationdto::SATISFIED (C++ class), 198
- gr\_componentconfigurationdto::UNSATISFIED\_REFERENCE (C++ class), 198
- gr\_configurationlistener::CM\_DELETED (C++ class), 215
- gr\_configurationlistener::CM\_UPDATED (C++ class), 215
- gr\_configurationlistener::ConfigurationEventType (C++ type), 215
- gr\_frameworkevent::FRAMEWORK\_ERROR (C++ class), 133
- gr\_frameworkevent::FRAMEWORK\_INFO (C++ class), 133
- gr\_frameworkevent::FRAMEWORK\_STARTED (C++ class), 133
- gr\_frameworkevent::FRAMEWORK\_STOPPED (C++ class), 133
- gr\_frameworkevent::FRAMEWORK\_STOPPED\_UPDATE (C++ class), 133
- gr\_frameworkevent::FRAMEWORK\_WAIT\_TIMEDOUT (C++ class), 133
- gr\_frameworkevent::FRAMEWORK\_WARNING (C++ class), 133
- gr\_frameworkevent::Type (C++ type), 132
- gr\_logservice::LOG\_DEBUG (C++ class), 219
- gr\_logservice::LOG\_ERROR (C++ class), 219
- gr\_logservice::LOG\_INFO (C++ class), 219
- gr\_logservice::LOG\_WARNING (C++ class), 219
- gr\_logservice::SeverityLevel (C++ type), 219
- gr\_serviceevent::SERVICE\_MODIFIED (C++ class), 136
- gr\_serviceevent::SERVICE\_MODIFIED\_ENDMATCH (C++ class), 136
- gr\_serviceevent::SERVICE\_REGISTERED (C++ class), 136
- gr\_serviceevent::SERVICE\_UNREGISTERING (C++ class), 136
- gr\_serviceevent::Type (C++ type), 136
- gr\_serviceexception::FACTORY\_ERROR (C++ class), 138
- gr\_serviceexception::FACTORY\_EXCEPTION (C++ class), 138
- gr\_serviceexception::FACTORY\_RECURSION (C++ class), 139
- gr\_serviceexception::REMOTE (C++ class), 138
- gr\_serviceexception::Type (C++ type), 138
- gr\_serviceexception::UNREGISTERED (C++ class), 138
- gr\_serviceexception::UNSPECIFIED (C++ class), 138
- ## M
- MakeBundle (C++ function), 104
- ## O
- operator&& (C++ function), 182
  - operator|| (C++ function), 182
  - operator<< (C++ function), 138
- ## S
- std::hash<cppmicroservices::BundleResource> (C++ class), 130
  - std::hash<cppmicroservices::ServiceListenerHook::ListenerInfo> (C++ class), 145
  - std::hash<cppmicroservices::ServiceReferenceBase> (C++ class), 151
  - std::hash<cppmicroservices::ServiceRegistrationBase> (C++ class), 154
- ## U
- us\_service\_interface\_iid (C++ function), 142
  - usFunctionAddResources command, 87, 88–90
  - usFunctionEmbedResources command, 87, 88, 88, 90
  - usFunctionGenerateBundleInit command, 90, 193
  - usFunctionGetResourceSource command, 88, 89, 89
  - usResourceCompiler3 command line option
    - bundle-file, -b, 81
    - bundle-name, -n, 81
    - compression-level, -c, 81
    - help, -h, 81
    - manifest-add, -m, 81
    - out-file, -o, 81
    - res-add, -r, 81
    - verbose, -V, 81
    - zip-add, -z, 81
  - usShell3 command line option
    - help, -h, 85
    - load, -l, 85