
PyEFD Documentation

Release 1.0

Henrik Blidh

April 19, 2016

1	Installation	3
2	Usage	5
3	Testing	7
4	References	9
5	API	11
5.1	References	11
6	Indices and tables	13
	Python Module Index	15

An Python/NumPy implementation of a method for approximating a contour with a Fourier series, as described in ¹.

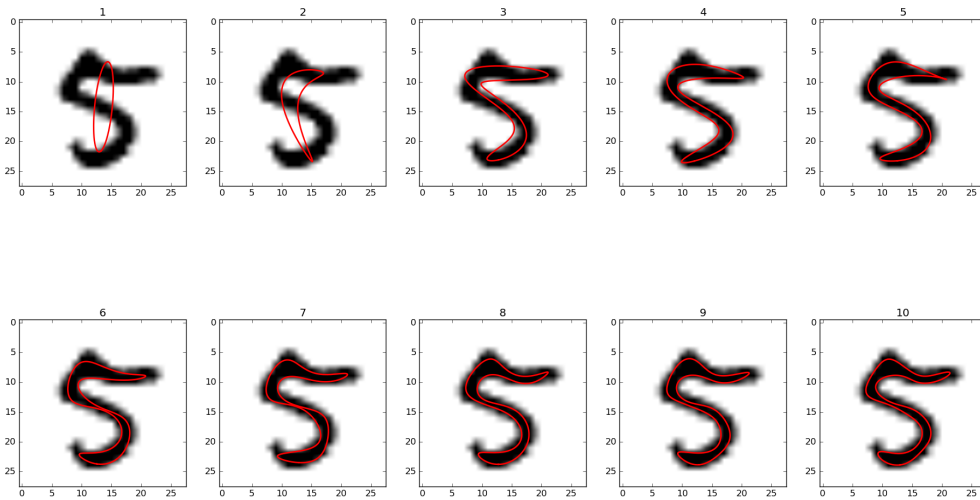


Fig. 1: EFD representations of an MNIST ² digit. Shows progressive improvement of approximation by order of Fourier series.

¹ Frank P Kuhl, Charles R Giardina, Elliptic Fourier features of a closed contour, Computer Graphics and Image Processing, Volume 18, Issue 3, 1982, Pages 236-258, ISSN 0146-664X, [http://dx.doi.org/10.1016/0146-664X\(82\)90034-X](http://dx.doi.org/10.1016/0146-664X(82)90034-X).

²LeCun et al. (1999): The MNIST Dataset Of Handwritten Digits

Installation

```
$ pip install pyefd
```

Usage

Given a closed contour of a shape, generated by e.g. `scikit-image` or `OpenCV`, this package can fit a `Fourier series` approximating the shape of the contour:

```
from pyefd import elliptic_fourier_descriptors
coeffs = elliptic_fourier_descriptors(contour, order=10)
```

The coefficients returned are the a_n , b_n , c_n and d_n of the following Fourier series representation of the shape.

The coefficients returned are by default normalized so that they are rotation and size-invariant. This can be overridden by calling:

```
from pyefd import elliptic_fourier_descriptors
coeffs = elliptic_fourier_descriptors(contour, order=10, normalize=False)
```

Normalization can also be done afterwards:

```
from pyefd import normalize_efd
coeffs = normalize_efd(coeffs)
```

To use these as features, one can write a small wrapper function:

```
def efd_feature(contour):
    coeffs = elliptic_fourier_descriptors(contour, order=10, normalize=True)
    return coeffs.flatten()[3:]
```

If the coefficients are normalized, then $coeffs[0, 0] = 1.0$, $coeffs[0, 1] = 0.0$ and $coeffs[0, 2] = 0.0$, so they can be disregarded when using the elliptic Fourier descriptors as features.

See ¹ for more technical details.

Testing

Run tests with:

```
$ python setup.py test
```

or with `Pytest`:

```
$ py.test tests.py
```

The tests includes a single image from the MNIST dataset of handwritten digits (2) as a contour to use for testing.

References

A Python implementation of the method described in ³ and ⁴ for calculating Fourier coefficients for characterizing closed contours.

5.1 References

Created by hblidh <henrik.blidh@nedomkull.com> on 2016-01-30.

`pyefd.calculate_dc_coefficients` (*contour*)

Calculate the A_0 and C_0 coefficients of the elliptic Fourier series.

Parameters `contour` (*numpy.ndarray*) – A contour array of size $[M \times 2]$.

Returns The A_0 and C_0 coefficients.

Return type tuple

`pyefd.elliptic_fourier_descriptors` (*contour*, *order=10*, *normalize=False*)

Calculate elliptical Fourier descriptors for a contour.

Parameters

- **contour** (*numpy.ndarray*) – A contour array of size $[M \times 2]$.
- **order** (*int*) – The order of Fourier coefficients to calculate.
- **normalize** (*bool*) – If the coefficients should be normalized; see references for details.

Returns A $[order \times 4]$ array of Fourier coefficients.

Return type `numpy.ndarray`

`pyefd.normalize_efd` (*coeffs*, *size_invariant=True*)

Normalizes an array of Fourier coefficients.

See ³ and ⁴ for details.

Parameters

- **coeffs** (*numpy.ndarray*) – A $[n \times 4]$ Fourier coefficient array.
- **size_invariant** (*bool*) – If size invariance normalizing should be done as well. Default is True.

³ F. P. Kuhl and C. R. Giardina, “Elliptic Fourier Features of a Closed Contour,” Computer Vision, Graphics and Image Processing, Vol. 18, pp. 236-258, 1982.

⁴ Oivind Due Trier, Anil K. Jain and Torfinn Taxt, “Feature Extraction Methods for Character Recognition - A Survey”, Pattern Recognition Vol. 29, No.4, pp. 641-662, 1996

Returns The normalized $[n \times 4]$ Fourier coefficient array.

Return type `numpy.ndarray`

`pyefd.plot_efd(coeffs, locus=(0.0, 0.0), image=None, contour=None, n=300)`

Plot a $[2 \times (N / 2)]$ grid of successive truncations of the series.

Note: Requires `matplotlib`!

Parameters

- **coeffs** (`numpy.ndarray`) – $[N \times 4]$ Fourier coefficient array.
- **tuple or numpy.ndarray locus** (`list,`) – The A_0 and C_0 elliptic locus in ³ and ⁴.
- **n** (`int`) – Number of points to use for plotting of Fourier series.

Indices and tables

- `genindex`
- `modindex`
- `search`

p

[pyefd](#), 11

C

`calculate_dc_coefficients()` (in module `pyefd`), 11

E

`elliptic_fourier_descriptors()` (in module `pyefd`), 11

N

`normalize_efd()` (in module `pyefd`), 11

P

`plot_efd()` (in module `pyefd`), 12

`pyefd` (module), 11