



Sphinx Documentation

Release 7.4.0

the Sphinx developers

May 05, 2024

GET STARTED

1	Getting Started	1
1.1	Setting up the documentation sources	1
1.2	Defining document structure	1
1.3	Adding content	2
1.4	Running the build	3
1.5	Documenting objects	3
1.6	Basic configuration	4
1.7	Autodoc	5
1.8	Intersphinx	5
1.9	More topics to be covered	6
2	Installing Sphinx	7
2.1	Overview	7
2.2	Linux	7
	Debian/Ubuntu	7
	RHEL, CentOS	8
	Other distributions	8
2.3	macOS	8
	Homebrew	8
	MacPorts	8
	Anaconda	9
2.4	Windows	9
	Chocolatey	9
	Other Methods	9
2.5	Installation from PyPI	9
	Using virtual environments	10
2.6	Docker	10
2.7	Installation from source	11
3	Tutorial: Build your first project	13
3.1	Getting started	13
	Setting up your project and development environment	13
	Creating the documentation layout	14
3.2	First steps to document your project using Sphinx	15
	Building your HTML documentation	15
	Building your documentation in other formats	16
3.3	More Sphinx customization	16
	Enabling a built-in extension	17
	Using a third-party HTML theme	17
3.4	Narrative documentation in Sphinx	18

	Structuring your documentation across multiple pages	18
	Adding cross-references	19
3.5	Describing code in Sphinx	20
	Python	20
	Documenting Python objects	20
	Cross-referencing Python objects	21
	Including doctests in your documentation	22
	Other languages (C, C++, others)	24
	Documenting and cross-referencing objects	24
3.6	Automatic documentation generation from code	24
	Reusing signatures and docstrings with autodoc	25
	Generating comprehensive API references	26
3.7	Appendix: Deploying a Sphinx project online	27
	Sphinx-friendly deployment options	28
	Embracing the “Docs as Code” philosophy	28
	Publishing your documentation sources	29
	GitHub	29
	GitLab	29
	Publishing your HTML documentation	30
	Read the Docs	30
	GitHub Pages	30
	GitLab Pages	31
3.8	Where to go from here	32
4	Using Sphinx	33
4.1	reStructuredText	33
	reStructuredText Primer	33
	Paragraphs	33
	Inline markup	34
	Lists and Quote-like blocks	34
	Literal blocks	35
	Doctest blocks	36
	Tables	36
	Hyperlinks	37
	Sections	37
	Field Lists	38
	Roles	38
	Explicit Markup	39
	Directives	39
	Images	41
	Footnotes	42
	Citations	42
	Substitutions	42
	Comments	43
	HTML Metadata	43
	Source encoding	44
	Gotchas	44
	Roles	44
	Cross-referencing syntax	44
	Inline code highlighting	45
	Math	45
	Other semantic markup	45
	Substitutions	48
	Directives	48

	Table of contents	48
	Paragraph-level markup	52
	Showing code examples	54
	Glossary	59
	Meta-information markup	60
	Index-generating markup	61
	Including content based on tags	63
	Tables	63
	Math	65
	Grammar production displays	66
	Field Lists	66
	File-wide metadata	67
	Special metadata fields	67
	MOVED: Domains	68
	MOVED: Basic Markup	68
	MOVED: Python Domain	68
	MOVED: C Domain	68
	MOVED: C++ Domain	68
	MOVED: Standard Domain	68
	MOVED: JavaScript Domain	68
	MOVED: reStructuredText Domain	68
	MOVED: Math Domain	68
	MOVED: More domains	68
4.2	Markdown	68
	Configuration	69
4.3	Cross-referencing syntax	69
	Cross-referencing anything	70
	Cross-referencing objects	70
	Cross-referencing arbitrary locations	70
	Cross-referencing documents	71
	Referencing downloadable files	72
	Cross-referencing figures by figure number	72
	Cross-referencing other items of interest	72
4.4	Configuration	73
	Project information	74
	General configuration	74
	Options for internationalization	84
	Options for Math	88
	Options for HTML output	88
	Options for Single HTML output	96
	Options for HTML help output	97
	Options for Apple Help output	97
	Options for epub output	99
	Options for LaTeX output	102
	Options for text output	107
	Options for manual page output	107
	Options for Texinfo output	108
	Options for QtHelp output	110
	Options for the linkcheck builder	110
	Options for the XML builder	113
	Options for the C domain	113
	Options for the C++ domain	114
	Options for the Python domain	114
	Examples	114

	Options for the Javascript domain	115
	Example of configuration file	115
4.5	Builders	122
	Serialization builder details	131
4.6	Domains	132
	Basic Markup	133
	Cross-referencing syntax	134
	Built-in domains	135
	The Standard Domain	135
	The C Domain	136
	The C++ Domain	141
	The JavaScript Domain	153
	The Mathematics Domain	155
	The Python Domain	155
	The reStructuredText Domain	164
	More domains	165
4.7	Extensions	166
	Built-in extensions	166
	sphinx.ext.autodoc – Include documentation from docstrings	166
	sphinx.ext.autosectionlabel – Allow reference sections using its title	179
	sphinx.ext.autosummary – Generate autodoc summaries	180
	sphinx.ext.coverage – Collect doc coverage stats	184
	sphinx.ext.doctest – Test snippets in the documentation	186
	sphinx.ext.duration – Measure durations of Sphinx processing	191
	sphinx.ext.extlinks – Markup to shorten external links	192
	sphinx.ext.githubpages – Publish HTML docs in GitHub Pages	193
	sphinx.ext.graphviz – Add Graphviz graphs	193
	sphinx.ext.ifconfig – Include content based on configuration	196
	sphinx.ext.imgconverter – A reference image converter using Imagemagick	196
	sphinx.ext.inheritance_diagram – Include inheritance diagrams	197
	sphinx.ext.intersphinx – Link to other projects’ documentation	200
	sphinx.ext.linkcode – Add external links to source code	203
	Math support for HTML outputs in Sphinx	204
	sphinx.ext.napoleon – Support for NumPy and Google style docstrings	208
	sphinx.ext.todo – Support for todo items	218
	sphinx.ext.viewcode – Add links to highlighted source code	218
	Third-party extensions	220
	Where to put your own extensions?	220
4.8	HTML Theming	221
	Builders	221
	Themes	221
	Using a theme	221
	Builtin themes	222
	Third Party Themes	227
4.9	Internationalization	227
	Sphinx internationalization details	228
	Translating with sphinx-intl	229
	Quick guide	229
	Translating	230
	Update your po files by new pot files	230
	Using Transifex service for team translation	230
	Using Weblate service for team translation	232
	Contributing to Sphinx reference translation	232
	Translation progress and statistics	232

4.10	Sphinx Web Support	233
	Web Support Quick Start	233
	Building Documentation Data	233
	Integrating Sphinx Documents Into Your Webapp	233
	Performing Searches	235
	Comments & Proposals	236
	Comment Moderation	236
	The WebSupport Class	237
	Methods	238
	Search Adapters	240
	Methods	241
	Storage Backends	242
	Methods	243
5	Writing Sphinx Extensions	245
5.1	Developing extensions overview	245
	Make an extension depend on another extension	245
5.2	Extension tutorials	245
	Developing a “Hello world” extension	246
	Overview	246
	Prerequisites	246
	Writing the extension	246
	Using the extension	248
	Further reading	249
	Developing a “TODO” extension	249
	Overview	249
	Prerequisites	250
	Writing the extension	250
	Using the extension	258
	Further reading	259
	Developing a “recipe” extension	259
	Overview	259
	Prerequisites	259
	Writing the extension	260
	Using the extension	267
	Further reading	268
	Developing autodoc extension for IntEnum	268
	Overview	268
	Prerequisites	268
	Writing the extension	268
	Using the extension	270
5.3	Configuring builders	271
	Discover builders by entry point	271
5.4	Templating	271
	Do I need to use Sphinx’s templates to produce HTML?	271
	Jinja/Sphinx Templating Primer	272
	Working with the builtin templates	272
	Blocks	272
	Configuration Variables	274
	Helper Functions	274
	Global Variables	275
5.5	HTML theme development	278
	Creating themes	278
	Theme configuration (theme.toml)	278

Theme configuration (<code>theme.conf</code>)	279
Convert <code>theme.conf</code> to <code>theme.toml</code>	280
Distribute your theme as a Python package	280
Templating	281
Static templates	281
Use custom page metadata in HTML templates	281
Defining custom template functions	282
Add your own static files to the build assets	282
Inject JavaScript based on user configuration	283
6 LaTeX customization	285
6.1 The <code>latex_elements</code> configuration setting	285
6.2 The <code>sphinxsetup</code> configuration setting	292
6.3 Additional CSS-like ' <code>sphinxsetup</code> ' keys	300
6.4 LaTeX macros and environments	304
Macros	304
The <code>\sphinxbox</code> command	307
Environments	308
Miscellany	309
7 Sphinx Extensions API	311
7.1 Important objects	311
7.2 Build Phases	312
7.3 Extension metadata	313
7.4 APIs used for writing extensions	313
Application API	314
Extension setup	314
Emitting events	328
Sphinx runtime information	328
Sphinx core events	329
Checking the Sphinx version	333
The Config object	333
The template bridge	333
Exceptions	334
Project API	335
Build environment API	335
Builder API	337
Environment Collector API	339
Docutils markup API	340
Roles	340
Directives	340
Domain API	342
Python Domain	350
Parser API	351
Doctree node classes added by Sphinx	351
Nodes for domain-specific object descriptions	351
New admonition-like constructs	354
Other paragraph-level nodes	355
New inline nodes	355
Special nodes	356
Logging API	356
i18n API	358
Extension internationalization (i18n) and localization (l10n) using i18n API	359
Utilities	360

Base classes for components	360
Utility components	364
Utility types	365
Deprecated APIs	365
8 Get support	381
9 Contribute to Sphinx	383
9.1 Contributing to Sphinx	383
Get help	383
Bug Reports and Feature Requests	383
Contribute code	384
Getting started	384
Coding style	385
Unit tests	385
Contribute documentation	387
Build the documentation	387
Translations	387
Debugging tips	388
9.2 Sphinx’s release process	388
Versioning	388
Deprecating a feature	388
Deprecation policy	389
Deprecation warnings	389
Python version support policy	389
Release procedures	390
9.3 Organization of the Sphinx project	390
Core developers	390
Guidelines	390
Membership	390
Other contributors	391
9.4 Sphinx Code of Conduct	391
10 Sphinx FAQ	393
10.1 How do I...	393
10.2 Using Sphinx with...	394
10.3 Sphinx vs. Docutils	395
10.4 Epub info	396
10.5 Texinfo info	397
Displaying Links	397
Notes	398
11 Sphinx authors	399
11.1 Maintainers	399
11.2 Contributors	399
11.3 Former maintainers	401
12 Command-Line Tools	403
12.1 Core Applications	403
sphinx-quickstart	403
Synopsis	403
Description	403
Options	403
See also	405
sphinx-build	405

	Synopsis	405
	Description	406
	Options	406
	Environment Variables	409
	Deprecation Warnings	410
	See also	410
12.2	Additional Applications	410
	sphinx-apidoc	410
	Synopsis	410
	Description	411
	Options	411
	Environment	413
	See also	413
	sphinx-autogen	413
	Synopsis	413
	Description	413
	Options	413
	Example	414
	See also	414
13	Glossary	415
14	Changelog	417
14.1	Release 7.4.0 (in development)	417
14.2	Release 7.3.7 (released Apr 19, 2024)	418
14.3	Release 7.3.6 (released Apr 17, 2024)	418
14.4	Release 7.3.5 (released Apr 17, 2024)	418
14.5	Release 7.3.4 (released Apr 17, 2024)	418
14.6	Release 7.3.3 (released Apr 17, 2024)	419
14.7	Release 7.3.2 (released Apr 17, 2024)	419
14.8	Release 7.3.1 (released Apr 17, 2024)	419
14.9	Release 7.3.0 (released Apr 16, 2024)	419
14.10	Release 7.2.6 (released Sep 13, 2023)	423
14.11	Release 7.2.5 (released Aug 30, 2023)	424
14.12	Release 7.2.4 (released Aug 28, 2023)	424
14.13	Release 7.2.3 (released Aug 23, 2023)	424
14.14	Release 7.2.2 (released Aug 17, 2023)	425
14.15	Release 7.2.1 (released Aug 17, 2023)	425
14.16	Release 7.2.0 (released Aug 17, 2023)	425
14.17	Release 7.1.2 (released Aug 02, 2023)	428
14.18	Release 7.1.1 (released Jul 27, 2023)	428
14.19	Release 7.1.0 (released Jul 24, 2023)	428
14.20	Release 7.0.1 (released May 12, 2023)	430
14.21	Release 7.0.0 (released Apr 29, 2023)	431
14.22	Release 6.2.1 (released Apr 25, 2023)	432
14.23	Release 6.2.0 (released Apr 23, 2023)	432
14.24	Release 6.1.3 (released Jan 10, 2023)	434
14.25	Release 6.1.2 (released Jan 07, 2023)	434
14.26	Release 6.1.1 (released Jan 05, 2023)	435
14.27	Release 6.1.0 (released Jan 05, 2023)	435
14.28	Release 6.0.1 (released Jan 05, 2023)	436
14.29	Release 6.0.0 (released Dec 29, 2022)	437
14.30	Release 5.3.0 (released Oct 16, 2022)	438
14.31	Release 5.2.3 (released Sep 30, 2022)	438

14.32	Release 5.2.2 (released Sep 27, 2022)	439
14.33	Release 5.2.1 (released Sep 25, 2022)	439
14.34	Release 5.2.0.post0 (released Sep 24, 2022)	439
14.35	Release 5.2.0 (released Sep 24, 2022)	439
14.36	Release 5.1.1 (released Jul 26, 2022)	440
14.37	Release 5.1.0 (released Jul 24, 2022)	440
14.38	Release 5.0.2 (released Jun 17, 2022)	442
14.39	Release 5.0.1 (released Jun 03, 2022)	443
14.40	Release 5.0.0 (released May 30, 2022)	443
14.41	Release 4.5.0 (released Mar 28, 2022)	447
14.42	Release 4.4.0 (released Jan 17, 2022)	448
14.43	Release 4.3.2 (released Dec 19, 2021)	451
14.44	Release 4.3.1 (released Nov 28, 2021)	451
14.45	Release 4.3.0 (released Nov 11, 2021)	451
14.46	Release 4.2.0 (released Sep 12, 2021)	454
14.47	Release 4.1.2 (released Jul 27, 2021)	456
14.48	Release 4.1.1 (released Jul 15, 2021)	456
14.49	Release 4.1.0 (released Jul 12, 2021)	457
14.50	Release 4.0.3 (released Jul 05, 2021)	460
14.51	Release 4.0.2 (released May 20, 2021)	460
14.52	Release 4.0.1 (released May 11, 2021)	461
14.53	Release 4.0.0 (released May 09, 2021)	461
14.54	Release 3.5.5 (in development)	466
14.55	Release 3.5.4 (released Apr 11, 2021)	466
14.56	Release 3.5.3 (released Mar 20, 2021)	466
14.57	Release 3.5.2 (released Mar 06, 2021)	467
14.58	Release 3.5.1 (released Feb 16, 2021)	467
14.59	Release 3.5.0 (released Feb 14, 2021)	467
14.60	Release 3.4.3 (released Jan 08, 2021)	472
14.61	Release 3.4.2 (released Jan 04, 2021)	472
14.62	Release 3.4.1 (released Dec 25, 2020)	473
14.63	Release 3.4.0 (released Dec 20, 2020)	473
14.64	Release 3.3.1 (released Nov 12, 2020)	476
14.65	Release 3.3.0 (released Nov 02, 2020)	476
14.66	Release 3.2.1 (released Aug 14, 2020)	479
14.67	Release 3.2.0 (released Aug 08, 2020)	479
14.68	Release 3.1.2 (released Jul 05, 2020)	482
14.69	Release 3.1.1 (released Jun 14, 2020)	483
14.70	Release 3.1.0 (released Jun 08, 2020)	484
14.71	Release 3.0.4 (released May 27, 2020)	489
14.72	Release 3.0.3 (released Apr 26, 2020)	489
14.73	Release 3.0.2 (released Apr 19, 2020)	489
14.74	Release 3.0.1 (released Apr 11, 2020)	490
14.75	Release 3.0.0 (released Apr 06, 2020)	491
14.76	Release 2.4.5 (released Nov 18, 2021)	496
14.77	Release 2.4.4 (released Mar 05, 2020)	496
14.78	Release 2.4.3 (released Feb 22, 2020)	496
14.79	Release 2.4.2 (released Feb 19, 2020)	497
14.80	Release 2.4.1 (released Feb 11, 2020)	497
14.81	Release 2.4.0 (released Feb 09, 2020)	497
14.82	Release 2.3.1 (released Dec 22, 2019)	500
14.83	Release 2.3.0 (released Dec 15, 2019)	501
14.84	Release 2.2.2 (released Dec 03, 2019)	504
14.85	Release 2.2.1 (released Oct 26, 2019)	504

14.86	Release 2.2.0 (released Aug 19, 2019)	504
14.87	Release 2.1.2 (released Jun 19, 2019)	506
14.88	Release 2.1.1 (released Jun 10, 2019)	507
14.89	Release 2.1.0 (released Jun 02, 2019)	507
14.90	Release 2.0.1 (released Apr 08, 2019)	511
14.91	Release 2.0.0 (released Mar 29, 2019)	512
14.92	Release 1.8.6 (released Nov 18, 2021)	519
14.93	Release 1.8.5 (released Mar 10, 2019)	519
14.94	Release 1.8.4 (released Feb 03, 2019)	520
14.95	Release 1.8.3 (released Dec 26, 2018)	520
14.96	Release 1.8.2 (released Nov 11, 2018)	522
14.97	Release 1.8.1 (released Sep 22, 2018)	523
14.98	Release 1.8.0 (released Sep 13, 2018)	524
14.99	Release 1.7.9 (released Sep 05, 2018)	531
14.100	Release 1.7.8 (released Aug 29, 2018)	532
14.101	Release 1.7.7 (released Aug 19, 2018)	532
14.102	Release 1.7.6 (released Jul 17, 2018)	533
14.103	Release 1.7.5 (released May 29, 2018)	534
14.104	Release 1.7.4 (released Apr 25, 2018)	535
14.105	Release 1.7.3 (released Apr 23, 2018)	536
14.106	Release 1.7.2 (released Mar 21, 2018)	536
14.107	Release 1.7.1 (released Feb 23, 2018)	538
14.108	Release 1.7.0 (released Feb 12, 2018)	539
14.109	Release 1.6.7 (released Feb 04, 2018)	544
14.110	Release 1.6.6 (released Jan 08, 2018)	545
14.111	Release 1.6.5 (released Oct 23, 2017)	546
14.112	Release 1.6.4 (released Sep 26, 2017)	548
14.113	Release 1.6.3 (released Jul 02, 2017)	549
14.114	Release 1.6.2 (released May 28, 2017)	550
14.115	Release 1.6.1 (released May 16, 2017)	551
14.116	Release 1.6 (unreleased)	558
14.117	Release 1.5.6 (released May 15, 2017)	558
14.118	Release 1.5.5 (released Apr 03, 2017)	559
14.119	Release 1.5.4 (released Apr 02, 2017)	559
14.120	Release 1.5.3 (released Feb 26, 2017)	560
14.121	Release 1.5.2 (released Jan 22, 2017)	561
14.122	Release 1.5.1 (released Dec 13, 2016)	563
14.123	Release 1.5 (released Dec 5, 2016)	564
14.124	Release 1.4.9 (released Nov 23, 2016)	572
14.125	Release 1.4.8 (released Oct 1, 2016)	572
14.126	Release 1.4.7 (released Oct 1, 2016)	572
14.127	Release 1.4.6 (released Aug 20, 2016)	573
14.128	Release 1.4.5 (released Jul 13, 2016)	574
14.129	Release 1.4.4 (released Jun 12, 2016)	575
14.130	Release 1.4.3 (released Jun 5, 2016)	576
14.131	Release 1.4.2 (released May 29, 2016)	577
14.132	Release 1.4.1 (released Apr 12, 2016)	579
14.133	Release 1.4 (released Mar 28, 2016)	580
14.134	Release 1.3.6 (released Feb 29, 2016)	586
14.135	Release 1.3.5 (released Jan 24, 2016)	586
14.136	Release 1.3.4 (released Jan 12, 2016)	587
14.137	Release 1.3.3 (released Dec 2, 2015)	589
14.138	Release 1.3.2 (released Nov 29, 2015)	589
14.139	Release 1.3.1 (released Mar 17, 2015)	592

14.140	Release 1.3 (released Mar 10, 2015)	592
14.141	Release 1.3b3 (released Feb 24, 2015)	594
14.142	Release 1.3b2 (released Dec 5, 2014)	595
14.143	Release 1.3b1 (released Oct 10, 2014)	596
14.144	Release 1.2.3 (released Sep 1, 2014)	601
14.145	Release 1.2.2 (released Mar 2, 2014)	602
14.146	Release 1.2.1 (released Jan 19, 2014)	603
14.147	Release 1.2 (released Dec 10, 2013)	605
14.148	Release 1.2 beta3 (released Oct 3, 2013)	606
14.149	Release 1.2 beta2 (released Sep 17, 2013)	607
14.150	Release 1.2 beta1 (released Mar 31, 2013)	609
14.151	Release 1.1.3 (Mar 10, 2012)	614
14.152	Release 1.1.2 (Nov 1, 2011) – 1.1.1 is a silly version number anyway!	615
14.153	Release 1.1.1 (Nov 1, 2011)	615
14.154	Release 1.1 (Oct 9, 2011)	616
14.155	Release 1.0.8 (Sep 23, 2011)	618
14.156	Release 1.0.7 (Jan 15, 2011)	620
14.157	Release 1.0.6 (Jan 04, 2011)	621
14.158	Release 1.0.5 (Nov 12, 2010)	621
14.159	Release 1.0.4 (Sep 17, 2010)	622
14.160	Release 1.0.3 (Aug 23, 2010)	622
14.161	Release 1.0.2 (Aug 14, 2010)	622
14.162	Release 1.0.1 (Jul 27, 2010)	623
14.163	Release 1.0 (Jul 23, 2010)	623
14.164	Release 0.6.7 (Jun 05, 2010)	626
14.165	Release 0.6.6 (May 25, 2010)	627
14.166	Release 0.6.5 (Mar 01, 2010)	627
14.167	Release 0.6.4 (Jan 12, 2010)	628
14.168	Release 0.6.3 (Sep 03, 2009)	629
14.169	Release 0.6.2 (Jun 16, 2009)	630
14.170	Release 0.6.1 (Mar 26, 2009)	631
14.171	Release 0.6 (Mar 24, 2009)	631
14.172	Release 0.5.2 (Mar 24, 2009)	634
14.173	Release 0.5.1 (Dec 15, 2008)	634
14.174	Release 0.5 (Nov 23, 2008) – Birthday release!	635
14.175	Release 0.4.3 (Oct 8, 2008)	638
14.176	Release 0.4.2 (Jul 29, 2008)	638
14.177	Release 0.4.1 (Jul 5, 2008)	639
14.178	Release 0.4 (Jun 23, 2008)	639
14.179	Release 0.3 (May 6, 2008)	641
14.180	Release 0.2 (Apr 27, 2008)	641
14.181	Release 0.1.61950 (Mar 26, 2008)	643
14.182	Release 0.1.61945 (Mar 26, 2008)	643
14.183	Release 0.1.61843 (Mar 24, 2008)	644
14.184	Release 0.1.61798 (Mar 23, 2008)	644
14.185	Release 0.1.61611 (Mar 21, 2008)	644

15	Projects using Sphinx	645
15.1	Documentation using the alabaster theme	645
15.2	Documentation using the classic theme	647
15.3	Documentation using the sphinxdoc theme	649
15.4	Documentation using the nature theme	650
15.5	Documentation using another builtin theme	650
15.6	Documentation using sphinx_rtd_theme	651

15.7	Documentation using sphinx_bootstrap_theme	657
15.8	Documentation using pydata_sphinx_theme	658
15.9	Documentation using a custom theme or integrated in a website	659
15.10	Homepages and other non-documentation sites	662
15.11	Books produced using Sphinx	662
15.12	Theses produced using Sphinx	664
15.13	Projects integrating Sphinx functionality	664
Python Module Index		665
Index		667

GETTING STARTED

Sphinx is a *documentation generator* or a tool that translates a set of plain text source files into various output formats, automatically producing cross-references, indices, etc. That is, if you have a directory containing a bunch of *reStructuredText* or *Markdown* documents, Sphinx can generate a series of HTML files, a PDF file (via LaTeX), man pages and much more.

Sphinx focuses on documentation, in particular handwritten documentation, however, Sphinx can also be used to generate blogs, homepages and even books. Much of Sphinx’s power comes from the richness of its default plain-text markup format, *reStructuredText*, along with its *significant extensibility capabilities*.

The goal of this document is to give you a quick taste of what Sphinx is and how you might use it. When you’re done here, you can check out the *installation guide* followed by the intro to the default markup format used by Sphinx, *reStructuredText*.

For a great “introduction” to writing docs in general – the whys and hows, see also [Write the docs](#)³, written by Eric Holscher.

1.1 Setting up the documentation sources

The root directory of a Sphinx collection of plain-text document sources is called the *source directory*. This directory also contains the Sphinx configuration file `conf.py`, where you can configure all aspects of how Sphinx reads your sources and builds your documentation.⁷

Sphinx comes with a script called **sphinx-quickstart** that sets up a source directory and creates a default `conf.py` with the most useful configuration values from a few questions it asks you. To use this, run:

```
$ sphinx-quickstart
```

1.2 Defining document structure

Let’s assume you’ve run **sphinx-quickstart**. It created a source directory with `conf.py` and a root document, `index.rst`. The main function of the *root document* is to serve as a welcome page, and to contain the root of the “table of contents tree” (or *toctree*). This is one of the main things that Sphinx adds to *reStructuredText*, a way to connect multiple files to a single hierarchy of documents.

³ <https://www.writethedocs.org/guide/writing/beginners-guide-to-docs/>

⁷ This is the usual layout. However, `conf.py` can also live in another directory, the *configuration directory*. Refer to the *sphinx-build man page* for more information.

reStructuredText directives

`toctree` is a reStructuredText *directive*, a very versatile piece of markup. Directives can have arguments, options and content.

Arguments are given directly after the double colon following the directive’s name. Each directive decides whether it can have arguments, and how many.

Options are given after the arguments, in form of a “field list”. The `maxdepth` is such an option for the `toctree` directive.

Content follows the options or arguments after a blank line. Each directive decides whether to allow content, and what to do with it.

A common gotcha with directives is that **the first line of the content must be indented to the same level as the options are**.

The `toctree` directive initially is empty, and looks like so:

```
.. toctree::  
   :maxdepth: 2
```

You add documents listing them in the *content* of the directive:

```
.. toctree::  
   :maxdepth: 2  
  
   usage/installation  
   usage/quickstart  
   ...
```

This is exactly how the `toctree` for this documentation looks. The documents to include are given as *document names*, which in short means that you leave off the file name extension and use forward slashes (/) as directory separators.



Read more about [the `toctree` directive](#).

You can now create the files you listed in the `toctree` and add content, and their section titles will be inserted (up to the `maxdepth` level) at the place where the `toctree` directive is placed. Also, Sphinx now knows about the order and hierarchy of your documents. (They may contain `toctree` directives themselves, which means you can create deeply nested hierarchies if necessary.)

1.3 Adding content

In Sphinx source files, you can use most features of standard *reStructuredText*. There are also several features added by Sphinx. For example, you can add cross-file references in a portable way (which works for all output types) using the *ref* role.

For an example, if you are viewing the HTML version, you can look at the source for this document – use the “Show Source” link in the sidebar.

Todo: Update the below link when we add new guides on these.



See [reStructuredText](#) for a more in-depth introduction to reStructuredText, including markup added by Sphinx.

1.4 Running the build

Now that you have added some files and content, let's make a first build of the docs. A build is started with the **sphinx-build** program:

```
$ sphinx-build -M html sourcedir outputdir
```

where *sourcedir* is the *source directory*, and *outputdir* is the directory in which you want to place the built documentation. The *-M* option selects a builder; in this example Sphinx will build HTML files.



Refer to the *sphinx-build man page* for all options that **sphinx-build** supports.

However, **sphinx-quickstart** script creates a *Makefile* and a *make.bat* which make life even easier for you. These can be executed by running **make** with the name of the builder. For example.

```
$ make html
```

This will build HTML docs in the build directory you chose. Execute **make** without an argument to see which targets are available.

How do I generate PDF documents?

make latexpdf runs the *LaTeX builder* and readily invokes the pdfTeX toolchain for you.

Todo: Move this whole section into a guide on rST or directives

1.5 Documenting objects

One of Sphinx's main objectives is easy documentation of *objects* (in a very general sense) in any *domain*. A domain is a collection of object types that belong together, complete with markup to create and reference descriptions of these objects.

The most prominent domain is the Python domain. For example, to document Python's built-in function `enumerate()`, you would add this to one of your source files.

```
.. py:function:: enumerate(sequence[, start=0])
```

```
    Return an iterator that yields tuples of an index and an item of the
    *sequence*. (And so on.)
```

This is rendered like this:

```
enumerate(sequence[, start=0])
```

Return an iterator that yields tuples of an index and an item of the *sequence*. (And so on.)

The argument of the directive is the *signature* of the object you describe, the content is the documentation for it. Multiple signatures can be given, each in its own line.

The Python domain also happens to be the default domain, so you don't need to prefix the markup with the domain name.

```
.. function:: enumerate(sequence[, start=0])  
  
...
```

does the same job if you keep the default setting for the default domain.

There are several more directives for documenting other types of Python objects, for example `py:class` or `py:method`. There is also a cross-referencing *role* for each of these object types. This markup will create a link to the documentation of `enumerate()`.

The `:py:func:`enumerate`` function can be used for ...

And here is the proof: A link to [enumerate\(\)](#).

Again, the `py:` can be left out if the Python domain is the default one. It doesn't matter which file contains the actual documentation for `enumerate()`; Sphinx will find it and create a link to it.

Each domain will have special rules for how the signatures can look like, and make the formatted output look pretty, or add specific features like links to parameter types, e.g. in the C/C++ domains.



See [Domains](#) for all the available domains and their directives/roles.

1.6 Basic configuration

Earlier we mentioned that the `conf.py` file controls how Sphinx processes your documents. In that file, which is executed as a Python source file, you assign configuration values. For advanced users: since it is executed by Sphinx, you can do non-trivial tasks in it, like extending `sys.path`⁴ or importing a module to find out the version you are documenting.

The config values that you probably want to change are already put into the `conf.py` by **sphinx-quickstart** and initially commented out (with standard Python syntax: a `#` comments the rest of the line). To change the default value, remove the hash sign and modify the value. To customize a config value that is not automatically added by **sphinx-quickstart**, just add an additional assignment.

Keep in mind that the file uses Python syntax for strings, numbers, lists and so on. The file is saved in UTF-8 by default, as indicated by the encoding declaration in the first line.



See [Configuration](#) for documentation of all available config values.

Todo: Move this entire doc to a different section

⁴ <https://docs.python.org/3/library/sys.html#sys.path>

1.7 Autodoc

When documenting Python code, it is common to put a lot of documentation in the source files, in documentation strings. Sphinx supports the inclusion of docstrings from your modules with an *extension* (an extension is a Python module that provides additional features for Sphinx projects) called *autodoc*.

In order to use *autodoc*, you need to activate it in `conf.py` by putting the string `'sphinx.ext.autodoc'` into the list assigned to the `extensions` config value:

```
extensions = ['sphinx.ext.autodoc']
```

Then, you have a few additional directives at your disposal. For example, to document the function `io.open()`, reading its signature and docstring from the source file, you'd write this:

```
.. autofunction:: io.open
```

You can also document whole classes or even modules automatically, using member options for the auto directives, like

```
.. automodule:: io
   :members:
```

autodoc needs to import your modules in order to extract the docstrings. Therefore, you must add the appropriate path to `sys.path`⁵ in your `conf.py`.

Warning: *autodoc* imports the modules to be documented. If any modules have side effects on import, these will be executed by *autodoc* when `sphinx-build` is run.

If you document scripts (as opposed to library modules), make sure their main routine is protected by a `if __name__ == '__main__':` condition.



See [sphinx.ext.autodoc](#) for the complete description of the features of *autodoc*.

Todo: Move this doc to another section

1.8 Intersphinx

Many Sphinx documents including the [Python documentation](#)⁶ are published on the Internet. When you want to make links to such documents from your documentation, you can do it with `sphinx.ext.intersphinx`.

In order to use *intersphinx*, you need to activate it in `conf.py` by putting the string `'sphinx.ext.intersphinx'` into the `extensions` list and set up the `intersphinx_mapping` config value.

For example, to link to `io.open()` in the Python library manual, you need to setup your `intersphinx_mapping` like:

```
intersphinx_mapping = {'python': ('https://docs.python.org/3', None)}
```

And now, you can write a cross-reference like `:py:func:`io.open``. Any cross-reference that has no matching target in the current documentation set, will be looked up in the documentation sets configured in `intersphinx_mapping`

⁵ <https://docs.python.org/3/library/sys.html#sys.path>

⁶ <https://docs.python.org/3>

(this needs access to the URL in order to download the list of valid targets). Intersphinx also works for some other *domain*'s roles including `:ref:`, however it doesn't work for `:doc:` as that is non-domain role.



See [*sphinx.ext.intersphinx*](#) for the complete description of the features of intersphinx.

1.9 More topics to be covered

- *Other extensions:*
- Static files
- *Selecting a theme*
- *Templating*
- Using extensions
- *Writing extensions*

INSTALLING SPHINX

- *Overview*
- *Linux*
- *macOS*
- *Windows*
- *Installation from PyPI*
- *Docker*
- *Installation from source*

2.1 Overview

Sphinx is written in [Python](https://docs.python-guide.org/)⁸ and supports Python 3.9+. It builds upon the shoulders of many third-party libraries such as [Docutils](https://docutils.sourceforge.io/)⁹ and [Jinja](https://jinja.palletsprojects.com/)¹⁰, which are installed when Sphinx is installed.

2.2 Linux

Debian/Ubuntu

Install either `python3-sphinx` using **apt-get**:

```
$ apt-get install python3-sphinx
```

If it not already present, this will install Python for you.

⁸ <https://docs.python-guide.org/>

⁹ <https://docutils.sourceforge.io/>

¹⁰ <https://jinja.palletsprojects.com/>

RHEL, CentOS

Install `python-sphinx` using **yum**:

```
$ yum install python-sphinx
```

If it not already present, this will install Python for you.

Other distributions

Most Linux distributions have Sphinx in their package repositories. Usually the package is called `python3-sphinx`, `python-sphinx` or `sphinx`. Be aware that there are at least two other packages with `sphinx` in their name: a speech recognition toolkit (*CMU Sphinx*) and a full-text search database (*Sphinx search*).

2.3 macOS

Sphinx can be installed using [Homebrew](#)¹¹, [MacPorts](#)¹², or as part of a Python distribution such as [Anaconda](#)¹³.

Homebrew

```
$ brew install sphinx-doc
```

For more information, refer to the [package overview](#)¹⁴.

MacPorts

Install either `python3x-sphinx` using **port**:

```
$ sudo port install py39-sphinx
```

To set up the executable paths, use the `port select` command:

```
$ sudo port select --set python python39
$ sudo port select --set sphinx py39-sphinx
```

For more information, refer to the [package overview](#)¹⁵.

¹¹ <https://brew.sh/>

¹² <https://www.macports.org/>

¹³ <https://www.anaconda.com/download>

¹⁴ <https://formulae.brew.sh/formula/sphinx-doc>

¹⁵ <https://www.macports.org/ports.php?by=library&substr=py39-sphinx>

Anaconda

```
$ conda install sphinx
```

2.4 Windows

Sphinx can be install using [Chocolatey](#)¹⁶ or *installed manually*.

Chocolatey

```
$ choco install sphinx
```

You would need to [install Chocolatey](#)¹⁷ before running this.

For more information, refer to the [chocolatey page](#)¹⁸.

Other Methods

Most Windows users do not have Python installed by default, so we begin with the installation of Python itself. To check if you already have Python installed, open the *Command Prompt* (⌘Win-r and type **cmd**). Once the command prompt is open, type **python --version** and press Enter. If Python is installed, you will see the version of Python printed to the screen. If you do not have Python installed, refer to the [Hitchhikers Guide to Python's](#)¹⁹ Python on Windows installation guides. You must install [Python 3](#)²⁰.

Once Python is installed, you can install Sphinx using **pip**. Refer to the [pip installation instructions](#) below for more information.

2.5 Installation from PyPI

Sphinx packages are published on the [Python Package Index](#)²¹. The preferred tool for installing packages from *PyPI* is **pip**. This tool is provided with all modern versions of Python.

On Linux or MacOS, you should open your terminal and run the following command.

```
$ pip install -U sphinx
```

On Windows, you should open *Command Prompt* (⌘Win-r and type **cmd**) and run the same command.

```
C:\> pip install -U sphinx
```

After installation, type **sphinx-build --version** on the command prompt. If everything worked fine, you will see the version number for the Sphinx package you just installed.

Installation from *PyPI* also allows you to install the latest development release. You will not generally need (or want) to do this, but it can be useful if you see a possible bug in the latest stable release. To do this, use the **--pre** flag.

¹⁶ <https://chocolatey.org/>

¹⁷ <https://chocolatey.org/install>

¹⁸ <https://chocolatey.org/packages/sphinx/>

¹⁹ <https://docs.python-guide.org/>

²⁰ <https://docs.python-guide.org/starting/install3/win/>

²¹ <https://pypi.org/project/Sphinx/>

```
$ pip install -U --pre sphinx
```

Using virtual environments

When installing Sphinx using pip, it is highly recommended to use *virtual environments*, which isolate the installed packages from the system packages, thus removing the need to use administrator privileges. To create a virtual environment in the `.venv` directory, use the following command.

```
$ python -m venv .venv
```

See also:

`venv`²² – creating virtual environments

Warning: Note that in some Linux distributions, such as Debian and Ubuntu, this might require an extra installation step as follows.

```
$ apt-get install python3-venv
```

2.6 Docker

Docker images for Sphinx are published on the [Docker Hub](#)²³. There are two kind of images:

- `sphinxdoc/sphinx`²⁴
- `sphinxdoc/sphinx-latexpdf`²⁵

Former one is used for standard usage of Sphinx, and latter one is mainly used for PDF builds using LaTeX. Please choose one for your purpose.

Note: `sphinxdoc/sphinx-latexpdf` contains TeXLive packages. So the image is very large (over 2GB!).

Hint: When using docker images, please use `docker run` command to invoke sphinx commands. For example, you can use following command to create a Sphinx project:

```
$ docker run -it --rm -v /path/to/document:/docs sphinxdoc/sphinx sphinx-quickstart
```

And you can use the following command to build HTML document:

```
$ docker run --rm -v /path/to/document:/docs sphinxdoc/sphinx make html
```

For more details, please read [README file](#)²⁶ of docker images.

²² <https://docs.python.org/3/library/venv.html#module-venv>

²³ <https://hub.docker.com/>

²⁴ <https://hub.docker.com/r/sphinxdoc/sphinx>

²⁵ <https://hub.docker.com/r/sphinxdoc/sphinx-latexpdf>

²⁶ <https://hub.docker.com/r/sphinxdoc/sphinx>

2.7 Installation from source

You can install Sphinx directly from a clone of the [Git repository](https://github.com/sphinx-doc/sphinx)²⁷. This can be done either by cloning the repo and installing from the local clone, or simply installing directly via **git**.

```
$ git clone https://github.com/sphinx-doc/sphinx
$ cd sphinx
$ pip install .
```

```
$ pip install git+https://github.com/sphinx-doc/sphinx
```

You can also download a snapshot of the Git repo in either [tar.gz](https://github.com/sphinx-doc/sphinx/archive/master.tar.gz)²⁸ or [zip](https://github.com/sphinx-doc/sphinx/archive/master.zip)²⁹ format. Once downloaded and extracted, these can be installed with **pip** as above.

²⁷ <https://github.com/sphinx-doc/sphinx>

²⁸ <https://github.com/sphinx-doc/sphinx/archive/master.tar.gz>

²⁹ <https://github.com/sphinx-doc/sphinx/archive/master.zip>

TUTORIAL: BUILD YOUR FIRST PROJECT

In this tutorial you will build a simple documentation project using Sphinx, and view it in your browser as HTML. The project will include narrative, handwritten documentation, as well as autogenerated API documentation.

The tutorial is aimed towards Sphinx newcomers willing to learn the fundamentals of how projects are created and structured. You will create a fictional software library to generate random food recipes that will serve as a guide throughout the process, with the objective of properly documenting it.

To showcase Sphinx capabilities for code documentation you will use Python, which also supports *automatic* documentation generation.

Note: Several other languages are natively supported in Sphinx for *manual* code documentation, however they require extensions for *automatic* code documentation, like [Breathe](https://breathe.readthedocs.io/)³⁰.

To follow the instructions you will need access to a Linux-like command line and a basic understanding of how it works, as well as a working Python installation for development, since you will use *Python virtual environments* to create the project.

3.1 Getting started

Setting up your project and development environment

In a new directory, create a file called `README.rst` with the following content.

Listing 1: `README.rst`

```
Lumache
=====

**Lumache** (/lu'make/) is a Python library for cooks and food lovers that
creates recipes mixing random ingredients.
```

It is a good moment to create a Python virtual environment and install the required tools. For that, open a command line terminal, `cd` into the directory you just created, and run the following commands:

```
$ python -m venv .venv
$ source .venv/bin/activate
(.venv) $ python -m pip install sphinx
```

³⁰ <https://breathe.readthedocs.io/>

Note: The installation method used above is described in more detail in [Installation from PyPI](#). For the rest of this tutorial, the instructions will assume a Python virtual environment.

If you executed these instructions correctly, you should have the Sphinx command line tools available. You can do a basic verification running this command:

```
(.venv) $ sphinx-build --version
sphinx-build 4.0.2
```

If you see a similar output, you are on the right path!

Creating the documentation layout

Then from the command line, run the following command:

```
(.venv) $ sphinx-quickstart docs
```

This will present to you a series of questions required to create the basic directory and configuration layout for your project inside the docs folder. To proceed, answer each question as follows:

- > Separate source and build directories (y/n) [n]: Write “y” (without quotes) and press Enter.
- > Project name: Write “Lumache” (without quotes) and press Enter.
- > Author name(s): Write “Graziella” (without quotes) and press Enter.
- > Project release []: Write “0.1” (without quotes) and press Enter.
- > Project language [en]: Leave it empty (the default, English) and press Enter.

After the last question, you will see the new docs directory with the following content.

```
docs
├── build
├── make.bat
├── Makefile
├── source
│   ├── conf.py
│   ├── index.rst
│   ├── _static
│   └── _templates
```

The purpose of each of these files is:

build/

An empty directory (for now) that will hold the rendered documentation.

make.bat and Makefile

Convenience scripts to simplify some common Sphinx operations, such as rendering the content.

source/conf.py

A Python script holding the configuration of the Sphinx project. It contains the project name and release you specified to `sphinx-quickstart`, as well as some extra configuration keys.

source/index.rst

The *root document* of the project, which serves as welcome page and contains the root of the “table of contents tree” (or *toctree*).

Thanks to this bootstrapping step, you already have everything needed to render the documentation as HTML for the first time. To do that, run this command:

```
(.venv) $ sphinx-build -M html docs/source/ docs/build/
```

And finally, open `docs/build/html/index.html` in your browser. You should see something like this:



Fig. 1: Freshly created documentation of Lumache

There we go! You created your first HTML documentation using Sphinx. Now you can start *customizing it*.

3.2 First steps to document your project using Sphinx

Building your HTML documentation

The `index.rst` file that `sphinx-quickstart` created has some content already, and it gets rendered as the front page of your HTML documentation. It is written in reStructuredText, a powerful markup language.

Modify the file as follows:

Listing 2: `docs/source/index.rst`

```
Welcome to Lumache's documentation!
=====

**Lumache** (/lu'make/) is a Python library for cooks and food lovers that
creates recipes mixing random ingredients. It pulls data from the `Open Food
Facts database <https://world.openfoodfacts.org/>`_ and offers a simple and
intuitive API.

.. note::

    This project is under active development.
```

This showcases several features of the reStructuredText syntax, including:

- a **section header** using `===` for the underline,
- two examples of *inline markup*: `**strong emphasis**` (typically bold) and `*emphasis*` (typically italics),
- an **inline external link**,
- and a note **admonition** (one of the available *directives*)

Now to render it with the new content, you can use the `sphinx-build` command as before, or leverage the convenience script as follows:

```
(.venv) $ cd docs
(.venv) $ make html
```

After running this command, you will see that `index.html` reflects the new changes!

Building your documentation in other formats

Sphinx supports a variety of formats apart from HTML, including PDF, EPUB, *and more*. For example, to build your documentation in EPUB format, run this command from the `docs` directory:

```
(.venv) $ make epub
```

After that, you will see the files corresponding to the e-book under `docs/build/epub/`. You can either open `Lumache.epub` with an EPUB-compatible e-book viewer, like [Calibre](#)³¹, or preview `index.xhtml` on a web browser.

Note: To quickly display a complete list of possible output formats, plus some extra useful commands, you can run `make help`.

Each output format has some specific configuration options that you can tune, *including EPUB*. For instance, the default value of `epub_show_urls` is `inline`, which means that, by default, URLs are shown right after the corresponding link, in parentheses. You can change that behavior by adding the following code at the end of your `conf.py`:

```
# EPUB options
epub_show_urls = 'footnote'
```

With this configuration value, and after running `make epub` again, you will notice that URLs appear now as footnotes, which avoids cluttering the text. Sweet! Read on to explore *other ways to customize Sphinx*.

Note: Generating a PDF using Sphinx can be done running `make latexpdf`, provided that the system has a working LaTeX installation, as explained in the documentation of `sphinx.builders.latex.LaTeXBuilder`. Although this is perfectly feasible, such installations are often big, and in general LaTeX requires careful configuration in some cases, so PDF generation is out of scope for this tutorial.

3.3 More Sphinx customization

There are two main ways to customize your documentation beyond what is possible with core Sphinx: extensions and themes.

³¹ <https://calibre-ebook.com/>

Enabling a built-in extension

In addition to these configuration values, you can customize Sphinx even more by using *extensions*. Sphinx ships several *builtin ones*, and there are many more *maintained by the community*.

For example, to enable the `sphinx.ext.duration` extension, locate the extensions list in your `conf.py` and add one element as follows:

Listing 3: docs/source/conf.py

```
# Add any Sphinx extension module names here, as strings. They can be
# extensions coming with Sphinx (named 'sphinx.ext.*') or your custom
# ones.
extensions = [
    'sphinx.ext.duration',
]
```

After that, every time you generate your documentation, you will see a short durations report at the end of the console output, like this one:

```
(.venv) $ make html
...
The HTML pages are in build/html.

===== slowest reading durations =====
0.042 temp/source/index
```

Using a third-party HTML theme

Themes, on the other hand, are a way to customize the appearance of your documentation. Sphinx has several *builtin themes*, and there are also *third-party ones*³².

For example, to use the [Furo](https://pradyunsg.me/furo/)³³ third-party theme in your HTML documentation, first you will need to install it with `pip` in your Python virtual environment, like this:

```
(.venv) $ pip install furo
```

And then, locate the `html_theme` variable on your `conf.py` and replace its value as follows:

Listing 4: docs/source/conf.py

```
# The theme to use for HTML and HTML Help pages. See the documentation for
# a list of builtin themes.
#
html_theme = 'furo'
```

With this change, you will notice that your HTML documentation has now a new appearance:

It is now time to *expand the narrative documentation and split it into several documents*.

³² <https://sphinx-themes.org/>

³³ <https://pradyunsg.me/furo/>



Fig. 2: HTML documentation of Lumache with the Furo theme

3.4 Narrative documentation in Sphinx

Structuring your documentation across multiple pages

The file `index.rst` created by `sphinx-quickstart` is the *root document*, whose main function is to serve as a welcome page and to contain the root of the “table of contents tree” (or *toctree*). Sphinx allows you to assemble a project from different files, which is helpful when the project grows.

As an example, create a new file `docs/source/usage.rst` (next to `index.rst`) with these contents:

Listing 5: `docs/source/usage.rst`

```
Usage
====

Installation
-----

To use Lumache, first install it using pip:

.. code-block:: console

    (.venv) $ pip install lumache
```

This new file contains two *section* headers, normal paragraph text, and a *code-block* directive that renders a block of content as source code, with appropriate syntax highlighting (in this case, generic console text).

The structure of the document is determined by the succession of heading styles, which means that, by using `---` for the “Installation” section after `===` for the “Usage” section, you have declared “Installation” to be a *subsection* of “Usage”.

To complete the process, add a *toctree directive* at the end of `index.rst` including the document you just created, as follows:

Listing 6: `docs/source/index.rst`

```
Contents
-----

.. toctree::

    usage
```

This step inserts that document in the root of the *toctree*, so now it belongs to the structure of your project, which so far looks like this:

```
index
└─ usage
```

If you build the HTML documentation running `make html`, you will see that the *toctree* gets rendered as a list of hyperlinks, and this allows you to navigate to the new page you just created. Neat!

Warning: Documents outside a *toctree* will result in `WARNING: document isn't included in any toctree messages during the build process`, and will be unreachable for users.

Adding cross-references

One powerful feature of Sphinx is the ability to seamlessly add *cross-references* to specific parts of the documentation: a document, a section, a figure, a code object, etc. This tutorial is full of them!

To add a cross-reference, write this sentence right after the introduction paragraph in `index.rst`:

Listing 7: docs/source/index.rst

```
Check out the :doc:`usage` section for further information.
```

The *doc role* you used automatically references a specific document in the project, in this case the `usage.rst` you created earlier.

Alternatively, you can also add a cross-reference to an arbitrary part of the project. For that, you need to use the *ref* role, and add an explicit *label* that acts as a *target*³⁴.

For example, to reference the “Installation” subsection, add a label right before the heading, as follows:

Listing 8: docs/source/usage.rst

```
Usage
=====

.. _installation:

Installation
-----

...
```

And make the sentence you added in `index.rst` look like this:

Listing 9: docs/source/index.rst

```
Check out the :doc:`usage` section for further information, including how to
:ref:`install <installation>` the project.
```

Notice a trick here: the `install` part specifies how the link will look like (we want it to be a specific word, so the sentence makes sense), whereas the `<installation>` part refers to the actual label we want to add a cross-reference to.

³⁴ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#hyperlink-targets>

If you do not include an explicit title, hence using `:ref: `installation``, the section title will be used (in this case, `Installation`). Both the `:doc:` and the `:ref:` roles will be rendered as hyperlinks in the HTML documentation.

What about *documenting code objects in Sphinx*? Read on!

3.5 Describing code in Sphinx

In the *previous sections of the tutorial* you can read how to write narrative or prose documentation in Sphinx. In this section you will describe code objects instead.

Sphinx supports documenting code objects in several languages, namely Python, C, C++, JavaScript, and reStructured-Text. Each of them can be documented using a series of directives and roles grouped by *domain*. For the remainder of the tutorial you will use the Python domain, but all the concepts seen in this section apply for the other domains as well.

Python

Documenting Python objects

Sphinx offers several roles and directives to document Python objects, all grouped together in *the Python domain*. For example, you can use the `py:function` directive to document a Python function, as follows:

Listing 10: docs/source/usage.rst

Creating recipes

To retrieve a list of random ingredients,
you can use the ``lumache.get_random_ingredients()`` function:

```
.. py:function:: lumache.get_random_ingredients(kind=None)
```

Return a list of random ingredients as strings.

```
:param kind: Optional "kind" of ingredients.  
:type kind: list[str] or None  
:return: The ingredients list.  
:rtype: list[str]
```

Which will render like this:

Notice several things:

- Sphinx parsed the argument of the `.. py:function` directive and highlighted the module, the function name, and the parameters appropriately.
- The directive content includes a one-line description of the function, as well as an *info field list* containing the function parameter, its expected type, the return value, and the return type.

Note: The `py:` prefix specifies the *domain*. You may configure the default domain so you can omit the prefix, either globally using the `primary_domain` configuration, or use the `default-domain` directive to change it from the point it is called until the end of the file. For example, if you set it to `py` (the default), you can write `.. function::` directly.

Creating recipes

To retrieve a list of random ingredients, you can use the `lumache.get_random_ingredients()` function:

```
lumache.get_random_ingredients(kind=None)

Return a list of random ingredients as strings.

PARAMETERS
    kind (list[str] or None) – Optional “kind” of ingredients.

RETURNS
    The ingredients list.

RETURN TYPE
    list[str]
```

Fig. 3: The rendered result of documenting a Python function in Sphinx

Cross-referencing Python objects

By default, most of these directives generate entities that can be cross-referenced from any part of the documentation by using *a corresponding role*. For the case of functions, you can use `py:func` for that, as follows:

Listing 11: docs/source/usage.rst

```
The ``kind`` parameter should be either ``"meat"`` , ``"fish"`` ,
or ``"veggies"``. Otherwise, :py:func:`lumache.get_random_ingredients`
will raise an exception.
```

When generating code documentation, Sphinx will generate a cross-reference automatically just by using the name of the object, without you having to explicitly use a role for that. For example, you can describe the custom exception raised by the function using the `py:exception` directive:

Listing 12: docs/source/usage.rst

```
.. py:exception:: lumache.InvalidKindError

    Raised if the kind is invalid.
```

Then, add this exception to the original description of the function:

Listing 13: docs/source/usage.rst

```
.. py:function:: lumache.get_random_ingredients(kind=None)

    Return a list of random ingredients as strings.

    :param kind: Optional "kind" of ingredients.
    :type kind: list[str] or None
    :raise lumache.InvalidKindError: If the kind is invalid.
    :return: The ingredients list.
    :rtype: list[str]
```

And finally, this is how the result would look:

Creating recipes

To retrieve a list of random ingredients, you can use the `lumache.get_random_ingredients()` function:

`lumache.get_random_ingredients(kind=None)`

Return a list of random ingredients as strings.

PARAMETERS

kind (*list[str] or None*) – Optional “kind” of ingredients.

RAISES

`lumache.InvalidKindError` – If the kind is invalid.

RETURNS

The ingredients list.

RETURN TYPE

list[str]

The `kind` parameter should be either `"meat"`, `"fish"`, or `"veggies"`. Otherwise, `lumache.get_random_ingredients()` will raise an exception.

exception `lumache.InvalidKindError`

Raised if the kind is invalid.

Fig. 4: HTML result of documenting a Python function in Sphinx with cross-references

Beautiful, isn't it?

Including doctests in your documentation

Since you are now describing code from a Python library, it will become useful to keep both the documentation and the code as synchronized as possible. One of the ways to do that in Sphinx is to include code snippets in the documentation, called *doctests*, that are executed when the documentation is built.

To demonstrate doctests and other Sphinx features covered in this tutorial, Sphinx will need to be able to import the code. To achieve that, write this at the beginning of `conf.py`:

Listing 14: docs/source/conf.py

```
# If extensions (or modules to document with autodoc) are in another directory,
# add these directories to sys.path here.
import pathlib
import sys
sys.path.insert(0, pathlib.Path(__file__).parents[2].resolve().as_posix())
```

Note: An alternative to changing the `sys.path`³⁵ variable is to create a `pyproject.toml` file and make the code installable, so it behaves like any other Python library. However, the `sys.path` approach is simpler.

Then, before adding doctests to your documentation, enable the *doctest* extension in `conf.py`:

³⁵ <https://docs.python.org/3/library/sys.html#sys.path>

Listing 15: docs/source/conf.py

```
extensions = [
    'sphinx.ext.duration',
    'sphinx.ext.doctest',
]
```

Next, write a doctest block as follows:

Listing 16: docs/source/usage.rst

```
>>> import lumache
>>> lumache.get_random_ingredients()
['shells', 'gorgonzola', 'parsley']
```

Doctests include the Python instructions to be run preceded by `>>>`, the standard Python interpreter prompt, as well as the expected output of each instruction. This way, Sphinx can check whether the actual output matches the expected one.

To observe how a doctest failure looks like (rather than a code error as above), let's write the return value incorrectly first. Therefore, add a function `get_random_ingredients` like this:

Listing 17: lumache.py

```
def get_random_ingredients(kind=None):
    return ["eggs", "bacon", "spam"]
```

You can now run `make doctest` to execute the doctests of your documentation. Initially this will display an error, since the actual code does not behave as specified:

```
(.venv) $ make doctest
Running Sphinx v4.2.0
loading pickled environment... done
...
running tests...

Document: usage
-----
*****
File "usage.rst", line 44, in default
Failed example:
    lumache.get_random_ingredients()
Expected:
    ['shells', 'gorgonzola', 'parsley']
Got:
    ['eggs', 'bacon', 'spam']
*****
...
make: *** [Makefile:20: doctest] Error 1
```

As you can see, doctest reports the expected and the actual results, for easy examination. It is now time to fix the function:

Listing 18: lumache.py

```
def get_random_ingredients(kind=None):  
    return ["shells", "gorgonzola", "parsley"]
```

And finally, make `doctest` reports success!

For big projects though, this manual approach can become a bit tedious. In the next section, you will see *how to automate the process*.

Other languages (C, C++, others)

Documenting and cross-referencing objects

Sphinx also supports documenting and cross-referencing objects written in other programming languages. There are four additional built-in domains: C, C++, JavaScript, and reStructuredText. Third-party extensions may define domains for more languages, such as

- Fortran³⁶,
- Julia³⁷, or
- PHP³⁸.

For example, to document a C++ type definition, you would use the built-in `cpp:type` directive, as follows:

```
.. cpp:type:: std::vector<int> CustomList
```

A typedef-like declaration of a type.

Which would give the following result:

```
typedef std::vector<int> CustomList
```

A typedef-like declaration of a type.

All such directives then generate references that can be cross-referenced by using the corresponding role. For example, to reference the previous type definition, you can use the `cpp:type` role as follows:

```
Cross reference to :cpp:type:`CustomList`.
```

Which would produce a hyperlink to the previous definition: `CustomList`.

3.6 Automatic documentation generation from code

In the *previous section* of the tutorial you manually documented a Python function in Sphinx. However, the description was out of sync with the code itself, since the function signature was not the same. Besides, it would be nice to reuse **Python docstrings**³⁹ in the documentation, rather than having to write the information in two places.

Fortunately, *the autodoc extension* provides this functionality.

³⁶ <https://sphinx-fortran.readthedocs.io>

³⁷ <https://bastikr.github.io/sphinx-julia>

³⁸ <https://github.com/markstory/sphinxcontrib-phpdomain>

³⁹ <https://peps.python.org/pep-0257/#what-is-a-docstring>

Reusing signatures and docstrings with autodoc

To use autodoc, first add it to the list of enabled extensions:

Listing 19: docs/source/conf.py

```
extensions = [
    'sphinx.ext.duration',
    'sphinx.ext.doctest',
    'sphinx.ext.autodoc',
]
```

Next, move the content of the `.. py:function` directive to the function docstring in the original Python file, as follows:

Listing 20: lumache.py

```
def get_random_ingredients(kind=None):
    """
    Return a list of random ingredients as strings.

    :param kind: Optional "kind" of ingredients.
    :type kind: list[str] or None
    :raise lumache.InvalidKindError: If the kind is invalid.
    :return: The ingredients list.
    :rtype: list[str]

    """
    return ["shells", "gorgonzola", "parsley"]
```

Finally, replace the `.. py:function` directive from the Sphinx documentation with `autofunction`:

Listing 21: docs/source/usage.rst

```
you can use the ``lumache.get_random_ingredients()`` function:

.. autofunction:: lumache.get_random_ingredients
```

If you now build the HTML documentation, the output will be the same! With the advantage that it is generated from the code itself. Sphinx took the reStructuredText from the docstring and included it, also generating proper cross-references.

You can also autogenerate documentation from other objects. For example, add the code for the `InvalidKindError` exception:

Listing 22: lumache.py

```
class InvalidKindError(Exception):
    """Raised if the kind is invalid."""
    pass
```

And replace the `.. py:exception` directive with `autoexception` as follows:

Listing 23: docs/source/usage.rst

```
or ``"veggies"``. Otherwise, :py:func:`lumache.get_random_ingredients`  
will raise an exception.  
  
.. autoexception:: lumache.InvalidKindError
```

And again, after running `make html`, the output will be the same as before.

Generating comprehensive API references

While using `sphinx.ext.autodoc` makes keeping the code and the documentation in sync much easier, it still requires you to write an `auto*` directive for every object you want to document. Sphinx provides yet another level of automation: the *autosummary* extension.

The *autosummary* directive generates documents that contain all the necessary `autodoc` directives. To use it, first enable the *autosummary* extension:

Listing 24: docs/source/conf.py

```
extensions = [  
    'sphinx.ext.duration',  
    'sphinx.ext.doctest',  
    'sphinx.ext.autodoc',  
    'sphinx.ext.autosummary',  
]
```

Next, create a new `api.rst` file with these contents:

Listing 25: docs/source/api.rst

```
API  
===  
  
.. autosummary::  
   :toctree: generated  
  
   lumache
```

Remember to include the new document in the root toctree:

Listing 26: docs/source/index.rst

```
Contents  
-----  
  
.. toctree::  
  
   usage  
   api
```

Finally, after you build the HTML documentation running `make html`, it will contain two new pages:

- `api.html`, corresponding to `docs/source/api.rst` and containing a table with the objects you included in the *autosummary* directive (in this case, only one).

- `generated/lumache.html`, corresponding to a newly created reST file `generated/lumache.rst` and containing a summary of members of the module, in this case one function and one exception.

lumache

Lumache - Python library for cooks and food lovers.

FUNCTIONS

<code>get_random_ingredients</code> (<code>[[kind]]</code>)	Return a list of random ingredients as strings.
---------------------------------------------------------------	-------------------------------------------------

EXCEPTIONS

<code>InvalidKindError</code>	Raised if the kind is invalid.
-------------------------------	--------------------------------

Fig. 5: Summary page created by autosummary

Each of the links in the summary page will take you to the places where you originally used the corresponding `autodoc` directive, in this case in the `usage.rst` document.

Note: The generated files are based on [Jinja2 templates](#)⁴⁰ that *can be customized*, but that is out of scope for this tutorial.

3.7 Appendix: Deploying a Sphinx project online

When you are ready to show your documentation project to the world, there are many options available to do so. Since the HTML generated by Sphinx is static, you can decouple the process of building your HTML documentation from hosting such files in the platform of your choice. You will not need a sophisticated server running Python: virtually every web hosting service will suffice.

Therefore, the challenge is less how or where to serve the static HTML, but rather how to pick a workflow that automatically updates the deployed documentation every time there is a change in the source files.

The following sections describe some of the available options to deploy your online documentation, and give some background information. If you want to go directly to the practical part, you can skip to [Publishing your documentation sources](#).

⁴⁰ <https://jinja.palletsprojects.com/>

Sphinx-friendly deployment options

There are several possible options you have to host your Sphinx documentation. Some of them are:

Read the Docs

[Read the Docs](https://readthedocs.org/)⁴¹ is an online service specialized in hosting technical documentation written in Sphinx, as well as MkDocs. They have a number of extra features, such as versioned documentation, traffic and search analytics, custom domains, user-defined redirects, and more.

GitHub Pages

[GitHub Pages](https://pages.github.com/)⁴² is a simple static web hosting tightly integrated with [GitHub](https://github.com/)⁴³: static HTML is served from one of the branches of a project, and usually sources are stored in another branch so that the output can be updated every time the sources change (for example using [GitHub Actions](https://github.com/features/actions)⁴⁴). It is free to use and supports custom domains.

GitLab Pages

[GitLab Pages](https://about.gitlab.com/stages-devops-lifecycle/pages/)⁴⁵ is a similar concept to GitHub Pages, integrated with [GitLab](https://gitlab.com/)⁴⁶ and usually automated with [GitLab CI](https://about.gitlab.com/stages-devops-lifecycle/continuous-integration/)⁴⁷ instead.

Netlify

[Netlify](https://www.netlify.com/)⁴⁸ is a sophisticated hosting for static sites enhanced by client-side web technologies like JavaScript (so-called “Jamstack”⁴⁹). They offer support for headless content management systems and serverless computing.

Your own server

You can always use your own web server to host Sphinx HTML documentation. It is the option that gives more flexibility, but also more complexity.

All these options have zero cost, with the option of paying for extra features.

Embracing the “Docs as Code” philosophy

The free offerings of most of the options listed above require your documentation sources to be publicly available. Moreover, these services expect you to use a [Version Control System](https://en.wikipedia.org/wiki/Version_control)⁵⁰, a technology that tracks the evolution of a collection of files as a series of snapshots (“commits”). The practice of writing documentation in plain text files with the same tools as the ones used for software development is commonly known as “Docs as Code”⁵¹.

The most popular Version Control System nowadays is [Git](https://git-scm.com/)⁵², a free and open source tool that is the backbone of services like GitHub and GitLab. Since both Read the Docs and Netlify have integrations with GitHub and GitLab, and both GitHub and GitLab have an integrated Pages product, the most effective way of automatically build your documentation online is to upload your sources to either of these Git hosting services.

⁴¹ <https://readthedocs.org/>

⁴² <https://pages.github.com/>

⁴³ <https://github.com/>

⁴⁴ <https://github.com/features/actions>

⁴⁵ <https://about.gitlab.com/stages-devops-lifecycle/pages/>

⁴⁶ <https://gitlab.com/>

⁴⁷ <https://about.gitlab.com/stages-devops-lifecycle/continuous-integration/>

⁴⁸ <https://www.netlify.com/>

⁴⁹ <https://jamstack.org/>

⁵⁰ https://en.wikipedia.org/wiki/Version_control

⁵¹ <https://www.writethedocs.org/guide/docs-as-code/>

⁵² <https://git-scm.com/>

Publishing your documentation sources

GitHub

The quickest way to upload an existing project to GitHub is to:

1. Sign up for a GitHub account⁵³.
2. Create a new repository⁵⁴.
3. Open the “Upload files” page⁵⁵ of your new repository.
4. Select the files on your operating system file browser (in your case `README.rst`, `lumache.py`, the makefiles under the docs directory, and everything under docs/source) and drag them to the GitHub interface to upload them all.
5. Click on the *Commit changes* button.

Note: Make sure you don’t upload the docs/build directory, as it contains the output generated by Sphinx and it will change every time you change the sources, complicating your workflow.

These steps do not require access to the command line or installing any additional software. To learn more, read [this quickstart tutorial](#)⁵⁶ or consult the [official GitHub documentation](#)⁵⁷

GitLab

Similarly to GitHub, the fastest way to upload your project to GitLab is using the web interface:

1. Sign up for a GitLab account⁵⁸.
2. Create a new blank project⁵⁹.
3. Upload the project files (in your case `README.rst`, `lumache.py`, the makefiles under the docs directory, and everything under docs/source) one by one using the *Upload File* button⁶².

Again, these steps do not require additional software on your computer. To learn more, you can:

- Follow [this tutorial](#)⁶⁰ to install Git on your machine.
- Browse the [GitLab User documentation](#)⁶¹ to understand the possibilities of the platform.

Note: Make sure you don’t upload the docs/build directory, as it contains the output generated by Sphinx and it will change every time you change the sources, complicating your workflow.

⁵³ <https://github.com/signup>

⁵⁴ <https://github.com/new>

⁵⁵ <https://docs.github.com/en/repositories/working-with-files/managing-files/adding-a-file-to-a-repository>

⁵⁶ <https://docs.github.com/en/get-started/quickstart>

⁵⁷ <https://docs.github.com/en/get-started>

⁵⁸ https://gitlab.com/users/sign_up

⁵⁹ <https://gitlab.com/projects/new>

⁶² At the time of writing, [uploading whole directories to GitLab using only the web interface](#)⁶³ is not yet implemented.

⁶³ <https://gitlab.com/gitlab-org/gitlab/-/issues/228490>

⁶⁰ <https://docs.gitlab.com/ee/gitlab-basics/start-using-git.html>

⁶¹ <https://docs.gitlab.com/ee/user/index.html>

Publishing your HTML documentation

Read the Docs

[Read the Docs](#)⁶⁴ offers integration with both GitHub and GitLab. The quickest way of getting started is to follow the [RTD tutorial](#)⁶⁵, which is loosely based on this one. You can publish your sources on GitHub as explained *in the previous section*, then skip directly to [Sign up for Read the Docs](#)⁶⁶. If you choose GitLab instead, the process is similar.

GitHub Pages

[GitHub Pages](#)⁶⁷ requires you to *publish your sources* on [GitHub](#)⁶⁸. After that, you will need an automated process that performs the `make html` step every time the sources change. That can be achieved using [GitHub Actions](#)⁶⁹.

After you have published your sources on GitHub, create a file named `.github/workflows/sphinx.yml` in your repository with the following contents:

Listing 27: `.github/workflows/`

```
name: "Sphinx: Render docs"

on: push

jobs:
  build:
    runs-on: ubuntu-latest
    permissions:
      contents: write
    steps:
      - uses: actions/checkout@v4
      - name: Build HTML
        uses: ammaraskar/sphinx-action@master
      - name: Upload artifacts
        uses: actions/upload-artifact@v4
        with:
          name: html-docs
          path: docs/build/html/
      - name: Deploy
        uses: peaceiris/actions-gh-pages@v3
        if: github.ref == 'refs/heads/main'
        with:
          github_token: ${ secrets.GITHUB_TOKEN }
          publish_dir: docs/build/html
```

This contains a GitHub Actions workflow with a single job of four steps:

1. Checkout the code.
2. Build the HTML documentation using Sphinx.
3. Attach the HTML output the artifacts to the GitHub Actions job, for easier inspection.

⁶⁴ <https://readthedocs.org/>

⁶⁵ <https://docs.readthedocs.io/en/stable/tutorial/index.html>

⁶⁶ <https://docs.readthedocs.io/en/stable/tutorial/index.html#sign-up-for-read-the-docs>

⁶⁷ <https://pages.github.com/>

⁶⁸ <https://github.com/>

⁶⁹ <https://github.com/features/actions>

4. If the change happens on the default branch, take the contents of `docs/build/html` and push it to the `gh-pages` branch.

Next, you need to specify the dependencies for the `make html` step to be successful. For that, create a file `docs/requirements.txt` and add the following contents:

Listing 28: `docs/requirements.txt`

```
furo==2021.11.16
```

And finally, you are ready to [enable GitHub Pages on your repository](#)⁷⁰. For that, go to *Settings*, then *Pages* on the left sidebar, select the `gh-pages` branch in the “Source” dropdown menu, and click *Save*. After a few minutes, you should be able to see your HTML at the designated URL.

GitLab Pages

[GitLab Pages](#)⁷¹, on the other hand, requires you to *publish your sources* on [GitLab](#)⁷². When you are ready, you can automate the process of running `make html` using [GitLab CI](#)⁷³.

After you have published your sources on GitLab, create a file named `.gitlab-ci.yml` in your repository with these contents:

Listing 29: `.gitlab-ci.yml`

```
stages:
  - deploy

pages:
  stage: deploy
  image: python:3.9-slim
  before_script:
    - apt-get update && apt-get install make --no-install-recommends -y
    - python -m pip install sphinx furo
  script:
    - cd docs && make html
  after_script:
    - mv docs/build/html/ ./public/
  artifacts:
    paths:
      - public
  rules:
    - if: $CI_COMMIT_REF_NAME == $CI_DEFAULT_BRANCH
```

This contains a GitLab CI workflow with one job of several steps:

1. Install the necessary dependencies.
2. Build the HTML documentation using Sphinx.
3. Move the output to a known artifacts location.

⁷⁰ <https://docs.github.com/en/pages/getting-started-with-github-pages/configuring-a-publishing-source-for-your-github-pages-site>

⁷¹ <https://about.gitlab.com/stages-devops-lifecycle/pages/>

⁷² <https://gitlab.com/>

⁷³ <https://about.gitlab.com/stages-devops-lifecycle/continuous-integration/>

Note: You will need to [validate your account](#)⁷⁴ by entering a payment method (you will be charged a small amount that will then be reimbursed).

After that, if the pipeline is successful, you should be able to see your HTML at the designated URL.

3.8 Where to go from here

This tutorial covered the very first steps to create a documentation project with Sphinx. To continue learning more about Sphinx, check out the [rest of the documentation](#).

⁷⁴ <https://about.gitlab.com/blog/2021/05/17/prevent-crypto-mining-abuse/#validating-an-account>

USING SPHINX

This guide serves to demonstrate how one can get started with Sphinx and covers everything from installing Sphinx and configuring your first Sphinx project to using some of the advanced features Sphinx provides out-of-the-box. If you are looking for guidance on extending Sphinx, refer to *Writing Sphinx Extensions*.

4.1 reStructuredText

reStructuredText (reST) is the default plaintext markup language used by both Docutils and Sphinx. Docutils provides the basic reStructuredText syntax, while Sphinx extends this to support additional functionality.

The below guides go through the most important aspects of reST. For the authoritative reStructuredText reference, refer to the [docutils documentation](https://docutils.sourceforge.io/rst.html)⁷⁵.

reStructuredText Primer

reStructuredText is the default plaintext markup language used by Sphinx. This section is a brief introduction to reStructuredText (reST) concepts and syntax, intended to provide authors with enough information to author documents productively. Since reST was designed to be a simple, unobtrusive markup language, this will not take too long.

See also:

The authoritative [reStructuredText User Documentation](https://docutils.sourceforge.io/rst.html)⁷⁶. The “ref” links in this document link to the description of the individual constructs in the reST reference.

Paragraphs

The paragraph ([ref](https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#paragraphs)⁷⁷) is the most basic block in a reST document. Paragraphs are simply chunks of text separated by one or more blank lines. As in Python, indentation is significant in reST, so all lines of the same paragraph must be left-aligned to the same level of indentation.

⁷⁵ <https://docutils.sourceforge.io/rst.html>

⁷⁶ <https://docutils.sourceforge.io/rst.html>

⁷⁷ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#paragraphs>

Inline markup

The standard reST inline markup is quite simple: use

- one asterisk: `*text*` for emphasis (italics),
- two asterisks: `**text**` for strong emphasis (boldface), and
- backquotes: ``text`` for code samples.

If asterisks or backquotes appear in running text and could be confused with inline markup delimiters, they have to be escaped with a backslash.

Be aware of some restrictions of this markup:

- it may not be nested,
- content may not start or end with whitespace: `* text*` is wrong,
- it must be separated from surrounding text by non-word characters. Use a backslash escaped space to work around that: `this is\ *one*\ word`.

These restrictions may be lifted in future versions of the docutils.

It is also possible to replace or expand upon some of this inline markup with roles. Refer to [Roles](#) for more information.

Lists and Quote-like blocks

List markup ([ref⁷⁸](#)) is natural: just place an asterisk at the start of a paragraph and indent properly. The same goes for numbered lists; they can also be autonumbered using a `#` sign:

```
* This is a bulleted list.
* It has two items, the second
  item uses two lines.

1. This is a numbered list.
2. It has two items too.

#. This is a numbered list.
#. It has two items too.
```

Nested lists are possible, but be aware that they must be separated from the parent list items by blank lines:

```
* this is
* a list

  * with a nested list
  * and some subitems

* and here the parent list continues
```

Definition lists ([ref⁷⁹](#)) are created as follows:

```
term (up to a line of text)
  Definition of the term, which must be indented
```

(continues on next page)

⁷⁸ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#bullet-lists>

⁷⁹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#definition-lists>

(continued from previous page)

```

    and can even consist of multiple paragraphs

next term
    Description.

```

Note that the term cannot have more than one line of text.

Quoted paragraphs ([ref⁸⁰](#)) are created by just indenting them more than the surrounding paragraphs.

Line blocks ([ref⁸¹](#)) are a way of preserving line breaks:

```

| These lines are
| broken exactly like in
| the source file.

```

There are also several more special blocks available:

- field lists ([ref⁸²](#), with caveats noted in *Field Lists*)
- option lists ([ref⁸³](#))
- quoted literal blocks ([ref⁸⁴](#))
- doctest blocks ([ref⁸⁵](#))

Literal blocks

Literal code blocks ([ref⁸⁶](#)) are introduced by ending a paragraph with the special marker `::`. The literal block must be indented (and, like all paragraphs, separated from the surrounding ones by blank lines):

```

This is a normal text paragraph. The next paragraph is a code sample::

    It is not processed in any way, except
    that the indentation is removed.

    It can span multiple lines.

This is a normal text paragraph again.

```

The handling of the `::` marker is smart:

- If it occurs as a paragraph of its own, that paragraph is completely left out of the document.
- If it is preceded by whitespace, the marker is removed.
- If it is preceded by non-whitespace, the marker is replaced by a single colon.

That way, the second sentence in the above example’s first paragraph would be rendered as “The next paragraph is a code sample:”.

⁸⁰ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#block-quotes>

⁸¹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#line-blocks>

⁸² <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#field-lists>

⁸³ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#option-lists>

⁸⁴ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#quoted-literal-blocks>

⁸⁵ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#doctest-blocks>

⁸⁶ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#literal-blocks>

Code highlighting can be enabled for these literal blocks on a document-wide basis using the `highlight` directive and on a project-wide basis using the `highlight_language` configuration option. The `code-block` directive can be used to set highlighting on a block-by-block basis. These directives are discussed later.

Doctest blocks

Doctest blocks ([ref⁸⁷](#)) are interactive Python sessions cut-and-pasted into docstrings. They do not require the *literal blocks* syntax. The doctest block must end with a blank line and should *not* end with an unused prompt:

```
>>> 1 + 1
2
```

Tables

For *grid tables* ([ref⁸⁸](#)), you have to “paint” the cell grid yourself. They look like this:

```
+-----+-----+-----+-----+
| Header row, column 1 | Header 2 | Header 3 | Header 4 |
| (header rows optional) |         |         |         |
+-----+-----+-----+-----+
| body row 1, column 1 | column 2 | column 3 | column 4 |
+-----+-----+-----+-----+
| body row 2           | ...     | ...     |         |
+-----+-----+-----+-----+
```

Simple tables ([ref⁸⁹](#)) are easier to write, but limited: they must contain more than one row, and the first column cells cannot contain multiple lines. They look like this:

```
=====
A      B      A and B
=====
False  False  False
True   False  False
False  True   False
True   True   True
=====
```

Two more syntaxes are supported: *CSV tables* and *List tables*. They use an *explicit markup block*. Refer to [Tables](#) for more information.

⁸⁷ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#doctest-blocks>

⁸⁸ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#grid-tables>

⁸⁹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#simple-tables>

Hyperlinks

External links

Use ``Link text <https://domain.invalid/>`_` for inline web links. If the link text should be the web address, you don't need special markup at all, the parser finds links and mail addresses in ordinary text.

Important: There must be a space between the link text and the opening `<` for the URL.

You can also separate the link and the target definition ([ref⁹⁰](#)), like this:

This is a paragraph that contains ``a link`_`.

```
.. _a link: https://domain.invalid/
```

Internal links

Internal linking is done via a special reST role provided by Sphinx, see the section on specific markup, *Cross-referencing arbitrary locations*.

Sections

Section headers ([ref⁹¹](#)) are created by underlining (and optionally overlining) the section title with a punctuation character, at least as long as the text:

```
=====
This is a heading
=====
```

Normally, there are no heading levels assigned to certain characters as the structure is determined from the succession of headings. However, this convention is used in *Python Developer's Guide for documenting*⁹² which you may follow:

- # with overline, for parts
- * with overline, for chapters
- = for sections
- - for subsections
- ^ for subsubsections
- " for paragraphs

Of course, you are free to use your own marker characters (see the reST documentation), and use a deeper nesting level, but keep in mind that most target formats (HTML, LaTeX) have a limited supported nesting depth.

⁹⁰ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#hyperlink-targets>

⁹¹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#sections>

⁹² <https://devguide.python.org/documentation/markup/#sections>

Field Lists

Field lists ([ref](#)⁹³) are sequences of fields marked up like this:

```
:fieldname: Field content
```

They are commonly used in Python documentation:

```
def my_function(my_arg, my_other_arg):  
    """A function just for me.  
  
    :param my_arg: The first of my arguments.  
    :param my_other_arg: The second of my arguments.  
  
    :returns: A message (just for me, of course).  
    """
```

Sphinx extends standard docutils behavior and intercepts field lists specified at the beginning of documents. Refer to [Field Lists](#) for more information.

Roles

A role or “custom interpreted text role” ([ref](#)⁹⁴) is an inline piece of explicit markup. It signifies that the enclosed text should be interpreted in a specific way. Sphinx uses this to provide semantic markup and cross-referencing of identifiers, as described in the appropriate section. The general syntax is `:rolename: `content``.

Docutils supports the following roles:

- [emphasis](#)⁹⁵ – equivalent of `*emphasis*`
- [strong](#)⁹⁶ – equivalent of `**strong**`
- [literal](#)⁹⁷ – equivalent of ``literal``
- [subscript](#)⁹⁸ – subscript text
- [superscript](#)⁹⁹ – superscript text
- [title-reference](#)¹⁰⁰ – for titles of books, periodicals, and other materials

Refer to [Roles](#) for roles added by Sphinx.

⁹³ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#field-lists>

⁹⁴ <https://docutils.sourceforge.io/docs/ref/rst/roles.html>

⁹⁵ <https://docutils.sourceforge.io/docs/ref/rst/roles.html#emphasis>

⁹⁶ <https://docutils.sourceforge.io/docs/ref/rst/roles.html#strong>

⁹⁷ <https://docutils.sourceforge.io/docs/ref/rst/roles.html#literal>

⁹⁸ <https://docutils.sourceforge.io/docs/ref/rst/roles.html#subscript>

⁹⁹ <https://docutils.sourceforge.io/docs/ref/rst/roles.html#superscript>

¹⁰⁰ <https://docutils.sourceforge.io/docs/ref/rst/roles.html#title-reference>

Explicit Markup

“Explicit markup” ([ref¹⁰¹](#)) is used in reST for most constructs that need special handling, such as footnotes, specially-highlighted paragraphs, comments, and generic directives.

An explicit markup block begins with a line starting with `..` followed by whitespace and is terminated by the next paragraph at the same level of indentation. (There needs to be a blank line between explicit markup and normal paragraphs. This may all sound a bit complicated, but it is intuitive enough when you write it.)

Directives

A directive ([ref¹⁰²](#)) is a generic block of explicit markup. Along with roles, it is one of the extension mechanisms of reST, and Sphinx makes heavy use of it.

Docutils supports the following directives:

- Admonitions: [attention¹⁰³](#), [caution¹⁰⁴](#), [danger¹⁰⁵](#), [error¹⁰⁶](#), [hint¹⁰⁷](#), [important¹⁰⁸](#), [note¹⁰⁹](#), [tip¹¹⁰](#), [warning¹¹¹](#) and the generic [admonition¹¹²](#). (Most themes style only “note” and “warning” specially.)
- Images:
 - [image¹¹³](#) (see also *Images* below)
 - [figure¹¹⁴](#) (an image with caption and optional legend)
- Additional body elements:
 - [contents¹¹⁵](#) (a local, i.e. for the current file only, table of contents)
 - [container¹¹⁶](#) (a container with a custom class, useful to generate an outer `<div>` in HTML)
 - [rubric¹¹⁷](#) (a heading without relation to the document sectioning)
 - [topic¹¹⁸](#), [sidebar¹¹⁹](#) (special highlighted body elements)
 - [parsed-literal¹²⁰](#) (literal block that supports inline markup)
 - [epigraph¹²¹](#) (a block quote with optional attribution line)
 - [highlights¹²²](#), [pull-quote¹²³](#) (block quotes with their own class attribute)

¹⁰¹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#explicit-markup-blocks>

¹⁰² <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#directives>

¹⁰³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#attention>

¹⁰⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#caution>

¹⁰⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#danger>

¹⁰⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#error>

¹⁰⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#hint>

¹⁰⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#important>

¹⁰⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

¹¹⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#tip>

¹¹¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#warning>

¹¹² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#admonitions>

¹¹³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#image>

¹¹⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#figure>

¹¹⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

¹¹⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#container>

¹¹⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#rubric>

¹¹⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

¹¹⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#sidebar>

¹²⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#parsed-literal>

¹²¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#epigraph>

¹²² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#highlights>

¹²³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#pull-quote>

- `compound`¹²⁴ (a compound paragraph)
- Special tables:
 - `table`¹²⁵ (a table with title)
 - `csv-table`¹²⁶ (a table generated from comma-separated values)
 - `list-table`¹²⁷ (a table generated from a list of lists)
- Special directives:
 - `raw`¹²⁸ (include raw target-format markup)
 - `include`¹²⁹ (include reStructuredText from another file) – in Sphinx, when given an absolute include file path, this directive takes it as relative to the source directory
 - `class`¹³⁰ (assign a class attribute to the next element)

Note: When the default domain contains a `class` directive, this directive will be shadowed. Therefore, Sphinx re-exports it as `rst-class`.

- HTML specifics:
 - `meta`¹³¹ (generation of HTML `<meta>` tags, see also *HTML Metadata* below)
 - `title`¹³² (override document title)
- Influencing markup:
 - `default-role`¹³³ (set a new default role)
 - `role`¹³⁴ (create a new role)

Since these are only per-file, better use Sphinx’s facilities for setting the *default_role*.

Warning: Do *not* use the directives `sectnum`¹³⁵, `header`¹³⁶ and `footer`¹³⁷.

Directives added by Sphinx are described in *Directives*.

Basically, a directive consists of a name, arguments, options and content. (Keep this terminology in mind, it is used in the next chapter describing custom directives.) Looking at this example,

```
.. function:: foo(x)
           foo(y, z)
:module: some.module.name
```

(continues on next page)

¹²⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#compound-paragraph>
¹²⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table>
¹²⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#csv-table>
¹²⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#list-table>
¹²⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#raw-data-pass-through>
¹²⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>
¹³⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#class>
¹³¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#meta>
¹³² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#metadata-document-title>
¹³³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#default-role>
¹³⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#role>
¹³⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#sectnum>
¹³⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#header>
¹³⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#footer>

(continued from previous page)

Return a line of text input from the user.

`function` is the directive name. It is given two arguments here, the remainder of the first line and the second line, as well as one option `module` (as you can see, options are given in the lines immediately following the arguments and indicated by the colons). Options must be indented to the same level as the directive content.

The directive content follows after a blank line and is indented relative to the directive start or if options are present, by the same amount as the options.

Be careful as the indent is not a fixed number of whitespace, e.g. three, but any number whitespace. This can be surprising when a fixed indent is used throughout the document and can make a difference for directives which are sensitive to whitespace. Compare:

```
.. code-block::
   :caption: A cool example

       The output of this line starts with four spaces.

.. code-block::

       The output of this line has no spaces at the beginning.
```

In the first code block, the indent for the content was fixated by the option line to three spaces, consequently the content starts with four spaces. In the latter the indent was fixed by the content itself to seven spaces, thus it does not start with a space.

Images

reST supports an image directive ([ref¹³⁸](#)), used like so:

```
.. image:: gnu.png
   (options)
```

When used within Sphinx, the file name given (here `gnu.png`) must either be relative to the source file, or absolute which means that they are relative to the top source directory. For example, the file `sketch/spam.rst` could refer to the image `images/spam.png` as `../images/spam.png` or `/images/spam.png`.

Sphinx will automatically copy image files over to a subdirectory of the output directory on building (e.g. the `_static` directory for HTML output.)

Interpretation of image size options (`width` and `height`) is as follows: if the size has no unit or the unit is pixels, the given size will only be respected for output channels that support pixels. Other units (like `pt` for points) will be used for HTML and LaTeX output (the latter replaces `pt` by `bp` as this is the TeX unit such that `72bp=1in`).

Sphinx extends the standard docutils behavior by allowing an asterisk for the extension:

```
.. image:: gnu.*
```

Sphinx then searches for all images matching the provided pattern and determines their type. Each builder then chooses the best image out of these candidates. For instance, if the file name `gnu.*` was given and two files `gnu.pdf` and `gnu.png` existed in the source tree, the LaTeX builder would choose the former, while the HTML builder would prefer the latter. Supported image types and choosing priority are defined at [Builders](#).

¹³⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#image>

Note that image file names should not contain spaces.

Changed in version 0.4: Added the support for file names ending in an asterisk.

Changed in version 0.6: Image paths can now be absolute.

Changed in version 1.5: latex target supports pixels (default is 96px=1in).

Footnotes

For footnotes ([ref¹³⁹](#)), use `[#name]_` to mark the footnote location, and add the footnote body at the bottom of the document after a “Footnotes” rubric heading, like so:

```

Lorem ipsum [#f1]_ dolor sit amet ... [#f2]_

.. rubric:: Footnotes

.. [#f1] Text of the first footnote.
.. [#f2] Text of the second footnote.
```

You can also explicitly number the footnotes (`[1]_`) or use auto-numbered footnotes without names (`[#]_`).

Citations

Standard reST citations ([ref¹⁴⁰](#)) are supported, with the additional feature that they are “global”, i.e. all citations can be referenced from all files. Use them like so:

```

Lorem ipsum [Ref]_ dolor sit amet.

.. [Ref] Book or article reference, URL or whatever.
```

Citation usage is similar to footnote usage, but with a label that is not numeric or begins with #.

Substitutions

reST supports “substitutions” ([ref¹⁴¹](#)), which are pieces of text and/or markup referred to in the text by `|name|`. They are defined like footnotes with explicit markup blocks, like this:

```
.. |name| replace:: replacement *text*
```

or this:

```
.. |caution| image:: warning.png
   :alt: Warning!
```

See the [reST reference for substitutions¹⁴²](#) for details.

If you want to use some substitutions for all documents, put them into `rst_prolog` or `rst_epilog` or put them into a separate file and include it into all documents you want to use them in, using the `include143` directive. (Be sure to give

¹³⁹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#footnotes>

¹⁴⁰ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#citations>

¹⁴¹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#substitution-definitions>

¹⁴² <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#substitution-definitions>

¹⁴³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

the include file a file name extension differing from that of other source files, to avoid Sphinx finding it as a standalone document.)

Sphinx defines some default substitutions, see *Substitutions*.

Comments

Every explicit markup block which isn't a valid markup construct (like the footnotes above) is regarded as a comment (ref¹⁴⁴). For example:

```
.. This is a comment.
```

You can indent text after a comment start to form multiline comments:

```
..
    This whole indented block
    is a comment.

    Still in the comment.
```

HTML Metadata

The `meta`¹⁴⁵ directive allows specifying the HTML `metadata element`¹⁴⁶ of a Sphinx documentation page. For example, the directive:

```
.. meta::
   :description: The Sphinx documentation builder
   :keywords: Sphinx, documentation, builder
```

will generate the following HTML output:

```
<meta name="description" content="The Sphinx documentation builder">
<meta name="keywords" content="Sphinx, documentation, builder">
```

Also, Sphinx will add the keywords as specified in the meta directive to the search index. Thereby, the `lang` attribute of the meta element is considered. For example, the directive:

```
.. meta::
   :keywords: backup
   :keywords lang=en: pleasefindthiskey pleasefindthiskeytoo
   :keywords lang=de: bittediesenkeyfinden
```

adds the following words to the search indices of builds with different language configurations:

- `pleasefindthiskey`, `pleasefindthiskeytoo` to *English* builds;
- `bittediesenkeyfinden` to *German* builds;
- `backup` to builds in all languages.

¹⁴⁴ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#comments>

¹⁴⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#meta>

¹⁴⁶ <https://developer.mozilla.org/en-US/docs/Web/HTML/Element/meta>

Source encoding

Since the easiest way to include special characters like em dashes or copyright signs in reST is to directly write them as Unicode characters, one has to specify an encoding. Sphinx assumes source files to be encoded in UTF-8 by default; you can change this with the `source_encoding` config value.

Gotchas

There are some problems one commonly runs into while authoring reST documents:

- **Separation of inline markup:** As said above, inline markup spans must be separated from the surrounding text by non-word characters, you have to use a backslash-escaped space to get around that. See [the reference](#)¹⁴⁷ for the details.
- **No nested inline markup:** Something like `*see :func:`foo`*` is not possible.

Roles

Sphinx uses interpreted text roles to insert semantic markup into documents. They are written as `:rolename:`content``.

Note: The default role (``content``) has no special meaning by default. You are free to use it for anything you like, e.g. variable names; use the `default_role` config value to set it to a known role – the `any` role to find anything or the `py:obj` role to find Python objects are very useful for this.

See [Domains](#) for roles added by domains.

Cross-referencing syntax

See [Cross-referencing syntax](#).

Cross-reference roles include:

- `any`
- `doc`
- `download`
- `envvar`
- `keyword`
- `numref`
- `option` (and the deprecated `cmdoption`)
- `ref`
- `term`
- `token`

¹⁴⁷ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#substitution-definitions>

Inline code highlighting

:code:

An *inline* code example. When used directly, this role just displays the text *without* syntax highlighting, as a literal.

By default, inline code such as `:code:`1 + 2`` just displays without highlighting.

Displays: By default, inline code such as `1 + 2` just displays without highlighting.

Unlike the `code-block` directive, this role does not respect the default language set by the `highlight` directive.

To enable syntax highlighting, you must first use the Docutils `role`¹⁴⁸ directive to define a custom role associated with a specific language:

```
.. role:: python(code)
   :language: python
```

In Python, `:python:`1 + 2`` is equal to `:python:`3``.

To display a multi-line code example, use the `code-block` directive instead.

Math

:math:

Role for inline math. Use like this:

Since Pythagoras, we know that `:math:`a^2 + b^2 = c^2``.

Displays: Since Pythagoras, we know that $a^2 + b^2 = c^2$.

:eq:

Same as `math:numref`.

Other semantic markup

The following roles don't do anything special except formatting the text in a different style:

:abbr:

An abbreviation. If the role content contains a parenthesized explanation, it will be treated specially: it will be shown in a tool-tip in HTML, and output only once in LaTeX.

For example: `:abbr:`LIFO (last-in, first-out)`` displays LIFO (last-in, first-out).

Added in version 0.6.

:command:

The name of an OS-level command, such as `rm`.

For example: `rm`

¹⁴⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#role>

:dfn:

Mark the defining instance of a term in the text. (No index entries are generated.)

For example: *binary mode*

:file:

The name of a file or directory. Within the contents, you can use curly braces to indicate a “variable” part, for example:

```
... is installed in :file:`/usr/lib/python3.{x}/site-packages` ...
```

Displays: ... is installed in /usr/lib/python3.x/site-packages ...

In the built documentation, the x will be displayed differently to indicate that it is to be replaced by the Python minor version.

:guilabel:

Labels presented as part of an interactive user interface should be marked using `guilabel`. This includes labels from text-based interfaces such as those created using `curses`¹⁴⁹ or other text-based libraries. Any label used in the interface should be marked with this role, including button labels, window titles, field names, menu and menu selection names, and even values in selection lists.

Changed in version 1.0: An accelerator key for the GUI label can be included using an ampersand; this will be stripped and displayed underlined in the output (for example: `:guilabel:`&Cancel`` displays Cancel). To include a literal ampersand, double it.

:kbd:

Mark a sequence of keystrokes. What form the key sequence takes may depend on platform- or application-specific conventions. When there are no relevant conventions, the names of modifier keys should be spelled out, to improve accessibility for new users and non-native speakers. For example, an *xemacs* key sequence may be marked like `:kbd:`C-x C-f``, but without reference to a specific application or platform, the same sequence should be marked as `:kbd:`Control-x Control-f``, displaying C-x C-f and Control-x Control-f respectively.

:mailheader:

The name of an RFC 822-style mail header. This markup does not imply that the header is being used in an email message, but can be used to refer to any header of the same “style.” This is also used for headers defined by the various MIME specifications. The header name should be entered in the same way it would normally be found in practice, with the camel-casing conventions being preferred where there is more than one common usage. For example: `:mailheader:`Content-Type`` displays *Content-Type*.

:makevar:

The name of a **make** variable.

For example: **help**

:manpage:

A reference to a Unix manual page including the section, e.g. `:manpage:`ls(1)`` displays *ls(1)*. Creates a hyperlink to an external site rendering the manpage if `manpages_url` is defined.

Changed in version 7.3: Allow specifying a target with `<>`, like hyperlinks. For example, `:manpage:`blah <ls(1)>`` displays *blah*.

:menuselection:

Menu selections should be marked using the `menuselection` role. This is used to mark a complete sequence of menu selections, including selecting submenus and choosing a specific operation, or any subsequence of such a sequence. The names of individual selections should be separated by `-->`.

¹⁴⁹ <https://docs.python.org/3/library/curses.html#module-curses>

For example, to mark the selection “Start > Programs”, use this markup:

```
:menuselection:`Start --> Programs`
```

Displays: *Start → Programs*

When including a selection that includes some trailing indicator, such as the ellipsis some operating systems use to indicate that the command opens a dialog, the indicator should be omitted from the selection name.

`menuselection` also supports ampersand accelerators just like *guilabel*.

:mimetype:

The name of a MIME type, or a component of a MIME type (the major or minor portion, taken alone).

For example: *text/plain*

:newsgroup:

The name of a Usenet newsgroup.

For example: *comp.lang.python*

Todo: Is this not part of the standard domain?

:program:

The name of an executable program. This may differ from the file name for the executable for some platforms. In particular, the `.exe` (or other) extension should be omitted for Windows programs.

For example: *curl*

:regexp:

A regular expression. Quotes should not be included.

For example: *([abc])+*

:samp:

A piece of literal text, such as code. Within the contents, you can use curly braces to indicate a “variable” part, as in *file*. For example, in `:samp:`print(1+{variable})``, the part *variable* would be emphasized: `print(1+variable)`

If you don’t need the “variable part” indication, use the standard *code* role instead.

Changed in version 1.8: Allowed to escape curly braces with double backslash. For example, in `:samp:`print(f"answer=\\{1+{variable}*2\\}")``, the part *variable* would be emphasized and the escaped curly braces would be displayed: `print(f"answer={1+variable*2}")`

There is also an *index* role to generate index entries.

The following roles generate external links:

:pep:

A reference to a Python Enhancement Proposal. This generates appropriate index entries. The text “PEP *number*” is generated; in the HTML output, this text is a hyperlink to an online copy of the specified PEP. You can link to a specific section by saying `:pep:`number#anchor``.

For example: **PEP 8**¹⁵⁰

¹⁵⁰ <https://peps.python.org/pep-0008/>

:rfc:

A reference to an Internet Request for Comments. This generates appropriate index entries. The text “RFC *number*” is generated; in the HTML output, this text is a hyperlink to an online copy of the specified RFC. You can link to a specific section by saying `:rfc:`number#anchor``.

For example: **RFC 2324**¹⁵¹

Note that there are no special roles for including hyperlinks as you can use the standard reST markup for that purpose.

Substitutions

The documentation system provides some substitutions that are defined by default. They are set in the build configuration file.

|release|

Replaced by the project release the documentation refers to. This is meant to be the full version string including alpha/beta/release candidate tags, e.g. 2.5.2b3. Set by *release*.

|version|

Replaced by the project version the documentation refers to. This is meant to consist only of the major and minor version parts, e.g. 2.5, even for version 2.5.1. Set by *version*.

|today|

Replaced by either today’s date (the date on which the document is read), or the date set in the build configuration file. Normally has the format April 14, 2007. Set by *today_fmt* and *today*.

|translation progress|

Replaced by the translation progress of the document. This substitution is intended for use by document translators as a marker for the translation progress of the document.

Directives

As previously discussed, a directive is a generic block of explicit markup. While Docutils provides a number of directives, Sphinx provides many more and uses directives as one of the primary extension mechanisms.

See *Domains* for roles added by domains.

See also:

Refer to the *reStructuredText Primer* for an overview of the directives provided by Docutils.

Table of contents

Since reST does not have facilities to interconnect several documents, or split documents into multiple output files, Sphinx uses a custom directive to add relations between the single files the documentation is made of, as well as tables of contents. The `toctree` directive is the central element.

Note: Simple “inclusion” of one file in another can be done with the `include`¹⁵² directive.

¹⁵¹ <https://datatracker.ietf.org/doc/html/rfc2324.html>

¹⁵² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

Note: To create table of contents for current document (.rst file), use the standard reST [contents directive](#)¹⁵³.

.. toctree::

This directive inserts a “TOC tree” at the current location, using the individual TOCs (including “sub-TOC trees”) of the documents given in the directive body. Relative document names (not beginning with a slash) are relative to the document the directive occurs in, absolute names are relative to the source directory. A numeric **maxdepth** option may be given to indicate the depth of the tree; by default, all levels are included.¹⁶⁹

The representation of “TOC tree” is changed in each output format. The builders that output multiple files (ex. HTML) treat it as a collection of hyperlinks. On the other hand, the builders that output a single file (ex. LaTeX, man page, etc.) replace it with the content of the documents on the TOC tree.

Consider this example (taken from the Python docs’ library reference index):

```
.. toctree::
   :maxdepth: 2

   intro
   strings
   datatypes
   numeric
   (many more documents listed here)
```

This accomplishes two things:

- Tables of contents from all those documents are inserted, with a maximum depth of two, that means one nested heading. **toctree** directives in those documents are also taken into account.
- Sphinx knows the relative order of the documents **intro**, **strings** and so forth, and it knows that they are children of the shown document, the library index. From this information it generates “next chapter”, “previous chapter” and “parent chapter” links.

Entries

Document titles in the **toctree** will be automatically read from the title of the referenced document. If that isn’t what you want, you can specify an explicit title and target using a similar syntax to reST hyperlinks (and Sphinx’s *cross-referencing syntax*). This looks like:

```
.. toctree::

   intro
   All about strings <strings>
   datatypes
```

The second line above will link to the **strings** document, but will use the title “All about strings” instead of the title of the **strings** document.

You can also add external links, by giving an HTTP URL instead of a document name.

Section numbering

If you want to have section numbers even in HTML output, give the **toctree** a **numbered** option. For example:

¹⁵³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

```
.. toctree::
   :numbered:

   foo
   bar
```

Numbering then starts at the heading of `foo`. Sub-toctrees are automatically numbered (don't give the `numbered` flag to those).

Numbering up to a specific depth is also possible, by giving the depth as a numeric argument to `numbered`.

Additional options

You can use the `caption` option to provide a toctree caption and you can use the `name` option to provide an implicit target name that can be referenced by using `ref`:

```
.. toctree::
   :caption: Table of Contents
   :name: mastertoc

   foo
```

If you want only the titles of documents in the tree to show up, not other headings of the same level, you can use the `titlesonly` option:

```
.. toctree::
   :titlesonly:

   foo
   bar
```

You can use “globbing” in toctree directives, by giving the `glob` flag option. All entries are then matched against the list of available documents, and matches are inserted into the list alphabetically. Example:

```
.. toctree::
   :glob:

   intro*
   recipe/*
   *
```

This includes first all documents whose names start with `intro`, then all documents in the `recipe` folder, then all remaining documents (except the one containing the directive, of course.)¹⁷⁰

The special entry name `self` stands for the document containing the toctree directive. This is useful if you want to generate a “sitemap” from the toctree.

You can use the `reversed` flag option to reverse the order of the entries in the list. This can be useful when using the `glob` flag option to reverse the ordering of the files. Example:

```
.. toctree::
   :glob:
   :reversed:

   recipe/*
```

You can also give a “hidden” option to the directive, like this:

```
.. toctree::
   :hidden:

   doc_1
   doc_2
```

This will still notify Sphinx of the document hierarchy, but not insert links into the document at the location of the directive – this makes sense if you intend to insert these links yourself, in a different style, or in the HTML sidebar.

In cases where you want to have only one top-level toctree and hide all other lower level toctrees you can add the “includehidden” option to the top-level toctree entry:

```
.. toctree::
   :includehidden:

   doc_1
   doc_2
```

All other toctree entries can then be eliminated by the “hidden” option.

In the end, all documents in the *source directory* (or subdirectories) must occur in some `toctree` directive; Sphinx will emit a warning if it finds a file that is not included, because that means that this file will not be reachable through standard navigation.

Use *exclude_patterns* to explicitly exclude documents or directories from building completely. Use the “*orphan*” *metadata* to let a document be built, but notify Sphinx that it is not reachable via a toctree.

The “root document” (selected by *root_doc*) is the “root” of the TOC tree hierarchy. It can be used as the documentation’s main page, or as a “full table of contents” if you don’t give a *maxdepth* option.

Changed in version 0.3: Added “globbing” option.

Changed in version 0.6: Added “numbered” and “hidden” options as well as external links and support for “self” references.

Changed in version 1.0: Added “titlesonly” option.

Changed in version 1.1: Added numeric argument to “numbered”.

Changed in version 1.2: Added “includehidden” option.

Changed in version 1.3: Added “caption” and “name” option.

Special names

Sphinx reserves some document names for its own use; you should not try to create documents with these names – it will cause problems.

The special document names (and pages generated for them) are:

- `genindex`, `modindex`, `search`

These are used for the general index, the Python module index, and the search page, respectively.

The general index is populated with entries from modules, all index-generating *object descriptions*, and from *index* directives.

¹⁶⁹ The LaTeX writer only refers the *maxdepth* option of first toctree directive in the document.

¹⁷⁰ A note on available globbing syntax: you can use the standard shell constructs `*`, `?`, `[...]` and `[!...]` with the feature that these all don’t match slashes. A double star `**` can be used to match any sequence of characters *including* slashes.

The Python module index contains one entry per `py:module` directive.

The search page contains a form that uses the generated JSON search index and JavaScript to full-text search the generated documents for search words; it should work on every major browser that supports modern JavaScript.

- every name beginning with `_`

Though few such names are currently used by Sphinx, you should not create documents or document-containing directories with such names. (Using `_` as a prefix for a custom template directory is fine.)

Warning: Be careful with unusual characters in filenames. Some formats may interpret these characters in unexpected ways:

- Do not use the colon `:` for HTML based formats. Links to other parts may not work.
- Do not use the plus `+` for the ePub format. Some resources may not be found.

Paragraph-level markup

These directives create short paragraphs and can be used inside information units as well as normal text.

`.. note::`

An especially important bit of information about an API that a user should be aware of when using whatever bit of API the note pertains to. The content of the directive should be written in complete sentences and include all appropriate punctuation.

Example:

```
.. note::  
  
    This function is not suitable for sending spam e-mails.
```

`.. warning::`

An important bit of information about an API that a user should be very aware of when using whatever bit of API the warning pertains to. The content of the directive should be written in complete sentences and include all appropriate punctuation. This differs from `note` in that it is recommended over `note` for information regarding security.

`.. versionadded:: version`

This directive documents the version of the project which added the described feature to the library or C API. When this applies to an entire module, it should be placed at the top of the module section before any prose.

The first argument must be given and is the version in question; you can add a second argument consisting of a *brief* explanation of the change.

Example:

```
.. versionadded:: 2.5  
    The *spam* parameter.
```

Note that there must be no blank line between the directive head and the explanation; this is to make these blocks visually continuous in the markup.

`.. versionchanged:: version`

Similar to `versionadded`, but describes when and what changed in the named feature in some way (new parameters, changed side effects, etc.).

.. deprecated:: version

Similar to *versionchanged*, but describes when the feature was deprecated. An explanation can also be given, for example to inform the reader what should be used instead. Example:

```
.. deprecated:: 3.1
    Use :func:`spam` instead.
```

.. versionremoved:: version

Similar to *versionadded*, but describes when the feature was removed. An explanation may be provided to inform the reader what to use instead, or why the feature was removed. Example:

```
.. versionremoved:: 4.0
    The :func:`spam` function is more flexible, and should be used instead.
```

Added in version 7.3.

.. seealso::

Many sections include a list of references to module documentation or external documents. These lists are created using the *seealso* directive.

The *seealso* directive is typically placed in a section just before any subsections. For the HTML output, it is shown boxed off from the main flow of the text.

The content of the *seealso* directive should be a reST definition list. Example:

```
.. seealso::

    Module :py:mod:`zipfile`
        Documentation of the :py:mod:`zipfile` standard module.

    `GNU tar manual, Basic Tar Format <https://link>`_
        Documentation for tar archive files, including GNU tar extensions.
```

There's also a "short form" allowed that looks like this:

```
.. seealso:: modules :py:mod:`zipfile`, :py:mod:`tarfile`
```

Added in version 0.5: The short form.

.. rubric:: title

This directive creates a paragraph heading that is not used to create a table of contents node.

Note: If the *title* of the rubric is "Footnotes" (or the selected language's equivalent), this rubric is ignored by the LaTeX writer, since it is assumed to only contain footnote definitions and therefore would create an empty heading.

.. centered::

This directive creates a centered boldfaced line of text. Use it as follows:

```
.. centered:: LICENSE AGREEMENT
```

Deprecated since version 1.1: This presentation-only directive is a legacy from older versions. Use a *rst-class* directive instead and add an appropriate style.

.. hlist::

This directive must contain a bullet list. It will transform it into a more compact list by either distributing more than one item horizontally, or reducing spacing between items, depending on the builder.

For builders that support the horizontal distribution, there is a `columns` option that specifies the number of columns; it defaults to 2. Example:

```
.. hlist::
   :columns: 3

   * A list of
   * short items
   * that should be
   * displayed
   * horizontally
```

Added in version 0.6.

Showing code examples

There are multiple ways to show syntax-highlighted literal code blocks in Sphinx:

- using *reST doctest blocks*;
- using *reST literal blocks*, optionally in combination with the *highlight* directive;
- using the *code-block* directive;
- and using the *literalinclude* directive.

Doctest blocks can only be used to show interactive Python sessions, while the remaining three can be used for other languages. Of these three, literal blocks are useful when an entire document, or at least large sections of it, use code blocks with the same syntax and which should be styled in the same manner. On the other hand, the *code-block* directive makes more sense when you want more fine-tuned control over the styling of each block or when you have a document containing code blocks using multiple varied syntaxes. Finally, the *literalinclude* directive is useful for including entire code files in your documentation.

In all cases, Syntax highlighting is provided by *Pygments*¹⁵⁴. When using literal blocks, this is configured using any *highlight* directives in the source file. When a *highlight* directive is encountered, it is used until the next *highlight* directive is encountered. If there is no *highlight* directive in the file, the global highlighting language is used. This defaults to `python` but can be configured using the *highlight_language* config value. The following values are supported:

- `none` (no highlighting)
- `default` (similar to `python3` but with a fallback to `none` without warning highlighting fails; the default when *highlight_language* isn't set)
- `guess` (let Pygments guess the lexer based on contents, only works with certain well-recognizable languages)
- `python`
- `rest`
- `c`
- ... and any other *lexer alias* that *Pygments* supports¹⁵⁵

¹⁵⁴ <https://pygments.org>

¹⁵⁵ <https://pygments.org/docs/lexers>

If highlighting with the selected language fails (i.e. Pygments emits an “Error” token), the block is not highlighted in any way.

Important: The list of lexer aliases supported is tied to the Pygment version. If you want to ensure consistent highlighting, you should fix your version of Pygments.

.. highlight:: language

Example:

```
.. highlight:: c
```

This language is used until the next **highlight** directive is encountered. As discussed previously, *language* can be any lexer alias supported by Pygments.

options

:linenothreshold: threshold (number (optional))

Enable to generate line numbers for code blocks.

This option takes an optional number as threshold parameter. If any threshold given, the directive will produce line numbers only for the code blocks longer than N lines. If not given, line numbers will be produced for all of code blocks.

Example:

```
.. highlight:: python
   :linenothreshold: 5
```

:force: (no value)

If given, minor errors on highlighting are ignored.

Added in version 2.1.

.. code-block:: [language]

.. sourcecode:: [language]

Example:

```
.. code-block:: ruby
```

```
Some Ruby code.
```

The directive’s alias name *sourcecode* works as well. This directive takes a language name as an argument. It can be any lexer alias supported by Pygments¹⁵⁶. If it is not given, the setting of *highlight* directive will be used. If not set, *highlight_language* will be used. To display a code example *inline* within other text, rather than as a separate block, you can use the *code* role instead.

Changed in version 2.0: The language argument becomes optional.

options

:linenos: (no value)

Enable to generate line numbers for the code block:

```
.. code-block:: ruby
   :linenos:

   Some more Ruby code.
```

:lineno-start: number (number)

Set the first line number of the code block. If present, `linenos` option is also automatically activated:

```
.. code-block:: ruby
   :lineno-start: 10

   Some more Ruby code, with line numbering starting at 10.
```

Added in version 1.3.

:emphasize-lines: line numbers (comma separated numbers)

Emphasize particular lines of the code block:

```
.. code-block:: python
   :emphasize-lines: 3,5

   def some_function():
       interesting = False
       print('This line is highlighted.')
       print('This one is not...')
       print('...but this one is.')
```

Added in version 1.1.

Changed in version 1.6.6: LaTeX supports the `emphasize-lines` option.

:caption: caption of code block (text)

Set a caption to the code block.

Added in version 1.3.

:name: a label for hyperlink (text)

Define implicit target name that can be referenced by using [ref](#). For example:

```
.. code-block:: python
   :caption: this.py
   :name: this-py

   print('Explicit is better than implicit.')
```

In order to cross-reference a code-block using either the [ref](#) or the [numref](#) role, it is necessary that both **name** and **caption** be defined. The argument of **name** can then be given to [numref](#) to generate the cross-reference. Example:

```
See :numref:`this-py` for an example.
```

When using `ref`, it is possible to generate a cross-reference with only **name** defined, provided an explicit title is given. Example:

```
See :ref:`this code snippet <this-py>` for an example.
```

Added in version 1.3.

:class: **class names** (a list of class names separated by spaces)

The class name of the graph.

Added in version 1.4.

:dedent: **number** (number or no value)

Strip indentation characters from the code block. When number given, leading N characters are removed. When no argument given, leading spaces are removed via `textwrap.dedent()`¹⁵⁷. For example:

```
.. code-block:: ruby
   :linenos:
   :dedent: 4

       some ruby code
```

Added in version 1.3.

Changed in version 3.5: Support automatic dedent.

:force: (no value)

If given, minor errors on highlighting are ignored.

Added in version 2.1.

.. literalinclude:: filename

Longer displays of verbatim text may be included by storing the example text in an external file containing only plain text. The file may be included using the `literalinclude` directive.¹⁷¹ For example, to include the Python source file `example.py`, use:

```
.. literalinclude:: example.py
```

The file name is usually relative to the current file's path. However, if it is absolute (starting with `/`), it is relative to the top source directory.

Additional options

Like `code-block`, the directive supports the `linenos` flag option to switch on line numbers, the `lineno-start` option to select the first line number, the `emphasize-lines` option to emphasize particular lines, the `name` option to provide an implicit target name, the `dedent` option to strip indentation characters for the code block, and a `language` option to select a language different from the current file's standard language. In addition, it supports the `caption` option; however, this can be provided with no argument to use the filename as the caption. Example with options:

```
.. literalinclude:: example.rb
   :language: ruby
   :emphasize-lines: 12, 15-18
   :linenos:
```

¹⁵⁶ <https://pygments.org/docs/lexers/>

¹⁵⁷ <https://docs.python.org/3/library/textwrap.html#textwrap.dedent>

Tabs in the input are expanded if you give a `tab-width` option with the desired tab width.

Include files are assumed to be encoded in the `source_encoding`. If the file has a different encoding, you can specify it with the `encoding` option:

```
.. literalinclude:: example.py
   :encoding: latin-1
```

The directive also supports including only parts of the file. If it is a Python module, you can select a class, function or method to include using the `pyobject` option:

```
.. literalinclude:: example.py
   :pyobject: Timer.start
```

This would only include the code lines belonging to the `start()` method in the `Timer` class within the file.

Alternately, you can specify exactly which lines to include by giving a `lines` option:

```
.. literalinclude:: example.py
   :lines: 1,3,5-10,20-
```

This includes the lines 1, 3, 5 to 10 and lines 20 to the last line.

Another way to control which part of the file is included is to use the `start-after` and `end-before` options (or only one of them). If `start-after` is given as a string option, only lines that follow the first line containing that string are included. If `end-before` is given as a string option, only lines that precede the first lines containing that string are included. The `start-at` and `end-at` options behave in a similar way, but the lines containing the matched string are included.

`start-after/start-at` and `end-before/end-at` can have same string. `start-after/start-at` filter lines before the line that contains option string (`start-at` will keep the line). Then `end-before/end-at` filter lines after the line that contains option string (`end-at` will keep the line and `end-before` skip the first line).

Note: If you want to select only `[second-section]` of ini file like the following, you can use `:start-at: [second-section]` and `:end-before: [third-section]`:

```
[first-section]

var_in_first=true

[second-section]

var_in_second=true

[third-section]

var_in_third=true
```

Useful cases of these option is working with tag comments. `:start-after: [initialize]` and `:end-before: [initialized]` options keep lines between comments:

```
if __name__ == "__main__":
    # [initialize]
    app.start(":8000")
    # [initialized]
```

When lines have been selected in any of the ways described above, the line numbers in `emphasize-lines` refer to those selected lines, counted consecutively starting at 1.

When specifying particular parts of a file to display, it can be useful to display the original line numbers. This can be done using the `lineno-match` option, which is however allowed only when the selection consists of contiguous lines.

You can prepend and/or append a line to the included code, using the `prepend` and `append` option, respectively. This is useful e.g. for highlighting PHP code that doesn't include the `<?php/?>` markers.

If you want to show the diff of the code, you can specify the old file by giving a `diff` option:

```
.. literalinclude:: example.py
   :diff: example.py.orig
```

This shows the diff between `example.py` and `example.py.orig` with unified diff format.

A `force` option can ignore minor errors on highlighting.

Changed in version 0.4.3: Added the `encoding` option.

Changed in version 0.6: Added the `pyobject`, `lines`, `start-after` and `end-before` options, as well as support for absolute filenames.

Changed in version 1.0: Added the `prepend`, `append`, and `tab-width` options.

Changed in version 1.3: Added the `diff`, `lineno-match`, `caption`, `name`, and `dedent` options.

Changed in version 1.4: Added the `class` option.

Changed in version 1.5: Added the `start-at`, and `end-at` options.

Changed in version 1.6: With both `start-after` and `lines` in use, the first line as per `start-after` is considered to be with line number 1 for `lines`.

Changed in version 2.1: Added the `force` option.

Changed in version 3.5: Support automatic dedent.

Glossary

.. glossary::

This directive must contain a reST definition-list-like markup with terms and definitions. The definitions will then be referenceable with the `term` role. Example:

```
.. glossary::

    environment
        A structure where information about all documents under the root is
        saved, and used for cross-referencing. The environment is pickled
        after the parsing stage, so that successive runs only need to read
        and parse new and changed documents.

    source directory
        The directory which, including its subdirectories, contains all
        source files for one Sphinx project.
```

¹⁷¹ There is a standard `.. include` directive, but it raises errors if the file is not found. This one only emits a warning.

In contrast to regular definition lists, *multiple* terms per entry are allowed, and inline markup is allowed in terms. You can link to all of the terms. For example:

```
.. glossary::

    term 1
    term 2
    Definition of both terms.
```

(When the glossary is sorted, the first term determines the sort order.)

If you want to specify “grouping key” for general index entries, you can put a “key” as “term : key”. For example:

```
.. glossary::

    term 1 : A
    term 2 : B
    Definition of both terms.
```

Note that “key” is used for grouping key as is. The “key” isn’t normalized; key “A” and “a” become different groups. The whole characters in “key” is used instead of a first character; it is used for “Combining Character Sequence” and “Surrogate Pairs” grouping key.

In i18n situation, you can specify “localized term : key” even if original text only have “term” part. In this case, translated “localized term” will be categorized in “key” group.

Added in version 0.6: You can now give the glossary directive a `:sorted:` flag that will automatically sort the entries alphabetically.

Changed in version 1.1: Now supports multiple terms and inline markup in terms.

Changed in version 1.4: Index key for glossary term should be considered *experimental*.

Changed in version 4.4: In internationalized documentation, the `:sorted:` flag sorts according to translated terms.

Meta-information markup

.. **sectionauthor**:: name <email>

Identifies the author of the current section. The argument should include the author’s name such that it can be used for presentation and email address. The domain name portion of the address should be lower case. Example:

```
.. sectionauthor:: Guido van Rossum <guido@python.org>
```

By default, this markup isn’t reflected in the output in any way (it helps keep track of contributions), but you can set the configuration value `show_authors` to True to make them produce a paragraph in the output.

.. **codeauthor**:: name <email>

The `codeauthor` directive, which can appear multiple times, names the authors of the described code, just like `sectionauthor` names the author(s) of a piece of documentation. It too only produces output if the `show_authors` configuration value is True.

Index-generating markup

Sphinx automatically creates index entries from all object descriptions (like functions, classes or attributes) like discussed in *Domains*.

However, there is also explicit markup available, to make the index more comprehensive and enable index entries in documents where information is not mainly contained in information units, such as the language reference.

.. index:: <entries>

This directive contains one or more index entries. Each entry consists of a type and a value, separated by a colon.

For example:

```
.. index::
    single: execution; context
    pair: module; __main__
    pair: module; sys
    triple: module; search; path
    seealso: scope
```

The execution context

...

This directive contains five entries, which will be converted to entries in the generated index which link to the exact location of the index statement (or, in case of offline media, the corresponding page number).

Since index directives generate cross-reference targets at their location in the source, it makes sense to put them *before* the thing they refer to – e.g. a heading, as in the example above.

The possible entry types are:

single

Creates a single index entry. Can be made a sub-entry by separating the sub-entry text with a semicolon (this notation is also used below to describe what entries are created). Examples:

```
.. index:: single: execution
           single: execution; context
```

- `single: execution` creates an index entry labelled `execution`.
- `single: execution; context` creates an sub-entry of `execution` labelled `context`.

pair

A shortcut to create two index entries. The pair of values must be separated by a semicolon. Example:

```
.. index:: pair: loop; statement
```

This would create two index entries; `loop; statement` and `statement; loop`.

triple

A shortcut to create three index entries. All three values must be separated by a semicolon. Example:

```
.. index:: triple: module; search; path
```

This would create three index entries; `module; search path`, `search; path, module`, and `path; module search`.

see

A shortcut to create an index entry that refers to another entry. Example:

```
.. index:: see: entry; other
```

This would create an index entry referring from `entry` to `other` (i.e. ‘entry’: See ‘other’).

seealso

Like `see`, but inserts ‘see also’ instead of ‘see’.

module, keyword, operator, object, exception, statement, builtin

These **deprecated** shortcuts all create two index entries. For example, `module: hashlib` creates the entries `module; hashlib` and `hashlib; module`.

Deprecated since version 1.0: These Python-specific entry types are deprecated.

Changed in version 7.1: Removal version set to Sphinx 9.0. Using these entry types will now emit warnings with the `index` category.

You can mark up “main” index entries by prefixing them with an exclamation mark. The references to “main” entries are emphasized in the generated index. For example, if two pages contain

```
.. index:: Python
```

and one page contains

```
.. index:: ! Python
```

then the backlink to the latter page is emphasized among the three backlinks.

For index directives containing only “single” entries, there is a shorthand notation:

```
.. index:: BNF, grammar, syntax, notation
```

This creates four index entries.

Changed in version 1.1: Added `see` and `seealso` types, as well as marking main entries.

options

:name: a label for hyperlink (text)

Define implicit target name that can be referenced by using [ref](#). For example:

```
.. index:: Python
   :name: py-index
```

Added in version 3.0.

:index:

While the `index` directive is a block-level markup and links to the beginning of the next paragraph, there is also a corresponding role that sets the link target directly where it is used.

The content of the role can be a simple phrase, which is then kept in the text and used as an index entry. It can also be a combination of text and index entry, styled like with explicit targets of cross-references. In that case, the “target” part can be a full entry as described for the directive above. For example:

```
This is a normal reST :index:`paragraph` that contains several
:index:`index entries <pair: index; entry>`.
```

Added in version 1.1.

Including content based on tags

.. only:: <expression>

Include the content of the directive only if the *expression* is true. The expression should consist of tags, like this:

```
.. only:: html and draft
```

Undefined tags are false, defined tags (via the `-t` command-line option or within `conf.py`, see [here](#)) are true. Boolean expressions, also using parentheses (like `(latex or html)` and `draft`) are supported.

The *format* and the *name* of the current builder (`html`, `latex` or `text`) are always set as a tag¹⁷². To make the distinction between format and name explicit, they are also added with the prefix `format_` and `builder_`, e.g. the epub builder defines the tags `html`, `epub`, `format_html` and `builder_epub`.

These standard tags are set *after* the configuration file is read, so they are not available there.

All tags must follow the standard Python identifier syntax as set out in the [Identifiers and keywords](#)¹⁵⁸ documentation. That is, a tag expression may only consist of tags that conform to the syntax of Python variables. In ASCII, this consists of the uppercase and lowercase letters A through Z, the underscore `_` and, except for the first character, the digits 0 through 9.

Added in version 0.6.

Changed in version 1.2: Added the name of the builder and the prefixes.

Warning: This directive is designed to control only content of document. It could not control sections, labels and so on.

Tables

Use *reStructuredText* tables, i.e. either

- grid table syntax ([ref](#)¹⁵⁹),
- simple table syntax ([ref](#)¹⁶⁰),
- `csv-table`¹⁶¹ syntax,
- or `list-table`¹⁶² syntax.

The `table`¹⁶³ directive serves as optional wrapper of the *grid* and *simple* syntaxes.

They work fine in HTML output, but rendering tables to LaTeX is complex. Check the [latex_table_style](#).

Changed in version 1.6: Merged cells (multi-row, multi-column, both) from grid tables containing complex contents such as multiple paragraphs, blockquotes, lists, literal blocks, will render correctly to LaTeX output.

¹⁷² For most builders name and format are the same. At the moment only builders derived from the html builder distinguish between the builder format and the builder name.

Note that the current builder tag is not available in `conf.py`, it is only available after the builder is initialized.

¹⁵⁸ https://docs.python.org/3/reference/lexical_analysis.html#identifiers

¹⁵⁹ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#grid-tables>

¹⁶⁰ <https://docutils.sourceforge.io/docs/ref/rst/restructuredtext.html#simple-tables>

¹⁶¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#csv-table>

¹⁶² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#list-table>

¹⁶³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table>

.. tabularcolumns:: column spec

This directive influences only the LaTeX output for the next table in source. The mandatory argument is a column specification (known as an “alignment preamble” in LaTeX idiom). Please refer to a LaTeX documentation, such as the [wiki page](#)¹⁶⁴, for basics of such a column specification.

Added in version 0.3.

Note: `tabularcolumns` conflicts with `:widths:` option of table directives. If both are specified, `:widths:` option will be ignored.

Sphinx will render tables with more than 30 rows with `longtable`. Besides the `l`, `r`, `c` and `p{width}` column specifiers, one can also use `\X{a}{b}` (new in version 1.5) which configures the column width to be a fraction a/b of the total line width and `\Y{f}` (new in version 1.6) where f is a decimal: for example `\Y{0.2}` means that the column will occupy 0.2 times the line width.

When this directive is used for a table with at most 30 rows, Sphinx will render it with `tabulary`. One can then use specific column types `L` (left), `R` (right), `C` (centered) and `J` (justified). They have the effect of a `p{width}` (i.e. each cell is a LaTeX `\parbox`) with the specified internal text alignment and an automatically computed width.

Warning:

- Cells that contain list-like elements such as object descriptions, blockquotes or any kind of lists are not compatible with the LRCJ column types. The column type must then be some `p{width}` with an explicit width (or `\X{a}{b}` or `\Y{f}`).
- Literal blocks do not work with `tabulary` at all. Sphinx will fall back to `tabular` or `longtable` environments and generate a suitable column specification.

In absence of the `tabularcolumns` directive, and for a table with at most 30 rows and no problematic cells as described in the above warning, Sphinx uses `tabulary` and the `J` column-type for every column.

Changed in version 1.6: Formerly, the `L` column-type was used (text is flushed-left). To revert to this, include `\newcolumntype{T}{L}` in the LaTeX preamble, as in fact Sphinx uses `T` and sets it by default to be an alias of `J`.

Hint: A frequent issue with `tabulary` is that columns with little contents appear to be “squeezed”. One can add to the LaTeX preamble for example `\setlength{\tymin}{40pt}` to ensure a minimal column width of 40pt, the `tabulary` default of 10pt being too small.

Hint: To force usage of the LaTeX `longtable` environment pass `longtable` as a `:class:` option to `table`¹⁶⁵, `csv-table`¹⁶⁶, or `list-table`¹⁶⁷. Use `rst-class` for other tables.

¹⁶⁴ <https://en.wikibooks.org/wiki/LaTeX/Tables>

¹⁶⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table>

¹⁶⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#csv-table>

¹⁶⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#list-table>

Math

The input language for mathematics is LaTeX markup. This is the de-facto standard for plain-text math notation and has the added advantage that no further translation is necessary when building LaTeX output.

Keep in mind that when you put math markup in **Python docstrings** read by *autodoc*, you either have to double all backslashes, or use Python raw strings (r"raw").

`.. math::`

Directive for displayed math (math that takes the whole line for itself).

The directive supports multiple equations, which should be separated by a blank line:

```
.. math::

(a + b)^2 = a^2 + 2ab + b^2

(a - b)^2 = a^2 - 2ab + b^2
```

In addition, each single equation is set within a `split` environment, which means that you can have multiple aligned lines in an equation, aligned at `&` and separated by `\\`:

```
.. math::

(a + b)^2 &= (a + b)(a + b) \\
          &= a^2 + 2ab + b^2
```

For more details, look into the documentation of the [AmSMath LaTeX package](https://www.amsmath.org/publications/authors/tex/amslatex)¹⁶⁸.

When the math is only one line of text, it can also be given as a directive argument:

```
.. math:: (a + b)^2 = a^2 + 2ab + b^2
```

Normally, equations are not numbered. If you want your equation to get a number, use the `label` option. When given, it selects an internal label for the equation, by which it can be cross-referenced, and causes an equation number to be issued. See [eq](#) for an example. The numbering style depends on the output format.

There is also an option `nowrap` that prevents any wrapping of the given math in a math environment. When you give this option, you must make sure yourself that the math is properly set up. For example:

```
.. math::
:nowrap:

\begin{eqnarray}
y &= & ax^2 + bx + c \\
f(x) &= & x^2 + 2xy + y^2
\end{eqnarray}
```

See also:

Math support for HTML outputs in Sphinx

Rendering options for math with HTML builders.

latex_engine

Explains how to configure LaTeX builder to support Unicode literals in math mark-up.

¹⁶⁸ <https://www.amsmath.org/publications/authors/tex/amslatex>

Grammar production displays

Special markup is available for displaying the productions of a formal grammar. The markup is simple and does not attempt to model all aspects of BNF (or any derived forms), but provides enough to allow context-free grammars to be displayed in a way that causes uses of a symbol to be rendered as hyperlinks to the definition of the symbol. There is this directive:

.. productionlist:: [productionGroup]

This directive is used to enclose a group of productions. Each production is given on a single line and consists of a name, separated by a colon from the following definition. If the definition spans multiple lines, each continuation line must begin with a colon placed at the same column as in the first line. Blank lines are not allowed within `productionlist` directive arguments.

The definition can contain token names which are marked as interpreted text (e.g., “`sum ::= `integer` `+` `integer``”) – this generates cross-references to the productions of these tokens. Outside of the production list, you can reference to token productions using *token*.

The *productionGroup* argument to *productionlist* serves to distinguish different sets of production lists that belong to different grammars. Multiple production lists with the same *productionGroup* thus define rules in the same scope.

Inside of the production list, tokens implicitly refer to productions from the current group. You can refer to the production of another grammar by prefixing the token with its group name and a colon, e.g., “`otherGroup:sum`”. If the group of the token should not be shown in the production, it can be prefixed by a tilde, e.g., “`~otherGroup:sum`”. To refer to a production from an unnamed grammar, the token should be prefixed by a colon, e.g., “`:sum`”.

Outside of the production list, if you have given a *productionGroup* argument you must prefix the token name in the cross-reference with the group name and a colon, e.g., “`myGroup:sum`” instead of just “`sum`”. If the group should not be shown in the title of the link either an explicit title can be given (e.g., “`myTitle <myGroup:sum>`”), or the target can be prefixed with a tilde (e.g., “`~myGroup:sum`”).

Note that no further reST parsing is done in the production, so that you don’t have to escape `*` or `|` characters.

The following is an example taken from the Python Reference Manual:

```
.. productionlist::
try_stmt: try1_stmt | try2_stmt
try1_stmt: "try" ":" `suite`
          : ("except" [`expression` ["," `target`]] ":" `suite`)+
          : ["else" ":" `suite`]
          : ["finally" ":" `suite`]
try2_stmt: "try" ":" `suite`
          : "finally" ":" `suite`
```

Field Lists

As previously discussed, field lists are sequences of fields marked up like this:

```
:fieldname: Field content
```

Sphinx extends standard docutils behavior for field lists and adds some extra functionality that is covered in this section.

Note: The values of field lists will be parsed as strings. You cannot use Python collections such as lists or dictionaries.

File-wide metadata

A field list near the top of a file is normally parsed by docutils as the *docinfo* and shown on the page. However, in Sphinx, a field list preceding any other markup is moved from the *docinfo* to the Sphinx environment as document metadata, and is not displayed in the output.

Note: A field list appearing after the document title *will* be part of the *docinfo* as normal and will be displayed in the output.

Special metadata fields

Sphinx provides custom behavior for bibliographic fields compared to docutils.

At the moment, these metadata fields are recognized:

tocdepth

The maximum depth for a table of contents of this file.

```
:tocdepth: 2
```

Note: This metadata effects to the depth of local toctree. But it does not effect to the depth of *global* toctree. So this would not be change the sidebar of some themes which uses global one.

Added in version 0.4.

nocomments

If set, the web application won't display a comment form for a page generated from this source file.

```
:nocomments:
```

orphan

If set, warnings about this file not being included in any toctree will be suppressed.

```
:orphan:
```

Added in version 1.0.

nosearch

If set, full text search for this file is disabled.

```
:nosearch:
```

Note: object search is still available even if `nosearch` option is set.

Added in version 3.0.

MOVED: Domains

MOVED: Basic Markup

See *Domains*.

MOVED: Python Domain

See *The Python Domain*.

MOVED: C Domain

See *The C Domain*.

MOVED: C++ Domain

See *The C++ Domain*.

MOVED: Standard Domain

See *The Standard Domain*.

MOVED: JavaScript Domain

See *The JavaScript Domain*.

MOVED: reStructuredText Domain

See *The reStructuredText Domain*.

MOVED: Math Domain

See *The Mathematics Domain*.

MOVED: More domains

See *Domains*.

4.2 Markdown

[Markdown](https://daringfireball.net/projects/markdown/)¹⁷³ is a lightweight markup language with a simplistic plain text formatting syntax. It exists in many syntactically different *flavors*. To support Markdown-based documentation, Sphinx can use [MyST-Parser](https://myst-parser.readthedocs.io/en/latest/)¹⁷⁴. MyST-Parser is a Docutils bridge to [markdown-it-py](https://github.com/executablebooks/markdown-it-py)¹⁷⁵, a Python package for parsing the [CommonMark](https://commonmark.org/)¹⁷⁶ Markdown flavor.

¹⁷³ <https://daringfireball.net/projects/markdown/>

¹⁷⁴ <https://myst-parser.readthedocs.io/en/latest/>

¹⁷⁵ <https://github.com/executablebooks/markdown-it-py>

¹⁷⁶ <https://commonmark.org/>

Configuration

To configure your Sphinx project for Markdown support, proceed as follows:

1. Install the Markdown parser *MyST-Parser*:

```
pip install --upgrade myst-parser
```

2. Add `myst_parser` to the *list of configured extensions*:

```
extensions = ['myst_parser']
```

Note: MyST-Parser requires Sphinx 2.1 or newer.

3. If you want to use Markdown files with extensions other than `.md`, adjust the `source_suffix` variable. The following example configures Sphinx to parse all files with the extensions `.md` and `.txt` as Markdown:

```
source_suffix = {
    '.rst': 'restructuredtext',
    '.txt': 'markdown',
    '.md': 'markdown',
}
```

4. You can further configure *MyST-Parser* to allow custom syntax that standard *CommonMark* doesn't support. Read more in the [MyST-Parser documentation](https://myst-parser.readthedocs.io/en/latest/using/syntax-optional.html)¹⁷⁷.

4.3 Cross-referencing syntax

Cross-references are generated by many semantic interpreted text roles. Basically, you only need to write `:role:`target``, and a link will be created to the item named *target* of the type indicated by *role*. The link's text will be the same as *target*.

There are some additional facilities, however, that make cross-referencing roles more versatile:

- You may supply an explicit title and reference target, like in reST direct hyperlinks: `:role:`title <target>`` will refer to *target*, but the link text will be *title*.
- If you prefix the content with `!`, no reference/hyperlink will be created.
- If you prefix the content with `~`, the link text will only be the last component of the target. For example, `:py:meth:`~Queue.Queue.get`` will refer to `Queue.Queue.get` but only display `get` as the link text. This does not work with all cross-reference roles, but is domain specific.

In HTML output, the link's `title` attribute (that is e.g. shown as a tool-tip on mouse-hover) will always be the full target name.

¹⁷⁷ <https://myst-parser.readthedocs.io/en/latest/using/syntax-optional.html>

Cross-referencing anything

:any:

Added in version 1.3.

This convenience role tries to do its best to find a valid target for its reference text.

- First, it tries standard cross-reference targets that would be referenced by *doc*, *ref* or *option*.

Custom objects added to the standard domain by extensions (see *Sphinx.add_object_type()*) are also searched.

- Then, it looks for objects (targets) in all loaded domains. It is up to the domains how specific a match must be. For example, in the Python domain a reference of `:any:`Builder`` would match the `sphinx.builders.Builder` class.

If none or multiple targets are found, a warning will be emitted. In the case of multiple targets, you can change “any” to a specific role.

This role is a good candidate for setting *default_role*. If you do, you can write cross-references without a lot of markup overhead. For example, in this Python function documentation:

```
.. function:: install()
```

```
    This function installs a `handler` for every signal known by the  
    `signal` module. See the section `about-signals` for more information.
```

there could be references to a glossary term (usually `:term:`handler``), a Python module (usually `:py:mod:`signal`` or `:mod:`signal``) and a section (usually `:ref:`about-signals``).

The *any* role also works together with the *intersphinx* extension: when no local cross-reference is found, all object types of intersphinx inventories are also searched.

Cross-referencing objects

These roles are described with their respective domains:

- *Python*
- *C*
- *C++*
- *JavaScript*
- *ReST*

Cross-referencing arbitrary locations

:ref:

To support cross-referencing to arbitrary locations in any document, the standard reST labels are used. For this to work label names must be unique throughout the entire documentation. There are two ways in which you can refer to labels:

- If you place a label directly before a section title, you can reference to it with `:ref:`label-name``. For example:

```

.. _my-reference-label:

Section to cross-reference
-----

This is the text of the section.

It refers to the section itself, see :ref:`my-reference-label`.

```

The `:ref:` role would then generate a link to the section, with the link title being “Section to cross-reference”. This works just as well when section and reference are in different source files.

Automatic labels also work with figures. For example:

```

.. _my-figure:

.. figure:: whatever

   Figure caption

```

In this case, a reference `:ref:`my-figure`` would insert a reference to the figure with link text “Figure caption”.

The same works for tables that are given an explicit caption using the `table178` directive.

- Labels that aren’t placed before a section title can still be referenced, but you must give the link an explicit title, using this syntax: `:ref:`Link title <label-name>``.

Note: Reference labels must start with an underscore. When referencing a label, the underscore must be omitted (see examples above).

Using `ref` is advised over standard reStructuredText links to sections (like ``Section title`_`) because it works across files, when section headings are changed, will raise warnings if incorrect, and works for all builders that support cross-references.

Cross-referencing documents

Added in version 0.6.

There is also a way to directly link to documents:

:doc:

Link to the specified document; the document name can be specified in absolute or relative fashion. For example, if the reference `:doc:`parrot`` occurs in the document `sketches/index`, then the link refers to `sketches/parrot`. If the reference is `:doc:`/people`` or `:doc:`../people``, the link refers to `people`.

If no explicit link text is given (like usual: `:doc:`Monty Python members </people>``), the link caption will be the title of the given document.

¹⁷⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table>

Referencing downloadable files

Added in version 0.6.

:download:

This role lets you link to files within your source tree that are not reST documents that can be viewed, but files that can be downloaded.

When you use this role, the referenced file is automatically marked for inclusion in the output when building (obviously, for HTML output only). All downloadable files are put into a `_downloads/<unique hash>/` sub-directory of the output directory; duplicate filenames are handled.

An example:

```
See :download:`this example script <../example.py>`.
```

The given filename is usually relative to the directory the current source file is contained in, but if it absolute (starting with `/`), it is taken as relative to the top source directory.

The `example.py` file will be copied to the output directory, and a suitable link generated to it.

Not to show unavailable download links, you should wrap whole paragraphs that have this role:

```
.. only:: builder_html

    See :download:`this example script <../example.py>`.
```

Cross-referencing figures by figure number

Added in version 1.3.

Changed in version 1.5: `numref` role can also refer sections. And `numref` allows `{name}` for the link text.

:numref:

Link to the specified figures, tables, code-blocks and sections; the standard reST labels are used. When you use this role, it will insert a reference to the figure with link text by its figure number like “Fig. 1.1”.

If an explicit link text is given (as usual: `:numref:`Image of Sphinx (Fig. %s) <my-figure>``), the link caption will serve as title of the reference. As placeholders, `%s` and `{number}` get replaced by the figure number and `{name}` by the figure caption. If no explicit link text is given, the `numfig_format` setting is used as fall-back default.

If `numfig` is `False`, figures are not numbered, so this role inserts not a reference but the label or the link text.

Cross-referencing other items of interest

The following roles do possibly create a cross-reference, but do not refer to objects:

:envvar:

An environment variable. Index entries are generated. Also generates a link to the matching `envvar` directive, if it exists.

:token:

The name of a grammar token (used to create links between `productionlist` directives).

:keyword:

The name of a keyword in Python. This creates a link to a reference label with that name, if it exists.

:option:

A command-line option to an executable program. This generates a link to a *option* directive, if it exists.

The following role creates a cross-reference to a term in a *glossary*:

:term:

Reference to a term in a glossary. A glossary is created using the `glossary` directive containing a definition list with terms and definitions. It does not have to be in the same file as the `term` markup, for example the Python docs have one global glossary in the `glossary.rst` file.

If you use a term that's not explained in a glossary, you'll get a warning during build.

4.4 Configuration

The *configuration directory* must contain a file named `conf.py`. This file (containing Python code) is called the “build configuration file” and contains (almost) all configuration needed to customize Sphinx input and output behavior.

An optional file `docutils.conf`¹⁷⁹ can be added to the configuration directory to adjust `Docutils`¹⁸⁰ configuration if not otherwise overridden or set by Sphinx.

The configuration file is executed as Python code at build time (using `importlib.import_module()`¹⁸¹, and with the current directory set to its containing directory), and therefore can execute arbitrarily complex code. Sphinx then reads simple names from the file's namespace as its configuration.

Important points to note:

- If not otherwise documented, values must be strings, and their default is the empty string.
- The term “fully-qualified name” refers to a string that names an importable Python object inside a module; for example, the FQN “`sphinx.builders.Builder`” means the `Builder` class in the `sphinx.builders` module.
- Remember that document names use `/` as the path separator and don't contain the file name extension.
- Since `conf.py` is read as a Python file, the usual rules apply for encodings and Unicode support.
- The contents of the config namespace are pickled (so that Sphinx can find out when configuration changes), so it may not contain unpickleable values – delete them from the namespace with `del` if appropriate. Modules are removed automatically, so you don't need to `del` your imports after use.
- There is a special object named `tags` available in the config file. It can be used to query and change the tags (see *Including content based on tags*). Use `tags.has('tag')` to query, `tags.add('tag')` and `tags.remove('tag')` to change. Only tags set via the `-t` command-line option or via `tags.add('tag')` can be queried using `tags.has('tag')`. Note that the current builder tag is not available in `conf.py`, as it is created *after* the builder is initialized.

¹⁷⁹ <https://docutils.sourceforge.io/docs/user/config.html>

¹⁸⁰ <https://docutils.sourceforge.io/>

¹⁸¹ https://docs.python.org/3/library/importlib.html#importlib.import_module

Project information

project

The documented project's name.

author

The author name(s) of the document. The default value is 'unknown'.

copyright

A copyright statement in the style '2008, Author Name'.

Changed in version 7.1: The value may now be a sequence of copyright statements in the above form, which will be displayed each to their own line.

project_copyright

An alias of *copyright*.

Added in version 3.5.

version

The major project version, used as the replacement for `|version|`. For example, for the Python documentation, this may be something like 2.6.

release

The full project version, used as the replacement for `|release|` and e.g. in the HTML templates. For example, for the Python documentation, this may be something like 2.6.0rc1.

If you don't need the separation provided between *version* and *release*, just set them both to the same value.

General configuration

extensions

A list of strings that are module names of *extensions*. These can be extensions coming with Sphinx (named `sphinx.ext.*`) or custom ones.

Note that you can extend `sys.path`¹⁸² within the conf file if your extensions live in another directory – but make sure you use absolute paths. If your extension path is relative to the *configuration directory*, use `os.path.abspath()`¹⁸³ like so:

```
import sys, os

sys.path.append(os.path.abspath('sphinxext'))

extensions = ['extname']
```

That way, you can load an extension called `extname` from the subdirectory `sphinxext`.

The configuration file itself can be an extension; for that, you only need to provide a `setup()` function in it.

source_suffix

The file extensions of source files. Sphinx considers the files with this suffix as sources. The value can be a dictionary mapping file extensions to file types. For example:

¹⁸² <https://docs.python.org/3/library/sys.html#sys.path>

¹⁸³ <https://docs.python.org/3/library/os.path.html#os.path.abspath>

```
source_suffix = {
    '.rst': 'restructuredtext',
    '.txt': 'restructuredtext',
    '.md': 'markdown',
}
```

By default, Sphinx only supports 'restructuredtext' file type. You can add a new file type using source parser extensions. Please read a document of the extension to know which file type the extension supports.

The value may also be a list of file extensions: then Sphinx will consider that they all map to the 'restructuredtext' file type.

Default is {' .rst': 'restructuredtext'}.

Note: file extensions have to start with a dot (e.g. .rst).

Changed in version 1.3: Can now be a list of extensions.

Changed in version 1.8: Support file type mapping

source_encoding

The encoding of all reST source files. The recommended encoding, and the default value, is 'utf-8-sig'.

Added in version 0.5: Previously, Sphinx accepted only UTF-8 encoded sources.

source_parsers

If given, a dictionary of parser classes for different source suffixes. The keys are the suffix, the values can be either a class or a string giving a fully-qualified name of a parser class. The parser class can be either `docutils.parsers.Parser` or `sphinx.parsers.Parser`. Files with a suffix that is not in the dictionary will be parsed with the default reStructuredText parser.

For example:

```
source_parsers = {' .md': 'recommonmark.parser.CommonMarkParser'}
```

Note: Refer to *Markdown* for more information on using Markdown with Sphinx.

Added in version 1.3.

Deprecated since version 1.8: Now Sphinx provides an API `Sphinx.add_source_parser()` to register a source parser. Please use it instead.

master_doc

Same as `root_doc`.

Changed in version 4.0: Renamed master_doc to root_doc.

root_doc

The document name of the “root” document, that is, the document that contains the root `toctree` directive. Default is 'index'.

Changed in version 2.0: The default is changed to 'index' from 'contents'.

Changed in version 4.0: Renamed root_doc from master_doc.

exclude_patterns

A list of glob-style patterns¹ that should be excluded when looking for source files. They are matched against the source file names relative to the source directory, using slashes as directory separators on all platforms.

Example patterns:

- 'library/xml.rst' – ignores the library/xml.rst file
- 'library/xml' – ignores the library/xml directory
- 'library/xml*' – ignores all files and directories starting with library/xml
- '**/.svn' – ignores all .svn directories

`exclude_patterns` is also consulted when looking for static files in `html_static_path` and `html_extra_path`.

Added in version 1.0.

include_patterns

A list of glob-style patterns^{Page 76, 1} that are used to find source files. They are matched against the source file names relative to the source directory, using slashes as directory separators on all platforms. The default is `**`, meaning that all files are recursively included from the source directory. `exclude_patterns` has priority over `include_patterns`.

Example patterns:

- `**` – all files in the source directory and subdirectories, recursively
- 'library/xml' – just the library/xml directory
- 'library/xml*' – all files and directories starting with library/xml
- `**/doc` – all doc directories (this might be useful if documentation is co-located with source files)

Added in version 5.1.

templates_path

A list of paths that contain extra templates (or templates that overwrite builtin/theme-specific templates). Relative paths are taken as relative to the configuration directory.

Changed in version 1.3: As these files are not meant to be built, they are automatically added to `exclude_patterns`.

template_bridge

A string with the fully-qualified name of a callable (or simply a class) that returns an instance of `TemplateBridge`. This instance is then used to render HTML documents, and possibly the output of other builders (currently the changes builder). (Note that the template bridge must be made theme-aware if HTML themes are to be used.)

rst_epilog

A string of reStructuredText that will be included at the end of every source file that is read. This is a possible place to add substitutions that should be available in every file (another being `rst_prolog`). An example:

```
rst_epilog = """
.. |psf| replace:: Python Software Foundation
"""
```

Added in version 0.6.

¹ A note on available globbing syntax: you can use the standard shell constructs `*`, `?`, `[...]` and `[!...]` with the feature that these all don't match slashes. A double star `**` can be used to match any sequence of characters *including* slashes.

rst_prolog

A string of reStructuredText that will be included at the beginning of every source file that is read. This is a possible place to add substitutions that should be available in every file (another being *rst_epilog*). An example:

```
rst_prolog = """
.. |psf| replace:: Python Software Foundation
"""
```

Added in version 1.0.

primary_domain

The name of the default *domain*. Can also be `None` to disable a default domain. The default is `'py'`. Those objects in other domains (whether the domain name is given explicitly, or selected by a *default-domain* directive) will have the domain name explicitly prepended when named (e.g., when the default domain is `C`, Python functions will be named “Python function”, not just “function”).

Added in version 1.0.

default_role

The name of a reST role (builtin or Sphinx extension) to use as the default role, that is, for text marked up ``like this``. This can be set to `'py:obj'` to make ``filter`` a cross-reference to the Python function “filter”. The default is `None`, which doesn’t reassign the default role.

The default role can always be set within individual documents using the standard reST *default-role*¹⁸⁴ directive.

Added in version 0.4.

keep_warnings

If true, keep warnings as “system message” paragraphs in the built documents. Regardless of this setting, warnings are always written to the standard error stream when `sphinx-build` is run.

The default is `False`, the pre-0.5 behavior was to always keep them.

Added in version 0.5.

show_warning_types

If `True`, the type of each warning is added as a suffix to the warning message, e.g., `WARNING: [...] [index]` or `WARNING: [...] [toc.circular]`. The default is `False`.

Added in version 7.3.0.

suppress_warnings

A list of warning types to suppress arbitrary warning messages.

Sphinx core supports following warning types:

- `app.add_node`
- `app.add_directive`
- `app.add_role`
- `app.add_generic_role`
- `app.add_source_parser`
- `config.cache`
- `download.not_readable`

¹⁸⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#default-role>

- `epub.unknown_project_files`
- `epub.duplicated_toc_entry`
- `i18n.inconsistent_references`
- `index`
- `image.not_readable`
- `ref.term`
- `ref.ref`
- `ref.numref`
- `ref.keyword`
- `ref.option`
- `ref.citation`
- `ref.footnote`
- `ref.doc`
- `ref.python`
- `misc.highlighting_failure`
- `toc.circular`
- `toc.excluded`
- `toc.not_readable`
- `toc.secnum`

Extensions can also define their own warning types. Those defined by the first-party `sphinx.ext` extensions are:

- `autodoc`
- `autodoc.import_object`
- `autosectionlabel.<document name>`
- `autosummary`
- `intersphinx.external`

You can choose from these types. You can also give only the first component to exclude all warnings attached to it.

Added in version 1.4.

Changed in version 1.5: Added `misc.highlighting_failure`

Changed in version 1.5.1: Added `epub.unknown_project_files`

Changed in version 1.6: Added `ref.footnote`

Changed in version 2.1: Added `autosectionlabel.<document name>`

Changed in version 3.3.0: Added `epub.duplicated_toc_entry`

Changed in version 4.3: Added `toc.excluded` and `toc.not_readable`

Added in version 4.5: Added `i18n.inconsistent_references`

Added in version 7.1: Added `index` warning type.

Added in version 7.3: Added `config.cache` warning type.

needs_sphinx

If set to a `major.minor` version string like `'1.1'`, Sphinx will compare it with its version and refuse to build if it is too old. Default is no requirement.

Added in version 1.0.

Changed in version 1.4: also accepts micro version string

needs_extensions

This value can be a dictionary specifying version requirements for extensions in [extensions](#), e.g. `needs_extensions = {'sphinxcontrib.something': '1.5'}`. The version strings should be in the form `major.minor`. Requirements do not have to be specified for all extensions, only for those you want to check.

This requires that the extension specifies its version to Sphinx (see [Sphinx Extensions API](#) for how to do that).

Added in version 1.3.

manpages_url

A URL to cross-reference [manpage](#) roles. If this is defined to `https://manpages.debian.org/{path}`, the `:manpage: `man(1)`` role will link to `<https://manpages.debian.org/man(1)>`. The patterns available are:

- `page` - the manual page (`man`)
- `section` - the manual section (`1`)
- `path` - the original manual page and section specified (`man(1)`)

This also supports manpages specified as `man.1`.

Note: This currently affects only HTML writers but could be expanded in the future.

Added in version 1.7.

nitpicky

If true, Sphinx will warn about *all* references where the target cannot be found. Default is `False`. You can activate this mode temporarily using the `-n` command-line switch.

Added in version 1.0.

nitpick_ignore

A set or list of `(type, target)` tuples (by default empty) that should be ignored when generating warnings in “nitpicky mode”. Note that `type` should include the domain name if present. Example entries would be `('py:func', 'int')` or `('envvar', 'LD_LIBRARY_PATH')`.

Added in version 1.1.

Changed in version 6.2: Changed allowable container types to a set, list, or tuple

nitpick_ignore_regex

An extended version of [nitpick_ignore](#), which instead interprets the `type` and `target` strings as regular expressions. Note, that the regular expression must match the whole string (as if the `^` and `$` markers were inserted).

For example, `(r'py:.*', r'foo.*bar\.B.*')` will ignore nitpicky warnings for all python entities that start with `'foo'` and have `'bar.B'` in them, such as `('py:const', 'foo_package.bar.BAZ_VALUE')` or `('py:class', 'food.bar.Barman')`.

Added in version 4.1.

Changed in version 6.2: Changed allowable container types to a set, list, or tuple

numfig

If true, figures, tables and code-blocks are automatically numbered if they have a caption. The *numref* role is enabled. Obeyed so far only by HTML and LaTeX builders. Default is False.

Note: The LaTeX builder always assigns numbers whether this option is enabled or not.

Added in version 1.3.

numfig_format

A dictionary mapping 'figure', 'table', 'code-block' and 'section' to strings that are used for format of figure numbers. As a special character, %s will be replaced to figure number.

Default is to use 'Fig. %s' for 'figure', 'Table %s' for 'table', 'Listing %s' for 'code-block' and 'Section %s' for 'section'.

Added in version 1.3.

numfig_secnum_depth

- if set to 0, figures, tables and code-blocks are continuously numbered starting at 1.
- if 1 (default) numbers will be x.1, x.2, ... with x the section number (top level sectioning; no x. if no section). This naturally applies only if section numbering has been activated via the :numbered: option of the *toctree* directive.
- 2 means that numbers will be x.y.1, x.y.2, ... if located in a sub-section (but still x.1, x.2, ... if located directly under a section and 1, 2, ... if not in any top level section.)
- etc...

Added in version 1.3.

Changed in version 1.7: The LaTeX builder obeys this setting (if *numfig* is set to True).

smartquotes

If true, the *Docutils Smart Quotes transform*¹⁸⁵, originally based on *SmartyPants*¹⁸⁶ (limited to English) and currently applying to many languages, will be used to convert quotes and dashes to typographically correct entities. Default: True.

Added in version 1.6.6: It replaces deprecated *html_use_smartypants*. It applies by default to all builders except *man* and *text* (see *smartquotes_excludes*.)

A *docutils.conf*¹⁸⁷ file located in the configuration directory (or a global *~/.docutils* file) is obeyed unconditionally if it *deactivates* smart quotes via the corresponding *Docutils option*¹⁸⁸. But if it *activates* them, then *smartquotes* does prevail.

smartquotes_action

This string customizes the Smart Quotes transform. See the file *smartquotes.py* at the *Docutils repository*¹⁸⁹ for details. The default 'qDe' educates normal quote characters ", ', em- and en-Dashes ---, --, and ellipses ...

Added in version 1.6.6.

¹⁸⁵ <https://docutils.sourceforge.io/docs/user/smartquotes.html>

¹⁸⁶ <https://daringfireball.net/projects/smarty-pants/>

¹⁸⁷ <https://docutils.sourceforge.io/docs/user/config.html>

¹⁸⁸ <https://docutils.sourceforge.io/docs/user/config.html#smart-quotes>

¹⁸⁹ <https://sourceforge.net/p/docutils/code/HEAD/tree/trunk/docutils/>

smartquotes_excludes

This is a dict whose default is:

```
{'languages': ['ja'], 'builders': ['man', 'text']}
```

Each entry gives a sufficient condition to ignore the `smartquotes` setting and deactivate the Smart Quotes transform. Accepted keys are as above 'builders' or 'languages'. The values are lists.

Note: Currently, in case of invocation of `make` with multiple targets, the first target name is the only one which is tested against the 'builders' entry and it decides for all. Also, a `make text` following `make html` needs to be issued in the form `make text O="-E"` to force re-parsing of source files, as the cached ones are already transformed. On the other hand the issue does not arise with direct usage of `sphinx-build` as it caches (in its default usage) the parsed source files in per builder locations.

Hint: An alternative way to effectively deactivate (or customize) the smart quotes for a given builder, for example `latex`, is to use `make` this way:

```
make latex O="-D smartquotes_action="
```

This can follow some `make html` with no problem, in contrast to the situation from the prior note.

Added in version 1.6.6.

user_agent

A User-Agent of Sphinx. It is used for a header on HTTP access (ex. linkcheck, intersphinx and so on). Default is "Sphinx/X.Y.Z requests/X.Y.Z python/X.Y.Z".

Added in version 2.3.

tls_verify

If true, Sphinx verifies server certifications. Default is `True`.

Added in version 1.5.

tls_cacerts

A path to a certification file of CA or a path to directory which contains the certificates. This also allows a dictionary mapping hostname to the path to certificate file. The certificates are used to verify server certifications.

Added in version 1.5.

Tip: Sphinx uses `requests`¹⁹⁰ as a HTTP library internally. Therefore, Sphinx refers a certification file on the directory pointed `REQUESTS_CA_BUNDLE` environment variable if `tls_cacerts` not set.

today**today_fmt**

These values determine how to format the current date, used as the replacement for `|today|`.

- If you set `today` to a non-empty value, it is used.
- Otherwise, the current time is formatted using `time.strftime()`¹⁹¹ and the format given in `today_fmt`.

The default is now `today` and a `today_fmt` of `'%b %d, %Y'` (or, if translation is enabled with `language`, an equivalent format for the selected locale).

¹⁹⁰ <https://requests.readthedocs.io/en/master/>

highlight_language

The default language to highlight source code in. The default is 'default'. It is similar to 'python3'; it is mostly a superset of 'python' but it fallbacks to 'none' without warning if failed. 'python3' and other languages will emit warning if failed.

The value should be a valid Pygments lexer name, see *Showing code examples* for more details.

Added in version 0.5.

Changed in version 1.4: The default is now 'default'. If you prefer Python 2 only highlighting, you can set it back to 'python'.

highlight_options

A dictionary that maps language names to options for the lexer modules of Pygments. These are lexer-specific; for the options understood by each, see the [Pygments documentation](#)¹⁹².

Example:

```
highlight_options = {
    'default': {'stripall': True},
    'php': {'startinline': True},
}
```

A single dictionary of options are also allowed. Then it is recognized as options to the lexer specified by *highlight_language*:

```
# configuration for the ``highlight_language``
highlight_options = {'stripall': True}
```

Added in version 1.3.

Changed in version 3.5: Allow to configure highlight options for multiple languages

pygments_style

The style name to use for Pygments highlighting of source code. If not set, either the theme's default style or 'sphinx' is selected for HTML output.

Changed in version 0.3: If the value is a fully-qualified name of a custom Pygments style class, this is then used as custom style.

maximum_signature_line_length

If a signature's length in characters exceeds the number set, each parameter within the signature will be displayed on an individual logical line.

When None (the default), there is no maximum length and the entire signature will be displayed on a single logical line.

A 'logical line' is similar to a hard line break—builders or themes may choose to 'soft wrap' a single logical line, and this setting does not affect that behaviour.

Domains may provide options to suppress any hard wrapping on an individual object directive, such as seen in the C, C++, and Python domains (e.g. *py:function:single-line-parameter-list*).

Added in version 7.1.

add_function_parentheses

A boolean that decides whether parentheses are appended to function and method role text (e.g. the content of `:func:`input``) to signify that the name is callable. Default is True.

¹⁹¹ <https://docs.python.org/3/library/time.html#time.strftime>

¹⁹² <https://pygments.org/docs/lexers>

add_module_names

A boolean that decides whether module names are prepended to all *object* names (for object types where a “module” of some kind is defined), e.g. for *py:function* directives. Default is True.

toc_object_entries

Create table of contents entries for domain objects (e.g. functions, classes, attributes, etc.). Default is True.

toc_object_entries_show_parents

A string that determines how domain objects (e.g. functions, classes, attributes, etc.) are displayed in their table of contents entry.

Use *domain* to allow the domain to determine the appropriate number of parents to show. For example, the Python domain would show `Class.method()` and `function()`, leaving out the `module.` level of parents. This is the default setting.

Use *hide* to only show the name of the element without any parents (i.e. `method()`).

Use *all* to show the fully-qualified name for the object (i.e. `module.Class.method()`), displaying all parents.

Added in version 5.2.

show_authors

A boolean that decides whether *codeauthor* and *sectionauthor* directives produce any output in the built files.

modindex_common_prefix

A list of prefixes that are ignored for sorting the Python module index (e.g., if this is set to `['foo. ']`, then `foo.bar` is shown under B, not F). This can be handy if you document a project that consists of a single package. Works only for the HTML builder currently. Default is `[]`.

Added in version 0.6.

trim_footnote_reference_space

Trim spaces before footnote references that are necessary for the reST parser to recognize the footnote, but do not look too nice in the output.

Added in version 0.6.

trim_doctest_flags

If true, doctest flags (comments looking like `# doctest: FLAG, ...`) at the ends of lines and `<BLANKLINE>` markers are removed for all code blocks showing interactive Python sessions (i.e. doctests). Default is True. See the extension *doctest* for more possibilities of including doctests.

Added in version 1.0.

Changed in version 1.1: Now also removes `<BLANKLINE>`.

strip_signature_backslash

Default is False. When backslash stripping is enabled then every occurrence of `\\` in a domain directive will be changed to `\`, even within string literals. This was the behaviour before version 3.0, and setting this variable to True will reinstate that behaviour.

Added in version 3.0.

option_emphasise_placeholders

Default is False. When enabled, emphasise placeholders in *option* directives. To display literal braces, escape with a backslash (`\{`). For example, `option_emphasise_placeholders=True` and `.. option:: -foption={TYPE}` would render with TYPE emphasised.

Added in version 5.1.

Options for internationalization

These options influence Sphinx's *Native Language Support*. See the documentation on [Internationalization](#) for details.

language

The code for the language the docs are written in. Any text automatically generated by Sphinx will be in that language. Also, Sphinx will try to substitute individual paragraphs from your documents with the translation sets obtained from [locale_dirs](#). Sphinx will search language-specific figures named by [figure_language_filename](#) (e.g. the German version of `myfigure.png` will be `myfigure.de.png` by default setting) and substitute them for original figures. In the LaTeX builder, a suitable language will be selected as an option for the *Babel* package. Default is `'en'`.

Added in version 0.5.

Changed in version 1.4: Support figure substitution

Changed in version 5.0.

Currently supported languages by Sphinx are:

- `ar` – Arabic
- `bg` – Bulgarian
- `bn` – Bengali
- `ca` – Catalan
- `cak` – Kaqchikel
- `cs` – Czech
- `cy` – Welsh
- `da` – Danish
- `de` – German
- `el` – Greek
- `en` – English (default)
- `eo` – Esperanto
- `es` – Spanish
- `et` – Estonian
- `eu` – Basque
- `fa` – Iranian
- `fi` – Finnish
- `fr` – French
- `he` – Hebrew
- `hi` – Hindi
- `hi_IN` – Hindi (India)
- `hr` – Croatian
- `hu` – Hungarian
- `id` – Indonesian

- `it` – Italian
- `ja` – Japanese
- `ko` – Korean
- `lt` – Lithuanian
- `lv` – Latvian
- `mk` – Macedonian
- `nb_NO` – Norwegian Bokmal
- `ne` – Nepali
- `nl` – Dutch
- `pl` – Polish
- `pt` – Portuguese
- `pt_BR` – Brazilian Portuguese
- `pt_PT` – European Portuguese
- `ro` – Romanian
- `ru` – Russian
- `si` – Sinhala
- `sk` – Slovak
- `sl` – Slovenian
- `sq` – Albanian
- `sr` – Serbian
- `sr@latin` – Serbian (Latin)
- `sr_RS` – Serbian (Cyrillic)
- `sv` – Swedish
- `ta` – Tamil
- `te` – Telugu
- `tr` – Turkish
- `uk_UA` – Ukrainian
- `ur` – Urdu
- `vi` – Vietnamese
- `zh_CN` – Simplified Chinese
- `zh_TW` – Traditional Chinese

locale_dirs

Added in version 0.5.

Directories in which to search for additional message catalogs (see [language](#)), relative to the source directory. The directories on this path are searched by the standard `gettext`¹⁹³ module.

Internal messages are fetched from a text domain of `sphinx`; so if you add the directory `./locale` to this setting, the message catalogs (compiled from `.po` format using `msgfmt`) must be in `./locale/language/LC_MESSAGES/sphinx.mo`. The text domain of individual documents depends on `gettext_compact`.

The default is `['locales']`.

Note: The `-v` option for `sphinx-build` command is useful to check the `locale_dirs` config works as expected. It emits debug messages if message catalog directory not found.

Changed in version 1.5: Use `locales` directory as a default value

gettext_allow_fuzzy_translations

If true, “fuzzy” messages in the message catalogs are used for translation. The default is `False`.

Added in version 4.3.

gettext_compact

Added in version 1.1.

If true, a document’s text domain is its docname if it is a top-level project file and its very base directory otherwise.

If set to string, all document’s text domain is this string, making all documents use single text domain.

By default, the document `markup/code.rst` ends up in the `markup` text domain. With this option set to `False`, it is `markup/code`.

Changed in version 3.3: The string value is now accepted.

gettext_uuid

If true, Sphinx generates uuid information for version tracking in message catalogs. It is used for:

- Add uid line for each msgids in `.pot` files.
- Calculate similarity between new msgids and previously saved old msgids. This calculation takes a long time.

If you want to accelerate the calculation, you can use `python-levenshtein` 3rd-party package written in C by using `pip install python-levenshtein`.

The default is `False`.

Added in version 1.3.

gettext_location

If true, Sphinx generates location information for messages in message catalogs.

The default is `True`.

Added in version 1.3.

gettext_auto_build

If true, Sphinx builds `mo` file for each translation catalog files.

The default is `True`.

Added in version 1.3.

gettext_additional_targets

To specify names to enable `gettext` extracting and translation applying for i18n additionally. You can specify below names:

¹⁹³ <https://docs.python.org/3/library/gettext.html#module-gettext>

Index

index terms

Literal-block

literal blocks (`::` annotation and `code-block` directive)

Doctest-block

doctest block

Raw

raw content

Image

image/figure uri

For example: `gettext_additional_targets = ['literal-block', 'image']`.

The default is `[]`.

Added in version 1.3.

Changed in version 4.0: The alt text for image is translated by default.

figure_language_filename

The filename format for language-specific figures. The default value is `{root}.{language}{ext}`. It will be expanded to `dirname/filename.en.png` from `.. image:: dirname/filename.png`. The available format tokens are:

- `{root}` - the filename, including any path component, without the file extension, e.g. `dirname/filename`
- `{path}` - the directory path component of the filename, with a trailing slash if non-empty, e.g. `dirname/`
- `{docpath}` - the directory path component for the current document, with a trailing slash if non-empty.
- `{basename}` - the filename without the directory path or file extension components, e.g. `filename`
- `{ext}` - the file extension, e.g. `.png`
- `{language}` - the translation language, e.g. `en`

For example, setting this to `{path}{language}/{basename}{ext}` will expand to `dirname/en/filename.png` instead.

Added in version 1.4.

Changed in version 1.5: Added `{path}` and `{basename}` tokens.

Changed in version 3.2: Added `{docpath}` token.

translation_progress_classes

Control which, if any, classes are added to indicate translation progress. This setting would likely only be used by translators of documentation, in order to quickly indicate translated and untranslated content.

- `True`: add `translated` and `untranslated` classes to all nodes with translatable content.
- `translated`: only add the `translated` class.
- `untranslated`: only add the `untranslated` class.
- `False`: do not add any classes to indicate translation progress.

Defaults to `False`.

Added in version 7.1.

Options for Math

These options influence Math notations.

math_number_all

Set this option to True if you want all displayed math to be numbered. The default is False.

math_eqref_format

A string used for formatting the labels of references to equations. The {number} place-holder stands for the equation number.

Example: 'Eq. {number}' gets rendered as, for example, Eq. 10.

math_numfig

If True, displayed math equations are numbered across pages when [numfig](#) is enabled. The [numfig_secnum_depth](#) setting is respected. The [eq](#), not [numref](#), role must be used to reference equation numbers. Default is True.

Added in version 1.7.

Options for HTML output

These options influence HTML as well as HTML Help output, and other builders that use Sphinx’s HTMLWriter class.

html_theme

The “theme” that the HTML output should use. See the [section about theming](#). The default is 'alabaster'.

Added in version 0.6.

html_theme_options

A dictionary of options that influence the look and feel of the selected theme. These are theme-specific. For the options understood by the builtin themes, see [this section](#).

Added in version 0.6.

html_theme_path

A list of paths that contain custom themes, either as subdirectories or as zip files. Relative paths are taken as relative to the configuration directory.

Added in version 0.6.

html_style

The style sheet to use for HTML pages. A file of that name must exist either in Sphinx’s `static/` path, or in one of the custom paths given in [html_static_path](#). Default is the stylesheet given by the selected theme. If you only want to add or override a few things compared to the theme’s stylesheet, use CSS `@import` to import the theme’s stylesheet.

html_title

The “title” for HTML documentation generated with Sphinx’s own templates. This is appended to the `<title>` tag of individual pages, and used in the navigation bar as the “topmost” element. It defaults to '`<project> v<revision> documentation`'.

html_short_title

A shorter “title” for the HTML docs. This is used for links in the header and in the HTML Help docs. If not given, it defaults to the value of [html_title](#).

Added in version 0.4.

html_baseurl

The base URL which points to the root of the HTML documentation. It is used to indicate the location of document using [The Canonical Link Relation](#)¹⁹⁴. Default: `''`.

Added in version 1.8.

html_codeblock_linenos_style

The style of line numbers for code-blocks.

- `'table'` – display line numbers using `<table>` tag
- `'inline'` – display line numbers using `` tag (default)

Added in version 3.2.

Changed in version 4.0: It defaults to `'inline'`.

Deprecated since version 4.0.

html_context

A dictionary of values to pass into the template engine's context for all pages. Single values can also be put in this dictionary using the `-A` command-line option of `sphinx-build`.

Added in version 0.5.

html_logo

If given, this must be the name of an image file (path relative to the *configuration directory*) that is the logo of the docs, or URL that points an image file for the logo. It is placed at the top of the sidebar; its width should therefore not exceed 200 pixels. Default: `None`.

Added in version 0.4.1: The image file will be copied to the `_static` directory of the output HTML, but only if the file does not already exist there.

Changed in version 4.0: Also accepts the URL for the logo file.

html_favicon

If given, this must be the name of an image file (path relative to the *configuration directory*) that is the favicon of the docs, or URL that points an image file for the favicon. Modern browsers use this as the icon for tabs, windows and bookmarks. It should be a Windows-style icon file (`.ico`), which is 16x16 or 32x32 pixels large. Default: `None`.

Added in version 0.4: The image file will be copied to the `_static` directory of the output HTML, but only if the file does not already exist there.

Changed in version 4.0: Also accepts the URL for the favicon.

html_css_files

A list of CSS files. The entry must be a *filename* string or a tuple containing the *filename* string and the *attributes* dictionary. The *filename* must be relative to the *html_static_path*, or a full URI with scheme like `https://example.org/style.css`. The *attributes* is used for attributes of `<link>` tag. It defaults to an empty list.

Example:

```
html_css_files = ['custom.css',
                  'https://example.com/css/custom.css',
                  ('print.css', {'media': 'print'})]
```

As a special attribute, *priority* can be set as an integer to load the CSS file at an earlier or lazier step. For more information, refer [Sphinx.add_css_file\(\)](#).

¹⁹⁴ <https://datatracker.ietf.org/doc/html/rfc6596>

Added in version 1.8.

Changed in version 3.5: Support priority attribute

html_js_files

A list of JavaScript *filename*. The entry must be a *filename* string or a tuple containing the *filename* string and the *attributes* dictionary. The *filename* must be relative to the [html_static_path](#), or a full URI with scheme like `https://example.org/script.js`. The *attributes* is used for attributes of `<script>` tag. It defaults to an empty list.

Example:

```
html_js_files = ['script.js',
                 'https://example.com/scripts/custom.js',
                 ('custom.js', {'async': 'async'})]
```

As a special attribute, *priority* can be set as an integer to load the JavaScript file at an earlier or lazier step. For more information, refer [Sphinx.add_js_file\(\)](#).

Added in version 1.8.

Changed in version 3.5: Support priority attribute

html_static_path

A list of paths that contain custom static files (such as style sheets or script files). Relative paths are taken as relative to the configuration directory. They are copied to the output's `_static` directory after the theme's static files, so a file named `default.css` will overwrite the theme's `default.css`.

As these files are not meant to be built, they are automatically excluded from source files.

Note: For security reasons, dotfiles under `html_static_path` will not be copied. If you would like to copy them intentionally, please add each filepath to this setting:

```
html_static_path = ['_static', '_static/.htaccess']
```

Another way to do that, you can also use [html_extra_path](#). It allows to copy dotfiles under the directories.

Changed in version 0.4: The paths in [html_static_path](#) can now contain subdirectories.

Changed in version 1.0: The entries in [html_static_path](#) can now be single files.

Changed in version 1.8: The files under [html_static_path](#) are excluded from source files.

html_extra_path

A list of paths that contain extra files not directly related to the documentation, such as `robots.txt` or `.htaccess`. Relative paths are taken as relative to the configuration directory. They are copied to the output directory. They will overwrite any existing file of the same name.

As these files are not meant to be built, they are automatically excluded from source files.

Added in version 1.2.

Changed in version 1.4: The dotfiles in the extra directory will be copied to the output directory. And it refers [exclude_patterns](#) on copying extra files and directories, and ignores if path matches to patterns.

html_last_updated_fmt

If this is not `None`, a 'Last updated on:' timestamp is inserted at every page bottom, using the given `strftime()`¹⁹⁵ format. The empty string is equivalent to `'%b %d, %Y'` (or a locale-dependent equivalent).

¹⁹⁵ <https://docs.python.org/3/library/time.html#time.strftime>

html_use_smartypants

If true, quotes and dashes are converted to typographically correct entities. Default: True.

Deprecated since version 1.6: To disable smart quotes, use rather *smartquotes*.

html_permaLinks

Add link anchors for each heading and description environment. Default: True.

Added in version 3.5.

html_permaLinks_icon

Text for link anchors for each heading and description environment. HTML entities and Unicode are allowed. Default: a paragraph sign; ¶

Added in version 3.5.

html_sidebars

Custom sidebar templates, must be a dictionary that maps document names to template names.

The keys can contain glob-style patterns¹, in which case all matching documents will get the specified sidebars. (A warning is emitted when a more than one glob-style pattern matches for any document.)

The values can be either lists or single strings.

- If a value is a list, it specifies the complete list of sidebar templates to include. If all or some of the default sidebars are to be included, they must be put into this list as well.

The default sidebars (for documents that don't match any pattern) are defined by theme itself. Builtin themes are using these templates by default: ['localtoc.html', 'relations.html', 'sourcelink.html', 'searchbox.html'].

- If a value is a single string, it specifies a custom sidebar to be added between the 'sourcelink.html' and 'searchbox.html' entries. This is for compatibility with Sphinx versions before 1.0.

Deprecated since version 1.7: a single string value for `html_sidebars` will be removed in 2.0

Builtin sidebar templates that can be rendered are:

- **localtoc.html** – a fine-grained table of contents of the current document
- **globaltoc.html** – a coarse-grained table of contents for the whole documentation set, collapsed
- **relations.html** – two links to the previous and next documents
- **sourcelink.html** – a link to the source of the current document, if enabled in *html_show_sourcelink*
- **searchbox.html** – the “quick search” box

Example:

```
html_sidebars = {
    '**': ['globaltoc.html', 'sourcelink.html', 'searchbox.html'],
    'using/windows': ['windowssidebar.html', 'searchbox.html'],
}
```

This will render the custom template `windowssidebar.html` and the quick search box within the sidebar of the given document, and render the default sidebars for all other pages (except that the local TOC is replaced by the global TOC).

Added in version 1.0: The ability to use globbing keys and to specify multiple sidebars.

Note that this value only has no effect if the chosen theme does not possess a sidebar, like the builtin **scrolls** and **haiku** themes.

html_additional_pages

Additional templates that should be rendered to HTML pages, must be a dictionary that maps document names to template names.

Example:

```
html_additional_pages = {
    'download': 'customdownload.html',
}
```

This will render the template `customdownload.html` as the page `download.html`.

html_domain_indices

If true, generate domain-specific indices in addition to the general index. For e.g. the Python domain, this is the global module index. Default is `True`.

This value can be a bool or a list of index names that should be generated. To find out the index name for a specific index, look at the HTML file name. For example, the Python module index has the name `'py-modindex'`.

Added in version 1.0.

html_use_index

If true, add an index to the HTML documents. Default is `True`.

Added in version 0.4.

html_split_index

If true, the index is generated twice: once as a single page with all the entries, and once as one page per starting letter. Default is `False`.

Added in version 0.4.

html_copy_source

If true, the reST sources are included in the HTML build as `_sources/name`. The default is `True`.

html_show_sourcelink

If true (and [`html_copy_source`](#) is true as well), links to the reST sources will be added to the sidebar. The default is `True`.

Added in version 0.6.

html_sourcelink_suffix

Suffix to be appended to source links (see [`html_show_sourcelink`](#)), unless they have this suffix already. Default is `'.txt'`.

Added in version 1.5.

html_use_opensearch

If nonempty, an [OpenSearch](#)¹⁹⁶ description file will be output, and all pages will contain a `<link>` tag referring to it. Since OpenSearch doesn't support relative URLs for its search page location, the value of this option must be the base URL from which these documents are served (without trailing slash), e.g. `"https://docs.python.org"`. The default is `''`.

html_file_suffix

This is the file name suffix for generated HTML files, if set to a `str`¹⁹⁷ value. If left to the default `None`, the suffix will be `".html"`.

Added in version 0.4.

¹⁹⁶ <https://github.com/dewitt/opensearch>

¹⁹⁷ <https://docs.python.org/3/library/stdtypes.html#str>

html_link_suffix

Suffix for generated links to HTML files. The default is whatever `html_file_suffix` is set to; it can be set differently (e.g. to support different web server setups).

Added in version 0.6.

html_show_copyright

If true, “(C) Copyright ...” is shown in the HTML footer. Default is True.

Added in version 1.0.

html_show_search_summary

If true, the text around the keyword is shown as summary of each search result. Default is True.

Added in version 4.5.

html_show_sphinx

If true, “Created using Sphinx” is shown in the HTML footer. Default is True.

Added in version 0.4.

html_output_encoding

Encoding of HTML output files. Default is 'utf-8'. Note that this encoding name must both be a valid Python encoding name and a valid HTML `charset` value.

Added in version 1.0.

html_compact_lists

If true, a list all whose items consist of a single paragraph and/or a sub-list all whose items etc... (recursive definition) will not use the `<p>` element for any of its items. This is standard docutils behavior. Default: True.

Added in version 1.0.

html_secnumber_suffix

Suffix for section numbers. Default: ". ". Set to " " to suppress the final dot on section numbers.

Added in version 1.0.

html_search_language

Language to be used for generating the HTML full-text search index. This defaults to the global language selected with `language`. If there is no support for this language, "en" is used which selects the English language.

Support is present for these languages:

- da – Danish
- nl – Dutch
- en – English
- fi – Finnish
- fr – French
- de – German
- hu – Hungarian
- it – Italian
- ja – Japanese
- no – Norwegian
- pt – Portuguese

- `ro` – Romanian
- `ru` – Russian
- `es` – Spanish
- `sv` – Swedish
- `tr` – Turkish
- `zh` – Chinese

Accelerating build speed

Each language (except Japanese) provides its own stemming algorithm. Sphinx uses a Python implementation by default. You can use a C implementation to accelerate building the index file.

- [PorterStemmer](https://pypi.org/project/PorterStemmer/)¹⁹⁸ (`en`)
- [PyStemmer](https://pypi.org/project/PyStemmer/)¹⁹⁹ (all languages)

Added in version 1.1: With support for `en` and `ja`.

Changed in version 1.3: Added additional languages.

`html_search_options`

A dictionary with options for the search language support, empty by default. The meaning of these options depends on the language selected.

The English support has no options.

The Japanese support has these options:

Type

type is dotted module path string to specify Splitter implementation which should be derived from `sphinx.search.ja.BaseSplitter`. If not specified or `None` is specified, `'sphinx.search.ja.DefaultSplitter'` will be used.

You can choose from these modules:

`'sphinx.search.ja.DefaultSplitter'`

TinySegmenter algorithm. This is default splitter.

`'sphinx.search.ja.MecabSplitter'`

MeCab binding. To use this splitter, `'mecab'` python binding or dynamic link library (`'libmecab.so'` for linux, `'libmecab.dll'` for windows) is required.

`'sphinx.search.ja.JanomeSplitter'`

Janome binding. To use this splitter, [Janome](https://pypi.org/project/Janome/)²⁰⁰ is required.

Deprecated since version 1.6: `'mecab'`, `'janome'` and `'default'` is deprecated. To keep compatibility, `'mecab'`, `'janome'` and `'default'` are also acceptable.

Other option values depend on splitter value which you choose.

Options for `'mecab'`:

`dic_enc`

`dic_enc` option is the encoding for the MeCab algorithm.

¹⁹⁸ <https://pypi.org/project/PorterStemmer/>

¹⁹⁹ <https://pypi.org/project/PyStemmer/>

dict

dict option is the dictionary to use for the MeCab algorithm.

lib

lib option is the library name for finding the MeCab library via ctypes if the Python binding is not installed.

For example:

```
html_search_options = {
    'type': 'mecab',
    'dic_enc': 'utf-8',
    'dict': '/path/to/mecab.dic',
    'lib': '/path/to/libmecab.so',
}
```

Options for 'janome':**user_dic**

user_dic option is the user dictionary file path for Janome.

user_dic_enc

user_dic_enc option is the encoding for the user dictionary file specified by user_dic option. Default is 'utf8'.

Added in version 1.1.

Changed in version 1.4: html_search_options for Japanese is re-organized and any custom splitter can be used by *type* settings.

The Chinese support has these options:

- dict – the jieba dictionary path if want to use custom dictionary.

html_search_scorer

The name of a JavaScript file (relative to the configuration directory) that implements a search results scorer. If empty, the default will be used.

The scorer must implement the following interface, and may optionally define the `score()` function for more granular control.

```
const Scorer = {
  // Implement the following function to further tweak the score for each result
  score: result => {
    const [docName, title, anchor, descr, score, filename] = result

    // ... calculate a new score ...
    return score
  },

  // query matches the full name of an object
  objNameMatch: 11,
  // or matches in the last dotted part of the object name
  objPartialMatch: 6,
  // Additive scores depending on the priority of the object
  objPrio: {
    0: 15, // used to be importantResults
  }
}
```

(continues on next page)

²⁰⁰ <https://pypi.org/project/Janome/>

(continued from previous page)

```

    1: 5, // used to be objectResults
    2: -5, // used to be unimportantResults
},
// Used when the priority is not in the mapping.
objPrioDefault: 0,

// query found in title
title: 15,
partialTitle: 7,

// query found in terms
term: 5,
partialTerm: 2,
};

```

Added in version 1.2.

html_scaled_image_link

If true, image itself links to the original image if it doesn't have 'target' option or scale related options: 'scale', 'width', 'height'. The default is True.

Document authors can disable this feature manually with giving `no-scaled-link` class to the image:

```

.. image:: sphinx.png
   :scale: 50%
   :class: no-scaled-link

```

Added in version 1.3.

Changed in version 3.0: It is disabled for images having `no-scaled-link` class

html_math_renderer

The name of math_renderer extension for HTML output. The default is 'mathjax'.

Added in version 1.8.

html_experimental_html5_writer

Output is processed with HTML5 writer. Default is False.

Added in version 1.6.

Deprecated since version 2.0.

html4_writer

Output is processed with HTML4 writer. Default is False.

Options for Single HTML output

singlehtml_sidebars

Custom sidebar templates, must be a dictionary that maps document names to template names. And it only allows a key named 'index'. All other keys are ignored. For more information, refer to [html_sidebars](#). By default, it is same as [html_sidebars](#).

Options for HTML help output

`htmlhelp_basename`

Output file base name for HTML help builder. Default is 'pydoc'.

`htmlhelp_file_suffix`

This is the file name suffix for generated HTML help files. The default is ".html".

Added in version 2.0.

`htmlhelp_link_suffix`

Suffix for generated links to HTML files. The default is ".html".

Added in version 2.0.

Options for Apple Help output

Added in version 1.3.

These options influence the Apple Help output. This builder derives from the HTML builder, so the HTML options also apply where appropriate.

Note: Apple Help output will only work on Mac OS X 10.6 and higher, as it requires the **hiutil** and **codesign** command line tools, neither of which are Open Source.

You can disable the use of these tools using [`applehelp_disable_external_tools`](#), but the result will not be a valid help book until the indexer is run over the `.lproj` folders within the bundle.

`applehelp_bundle_name`

The basename for the Apple Help Book. Defaults to the [`project`](#) name.

`applehelp_bundle_id`

The bundle ID for the help book bundle.

Warning: You *must* set this value in order to generate Apple Help.

`applehelp_dev_region`

The development region. Defaults to 'en-us', which is Apple's recommended setting.

`applehelp_bundle_version`

The bundle version (as a string). Defaults to '1'.

`applehelp_icon`

The help bundle icon file, or None for no icon. According to Apple's documentation, this should be a 16-by-16 pixel version of the application's icon with a transparent background, saved as a PNG file.

`applehelp_kb_product`

The product tag for use with [`applehelp_kb_url`](#). Defaults to '<project>-<release>'.

`applehelp_kb_url`

The URL for your knowledgebase server, e.g. `https://example.com/kbsearch.py?p='product'&q='query'&l='lang'`. Help Viewer will replace the values 'product', 'query' and 'lang' at runtime with the contents of [`applehelp_kb_product`](#), the text entered by the user in the search box and the user's system language respectively.

Defaults to `None` for no remote search.

applehelp_remote_url

The URL for remote content. You can place a copy of your Help Book's Resources folder at this location and Help Viewer will attempt to use it to fetch updated content.

e.g. if you set it to `https://example.com/help/Foo/` and Help Viewer wants a copy of `index.html` for an English speaking customer, it will look at `https://example.com/help/Foo/en.lproj/index.html`.

Defaults to `None` for no remote content.

applehelp_index_anchors

If `True`, tell the help indexer to index anchors in the generated HTML. This can be useful for jumping to a particular topic using the `AHLookupAnchor` function or the `openHelpAnchor:inBook:` method in your code. It also allows you to use `help:anchor` URLs; see the Apple documentation for more information on this topic.

applehelp_min_term_length

Controls the minimum term length for the help indexer. Defaults to `None`, which means the default will be used.

applehelp_stopwords

Either a language specification (to use the built-in stopwords), or the path to a stopwords plist, or `None` if you do not want to use stopwords. The default stopwords plist can be found at `/usr/share/hiutil/Stopwords.plist` and contains, at time of writing, stopwords for the following languages:

Language	Code
English	en
German	de
Spanish	es
French	fr
Swedish	sv
Hungarian	hu
Italian	it

Defaults to *language*, or if that is not set, to `'en'`.

applehelp_locale

Specifies the locale to generate help for. This is used to determine the name of the `.lproj` folder inside the Help Book's Resources, and is passed to the help indexer.

Defaults to *language*, or if that is not set, to `'en'`.

applehelp_title

Specifies the help book title. Defaults to `'<project> Help'`.

applehelp_codesign_identity

Specifies the identity to use for code signing, or `None` if code signing is not to be performed.

Defaults to the value of the environment variable `CODE_SIGN_IDENTITY`, which is set by Xcode for script build phases, or `None` if that variable is not set.

applehelp_codesign_flags

A *list* of additional arguments to pass to **codesign** when signing the help book.

Defaults to a list based on the value of the environment variable `OTHER_CODE_SIGN_FLAGS`, which is set by Xcode for script build phases, or the empty list if that variable is not set.

applehelp_indexer_path

The path to the **hiutil** program. Defaults to `'/usr/bin/hiutil'`.

applehelp_codesign_path

The path to the **codesign** program. Defaults to `'/usr/bin/codesign'`.

applehelp_disable_external_tools

If `True`, the builder will not run the indexer or the code signing tool, no matter what other settings are specified.

This is mainly useful for testing, or where you want to run the Sphinx build on a non-Mac OS X platform and then complete the final steps on OS X for some reason.

Defaults to `False`.

Options for epub output

These options influence the epub output. As this builder derives from the HTML builder, the HTML options also apply where appropriate. The actual values for some of the options is not really important, they just have to be entered into the [Dublin Core metadata](#)²⁰¹.

epub_basename

The basename for the epub file. It defaults to the *project* name.

epub_theme

The HTML theme for the epub output. Since the default themes are not optimized for small screen space, using the same theme for HTML and epub output is usually not wise. This defaults to `'epub'`, a theme designed to save visual space.

epub_theme_options

A dictionary of options that influence the look and feel of the selected theme. These are theme-specific. For the options understood by the builtin themes, see [this section](#).

Added in version 1.2.

epub_title

The title of the document. It defaults to the *html_title* option but can be set independently for epub creation. It defaults to the *project* option.

Changed in version 2.0: It defaults to the *project* option.

epub_description

The description of the document. The default value is `'unknown'`.

Added in version 1.4.

Changed in version 1.5: Renamed from *epub3_description*

epub_author

The author of the document. This is put in the Dublin Core metadata. It defaults to the *author* option.

epub_contributor

The name of a person, organization, etc. that played a secondary role in the creation of the content of an EPUB Publication. The default value is `'unknown'`.

Added in version 1.4.

Changed in version 1.5: Renamed from *epub3_contributor*

²⁰¹ <https://dublincore.org/>

epub_language

The language of the document. This is put in the Dublin Core metadata. The default is the *language* option or 'en' if unset.

epub_publisher

The publisher of the document. This is put in the Dublin Core metadata. You may use any sensible string, e.g. the project homepage. The default is the *author* option.

epub_copyright

The copyright of the document. It defaults to the *copyright* option but can be set independently for epub creation.

epub_identifier

An identifier for the document. This is put in the Dublin Core metadata. For published documents this is the ISBN number, but you can also use an alternative scheme, e.g. the project homepage. The default value is 'unknown'.

epub_scheme

The publication scheme for the *epub_identifier*. This is put in the Dublin Core metadata. For published books the scheme is 'ISBN'. If you use the project homepage, 'URL' seems reasonable. The default value is 'unknown'.

epub_uid

A unique identifier for the document. This is put in the Dublin Core metadata. You may use a *XML's Name format*²⁰² string. You can't use hyphen, period, numbers as a first character. The default value is 'unknown'.

epub_cover

The cover page information. This is a tuple containing the filenames of the cover image and the html template. The rendered html cover page is inserted as the first item in the spine in `content.opf`. If the template filename is empty, no html cover page is created. No cover at all is created if the tuple is empty. Examples:

```
epub_cover = ('_static/cover.png', 'epub-cover.html')
epub_cover = ('_static/cover.png', '')
epub_cover = ()
```

The default value is `()`.

Added in version 1.1.

epub_css_files

A list of CSS files. The entry must be a *filename* string or a tuple containing the *filename* string and the *attributes* dictionary. For more information, see *html_css_files*.

Added in version 1.8.

epub_guide

Meta data for the guide element of `content.opf`. This is a sequence of tuples containing the *type*, the *uri* and the *title* of the optional guide information. See the OPF documentation at <https://idpf.org/epub> for details. If possible, default entries for the *cover* and *toc* types are automatically inserted. However, the types can be explicitly overwritten if the default entries are not appropriate. Example:

```
epub_guide = (('cover', 'cover.html', 'Cover Page'),)
```

The default value is `()`.

²⁰² <https://www.w3.org/TR/REC-xml/#NT-NameStartChar>

epub_pre_files

Additional files that should be inserted before the text generated by Sphinx. It is a list of tuples containing the file name and the title. If the title is empty, no entry is added to `toc.ncx`. Example:

```
epub_pre_files = [
    ('index.html', 'Welcome'),
]
```

The default value is `[]`.

epub_post_files

Additional files that should be inserted after the text generated by Sphinx. It is a list of tuples containing the file name and the title. This option can be used to add an appendix. If the title is empty, no entry is added to `toc.ncx`. The default value is `[]`.

epub_exclude_files

A list of files that are generated/copied in the build directory but should not be included in the epub file. The default value is `[]`.

epub_tocdepth

The depth of the table of contents in the file `toc.ncx`. It should be an integer greater than zero. The default value is 3. Note: A deeply nested table of contents may be difficult to navigate.

epub_tocdup

This flag determines if a toc entry is inserted again at the beginning of its nested toc listing. This allows easier navigation to the top of a chapter, but can be confusing because it mixes entries of different depth in one list. The default value is `True`.

epub_tocscope

This setting control the scope of the epub table of contents. The setting can have the following values:

- 'default' – include all toc entries that are not hidden (default)
- 'includehidden' – include all toc entries

Added in version 1.2.

epub_fix_images

This flag determines if sphinx should try to fix image formats that are not supported by some epub readers. At the moment palette images with a small color table are upgraded. You need Pillow, the Python Image Library, installed to use this option. The default value is `False` because the automatic conversion may lose information.

Added in version 1.2.

epub_max_image_width

This option specifies the maximum width of images. If it is set to a value greater than zero, images with a width larger than the given value are scaled accordingly. If it is zero, no scaling is performed. The default value is 0. You need the Python Image Library (Pillow) installed to use this option.

Added in version 1.2.

epub_show_urls

Control whether to display URL addresses. This is very useful for readers that have no other means to display the linked URL. The settings can have the following values:

- 'inline' – display URLs inline in parentheses (default)
- 'footnote' – display URLs in footnotes
- 'no' – do not display URLs

The display of inline URLs can be customized by adding CSS rules for the class `link-target`.

Added in version 1.2.

epub_use_index

If true, add an index to the epub document. It defaults to the [html_use_index](#) option but can be set independently for epub creation.

Added in version 1.2.

epub_writing_mode

It specifies writing direction. It can accept 'horizontal' (default) and 'vertical'

epub_writing_mode	'horizontal'	'vertical'
writing-mode ²⁰³	horizontal-tb	vertical-rl
page progression	left to right	right to left
iBook's Scroll Theme support	scroll-axis is vertical.	scroll-axis is horizontal.

Options for LaTeX output

These options influence LaTeX output.

latex_engine

The LaTeX engine to build the docs. The setting can have the following values:

- 'pdflatex' – PDFLaTeX (default)
- 'xelatex' – XeLaTeX
- 'lualatex' – LuaLaTeX
- 'platex' – pLaTeX
- 'uplatex' – upLaTeX (default if [language](#) is 'ja')

'pdflatex'’s support for Unicode characters is limited.

Note: 2.0 adds to 'pdflatex' support in Latin language document of occasional Cyrillic or Greek letters or words. This is not automatic, see the discussion of the [latex_elements](#) 'fontenc' key.

If your project uses Unicode characters, setting the engine to 'xelatex' or 'lualatex' and making sure to use an OpenType font with wide-enough glyph coverage is often easier than trying to make 'pdflatex' work with the extra Unicode characters. Since Sphinx 2.0 the default is the GNU FreeFont which covers well Latin, Cyrillic and Greek.

Changed in version 2.1.0: Use `xelatex` (and LaTeX package `xeCJK`) by default for Chinese documents.

Changed in version 2.2.1: Use `xelatex` by default for Greek documents.

Changed in version 2.3: Add `uplatex` support.

Changed in version 4.0: `uplatex` becomes the default setting of Japanese documents.

Contrarily to [MathJax math rendering in HTML output](#), LaTeX requires some extra configuration to support Unicode literals in [math](#): the only comprehensive solution (as far as we know) is to use 'xelatex' or 'lualatex' and to add `\usepackage{unicode-math}` (e.g. via the [latex_elements](#) 'preamble' key).

²⁰³ <https://developer.mozilla.org/en-US/docs/Web/CSS/writing-mode>

You may prefer `r'\usepackage[math-style=literal]{unicode-math}'` to keep a Unicode literal such as α (U+03B1) for example as is in output, rather than being rendered as α .

latex_documents

This value determines how to group the document tree into LaTeX source files. It must be a list of tuples (`startdocname`, `targetname`, `title`, `author`, `theme`, `toctree_only`), where the items are:

startdocname

String that specifies the *document name* of the LaTeX file's master document. All documents referenced by the *startdoc* document in TOC trees will be included in the LaTeX file. (If you want to use the default root document for your LaTeX build, provide your *root_doc* here.)

targetname

File name of the LaTeX file in the output directory.

title

LaTeX document title. Can be empty to use the title of the *startdoc* document. This is inserted as LaTeX markup, so special characters like a backslash or ampersand must be represented by the proper LaTeX commands if they are to be inserted literally.

author

Author for the LaTeX document. The same LaTeX markup caveat as for *title* applies. Use `\\and` to separate multiple authors, as in: 'John `\\and` Sarah' (backslashes must be Python-escaped to reach LaTeX).

theme

LaTeX theme. See [latex_theme](#).

toctree_only

Must be `True` or `False`. If `true`, the *startdoc* document itself is not included in the output, only the documents referenced by it via TOC trees. With this option, you can put extra stuff in the master document that shows up in the HTML, but not the LaTeX output.

Added in version 1.2: In the past including your own document class required you to prepend the document class name with the string "sphinx". This is not necessary anymore.

Added in version 0.3: The 6th item `toctree_only`. Tuples with 5 items are still accepted.

latex_logo

If given, this must be the name of an image file (relative to the configuration directory) that is the logo of the docs. It is placed at the top of the title page. Default: `None`.

latex_toplevel_sectioning

This value determines the topmost sectioning unit. It should be chosen from `'part'`, `'chapter'` or `'section'`. The default is `None`; the topmost sectioning unit is switched by documentclass: `section` is used if documentclass will be `howto`, otherwise `chapter` will be used.

Note that if LaTeX uses `\part` command, then the numbering of sectioning units one level deep gets off-sync with HTML numbering, because LaTeX numbers continuously `\chapter` (or `\section` for `howto`.)

Added in version 1.4.

latex_appendices

A list of document names to append as an appendix to all manuals.

latex_domain_indices

If `true`, generate domain-specific indices in addition to the general index. For e.g. the Python domain, this is the global module index. Default is `True`.

This value can be a `bool` or a list of index names that should be generated, like for [html_domain_indices](#).

Added in version 1.0.

latex_show_pagerefs

If true, add page references after internal references. This is very useful for printed copies of the manual. Default is False.

Added in version 1.0.

latex_show_urls

Control whether to display URL addresses. This is very useful for printed copies of the manual. The setting can have the following values:

- 'no' – do not display URLs (default)
- 'footnote' – display URLs in footnotes
- 'inline' – display URLs inline in parentheses

Added in version 1.0.

Changed in version 1.1: This value is now a string; previously it was a boolean value, and a true value selected the 'inline' display. For backwards compatibility, True is still accepted.

latex_use_latex_multicolumn

The default is False: it means that Sphinx's own macros are used for merged cells from grid tables. They allow general contents (literal blocks, lists, blockquotes, ...) but may have problems if the `tabularcolumns` directive was used to inject LaTeX mark-up of the type `>{...}`, `<{...}`, `@{...}` as column specification.

Setting to True means to use LaTeX's standard `\multicolumn`; this is incompatible with literal blocks in the horizontally merged cell, and also with multiple paragraphs in such cell if the table is rendered using `tabulary`.

Added in version 1.6.

latex_table_style

A list of styling classes (strings). Currently supported:

- 'booktabs': no vertical lines, and only 2 or 3 horizontal lines (the latter if there is a header), using the `booktabs`²⁰⁴ package.
- 'borderless': no lines whatsoever.
- 'colorrows': the table rows are rendered with alternating background colours. The interface to customize them is via *dedicated keys* of *The sphinxsetup configuration setting*.

Important: With the 'colorrows' style, the `\rowcolors` LaTeX command becomes a no-op (this command has limitations and has never correctly supported all types of tables Sphinx produces in LaTeX). Please update your project to use instead the *latex table color configuration* keys.

Default: ['booktabs', 'colorrows']

Added in version 5.3.0.

Changed in version 6.0.0: Modify default from [] to ['booktabs', 'colorrows'].

Each table can override the global style via `:class:` option, or `.. rst-class::` for no-directive tables (cf. *Tables*). Currently recognized classes are `booktabs`, `borderless`, `standard`, `colorrows`, `nocolorrows`. The latter two can be combined with any of the first three. The `standard` class produces tables with both horizontal and vertical lines (as has been the default so far with Sphinx).

A single-row multi-column merged cell will obey the row colour, if it is set. See also `TableMergeColor{Header,Odd,Even}` in the *The sphinxsetup configuration setting* section.

Note:

- It is hard-coded in LaTeX that a single cell will obey the row colour even if there is a column colour set via `\columncolor` from a column specification (see [tabularcolumns](#)). Sphinx provides `\sphinxnorowcolor` which can be used like this:

```
>{\columncolor{blue}\sphinxnorowcolor}
```

in a table column specification.

- Sphinx also provides `\sphinxcolorblend` which however requires the `xcolor`²⁰⁵ package. Here is an example:

```
>{\sphinxcolorblend{!95!red}}
```

It means that in this column, the row colours will be slightly tinted by red; refer to `xcolor`²⁰⁶ documentation for more on the syntax of its `\blendcolors` command (a `\blendcolors` in place of `\sphinxcolorblend` would modify colours of the cell *contents*, not of the cell *background colour panel*...). You can find an example of usage in the [Deprecated APIs](#) section of this document in PDF format.

Hint: If you want to use a special colour for the *contents* of the cells of a given column use `>{\noindent\color{<color>}}`, possibly in addition to the above.

- Multi-row merged cells, whether single column or multi-column currently ignore any set column, row, or cell colour.
- It is possible for a simple cell to set a custom colour via the `raw`²⁰⁷ directive and the `\cellcolor` LaTeX command used anywhere in the cell contents. This currently is without effect in a merged cell, whatever its kind.

Hint: In a document not using 'booktabs' globally, it is possible to style an individual table via the `booktabs` class, but it will be necessary to add `r'\usepackage{booktabs}` ' to the LaTeX preamble.

On the other hand one can use `colorrows` class for individual tables with no extra package (as Sphinx since 5.3.0 always loads `colortbl`²⁰⁸).

latex_use_xindy

If True, the PDF build from the LaTeX files created by Sphinx will use **xindy** ([doc](#)²⁰⁹) rather than **makeindex** for preparing the index of general terms (from [index](#) usage). This means that words with UTF-8 characters will get ordered correctly for the [language](#).

- This option is ignored if `latex_engine` is 'platex' (Japanese documents; **mendex** replaces **makeindex** then).
- The default is True for 'xelatex' or 'lualatex' as **makeindex**, if any indexed term starts with a non-ascii character, creates .ind files containing invalid bytes for UTF-8 encoding. With 'lualatex' this then breaks the PDF build.
- The default is False for 'pdflatex' but True is recommended for non-English documents as soon as some indexed terms use non-ascii characters from the language script.

²⁰⁴ <https://ctan.org/pkg/booktabs>

²⁰⁵ <https://ctan.org/pkg/xcolor>

²⁰⁶ <https://ctan.org/pkg/xcolor>

²⁰⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#raw>

²⁰⁸ <https://ctan.org/pkg/colortbl>

Sphinx adds to **xindy** base distribution some dedicated support for using 'pdflatex' engine with Cyrillic scripts. And whether with 'pdflatex' or Unicode engines, Cyrillic documents handle correctly the indexing of Latin names, even with diacritics.

Added in version 1.8.

latex_elements

Added in version 0.5.

Its *documentation* has moved to *LaTeX customization*.

latex_docclass

A dictionary mapping 'howto' and 'manual' to names of real document classes that will be used as the base for the two Sphinx classes. Default is to use 'article' for 'howto' and 'report' for 'manual'.

Added in version 1.0.

Changed in version 1.5: In Japanese docs (*language* is 'ja'), by default 'jreport' is used for 'howto' and 'jsbook' for 'manual'.

latex_additional_files

A list of file names, relative to the configuration directory, to copy to the build directory when building LaTeX output. This is useful to copy files that Sphinx doesn't copy automatically, e.g. if they are referenced in custom LaTeX added in `latex_elements`. Image files that are referenced in source files (e.g. via `.. image::`) are copied automatically.

You have to make sure yourself that the filenames don't collide with those of any automatically copied files.

Attention: Filenames with extension `.tex` will automatically be handed over to the PDF build process triggered by `sphinx-build -M latexpdf` or by `make latexpdf`. If the file was added only to be `\input{}` from a modified preamble, you must add a further suffix such as `.txt` to the filename and adjust accordingly the `\input{}` command added to the LaTeX document preamble.

Added in version 0.6.

Changed in version 1.2: This overrides the files which is provided from Sphinx such as `sphinx.sty`.

latex_theme

The “theme” that the LaTeX output should use. It is a collection of settings for LaTeX output (ex. document class, top level sectioning unit and so on).

As a built-in LaTeX themes, `manual` and `howto` are bundled.

manual

A LaTeX theme for writing a manual. It imports the `report` document class (Japanese documents use `jsbook`).

howto

A LaTeX theme for writing an article. It imports the `article` document class (Japanese documents use `jreport` rather). *latex_appendices* is available only for this theme.

It defaults to 'manual'.

Added in version 3.0.

latex_theme_options

A dictionary of options that influence the look and feel of the selected theme.

Added in version 3.1.

²⁰⁹ <https://xindy.sourceforge.net/>

latex_theme_path

A list of paths that contain custom LaTeX themes as subdirectories. Relative paths are taken as relative to the configuration directory.

Added in version 3.0.

Options for text output

These options influence text output.

text_newlines

Determines which end-of-line character(s) are used in text output.

- 'unix': use Unix-style line endings (\n)
- 'windows': use Windows-style line endings (\r\n)
- 'native': use the line ending style of the platform the documentation is built on

Default: 'unix'.

Added in version 1.1.

text_sectionchars

A string of 7 characters that should be used for underlining sections. The first character is used for first-level headings, the second for second-level headings and so on.

The default is '*=-~"+`'.

Added in version 1.1.

text_add_secnumbers

A boolean that decides whether section numbers are included in text output. Default is True.

Added in version 1.7.

text_secnumber_suffix

Suffix for section numbers in text output. Default: ". ". Set to " " to suppress the final dot on section numbers.

Added in version 1.7.

Options for manual page output

These options influence manual page output.

man_pages

This value determines how to group the document tree into manual pages. It must be a list of tuples (startdocname, name, description, authors, section), where the items are:

startdocname

String that specifies the *document name* of the manual page's master document. All documents referenced by the *startdoc* document in TOC trees will be included in the manual file. (If you want to use the default root document for your manual pages build, use your *root_doc* here.)

name

Name of the manual page. This should be a short string without spaces or special characters. It is used to determine the file name as well as the name of the manual page (in the NAME section).

description

Description of the manual page. This is used in the NAME section. Can be an empty string if you do not want to automatically generate the NAME section.

authors

A list of strings with authors, or a single string. Can be an empty string or list if you do not want to automatically generate an AUTHORS section in the manual page.

section

The manual page section. Used for the output file name as well as in the manual page header.

Added in version 1.0.

man_show_urls

If true, add URL addresses after links. Default is False.

Added in version 1.1.

man_make_section_directory

If true, make a section directory on build man page. Default is True.

Added in version 3.3.

Changed in version 4.0: The default is changed to False from True.

Changed in version 4.0.2: The default is changed to True from False again.

Options for Texinfo output

These options influence Texinfo output.

texinfo_documents

This value determines how to group the document tree into Texinfo source files. It must be a list of tuples (startdocname, targetname, title, author, dir_entry, description, category, toctree_only), where the items are:

startdocname

String that specifies the *document name* of the the Texinfo file's master document. All documents referenced by the *startdoc* document in TOC trees will be included in the Texinfo file. (If you want to use the default master document for your Texinfo build, provide your *root_doc* here.)

targetname

File name (no extension) of the Texinfo file in the output directory.

title

Texinfo document title. Can be empty to use the title of the *startdoc* document. Inserted as Texinfo markup, so special characters like @ and {} will need to be escaped to be inserted literally.

author

Author for the Texinfo document. Inserted as Texinfo markup. Use @* to separate multiple authors, as in: 'John@*Sarah'.

dir_entry

The name that will appear in the top-level DIR menu file.

description

Descriptive text to appear in the top-level DIR menu file.

category

Specifies the section which this entry will appear in the top-level DIR menu file.

toctree_only

Must be True or False. If true, the *startdoc* document itself is not included in the output, only the documents referenced by it via TOC trees. With this option, you can put extra stuff in the master document that shows up in the HTML, but not the Texinfo output.

Added in version 1.1.

texinfo_appendices

A list of document names to append as an appendix to all manuals.

Added in version 1.1.

texinfo_domain_indices

If true, generate domain-specific indices in addition to the general index. For e.g. the Python domain, this is the global module index. Default is True.

This value can be a bool or a list of index names that should be generated, like for [html_domain_indices](#).

Added in version 1.1.

texinfo_show_urls

Control how to display URL addresses.

- 'footnote' – display URLs in footnotes (default)
- 'no' – do not display URLs
- 'inline' – display URLs inline in parentheses

Added in version 1.1.

texinfo_no_detailmenu

If true, do not generate a @detailmenu in the “Top” node’s menu containing entries for each sub-node in the document. Default is False.

Added in version 1.2.

texinfo_elements

A dictionary that contains Texinfo snippets that override those Sphinx usually puts into the generated .texi files.

- Keys that you may want to override include:

'paragraphindent'

Number of spaces to indent the first line of each paragraph, default 2. Specify 0 for no indentation.

'exampleindent'

Number of spaces to indent the lines for examples or literal blocks, default 4. Specify 0 for no indentation.

'preamble'

Texinfo markup inserted near the beginning of the file.

'copying'

Texinfo markup inserted within the @copying block and displayed after the title. The default value consists of a simple title page identifying the project.

- Keys that are set by other options and therefore should not be overridden are:

'author' 'body' 'date' 'direntry' 'filename' 'project' 'release' 'title'

Added in version 1.1.

texinfo_cross_references

If false, do not generate inline references in a document. That makes an info file more readable with stand-alone reader (info). Default is True.

Added in version 4.4.

Options for QtHelp output

These options influence qthelp output. As this builder derives from the HTML builder, the HTML options also apply where appropriate.

qthelp_basename

The basename for the qthelp file. It defaults to the *project* name.

qthelp_namespace

The namespace for the qthelp file. It defaults to `org.sphinx.<project_name>.<project_version>`.

qthelp_theme

The HTML theme for the qthelp output. This defaults to 'nonav'.

qthelp_theme_options

A dictionary of options that influence the look and feel of the selected theme. These are theme-specific. For the options understood by the builtin themes, see *this section*.

Options for the linkcheck builder

linkcheck_ignore

A list of regular expressions that match URIs that should not be checked when doing a linkcheck build. Example:

```
linkcheck_ignore = [r'https://localhost:\d+/']
```

Added in version 1.1.

linkcheck_allowed_redirects

A dictionary that maps a pattern of the source URI to a pattern of the canonical URI. The linkcheck builder treats the redirected link as “working” when:

- the link in the document matches the source URI pattern, and
- the redirect location matches the canonical URI pattern.

Example:

```
linkcheck_allowed_redirects = {  
    # All HTTP redirections from the source URI to the canonical URI will be  
    ↪ treated as "working".  
    r'https://sphinx-doc\.org/.*': r'https://sphinx-doc\.org/en/master/.*' }  
}
```

If set, linkcheck builder will emit a warning when disallowed redirection found. It’s useful to detect unexpected redirects under *the warn-is-error mode*.

Added in version 4.1.

linkcheck_request_headers

A dictionary that maps baseurls to HTTP request headers.

The key is a URL base string like "https://www.sphinx-doc.org/". To specify headers for other hosts, "*" can be used. It matches all hosts only when the URL does not match other settings.

The value is a dictionary that maps header name to its value.

Example:

```
linkcheck_request_headers = {
    "https://www.sphinx-doc.org/": {
        "Accept": "text/html",
        "Accept-Encoding": "utf-8",
    },
    "*": {
        "Accept": "text/html,application/xhtml+xml",
    }
}
```

Added in version 3.1.

linkcheck_retries

The number of times the linkcheck builder will attempt to check a URL before declaring it broken. Defaults to 1 attempt.

Added in version 1.4.

linkcheck_timeout

The duration, in seconds, that the linkcheck builder will wait for a response after each hyperlink request. Defaults to 30 seconds.

Added in version 1.1.

linkcheck_workers

The number of worker threads to use when checking links. Default is 5 threads.

Added in version 1.1.

linkcheck_anchors

If true, check the validity of #anchors in links. Since this requires downloading the whole document, it's considerably slower when enabled. Default is True.

Added in version 1.2.

linkcheck_anchors_ignore

A list of regular expressions that match anchors Sphinx should skip when checking the validity of anchors in links. This allows skipping anchors that a website's JavaScript adds to control dynamic pages or when triggering an internal REST request. Default is ["^!"].

Tip: Use `linkcheck_anchors_ignore_for_url` to check a URL, but skip verifying that the anchors exist.

Note: If you want to ignore anchors of a specific page or of pages that match a specific pattern (but still check occurrences of the same page(s) that don't have anchors), use `linkcheck_ignore` instead, for example as follows:

```
linkcheck_ignore = [  
    'https://www.sphinx-doc.org/en/1.7/intro.html#',  
]
```

Added in version 1.5.

linkcheck_anchors_ignore_for_url

A list or tuple of regular expressions matching URLs for which Sphinx should not check the validity of anchors. This allows skipping anchor checks on a per-page basis while still checking the validity of the page itself. Default is an empty tuple ().

Added in version 7.1.

linkcheck_auth

Pass authentication information when doing a linkcheck build.

A list of (regex_pattern, auth_info) tuples where the items are:

regex_pattern

A regular expression that matches a URI.

auth_info

Authentication information to use for that URI. The value can be anything that is understood by the requests library (see [requests Authentication](#)²¹⁰ for details).

The linkcheck builder will use the first matching auth_info value it can find in the [linkcheck_auth](#) list, so values earlier in the list have higher priority.

Example:

```
linkcheck_auth = [  
    ('https://foo\.yourcompany\.com/.+', ('johndoe', 'secret')),  
    ('https://.+\.yourcompany\.com/.+', HTTPDigestAuth(...)),  
]
```

Added in version 2.3.

linkcheck_rate_limit_timeout

The linkcheck builder may issue a large number of requests to the same site over a short period of time. This setting controls the builder behavior when servers indicate that requests are rate-limited.

If a server indicates when to retry (using the [Retry-After](#)²¹¹ header), linkcheck always follows the server indication.

Otherwise, linkcheck waits for a minute before to retry and keeps doubling the wait time between attempts until it succeeds or exceeds the linkcheck_rate_limit_timeout. By default, the timeout is 300 seconds and custom timeouts should be given in seconds.

Added in version 3.4.

linkcheck_exclude_documents

A list of regular expressions that match documents in which Sphinx should not check the validity of links. This can be used for permitting link decay in legacy or historical sections of the documentation.

Example:

²¹⁰ <https://requests.readthedocs.io/en/latest/user/authentication/#authentication>

²¹¹ <https://datatracker.ietf.org/doc/html/rfc7231#section-7.1.3>

```
# ignore all links in documents located in a subfolder named 'legacy'
linkcheck_exclude_documents = [r'./legacy/.*']
```

Added in version 4.4.

linkcheck_allow_unauthorized

When a webserver responds with an HTTP 401 (unauthorized) response, the current default behaviour of Sphinx is to treat the link as “working”. To change that behaviour, set this option to `False`.

The default value for this option will be changed in Sphinx 8.0; from that version onwards, HTTP 401 responses to checked hyperlinks will be treated as “broken” by default.

Added in version 7.3.

linkcheck_report_timeouts_as_broken

When an HTTP response is not received from a webserver before the configured `linkcheck_timeout` expires, the current default behaviour of Sphinx is to treat the link as ‘broken’. To report timeouts using a distinct report code of timeout, set `linkcheck_report_timeouts_as_broken` to `False`.

From Sphinx 8.0 onwards, timeouts that occur while checking hyperlinks will be reported using the new ‘timeout’ status code.

Added in version 7.3.

Options for the XML builder

xml_pretty

If true, pretty-print the XML. Default is `True`.

Added in version 1.2.

Options for the C domain

c_id_attributes

A list of strings that the parser additionally should accept as attributes. This can for example be used when attributes have been `#define` d for portability.

Added in version 3.0.

c_paren_attributes

A list of strings that the parser additionally should accept as attributes with one argument. That is, if `my_align_as` is in the list, then `my_align_as(X)` is parsed as an attribute for all strings `X` that have balanced braces `()`, `[]`, and `{}`. This can for example be used when attributes have been `#define` d for portability.

Added in version 3.0.

c_extra_keywords

A list of identifiers to be recognized as keywords by the C parser. It defaults to `['alignas', 'alignof', 'bool', 'complex', 'imaginary', 'noreturn', 'static_assert', 'thread_local']`.

Added in version 4.0.3.

c_maximum_signature_line_length

If a signature’s length in characters exceeds the number set, each parameter will be displayed on an individual logical line. This is a domain-specific setting, overriding `maximum_signature_line_length`.

Added in version 7.1.

Options for the C++ domain

`cpp_index_common_prefix`

A list of prefixes that will be ignored when sorting C++ objects in the global index. For example `['awesome_lib::']`.

Added in version 1.5.

`cpp_id_attributes`

A list of strings that the parser additionally should accept as attributes. This can for example be used when attributes have been `#define` d for portability.

Added in version 1.5.

`cpp_paren_attributes`

A list of strings that the parser additionally should accept as attributes with one argument. That is, if `my_align_as` is in the list, then `my_align_as(X)` is parsed as an attribute for all strings `X` that have balanced braces `()`, `[]`, and `{}`. This can for example be used when attributes have been `#define` d for portability.

Added in version 1.5.

`cpp_maximum_signature_line_length`

If a signature's length in characters exceeds the number set, each parameter will be displayed on an individual logical line. This is a domain-specific setting, overriding `maximum_signature_line_length`.

Added in version 7.1.

Options for the Python domain

`python_display_short_literal_types`

This value controls how `Literal`²¹² types are displayed. The setting is a boolean, default `False`.

Examples

The examples below use the following `py:function` directive:

```
.. py:function:: serve_food(item: Literal["egg", "spam", "lobster thermidor"]) -> None
    ↪ None
```

When `False`, `Literal`²¹³ types display as per standard Python syntax, i.e.:

```
serve_food(item: Literal["egg", "spam", "lobster thermidor"]) -> None
```

When `True`, `Literal`²¹⁴ types display with a short, `PEP 604`²¹⁵-inspired syntax, i.e.:

```
serve_food(item: "egg" | "spam" | "lobster thermidor") -> None
```

Added in version 6.2.

²¹² <https://docs.python.org/3/library/typing.html#typing.Literal>

²¹³ <https://docs.python.org/3/library/typing.html#typing.Literal>

²¹⁴ <https://docs.python.org/3/library/typing.html#typing.Literal>

²¹⁵ <https://peps.python.org/pep-0604/>

python_use_unqualified_type_names

If true, suppress the module name of the python reference if it can be resolved. The default is False.

Added in version 4.0.

Note: This configuration is still in experimental

python_maximum_signature_line_length

If a signature's length in characters exceeds the number set, each argument or type parameter will be displayed on an individual logical line. This is a domain-specific setting, overriding `maximum_signature_line_length`.

For the Python domain, the signature length depends on whether the type parameters or the list of arguments are being formatted. For the former, the signature length ignores the length of the arguments list; for the latter, the signature length ignores the length of the type parameters list.

For instance, with `python_maximum_signature_line_length = 20`, only the list of type parameters will be wrapped while the arguments list will be rendered on a single line

```
.. py:function:: add[T: VERY_LONG_SUPER_TYPE, U: VERY_LONG_SUPER_TYPE](a: T, b: U)
```

Added in version 7.1.

Options for the Javascript domain

javascript_maximum_signature_line_length

If a signature's length in characters exceeds the number set, each parameter will be displayed on an individual logical line. This is a domain-specific setting, overriding `maximum_signature_line_length`.

Added in version 7.1.

Example of configuration file

```
# test documentation build configuration file, created by
# sphinx-quickstart on Sun Jun 26 00:00:43 2016.
#
# This file is executed through importlib.import_module with
# the current directory set to its containing dir.
#
# Note that not all possible configuration values are present in this
# autogenerated file.
#
# All configuration values have a default; values that are commented out
# serve to show the default.

# If extensions (or modules to document with autodoc) are in another directory,
# add these directories to sys.path here. If the directory is relative to the
# documentation root, use os.path.abspath to make it absolute, like shown here.
#
# import os
# import sys
# sys.path.insert(0, os.path.abspath('.'))
```

(continues on next page)

(continued from previous page)

```
# -- General configuration -----

# If your documentation needs a minimal Sphinx version, state it here.
#
# needs_sphinx = '1.0'

# Add any Sphinx extension module names here, as strings. They can be
# extensions coming with Sphinx (named 'sphinx.ext.*') or your custom
# ones.
extensions = []

# Add any paths that contain templates here, relative to this directory.
templates_path = ['_templates']

# The suffix(es) of source filenames.
# You can specify multiple suffix as a list of string:
#
# source_suffix = ['.rst', '.md']
source_suffix = '.rst'

# The encoding of source files.
#
# source_encoding = 'utf-8-sig'

# The master toctree document.
root_doc = 'index'

# General information about the project.
project = 'test'
copyright = '2016, test'
author = 'test'

# The version info for the project you're documenting, acts as replacement for
# |version| and |release|, also used in various other places throughout the
# built documents.
#
# The short X.Y version.
version = 'test'
# The full version, including alpha/beta/rc tags.
release = 'test'

# The language for content autogenerated by Sphinx. Refer to documentation
# for a list of supported languages.
#
# This is also used if you do content translation via gettext catalogs.
# Usually you set "language" from the command line for these cases.
language = None

# There are two options for replacing |today|: either, you set today to some
# non-false value, then it is used:
#
```

(continues on next page)

(continued from previous page)

```

# today = "
#
# Else, today_fmt is used as the format for a strftime call.
#
# today_fmt = '%B %d, %Y'

# List of patterns, relative to source directory, that match files and
# directories to ignore when looking for source files.
# These patterns also affect html_static_path and html_extra_path
exclude_patterns = ['_build', 'Thumbs.db', '.DS_Store']

# The reST default role (used for this markup: `text`) to use for all
# documents.
#
# default_role = None

# If true, '()' will be appended to :func: etc. cross-reference text.
#
# add_function_parentheses = True

# If true, the current module name will be prepended to all description
# unit titles (such as .. function::).
#
# add_module_names = True

# If true, sectionauthor and moduleauthor directives will be shown in the
# output. They are ignored by default.
#
# show_authors = False

# The name of the Pygments (syntax highlighting) style to use.
pygments_style = 'sphinx'

# A list of ignored prefixes for module index sorting.
# modindex_common_prefix = []

# If true, keep warnings as "system message" paragraphs in the built documents.
# keep_warnings = False

# If true, `todo` and `todoList` produce output, else they produce nothing.
todo_include_todos = False


# -- Options for HTML output -----

# The theme to use for HTML and HTML Help pages.  See the documentation for
# a list of builtin themes.
#
html_theme = 'alabaster'

# Theme options are theme-specific and customize the look and feel of a theme
# further.  For a list of options available for each theme, see the

```

(continues on next page)

(continued from previous page)

```
# documentation.
#
# html_theme_options = {}

# Add any paths that contain custom themes here, relative to this directory.
# html_theme_path = []

# The name for this set of Sphinx documents.
# "<project> v<release> documentation" by default.
#
# html_title = 'test vtest'

# A shorter title for the navigation bar. Default is the same as html_title.
#
# html_short_title = None

# The name of an image file (relative to this directory) to place at the top
# of the sidebar.
#
# html_logo = None

# The name of an image file (relative to this directory) to use as a favicon of
# the docs. This file should be a Windows icon file (.ico) being 16x16 or 32x32
# pixels large.
#
# html_favicon = None

# Add any paths that contain custom static files (such as style sheets) here,
# relative to this directory. They are copied after the builtin static files,
# so a file named "default.css" will overwrite the builtin "default.css".
html_static_path = ['_static']

# Add any extra paths that contain custom files (such as robots.txt or
# .htaccess) here, relative to this directory. These files are copied
# directly to the root of the documentation.
#
# html_extra_path = []

# If not None, a 'Last updated on:' timestamp is inserted at every page
# bottom, using the given strftime format.
# The empty string is equivalent to '%b %d, %Y'.
#
# html_last_updated_fmt = None

# Custom sidebar templates, maps document names to template names.
#
# html_sidebars = {}

# Additional templates that should be rendered to pages, maps page names to
# template names.
#
# html_additional_pages = {}
```

(continues on next page)

(continued from previous page)

```
# If false, no module index is generated.
#
# html_domain_indices = True

# If false, no index is generated.
#
# html_use_index = True

# If true, the index is split into individual pages for each letter.
#
# html_split_index = False

# If true, links to the reST sources are added to the pages.
#
# html_show_sourcelink = True

# If true, "Created using Sphinx" is shown in the HTML footer. Default is True.
#
# html_show_sphinx = True

# If true, "(C) Copyright ..." is shown in the HTML footer. Default is True.
#
# html_show_copyright = True

# If true, an OpenSearch description file will be output, and all pages will
# contain a <link> tag referring to it. The value of this option must be the
# base URL from which the finished HTML is served.
#
# html_use_opensearch = "

# This is the file name suffix for HTML files (e.g. ".xhtml").
# html_file_suffix = None

# Language to be used for generating the HTML full-text search index.
# Sphinx supports the following languages:
#   'da', 'de', 'en', 'es', 'fi', 'fr', 'hu', 'it', 'ja'
#   'nl', 'no', 'pt', 'ro', 'ru', 'sv', 'tr', 'zh'
#
# html_search_language = 'en'

# A dictionary with options for the search language support, empty by default.
# 'ja' uses this config value.
# 'zh' user can custom change `jieba` dictionary path.
#
# html_search_options = {'type': 'default'}

# The name of a javascript file (relative to the configuration directory) that
# implements a search results scorer. If empty, the default will be used.
#
# html_search_scorer = 'scorer.js'
```

(continues on next page)

(continued from previous page)

```

# Output file base name for HTML help builder.
htmlhelp_basename = 'testdoc'

# -- Options for LaTeX output -----

latex_elements = {
    # The paper size ('letterpaper' or 'a4paper').
    #
    # 'papersize': 'letterpaper',

    # The font size ('10pt', '11pt' or '12pt').
    #
    # 'pointsize': '10pt',

    # Additional stuff for the LaTeX preamble.
    #
    # 'preamble': "",

    # Latex figure (float) alignment
    #
    # 'figure_align': 'htbp',
}

# Grouping the document tree into LaTeX files. List of tuples
# (source start file, target name, title,
#  author, documentclass [howto, manual, or own class]).
latex_documents = [
    (root_doc, 'test.tex', 'test Documentation',
     'test', 'manual'),
]

# The name of an image file (relative to this directory) to place at the top of
# the title page.
#
# latex_logo = None

# If true, show page references after internal links.
#
# latex_show_pagerefs = False

# If true, show URL addresses after external links.
#
# latex_show_urls = False

# Documents to append as an appendix to all manuals.
#
# latex_appendices = []

# If false, no module index is generated.
#
# latex_domain_indices = True

```

(continues on next page)

(continued from previous page)

```

# -- Options for manual page output -----

# One entry per manual page. List of tuples
# (source start file, name, description, authors, manual section).
man_pages = [
    (root_doc, 'test', 'test Documentation',
     [author], 1)
]

# If true, show URL addresses after external links.
#
# man_show_urls = False

# -- Options for Texinfo output -----

# Grouping the document tree into Texinfo files. List of tuples
# (source start file, target name, title, author,
#  dir menu entry, description, category)
texinfo_documents = [
    (root_doc, 'test', 'test Documentation',
     author, 'test', 'One line description of project.',
     'Miscellaneous'),
]

# Documents to append as an appendix to all manuals.
#
# texinfo_appendices = []

# If false, no module index is generated.
#
# texinfo_domain_indices = True

# How to display URL addresses: 'footnote', 'no', or 'inline'.
#
# texinfo_show_urls = 'footnote'

# If true, do not generate a @detailmenu in the "Top" node's menu.
#
# texinfo_no_detailmenu = False

# If false, do not generate in manual @ref nodes.
#
# texinfo_cross_references = False

# -- A random example -----

import sys, os
sys.path.insert(0, os.path.abspath('.'))
exclude_patterns = ['zzz']

```

(continues on next page)

(continued from previous page)

```
numfig = True
#language = 'ja'

extensions.append('sphinx.ext.todo')
extensions.append('sphinx.ext.autodoc')
#extensions.append('sphinx.ext.autosummary')
extensions.append('sphinx.ext.intersphinx')
extensions.append('sphinx.ext.mathjax')
extensions.append('sphinx.ext.viewcode')
extensions.append('sphinx.ext.graphviz')

autosummary_generate = True
html_theme = 'default'
#source_suffix = ['.rst', '.txt']
```

4.5 Builders

These are the built-in Sphinx builders. More builders can be added by *extensions*.

The builder's “name” must be given to the **-M** or **-b** command-line options of **sphinx-build** to select a builder.

The most common builders are:

html

Build HTML pages. This is the default builder.

dirhtml

Build HTML pages, but with a single directory per document. Makes for prettier URLs (no `.html`) if served from a webserver.

singlehtml

Build a single HTML with the whole content.

htmlhelp, qthelp, devhelp, epub

Build HTML files with additional information for building a documentation collection in one of these formats.

applehelp

Build an Apple Help Book. Requires **hiutil** and **codesign**, which are not Open Source and presently only available on Mac OS X 10.6 and higher.

latex

Build LaTeX sources that can be compiled to a PDF document using **pdflatex**.

man

Build manual pages in groff format for UNIX systems.

texinfo

Build Texinfo files that can be processed into Info files using **makeinfo**.

text

Build plain text files.

gettext

Build gettext-style message catalogs (`.pot` files).

doctest

Run all doctests in the documentation, if the *doctest* extension is enabled.

linkcheck

Check the integrity of all external links.

xml

Build Docutils-native XML files.

pseudoxml

Build compact pretty-printed “pseudo-XML” files displaying the internal structure of the intermediate document trees.

class sphinx.builders.html.StandaloneHTMLBuilder

This is the standard HTML builder. Its output is a directory with HTML files, complete with style sheets and optionally the reST sources. There are quite a few configuration values that customize the output of this builder, see the chapter *Options for HTML output* for details.

name = 'html'

The builder’s name, for the -b command line option.

format = 'html'

The builder’s output format, or ‘’ if no document output is produced.

supported_image_types: `list216[str217] = ['image/svg+xml', 'image/png', 'image/gif', 'image/jpeg']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

class sphinx.builders.dirhtml.DirectoryHTMLBuilder

This is a subclass of the standard HTML builder. Its output is a directory with HTML files, where each file is called `index.html` and placed in a subdirectory named like its page name. For example, the document `markup/rest.rst` will not result in an output file `markup/rest.html`, but `markup/rest/index.html`. When generating links between pages, the `index.html` is omitted, so that the URL would look like `markup/rest/`.

name = 'dirhtml'

The builder’s name, for the -b command line option.

format = 'html'

The builder’s output format, or ‘’ if no document output is produced.

supported_image_types: `list218[str219] = ['image/svg+xml', 'image/png', 'image/gif', 'image/jpeg']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 0.6.

class sphinx.builders.singlehtml.SingleFileHTMLBuilder

This is an HTML builder that combines the whole project in one output file. (Obviously this only works with smaller projects.) The file is named like the root document. No indices will be generated.

²¹⁶ <https://docs.python.org/3/library/stdtypes.html#list>

²¹⁷ <https://docs.python.org/3/library/stdtypes.html#str>

²¹⁸ <https://docs.python.org/3/library/stdtypes.html#list>

²¹⁹ <https://docs.python.org/3/library/stdtypes.html#str>

name = 'singlehtml'

The builder's name, for the -b command line option.

format = 'html'

The builder's output format, or '' if no document output is produced.

supported_image_types: [list](#)²²⁰[\[str](#)²²¹] = ['image/svg+xml', 'image/png', 'image/gif', 'image/jpeg']

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.0.

class sphinxcontrib.htmlhelp.HTMLHelpBuilder

This builder produces the same output as the standalone HTML builder, but also generates HTML Help support files that allow the Microsoft HTML Help Workshop to compile them into a CHM file.

name = 'htmlhelp'

The builder's name, for the -b command line option.

format = 'html'

The builder's output format, or '' if no document output is produced.

supported_image_types: [list](#)²²²[\[str](#)²²³] = ['image/png', 'image/gif', 'image/jpeg']

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

class sphinxcontrib.qthelp.QtHelpBuilder

This builder produces the same output as the standalone HTML builder, but also generates [Qt help](#)²²⁴ collection support files that allow the Qt collection generator to compile them.

Changed in version 2.0: Moved to sphinxcontrib.qthelp from sphinx.builders package.

name = 'qthelp'

The builder's name, for the -b command line option.

format = 'html'

The builder's output format, or '' if no document output is produced.

supported_image_types: [list](#)²²⁵[\[str](#)²²⁶] = ['image/svg+xml', 'image/png', 'image/gif', 'image/jpeg']

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

class sphinxcontrib.applehelp.AppleHelpBuilder

This builder produces an Apple Help Book based on the same output as the standalone HTML builder.

If the source directory contains any .lproj folders, the one corresponding to the selected language will have its contents merged with the generated output. These folders will be ignored by all other documentation types.

In order to generate a valid help book, this builder requires the command line tool **hiutil**, which is only available on Mac OS X 10.6 and above. You can disable the indexing step by setting

²²⁰ <https://docs.python.org/3/library/stdtypes.html#list>

²²¹ <https://docs.python.org/3/library/stdtypes.html#str>

²²² <https://docs.python.org/3/library/stdtypes.html#list>

²²³ <https://docs.python.org/3/library/stdtypes.html#str>

²²⁴ <https://doc.qt.io/qt-4.8/qthelp-framework.html>

²²⁵ <https://docs.python.org/3/library/stdtypes.html#list>

²²⁶ <https://docs.python.org/3/library/stdtypes.html#str>

`applehelp_disable_external_tools` to `True`, in which case the output will not be valid until `hiutil` has been run on all of the `.lproj` folders within the bundle.

name = `'applehelp'`

The builder's name, for the `-b` command line option.

format = `'html'`

The builder's output format, or `''` if no document output is produced.

supported_image_types: `list`²²⁷`[str`²²⁸`] = ['image/png', 'image/gif', 'image/jpeg', 'image/tiff', 'image/jp2', 'image/svg+xml']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.3.

Changed in version 2.0: Moved to `sphinxcontrib.applehelp` from `sphinx.builders` package.

class `sphinxcontrib.devhelp.DevhelpBuilder`

This builder produces the same output as the standalone HTML builder, but also generates `GNOME Devhelp`²²⁹ support file that allows the GNOME Devhelp reader to view them.

name = `'devhelp'`

The builder's name, for the `-b` command line option.

format = `'html'`

The builder's output format, or `''` if no document output is produced.

supported_image_types: `list`²³⁰`[str`²³¹`] = ['image/png', 'image/gif', 'image/jpeg']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Changed in version 2.0: Moved to `sphinxcontrib.devhelp` from `sphinx.builders` package.

class `sphinx.builders.epub3.Epub3Builder`

This builder produces the same output as the standalone HTML builder, but also generates an *epub* file for ebook readers. See *Epub info* for details about it. For definition of the epub format, have a look at <https://idpf.org/epub> or <https://en.wikipedia.org/wiki/EPUB>. The builder creates *EPUB 3* files.

name = `'epub'`

The builder's name, for the `-b` command line option.

format = `'html'`

The builder's output format, or `''` if no document output is produced.

supported_image_types: `list`²³²`[str`²³³`] = ['image/svg+xml', 'image/png', 'image/gif', 'image/jpeg']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.4.

Changed in version 1.5: Since Sphinx 1.5, the `epub3` builder is used as the default `epub` builder.

²²⁷ <https://docs.python.org/3/library/stdtypes.html#list>

²²⁸ <https://docs.python.org/3/library/stdtypes.html#str>

²²⁹ <https://wiki.gnome.org/Apps/Devhelp>

²³⁰ <https://docs.python.org/3/library/stdtypes.html#list>

²³¹ <https://docs.python.org/3/library/stdtypes.html#str>

²³² <https://docs.python.org/3/library/stdtypes.html#list>

²³³ <https://docs.python.org/3/library/stdtypes.html#str>

class sphinx.builders.latex.LaTeXBuilder

This builder produces LaTeX source files in the output directory. The actual PDF builds happen inside this output directory and need to be triggered in a second step. This can be done via **make all-pdf** there. To combine the two steps into only one, use *sphinx-build -M* (i.e. `-M latexpdf` not `-b latexpdf`) or **make latexpdf** at the project root.

See *latex_documents* and the chapter *Options for LaTeX output* for available options.

PDF builds need a sufficiently complete LaTeX installation. The testing is currently (since 5.3.0) done on Ubuntu 22.04LTS, whose LaTeX distribution matches upstream TeXLive 2021 as of 2022/02/04, but PDF builds can be successfully done on much older LaTeX installations.

At any rate, on Ubuntu for example, following packages must all be present:

- `texlive-latex-recommended`
- `texlive-fonts-recommended`
- `tex-gyre` (if *latex_engine* left to default)
- `texlive-latex-extra`
- `latexmk`

Changed in version 4.0.0: TeX Gyre fonts now required for 'pdflatex' engine (default).

Additional packages are needed in some circumstances:

- `texlive-lang-cyrillic` for Cyrillic (and also then `cm-super` if using the default fonts),
- `texlive-lang-greek` for Greek (and also then `cm-super` if using the default fonts),
- `texlive-xetex` if *latex_engine* is 'xelatex',
- `texlive-luatex` if *latex_engine* is 'lualatex',
- `fonts-freefont-otf` if *latex_engine* is either 'xelatex' or 'lualatex'.

Note: Since 1.6, `make latexpdf` uses on GNU/Linux and macOS **latexmk**, as it makes sure the needed number of runs is automatically executed. On Windows the PDF builds execute a fix number of LaTeX runs (three, then `makeindex`, then two more).

One can pass to `latexmk` options via the `LATEXMKOPTS` Makefile variable. For example:

```
make latexpdf LATEXMKOPTS="-silent"
```

reduces console output to a minimum.

Also, if `latexmk` is at version 4.52b or higher (January 2017) `LATEXMKOPTS="-xelatex"` speeds up PDF builds via XeLaTeX in case of numerous graphics inclusions.

To pass options directly to the `(pdf|xe|lua)latex` binary, use variable `LATEXOPTS`, for example:

```
make latexpdf LATEXOPTS="--halt-on-error"
```

name = 'latex'

The builder's name, for the `-b` command line option.

format = 'latex'

The builder's output format, or '' if no document output is produced.

```
supported_image_types: list234[str235] = ['application/pdf', 'image/png',
'image/jpeg']
```

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Note that a direct PDF builder is being provided by [rinohtype](#)²³⁶. The builder's name is `rinoh`. Refer to the [rinohtype manual](#)²³⁷ for details.

class sphinx.builders.text.TextBuilder

This builder produces a text file for each reST file – this is almost the same as the reST source, but with much of the markup stripped for better readability.

```
name = 'text'
```

The builder's name, for the `-b` command line option.

```
format = 'text'
```

The builder's output format, or `''` if no document output is produced.

```
supported_image_types: list238[str239] = []
```

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 0.4.

class sphinx.builders.manpage.ManualPageBuilder

This builder produces manual pages in the groff format. You have to specify which documents are to be included in which manual pages via the `man_pages` configuration value.

```
name = 'man'
```

The builder's name, for the `-b` command line option.

```
format = 'man'
```

The builder's output format, or `''` if no document output is produced.

```
supported_image_types: list240[str241] = []
```

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.0.

class sphinx.builders.texinfo.TexinfoBuilder

This builder produces Texinfo files that can be processed into Info files by the `makeinfo` program. You have to specify which documents are to be included in which Texinfo files via the `texinfo_documents` configuration value.

The Info format is the basis of the on-line help system used by GNU Emacs and the terminal-based program `info`. See [Texinfo info](#) for more details. The Texinfo format is the official documentation system used by the GNU project. More information on Texinfo can be found at <https://www.gnu.org/software/texinfo/>.

```
name = 'texinfo'
```

The builder's name, for the `-b` command line option.

²³⁴ <https://docs.python.org/3/library/stdtypes.html#list>

²³⁵ <https://docs.python.org/3/library/stdtypes.html#str>

²³⁶ <https://github.com/brechtm/rinohtype>

²³⁷ <https://www.mos6581.org/rinohtype/master/quickstart.html#sphinx-builder>

²³⁸ <https://docs.python.org/3/library/stdtypes.html#list>

²³⁹ <https://docs.python.org/3/library/stdtypes.html#str>

²⁴⁰ <https://docs.python.org/3/library/stdtypes.html#list>

²⁴¹ <https://docs.python.org/3/library/stdtypes.html#str>

format = 'texinfo'

The builder's output format, or "" if no document output is produced.

supported_image_types: `list`²⁴²`[str`²⁴³`] = ['image/png', 'image/jpeg', 'image/gif']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.1.

class sphinxcontrib.serializinghtml.SerializingHTMLBuilder

This builder uses a module that implements the Python serialization API (pickle, simplejson, phpserialize, and others) to dump the generated HTML documentation. The pickle builder is a subclass of it.

A concrete subclass of this builder serializing to the [PHP serialization](#)²⁴⁴ format could look like this:

```
import phpserialize

class PHPSerializedBuilder(SerializingHTMLBuilder):
    name = 'phpserialized'
    implementation = phpserialize
    out_suffix = '.file.phpdump'
    globalcontext_filename = 'globalcontext.phpdump'
    searchindex_filename = 'searchindex.phpdump'
```

implementation

A module that implements `dump()`, `load()`, `dumps()` and `loads()` functions that conform to the functions with the same names from the pickle module. Known modules implementing this interface are simplejson, phpserialize, plistlib, and others.

out_suffix

The suffix for all regular files.

globalcontext_filename

The filename for the file that contains the “global context”. This is a dict with some general configuration values such as the name of the project.

searchindex_filename

The filename for the search index Sphinx generates.

See [Serialization builder details](#) for details about the output format.

Added in version 0.5.

class sphinxcontrib.serializinghtml.PickleHTMLBuilder

This builder produces a directory with pickle files containing mostly HTML fragments and TOC information, for use of a web application (or custom postprocessing tool) that doesn't use the standard HTML templates.

See [Serialization builder details](#) for details about the output format.

name = 'pickle'

The builder's name, for the -b command line option.

The old name web still works as well.

²⁴² <https://docs.python.org/3/library/stdtypes.html#list>

²⁴³ <https://docs.python.org/3/library/stdtypes.html#str>

²⁴⁴ <https://pypi.org/project/phpserialize/>

format = 'html'

The builder's output format, or '' if no document output is produced.

supported_image_types: `list`²⁴⁵`[str`²⁴⁶`] = ['image/svg+xml', 'image/png', 'image/gif', 'image/jpeg']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

The file suffix is `.fpickle`. The global context is called `globalcontext.pickle`, the search index `searchindex.pickle`.

class sphinxcontrib.serializinghtml.JSONHTMLBuilder

This builder produces a directory with JSON files containing mostly HTML fragments and TOC information, for use of a web application (or custom postprocessing tool) that doesn't use the standard HTML templates.

See *Serialization builder details* for details about the output format.

name = 'json'

The builder's name, for the `-b` command line option.

format = 'html'

The builder's output format, or '' if no document output is produced.

supported_image_types: `list`²⁴⁷`[str`²⁴⁸`] = ['image/svg+xml', 'image/png', 'image/gif', 'image/jpeg']`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

The file suffix is `.fjson`. The global context is called `globalcontext.json`, the search index `searchindex.json`.

Added in version 0.5.

class sphinx.builders.gettext.MessageCatalogBuilder

This builder produces gettext-style message catalogs. Each top-level file or subdirectory grows a single `.pot` catalog template.

See the documentation on *Internationalization* for further reference.

name = 'gettext'

The builder's name, for the `-b` command line option.

format = ''

The builder's output format, or '' if no document output is produced.

supported_image_types: `list`²⁴⁹`[str`²⁵⁰`] = []`

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.1.

²⁴⁵ <https://docs.python.org/3/library/stdtypes.html#list>

²⁴⁶ <https://docs.python.org/3/library/stdtypes.html#str>

²⁴⁷ <https://docs.python.org/3/library/stdtypes.html#list>

²⁴⁸ <https://docs.python.org/3/library/stdtypes.html#str>

²⁴⁹ <https://docs.python.org/3/library/stdtypes.html#list>

²⁵⁰ <https://docs.python.org/3/library/stdtypes.html#str>

class sphinx.builders.changes.ChangesBuilder

This builder produces an HTML overview of all *versionadded*, *versionchanged*, *deprecated* and *versionremoved* directives for the current *version*. This is useful to generate a changelog file, for example.

name = 'changes'

The builder's name, for the -b command line option.

format = ''

The builder's output format, or '' if no document output is produced.

supported_image_types: [list](https://docs.python.org/3/library/stdtypes.html#list)²⁵¹ [[str](https://docs.python.org/3/library/stdtypes.html#str)²⁵²] = []

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

class sphinx.builders.dummy.DummyBuilder

This builder produces no output. The input is only parsed and checked for consistency. This is useful for linting purposes.

name = 'dummy'

The builder's name, for the -b command line option.

supported_image_types: [list](https://docs.python.org/3/library/stdtypes.html#list)²⁵³ [[str](https://docs.python.org/3/library/stdtypes.html#str)²⁵⁴] = []

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.4.

class sphinx.builders.linkcheck.CheckExternalLinksBuilder

This builder scans all documents for external links, tries to open them with `requests`, and writes an overview which ones are broken and redirected to standard output and to `output.txt` in the output directory.

name = 'linkcheck'

The builder's name, for the -b command line option.

format = ''

The builder's output format, or '' if no document output is produced.

supported_image_types: [list](https://docs.python.org/3/library/stdtypes.html#list)²⁵⁵ [[str](https://docs.python.org/3/library/stdtypes.html#str)²⁵⁶] = []

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Changed in version 1.5: Since Sphinx 1.5, the linkcheck builder uses the `requests` module.

Changed in version 3.4: The linkcheck builder retries links when servers apply rate limits.

class sphinx.builders.xml.XMLBuilder

This builder produces Docutils-native XML files. The output can be transformed with standard XML tools such as XSLT processors into arbitrary final forms.

name = 'xml'

The builder's name, for the -b command line option.

²⁵¹ <https://docs.python.org/3/library/stdtypes.html#list>

²⁵² <https://docs.python.org/3/library/stdtypes.html#str>

²⁵³ <https://docs.python.org/3/library/stdtypes.html#list>

²⁵⁴ <https://docs.python.org/3/library/stdtypes.html#str>

²⁵⁵ <https://docs.python.org/3/library/stdtypes.html#list>

²⁵⁶ <https://docs.python.org/3/library/stdtypes.html#str>

format = 'xml'

The builder's output format, or '' if no document output is produced.

supported_image_types: [list](#)²⁵⁷[[str](#)²⁵⁸] = []

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.2.

class sphinx.builders.xml.PseudoXMLBuilder

This builder is used for debugging the Sphinx/Docutils “Reader to Transform to Writer” pipeline. It produces compact pretty-printed “pseudo-XML”, files where nesting is indicated by indentation (no end-tags). External attributes for all elements are output, and internal attributes for any leftover “pending” elements are also given.

name = 'pseudoxml'

The builder's name, for the -b command line option.

format = 'pseudoxml'

The builder's output format, or '' if no document output is produced.

supported_image_types: [list](#)²⁵⁹[[str](#)²⁶⁰] = []

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

Added in version 1.2.

Built-in Sphinx extensions that offer more builders are:

- [doctest](#)
- [coverage](#)

Serialization builder details

All serialization builders outputs one file per source file and a few special files. They also copy the reST source files in the directory `_sources` under the output directory.

The [PickleHTMLBuilder](#) is a builtin subclass that implements the pickle serialization interface.

The files per source file have the extensions of `out_suffix`, and are arranged in directories just as the source files are. They unserialize to a dictionary (or dictionary like structure) with these keys:

body

The HTML “body” (that is, the HTML rendering of the source file), as rendered by the HTML translator.

title

The title of the document, as HTML (may contain markup).

toc

The table of contents for the file, rendered as an HTML ``.

display_toc

A boolean that is True if the `toc` contains more than one entry.

current_page_name

The document name of the current file.

²⁵⁷ <https://docs.python.org/3/library/stdtypes.html#list>

²⁵⁸ <https://docs.python.org/3/library/stdtypes.html#str>

²⁵⁹ <https://docs.python.org/3/library/stdtypes.html#list>

²⁶⁰ <https://docs.python.org/3/library/stdtypes.html#str>

parents, prev and next

Information about related chapters in the TOC tree. Each relation is a dictionary with the keys `link` (HREF for the relation) and `title` (title of the related document, as HTML). `parents` is a list of relations, while `prev` and `next` are a single relation.

sourcename

The name of the source file under `_sources`.

The special files are located in the root output directory. They are:

SerializingHTMLBuilder.globalcontext_filename

A pickled dict with these keys:

project, copyright, release, version

The same values as given in the configuration file.

style

html_style.

last_updated

Date of last build.

builder

Name of the used builder, in the case of pickles this is always `'pickle'`.

titles

A dictionary of all documents' titles, as HTML strings.

SerializingHTMLBuilder.searchindex_filename

An index that can be used for searching the documentation. It is a pickled list with these entries:

- A list of indexed docnames.
- A list of document titles, as HTML strings, in the same order as the first list.
- A dict mapping word roots (processed by an English-language stemmer) to a list of integers, which are indices into the first list.

environment.pickle

The build environment. This is always a pickle file, independent of the builder and a copy of the environment that was used when the builder was started.

Todo: Document common members.

Unlike the other pickle files this pickle file requires that the `sphinx` package is available on unpickling.

4.6 Domains

Added in version 1.0.

Originally, Sphinx was conceived for a single project, the documentation of the Python language. Shortly afterwards, it was made available for everyone as a documentation tool, but the documentation of Python modules remained deeply built in – the most fundamental directives, like `function`, were designed for Python objects. Since Sphinx has become somewhat popular, interest developed in using it for many different purposes: C/C++ projects, JavaScript, or even reStructuredText markup (like in this documentation).

While this was always possible, it is now much easier to easily support documentation of projects using different programming languages or even ones not supported by the main Sphinx distribution, by providing a **domain** for every such purpose.

A domain is a collection of markup (reStructuredText *directives* and *roles*) to describe and link to *objects* belonging together, e.g. elements of a programming language. Directive and role names in a domain have names like `domain:name`, e.g. `py:function`. Domains can also provide custom indices (like the Python Module Index).

Having domains means that there are no naming problems when one set of documentation wants to refer to e.g. C++ and Python classes. It also means that extensions that support the documentation of whole new languages are much easier to write.

This section describes what the domains that are included with Sphinx provide. The domain API is documented as well, in the section *Domain API*.

Basic Markup

Most domains provide a number of *object description directives*, used to describe specific objects provided by modules. Each directive requires one or more signatures to provide basic information about what is being described, and the content should be the description.

A domain will typically keep an internal index of all entities to aid cross-referencing. Typically it will also add entries in the shown general index. If you want to suppress the addition of an entry in the shown index, you can give the directive option flag `:no-index-entry:`. If you want to exclude the object description from the table of contents, you can give the directive option flag `:no-contents-entry:`. If you want to typeset an object description, without even making it available for cross-referencing, you can give the directive option flag `:no-index:` (which implies `:no-index-entry:`). If you do not want to typeset anything, you can give the directive option flag `:no-typesetting:`. This can for example be used to create only a target and index entry for later reference. Though, note that not every directive in every domain may support these options.

Added in version 3.2: The directive option `noindexentry` in the Python, C, C++, and Javascript domains.

Added in version 5.2.3: The directive option `:nocontentsentry:` in the Python, C, C++, Javascript, and reStructuredText domains.

Added in version 7.2: The directive option `no-typesetting` in the Python, C, C++, Javascript, and reStructuredText domains.

Changed in version 7.2:

- The directive option `:noindex:` was renamed to `:no-index:`.
- The directive option `:noindexentry:` was renamed to `:no-index-entry:`.
- The directive option `:nocontentsentry:` was renamed to `:no-contents-entry:`.

The previous names are retained as aliases, but will be deprecated and removed in a future version of Sphinx.

An example using a Python domain directive:

```
.. py:function:: spam(eggs)
                ham(eggs)

    Spam or ham the foo.
```

This describes the two Python functions `spam` and `ham`. (Note that when signatures become too long, you can break them if you add a backslash to lines that are continued in the next line. Example:

```
.. py:function:: filterwarnings(action, message='', category=Warning, \
                               module='', lineno=0, append=False)
    :no-index:
```

(This example also shows how to use the `:no-index:` flag.)

The domains also provide roles that link back to these object descriptions. For example, to link to one of the functions described in the example above, you could say

The function `:py:func:`spam`` does a similar thing.

As you can see, both directive and role names contain the domain name and the directive name.

The directive option `:no-typesetting:` can be used to create a target (and index entry) which can later be referenced by the roles provided by the domain. This is particularly useful for literate programming:

```
.. py:function:: spam(eggs)
   :no-typesetting:
```

```
.. code::
```

```
def spam(eggs):
    pass
```

The function `:py:func:`spam`` does nothing.

Default Domain

For documentation describing objects from solely one domain, authors will not have to state again its name at each directive, role, etc... after having specified a default. This can be done either via the config value `primary_domain` or via this directive:

```
.. default-domain:: name
```

Select a new default domain. While the `primary_domain` selects a global default, this only has an effect within the same file.

If no other default is selected, the Python domain (named `py`) is the default one, mostly for compatibility with documentation written for older versions of Sphinx.

Directives and roles that belong to the default domain can be mentioned without giving the domain name, i.e.

```
.. function:: pyfunc()
```

Describes a Python function.

Reference to `:func:`pyfunc``.

Cross-referencing syntax

For cross-reference roles provided by domains, the same facilities exist as for general cross-references. See *Cross-referencing syntax*.

In short:

- You may supply an explicit title and reference target: `:role:`title <target>`` will refer to *target*, but the link text will be *title*.
- If you prefix the content with `!`, no reference/hyperlink will be created.
- If you prefix the content with `~`, the link text will only be the last component of the target. For example, `:py:meth:`~Queue.Queue.get`` will refer to `Queue.Queue.get` but only display `get` as the link text.

Built-in domains

The following domains are included within Sphinx:

The Standard Domain

Added in version 1.0.

The so-called “standard” domain collects all markup that doesn’t warrant a domain of its own. Its directives and roles are not prefixed with a domain name.

The standard domain is also where custom object descriptions, added using the [add_object_type\(\)](#) API, are placed.

There is a set of directives allowing documenting command-line programs:

.. option:: name args, name args, ...

Describes a command line argument or switch. Option argument names should be enclosed in angle brackets. Examples:

```
.. option:: dest_dir

    Destination directory.

.. option:: -m <module>, --module <module>

    Run a module as a script.
```

The directive will create cross-reference targets for the given options, referenceable by [option](#) (in the example case, you’d use something like `:option: `dest_dir``, `:option: `-m``, or `:option: `--module``).

Changed in version 5.3: One can cross-reference including an option value: `:option: `--module=foobar``, `:option: --module=foobar` or `:option: `--module foobar``.

Use [option_emphasise_placeholders](#) for parsing of “variable part” of a literal text (similarly to the [samp](#) role).

`cmdoption` directive is a deprecated alias for the `option` directive.

.. envvar:: name

Describes an environment variable that the documented code or program uses or defines. Referenceable by [envvar](#).

.. program:: name

Like [py:currentmodule](#), this directive produces no output. Instead, it serves to notify Sphinx that all following [option](#) directives document options for the program called *name*.

If you use [program](#), you have to qualify the references in your [option](#) roles by the program name, so if you have the following situation

```
.. program:: rm

.. option:: -r

    Work recursively.

.. program:: svn
```

(continues on next page)

(continued from previous page)

```
.. option:: -r <revision>
```

Specify the revision to work upon.

then `:option:`rm -r`` would refer to the first option, while `:option:`svn -r`` would refer to the second one.

If `None` is passed to the argument, the directive will reset the current program name.

The program name may contain spaces (in case you want to document subcommands like `svn add` and `svn commit` separately).

Added in version 0.5.

There is also a very generic object description directive, which is not tied to any domain:

```
.. describe:: text
```

```
.. object:: text
```

This directive produces the same formatting as the specific ones provided by domains, but does not create index entries or cross-referencing targets. Example:

```
.. describe:: PAPER
```

You can set this variable to select a paper size.

The C Domain

Added in version 1.0.

The C domain (name `c`) is suited for documentation of C API.

```
.. c:member:: declaration
```

```
.. c:var:: declaration
```

Describes a C struct member or variable. Example signature:

```
.. c:member:: PyObject *PyTypeObject.tp_bases
```

The difference between the two directives is only cosmetic.

```
.. c:function:: function prototype
```

Describes a C function. The signature should be given as in C, e.g.:

```
.. c:function:: PyObject *PyType_GenericAlloc(PyTypeObject *type, Py_ssize_t nitems)
```

Note that you don't have to backslash-escape asterisks in the signature, as it is not parsed by the reST inliner.

In the description of a function you can use the following info fields (see also [Info field lists](#)).

- `param`, `parameter`, `arg`, `argument`: Description of a parameter.
- `type`: Type of a parameter, written as if passed to the `c:expr` role.
- `returns`, `return`: Description of the return value.
- `rtype`: Return type, written as if passed to the `c:expr` role.
- `retval`, `retvals`: An alternative to `returns` for describing the result of the function.

Added in version 4.3: The `retval` field type.

For example:

```
.. c:function:: PyObject *PyType_GenericAlloc(PyTypeObject *type, Py_ssize_t nitems)

:param type: description of the first parameter.
:param nitems: description of the second parameter.
:returns: a result.
:retval NULL: under some conditions.
:retval NULL: under some other conditions as well.
```

which renders as

`PyObject261 *PyType_GenericAlloc(PyTypeObject262 *type, Py_ssize_t263 nitems)`

No-contents-entry

No-index-entry

Parameters

- **type** – description of the first parameter.
- **nitems** – description of the second parameter.

Returns

a result.

Return values

- **NULL** – under some conditions.
- **NULL** – under some other conditions as well.

:single-line-parameter-list: (no value)

Ensures that the function's parameters will be emitted on a single logical line, overriding `c_maximum_signature_line_length` and `maximum_signature_line_length`.

Added in version 7.1.

```
.. c:macro:: name
```

```
.. c:macro:: name(arg list)
```

Describes a C macro, i.e., a C-language `#define`, without the replacement text.

In the description of a macro you can use the same info fields as for the `c:function` directive.

Added in version 3.0: The function style variant.

:single-line-parameter-list: (no value)

Ensures that the macro's parameters will be emitted on a single logical line, overriding `c_maximum_signature_line_length` and `maximum_signature_line_length`.

Added in version 7.1.

```
.. c:struct:: name
```

Describes a C struct.

Added in version 3.0.

²⁶¹ <https://docs.python.org/3/c-api/structures.html#c.PyObject>

²⁶¹ <https://docs.python.org/3/c-api/structures.html#c.PyObject>

²⁶² <https://docs.python.org/3/c-api/type.html#c.PyTypeObject>

²⁶³ https://docs.python.org/3/c-api/intro.html#c.Py_ssize_t

.. c:union:: name
Describes a C union.
Added in version 3.0.

.. c:enum:: name
Describes a C enum.
Added in version 3.0.

.. c:enumerator:: name
Describes a C enumerator.
Added in version 3.0.

.. c:type:: typedef-like declaration

.. c:type:: name
Describes a C type, either as a typedef, or the alias for an unspecified type.

Cross-referencing C constructs

The following roles create cross-references to C-language constructs if they are defined in the documentation:

:c:member:
:c:data:
:c:var:
:c:func:
:c:macro:
:c:struct:
:c:union:
:c:enum:
:c:enumerator:
:c:type:

Reference a C declaration, as defined above. Note that [c:member](#), [c:data](#), and [c:var](#) are equivalent.

Added in version 3.0: The var, struct, union, enum, and enumerator roles.

Anonymous Entities

C supports anonymous structs, enums, and unions. For the sake of documentation they must be given some name that starts with @, e.g., @42 or @data. These names can also be used in cross-references, though nested symbols will be found even when omitted. The @... name will always be rendered as **[anonymous]** (possibly as a link).

Example:

```
.. c:struct:: Data
    .. c:union:: @data
        .. c:var:: int a
        .. c:var:: double b
```

(continues on next page)

(continued from previous page)

```
Explicit ref: :c:var:`Data.@data.a`. Short-hand ref: :c:var:`Data.a`.
```

This will be rendered as:

```
struct Data
    union [anonymous]
        int a
        double b
```

Explicit ref: `Data.[anonymous].a`. Short-hand ref: `Data.a`.

Added in version 3.0.

Aliasing Declarations

Sometimes it may be helpful list declarations elsewhere than their main documentation, e.g., when creating a synopsis of an interface. The following directive can be used for this purpose.

.. c:alias:: name

Insert one or more alias declarations. Each entity can be specified as they can in the `c:any` role.

For example:

```
.. c:var:: int data
.. c:function:: int f(double k)

.. c:alias:: data
    f
```

becomes

```
int data
int f(double k)
int data
int f(double k)
```

Added in version 3.2.

Options

:maxdepth: int

Insert nested declarations as well, up to the total depth given. Use 0 for infinite depth and 1 for just the mentioned declaration. Defaults to 1.

Added in version 3.3.

:noroot:

Skip the mentioned declarations and only render nested declarations. Requires `maxdepth` either 0 or at least 2.

Added in version 3.5.

Inline Expressions and Types

:c:expr:

:c:texpr:

Insert a C expression or type either as inline code (`cpp:expr`) or inline text (`cpp:texpr`). For example:

```
.. c:var:: int a = 42
```

```
.. c:function:: int f(int i)
```

An expression: `:c:expr:`a * f(a)`` (or as text: `:c:texpr:`a * f(a)``).

A type: `:c:expr:`const Data*``
(or as text `:c:texpr:`const Data*``).

will be rendered as follows:

```
int a = 42
```

```
int f(int i)
```

An expression: `a * f(a)` (or as text: `a * f(a)`).

A type: `const Data*` (or as text `const Data*`).

Added in version 3.0.

Namespacing

Added in version 3.1.

The C language itself does not support namespacing, but it can sometimes be useful to emulate it in documentation, e.g., to show alternate declarations. The feature may also be used to document members of structs/unions/enums separate from their parent declaration.

The current scope can be changed using three namespace directives. They manage a stack declarations where `c:namespace` resets the stack and changes a given scope.

The `c:namespace-push` directive changes the scope to a given inner scope of the current one.

The `c:namespace-pop` directive undoes the most recent `c:namespace-push` directive.

.. c:namespace:: scope specification

Changes the current scope for the subsequent objects to the given scope, and resets the namespace directive stack. Note that nested scopes can be specified by separating with a dot, e.g.:

```
.. c:namespace:: Namespace1.Namespace2.SomeStruct.AnInnerStruct
```

All subsequent objects will be defined as if their name were declared with the scope prepended. The subsequent cross-references will be searched for starting in the current scope.

Using `NULL` or `0` as the scope will change to global scope.

.. c:namespace-push:: scope specification

Change the scope relatively to the current scope. For example, after:

```
.. c:namespace:: A.B
.. c:namespace-push:: C.D
```

the current scope will be `A.B.C.D`.

.. **c:namespace-pop::**

Undo the previous `c:namespace-push` directive (*not* just pop a scope). For example, after:

```
.. c:namespace:: A.B
.. c:namespace-push:: C.D
.. c:namespace-pop::
```

the current scope will be `A.B` (*not* `A.B.C`).

If no previous `c:namespace-push` directive has been used, but only a `c:namespace` directive, then the current scope will be reset to global scope. That is, `.. c:namespace:: A.B` is equivalent to:

```
.. c:namespace:: NULL
.. c:namespace-push:: A.B
```

Configuration Variables

See *Options for the C domain*.

The C++ Domain

Added in version 1.0.

The C++ domain (name **cpp**) supports documenting C++ projects.

Directives for Declaring Entities

The following directives are available. All declarations can start with a visibility statement (`public`, `private` or `protected`).

.. **cpp:class::** class specifier
 .. **cpp:struct::** class specifier

Describe a class/struct, possibly with specification of inheritance, e.g.,:

```
.. cpp:class:: MyClass : public MyBase, MyOtherBase
```

The difference between `cpp:class` and `cpp:struct` is only cosmetic: the prefix rendered in the output, and the specifier shown in the index.

The class can be directly declared inside a nested scope, e.g.,:

```
.. cpp:class:: OuterScope::MyClass : public MyBase, MyOtherBase
```

A class template can be declared:

```
.. cpp:class:: template<typename T, std::size_t N> std::array
```

or with a line break:

```
.. cpp:class:: template<typename T, std::size_t N> \  
    std::array
```

Full and partial template specialisations can be declared:

```
.. cpp:class:: template<> \  
    std::array<bool, 256>  
  
.. cpp:class:: template<typename T> \  
    std::array<T, 42>
```

Added in version 2.0: The `cpp:struct` directive.

.. **cpp:function::** (member) function prototype

Describe a function or member function, e.g.,:

```
.. cpp:function:: bool myMethod(int arg1, std::string arg2)  
  
    A function with parameters and types.  
  
.. cpp:function:: bool myMethod(int, double)  
  
    A function with unnamed parameters.  
  
.. cpp:function:: const T &MyClass::operator[](std::size_t i) const  
  
    An overload for the indexing operator.  
  
.. cpp:function:: operator bool() const  
  
    A casting operator.  
  
.. cpp:function:: constexpr void foo(std::string &bar[2]) noexcept  
  
    A constexpr function.  
  
.. cpp:function:: MyClass::MyClass(const MyClass&) = default  
  
    A copy constructor with default implementation.
```

Function templates can also be described:

```
.. cpp:function:: template<typename U> \  
    void print(U &&u)
```

and function template specialisations:

```
.. cpp:function:: template<> \  
    void print(int i)
```

:single-line-parameter-list: (no value)

Ensures that the function's parameters will be emitted on a single logical line, overriding *cpp_maximum_signature_line_length* and *maximum_signature_line_length*.

Added in version 7.1.

.. **cpp:member::** (member) variable declaration

.. **cpp:var::** (member) variable declaration

Describe a variable or member variable, e.g.,:

```
.. cpp:member:: std::string MyClass::myMember
.. cpp:var:: std::string MyClass::myOtherMember[N][M]
.. cpp:member:: int a = 42
```

Variable templates can also be described:

```
.. cpp:member:: template<class T> \
    constexpr T pi = T(3.1415926535897932385)
```

.. **cpp:type::** typedef declaration

.. **cpp:type::** name

.. **cpp:type::** type alias declaration

Describe a type as in a typedef declaration, a type alias declaration, or simply the name of a type with unspecified type, e.g.,:

```
.. cpp:type:: std::vector<int> MyList

    A typedef-like declaration of a type.

.. cpp:type:: MyContainer::const_iterator

    Declaration of a type alias with unspecified type.

.. cpp:type:: MyType = std::unordered_map<int, std::string>

    Declaration of a type alias.
```

A type alias can also be templated:

```
.. cpp:type:: template<typename T> \
    MyContainer = std::vector<T>
```

The example are rendered as follows.

typedef std::vector<int> **MyList**

A typedef-like declaration of a type.

type MyContainer::const_iterator

Declaration of a type alias with unspecified type.

using **MyType** = std::unordered_map<int, std::string>

Declaration of a type alias.

template<typename T>

```
using MyContainer = std::vector<T>
```

.. **cpp:enum::** unscoped enum declaration

.. **cpp:enum-struct::** scoped enum declaration

.. **cpp:enum-class::** scoped enum declaration

Describe a (scoped) enum, possibly with the underlying type specified. Any enumerators declared inside an unscoped enum will be declared both in the enum scope and in the parent scope. Examples:

```
.. cpp:enum:: MyEnum
```

An unscoped enum.

```
.. cpp:enum:: MySpecificEnum : long
```

An unscoped enum with specified underlying type.

```
.. cpp:enum-class:: MyScopedEnum
```

A scoped enum.

```
.. cpp:enum-struct:: protected MyScopedVisibilityEnum : std::underlying_type  
↳<MySpecificEnum>::type
```

A scoped enum with non-default visibility, and with a specified underlying type.

.. **cpp:enumerator::** name

.. **cpp:enumerator::** name = constant

Describe an enumerator, optionally with its value defined, e.g.,:

```
.. cpp:enumerator:: MyEnum::myEnumerator
```

```
.. cpp:enumerator:: MyEnum::myOtherEnumerator = 42
```

.. **cpp:union::** name

Describe a union.

Added in version 1.8.

.. **cpp:concept::** template-parameter-list name

Warning: The support for concepts is experimental. It is based on the current draft standard and the Concepts Technical Specification. The features may change as they evolve.

Describe a concept. It must have exactly 1 template parameter list. The name may be a nested name. Example:

```
.. cpp:concept:: template<typename It> std::Iterator
```

Proxy to an element of a notional sequence that can be compared, indirected, or incremented.

****Notation****

(continues on next page)

(continued from previous page)

```

.. cpp:var:: It r

    An lvalue.

**Valid Expressions**

- :cpp:expr:`*r`, when :cpp:expr:`r` is dereferenceable.
- :cpp:expr:`++r`, with return type :cpp:expr:`It&`, when
  :cpp:expr:`r` is incrementable.

```

This will render as follows:

```

template<typename It>
concept std::Iterator

```

Proxy to an element of a notional sequence that can be compared, indirected, or incremented.

Notation

It **r**

An lvalue.

Valid Expressions

- **r*, when *r* is dereferenceable.
- *++r*, with return type *It&*, when *r* is incrementable.

Added in version 1.5.

Options

Some directives support options:

- `:no-index-entry:` and `:no-contents-entry:`, see *Basic Markup*.
- `:tparam-line-spec:`, for templated declarations. If specified, each template parameter will be rendered on a separate line.

Added in version 1.6.

Anonymous Entities

C++ supports anonymous namespaces, classes, enums, and unions. For the sake of documentation they must be given some name that starts with @, e.g., @42 or @data. These names can also be used in cross-references and (type) expressions, though nested symbols will be found even when omitted. The @. . . name will always be rendered as **[anonymou**s] (possibly as a link).

Example:

```

.. cpp:class:: Data

.. cpp:union:: @data

.. cpp:var:: int a

```

(continues on next page)

(continued from previous page)

```
.. cpp:var:: double b
```

Explicit ref: `:cpp:var:`Data::@data::a``. Short-hand ref: `:cpp:var:`Data::a``.

This will be rendered as:

class **Data**

```
    union [anonymous]
```

```
        int a
```

```
        double b
```

Explicit ref: `Data::[anonymous]::a`. Short-hand ref: `Data::a`.

Added in version 1.8.

Aliasing Declarations

Sometimes it may be helpful list declarations elsewhere than their main documentation, e.g., when creating a synopsis of a class interface. The following directive can be used for this purpose.

.. cpp:alias:: name or function signature

Insert one or more alias declarations. Each entity can be specified as they can in the `cpp:any` role. If the name of a function is given (as opposed to the complete signature), then all overloads of the function will be listed.

For example:

```
.. cpp:alias:: Data::a
               overload_example::C::f
```

becomes

```
int a
```

```
void f(double d) const
```

```
void f(double d)
```

```
void f(int i)
```

```
void f()
```

whereas:

```
.. cpp:alias:: void overload_example::C::f(double d) const
               void overload_example::C::f(double d)
```

becomes

```
void f(double d) const
```

```
void f(double d)
```

Added in version 2.0.

Options

:maxdepth: int

Insert nested declarations as well, up to the total depth given. Use 0 for infinite depth and 1 for just the mentioned declaration. Defaults to 1.

Added in version 3.5.

:noroot:

Skip the mentioned declarations and only render nested declarations. Requires `maxdepth` either 0 or at least 2.

Added in version 3.5.

Constrained Templates

Warning: The support for concepts is experimental. It is based on the current draft standard and the Concepts Technical Specification. The features may change as they evolve.

Note: Sphinx does not currently support `requires` clauses.

Placeholders

Declarations may use the name of a concept to introduce constrained template parameters, or the keyword `auto` to introduce unconstrained template parameters:

```
.. cpp:function:: void f(auto &&arg)
```

A function template with a single unconstrained template parameter.

```
.. cpp:function:: void f(std::Iterator it)
```

A function template with a single template parameter, constrained by the `Iterator` concept.

Template Introductions

Simple constrained function or class templates can be declared with a *template introduction* instead of a template parameter list:

```
.. cpp:function:: std::Iterator{It} void advance(It &it)
```

A function template with a template parameter constrained to be an `Iterator`.

```
.. cpp:class:: std::LessThanComparable{T} MySortedContainer
```

(continues on next page)

(continued from previous page)

A class template with a template parameter constrained to be `LessThanComparable`.

They are rendered as follows.

```
std::iterator{It}
void advance(It &it)
```

A function template with a template parameter constrained to be an `Iterator`.

```
std::LessThanComparable{T}
class MySortedContainer
```

A class template with a template parameter constrained to be `LessThanComparable`.

Note however that no checking is performed with respect to parameter compatibility. E.g., `Iterator{A, B, C}` will be accepted as an introduction even though it would not be valid C++.

Inline Expressions and Types

:cpp:expr:

:cpp:expr:

Insert a C++ expression or type either as inline code (`cpp:expr`) or inline text (`cpp:text`). For example:

```
.. cpp:var:: int a = 42
```

```
.. cpp:function:: int f(int i)
```

An expression: `cpp:expr:`a * f(a)`` (or as text: `cpp:text:`a * f(a)``).

A type: `cpp:expr:`const MySortedContainer<int>&``
(or as text `cpp:text:`const MySortedContainer<int>&``).

will be rendered as follows:

```
int a = 42
```

```
int f(int i)
```

An expression: `a * f(a)` (or as text: `a * f(a)`).

A type: `const MySortedContainer<int>&` (or as text `const MySortedContainer<int>&`).

Added in version 1.7: The `cpp:expr` role.

Added in version 1.8: The `cpp:text` role.

Namespacing

Declarations in the C++ domain are as default placed in global scope. The current scope can be changed using three namespace directives. They manage a stack declarations where `cpp:namespace` resets the stack and changes a given scope.

The `cpp:namespace-push` directive changes the scope to a given inner scope of the current one.

The `cpp:namespace-pop` directive undoes the most recent `cpp:namespace-push` directive.

`.. cpp:namespace::` scope specification

Changes the current scope for the subsequent objects to the given scope, and resets the namespace directive stack. Note that the namespace does not need to correspond to C++ namespaces, but can end in names of classes, e.g.,:

```
.. cpp:namespace:: Namespace1::Namespace2::SomeClass::AnInnerClass
```

All subsequent objects will be defined as if their name were declared with the scope prepended. The subsequent cross-references will be searched for starting in the current scope.

Using `NULL`, `0`, or `nullptr` as the scope will change to global scope.

A namespace declaration can also be templated, e.g.,:

```
.. cpp:class:: template<typename T> \
    std::vector

.. cpp:namespace:: template<typename T> std::vector

.. cpp:function:: std::size_t size() const
```

declares `size` as a member function of the class template `std::vector`. Equivalently this could have been declared using:

```
.. cpp:class:: template<typename T> \
    std::vector

.. cpp:function:: std::size_t size() const
```

or:

```
.. cpp:class:: template<typename T> \
    std::vector
```

`.. cpp:namespace-push::` scope specification

Change the scope relatively to the current scope. For example, after:

```
.. cpp:namespace:: A::B
.. cpp:namespace-push:: C::D
```

the current scope will be `A::B::C::D`.

Added in version 1.4.

`.. cpp:namespace-pop::`

Undo the previous `cpp:namespace-push` directive (*not* just pop a scope). For example, after:

```
.. cpp:namespace:: A::B

.. cpp:namespace-push:: C::D

.. cpp:namespace-pop::
```

the current scope will be `A::B` (*not* `A::B::C`).

If no previous `cpp:namespace-push` directive has been used, but only a `cpp:namespace` directive, then the current scope will be reset to global scope. That is, `.. cpp:namespace:: A::B` is equivalent to:

```
.. cpp:namespace:: nullptr

.. cpp:namespace-push:: A::B
```

Added in version 1.4.

Info field lists

All the C++ directives for declaring entities support the following info fields (see also *Info field lists*):

- `tparam`: Description of a template parameter.

The `cpp:function` directive additionally supports the following fields:

- `param`, `parameter`, `arg`, `argument`: Description of a parameter.
- `returns`, `return`: Description of a return value.
- `retval`, `retvals`: An alternative to `returns` for describing the result of the function.
- `throws`, `throw`, `exception`: Description of a possibly thrown exception.

Added in version 4.3: The `retval` field type.

Cross-referencing

These roles link to the given declaration types:

`:cpp:any:`
`:cpp:class:`
`:cpp:struct:`
`:cpp:func:`
`:cpp:member:`
`:cpp:var:`
`:cpp:type:`
`:cpp:concept:`
`:cpp:enum:`
`:cpp:enumerator:`

Reference a C++ declaration by name (see below for details). The name must be properly qualified relative to the position of the link.

Added in version 2.0: The `cpp:struct` role as alias for the `cpp:class` role.

Note on References with Templates Parameters/Arguments

These roles follow the Sphinx *Cross-referencing syntax* rules. This means care must be taken when referencing a (partial) template specialization, e.g. if the link looks like this: `:cpp:class:`MyClass<int>``. This is interpreted as a link to `int` with a title of `MyClass`. In this case, escape the opening angle bracket with a backslash, like this: `:cpp:class:`MyClass\<int>``.

When a custom title is not needed it may be useful to use the roles for inline expressions, `cpp:expr` and `cpp:texpr`, where angle brackets do not need escaping.

Declarations without template parameters and template arguments

For linking to non-templated declarations the name must be a nested name, e.g., `f` or `MyClass::f`.

Overloaded (member) functions

When a (member) function is referenced using just its name, the reference will point to an arbitrary matching overload. The `cpp:any` and `cpp:func` roles use an alternative format, which simply is a complete function declaration. This will resolve to the exact matching overload. As example, consider the following class declaration:

```
class C
    void f(double d) const
    void f(double d)
    void f(int i)
    void f()
```

References using the `cpp:func` role:

- Arbitrary overload: `C::f`, `C::f()`
- Also arbitrary overload: `C::f()`, `C::f()`
- Specific overload: `void C::f()`, `void C::f()`
- Specific overload: `void C::f(int)`, `void C::f(int)`
- Specific overload: `void C::f(double)`, `void C::f(double)`
- Specific overload: `void C::f(double) const`, `void C::f(double) const`

Note that the `add_function_parentheses` configuration variable does not influence specific overload references.

Templated declarations

Assume the following declarations.

```
class Wrapper
    template<typename TOuter>
    class Outer
        template<typename TInner>
```

class **Inner**

In general the reference must include the template parameter declarations, and template arguments for the prefix of qualified names. For example:

- `template<typename TOuter> Wrapper::Outer` (*template<typename TOuter> Wrapper::Outer*)
- `template<typename TOuter> template<typename TInner> Wrapper::Outer<TOuter>::Inner`
(*template<typename TOuter> template<typename TInner> Wrapper::Outer<TOuter>::Inner*)

Currently the lookup only succeed if the template parameter identifiers are equal strings. That is, `template<typename UOuter> Wrapper::Outer` will not work.

As a shorthand notation, if a template parameter list is omitted, then the lookup will assume either a primary template or a non-template, but not a partial template specialisation. This means the following references work as well:

- `Wrapper::Outer` (*Wrapper::Outer*)
- `Wrapper::Outer::Inner` (*Wrapper::Outer::Inner*)
- `template<typename TInner> Wrapper::Outer::Inner` (*template<typename TInner> Wrapper::Outer::Inner*)

(Full) Template Specialisations

Assume the following declarations.

```
template<typename TOuter>
class Outer

    template<typename TInner>
    class Inner

template<>
class Outer<int>

    template<typename TInner>
    class Inner

    template<>
    class Inner<bool>
```

In general the reference must include a template parameter list for each template argument list. The full specialisation above can therefore be referenced with `template<> Outer<int>` (*template<> Outer<int>*) and `template<> Outer<int>::Inner<bool>` (*template<> template<> Outer<int>::Inner<bool>*). As a shorthand the empty template parameter list can be omitted, e.g., `Outer<int>` (*Outer<int>*) and `Outer<int>::Inner<bool>` (*Outer<int>::Inner<bool>*).

Partial Template Specialisations

Assume the following declaration.

```
template<typename T>
class Outer<T*>
```

References to partial specialisations must always include the template parameter lists, e.g., `template<typename T> Outer<T*>` (*template<typename T> Outer<T*>*). Currently the lookup only succeed if the template parameter identifiers are equal strings.

Configuration Variables

See *Options for the C++ domain*.

The JavaScript Domain

Added in version 1.0.

The JavaScript domain (name **js**) provides the following directives:

.. js:module:: name

This directive sets the module name for object declarations that follow after. The module name is used in the global module index and in cross references. This directive does not create an object heading like *py:class* would, for example.

By default, this directive will create a linkable entity and will cause an entry in the global module index, unless the *no-index* option is specified. If this option is specified, the directive will only update the current module name.

Added in version 1.6.

Changed in version 5.2: Module directives support body content.

.. js:function:: name(signature)

Describes a JavaScript function or method. If you want to describe arguments as optional use square brackets as *documented* for Python signatures.

You can use fields to give more details about arguments and their expected types, errors which may be thrown by the function, and the value being returned:

```
.. js:function:: $.getJSON(href, callback[, errback])

:param string href: An URI to the location of the resource.
:param callback: Gets called with the object.
:param errback:
    Gets called in case the request fails. And a lot of other
    text so we need multiple lines.
:throws SomeError: For whatever reason in that case.
:returns: Something.
```

This is rendered as:

```
$.getJSON(href, callback[, errback ])
```

Arguments

- **href** (string()) – An URI to the location of the resource.
- **callback** – Gets called with the object.
- **errback** – Gets called in case the request fails. And a lot of other text so we need multiple lines.

Throws

SomeError() – For whatever reason in that case.

Returns

Something.

:single-line-parameter-list: (no value)

Ensures that the function's parameters will be emitted on a single logical line, overriding *javascript_maximum_signature_line_length* and *maximum_signature_line_length*.

Added in version 7.1.

.. js:method:: name(signature)

This directive is an alias for *js:function*, however it describes a function that is implemented as a method on a class object.

Added in version 1.6.

:single-line-parameter-list: (no value)

Ensures that the function's parameters will be emitted on a single logical line, overriding *javascript_maximum_signature_line_length* and *maximum_signature_line_length*.

Added in version 7.1.

.. js:class:: name

Describes a constructor that creates an object. This is basically like a function but will show up with a *class* prefix:

```
.. js:class:: MyAnimal(name[, age])

:param string name: The name of the animal
:param number age: an optional age for the animal
```

This is rendered as:

```
class MyAnimal(name[, age])
```

Arguments

- **name** (string()) – The name of the animal
- **age** (number()) – an optional age for the animal

:single-line-parameter-list: (no value)

Ensures that the function's parameters will be emitted on a single logical line, overriding *javascript_maximum_signature_line_length* and *maximum_signature_line_length*.

Added in version 7.1.

.. js:data:: name

Describes a global variable or constant.

.. js:attribute:: object.name

Describes the attribute *name* of *object*.

These roles are provided to refer to the described objects:

:js:mod:

:js:func:

:js:meth:

:js:class:

:js:data:

:js:attr:

The Mathematics Domain

Added in version 1.8.

The math domain (name **math**) provides the following roles:

:math:numref:

Role for cross-referencing equations defined by *math* directive via their label. Example:

```
.. math:: e^{i\pi} + 1 = 0
   :label: euler
```

Euler's identity, equation `:math:numref:`euler``, was elected one of the most beautiful mathematical formulas.

Added in version 1.8.

The Python Domain

Added in version 1.0.

The Python domain (name **py**) provides the following directives for module declarations:

.. py:module:: name

This directive marks the beginning of the description of a module (or package submodule, in which case the name should be fully qualified, including the package name). A description of the module such as the docstring can be placed in the body of the directive.

This directive will also cause an entry in the global module index.

Changed in version 5.2: Module directives support body content.

options

:platform: platforms (comma separated list)

Indicate platforms which the module is available (if it is available on all platforms, the option should be omitted). The keys are short identifiers; examples that are in use include “IRIX”, “Mac”, “Windows” and “Unix”. It is important to use a key which has already been used when applicable.

:synopsis: purpose (text)

Consist of one sentence describing the module's purpose – it is currently only used in the Global Module Index.

:deprecated: (no argument)

Mark a module as deprecated; it will be designated as such in various locations then.

.. py:currentmodule:: name

This directive tells Sphinx that the classes, functions etc. documented from here are in the given module (like *py:module*), but it will not create index entries, an entry in the Global Module Index, or a link target for *py:mod*. This is helpful in situations where documentation for things in a module is spread over multiple files or sections – one location has the *py:module* directive, the others only *py:currentmodule*.

The following directives are provided for module and class contents:

.. py:function:: name(parameters)

.. py:function:: name[type parameters](parameters)

Describes a module-level function. The signature should include the parameters, together with optional type parameters, as given in the Python function definition, see *Python Signatures*. For example:

```
.. py:function:: Timer.repeat(repeat=3, number=1_000_000)
.. py:function:: add[T](a: T, b: T) -> T
```

For methods you should use *py:method*.

The description normally includes information about the parameters required and how they are used (especially whether mutable objects passed as parameters are modified), side effects, and possible exceptions.

This information can (in any py directive) optionally be given in a structured form, see *Info field lists*.

options

:async: (no value)

Indicate the function is an async function.

Added in version 2.1.

:canonical: (full qualified name including module name)

Describe the location where the object is defined if the object is imported from other modules

Added in version 4.0.

:single-line-parameter-list: (no value)

Ensures that the function’s arguments will be emitted on a single logical line, overriding *python_maximum_signature_line_length* and *maximum_signature_line_length*.

Added in version 7.1.

:single-line-type-parameter-list: (no value)

Ensure that the function’s type parameters are emitted on a single logical line, overriding *python_maximum_signature_line_length* and *maximum_signature_line_length*.

Added in version 7.1.

.. py:data:: name

Describes global data in a module, including both variables and values used as “defined constants.” Class and object attributes are not documented using this environment.

options

:type: type of the variable (text)

Added in version 2.4.

:value: initial value of the variable (text)

Added in version 2.4.

:canonical: (full qualified name including module name)

Describe the location where the object is defined if the object is imported from other modules

Added in version 4.0.

.. py:exception:: name

.. py:exception:: name(parameters)

.. py:exception:: name[type parameters](parameters)

Describes an exception class. The signature can, but need not include parentheses with constructor arguments, or may optionally include type parameters (see [PEP 695](#)²⁶⁴).

options

:final: (no value)

Indicate the class is a final class.

Added in version 3.1.

:single-line-parameter-list: (no value)

See [py:class:single-line-parameter-list](#).

Added in version 7.1.

:single-line-type-parameter-list: (no value)

See [py:class:single-line-type-parameter-list](#).

Added in version 7.1.

.. py:class:: name

.. py:class:: name(parameters)

.. py:class:: name[type parameters](parameters)

Describes a class. The signature can optionally include type parameters (see [PEP 695](#)²⁶⁵) or parentheses with parameters which will be shown as the constructor arguments. See also *Python Signatures*.

Methods and attributes belonging to the class should be placed in this directive's body. If they are placed outside, the supplied name should contain the class name so that cross-references still work. Example:

```
.. py:class:: Foo

    .. py:method:: quux()

-- or --

.. py:class:: Bar

.. py:method:: Bar.quux()
```

The first way is the preferred one.

options

:canonical: (full qualified name including module name)

Describe the location where the object is defined if the object is imported from other modules

Added in version 4.0.

:final: (no value)

Indicate the class is a final class.

Added in version 3.1.

²⁶⁴ <https://peps.python.org/pep-0695/>

:single-line-parameter-list: (no value)

Ensures that the class constructor's arguments will be emitted on a single logical line, overriding *python_maximum_signature_line_length* and *maximum_signature_line_length*.

Added in version 7.1.

:single-line-type-parameter-list: (no value)

Ensure that the class type parameters are emitted on a single logical line, overriding *python_maximum_signature_line_length* and *maximum_signature_line_length*.

.. py:attribute:: name

Describes an object data attribute. The description should include information about the type of the data to be expected and whether it may be changed directly.

options

:type: type of the attribute (text)

Added in version 2.4.

:value: initial value of the attribute (text)

Added in version 2.4.

:canonical: (full qualified name including module name)

Describe the location where the object is defined if the object is imported from other modules

Added in version 4.0.

.. py:property:: name

Describes an object property.

Added in version 4.0.

options

:abstractmethod: (no value)

Indicate the property is abstract.

:classmethod: (no value)

Indicate the property is a classmethod.

Added in version 4.2.

:type: type of the property (text)

.. py:method:: name(parameters)

.. py:method:: name[type parameters](parameters)

Describes an object method. The parameters should not include the `self` parameter. The description should include similar information to that described for `function`. See also *Python Signatures* and *Info field lists*.

²⁶⁵ <https://peps.python.org/pep-0695/>

options

:abstractmethod: (no value)

Indicate the method is an abstract method.

Added in version 2.1.

:async: (no value)

Indicate the method is an async method.

Added in version 2.1.

:canonical: (full qualified name including module name)

Describe the location where the object is defined if the object is imported from other modules

Added in version 4.0.

:classmethod: (no value)

Indicate the method is a class method.

Added in version 2.1.

:final: (no value)

Indicate the method is a final method.

Added in version 3.1.

:single-line-parameter-list: (no value)

Ensures that the method's arguments will be emitted on a single logical line, overriding [*python_maximum_signature_line_length*](#) and [*maximum_signature_line_length*](#).

Added in version 7.1.

:single-line-type-parameter-list: (no value)

Ensure that the method's type parameters are emitted on a single logical line, overriding [*python_maximum_signature_line_length*](#) and [*maximum_signature_line_length*](#).

Added in version 7.2.

:staticmethod: (no value)

Indicate the method is a static method.

Added in version 2.1.

.. py:staticmethod:: name(parameters)

.. py:staticmethod:: name[type parameters](parameters)

Like [*py:method*](#), but indicates that the method is a static method.

Added in version 0.4.

.. py:classmethod:: name(parameters)

.. py:classmethod:: name[type parameters](parameters)

Like [*py:method*](#), but indicates that the method is a class method.

Added in version 0.6.

.. py:decorator:: name

.. py:decorator:: name(parameters)

.. py:decorator:: name[type parameters](parameters)

Describes a decorator function. The signature should represent the usage as a decorator. For example, given the functions

```
def removename(func):
    func.__name__ = ''
    return func

def setnewname(name):
    def decorator(func):
        func.__name__ = name
        return func
    return decorator
```

the descriptions should look like this:

```
.. py:decorator:: removename

    Remove name of the decorated function.

.. py:decorator:: setnewname(name)

    Set name of the decorated function to *name*.
```

(as opposed to `.. py:decorator:: removename(func).`)

There is no `py:deco` role to link to a decorator that is marked up with this directive; rather, use the `py:func` role.

:single-line-parameter-list: (no value)

Ensures that the decorator's arguments will be emitted on a single logical line, overriding `python_maximum_signature_line_length` and `maximum_signature_line_length`.

Added in version 7.1.

:single-line-type-parameter-list: (no value)

Ensure that the decorator's type parameters are emitted on a single logical line, overriding `python_maximum_signature_line_length` and `maximum_signature_line_length`.

Added in version 7.2.

.. py:decoratormethod:: name

.. py:decoratormethod:: name(signature)

.. py:decoratormethod:: name[type parameters](signature)

Same as `py:decorator`, but for decorators that are methods.

Refer to a decorator method using the `py:meth` role.

Python Signatures

Signatures of functions, methods and class constructors can be given like they would be written in Python.

Default values for optional arguments can be given (but if they contain commas, they will confuse the signature parser). Python 3-style argument annotations can also be given as well as return type annotations:

```
.. py:function:: compile(source : string, filename, symbol='file') -> ast object
```

For functions with optional parameters that don't have default values (typically functions implemented in C extension modules without keyword argument support), you can use brackets to specify the optional parts:

```
compile(source[, filename[, symbol ]])
```

It is customary to put the opening bracket before the comma.

Python 3.12 introduced *type parameters*, which are type variables declared directly within the class or function definition:

```
class AnimalList[AnimalT](list[AnimalT]):
    ...

def add[T](a: T, b: T) -> T:
    return a + b
```

The corresponding reStructuredText documentation would be:

```
.. py:class:: AnimalList[AnimalT]

.. py:function:: add[T](a: T, b: T) -> T
```

See [PEP 695](https://peps.python.org/pep-0695/)²⁶⁶ and [PEP 696](https://peps.python.org/pep-0696/)²⁶⁷ for details and the full specification.

Info field lists

Added in version 0.4.

Changed in version 3.0: meta fields are added.

Inside Python object description directives, reST field lists with these fields are recognized and formatted nicely:

- **param**, **parameter**, **arg**, **argument**, **key**, **keyword**: Description of a parameter.
- **type**: Type of a parameter. Creates a link if possible.
- **raises**, **raise**, **except**, **exception**: That (and when) a specific exception is raised.
- **var**, **ivar**, **cvar**: Description of a variable.
- **vartype**: Type of a variable. Creates a link if possible.
- **returns**, **return**: Description of the return value.
- **rtype**: Return type. Creates a link if possible.
- **meta**: Add metadata to description of the python object. The metadata will not be shown on output document. For example, `:meta private:` indicates the python object is private member. It is used in [sphinx.ext.autodoc](#) for filtering members.

²⁶⁶ <https://peps.python.org/pep-0695/>

²⁶⁷ <https://peps.python.org/pep-0696/>

Note: In current release, all `var`, `ivar` and `cvar` are represented as “Variable”. There is no difference at all.

The field names must consist of one of these keywords and an argument (except for `returns` and `rtype`, which do not need an argument). This is best explained by an example:

```
.. py:function:: send_message(sender, recipient, message_body, [priority=1])

    Send a message to a recipient

    :param str sender: The person sending the message
    :param str recipient: The recipient of the message
    :param str message_body: The body of the message
    :param priority: The priority of the message, can be a number 1-5
    :type priority: integer or None
    :return: the message id
    :rtype: int
    :raises ValueError: if the message_body exceeds 160 characters
    :raises TypeError: if the message_body is not a basestring
```

This will render like this:

```
send_message(sender, recipient, message_body[, priority=1 ])
```

Send a message to a recipient

Parameters

- **sender** (*str*²⁶⁸) – The person sending the message
- **recipient** (*str*²⁶⁹) – The recipient of the message
- **message_body** (*str*²⁷⁰) – The body of the message
- **priority** (*int*²⁷¹ or *None*) – The priority of the message, can be a number 1-5

Returns

the message id

Return type

*int*²⁷²

Raises

- **ValueError**²⁷³ – if the `message_body` exceeds 160 characters
- **TypeError**²⁷⁴ – if the `message_body` is not a basestring

It is also possible to combine parameter type and description, if the type is a single word, like this:

```
:param int priority: The priority of the message, can be a number 1-5
```

Added in version 1.5.

Container types such as lists and dictionaries can be linked automatically using the following syntax:

²⁶⁸ <https://docs.python.org/3/library/stdtypes.html#str>
²⁶⁹ <https://docs.python.org/3/library/stdtypes.html#str>
²⁷⁰ <https://docs.python.org/3/library/stdtypes.html#str>
²⁷¹ <https://docs.python.org/3/library/functions.html#int>
²⁷² <https://docs.python.org/3/library/functions.html#int>
²⁷³ <https://docs.python.org/3/library/exceptions.html#ValueError>
²⁷⁴ <https://docs.python.org/3/library/exceptions.html#TypeError>

```
:type priorities: list(int)
:type priorities: list[int]
:type mapping: dict(str, int)
:type mapping: dict[str, int]
:type point: tuple(float, float)
:type point: tuple[float, float]
```

Multiple types in a type field will be linked automatically if separated by the word “or”:

```
:type an_arg: int or None
:vartype a_var: str or int
:rtype: float or str
```

Cross-referencing Python objects

The following roles refer to objects in modules and are possibly hyperlinked if a matching identifier is found:

:py:mod:

Reference a module; a dotted name may be used. This should also be used for package names.

:py:func:

Reference a Python function; dotted names may be used. The role text needs not include trailing parentheses to enhance readability; they will be added automatically by Sphinx if the `add_function_parentheses` config value is True (the default).

:py:data:

Reference a module-level variable.

:py:const:

Reference a “defined” constant. This may be a Python variable that is not intended to be changed.

:py:class:

Reference a class; a dotted name may be used.

:py:meth:

Reference a method of an object. The role text can include the type name and the method name; if it occurs within the description of a type, the type name can be omitted. A dotted name may be used.

:py:attr:

Reference a data attribute of an object.

Note: The role is also able to refer to property.

:py:exc:

Reference an exception. A dotted name may be used.

:py:obj:

Reference an object of unspecified type. Useful e.g. as the `default_role`.

Added in version 0.4.

The name enclosed in this markup can include a module name and/or a class name. For example, `:py:func:`filter`` could refer to a function named `filter` in the current module, or the built-in function of that name. In contrast, `:py:func:`foo.filter`` clearly refers to the `filter` function in the `foo` module.

Normally, names in these roles are searched first without any further qualification, then with the current module name prepended, then with the current module and class name (if any) prepended. If you prefix the name with a dot, this order is reversed. For example, in the documentation of Python's `codecs`²⁷⁵ module, `:py:func:`open`` always refers to the built-in function, while `:py:func:`.open`` refers to `codecs.open()`²⁷⁶.

A similar heuristic is used to determine whether the name is an attribute of the currently documented class.

Also, if the name is prefixed with a dot, and no exact match is found, the target is taken as a suffix and all object names with that suffix are searched. For example, `:py:meth:`.TarFile.close`` references the `tarfile.TarFile.close()` function, even if the current module is not `tarfile`. Since this can get ambiguous, if there is more than one possible match, you will get a warning from Sphinx.

Note that you can combine the `~` and `.` prefixes: `:py:meth:`~.TarFile.close`` will reference the `tarfile.TarFile.close()` method, but the visible link caption will only be `close()`.

The reStructuredText Domain

Added in version 1.0.

The reStructuredText domain (name `rst`) provides the following directives:

`.. rst:directive:: name`

Describes a reST directive. The *name* can be a single directive name or actual directive syntax (`..` prefix and `::` suffix) with arguments that will be rendered differently. For example:

```
.. rst:directive:: foo

    Foo description.

.. rst:directive:: .. bar:: baz

    Bar description.
```

will be rendered as:

```
.. foo::

    Foo description.

.. bar:: baz

    Bar description.
```

`.. rst:directive:option:: name`

Describes an option for reST directive. The *name* can be a single option name or option name with arguments which separated with colon (`:`). For example:

```
.. rst:directive:: toctree

    .. rst:directive:option:: caption: caption of ToC

    .. rst:directive:option:: glob
```

will be rendered as:

```
.. toctree::
```

²⁷⁵ <https://docs.python.org/3/library/codecs.html#module-codecs>

²⁷⁶ <https://docs.python.org/3/library/codecs.html#codecs.open>

:caption: caption of ToC

:glob:

options

:type: description of argument (text)

Describe the type of option value.

For example:

```
.. rst:directive:: toctree

   .. rst:directive:option:: maxdepth
      :type: integer or no value
```

Added in version 2.1.

.. **rst:role::** name

Describes a reST role. For example:

```
.. rst:role:: foo

   Foo description.
```

will be rendered as:

:foo:
 Foo description.

These roles are provided to refer to the described objects:

:rst:dir:

:rst:role:

More domains

There are several third-party domains available as extensions, including:

- [Ada](https://pypi.org/project/sphinxcontrib-adadomain/)²⁷⁷
- [Chapel](https://pypi.org/project/sphinxcontrib-chapeldomain/)²⁷⁸
- [CoffeeScript](https://pypi.org/project/sphinxcontrib-coffee/)²⁷⁹
- [Common Lisp](https://pypi.org/project/sphinxcontrib-cldomain/)²⁸⁰
- [dqn](https://pypi.org/project/sphinxcontrib-dqndomain/)²⁸¹
- [Erlang](https://pypi.org/project/sphinxcontrib-erlangdomain/)²⁸²

²⁷⁷ <https://pypi.org/project/sphinxcontrib-adadomain/>

²⁷⁸ <https://pypi.org/project/sphinxcontrib-chapeldomain/>

²⁷⁹ <https://pypi.org/project/sphinxcontrib-coffee/>

²⁸⁰ <https://pypi.org/project/sphinxcontrib-cldomain/>

²⁸¹ <https://pypi.org/project/sphinxcontrib-dqndomain/>

²⁸² <https://pypi.org/project/sphinxcontrib-erlangdomain/>

- [Go](#)²⁸³
- [HTTP](#)²⁸⁴
- [Jinja](#)²⁸⁵
- [Lasso](#)²⁸⁶
- [MATLAB](#)²⁸⁷
- [Operation](#)²⁸⁸
- [PHP](#)²⁸⁹
- [Ruby](#)²⁹⁰
- [Scala](#)²⁹¹

4.7 Extensions

Since many projects will need special features in their documentation, Sphinx allows adding “extensions” to the build process, each of which can modify almost any aspect of document processing.

This chapter describes the extensions bundled with Sphinx. For the API documentation on writing your own extension, refer to *Sphinx Extensions API*.

Built-in extensions

These extensions are built in and can be activated by respective entries in the `extensions` configuration value:

`sphinx.ext.autodoc` – Include documentation from docstrings

This extension can import the modules you are documenting, and pull in documentation from docstrings in a semi-automatic way.

Note: For Sphinx (actually, the Python interpreter that executes Sphinx) to find your module, it must be importable. That means that the module or the package must be in one of the directories on `sys.path`²⁹² – adapt your `sys.path`²⁹³ in the configuration file accordingly.

Warning: `autodoc` imports the modules to be documented. If any modules have side effects on import, these will be executed by autodoc when `sphinx-build` is run.

²⁸³ <https://pypi.org/project/sphinxcontrib-golangdomain/>

²⁸⁴ <https://pypi.org/project/sphinxcontrib-httpdomain/>

²⁸⁵ <https://pypi.org/project/sphinxcontrib-jinjadomain/>

²⁸⁶ <https://pypi.org/project/sphinxcontrib-lassodomain/>

²⁸⁷ <https://pypi.org/project/sphinxcontrib-matlabdomain/>

²⁸⁸ <https://pypi.org/project/sphinxcontrib-operationdomain/>

²⁸⁹ <https://pypi.org/project/sphinxcontrib-phpdomain/>

²⁹⁰ <https://pypi.org/project/sphinxcontrib-rubydomain/>

²⁹¹ <https://pypi.org/project/sphinxcontrib-scaladomain/>

²⁹² <https://docs.python.org/3/library/sys.html#sys.path>

²⁹³ <https://docs.python.org/3/library/sys.html#sys.path>

If you document scripts (as opposed to library modules), make sure their main routine is protected by a `if __name__ == '__main__':` condition.

For this to work, the docstrings must of course be written in correct reStructuredText. You can then use all of the usual Sphinx markup in the docstrings, and it will end up correctly in the documentation. Together with hand-written documentation, this technique eases the pain of having to maintain two locations for documentation, while at the same time avoiding auto-generated-looking pure API documentation.

If you prefer NumPy²⁹⁴ or Google²⁹⁵ style docstrings over reStructuredText, you can also enable the *napoleon* extension. *napoleon* is a preprocessor that converts your docstrings to correct reStructuredText before `autodoc` processes them.

Directives

`autodoc` provides several directives that are versions of the usual *py:module*, *py:class* and so forth. On parsing time, they import the corresponding module and extract the docstring of the given objects, inserting them into the page source under a suitable *py:module*, *py:class* etc. directive.

Note: Just as *py:class* respects the current *py:module*, *autoclass* will also do so. Likewise, *automethod* will respect the current *py:class*.

```
.. automodule::
.. autoclass::
.. autoexception::
```

Document a module, class or exception. All three directives will by default only insert the docstring of the object itself:

```
.. autoclass:: Noodle
```

will produce source like this:

```
.. class:: Noodle

    Noodle's docstring.
```

The “auto” directives can also contain content of their own, it will be inserted into the resulting non-auto directive source after the docstring (but before any automatic member documentation).

Therefore, you can also mix automatic and non-automatic member documentation, like so:

```
.. autoclass:: Noodle
   :members: eat, slurp

.. method:: boil(time=10)

    Boil the noodle *time* minutes.
```

²⁹⁴ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

²⁹⁵ <https://google.github.io/styleguide/pyguide.html#38-comments-and-docstrings>

Options

:members: (no value or comma separated list)

If set, autodoc will generate document for the members of the target module, class or exception.

For example:

```
.. automodule:: noodle
   :members:
```

will document all module members (recursively), and

```
.. autoclass:: Noodle
   :members:
```

will document all class member methods and properties.

By default, autodoc will not generate document for the members that are private, not having docstrings, inherited from super class, or special members.

For modules, `__all__` will be respected when looking for members unless you give the `ignore-module-all` flag option. Without `ignore-module-all`, the order of the members will also be the order in `__all__`.

You can also give an explicit list of members; only these will then be documented:

```
.. autoclass:: Noodle
   :members: eat, slurp
```

:undoc-members: (no value)

If set, autodoc will also generate document for the members not having docstrings:

```
.. automodule:: noodle
   :members:
   :undoc-members:
```

:private-members: (no value or comma separated list)

If set, autodoc will also generate document for the private members (that is, those named like `_private` or `__private`):

```
.. automodule:: noodle
   :members:
   :private-members:
```

It can also take an explicit list of member names to be documented as arguments:

```
.. automodule:: noodle
   :members:
   :private-members: _spicy, _garlickly
```

Added in version 1.1.

Changed in version 3.2: The option can now take arguments.

:special-members: (no value or comma separated list)

If set, autodoc will also generate document for the special members (that is, those named like `__special__`):

```
.. autoclass:: my.Class
   :members:
   :special-members:
```

It can also take an explicit list of member names to be documented as arguments:

```
.. autoclass:: my.Class
   :members:
   :special-members: __init__, __name__
```

Added in version 1.1.

Changed in version 1.2: The option can now take arguments

Options and advanced usage

- If you want to make the `members` option (or other options described below) the default, see [autodoc_default_options](#).

Tip: You can use a negated form, '`no-flag`', as an option of autodoc directive, to disable it temporarily. For example:

```
.. automodule:: foo
   :no-undoc-members:
```

Tip: You can use autodoc directive options to temporarily override or extend default options which takes list as an input. For example:

```
.. autoclass:: Noodle
   :members: eat
   :private-members: +_spicy, _garlickly
```

Changed in version 3.5: The default options can be overridden or extended temporarily.

- autodoc considers a member private if its docstring contains `:meta private:` in its *Info field lists*. For example:

```
def my_function(my_arg, my_other_arg):
    """blah blah blah

    :meta private:
    """
```

Added in version 3.0.

- autodoc considers a member public if its docstring contains `:meta public:` in its *Info field lists*, even if it starts with an underscore. For example:

```
def _my_function(my_arg, my_other_arg):
    """blah blah blah

    :meta public:
    """
```

Added in version 3.1.

- autodoc considers a variable member does not have any default value if its docstring contains `:meta hide-value:` in its *Info field lists*. Example:

```
var1 = None #: :meta hide-value:
```

Added in version 3.5.

- For classes and exceptions, members inherited from base classes will be left out when documenting all members, unless you give the `inherited-members` option, in addition to `members`:

```
.. autoclass:: Noodle
   :members:
   :inherited-members:
```

This can be combined with `undoc-members` to document *all* available members of the class or module.

It can take an ancestor class not to document inherited members from it. By default, members of `object` class are not documented. To show them all, give `None` to the option.

For example; If your class `Foo` is derived from `list` class and you don't want to document `list.__len__()`, you should specify a option `:inherited-members: list` to avoid special members of `list` class.

Another example; If your class `Foo` has `__str__` special method and autodoc directive has both `inherited-members` and `special-members`, `__str__` will be documented as in the past, but other special method that are not implemented in your class `Foo`.

Since v5.0, it can take a comma separated list of ancestor classes. It allows to suppress inherited members of several classes on the module at once by specifying the option to `automodule` directive.

Note: this will lead to markup errors if the inherited members come from a module whose docstrings are not reST formatted.

Added in version 0.3.

Changed in version 3.0: It takes an ancestor class name as an argument.

Changed in version 5.0: It takes a comma separated list of ancestor class names.

- It's possible to override the signature for explicitly documented callable objects (functions, methods, classes) with the regular syntax that will override the signature gained from introspection:

```
.. autoclass:: Noodle(type)

.. automethod:: eat(persona)
```

This is useful if the signature from the method is hidden by a decorator.

Added in version 0.4.

- The `automodule`, `autoclass` and `autoexception` directives also support a flag option called `show-inheritance`. When given, a list of base classes will be inserted just below the class signature (when used with `automodule`, this will be inserted for every class that is documented in the module).

Added in version 0.4.

- All autodoc directives support the `no-index` flag option that has the same effect as for standard `py:function` etc. directives: no index entries are generated for the documented object (and all autodocumented members).

Added in version 0.4.

- `automodule` also recognizes the `synopsis`, `platform` and `deprecated` options that the standard `py:module` directive supports.

Added in version 0.5.

- `automodule` and `autoclass` also has an `member-order` option that can be used to override the global value of `autodoc_member_order` for one directive.

Added in version 0.6.

- The directives supporting member documentation also have a `exclude-members` option that can be used to exclude single member names from documentation, if all members are to be documented.

Added in version 0.6.

- In an `automodule` directive with the `members` option set, only module members whose `__module__` attribute is equal to the module name as given to `automodule` will be documented. This is to prevent documentation of imported classes or functions. Set the `imported-members` option if you want to prevent this behavior and document all available members. Note that attributes from imported modules will not be documented, because attribute documentation is discovered by parsing the source file of the current module.

Added in version 1.2.

- Add a list of modules in the `autodoc_mock_imports` to prevent import errors to halt the building process when some external dependencies are not importable at build time.

Added in version 1.3.

- As a hint to autodoc extension, you can put a `::` separator in between module name and object name to let autodoc know the correct module name if it is ambiguous.

```
.. autoclass:: module.name::Noodle
```

- `autoclass` also recognizes the `class-doc-from` option that can be used to override the global value of `autoclass_content`.

Added in version 4.1.

```
.. autofunction::
.. autodecorator::
.. autodata::
.. automethod::
.. autoattribute::
.. autoproperty::
```

These work exactly like `autoclass` etc., but do not offer the options used for automatic member documentation.

`autodata` and `autoattribute` support the `annotation` option. The option controls how the value of variable is shown. If specified without arguments, only the name of the variable will be printed, and its value is not shown:

```
.. autodata:: CD_DRIVE
:annotation:
```

If the option specified with arguments, it is printed after the name as a value of the variable:

```
.. autodata:: CD_DRIVE
:annotation: = your CD device name
```

By default, without `annotation` option, Sphinx tries to obtain the value of the variable and print it after the name.

The `no-value` option can be used instead of a blank `annotation` to show the type hint but not the value:

```
.. autodata:: CD_DRIVE
   :no-value:
```

If both the `annotation` and `no-value` options are used, `no-value` has no effect.

For module data members and class attributes, documentation can either be put into a comment with special formatting (using a `#:` to start the comment instead of just `#`), or in a docstring *after* the definition. Comments need to be either on a line of their own *before* the definition, or immediately after the assignment *on the same line*. The latter form is restricted to one line only.

This means that in the following class definition, all attributes can be autodocumented:

```
class Foo:
    """Docstring for class Foo."""

    #: Doc comment for class attribute Foo.bar.
    #: It can have multiple lines.
    bar = 1

    flox = 1.5    #: Doc comment for Foo.flox. One line only.

    baz = 2
    """Docstring for class attribute Foo.baz."""

    def __init__(self):
        #: Doc comment for instance attribute qux.
        self.qux = 3

        self.spam = 4
        """Docstring for instance attribute spam."""
```

Changed in version 0.6: `autodata` and `autoattribute` can now extract docstrings.

Changed in version 1.1: Comment docs are now allowed on the same line after an assignment.

Changed in version 1.2: `autodata` and `autoattribute` have an `annotation` option.

Changed in version 2.0: `autodecorator` added.

Changed in version 2.1: `autoproperty` added.

Changed in version 3.4: `autodata` and `autoattribute` now have a `no-value` option.

Note: If you document decorated functions or methods, keep in mind that autodoc retrieves its docstrings by importing the module and inspecting the `__doc__` attribute of the given function or method. That means that if a decorator replaces the decorated function with another, it must copy the original `__doc__` to the new function.

Configuration

There are also config values that you can set:

autoclass_content

This value selects what content will be inserted into the main body of an *autoclass* directive. The possible values are:

"class"

Only the class' docstring is inserted. This is the default. You can still document `__init__` as a separate method using *automethod* or the `members` option to *autoclass*.

"both"

Both the class' and the `__init__` method's docstring are concatenated and inserted.

"init"

Only the `__init__` method's docstring is inserted.

Added in version 0.3.

If the class has no `__init__` method or if the `__init__` method's docstring is empty, but the class has a `__new__` method's docstring, it is used instead.

Added in version 1.4.

autodoc_class_signature

This value selects how the signature will be displayed for the class defined by *autoclass* directive. The possible values are:

"mixed"

Display the signature with the class name.

"separated"

Display the signature as a method.

The default is "mixed".

Added in version 4.1.

autodoc_member_order

This value selects if automatically documented members are sorted alphabetical (value 'alphabetical'), by member type (value 'groupwise') or by source order (value 'bysource'). The default is alphabetical.

Note that for source order, the module must be a Python module with the source code available.

Added in version 0.6.

Changed in version 1.0: Support for 'bysource'.

autodoc_default_flags

This value is a list of autodoc directive flags that should be automatically applied to all autodoc directives. The supported flags are 'members', 'undoc-members', 'private-members', 'special-members', 'inherited-members', 'show-inheritance', 'ignore-module-all' and 'exclude-members'.

Added in version 1.0.

Deprecated since version 1.8: Integrated into *autodoc_default_options*.

autodoc_default_options

The default options for autodoc directives. They are applied to all autodoc directives automatically. It must be a dictionary which maps option names to the values. For example:

```
autodoc_default_options = {
    'members': 'var1, var2',
    'member-order': 'bysource',
    'special-members': '__init__',
    'undoc-members': True,
    'exclude-members': '__weakref__'
}
```

Setting `None` or `True` to the value is equivalent to giving only the option name to the directives.

The supported options are `'members'`, `'member-order'`, `'undoc-members'`, `'private-members'`, `'special-members'`, `'inherited-members'`, `'show-inheritance'`, `'ignore-module-all'`, `'imported-members'`, `'exclude-members'`, `'class-doc-from'` and `'no-value'`.

Added in version 1.8.

Changed in version 2.0: Accepts `True` as a value.

Changed in version 2.1: Added `'imported-members'`.

Changed in version 4.1: Added `'class-doc-from'`.

Changed in version 4.5: Added `'no-value'`.

autodoc_docstring_signature

Functions imported from C modules cannot be introspected, and therefore the signature for such functions cannot be automatically determined. However, it is an often-used convention to put the signature into the first line of the function's docstring.

If this boolean value is set to `True` (which is the default), autodoc will look at the first line of the docstring for functions and methods, and if it looks like a signature, use the line as the signature and remove it from the docstring content.

autodoc will continue to look for multiple signature lines, stopping at the first line that does not look like a signature. This is useful for declaring overloaded function signatures.

Added in version 1.1.

Changed in version 3.1: Support overloaded signatures

Changed in version 4.0: Overloaded signatures do not need to be separated by a backslash

autodoc_mock_imports

This value contains a list of modules to be mocked up. This is useful when some external dependencies are not met at build time and break the building process. You may only specify the root package of the dependencies themselves and omit the sub-modules:

```
autodoc_mock_imports = ["django"]
```

Will mock all imports under the `django` package.

Added in version 1.3.

Changed in version 1.6: This config value only requires to declare the top-level modules that should be mocked.

autodoc_typehints

This value controls how to represent typehints. The setting takes the following values:

- `'signature'` – Show typehints in the signature (default)
- `'description'` – Show typehints as content of the function or method The typehints of overloaded functions or methods will still be represented in the signature.

- 'none' – Do not show typehints
- 'both' – Show typehints in the signature and as content of the function or method

Overloaded functions or methods will not have typehints included in the description because it is impossible to accurately represent all possible overloads as a list of parameters.

Added in version 2.1.

Added in version 3.0: New option 'description' is added.

Added in version 4.1: New option 'both' is added.

autodoc_typehints_description_target

This value controls whether the types of undocumented parameters and return values are documented when `autodoc_typehints` is set to `description`.

The default value is "all", meaning that types are documented for all parameters and return values, whether they are documented or not.

When set to "documented", types will only be documented for a parameter or a return value that is already documented by the docstring.

With "documented_params", parameter types will only be annotated if the parameter is documented in the docstring. The return type is always annotated (except if it is `None`).

Added in version 4.0.

Added in version 5.0: New option 'documented_params' is added.

autodoc_type_aliases

A dictionary for users defined [type aliases](#)²⁹⁶ that maps a type name to the full-qualified object name. It is used to keep type aliases not evaluated in the document. Defaults to empty (`{}`).

The type aliases are only available if your program enables [Postponed Evaluation of Annotations \(PEP 563\)](#)²⁹⁷ feature via `from __future__ import annotations`.

For example, there is code using a type alias:

```
from __future__ import annotations

AliasType = Union[List[Dict[Tuple[int, str], Set[int]]], Tuple[str, List[str]]]

def f() -> AliasType:
    ...
```

If `autodoc_type_aliases` is not set, autodoc will generate internal mark-up from this code as following:

```
.. py:function:: f() -> Union[List[Dict[Tuple[int, str], Set[int]]], Tuple[str,
↪List[str]]]

    ...
```

If you set `autodoc_type_aliases` as `{'AliasType': 'your.module.AliasType'}`, it generates the following document internally:

```
.. py:function:: f() -> your.module.AliasType:

    ...
```

Added in version 3.3.

autodoc_typehints_format

This value controls the format of typehints. The setting takes the following values:

- 'fully-qualified' – Show the module name and its name of typehints
- 'short' – Suppress the leading module names of the typehints (ex. `io.StringIO` -> `StringIO`) (default)

Added in version 4.4.

Changed in version 5.0: The default setting was changed to 'short'

autodoc_preserve_defaults

If True, the default argument values of functions will be not evaluated on generating document. It preserves them as is in the source code.

Added in version 4.0: Added as an experimental feature. This will be integrated into autodoc core in the future.

autodoc_warningiserror

This value controls the behavior of `sphinx-build -W` during importing modules. If False is given, autodoc forcibly suppresses the error if the imported module emits warnings. By default, True.

autodoc_inherit_docstrings

This value controls the docstrings inheritance. If set to True the docstring for classes or methods, if not explicitly set, is inherited from parents.

The default is True.

Added in version 1.7.

suppress_warnings

autodoc supports to suppress warning messages via `suppress_warnings`. It allows following warnings types in addition:

- autodoc
- autodoc.import_object

Docstring preprocessing

autodoc provides the following additional events:

autodoc-process-docstring(*app, what, name, obj, options, lines*)

Added in version 0.4.

Emitted when autodoc has read and processed a docstring. *lines* is a list of strings – the lines of the processed docstring – that the event handler can modify **in place** to change what Sphinx puts into the output.

Parameters

- **app** – the Sphinx application object
- **what** – the type of the object which the docstring belongs to (one of "module", "class", "exception", "function", "method", "attribute")
- **name** – the fully qualified name of the object
- **obj** – the object itself

²⁹⁶ https://mypy.readthedocs.io/en/latest/kinds_of_types.html#type-aliases

²⁹⁷ <https://peps.python.org/pep-0563/>

- **options** – the options given to the directive: an object with attributes `inherited_members`, `undoc_members`, `show_inheritance` and `no-index` that are true if the flag option of same name was given to the auto directive
- **lines** – the lines of the docstring, see above

autodoc-before-process-signature(*app, obj, bound_method*)

Added in version 2.4.

Emitted before autodoc formats a signature for an object. The event handler can modify an object to change its signature.

Parameters

- **app** – the Sphinx application object
- **obj** – the object itself
- **bound_method** – a boolean indicates an object is bound method or not

autodoc-process-signature(*app, what, name, obj, options, signature, return_annotation*)

Added in version 0.5.

Emitted when autodoc has formatted a signature for an object. The event handler can return a new tuple (`signature`, `return_annotation`) to change what Sphinx puts into the output.

Parameters

- **app** – the Sphinx application object
- **what** – the type of the object which the docstring belongs to (one of "module", "class", "exception", "function", "method", "attribute")
- **name** – the fully qualified name of the object
- **obj** – the object itself
- **options** – the options given to the directive: an object with attributes `inherited_members`, `undoc_members`, `show_inheritance` and `no-index` that are true if the flag option of same name was given to the auto directive
- **signature** – function signature, as a string of the form "(parameter_1, parameter_2)", or None if introspection didn't succeed and signature wasn't specified in the directive.
- **return_annotation** – function return annotation as a string of the form " -> annotation", or None if there is no return annotation

The `sphinx.ext.autodoc` module provides factory functions for commonly needed docstring processing in event `autodoc-process-docstring`:

`sphinx.ext.autodoc.cut_lines`(*pre: int²⁹⁸, post: int²⁹⁹ = 0, what: str³⁰⁰ | None³⁰¹ = None*) → `Callable`³⁰²

Return a listener that removes the first *pre* and last *post* lines of every docstring. If *what* is a sequence of strings, only docstrings of a type in *what* will be processed.

Use like this (e.g. in the `setup()` function of `conf.py`):

```
from sphinx.ext.autodoc import cut_lines
app.connect('autodoc-process-docstring', cut_lines(4, what=['module']))
```

This can (and should) be used in place of `automodule_skip_lines`.

`sphinx.ext.autodoc.between(marker: str303, what: Sequence[str304] | None305 = None, keepempty: bool306 = False, exclude: bool307 = False) → Callable`

Return a listener that either keeps, or if *exclude* is True excludes, lines between lines that match the *marker* regular expression. If no line matches, the resulting docstring would be empty, so no change will be made unless *keepempty* is true.

If *what* is a sequence of strings, only docstrings of a type in *what* will be processed.

autodoc-process-bases(*app*, *name*, *obj*, *options*, *bases*)

Emitted when autodoc has read and processed a class to determine the base-classes. *bases* is a list of classes that the event handler can modify **in place** to change what Sphinx puts into the output. It's emitted only if `show-inheritance` option given.

Parameters

- **app** – the Sphinx application object
- **name** – the fully qualified name of the object
- **obj** – the object itself
- **options** – the options given to the class directive
- **bases** – the list of base classes signature. see above.

Added in version 4.1.

Changed in version 4.3: *bases* can contain a string as a base class name. It will be processed as reST mark-up'ed text.

Skipping members

autodoc allows the user to define a custom method for determining whether a member should be included in the documentation by using the following event:

autodoc-skip-member(*app*, *what*, *name*, *obj*, *skip*, *options*)

Added in version 0.5.

Emitted when autodoc has to decide whether a member should be included in the documentation. The member is excluded if a handler returns True. It is included if the handler returns False.

If more than one enabled extension handles the `autodoc-skip-member` event, autodoc will use the first non-None value returned by a handler. Handlers should return None to fall back to the skipping behavior of autodoc and other enabled extensions.

Parameters

- **app** – the Sphinx application object
- **what** – the type of the object which the docstring belongs to (one of "module", "class", "exception", "function", "method", "attribute")

²⁹⁸ <https://docs.python.org/3/library/functions.html#int>

²⁹⁹ <https://docs.python.org/3/library/functions.html#int>

³⁰⁰ <https://docs.python.org/3/library/stdtypes.html#str>

³⁰¹ <https://docs.python.org/3/library/constants.html#None>

³⁰² <https://docs.python.org/3/library/typing.html#typing.Callable>

³⁰³ <https://docs.python.org/3/library/stdtypes.html#str>

³⁰⁴ <https://docs.python.org/3/library/stdtypes.html#str>

³⁰⁵ <https://docs.python.org/3/library/constants.html#None>

³⁰⁶ <https://docs.python.org/3/library/functions.html#bool>

³⁰⁷ <https://docs.python.org/3/library/functions.html#bool>

- **name** – the fully qualified name of the object
- **obj** – the object itself
- **skip** – a boolean indicating if autodoc will skip this member if the user handler does not override the decision
- **options** – the options given to the directive: an object with attributes `inherited_members`, `undoc_members`, `show_inheritance` and `no-index` that are true if the flag option of same name was given to the auto directive

sphinx.ext.autosectionlabel – Allow reference sections using its title

Added in version 1.4.

This extension allows you to refer sections its title. This affects to the reference role (*ref*).

For example:

A Plain Title

This is the text of the section.

It refers to the section title, see `:ref:`A Plain Title``.

Internally, this extension generates the labels for each section. If same section names are used in whole of document, any one is used for a target by default. The `autosectionlabel_prefix_document` configuration variable can be used to make headings which appear multiple times but in different documents unique.

Configuration

autosectionlabel_prefix_document

True to prefix each section label with the name of the document it is in, followed by a colon. For example, `index:Introduction` for a section called `Introduction` that appears in document `index.rst`. Useful for avoiding ambiguity when the same section heading appears in different documents.

autosectionlabel_maxdepth

If set, `autosectionlabel` chooses the sections for labeling by its depth. For example, when set 1 to `autosectionlabel_maxdepth`, labels are generated only for top level sections, and deeper sections are not labeled. It defaults to `None` (disabled).

Debugging

The **WARNING: undefined label** indicates that your reference in *ref* is mis-spelled. Invoking **sphinx-build** with `-vvv` (see `-v308`) will print all section names and the labels that have been generated for them. This output can help finding the right reference label.

³⁰⁸ <https://docs.python.org/3/using/cmdline.html#cmdoption-v>

`sphinx.ext.autosummary` – Generate autodoc summaries

Added in version 0.6.

This extension generates function/method/attribute summary lists, similar to those output e.g. by Epydoc and other API doc generation tools. This is especially useful when your docstrings are long and detailed, and putting each one of them on a separate page makes them easier to read.

The `sphinx.ext.autosummary` extension does this in two parts:

1. There is an `autosummary` directive for generating summary listings that contain links to the documented items, and short summary blurbs extracted from their docstrings.
2. A `autosummary` directive also generates short “stub” files for the entries listed in its content. These files by default contain only the corresponding `sphinx.ext.autodoc` directive, but can be customized with templates.

The **sphinx-autogen** script is also able to generate “stub” files from command line.

`.. autosummary::`

Insert a table that contains links to documented items, and a short summary blurb (the first sentence of the docstring) for each of them.

The `autosummary` directive can also optionally serve as a `toctree` entry for the included items. Optionally, stub `.rst` files for these items can also be automatically generated when `autosummary_generate` is `True`.

For example,

```
.. currentmodule:: sphinx

.. autosummary::

    environment.BuildEnvironment
    util.relative_uri
```

produces a table like this:

<code>environment.BuildEnvironment(app)</code>	The environment in which the ReST files are translated.
<code>util.relative_uri(base, to)</code>	Return a relative URL from <code>base</code> to <code>to</code> .

Autosummary preprocesses the docstrings and signatures with the same `autodoc-process-docstring` and `autodoc-process-signature` hooks as `autodoc`.

Options

- If you want the `autosummary` table to also serve as a `toctree` entry, use the `toctree` option, for example:

```
.. autosummary::
   :toctree: DIRNAME

    sphinx.environment.BuildEnvironment
    sphinx.util.relative_uri
```

The `toctree` option also signals to the **sphinx-autogen** script that stub pages should be generated for the entries listed in this directive. The option accepts a directory name as an argument; **sphinx-autogen** will by default place its output in this directory. If no argument is given, output is placed in the same directory as the file that contains the directive.

You can also use `caption` option to give a caption to the toctree.

Added in version 3.1: `caption` option added.

- If you don't want the `autosummary` to show function signatures in the listing, include the `nosignatures` option:

```
.. autosummary::
   :nosignatures:

   sphinx.environment.BuildEnvironment
   sphinx.util.relative_uri
```

- You can specify a custom template with the `template` option. For example,

```
.. autosummary::
   :template: mytemplate.rst

   sphinx.environment.BuildEnvironment
```

would use the template `mytemplate.rst` in your `templates_path` to generate the pages for all entries listed. See *Customizing templates* below.

Added in version 1.0.

- You can specify the `recursive` option to generate documents for modules and sub-packages recursively. It defaults to disabled. For example,

```
.. autosummary::
   :recursive:

   sphinx.environment.BuildEnvironment
```

Added in version 3.1.

sphinx-autogen – generate autodoc stub pages

The **sphinx-autogen** script can be used to conveniently generate stub documentation pages for items included in `autosummary` listings.

For example, the command

```
$ sphinx-autogen -o generated *.rst
```

will read all `autosummary` tables in the `*.rst` files that have the `:toctree:` option set, and output corresponding stub pages in directory `generated` for all documented items. The generated pages by default contain text of the form:

```
sphinx.util.relative_uri
=====
.. autofunction:: sphinx.util.relative_uri
```

If the `-o` option is not given, the script will place the output files in the directories specified in the `:toctree:` options.

For more information, refer to the *sphinx-autogen documentation*

Generating stub pages automatically

If you do not want to create stub pages with **sphinx-autogen**, you can also use these config values:

autosummary_context

A dictionary of values to pass into the template engine's context for autosummary stubs files.

Added in version 3.1.

autosummary_generate

Boolean indicating whether to scan all found documents for autosummary directives, and to generate stub pages for each. It is enabled by default.

Can also be a list of documents for which stub pages should be generated.

The new files will be placed in the directories specified in the `:toctree:` options of the directives.

Changed in version 2.3: Emits *autodoc-skip-member* event as *autodoc* does.

Changed in version 4.0: Enabled by default.

autosummary_generate_overwrite

If true, autosummary overwrites existing files by generated stub pages. Defaults to true (enabled).

Added in version 3.0.

autosummary_mock_imports

This value contains a list of modules to be mocked up. See *autodoc_mock_imports* for more details. It defaults to *autodoc_mock_imports*.

Added in version 2.0.

autosummary_imported_members

A boolean flag indicating whether to document classes and functions imported in modules. Default is False

Added in version 2.1.

Changed in version 4.4: If `autosummary_ignore_module_all` is False, this configuration value is ignored for members listed in `__all__`.

autosummary_ignore_module_all

If False and a module has the `__all__` attribute set, autosummary documents every member listed in `__all__` and no others. Default is True

Note that if an imported member is listed in `__all__`, it will be documented regardless of the value of `autosummary_imported_members`. To match the behaviour of `from module import *`, set `autosummary_ignore_module_all` to False and `autosummary_imported_members` to True.

Added in version 4.4.

autosummary_filename_map

A dict mapping object names to filenames. This is necessary to avoid filename conflicts where multiple objects have names that are indistinguishable when case is ignored, on file systems where filenames are case-insensitive.

Added in version 3.2.

Customizing templates

Added in version 1.0.

You can customize the stub page templates, in a similar way as the HTML Jinja templates, see [Templating](#). (*TemplateBridge* is not supported.)

Note: If you find yourself spending much time tailoring the stub templates, this may indicate that it’s a better idea to write custom narrative documentation instead.

Autosummary uses the following Jinja template files:

- `autosummary/base.rst` – fallback template
- `autosummary/module.rst` – template for modules
- `autosummary/class.rst` – template for classes
- `autosummary/function.rst` – template for functions
- `autosummary/attribute.rst` – template for class attributes
- `autosummary/method.rst` – template for class methods

The following variables are available in the templates:

name

Name of the documented object, excluding the module and class parts.

objname

Name of the documented object, excluding the module parts.

fullname

Full name of the documented object, including module and class parts.

objtype

Type of the documented object, one of "module", "function", "class", "method", "attribute", "data", "object", "exception", "newvarattribute", "newtypedata", "property".

module

Name of the module the documented object belongs to.

class

Name of the class the documented object belongs to. Only available for methods and attributes.

underline

A string containing `len(full_name) * '='`. Use the `underline` filter instead.

members

List containing names of all members of the module or class. Only available for modules and classes.

inherited_members

List containing names of all inherited members of class. Only available for classes.

Added in version 1.8.0.

functions

List containing names of “public” functions in the module. Here, “public” means that the name does not start with an underscore. Only available for modules.

classes

List containing names of “public” classes in the module. Only available for modules.

exceptions

List containing names of “public” exceptions in the module. Only available for modules.

methods

List containing names of “public” methods in the class. Only available for classes.

attributes

List containing names of “public” attributes in the class/module. Only available for classes and modules.

Changed in version 3.1: Attributes of modules are supported.

modules

List containing names of “public” modules in the package. Only available for modules that are packages and the recursive option is on.

Added in version 3.1.

Additionally, the following filters are available

escape(*s*)

Escape any special characters in the text to be used in formatting RST contexts. For instance, this prevents asterisks making things bold. This replaces the builtin Jinja [escape filter](#)³⁰⁹ that does html-escaping.

underline(*s*, *line*='=')

Add a title underline to a piece of text.

For instance, `{{ fullname | escape | underline }}` should be used to produce the title of a page.

Note: You can use the [autosummary](#) directive in the stub pages. Stub pages are generated also based on these directives.

sphinx.ext.coverage – Collect doc coverage stats

This extension features one additional builder, the [CoverageBuilder](#).

class sphinx.ext.coverage.CoverageBuilder

To use this builder, activate the coverage extension in your configuration file and give `-M coverage` on the command line.

Todo: Write this section.

Several configuration values can be used to specify what the builder should check:

coverage_ignore_modules

coverage_ignore_functions

coverage_ignore_classes

³⁰⁹ <https://jinja.palletsprojects.com/en/3.0.x/templates/#jinja-filters.escape>

coverage_ignore_pyobjects

List of [Python regular expressions](#)³¹⁰.

If any of these regular expressions matches any part of the full import path of a Python object, that Python object is excluded from the documentation coverage report.

Added in version 2.1.

coverage_c_path**coverage_c_regexes****coverage_ignore_c_items****coverage_write_headline**

Set to False to not write headlines.

Added in version 1.1.

coverage_skip_undoc_in_source

Skip objects that are not documented in the source with a docstring. False by default.

Added in version 1.1.

coverage_show_missing_items

Print objects that are missing to standard output also. False by default.

Added in version 3.1.

coverage_statistics_to_report

Print a tabular report of the coverage statistics to the coverage report. True by default.

Example output:

```
+-----+-----+-----+
| Module           | Coverage | Undocumented |
+=====+=====+=====+
| package.foo_module | 100.00% | 0            |
+-----+-----+-----+
| package.bar_module | 83.33%  | 1            |
+-----+-----+-----+
```

Added in version 7.2.

coverage_statistics_to_stdout

Print a tabular report of the coverage statistics to standard output. False by default.

Example output:

```
+-----+-----+-----+
| Module           | Coverage | Undocumented |
+=====+=====+=====+
| package.foo_module | 100.00% | 0            |
+-----+-----+-----+
| package.bar_module | 83.33%  | 1            |
+-----+-----+-----+
```

Added in version 7.2.

³¹⁰ <https://docs.python.org/library/re>

sphinx.ext.doctest – Test snippets in the documentation

It is often helpful to include snippets of code in your documentation and demonstrate the results of executing them. But it is important to ensure that the documentation stays up-to-date with the code.

This extension allows you to test such code snippets in the documentation in a natural way. If you mark the code blocks as shown here, the doctest builder will collect them and run them as doctest tests.

Within each document, you can assign each snippet to a *group*. Each group consists of:

- zero or more *setup code* blocks (e.g. importing the module to test)
- one or more *test* blocks

When building the docs with the doctest builder, groups are collected for each document and run one after the other, first executing setup code blocks, then the test blocks in the order they appear in the file.

There are two kinds of test blocks:

- *doctest-style* blocks mimic interactive sessions by interleaving Python code (including the interpreter prompt) and output.
- *code-output-style* blocks consist of an ordinary piece of Python code, and optionally, a piece of output for that code.

Directives

The *group* argument below is interpreted as follows: if it is empty, the block is assigned to the group named `default`. If it is `*`, the block is assigned to all groups (including the `default` group). Otherwise, it must be a comma-separated list of group names.

.. testsetup:: [group]

A setup code block. This code is not shown in the output for other builders, but executed before the doctests of the group(s) it belongs to.

.. testcleanup:: [group]

A cleanup code block. This code is not shown in the output for other builders, but executed after the doctests of the group(s) it belongs to.

Added in version 1.1.

.. doctest:: [group]

A doctest-style code block. You can use standard [doctest](#)³¹¹ flags for controlling how actual output is compared with what you give as output. The default set of flags is specified by the [doctest_default_flags](#) configuration variable.

This directive supports five options:

- **hide**, a flag option, hides the doctest block in other builders. By default it is shown as a highlighted doctest block.
- **options**, a string option, can be used to give a comma-separated list of doctest flags that apply to each example in the tests. (You still can give explicit flags per example, with doctest comments, but they will show up in other builders too.)
- **pyversion**, a string option, can be used to specify the required Python version for the example to be tested. For instance, in the following case the example will be tested only for Python versions greater than 3.10:

```
.. doctest::  
:pyversion: > 3.10
```

The following operands are supported:

- `~=`: Compatible release clause
- `==`: Version matching clause
- `!=`: Version exclusion clause
- `<=`, `>=`: Inclusive ordered comparison clause
- `<`, `>`: Exclusive ordered comparison clause
- `===`: Arbitrary equality clause.

`pyversion` option is followed [PEP-440: Version Specifiers](#)³¹².

Added in version 1.6.

Changed in version 1.7: Supported PEP-440 operands and notations

- `trim-doctest-flags` and `no-trim-doctest-flags`, a flag option, doctest flags (comments looking like `# doctest: FLAG, ...`) at the ends of lines and `<BLANKLINE>` markers are removed (or not removed) individually. Default is `trim-doctest-flags`.

Note that like with standard doctests, you have to use `<BLANKLINE>` to signal a blank line in the expected output. The `<BLANKLINE>` is removed when building presentation output (HTML, LaTeX etc.).

Also, you can give inline doctest options, like in doctest:

```
>>> datetime.date.now()    # doctest: +SKIP
datetime.date(2008, 1, 1)
```

They will be respected when the test is run, but stripped from presentation output.

.. testcode:: [group]

A code block for a code-output-style test.

This directive supports three options:

- `hide`, a flag option, hides the code block in other builders. By default it is shown as a highlighted code block.
- `trim-doctest-flags` and `no-trim-doctest-flags`, a flag option, doctest flags (comments looking like `# doctest: FLAG, ...`) at the ends of lines and `<BLANKLINE>` markers are removed (or not removed) individually. Default is `trim-doctest-flags`.

Note: Code in a `testcode` block is always executed all at once, no matter how many statements it contains. Therefore, output will *not* be generated for bare expressions – use `print`. Example:

```
.. testcode::

    1+1          # this will give no output!
    print(2+2)   # this will give output

.. testoutput::

    4
```

³¹¹ <https://docs.python.org/3/library/doctest.html#module-doctest>

³¹² <https://peps.python.org/pep-0440/#version-specifiers>

Also, please be aware that since the doctest module does not support mixing regular output and an exception message in the same snippet, this applies to `testcode`/`testoutput` as well.

.. testoutput:: [group]

The corresponding output, or the exception message, for the last `testcode` block.

This directive supports four options:

- `hide`, a flag option, hides the output block in other builders. By default it is shown as a literal block without highlighting.
- `options`, a string option, can be used to give doctest flags (comma-separated) just like in normal doctest blocks.
- `trim-doctest-flags` and `no-trim-doctest-flags`, a flag option, doctest flags (comments looking like `# doctest: FLAG, ...`) at the ends of lines and `<BLANKLINE>` markers are removed (or not removed) individually. Default is `trim-doctest-flags`.

Example:

```
.. testcode::

    print('Output      text.')
```

```
.. testoutput::
:hide:
:options: -ELLIPSIS, +NORMALIZE_WHITESPACE

Output text.
```

The following is an example for the usage of the directives. The test via `doctest` and the test via `testcode` and `testoutput` are equivalent.

The parrot module

```
.. testsetup:: *
```

```
    import parrot
```

The parrot module is a module about parrots.

Doctest example:

```
.. doctest::
```

```
>>> parrot.voom(3000)
This parrot wouldn't voom if you put 3000 volts through it!
```

Test-Output example:

```
.. testcode::
```

```
    parrot.voom(3000)
```

(continues on next page)

(continued from previous page)

This would output:

```
.. testoutput::
```

```
    This parrot wouldn't vroom if you put 3000 volts through it!
```

Skipping tests conditionally

`skipif`, a string option, can be used to skip directives conditionally. This may be useful e.g. when a different set of tests should be run depending on the environment (hardware, network/VPN, optional dependencies or different versions of dependencies). The `skipif` option is supported by all of the doctest directives. Below are typical use cases for `skipif` when used for different directives:

- `testsetup` and `testcleanup`
 - conditionally skip test setup and/or cleanup
 - customize setup/cleanup code per environment
- `doctest`
 - conditionally skip both a test and its output verification
- `testcode`
 - conditionally skip a test
 - customize test code per environment
- `testoutput`
 - conditionally skip output assertion for a skipped test
 - expect different output depending on the environment

The value of the `skipif` option is evaluated as a Python expression. If the result is a true value, the directive is omitted from the test run just as if it wasn't present in the file at all.

Instead of repeating an expression, the `doctest_global_setup` configuration option can be used to assign it to a variable which can then be used instead.

Here's an example which skips some tests if Pandas is not installed:

Listing 1: conf.py

```
extensions = ['sphinx.ext.doctest']
doctest_global_setup = '''
try:
    import pandas as pd
except ImportError:
    pd = None
'''
```

Listing 2: contents.rst

```
.. testsetup::
   :skipif: pd is None
```

(continues on next page)

(continued from previous page)

```
data = pd.Series([42])

.. doctest::
   :skipif: pd is None

>>> data.iloc[0]
42

.. testcode::
   :skipif: pd is None

print(data.iloc[-1])

.. testoutput::
   :skipif: pd is None

42
```

Configuration

The doctest extension uses the following configuration values:

doctest_default_flags

By default, these options are enabled:

- ELLIPSIS, allowing you to put ellipses in the expected output that match anything in the actual output;
- IGNORE_EXCEPTION_DETAIL, causing everything following the leftmost colon and any module information in the exception name to be ignored;
- DONT_ACCEPT_TRUE_FOR_1, rejecting “True” in the output where “1” is given – the default behavior of accepting this substitution is a relic of pre-Python 2.2 times.

Added in version 1.5.

doctest_show_successes

Defaults to True. Controls whether successes are reported.

For a project with many doctests, it may be useful to set this to False to only highlight failures.

Added in version 7.2.

doctest_path

A list of directories that will be added to `sys.path`³¹³ when the doctest builder is used. (Make sure it contains absolute paths.)

doctest_global_setup

Python code that is treated like it were put in a `testsetup` directive for *every* file that is tested, and for every group. You can use this to e.g. import modules you will always need in your doctests.

Added in version 0.6.

³¹³ <https://docs.python.org/3/library/sys.html#sys.path>

doctest_global_cleanup

Python code that is treated like it were put in a `testcleanup` directive for *every* file that is tested, and for every group. You can use this to e.g. remove any temporary files that the tests leave behind.

Added in version 1.1.

doctest_test_doctest_blocks

If this is a nonempty string (the default is `'default'`), standard reST doctest blocks will be tested too. They will be assigned to the group name given.

reST doctest blocks are simply doctests put into a paragraph of their own, like so:

```
Some documentation text.

>>> print(1)
1

Some more documentation text.
```

(Note that no special `::` is used to introduce a doctest block; docutils recognizes them from the leading `>>>`. Also, no additional indentation is used, though it doesn't hurt.)

If this value is left at its default value, the above snippet is interpreted by the doctest builder exactly like the following:

```
Some documentation text.

.. doctest::

    >>> print(1)
    1

Some more documentation text.
```

This feature makes it easy for you to test doctests in docstrings included with the [autodoc](#) extension without marking them up with a special directive.

Note though that you can't have blank lines in reST doctest blocks. They will be interpreted as one block ending and another one starting. Also, removal of `<BLANKLINE>` and `# doctest: options` only works in [doctest](#) blocks, though you may set [trim_doctest_flags](#) to achieve that in all code blocks with Python console content.

sphinx.ext.duration – Measure durations of Sphinx processing

Added in version 2.4.

This extension measures durations of Sphinx processing and show its result at end of the build. It is useful for inspecting what document is slowly built.

sphinx.ext.extlinks – Markup to shorten external links

Module author: Georg Brandl

Added in version 1.0.

This extension is meant to help with the common pattern of having many external links that point to URLs on one and the same site, e.g. links to bug trackers, version control web interfaces, or simply subpages in other websites. It does so by providing aliases to base URLs, so that you only need to give the subpage name when creating a link.

Let’s assume that you want to include many links to issues at the Sphinx tracker, at <https://github.com/sphinx-doc/sphinx/issues/num>. Typing this URL again and again is tedious, so you can use *extlinks* to avoid repeating yourself.

The extension adds a config value:

extlinks

This config value must be a dictionary of external sites, mapping unique short alias names to a *base URL* and a *caption*. For example, to create an alias for the above mentioned issues, you would add

```
extlinks = {'issue': ('https://github.com/sphinx-doc/sphinx/issues/%s',
                     'issue %s')}
```

Now, you can use the alias name as a new role, e.g. `:issue:`123``. This then inserts a link to <https://github.com/sphinx-doc/sphinx/issues/123>. As you can see, the target given in the role is substituted in the *base URL* in the place of `%s`.

The link caption depends on the second item in the tuple, the *caption*:

- If *caption* is `None`, the link caption is the full URL.
- If *caption* is a string, then it must contain `%s` exactly once. In this case the link caption is *caption* with the partial URL substituted for `%s` – in the above example, the link caption would be `issue 123`.

To produce a literal `%` in either *base URL* or *caption*, use `%%`:

```
extlinks = {'KnR': ('https://example.org/K%%26R/page/%s',
                   '[K&R; page %s]')}
```

You can also use the usual “explicit title” syntax supported by other roles that generate links, i.e. `:issue:`this issue <123>``. In this case, the *caption* is not relevant.

Changed in version 4.0: Support to substitute by ‘`%s`’ in the caption.

Note: Since links are generated from the role in the reading stage, they appear as ordinary links to e.g. the `linkcheck` builder.

extlinks_detect_hardcoded_links

If enabled, *extlinks* emits a warning if a hardcoded link is replaceable by an extlink, and suggests a replacement via warning. It defaults to `False`.

Added in version 4.5.

sphinx.ext.githubpages – Publish HTML docs in GitHub Pages

Added in version 1.4.

Changed in version 2.0: Support CNAME file

This extension creates `.nojekyll` file on generated HTML directory to publish the document on GitHub Pages.

It also creates a CNAME file for custom domains when `html_baseurl` set.

sphinx.ext.graphviz – Add Graphviz graphs

Added in version 0.6.

This extension allows you to embed [Graphviz](https://graphviz.org/)³¹⁴ graphs in your documents.

It adds these directives:

.. graphviz::

Directive to embed graphviz code. The input code for dot is given as the content. For example:

```
.. graphviz::

    digraph foo {
        "bar" -> "baz";
    }
```

In HTML output, the code will be rendered to a PNG or SVG image (see [graphviz_output_format](#)). In LaTeX output, the code will be rendered to an embeddable PDF file.

You can also embed external dot files, by giving the file name as an argument to `graphviz` and no additional content:

```
.. graphviz:: external.dot
```

As for all file references in Sphinx, if the filename is absolute, it is taken as relative to the source directory.

Changed in version 1.1: Added support for external files.

options

:alt: alternate text (text)

The alternate text of the graph. By default, the graph code is used to the alternate text.

Added in version 1.0.

:align: alignment of the graph (left, center or right)

The horizontal alignment of the graph.

Added in version 1.5.

:caption: caption of the graph (text)

The caption of the graph.

Added in version 1.1.

³¹⁴ <https://graphviz.org/>

:layout: layout type of the graph (text)

The layout of the graph (ex. dot, neato and so on). A path to the graphviz commands are also allowed. By default, `graphviz_dot` is used.

Added in version 1.4.

Changed in version 2.2: Renamed from `graphviz_dot`

:name: label (text)

The label of the graph.

Added in version 1.6.

:class: class names (a list of class names separated by spaces)

The class name of the graph.

Added in version 2.4.

.. graph::

Directive for embedding a single undirected graph. The name is given as a directive argument, the contents of the graph are the directive content. This is a convenience directive to generate `graph <name> { <content> }`.

For example:

```
.. graph:: foo

    "bar" -- "baz";
```

Note: The graph name is passed unchanged to Graphviz. If it contains non-alphanumeric characters (e.g. a dash), you will have to double-quote it.

options

Same as `graphviz`.

:alt: alternate text (text)

Added in version 1.0.

:align: alignment of the graph (left, center or right)

Added in version 1.5.

:caption: caption of the graph (text)

Added in version 1.1.

:layout: layout type of the graph (text)

Added in version 1.4.

Changed in version 2.2: Renamed from `graphviz_dot`

:name: label (text)

Added in version 1.6.

:class: class names (a list of class names separated by spaces)

The class name of the graph.

Added in version 2.4.

.. digraph::

Directive for embedding a single directed graph. The name is given as a directive argument, the contents of the graph are the directive content. This is a convenience directive to generate `digraph <name> { <content> }`.

For example:

```
.. digraph:: foo

    "bar" -> "baz" -> "quux";
```

options

Same as *graphviz*.

:alt: alternate text (text)

Added in version 1.0.

:align: alignment of the graph (left, center or right)

Added in version 1.5.

:caption: caption of the graph (text)

Added in version 1.1.

:layout: layout type of the graph (text)

Added in version 1.4.

Changed in version 2.2: Renamed from `graphviz_dot`

:name: label (text)

Added in version 1.6.

:class: class names (a list of class names separated by spaces)

The class name of the graph.

Added in version 2.4.

There are also these config values:

graphviz_dot

The command name with which to invoke dot. The default is 'dot'; you may need to set this to a full path if dot is not in the executable search path.

Since this setting is not portable from system to system, it is normally not useful to set it in `conf.py`; rather, giving it on the **sphinx-build** command line via the `-D` option should be preferable, like this:

```
sphinx-build -M html -D graphviz_dot=C:\graphviz\bin\dot.exe . _build
```

graphviz_dot_args

Additional command-line arguments to give to dot, as a list. The default is an empty list. This is the right place to set global graph, node or edge attributes via dot's `-G`, `-N` and `-E` options.

graphviz_output_format

The output format for Graphviz when building HTML files. This must be either 'png' or 'svg'; the default is 'png'. If 'svg' is used, in order to make the URL links work properly, an appropriate target attribute must be set, such as `"_top"` and `"_blank"`. For example, the link in the following graph should work in the svg output:

```
.. graphviz::

    digraph example {
        a [label="sphinx", href="https://www.sphinx-doc.org/", target="_top"];
        b [label="other"];
        a -> b;
    }
```

Added in version 1.0: Previously, output always was PNG.

sphinx.ext.ifconfig – Include content based on configuration

This extension is quite simple, and features only one directive:

Warning: This directive is designed to control only content of document. It could not control sections, labels and so on.

.. ifconfig::

Include content of the directive only if the Python expression given as an argument is True, evaluated in the namespace of the project's configuration (that is, all registered variables from `conf.py` are available).

For example, one could write

```
.. ifconfig:: releaselevel in ('alpha', 'beta', 'rc')
```

This stuff is only included in the built docs for unstable versions.

To make a custom config value known to Sphinx, use `add_config_value()` in the setup function in `conf.py`, e.g.:

```
def setup(app):
    app.add_config_value('releaselevel', '', 'env')
```

The second argument is the default value, the third should always be 'env' for such values (it selects if Sphinx re-reads the documents if the value changes).

sphinx.ext.imgconverter – A reference image converter using ImageMagick

Added in version 1.6.

This extension converts images in your document to appropriate format for builders. For example, it allows you to use SVG images with LaTeX builder. As a result, you don't mind what image format the builder supports.

By default the extension uses [ImageMagick](https://www.imagemagick.org)³¹⁵ to perform conversions, and will not work if ImageMagick is not installed.

Note: ImageMagick rasterizes a SVG image on conversion. As a result, the image becomes not scalable. To avoid that, please use other image converters like [sphinxcontrib-svg2pdfconverter](https://github.com/missinglinkelectronics/sphinxcontrib-svg2pdfconverter)³¹⁶ (which uses Inkscape or rsvg-convert).

³¹⁵ <https://www.imagemagick.org>

³¹⁶ <https://github.com/missinglinkelectronics/sphinxcontrib-svg2pdfconverter>

Configuration

`image_converter`

A path to a conversion command. By default, the `imgconverter` finds the command from search paths.

On Unix platforms, the command **convert** is used by default.

On Windows, the command **magick** is used by default.

Changed in version 3.1: Use **magick** command by default on windows

`image_converter_args`

Additional command-line arguments to give to **convert**, as a list. The default is an empty list `[]`.

On Windows, it defaults to `["convert"]`.

Changed in version 3.1: Use `["convert"]` by default on Windows

`sphinx.ext.inheritance_diagram` – Include inheritance diagrams

Added in version 0.6.

This extension allows you to include inheritance diagrams, rendered via the [Graphviz extension](#).

It adds this directive:

`.. inheritance-diagram::`

This directive has one or more arguments, each giving a module or class name. Class names can be unqualified; in that case they are taken to exist in the currently described module (see [py:module](#)).

For each given class, and each class in each given module, the base classes are determined. Then, from all classes and their base classes, a graph is generated which is then rendered via the `graphviz` extension to a directed graph.

This directive supports an option called `parts` that, if given, must be an integer, advising the directive to keep that many dot-separated parts in the displayed names (from right to left). For example, `parts=1` will only display class names, without the names of the modules that contain them.

Changed in version 2.0: The value of for `parts` can also be negative, indicating how many parts to drop from the left. For example, if all your class names start with `lib.`, you can give `:parts: -1` to remove that prefix from the displayed node names.

The directive also supports a `private-bases` flag option; if given, private base classes (those whose name starts with `_`) will be included.

You can use `caption` option to give a caption to the diagram.

Changed in version 1.1: Added `private-bases` option; previously, all bases were always included.

Changed in version 1.5: Added `caption` option

It also supports a `top-classes` option which requires one or more class names separated by comma. If specified inheritance traversal will stop at the specified class names. Given the following Python module:

```
"""
    A
   /\
  B  C
 /\  /\
E  D  F
"""
```

(continues on next page)

(continued from previous page)

```
class A:
    pass

class B(A):
    pass

class C(A):
    pass

class D(B, C):
    pass

class E(B):
    pass

class F(C):
    pass
```

If you have specified a module in the inheritance diagram like this:

```
.. inheritance-diagram:: dummy.test
   :top-classes: dummy.test.B, dummy.test.C
```

any base classes which are ancestors to `top-classes` and are also defined in the same module will be rendered as stand alone nodes. In this example class A will be rendered as stand alone node in the graph. This is a known issue due to how this extension works internally.

If you don't want class A (or any other ancestors) to be visible then specify only the classes you would like to generate the diagram for like this:

```
.. inheritance-diagram:: dummy.test.D dummy.test.E dummy.test.F
   :top-classes: dummy.test.B, dummy.test.C
```


Changed in version 1.7: Added `top-classes` option to limit the scope of inheritance graphs.

Examples

The following are different inheritance diagrams for the internal `InheritanceDiagram` class that implements the directive.


With full names:

```
.. inheritance-diagram:: sphinx.ext.inheritance_diagram.InheritanceDiagram
```



Showing class names only:

```
.. inheritance-diagram:: sphinx.ext.inheritance_diagram.InheritanceDiagram
   :parts: 1
```



Stopping the diagram at *sphinx.util.docutils.SphinxDirective* (the highest superclass still part of Sphinx), and dropping the common left-most part (sphinx) from all names:

```
.. inheritance-diagram:: sphinx.ext.inheritance_diagram.InheritanceDiagram
   :top-classes: sphinx.util.docutils.SphinxDirective
   :parts: -1
```



class sphinx.ext.inheritance_diagram.InheritanceDiagram

The internal class that implements the `inheritance-diagram` directive.

Configuration

inheritance_graph_attrs

A dictionary of graphviz graph attributes for inheritance diagrams.

For example:

```
inheritance_graph_attrs = dict(rankdir="LR", size='"6.0, 8.0"',
                               fontsize=14, ratio='compress')
```

inheritance_node_attrs

A dictionary of graphviz node attributes for inheritance diagrams.

For example:

```
inheritance_node_attrs = dict(shape='ellipse', fontsize=14, height=0.75,
                              color='dodgerblue1', style='filled')
```

inheritance_edge_attrs

A dictionary of graphviz edge attributes for inheritance diagrams.

inheritance_alias

Allows mapping the full qualified name of the class to custom values (useful when exposing the underlying path of a class is not desirable, e.g. it's a private class and should not be instantiated by the user).

For example:

```
inheritance_alias = {'_pytest.Magic': 'pytest.Magic'}
```

sphinx.ext.intersphinx – Link to other projects' documentation

Added in version 0.5.

This extension can generate links to the documentation of objects in external projects, either explicitly through the [*external*](#) role, or as a fallback resolution for any other cross-reference.

Usage for fallback resolution is simple: whenever Sphinx encounters a cross-reference that has no matching target in the current documentation set, it looks for targets in the external documentation sets configured in [*intersphinx_mapping*](#). A reference like `:py:class:`zipfile.ZipFile`` can then link to the Python documentation for the ZipFile class, without you having to specify where it is located exactly.

When using the [*external*](#) role, you can force lookup to any external projects, and optionally to a specific external project. A link like `:external:ref:`comparison manual <comparisons>`` will then link to the label “comparisons” in whichever configured external project, if it exists, and a link like `:external+python:ref:`comparison manual <comparisons>`` will link to the label “comparisons” only in the doc set “python”, if it exists.

Behind the scenes, this works as follows:

- Each Sphinx HTML build creates a file named `objects.inv` that contains a mapping from object names to URIs relative to the HTML set's root.
- Projects using the Intersphinx extension can specify the location of such mapping files in the [*intersphinx_mapping*](#) config value. The mapping will then be used to resolve both [*external*](#) references, and also otherwise missing references to objects into links to the other documentation.
- By default, the mapping file is assumed to be at the same location as the rest of the documentation; however, the location of the mapping file can also be specified individually, e.g. if the docs should be buildable without Internet access.

Configuration

To use Intersphinx linking, add `'sphinx.ext.intersphinx'` to your [*extensions*](#) config value, and use these config values to activate linking:

intersphinx_mapping

This config value contains the locations and names of other projects that should be linked to in this documentation.

Relative local paths for target locations are taken as relative to the base of the built documentation, while relative local paths for inventory locations are taken as relative to the source directory.

When fetching remote inventory files, proxy settings will be read from the `$HTTP_PROXY` environment variable.

Format

Added in version 1.0.

A dictionary mapping unique identifiers to a tuple (`target`, `inventory`). Each `target` is the base URI of a foreign Sphinx documentation set and can be a local path or an HTTP URI. The `inventory` indicates where the inventory file can be found: it can be `None` (an `objects.inv` file at the same location as the base URI) or another local file path or a full HTTP URI to an inventory file.

The unique identifier can be used in the [external](#) role, so that it is clear which intersphinx set the target belongs to. A link like `external:python+ref:comparison manual <comparisons>` will link to the label “comparisons” in the doc set “python”, if it exists.

Example

To add links to modules and objects in the Python standard library documentation, use:

```
intersphinx_mapping = {'python': ('https://docs.python.org/3', None)}
```

This will download the corresponding `objects.inv` file from the Internet and generate links to the pages under the given URI. The downloaded inventory is cached in the Sphinx environment, so it must be re-downloaded whenever you do a full rebuild.

A second example, showing the meaning of a non-None value of the second tuple item:

```
intersphinx_mapping = {'python': ('https://docs.python.org/3',
                                  'python-inv.txt')}
```

This will read the inventory from `python-inv.txt` in the source directory, but still generate links to the pages under `https://docs.python.org/3`. It is up to you to update the inventory file as new objects are added to the Python documentation.

Multiple targets for the inventory

Added in version 1.3.

Alternative files can be specified for each inventory. One can give a tuple for the second inventory tuple item as shown in the following example. This will read the inventory iterating through the (second) tuple items until the first successful fetch. The primary use case for this is to specify mirror sites for server downtime of the primary inventory:

```
intersphinx_mapping = {'python': ('https://docs.python.org/3',
                                  (None, 'python-inv.txt'))}
```

For a set of books edited and tested locally and then published together, it could be helpful to try a local inventory file first, to check references before publication:

```
intersphinx_mapping = {
    'otherbook':
        ('https://myproj.readthedocs.io/projects/otherbook/en/latest',
         ('../otherbook/build/html/objects.inv', None)),
}
```

Old format for this config value

Deprecated since version 6.2.

Caution: This is the format used before Sphinx 1.0. It is deprecated and will be removed in Sphinx 8.0.

A dictionary mapping URIs to either `None` or an URI. The keys are the base URI of the foreign Sphinx documentation sets and can be local paths or HTTP URIs. The values indicate where the inventory file can be found: they can be `None` (at the same location as the base URI) or another local or HTTP URI.

Example:

```
intersphinx_mapping = {'https://docs.python.org/': None}
```

intersphinx_cache_limit

The maximum number of days to cache remote inventories. The default is 5, meaning five days. Set this to a negative value to cache inventories for unlimited time.

intersphinx_timeout

The number of seconds for timeout. The default is None, meaning do not timeout.

Note: timeout is not a time limit on the entire response download; rather, an exception is raised if the server has not issued a response for timeout seconds.

intersphinx_disabled_reftypes

Added in version 4.3.

Changed in version 5.0: Changed default value from an empty list to ['std:doc'].

A list of strings being either:

- the name of a specific reference type in a domain, e.g., `std:doc`, `py:func`, or `cpp:class`,
- the name of a domain, and a wildcard, e.g., `std:*`, `py:*`, or `cpp:*`, or
- simply a wildcard `*`.

The default value is ['std:doc'].

When a non-[external](#) cross-reference is being resolved by intersphinx, skip resolution if it matches one of the specifications in this list.

For example, with `intersphinx_disabled_reftypes = ['std:doc']` a cross-reference `:doc:`installation`` will not be attempted to be resolved by intersphinx, but `:external+otherbook:doc:`installation`` will be attempted to be resolved in the inventory named `otherbook` in [intersphinx_mapping](#). At the same time, all cross-references generated in, e.g., Python, declarations will still be attempted to be resolved by intersphinx.

If `*` is in the list of domains, then no non-[external](#) references will be resolved by intersphinx.

Explicitly Reference External Objects

The Intersphinx extension provides the following role.

:external:

Added in version 4.4.

Use Intersphinx to perform lookup only in external projects, and not the current project. Intersphinx still needs to know the type of object you would like to find, so the general form of this role is to write the cross-reference as if the object is in the current project, but then prefix it with `:external`. The two forms are then

- `:external:domain:reftype:`target``, e.g., `:external:py:class:`zipfile.ZipFile``, or
- `:external:reftype:`target``, e.g., `:external:doc:`installation``. With this shorthand, the domain is assumed to be `std`.

If you would like to constrain the lookup to a specific external project, then the key of the project, as specified in [intersphinx_mapping](#), is added as well to get the two forms

- `:external+invname:domain:reftype:`target``, e.g., `:external+python:py:class:`zipfile.ZipFile``, or
- `:external+invname:reftype:`target``, e.g., `:external+python:doc:`installation``.

Showing all links of an Intersphinx mapping file

To show all Intersphinx links and their targets of an Intersphinx mapping file, run `python -msphinx.ext.intersphinx url-or-path`. This is helpful when searching for the root cause of a broken Intersphinx link in a documentation project. The following example prints the Intersphinx mapping of the Python 3 documentation:

```
$ python -m sphinx.ext.intersphinx https://docs.python.org/3/objects.inv
```

Using Intersphinx with inventory file under Basic Authorization

Intersphinx supports Basic Authorization like this:

```
intersphinx_mapping = {'python': ('https://user:password@docs.python.org/3',
                                  None)}
```

The user and password will be stripped from the URL when generating the links.

sphinx.ext.linkcode – Add external links to source code

Module author: Pauli Virtanen

Added in version 1.2.

This extension looks at your object descriptions (`.. class::`, `.. function::` etc.) and adds external links to code hosted somewhere on the web. The intent is similar to the `sphinx.ext.viewcode` extension, but assumes the source code can be found somewhere on the Internet.

In your configuration, you need to specify a `linkcode_resolve` function that returns an URL based on the object.

Configuration

linkcode_resolve

This is a function `linkcode_resolve(domain, info)`, which should return the URL to source code corresponding to the object in given domain with given information.

The function should return `None` if no link is to be added.

The argument `domain` specifies the language domain the object is in. `info` is a dictionary with the following keys guaranteed to be present (dependent on the domain):

- `py`: module (name of the module), `fullname` (name of the object)
- `c`: names (list of names for the object)
- `cpp`: names (list of names for the object)
- `javascript`: object (name of the object), `fullname` (name of the item)

Example:

```
def linkcode_resolve(domain, info):
    if domain != 'py':
        return None
    if not info['module']:
        return None
```

(continues on next page)

(continued from previous page)

```
filename = info['module'].replace('.', '/')
return "https://somesite/sourcerepo/%s.py" % filename
```

Math support for HTML outputs in Sphinx

Added in version 0.5.

Changed in version 1.8: Math support for non-HTML builders is integrated to sphinx-core. So mathbase extension is no longer needed.

Since mathematical notation isn't natively supported by HTML in any way, Sphinx gives a math support to HTML document with several extensions. These use the reStructuredText math *directive* and *role*.

sphinx.ext.imgmath – Render math as images

Added in version 1.4.

This extension renders math via LaTeX and `dvipng`³¹⁷ or `dvisvgm`³¹⁸ into PNG or SVG images. This of course means that the computer where the docs are built must have both programs available.

There are various configuration values you can set to influence how the images are built:

imgmath_image_format

The output image format. The default is 'png'. It should be either 'png' or 'svg'. The image is produced by first executing `latex` on the TeX mathematical mark-up then (depending on the requested format) either `dvipng`³¹⁹ or `dvisvgm`³²⁰.

imgmath_use_preview

`dvipng` and `dvisvgm` both have the ability to collect from LaTeX the “depth” of the rendered math: an inline image should use this “depth” in a `vertical-align` style to get correctly aligned with surrounding text.

This mechanism requires the LaTeX `preview` package³²¹ (available as `preview-latex-style` on Ubuntu x64). Therefore, the default for this option is `False` but it is strongly recommended to set it to `True`.

Changed in version 2.2: This option can be used with the 'svg' `imgmath_image_format`.

imgmath_add_tooltips

Default: `True`. If false, do not add the LaTeX code as an “alt” attribute for math images.

imgmath_font_size

The font size (in pt) of the displayed math. The default value is 12. It must be a positive integer.

imgmath_latex

The command name with which to invoke LaTeX. The default is 'latex'; you may need to set this to a full path if `latex` is not in the executable search path.

Since this setting is not portable from system to system, it is normally not useful to set it in `conf.py`; rather, giving it on the **sphinx-build** command line via the `-D` option should be preferable, like this:

```
sphinx-build -M html -D imgmath_latex=C:\tex\latex.exe . _build
```

³¹⁷ <https://savannah.nongnu.org/projects/dvipng/>

³¹⁸ <https://dvisvgm.de/>

³¹⁹ <https://savannah.nongnu.org/projects/dvipng/>

³²⁰ <https://dvisvgm.de/>

³²¹ <https://www.gnu.org/software/auctex/preview-latex.html>

This value should only contain the path to the latex executable, not further arguments; use `imgmath_latex_args` for that purpose.

Hint: To use [OpenType Math fonts](#)³²² with `unicode-math`, via a custom `imgmath_latex_preamble`, you can set `imgmath_latex` to `'dvisualatex'`, but must then set `imgmath_image_format` to `'svg'`. Note: this has only been tested with `dvisvgm 3.0.3`. It significantly increases image production duration compared to using standard `'latex'` with traditional TeX math fonts.

Hint: Some fancy LaTeX mark-up (an example was reported which used TikZ to add various decorations to the equation) require multiple runs of the LaTeX executable. To handle this, set this configuration setting to `'latexmk'` (or a full path to it) as this Perl script reliably chooses dynamically how many latex runs are needed.

Changed in version 6.2.0: Using `'xelatex'` (or a full path to it) is now supported. But you must then add `'-no-pdf'` to the `imgmath_latex_args` list of the command options. The `'svg'` `imgmath_image_format` is required. Also, you may need the `dvisvgm` binary to be relatively recent (testing was done only with its 3.0.3 release).

Note: Regarding the previous note, it is currently not supported to use `latexmk` with option `-xelatex`.

`imgmath_latex_args`

Additional arguments to give to latex, as a list. The default is an empty list.

`imgmath_latex_preamble`

Additional LaTeX code to put into the preamble of the LaTeX files used to translate the math snippets. This is left empty by default. Use it e.g. to add packages which modify the fonts used for math, such as `'\usepackage{newtxsf}'` for sans-serif fonts, or `'\usepackage{fouriernc}'` for serif fonts. Indeed, the default LaTeX math fonts have rather thin glyphs which (in HTML output) often do not match well with the font for text.

`imgmath_dvipng`

The command name to invoke `dvipng`. The default is `'dvipng'`; you may need to set this to a full path if `dvipng` is not in the executable search path. This option is only used when `imgmath_image_format` is set to `'png'`.

`imgmath_dvipng_args`

Additional arguments to give to `dvipng`, as a list. The default value is `['-gamma', '1.5', '-D', '110', '-bg', 'Transparent']` which makes the image a bit darker and larger than it is by default (this compensates somewhat for the thinness of default LaTeX math fonts), and produces PNGs with a transparent background. This option is used only when `imgmath_image_format` is `'png'`.

`imgmath_dvisvgm`

The command name to invoke `dvisvgm`. The default is `'dvisvgm'`; you may need to set this to a full path if `dvisvgm` is not in the executable search path. This option is only used when `imgmath_image_format` is `'svg'`.

`imgmath_dvisvgm_args`

Additional arguments to give to `dvisvgm`, as a list. The default value is `['--no-fonts']`, which means that `dvisvgm` will render glyphs as path elements (cf the [dvisvgm FAQ](#)³²³). This option is used only when `imgmath_image_format` is `'svg'`.

³²² <https://tex.stackexchange.com/questions/425098/which-opentype-math-fonts-are-available>

³²³ <https://dvisvgm.de/FAQ>

imgmath_embed

Default: False. If true, encode LaTeX output images within HTML files (base64 encoded) and do not save separate png/svg files to disk.

Added in version 5.2.

sphinx.ext.mathjax – Render math via JavaScript

Warning: Version 4.0 changes the version of MathJax used to version 3. You may need to override `mathjax_path` to `https://cdn.jsdelivr.net/npm/mathjax@2/MathJax.js?config=TeX-AMS-MML_HTMLorMML` or update your configuration options for version 3 (see [mathjax3_config](#)).

Added in version 1.1.

This extension puts math as-is into the HTML files. The JavaScript package [MathJax](#)³²⁴ is then loaded and transforms the LaTeX markup to readable math live in the browser.

Because MathJax (and the necessary fonts) is very large, it is not included in Sphinx but is set to automatically include it from a third-party site.

Attention: You should use the math [directive](#) and [role](#), not the native MathJax `$$`, `\C`, etc.

mathjax_path

The path to the JavaScript file to include in the HTML files in order to load MathJax.

The default is the `https://` URL that loads the JS files from the [jsdelivr](#)³²⁵ Content Delivery Network. See the [MathJax Getting Started page](#)³²⁶ for details. If you want MathJax to be available offline or without including resources from a third-party site, you have to download it and set this value to a different path.

The path can be absolute or relative; if it is relative, it is relative to the `_static` directory of the built docs.

For example, if you put MathJax into the static path of the Sphinx docs, this value would be `MathJax/MathJax.js`. If you host more than one Sphinx documentation set on one server, it is advisable to install MathJax in a shared location.

You can also give a full `https://` URL different from the CDN URL.

mathjax_options

The options to script tag for mathjax. For example, you can set integrity option with following setting:

```
mathjax_options = {
    'integrity': 'sha384-.....',
}
```

The default is empty (`{}`).

Added in version 1.8.

Changed in version 4.4.1: Allow to change the loading method (async or defer) of MathJax if “async” or “defer” key is set.

³²⁴ <https://www.mathjax.org/>

³²⁵ <https://www.jsdelivr.com/>

³²⁶ <https://www.mathjax.org/#gettingstarted>

mathjax3_config

The configuration options for MathJax v3 (which is used by default). The given dictionary is assigned to the JavaScript variable `window.MathJax`. For more information, please read [Configuring MathJax](#)³²⁷.

The default is empty (not configured).

Added in version 4.0.

mathjax2_config

The configuration options for MathJax v2 (which can be loaded via [mathjax_path](#)). The value is used as a parameter of `MathJax.Hub.Config()`. For more information, please read [Using in-line configuration options](#)³²⁸.

For example:

```
mathjax2_config = {
    'extensions': ['tex2jax.js'],
    'jax': ['input/TeX', 'output/HTML-CSS'],
}
```

The default is empty (not configured).

Added in version 4.0: [mathjax_config](#) has been renamed to [mathjax2_config](#).

mathjax_config

Former name of [mathjax2_config](#).

For help converting your old MathJax configuration to to the new [mathjax3_config](#), see [Converting Your v2 Configuration to v3](#)³²⁹.

Added in version 1.8.

Changed in version 4.0: This has been renamed to [mathjax2_config](#). [mathjax_config](#) is still supported for backwards compatibility.

sphinx.ext.jsmath – Render math via JavaScript

This extension works just as the MathJax extension does, but uses the older package [jsMath](#)³³⁰. It provides this config value:

jsmath_path

The path to the JavaScript file to include in the HTML files in order to load JSMath. There is no default.

The path can be absolute or relative; if it is relative, it is relative to the `_static` directory of the built docs.

For example, if you put JSMath into the static path of the Sphinx docs, this value would be `jsMath/easy/load.js`. If you host more than one Sphinx documentation set on one server, it is advisable to install jsMath in a shared location.

³²⁷ <https://docs.mathjax.org/en/latest/web/configuration.html#configuration>

³²⁸ <https://docs.mathjax.org/en/v2.7-latest/configuration.html#using-in-line-configuration-options>

³²⁹ <https://docs.mathjax.org/en/latest/web/configuration.html#converting-your-v2-configuration-to-v3>

³³⁰ <https://www.math.union.edu/~dpvc/jsmath/>

sphinx.ext.napoleon – Support for NumPy and Google style docstrings

Module author: Rob Ruana

Added in version 1.3.

Overview

Are you tired of writing docstrings that look like this:

```
:param path: The path of the file to wrap
:type path: str
:param field_storage: The :class:`FileStorage` instance to wrap
:type field_storage: FileStorage
:param temporary: Whether or not to delete the file when the File
                  instance is destructed
:type temporary: bool
:returns: A buffered writable file descriptor
:rtype: BufferedFileStorage
```

`reStructuredText`³³¹ is great, but it creates visually dense, hard to read **docstrings**³³². Compare the jumble above to the same thing rewritten according to the [Google Python Style Guide](#)³³³:

```
Args:
    path (str): The path of the file to wrap
    field_storage (FileStorage): The :class:`FileStorage` instance to wrap
    temporary (bool): Whether or not to delete the file when the File
                     instance is destructed

Returns:
    BufferedFileStorage: A buffered writable file descriptor
```

Much more legible, no?

Napoleon is a *extension* that enables Sphinx to parse both [NumPy](#)³³⁴ and [Google](#)³³⁵ style docstrings - the style recommended by [Khan Academy](#)³³⁶.

Napoleon is a pre-processor that parses [NumPy](#)³³⁷ and [Google](#)³³⁸ style docstrings and converts them to `reStructuredText` before Sphinx attempts to parse them. This happens in an intermediate step while Sphinx is processing the documentation, so it doesn't modify any of the docstrings in your actual source code files.

³³¹ <https://docutils.sourceforge.io/rst.html>

³³² <https://peps.python.org/pep-0287/>

³³³ <https://google.github.io/styleguide/pyguide.html>

³³⁴ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

³³⁵ <https://google.github.io/styleguide/pyguide.html#38-comments-and-docstrings>

³³⁶ <https://github.com/Khan/style-guides/blob/master/style/python.md#docstrings>

³³⁷ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

³³⁸ <https://google.github.io/styleguide/pyguide.html#38-comments-and-docstrings>

Getting Started

1. After *setting up Sphinx* to build your docs, enable *napoleon* in the Sphinx `conf.py` file:

```
# conf.py

# Add napoleon to the extensions list
extensions = ['sphinx.ext.napoleon']
```

2. Use `sphinx-apidoc` to build your API documentation:

```
$ sphinx-apidoc -f -o docs/source projectdir
```

Docstrings

Napoleon interprets every docstring that *autodoc* can find, including docstrings on: `modules`, `classes`, `attributes`, `methods`, `functions`, and `variables`. Inside each docstring, specially formatted *Sections* are parsed and converted to reStructuredText.

All standard reStructuredText formatting still works as expected.

Docstring Sections

All of the following section headers are supported:

- `Args` (*alias of Parameters*)
- `Arguments` (*alias of Parameters*)
- `Attention`
- `Attributes`
- `Caution`
- `Danger`
- `Error`
- `Example`
- `Examples`
- `Hint`
- `Important`
- `Keyword Args` (*alias of Keyword Arguments*)
- `Keyword Arguments`
- `Methods`
- `Note`
- `Notes`
- `Other Parameters`
- `Parameters`

- `Return` (*alias of Returns*)
- `Returns`
- `Raise` (*alias of Raises*)
- `Raises`
- `References`
- `See Also`
- `Tip`
- `Todo`
- `Warning`
- `Warnings` (*alias of Warning*)
- `Warn` (*alias of Warns*)
- `Warns`
- `Yield` (*alias of Yields*)
- `Yields`

Google vs NumPy

Napoleon supports two styles of docstrings: [Google](#)³³⁹ and [NumPy](#)³⁴⁰. The main difference between the two styles is that Google uses indentation to separate sections, whereas NumPy uses underlines.

Google style:

```
def func(arg1, arg2):
    """Summary line.

    Extended description of function.

    Args:
        arg1 (int): Description of arg1
        arg2 (str): Description of arg2

    Returns:
        bool: Description of return value

    """
    return True
```

NumPy style:

```
def func(arg1, arg2):
    """Summary line.

    Extended description of function.
```

(continues on next page)

³³⁹ <https://google.github.io/styleguide/pyguide.html#38-comments-and-docstrings>

³⁴⁰ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

(continued from previous page)

```

Parameters
-----
arg1 : int
    Description of arg1
arg2 : str
    Description of arg2

Returns
-----
bool
    Description of return value

"""
return True

```

NumPy style tends to require more vertical space, whereas Google style tends to use more horizontal space. Google style tends to be easier to read for short and simple docstrings, whereas NumPy style tends to be easier to read for long and in-depth docstrings.

The choice between styles is largely aesthetic, but the two styles should not be mixed. Choose one style for your project and be consistent with it.

See also:

For complete examples:

- `example_google`
- `example_numpy`

Type Annotations

PEP 484³⁴¹ introduced a standard way to express types in Python code. This is an alternative to expressing types directly in docstrings. One benefit of expressing types according to **PEP 484**³⁴² is that type checkers and IDEs can take advantage of them for static code analysis. **PEP 484**³⁴³ was then extended by **PEP 526**³⁴⁴ which introduced a similar way to annotate variables (and attributes).

Google style with Python 3 type annotations:

```

def func(arg1: int, arg2: str) -> bool:
    """Summary line.

    Extended description of function.

    Args:
        arg1: Description of arg1
        arg2: Description of arg2

    Returns:
        Description of return value

```

(continues on next page)

³⁴¹ <https://peps.python.org/pep-0484/>

³⁴² <https://peps.python.org/pep-0484/>

³⁴³ <https://peps.python.org/pep-0484/>

³⁴⁴ <https://peps.python.org/pep-0526/>

(continued from previous page)

```
"""
    return True

class Class:
    """Summary line.

    Extended description of class

    Attributes:
        attr1: Description of attr1
        attr2: Description of attr2
    """

    attr1: int
    attr2: str
```

Google style with types in docstrings:

```
def func(arg1, arg2):
    """Summary line.

    Extended description of function.

    Args:
        arg1 (int): Description of arg1
        arg2 (str): Description of arg2

    Returns:
        bool: Description of return value

    """
    return True

class Class:
    """Summary line.

    Extended description of class

    Attributes:
        attr1 (int): Description of attr1
        attr2 (str): Description of attr2
    """
```

Note: [Python 2/3 compatible annotations](#)³⁴⁵ aren't currently supported by Sphinx and won't show up in the docs.

³⁴⁵ <https://peps.python.org/pep-0484/#suggested-syntax-for-python-2-7-and-straddling-code>

Configuration

Listed below are all the settings used by napoleon and their default values. These settings can be changed in the Sphinx `conf.py` file. Make sure that “`sphinx.ext.napoleon`” is enabled in `conf.py`:

```
# conf.py

# Add any Sphinx extension module names here, as strings
extensions = ['sphinx.ext.napoleon']

# Napoleon settings
napoleon_google_docstring = True
napoleon_numpy_docstring = True
napoleon_include_init_with_doc = False
napoleon_include_private_with_doc = False
napoleon_include_special_with_doc = True
napoleon_use_admonition_for_examples = False
napoleon_use_admonition_for_notes = False
napoleon_use_admonition_for_references = False
napoleon_use_ivar = False
napoleon_use_param = True
napoleon_use_rtype = True
napoleon_preprocess_types = False
napoleon_type_aliases = None
napoleon_attr_annotations = True
```

napoleon_google_docstring

True to parse [Google style](https://google.github.io/styleguide/pyguide.html#38-comments-and-docstrings)³⁴⁶ docstrings. False to disable support for Google style docstrings. *Defaults to True.*

napoleon_numpy_docstring

True to parse [NumPy style](https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard)³⁴⁷ docstrings. False to disable support for NumPy style docstrings. *Defaults to True.*

napoleon_include_init_with_doc

True to list `__init__` docstrings separately from the class docstring. False to fall back to Sphinx’s default behavior, which considers the `__init__` docstring as part of the class documentation. *Defaults to False.*

If True:

```
def __init__(self):
    """
    This will be included in the docs because it has a docstring
    """

def __init__(self):
    # This will NOT be included in the docs
```

napoleon_include_private_with_doc

True to include private members (like `_membername`) with docstrings in the documentation. False to fall back to Sphinx’s default behavior. *Defaults to False.*

If True:

³⁴⁶ <https://google.github.io/styleguide/pyguide.html#38-comments-and-docstrings>

³⁴⁷ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

```
def _included(self):
    """
    This will be included in the docs because it has a docstring
    """
    pass

def _skipped(self):
    # This will NOT be included in the docs
    pass
```

napoleon_include_special_with_doc

True to include special members (like `__membername__`) with docstrings in the documentation. False to fall back to Sphinx's default behavior. *Defaults to True.*

If True:

```
def __str__(self):
    """
    This will be included in the docs because it has a docstring
    """
    return unicode(self).encode('utf-8')

def __unicode__(self):
    # This will NOT be included in the docs
    return unicode(self.__class__.__name__)
```

napoleon_use_admonition_for_examples

True to use the `.. admonition::` directive for the **Example** and **Examples** sections. False to use the `.. rubric::` directive instead. One may look better than the other depending on what HTML theme is used. *Defaults to False.*

This NumPy style³⁴⁸ snippet will be converted as follows:

```
Example
-----
This is just a quick example
```

If True:

```
.. admonition:: Example

    This is just a quick example
```

If False:

```
.. rubric:: Example

This is just a quick example
```

napoleon_use_admonition_for_notes

True to use the `.. admonition::` directive for **Notes** sections. False to use the `.. rubric::` directive instead. *Defaults to False.*

³⁴⁸ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

Note: The singular **Note** section will always be converted to a `.. note::` directive.

See also:

[napoleon_use_admonition_for_examples](#)

napoleon_use_admonition_for_references

True to use the `.. admonition::` directive for **References** sections. False to use the `.. rubric::` directive instead. *Defaults to False.*

See also:

[napoleon_use_admonition_for_examples](#)

napoleon_use_ivar

True to use the `:ivar:` role for instance variables. False to use the `.. attribute::` directive instead. *Defaults to False.*

This NumPy style³⁴⁹ snippet will be converted as follows:

```
Attributes
-----
attr1 : int
    Description of `attr1`
```

If True:

```
:ivar attr1: Description of `attr1`
:vartype attr1: int
```

If False:

```
.. attribute:: attr1

    Description of `attr1`

:type: int
```

napoleon_use_param

True to use a `:param:` role for each function parameter. False to use a single `:parameters:` role for all the parameters. *Defaults to True.*

This NumPy style³⁵⁰ snippet will be converted as follows:

```
Parameters
-----
arg1 : str
    Description of `arg1`
arg2 : int, optional
    Description of `arg2`, defaults to 0
```

If True:

³⁴⁹ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

```
:param arg1: Description of `arg1`
:type arg1: str
:param arg2: Description of `arg2`, defaults to 0
:type arg2: :class:`int`, *optional*
```

If False:

```
:parameters: * **arg1** (*str*) --
              Description of `arg1`
              * **arg2** (*int, optional*) --
              Description of `arg2`, defaults to 0
```

napoleon_use_keyword

True to use a `:keyword:` role for each function keyword argument. False to use a single `:keyword arguments:` role for all the keywords. *Defaults to True.*

This behaves similarly to [napoleon_use_param](#). Note unlike docutils, `:keyword:` and `:param:` will not be treated the same way - there will be a separate “Keyword Arguments” section, rendered in the same fashion as “Parameters” section (type links created if possible)

See also:

[napoleon_use_param](#)

napoleon_use_rtype

True to use the `:rtype:` role for the return type. False to output the return type inline with the description. *Defaults to True.*

This NumPy style³⁵¹ snippet will be converted as follows:

```
Returns
-----
bool
    True if successful, False otherwise
```

If True:

```
:returns: True if successful, False otherwise
:rtype: bool
```

If False:

```
:returns: *bool* -- True if successful, False otherwise
```

napoleon_preprocess_types

True to convert the type definitions in the docstrings as references. Defaults to *False*.

Added in version 3.2.1.

Changed in version 3.5: Do preprocess the Google style docstrings also.

napoleon_type_aliases

A mapping to translate type names to other names or references. Works only when `napoleon_use_param = True`. *Defaults to None.*

With:

³⁵⁰ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

³⁵¹ <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

```
napoleon_type_aliases = {
    "CustomType": "mypackage.CustomType",
    "dict-like": ":term:`dict-like` <mapping>`",
}
```

This NumPy style³⁵² snippet:

```
Parameters
-----
arg1 : CustomType
      Description of `arg1`
arg2 : dict-like
      Description of `arg2`
```

becomes:

```
:param arg1: Description of `arg1`
:type arg1: mypackage.CustomType
:param arg2: Description of `arg2`
:type arg2: :term:`dict-like` <mapping>`
```

Added in version 3.2.

napoleon_attr_annotations

True to allow using [PEP 526](https://peps.python.org/pep-0526/)³⁵³ attributes annotations in classes. If an attribute is documented in the docstring without a type and has an annotation in the class body, that type is used.

Added in version 3.4.

napoleon_custom_sections

Add a list of custom sections to include, expanding the list of parsed sections. *Defaults to None.*

The entries can either be strings or tuples, depending on the intention:

- To create a custom “generic” section, just pass a string.
- To create an alias for an existing section, pass a tuple containing the alias name and the original, in that order.
- To create a custom section that displays like the parameters or returns section, pass a tuple containing the custom section name and a string value, “params_style” or “returns_style”.

If an entry is just a string, it is interpreted as a header for a generic section. If the entry is a tuple/list/indexed container, the first entry is the name of the section, the second is the section key to emulate. If the second entry value is “params_style” or “returns_style”, the custom section will be displayed like the parameters section or returns section.

Added in version 1.8.

Changed in version 3.5: Support params_style and returns_style

³⁵² <https://numpydoc.readthedocs.io/en/latest/format.html#docstring-standard>

³⁵³ <https://peps.python.org/pep-0526/>

sphinx.ext.todo – Support for todo items

Module author: Daniel Bültmann

Added in version 0.5.

There are two additional directives when using this extension:

.. todo::

Use this directive like, for example, *note*.

It will only show up in the output if *todo_include_todos* is True.

Added in version 1.3.2: This directive supports an *class* option that determines the class attribute for HTML output. If not given, the class defaults to *admonition-todo*.

.. todolist::

This directive is replaced by a list of all todo directives in the whole documentation, if *todo_include_todos* is True.

These can be configured as seen below.

Configuration

todo_include_todos

If this is True, *todo* and *todolist* produce output, else they produce nothing. The default is False.

todo_emit_warnings

If this is True, *todo* emits a warning for each TODO entries. The default is False.

Added in version 1.5.

todo_link_only

If this is True, *todolist* produce output without file path and line, The default is False.

Added in version 1.4.

autodoc provides the following an additional event:

todo-defined(*app*, *node*)

Added in version 1.5.

Emitted when a todo is defined. *node* is the defined `sphinx.ext.todo.todo_node` node.

sphinx.ext.viewcode – Add links to highlighted source code

Module author: Georg Brandl

Added in version 1.0.

This extension looks at your Python object descriptions (`.. class::`, `.. function::` etc.) and tries to find the source files where the objects are contained. When found, a separate HTML page will be output for each module with a highlighted version of the source code, and a link will be added to all object descriptions that leads to the source code of the described object. A link back from the source to the description will also be inserted.

Warning: Basically, `viewcode` extension will import the modules being linked to. If any modules have side effects on import, these will be executed when `sphinx-build` is run.

If you document scripts (as opposed to library modules), make sure their main routine is protected by a `if __name__ == '__main__':` condition.

In addition, if you don't want to import the modules by `viewcode`, you can tell the location of the location of source code to `viewcode` using the `viewcode-find-source` event.

If `viewcode_follow_imported_members` is enabled, you will also need to resolve imported attributes using the `viewcode-follow-imported` event.

This extension works only on HTML related builders like `html`, `applehelp`, `devhelp`, `htmlhelp`, `qthelp` and so on except `singlehtml`. By default `epub` builder doesn't support this extension (see `viewcode_enable_epub`).

Configuration

`viewcode_follow_imported_members`

If this is `True`, `viewcode` extension will emit `viewcode-follow-imported` event to resolve the name of the module by other extensions. The default is `True`.

Added in version 1.3.

Changed in version 1.8: Renamed from `viewcode_import` to `viewcode_follow_imported_members`.

`viewcode_enable_epub`

If this is `True`, `viewcode` extension is also enabled even if you use `epub` builders. This extension generates pages outside `toctree`, but this is not preferred as `epub` format.

Until 1.4.x, this extension is always enabled. If you want to generate `epub` as same as 1.4.x, you should set `True`, but `epub` format checker's score becomes worse.

The default is `False`.

Added in version 1.5.

Warning: Not all `epub` readers support pages generated by `viewcode` extension. These readers ignore links to pages are not under `toctree`.

Some reader's rendering result are corrupted and `epubcheck`³⁵⁴'s score becomes worse even if the reader supports.

`viewcode_line_numbers`

Default: `False`.

If set to `True`, inline line numbers will be added to the highlighted code.

Added in version 7.2.

`viewcode-find-source(app, modname)`

Added in version 1.8.

Find the source code for a module. An event handler for this event should return a tuple of the source code itself and a dictionary of tags. The dictionary maps the name of a class, function, attribute, etc to a tuple of its type, the start line number, and the end line number. The type should be one of "class", "def", or "other".

³⁵⁴ <https://github.com/IDPF/epubcheck>

Parameters

- **app** – The Sphinx application object.
- **modname** – The name of the module to find source code for.

viewcode-follow-imported(*app, modname, attribute*)

Added in version 1.8.

Find the name of the original module for an attribute.

Parameters

- **app** – The Sphinx application object.
- **modname** – The name of the module that the attribute belongs to.
- **attribute** – The name of the member to follow.

Third-party extensions

You can find several extensions contributed by users in the [sphinx-contrib](https://github.com/sphinx-contrib)³⁵⁵ organization. If you wish to include your extension in this organization, simply follow the instructions provided in the [github-administration](https://github.com/sphinx-contrib/github-administration)³⁵⁶ project. This is optional and there are several extensions hosted elsewhere. The [awesome-sphinxdoc](https://github.com/yohseem/awesome-sphinxdoc)³⁵⁷ and [sphinx-extensions](https://sphinx-extensions.readthedocs.io/en/latest/)³⁵⁸ projects are both curated lists of Sphinx packages, and many packages use the `Framework :: Sphinx :: Extension`³⁵⁹ and `Framework :: Sphinx :: Theme`³⁶⁰ trove classifiers for Sphinx extensions and themes, respectively.

Where to put your own extensions?

Extensions local to a project should be put within the project's directory structure. Set Python's module search path, `sys.path`, accordingly so that Sphinx can find them. For example, if your extension `foo.py` lies in the `exts` subdirectory of the project root, put into `conf.py`:

```
import sys, os

sys.path.append(os.path.abspath('exts'))

extensions = ['foo']
```

You can also install extensions anywhere else on `sys.path`, e.g. in the `site-packages` directory.

³⁵⁵ <https://github.com/sphinx-contrib/>

³⁵⁶ <https://github.com/sphinx-contrib/github-administration>

³⁵⁷ <https://github.com/yohseem/awesome-sphinxdoc>

³⁵⁸ <https://sphinx-extensions.readthedocs.io/en/latest/>

³⁵⁹ <https://pypi.org/search/?c=Framework+%3A%3ASphinx+%3A%3AExtension>

³⁶⁰ <https://pypi.org/search/?c=Framework+%3A%3ASphinx+%3A%3ATheme>

4.8 HTML Theming

Sphinx provides a number of builders for HTML and HTML-based formats.

Builders

Todo: Populate when the ‘builders’ document is split up.

Themes

Added in version 0.6.

Note: This section provides information about using pre-existing HTML themes. If you wish to create your own theme, refer to *HTML theme development*.

Sphinx supports changing the appearance of its HTML output via *themes*. A theme is a collection of HTML templates, stylesheet(s) and other static files. Additionally, it has a configuration file which specifies from which theme to inherit, which highlighting style to use, and what options exist for customizing the theme’s look and feel.

Themes are meant to be project-unaware, so they can be used for different projects without change.

Using a theme

Using a *theme provided with Sphinx* is easy. Since these do not need to be installed, you only need to set the `html_theme` config value. For example, to enable the `classic` theme, add the following to `conf.py`:

```
html_theme = "classic"
```

You can also set theme-specific options using the `html_theme_options` config value. These options are generally used to change the look and feel of the theme. For example, to place the sidebar on the right side and a black background for the relation bar (the bar with the navigation links at the page’s top and bottom), add the following `conf.py`:

```
html_theme_options = {
    "rightsidebar": "true",
    "relbarbgcolor": "black"
}
```

If the theme does not come with Sphinx, it can be in two static forms or as a Python package. For the static forms, either a directory (containing `theme.toml` and other needed files), or a zip file with the same contents is supported. The directory or zipfile must be put where Sphinx can find it; for this there is the config value `html_theme_path`. This can be a list of directories, relative to the directory containing `conf.py`, that can contain theme directories or zip files. For example, if you have a theme in the file `blue.zip`, you can put it right in the directory containing `conf.py` and use this configuration:

```
html_theme = "blue"
html_theme_path = ["."]
```

The third form is a Python package. If a theme you want to use is distributed as a Python package, you can use it after installing

Table 1 – continued from previous page

<p>python-sqlparse v0.1.0 documentation</p> <p>INDEX MODULES NEXT PREVIOUS</p> <h2>Analyzing the Parsed Statement</h2> <p>When the <code>parse()</code> function is called the returned value is a tree-ish representation of the analyzed statements. The returned objects can be used by applications to retrieve further information about the parsed SQL.</p> <h3>Base Classes</h3> <p>All returned objects inherit from these base classes. The <code>Token</code> class represents a single token and <code>TokenList</code> class is a group of tokens. The latter provides methods for inspecting it's child tokens.</p> <pre>class sqlparse.sql.token(Token, value): Base class for all other classes in this module. It represents a single token and has two instance attributes: <code>value</code> is the unchange value of the token and <code>type</code> is the type of the token.</pre> <p>__str__()</p> <p>Resolve subgroups.</p> <p>is_group()</p> <p>Returns True if this object has children.</p> <p>is_whitespace()</p> <p>Returns True if this token is a whitespace token.</p> <p>match(type, values, regex=None)</p> <p>Checks whether the token matches the given arguments.</p>	<p>SPHINX PYTHON DOCUMENTATION GENERATOR</p> <p>Sphinx Home Documentation</p> <p>contents next modules index</p> <h2>HTML theming support</h2> <p>Since version 0.6</p> <p>Sphinx supports changing the appearance of its HTML output via themes. A theme is a collection of HTML templates, stylesheets and other static files. Additionally, it has a configuration file which specifies from which theme to inherit, which highlighting style to use, and what options must be configured for the theme's look and feel.</p> <p>Themes are meant to be project-unaware, so they can be used for different projects without change.</p> <h3>Using a theme</h3> <p>Using an existing theme is easy. If the theme is linked to Sphinx, you only need to set the <code>html_theme</code> config value. With the <code>html_theme_options</code> config value you can set theme-specific options that change the look and feel. For example, you could have the following in your <code>conf.py</code>:</p> <pre>html_theme = "default" html_theme_options = { "highlight_language": "python", "relbarbgcolor": "black" }</pre> <p>This would give you the default theme, but with a sidebar on the right side and a black background for the relation bar (the bar with the navigation links at the page's top and bottom).</p> <p>If the theme does not come with Sphinx, it can be in two forms: either a directory (containing <code>theme.conf</code> and other needed files), or a zip file with the same contents. Either of these must be put where Sphinx can find it, be the files in the config value <code>html_theme_path</code>.</p>
<p>agogo</p> <p>Sphinx Home Documentation Sphinx 0.6.10 release</p> <p>contents next modules index</p> <h2>Extension API</h2> <p>Each Sphinx extension is a Python module with at least a <code>setup()</code> function. This function is called at initialization time with one argument, the application object representing the Sphinx process. This application object has the following public API:</p> <p>Sphinx.setup_extension(name)</p> <p>Load the extension given by the module name. Use this if your extension needs the features provided by another extension.</p> <p>Sphinx.add_builder(builder)</p> <p>Register a new builder. Builder must be a class that inherits from <code>Builder</code>.</p> <p>Sphinx.add_config_value(name, default, envtype)</p> <p>Register a configuration value. This is necessary for Sphinx to recognize new values and not default values accordingly. The name should be prefixed with the extension name, to avoid clashes. The default value can be any Python object. The string value should must be one of these values:</p> <ul style="list-style-type: none"> "True": If a change in the setting only takes effect when a document is parsed - this means that the whole document must be rebuilt. "True": If a change in the setting needs a full rebuild of HTML documents. "False": If a change in the setting will not need any special rebuild. <p>Changed in version 0.4: If the default value is a callable, it will be called with the config object as its argument in order to get the default value. This can be used to implement config values whose default depends on other values.</p> <p>Changed in version 0.6: Changed rebuild from a simple boolean (equivalent to "True" or "False") to a string. However, booleans are still accepted and translated internally.</p> <p>Sphinx.add_event(name)</p> <p>Register an event called name.</p> <p>Sphinx.add_node(node, **kwargs)</p> <p>Register a Docutils node class. This is necessary for Docutils internal. It may also be used in the future to validate</p>	<p>Sphinx v1.0 (hg) documentation</p> <p>SPHINX.EXT.INTERNSPHINX - LINK TO OTHER PROJECTS' DOCUMENTATION</p> <p>– sphinx.ext.docutils – Text snippets in the documentation – Contents – Math support in Sphinx –</p> <h2>sphinx.ext.intersphinx - Link to other projects' documentation</h2> <p>Since version 0.5</p> <p>This extension can generate automatic links to the documentation of Python objects in other projects. This works as follows:</p> <ul style="list-style-type: none"> Each Sphinx HTML build creates a file named <code>objects.inv</code> that contains a mapping from Python identifiers to URIs relative to the HTML set's root. Projects using the Intersphinx extension can specify the location of such mapping files in the <code>intersphinx_mapping</code> config value. The mapping will then be used to resolve otherwise missing references to Python objects into links to the other documentation. By default, the mapping file is assumed to be at the same location as the root of the documentation; however, the location of the mapping file can also be specified individually, e.g. if the docs should be buildable without internet access. <p>To use intersphinx linking, add <code>sphinx.ext.intersphinx</code> to your <code>extensions</code> config value, and use these new config values to activate linking:</p> <h3>Intersphinx mapping</h3> <p>A dictionary mapping URIs to either None or an URI. The keys are the base URIs of the foreign Sphinx documentation sets and can be local paths or HTTP URIs. The values indicate where the inventory file can be found; they can be None (at the same location as the base URI) or another local or HTTP URI.</p> <p>Relative local paths in the keys are taken as relative to the base of the build documentation, while relative local paths in the values are taken as relative to the source directory.</p> <p>An example, to add links to modules and objects in the Python standard library documentation:</p> <pre>intersphinx_mapping = { 'http://docs.python.org/2/': None }</pre> <p>This will download the corresponding <code>objects.inv</code> file from the internet and generate links to the pages under the given URI. The downloaded inventory is cached in the Sphinx environment, so it must be redownloaded whenever you do a full rebuild.</p>
<p>pyramid</p> <p>Pyramid</p> <p>Home Documentation Sphinx 0.6.10 release</p> <p>contents next modules index</p> <h2>Views</h2> <p>One of the primary jobs of Pyramid is to find and invoke a view callable when a request matches your application's View callable (or list of callables which do something interesting in response to a request) made to your application.</p> <p>A Python callable is a reference to a function or method (as a class method), or a class that implements a <code>__call__</code> method.</p> <p>The chapter View callable describes how, using information from the request, a context resource is computed. And the context resource itself isn't very useful, it's just an associated view callable. If view callable returns a response to a user, after using the context resource to do so.</p> <p>The job of actually finding and invoking the "best" view callable is the job of the view lookup subsystem. The view lookup subsystem contains the resource supplied by <code>resource_url</code> and information in the request against which configuration data made by the developer to choose the most appropriate view callable for a given set of the request.</p> <p>This chapter provides a detailed overview of the process of finding view callables, documentation about performing view configuration, and a detailed explanation of view lookup.</p> <h3>View Callables</h3>	<p>Sphinx 1.0.10 documentation</p> <p>contents next modules index</p> <h2>HTML theming support</h2> <p>Since version 0.6</p> <p>Sphinx supports changing the appearance of its HTML output via themes. A theme is a collection of HTML templates, stylesheets and other static files. Additionally, it has a configuration file which specifies from which theme to inherit, which highlighting style to use, and what options must be configured for the theme's look and feel.</p> <p>Themes are meant to be project-unaware, so they can be used for different projects without change.</p> <h3>Using a theme</h3> <p>Using an existing theme is easy. If the theme is linked to Sphinx, you only need to set the <code>html_theme</code> config value. With the <code>html_theme_options</code> config value you can set theme-specific options that change the look and feel. For example, you could have the following in your <code>conf.py</code>:</p> <pre>html_theme = "default" html_theme_options = { "highlight_language": "python", "relbarbgcolor": "black" }</pre> <p>This would give you the default theme, but with a sidebar on the right side and a black background for the relation bar (the bar with the navigation links at the page's top and bottom).</p> <p>If the theme does not come with Sphinx, it can be in two forms: either a directory (containing <code>theme.conf</code> and other needed files), or a zip file with the same contents. Either of them must be put where Sphinx can find it; for this there is the config value <code>html_theme_path</code>. It gives a list of directories, relative to the directory containing <code>conf.py</code>, that contain theme directories or zip files. For example, if you have a theme in the file <code>theme.zip</code>, you can put it right in the directory</p>

Sphinx comes with a selection of themes to choose from.

Note that from these themes only the Alabaster and Scrolls themes are mobile-optimized, the other themes resort to horizontal scrolling if the screen is too narrow.

These themes are:

basic

This is a basically unstyled layout used as the base for the other themes, and usable as the base for custom themes as well. The HTML contains all important elements like sidebar and relation bar. There are these options (which are inherited by the other themes):

- **nosidebar** (true or false): Don't include the sidebar. Defaults to `False`.
- **sidebarwidth** (int or str): Width of the sidebar in pixels. This can be an int, which is interpreted as pixels or a valid CSS dimension string such as `'70em'` or `'50%'`. Defaults to 230 pixels.
- **body_min_width** (int or str): Minimal width of the document body. This can be an int, which is interpreted as pixels or a valid CSS dimension string such as `'70em'` or `'50%'`. Use 0 if you don't want a width limit. Defaults may depend on the theme (often 450px).
- **body_max_width** (int or str): Maximal width of the document body. This can be an int, which is interpreted as pixels or a valid CSS dimension string such as `'70em'` or `'50%'`. Use `'none'` if you don't want a width limit. Defaults may depend on the theme (often 800px).
- **navigation_with_keys** (true or false): Allow navigating with the following keyboard shortcuts:
 - Left arrow: previous page
 - Right arrow: next page

Defaults to `False`.

- **enable_search_shortcuts** (true or false): Allow jumping to the search box with `/` and allow removal of search highlighting with `Esc`.

Defaults to `True`.

- **globaltoc_collapse** (true or false): Only expand subsections of the current document in `globaltoc.html` (see [html_sidebars](#)). Defaults to `True`.

Added in version 3.1.

- **globaltoc_includehidden** (true or false): Show even those subsections in `globaltoc.html` (see [html_sidebars](#)) which have been included with the `:hidden:` flag of the `toctree` directive. Defaults to `False`.

Added in version 3.1.

- **globaltoc_maxdepth** (int): The maximum depth of the `toctree` in `globaltoc.html` (see [html_sidebars](#)). Set it to -1 to allow unlimited depth. Defaults to the max depth selected in the `toctree` directive.

Added in version 3.2.

alabaster

[Alabaster theme](#)³⁶¹ is a modified “Kr” Sphinx theme from @kennethreitz (especially as used in his Requests project), which was itself originally based on @mitsuhiko's theme used for Flask & related projects. Refer to its [installation page](#)³⁶² for information on how to configure [html_sidebars](#) for its use.

classic

This is the classic theme, which looks like [the Python 2 documentation](#)³⁶³. It can be customized via these options:

- **rightsidebar** (true or false): Put the sidebar on the right side. Defaults to `False`.
- **stickysidebar** (true or false): Make the sidebar “fixed” so that it doesn't scroll out of view for long body content. This may not work well with all browsers. Defaults to `False`.
- **collapsiblesidebar** (true or false): Add an *experimental* JavaScript snippet that makes the sidebar collapsible via a button on its side. Defaults to `False`.
- **externalrefs** (true or false): Display external links differently from internal links. Defaults to `False`.

³⁶¹ <https://pypi.org/project/alabaster/>

³⁶² <https://alabaster.readthedocs.io/en/latest/installation.html>

³⁶³ <https://docs.python.org/2/>

There are also various color and font options that can change the color scheme without having to write a custom stylesheet:

- **footerbgcolor** (CSS color): Background color for the footer line.
- **footertextcolor** (CSS color): Text color for the footer line.
- **sidebarbgcolor** (CSS color): Background color for the sidebar.
- **sidebarbtncolor** (CSS color): Background color for the sidebar collapse button (used when *collapsiblesidebar* is True).
- **sidbartextcolor** (CSS color): Text color for the sidebar.
- **sidebarlinkcolor** (CSS color): Link color for the sidebar.
- **relbarbgcolor** (CSS color): Background color for the relation bar.
- **relbartextcolor** (CSS color): Text color for the relation bar.
- **relbarlinkcolor** (CSS color): Link color for the relation bar.
- **bgcolor** (CSS color): Body background color.
- **textcolor** (CSS color): Body text color.
- **linkcolor** (CSS color): Body link color.
- **visitedlinkcolor** (CSS color): Body color for visited links.
- **headbgcolor** (CSS color): Background color for headings.
- **headtextcolor** (CSS color): Text color for headings.
- **headlinkcolor** (CSS color): Link color for headings.
- **codebgcolor** (CSS color): Background color for code blocks.
- **codetextcolor** (CSS color): Default text color for code blocks, if not set differently by the highlighting style.
- **bodyfont** (CSS font-family): Font for normal text.
- **headfont** (CSS font-family): Font for headings.

sphinxdoc

The theme originally used by this documentation. It features a sidebar on the right side. There are currently no options beyond *nosidebar* and *sidebarwidth*.

Note: The Sphinx documentation now uses [an adjusted version of the sphinxdoc theme](#)³⁶⁴.

scrolls

A more lightweight theme, based on [the Jinja documentation](#)³⁶⁵. The following color options are available:

- **headerbordercolor**
- **subheadlinecolor**
- **linkcolor**
- **visitedlinkcolor**
- **admonitioncolor**

³⁶⁴ https://github.com/sphinx-doc/sphinx/tree/master/doc/_themes/sphinx13

³⁶⁵ <https://jinja.palletsprojects.com/>

agogo

A theme created by Andi Albrecht. The following options are supported:

- **bodyfont** (CSS font family): Font for normal text.
- **headerfont** (CSS font family): Font for headings.
- **pagewidth** (CSS length): Width of the page content, default 70em.
- **documentwidth** (CSS length): Width of the document (without sidebar), default 50em.
- **sidebarwidth** (CSS length): Width of the sidebar, default 20em.
- **rightsidebar** (true or false): Put the sidebar on the right side. Defaults to True.
- **bgcolor** (CSS color): Background color.
- **headerbg** (CSS value for “background”): background for the header area, default a grayish gradient.
- **footerbg** (CSS value for “background”): background for the footer area, default a light gray gradient.
- **linkcolor** (CSS color): Body link color.
- **headercolor1**, **headercolor2** (CSS color): colors for <h1> and <h2> headings.
- **headerlinkcolor** (CSS color): Color for the backreference link in headings.
- **textalign** (CSS *text-align* value): Text alignment for the body, default is *justify*.

nature

A greenish theme. There are currently no options beyond *nosidebar* and *sidebarwidth*.

pyramid

A theme from the Pyramid web framework project, designed by Blaise Laflamme. There are currently no options beyond *nosidebar* and *sidebarwidth*.

haiku

A theme without sidebar inspired by the [Haiku OS user guide](https://www.haiku-os.org/docs/userguide/en/contents.html)³⁶⁶. The following options are supported:

- **full_logo** (true or false, default False): If this is true, the header will only show the *html_logo*. Use this for large logos. If this is false, the logo (if present) will be shown floating right, and the documentation title will be put in the header.
- **textcolor**, **headingcolor**, **linkcolor**, **visitedlinkcolor**, **hoverlinkcolor** (CSS colors): Colors for various body elements.

traditional

A theme resembling the old Python documentation. There are currently no options beyond *nosidebar* and *sidebarwidth*.

epub

A theme for the epub builder. This theme tries to save visual space which is a sparse resource on ebook readers. The following options are supported:

- **relbar1** (true or false, default True): If this is true, the *relbar1* block is inserted in the epub output, otherwise it is omitted.
- **footer** (true or false, default True): If this is true, the *footer* block is inserted in the epub output, otherwise it is omitted.

bizstyle

A simple bluish theme. The following options are supported beyond *nosidebar* and *sidebarwidth*:

- **rightsidebar** (true or false): Put the sidebar on the right side. Defaults to False.

³⁶⁶ <https://www.haiku-os.org/docs/userguide/en/contents.html>

Added in version 1.3: ‘alabaster’, ‘sphinx_rtd_theme’ and ‘bizstyle’ theme.

Changed in version 1.3: The ‘default’ theme has been renamed to ‘classic’. ‘default’ is still available, however it will emit a notice that it is an alias for the new ‘alabaster’ theme.

Third Party Themes

There are many third-party themes created for Sphinx. Some of these are for general use, while others are specific to an individual project.

sphinx-themes.org³⁶⁷ is a gallery that showcases various themes for Sphinx, with demo documentation rendered under each theme. Themes can also be found on [PyPI](https://pypi.org/search/?q=&o=&c=Framework+%3A+Sphinx+%3A+Theme)³⁶⁸ (using the classifier Framework :: Sphinx :: Theme), [GitHub](https://github.com/search?utf8=%E2%9C%93&q=sphinx+theme)³⁶⁹ and [GitLab](https://gitlab.com/explore?name=sphinx+theme)³⁷⁰.

4.9 Internationalization

Added in version 1.1.

Complementary to translations provided for Sphinx-generated messages such as navigation bars, Sphinx provides mechanisms facilitating the translation of *documents*. See the [Options for internationalization](#) for details on configuration.

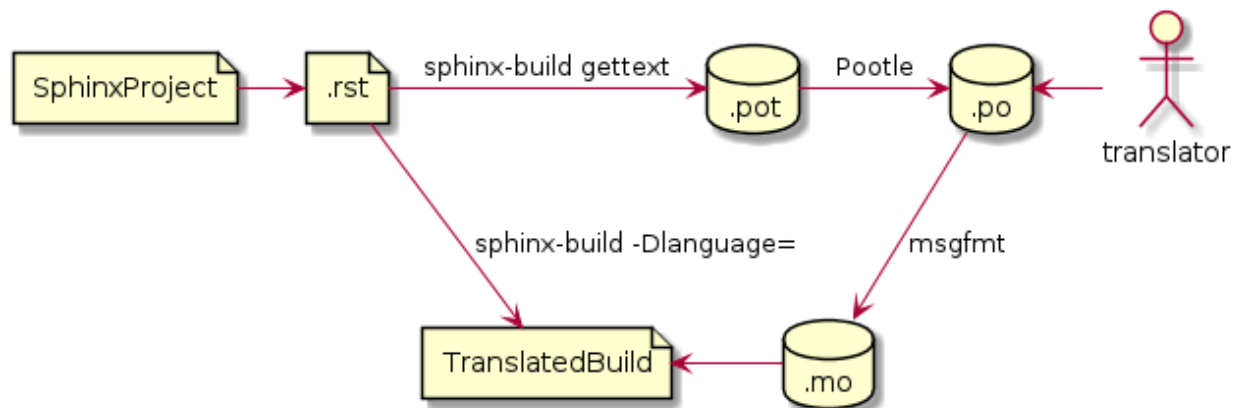


Fig. 1: Workflow visualization of translations in Sphinx. (The figure is created by [plantuml](https://plantuml.com)^{Page 227, 371}.)

- [Sphinx internationalization details](#)
- [Translating with sphinx-intl](#)
 - [Quick guide](#)
 - [Translating](#)
 - [Update your po files by new pot files](#)
- [Using Transifex service for team translation](#)

³⁶⁷ <https://sphinx-themes.org/>

³⁶⁸ <https://pypi.org/search/?q=&o=&c=Framework+%3A+Sphinx+%3A+Theme>

³⁶⁹ <https://github.com/search?utf8=%E2%9C%93&q=sphinx+theme>

³⁷⁰ <https://gitlab.com/explore?name=sphinx+theme>

³⁷¹ <https://plantuml.com>

- [Using Weblate service for team translation](#)
- [Contributing to Sphinx reference translation](#)
- [Translation progress and statistics](#)

Sphinx internationalization details

gettext¹ is an established standard for internationalization and localization. It naively maps messages in a program to a translated string. Sphinx uses these facilities to translate whole documents.

Initially project maintainers have to collect all translatable strings (also referred to as *messages*) to make them known to translators. Sphinx extracts these through invocation of `sphinx-build -M gettext`.

Every single element in the doctree will end up in a single message which results in lists being equally split into different chunks while large paragraphs will remain as coarsely-grained as they were in the original document. This grants seamless document updates while still providing a little bit of context for translators in free-text passages. It is the maintainer's task to split up paragraphs which are too large as there is no sane automated way to do that.

After Sphinx successfully ran the `MessageCatalogBuilder` you will find a collection of `.pot` files in your output directory. These are **catalog templates** and contain messages in your original language *only*.

They can be delivered to translators which will transform them to `.po` files — so called **message catalogs** — containing a mapping from the original messages to foreign-language strings.

`gettext` compiles them into a binary format known as **binary catalogs** through `msgfmt` for efficiency reasons. If you make these files discoverable with `locale_dirs` for your `language`, Sphinx will pick them up automatically.

An example: you have a document `usage.rst` in your Sphinx project. The `gettext` builder will put its messages into `usage.pot`. Imagine you have Spanish translations² stored in `usage.po` — for your builds to be translated you need to follow these instructions:

- Compile your message catalog to a locale directory, say `locale`, so it ends up in `./locale/es/LC_MESSAGES/usage.mo` in your source directory (where `es` is the language code for Spanish.)

```
msgfmt "usage.po" -o "locale/es/LC_MESSAGES/usage.mo"
```

- Set `locale_dirs` to `["locale/"]`.
- Set `language` to `es` (also possible via `-D`).
- Run your desired build.

In order to protect against mistakes, a warning is emitted if cross-references in the translated paragraph do not match those from the original. This can be turned off globally using the `suppress_warnings` configuration variable. Alternatively, to turn it off for one message only, end the message with `#noqa` like this:

```
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Suspendisse  
risus tortor, luctus id ultrices at. #noqa
```

(Write `\#noqa` in case you want to have “`#noqa`” literally in the text. This does not apply to code blocks, where `#noqa` is ignored because code blocks do not contain references anyway.)

Added in version 4.5: The `#noqa` mechanism.

¹ See the GNU `gettext` utilities^{Page 228, 382} for details on that software suite.

³⁸² <https://www.gnu.org/software/gettext/manual/gettext.html#Introduction>

² Because nobody expects the Spanish Inquisition!

Translating with sphinx-intl

Quick guide

`sphinx-intl`³⁷² is a useful tool to work with Sphinx translation flow. This section describe an easy way to translate with `sphinx-intl`.

1. Install `sphinx-intl`³⁷³.

```
$ pip install sphinx-intl
```

2. Add configurations to `conf.py`.

```
locale_dirs = ['locale/'] # path is example but recommended.
gettext_compact = False # optional.
```

This case-study assumes that `BUILDDIR` is set to `_build`, `locale_dirs` is set to `locale/` and `gettext_compact` is set to `False` (the Sphinx document is already configured as such).

3. Extract translatable messages into pot files.

```
$ make gettext
```

The generated pot files will be placed in the `_build/gettext` directory.

4. Generate po files.

We'll use the pot files generated in the above step.

```
$ sphinx-intl update -p _build/gettext -l de -l ja
```

Once completed, the generated po files will be placed in the below directories:

- `./locale/de/LC_MESSAGES/`
- `./locale/ja/LC_MESSAGES/`

5. Translate po files.

As noted above, these are located in the `./locale/<lang>/LC_MESSAGES` directory. An example of one such file, from Sphinx, `builders.po`, is given below.

```
# a5600c3d2e3d48fc8c261ea0284db79b
#: ../../builders.rst:4
msgid "Available builders"
msgstr "<FILL HERE BY TARGET LANGUAGE>"
```

Another case, `msgid` is multi-line text and contains reStructuredText syntax:

```
# 302558364e1d41c69b3277277e34b184
#: ../../builders.rst:9
msgid """
"These are the built-in Sphinx builders. More builders can be added by "
":ref:`extensions <extensions>`."
msgstr """
```

(continues on next page)

³⁷² <https://pypi.org/project/sphinx-intl/>

³⁷³ <https://pypi.org/project/sphinx-intl/>

(continued from previous page)

```
"FILL HERE BY TARGET LANGUAGE FILL HERE BY TARGET LANGUAGE FILL HERE "  
"BY TARGET LANGUAGE :ref:`EXTENSIONS <extensions>` FILL HERE."
```

Please be careful not to break reST notation. Most po-editors will help you with that.

6. Build translated document.

You need a *language* parameter in `conf.py` or you may also specify the parameter on the command line.

For BSD/GNU make, run:

```
$ make -e SPHINXOPTS="-D language='de'" html
```

For Windows `cmd.exe`, run:

```
> set SPHINXOPTS=-D language=de  
> .\make.bat html
```

For PowerShell, run:

```
> Set-Item env:SPHINXOPTS "-D language=de"  
> .\make.bat html
```

Congratulations! You got the translated documentation in the `_build/html` directory.

Added in version 1.3: **sphinx-build** that is invoked by make command will build po files into mo files.

If you are using 1.2.x or earlier, please invoke **sphinx-intl build** command before **make** command.

Translating

Update your po files by new pot files

If a document is updated, it is necessary to generate updated pot files and to apply differences to translated po files. In order to apply the updates from a pot file to the po file, use the **sphinx-intl update** command.

```
$ sphinx-intl update -p _build/gettext
```

Using Transifex service for team translation

Transifex³⁷⁴ is one of several services that allow collaborative translation via a web interface. It has a nifty Python-based command line client that makes it easy to fetch and push translations.

1. Install `transifex-client`³⁷⁵.

You need **tx** command to upload resources (pot files).

```
$ pip install transifex-client
```

See also:

[Transifex Client documentation](#)³⁷⁶

³⁷⁴ <https://www.transifex.com/>

³⁷⁵ <https://pypi.org/project/transifex-client/>

³⁷⁶ <https://docs.transifex.com/client/introduction/>

2. Create your [Transifex](https://www.transifex.com/)³⁷⁷ account and create new project for your document.

Currently, Transifex does not allow for a translation project to have more than one version of the document, so you'd better include a version number in your project name.

For example:

Project ID

sphinx-document-test_1_0

Project URL

https://www.transifex.com/projects/p/sphinx-document-test_1_0/

3. Create config files for **tx** command.

This process will create `.tx/config` in the current directory, as well as a `~/.transifexrc` file that includes auth information.

```
$ tx init
Creating .tx folder...
Transifex instance [https://www.transifex.com]:
...
Please enter your transifex username: <transifex-username>
Password: <transifex-password>
...
Done.
```

4. Upload pot files to Transifex service.

Register pot files to `.tx/config` file:

```
$ cd /your/document/root
$ sphinx-intl update-txconfig-resources --pot-dir _build/locale \
--transifex-project-name sphinx-document-test_1_0
```

and upload pot files:

```
$ tx push -s
Pushing translations for resource sphinx-document-test_1_0.builders:
Pushing source file (locale/pot/builders.pot)
Resource does not exist. Creating...
...
Done.
```

5. Forward the translation on Transifex.
6. Pull translated po files and make translated HTML.

Get translated catalogs and build mo files. For example, to build mo files for German (de):

```
$ cd /your/document/root
$ tx pull -l de
Pulling translations for resource sphinx-document-test_1_0.builders (...)
-> de: locale/de/LC_MESSAGES/builders.po
...
Done.
```

Invoke **make html** (for BSD/GNU make):

³⁷⁷ <https://www.transifex.com/>

```
$ make -e SPHINXOPTS="-D language='de'" html
```

That's all!

Tip: Translating locally and on Transifex

If you want to push all language's po files, you can be done by using **tx push -t** command. Watch out! This operation overwrites translations in Transifex.

In other words, if you have updated each in the service and local po files, it would take much time and effort to integrate them.

Using Weblate service for team translation

Read more in [Weblate's documentation](#)³⁷⁸.

Contributing to Sphinx reference translation

The recommended way for new contributors to translate Sphinx reference is to join the translation team on Transifex.

There is a [sphinx translation page](#)³⁷⁹ for Sphinx (master) documentation.

1. Login to [Transifex](#)³⁸⁰ service.
2. Go to [sphinx translation page](#)³⁸¹.
3. Click Request language and fill form.
4. Wait acceptance by Transifex sphinx translation maintainers.
5. (After acceptance) Translate on Transifex.

Detail is here: <https://docs.transifex.com/getting-started-1/translators>

Translation progress and statistics

Added in version 7.1.0.

During the rendering process, Sphinx marks each translatable node with a `translated` attribute, indicating if a translation was found for the text in that node.

The `translation_progress_classes` configuration value can be used to add a class to each element, depending on the value of the `translated` attribute.

The `|translation progress|` substitution can be used to display the percentage of nodes that have been translated on a per-document basis.

³⁷⁸ <https://docs.weblate.org/en/latest/devel/sphinx.html>

³⁷⁹ <https://www.transifex.com/sphinx-doc/sphinx-doc/>

³⁸⁰ <https://www.transifex.com/>

³⁸¹ <https://www.transifex.com/sphinx-doc/sphinx-doc/>

4.10 Sphinx Web Support

Added in version 1.1.

Sphinx provides a Python API to easily integrate Sphinx documentation into your web application. To learn more read the *Web Support Quick Start*.

Web Support Quick Start

Building Documentation Data

To make use of the web support package in your application you'll need to build the data it uses. This data includes pickle files representing documents, search indices, and node data that is used to track where comments and other things are in a document. To do this you will need to create an instance of the *WebSupport* class and call its *build()* method:

```
from sphinxcontrib.websupport import WebSupport

support = WebSupport(srcdir='/path/to/rst/sources/',
                    builddir='/path/to/build/outdir',
                    search='xapian')

support.build()
```

This will read reStructuredText sources from *srcdir* and place the necessary data in *builddir*. The *builddir* will contain two sub-directories: one named “data” that contains all the data needed to display documents, search through documents, and add comments to documents. The other directory will be called “static” and contains static files that should be served from “/static”.

Note: If you wish to serve static files from a path other than “/static”, you can do so by providing the *staticdir* keyword argument when creating the *WebSupport* object.

Integrating Sphinx Documents Into Your Webapp

Now that the data is built, it's time to do something useful with it. Start off by creating a *WebSupport* object for your application:

```
from sphinxcontrib.websupport import WebSupport

support = WebSupport(datadir='/path/to/the/data',
                    search='xapian')
```

You'll only need one of these for each set of documentation you will be working with. You can then call its *get_document()* method to access individual documents:

```
contents = support.get_document('contents')
```

This will return a dictionary containing the following items:

- **body:** The main body of the document as HTML
- **sidebar:** The sidebar of the document as HTML

- **relbar**: A div containing links to related documents
- **title**: The title of the document
- **css**: Links to CSS files used by Sphinx
- **script**: JavaScript containing comment options

This dict can then be used as context for templates. The goal is to be easy to integrate with your existing templating system. An example using Jinja2³⁸³ is:

```
{%- extends "layout.html" %}

{%- block title %}
    {{ document.title }}
{%- endblock %}

{%- block css %}
    {{ super() }}
    {{ document.css|safe }}
    <link rel="stylesheet" href="/static/websupport-custom.css" type="text/css">
{%- endblock %}

{%- block script %}
    {{ super() }}
    {{ document.script|safe }}
{%- endblock %}

{%- block relbar %}
    {{ document.relbar|safe }}
{%- endblock %}

{%- block body %}
    {{ document.body|safe }}
{%- endblock %}

{%- block sidebar %}
    {{ document.sidebar|safe }}
{%- endblock %}
```

Authentication

To use certain features such as voting, it must be possible to authenticate users. The details of the authentication are left to your application. Once a user has been authenticated you can pass the user's details to certain *WebSupport* methods using the *username* and *moderator* keyword arguments. The web support package will store the username with comments and votes. The only caveat is that if you allow users to change their username you must update the websupport package's data:

```
support.update_username(old_username, new_username)
```

username should be a unique string which identifies a user, and *moderator* should be a boolean representing whether the user has moderation privileges. The default value for *moderator* is `False`.

³⁸³ <https://jinja.palletsprojects.com/>

An example `Flask`³⁸⁴ function that checks whether a user is logged in and then retrieves a document is:

```
from sphinxcontrib.websupport.errors import *

@app.route('/<path:docname>')
def doc(docname):
    username = g.user.name if g.user else ''
    moderator = g.user.moderator if g.user else False
    try:
        document = support.get_document(docname, username, moderator)
    except DocumentNotFoundError:
        abort(404)
    return render_template('doc.html', document=document)
```

The first thing to notice is that the *docname* is just the request path. This makes accessing the correct document easy from a single view. If the user is authenticated, then the username and moderation status are passed along with the *docname* to `get_document()`. The web support package will then add this data to the `COMMENT_OPTIONS` that are used in the template.

Note: This only works if your documentation is served from your document root. If it is served from another directory, you will need to prefix the url route with that directory, and give the *docroot* keyword argument when creating the web support object:

```
support = WebSupport(..., docroot='docs')

@app.route('/docs/<path:docname>')
```

Performing Searches

To use the search form built-in to the Sphinx sidebar, create a function to handle requests to the URL ‘search’ relative to the documentation root. The user’s search query will be in the GET parameters, with the key *q*. Then use the `get_search_results()` method to retrieve search results. In `Flask`³⁸⁵ that would be like this:

```
@app.route('/search')
def search():
    q = request.args.get('q')
    document = support.get_search_results(q)
    return render_template('doc.html', document=document)
```

Note that we used the same template to render our search results as we did to render our documents. That’s because `get_search_results()` returns a context dict in the same format that `get_document()` does.

³⁸⁴ <https://flask.palletsprojects.com/>

³⁸⁵ <https://flask.palletsprojects.com/>

Comments & Proposals

Now that this is done it's time to define the functions that handle the AJAX calls from the script. You will need three functions. The first function is used to add a new comment, and will call the web support method `add_comment()`:

```
@app.route('/docs/add_comment', methods=['POST'])
def add_comment():
    parent_id = request.form.get('parent', '')
    node_id = request.form.get('node', '')
    text = request.form.get('text', '')
    proposal = request.form.get('proposal', '')
    username = g.user.name if g.user is not None else 'Anonymous'
    comment = support.add_comment(text, node_id='node_id',
                                  parent_id='parent_id',
                                  username=username, proposal=proposal)

    return jsonify(comment=comment)
```

You'll notice that both a `parent_id` and `node_id` are sent with the request. If the comment is being attached directly to a node, `parent_id` will be empty. If the comment is a child of another comment, then `node_id` will be empty. Then next function handles the retrieval of comments for a specific node, and is aptly named `get_data()`:

```
@app.route('/docs/get_comments')
def get_comments():
    username = g.user.name if g.user else None
    moderator = g.user.moderator if g.user else False
    node_id = request.args.get('node', '')
    data = support.get_data(node_id, username, moderator)
    return jsonify(**data)
```

The final function that is needed will call `process_vote()`, and will handle user votes on comments:

```
@app.route('/docs/process_vote', methods=['POST'])
def process_vote():
    if g.user is None:
        abort(401)
    comment_id = request.form.get('comment_id')
    value = request.form.get('value')
    if value is None or comment_id is None:
        abort(400)
    support.process_vote(comment_id, g.user.id, value)
    return "success"
```

Comment Moderation

By default, all comments added through `add_comment()` are automatically displayed. If you wish to have some form of moderation, you can pass the `displayed` keyword argument:

```
comment = support.add_comment(text, node_id='node_id',
                               parent_id='parent_id',
                               username=username, proposal=proposal,
                               displayed=False)
```

You can then create a new view to handle the moderation of comments. It will be called when a moderator decides a comment should be accepted and displayed:

```
@app.route('/docs/accept_comment', methods=['POST'])
def accept_comment():
    moderator = g.user.moderator if g.user else False
    comment_id = request.form.get('id')
    support.accept_comment(comment_id, moderator=moderator)
    return 'OK'
```

Rejecting comments happens via comment deletion.

To perform a custom action (such as emailing a moderator) when a new comment is added but not displayed, you can pass callable to the [WebSupport](#) class when instantiating your support object:

```
def moderation_callback(comment):
    """Do something..."""

support = WebSupport(..., moderation_callback=moderation_callback)
```

The moderation callback must take one argument, which will be the same comment dict that is returned by [WebSupport.add_comment\(\)](#).

The WebSupport Class

class sphinxcontrib.websupport.WebSupport

The main API class for the web support package. All interactions with the web support package should occur through this class.

The class takes the following keyword arguments:

srcdir

The directory containing reStructuredText source files.

buildidir

The directory that build data and static files should be placed in. This should be used when creating a [WebSupport](#) object that will be used to build data.

datadir

The directory that the web support data is in. This should be used when creating a [WebSupport](#) object that will be used to retrieve data.

search

This may contain either a string (e.g. 'xapian') referencing a built-in search adapter to use, or an instance of a subclass of [BaseSearch](#).

storage

This may contain either a string representing a database uri, or an instance of a subclass of [StorageBackend](#). If this is not provided, a new sqlite database will be created.

moderation_callback

A callable to be called when a new comment is added that is not displayed. It must accept one argument: a dictionary representing the comment that was added.

staticdir

If the static files should be created in a different location **and not in** `'/static'`, this should be a string with the name of that location (e.g. `buildidir + '/static_files'`).

Note: If you specify `staticdir`, you will typically want to adjust `staticroot` accordingly.

staticroot

If the static files are not served from `'/static '`, this should be a string with the name of that location (e.g. `'/static_files '`).

docroot

If the documentation is not served from the base path of a URL, this should be a string specifying that path (e.g. `'docs '`).

Changed in version 1.6: `WebSupport` class is moved to `sphinxcontrib.websupport` from `sphinx.websupport`. Please add `sphinxcontrib-websupport` package in your dependency and use moved class instead.

Methods

WebSupport.build()

Build the documentation. Places the data into the *outdir* directory. Use it like this:

```
support = WebSupport(sourcedir, builddir, search='xapian')
support.build()
```

This will read reStructured text files from *sourcedir*. Then it will build the pickles and search index, placing them into *builddir*. It will also save node data to the database.

WebSupport.get_document(docname, username="", moderator=False)

Load and return a document from a pickle. The document will be a dict object which can be used to render a template:

```
support = WebSupport(datadir=datadir)
support.get_document('index', username, moderator)
```

In most cases *docname* will be taken from the request path and passed directly to this function. In Flask, that would be something like this:

```
@app.route('/<path:docname>')
def index(docname):
    username = g.user.name if g.user else ''
    moderator = g.user.moderator if g.user else False
    try:
        document = support.get_document(docname, username,
                                         moderator)
    except DocumentNotFoundError:
        abort(404)
    render_template('doc.html', document=document)
```

The document dict that is returned contains the following items to be used during template rendering.

- **body:** The main body of the document as HTML
- **sidebar:** The sidebar of the document as HTML
- **relbar:** A div containing links to related documents
- **title:** The title of the document
- **css:** Links to css files used by Sphinx

- **script**: Javascript containing comment options

This raises `DocumentNotFoundError` if a document matching *docname* is not found.

Parameters

docname – the name of the document to load.

`WebSupport.get_data(node_id, username=None, moderator=False)`

Get the comments and source associated with *node_id*. If *username* is given vote information will be included with the returned comments. The default `CommentBackend` returns a dict with two keys, *source*, and *comments*. *source* is raw source of the node and is used as the starting point for proposals a user can add. *comments* is a list of dicts that represent a comment, each having the following items:

Key	Contents
text	The comment text.
username	The username that was stored with the comment.
id	The comment's unique identifier.
rating	The comment's current rating.
age	The time in seconds since the comment was added.
time	A dict containing time information. It contains the following keys: <i>year</i> , <i>month</i> , <i>day</i> , <i>hour</i> , <i>minute</i> , <i>second</i> , <i>iso</i> , and <i>delta</i> . <i>iso</i> is the time formatted in ISO 8601 format. <i>delta</i> is a printable form of how old the comment is (e.g. "3 hours ago").
vote	If <i>user_id</i> was given, this will be an integer representing the vote. 1 for an upvote, -1 for a downvote, or 0 if unvoted.
node	The id of the node that the comment is attached to. If the comment's parent is another comment rather than a node, this will be null.
parent	The id of the comment that this comment is attached to if it is not attached to a node.
children	A list of all children, in this format.
proposal_diff	An HTML representation of the differences between the the current source and the user's proposed source.

Parameters

- **node_id** – the id of the node to get comments for.
- **username** – the username of the user viewing the comments.
- **moderator** – whether the user is a moderator.

`WebSupport.add_comment(text, node_id="", parent_id="", displayed=True, username=None, time=None, proposal=None, moderator=False)`

Add a comment to a node or another comment. Returns the comment in the same format as `get_comments()`. If the comment is being attached to a node, pass in the node's id (as a string) with the *node* keyword argument:

```
comment = support.add_comment(text, node_id=node_id)
```

If the comment is the child of another comment, provide the parent's id (as a string) with the *parent* keyword argument:

```
comment = support.add_comment(text, parent_id=parent_id)
```

If you would like to store a username with the comment, pass in the optional *username* keyword argument:

```
comment = support.add_comment(text, node=node_id,
                               username=username)
```

Parameters

- **parent_id** – the prefixed id of the comment’s parent.
- **text** – the text of the comment.
- **displayed** – for moderation purposes
- **username** – the username of the user making the comment.
- **time** – the time the comment was created, defaults to now.

`WebSupport.process_vote(comment_id, username, value)`

Process a user’s vote. The web support package relies on the API user to perform authentication. The API user will typically receive a `comment_id` and `value` from a form, and then make sure the user is authenticated. A unique username must be passed in, which will also be used to retrieve the user’s past voting data. An example, once again in Flask:

```
@app.route('/docs/process_vote', methods=['POST'])
def process_vote():
    if g.user is None:
        abort(401)
    comment_id = request.form.get('comment_id')
    value = request.form.get('value')
    if value is None or comment_id is None:
        abort(400)
    support.process_vote(comment_id, g.user.name, value)
    return "success"
```

Parameters

- **comment_id** – the comment being voted on
- **username** – the unique username of the user voting
- **value** – 1 for an upvote, -1 for a downvote, 0 for an unvote.

`WebSupport.get_search_results(q)`

Perform a search for the query `q`, and create a set of search results. Then render the search results as html and return a context dict like the one created by `get_document()`:

```
document = support.get_search_results(q)
```

Parameters

q – the search query

Search Adapters

To create a custom search adapter you will need to subclass the `BaseSearch` class. Then create an instance of the new class and pass that as the `search` keyword argument when you create the `WebSupport` object:

```
support = WebSupport(sourcedir=sourcedir,
                    builddir=builddir,
                    search=MySearch())
```

For more information about creating a custom search adapter, please see the documentation of the [BaseSearch](#) class below.

class sphinxcontrib.websupport.search.BaseSearch

Defines an interface for search adapters.

Changed in version 1.6: `BaseSearch` class is moved to `sphinxcontrib.websupport.search` from `sphinx.websupport.search`.

Methods

The following methods are defined in the `BaseSearch` class. Some methods do not need to be overridden, but some ([add_document\(\)](#) and [handle_query\(\)](#)) must be overridden in your subclass. For a working example, look at the built-in adapter for whoosh.

BaseSearch.init_indexing(*changed=[]*)

Called by the builder to initialize the search indexer. *changed* is a list of pagenames that will be reindexed. You may want to remove these from the search index before indexing begins.

Parameters

changed – a list of pagenames that will be re-indexed

BaseSearch.finish_indexing()

Called by the builder when writing has been completed. Use this to perform any finalization or cleanup actions after indexing is complete.

BaseSearch.feed(*pagename, filename, title, doctree*)

Called by the builder to add a doctree to the index. Converts the *doctree* to text and passes it to [add_document\(\)](#). You probably won't want to override this unless you need access to the *doctree*. Override [add_document\(\)](#) instead.

Parameters

- **pagename** – the name of the page to be indexed
- **filename** – the name of the original source file
- **title** – the title of the page to be indexed
- **doctree** – is the docutils doctree representation of the page

BaseSearch.add_document(*pagename, filename, title, text*)

Called by [feed\(\)](#) to add a document to the search index. This method should do everything necessary to add a single document to the search index.

pagename is name of the page being indexed. It is the combination of the source files relative path and filename, minus the extension. For example, if the source file is “ext/builders.rst”, the *pagename* would be “ext/builders”. This will need to be returned with search results when processing a query.

Parameters

- **pagename** – the name of the page being indexed
- **filename** – the name of the original source file
- **title** – the page's title
- **text** – the full text of the page

`BaseSearch.query(q)`

Called by the web support api to get search results. This method compiles the regular expression to be used when *extracting context*, then calls *handle_query()*. You won't want to override this unless you don't want to use the included *extract_context()* method. Override *handle_query()* instead.

Parameters

q – the search query string.

`BaseSearch.handle_query(q)`

Called by *query()* to retrieve search results for a search query *q*. This should return an iterable containing tuples of the following format:

```
(<path>, <title>, <context>)
```

path and *title* are the same values that were passed to *add_document()*, and *context* should be a short text snippet of the text surrounding the search query in the document.

The *extract_context()* method is provided as a simple way to create the *context*.

Parameters

q – the search query

`BaseSearch.extract_context(text, length=240)`

Extract the context for the search query from the document's full *text*.

Parameters

- **text** – the full text of the document to create the context for
- **length** – the length of the context snippet to return.

Storage Backends

To create a custom storage backend you will need to subclass the *StorageBackend* class. Then create an instance of the new class and pass that as the *storage* keyword argument when you create the *WebSupport* object:

```
support = WebSupport(sourcedir=sourcedir,  
                    builddir=builddir,  
                    storage=MyStorage())
```

For more information about creating a custom storage backend, please see the documentation of the *StorageBackend* class below.

class sphinxcontrib.websupport.storage.StorageBackend

Defines an interface for storage backends.

Changed in version 1.6: *StorageBackend* class is moved to *sphinxcontrib.websupport.storage* from *sphinx.websupport.storage*.

Methods

`StorageBackend.pre_build()`

Called immediately before the build process begins. Use this to prepare the `StorageBackend` for the addition of nodes.

`StorageBackend.add_node(id, document, source)`

Add a node to the `StorageBackend`.

Parameters

- **id** – a unique id for the comment.
- **document** – the name of the document the node belongs to.
- **source** – the source files name.

`StorageBackend.post_build()`

Called after a build has completed. Use this to finalize the addition of nodes if needed.

`StorageBackend.add_comment(text, displayed, username, time, proposal, node_id, parent_id, moderator)`

Called when a comment is being added.

Parameters

- **text** – the text of the comment
- **displayed** – whether the comment should be displayed
- **username** – the name of the user adding the comment
- **time** – a date object with the time the comment was added
- **proposal** – the text of the proposal the user made
- **node_id** – the id of the node that the comment is being added to
- **parent_id** – the id of the comment’s parent comment.
- **moderator** – whether the user adding the comment is a moderator

`StorageBackend.delete_comment(comment_id, username, moderator)`

Delete a comment.

Raises `UserNotAuthorizedError` if `moderator` is `False` and `username` doesn’t match the username on the comment.

Parameters

- **comment_id** – The id of the comment being deleted.
- **username** – The username of the user requesting the deletion.
- **moderator** – Whether the user is a moderator.

`StorageBackend.get_data(node_id, username, moderator)`

Called to retrieve all data for a node. This should return a dict with two keys, `source` and `comments` as described by [WebSupport](#)’s `get_data()` method.

Parameters

- **node_id** – The id of the node to get data for.
- **username** – The name of the user requesting the data.
- **moderator** – Whether the requestor is a moderator.

`StorageBackend.process_vote(comment_id, username, value)`

Process a vote that is being cast. *value* will be either -1, 0, or 1.

Parameters

- **comment_id** – The id of the comment being voted on.
- **username** – The username of the user casting the vote.
- **value** – The value of the vote being cast.

`StorageBackend.update_username(old_username, new_username)`

If a user is allowed to change their username this method should be called so that there is not stagnate data in the storage system.

Parameters

- **old_username** – The username being changed.
- **new_username** – What the username is being changed to.

`StorageBackend.accept_comment(comment_id)`

Called when a moderator accepts a comment. After the method is called the comment should be displayed to all users.

Parameters

- **comment_id** – The id of the comment being accepted.

WRITING SPHINX EXTENSIONS

This guide is aimed at giving a quick introduction for those wishing to develop their own extensions for Sphinx. Sphinx possesses significant extensibility capabilities including the ability to hook into almost every point of the build process. If you simply wish to use Sphinx with existing extensions, refer to *Using Sphinx*. For a more detailed discussion of the extension interface see *Sphinx Extensions API*.

5.1 Developing extensions overview

This page contains general information about developing Sphinx extensions.

Make an extension depend on another extension

Sometimes your extension depends on the functionality of another Sphinx extension. Most Sphinx extensions are activated in a project's `conf.py` file, but this is not available to you as an extension developer.

To ensure that another extension is activated as a part of your own extension, use the `sphinx.application.Sphinx.setup_extension()` method. This will activate another extension at run-time, ensuring that you have access to its functionality.

For example, the following code activates the `recommonmark` extension:

```
def setup(app):
    app.setup_extension("recommonmark")
```

Note: Since your extension will depend on another, make sure to include it as a part of your extension's installation requirements.

5.2 Extension tutorials

Refer to the following tutorials to get started with extension development.

Developing a “Hello world” extension

The objective of this tutorial is to create a very basic extension that adds a new directive. This directive will output a paragraph containing “hello world”.

Only basic information is provided in this tutorial. For more information, refer to the *other tutorials* that go into more details.

Warning: For this extension, you will need some basic understanding of [docutils](#)³⁸⁶ and Python.

Overview

We want the extension to add the following to Sphinx:

- A `helloworld` directive, that will simply output the text “hello world”.

Prerequisites

We will not be distributing this plugin via [PyPI](#)³⁸⁷ and will instead include it as part of an existing project. This means you will need to use an existing project or create a new one using **sphinx-quickstart**.

We assume you are using separate source (`source`) and build (`build`) folders. Your extension file could be in any folder of your project. In our case, let’s do the following:

1. Create an `_ext` folder in `source`
2. Create a new Python file in the `_ext` folder called `helloworld.py`

Here is an example of the folder structure you might obtain:

```
└─ source
   └─ _ext
      └─ helloworld.py
   └─ _static
   └─ conf.py
   └─ somefolder
   └─ index.rst
   └─ somefile.rst
   └─ someotherfile.rst
```

Writing the extension

Open `helloworld.py` and paste the following code in it:

```
1 from docutils import nodes
2 from docutils.parsers.rst import Directive
3
4 from sphinx.application import Sphinx
5 from sphinx.util.typing import ExtensionMetadata
6
```

(continues on next page)

³⁸⁶ <https://docutils.sourceforge.io/>

³⁸⁷ <https://pypi.org/>

(continued from previous page)

```

7
8 class HelloWorld(Directive):
9     def run(self):
10         paragraph_node = nodes.paragraph(text='Hello World!')
11         return [paragraph_node]
12
13
14 def setup(app: Sphinx) -> ExtensionMetadata:
15     app.add_directive('helloworld', HelloWorld)
16
17     return {
18         'version': '0.1',
19         'parallel_read_safe': True,
20         'parallel_write_safe': True,
21     }

```

Some essential things are happening in this example, and you will see them for all directives.

The directive class

Our new directive is declared in the HelloWorld class.

```

1 from sphinx.util.typing import ExtensionMetadata
2
3
4 class HelloWorld(Directive):
5     def run(self):

```

This class extends the `docutils`³⁸⁸ `Directive` class. All extensions that create directives should extend this class.

See also:

The `docutils` documentation on creating directives³⁸⁹

This class contains a `run` method. This method is a requirement and it is part of every directive. It contains the main logic of the directive and it returns a list of `docutils` nodes to be processed by Sphinx. These nodes are `docutils`' way of representing the content of a document. There are many types of nodes available: text, paragraph, reference, table, etc.

See also:

The `docutils` documentation on nodes³⁹⁰

The `nodes.paragraph` class creates a new paragraph node. A paragraph node typically contains some text that we can set during instantiation using the `text` parameter.

³⁸⁸ <https://docutils.sourceforge.io/>

³⁸⁹ <https://docutils.sourceforge.io/docs/howto/rst-directives.html>

³⁹⁰ <https://docutils.sourceforge.io/docs/ref/doctree.html>

The setup function

This function is a requirement. We use it to plug our new directive into Sphinx.

```
1
2
3 def setup(app: Sphinx) -> ExtensionMetadata:
4     app.add_directive('helloworld', HelloWorld)
5
6     return {
7         'version': '0.1',
8         'parallel_read_safe': True,
9         'parallel_write_safe': True,
10    }
```

The simplest thing you can do is to call the `add_directive()` method, which is what we've done here. For this particular call, the first argument is the name of the directive itself as used in a reST file. In this case, we would use `helloworld`. For example:

```
Some intro text here...

.. helloworld::

Some more text here...
```

We also return the *extension metadata* that indicates the version of our extension, along with the fact that it is safe to use the extension for both parallel reading and writing.

Using the extension

The extension has to be declared in your `conf.py` file to make Sphinx aware of it. There are two steps necessary here:

1. Add the `_ext` directory to the [Python path](#)³⁹¹ using `sys.path.append`. This should be placed at the top of the file.
2. Update or create the *extensions* list and add the extension file name to the list

For example:

```
import os
import sys

sys.path.append(os.path.abspath("./_ext"))

extensions = ['helloworld']
```

Tip: We're not distributing this extension as a [Python package](#)³⁹², we need to modify the [Python path](#)³⁹³ so Sphinx can find our extension. This is why we need the call to `sys.path.append`.

You can now use the extension in a file. For example:

³⁹¹ <https://docs.python.org/3/using/cmdline.html#envvar-PYTHONPATH>

³⁹² <https://packaging.python.org/>

³⁹³ <https://docs.python.org/3/using/cmdline.html#envvar-PYTHONPATH>

```
Some intro text here...
```

```
.. helloworld::
```

```
Some more text here...
```

The sample above would generate:

```
Some intro text here...
```

```
Hello World!
```

```
Some more text here...
```

Further reading

This is the very basic principle of an extension that creates a new directive.

For a more advanced example, refer to *Developing a “TODO” extension*.

Developing a “TODO” extension

The objective of this tutorial is to create a more comprehensive extension than that created in *Developing a “Hello world” extension*. Whereas that guide just covered writing a custom *directive*, this guide adds multiple directives, along with custom nodes, additional config values and custom event handlers. To this end, we will cover a `todo` extension that adds capabilities to include todo entries in the documentation, and to collect these in a central place. This is similar the `sphinxext.todo` extension distributed with Sphinx.

Overview

Note: To understand the design of this extension, refer to *Important objects* and *Build Phases*.

We want the extension to add the following to Sphinx:

- A `todo` directive, containing some content that is marked with “TODO” and only shown in the output if a new config value is set. Todo entries should not be in the output by default.
- A `todolist` directive that creates a list of all todo entries throughout the documentation.

For that, we will need to add the following elements to Sphinx:

- New directives, called `todo` and `todolist`.
- New document tree nodes to represent these directives, conventionally also called `todo` and `todolist`. We wouldn’t need new nodes if the new directives only produced some content representable by existing nodes.
- A new config value `todo_include_todos` (config value names should start with the extension name, in order to stay unique) that controls whether todo entries make it into the output.
- New event handlers: one for the *doctree-resolved* event, to replace the `todo` and `todolist` nodes, one for *env-merge-info* to merge intermediate results from parallel builds, and one for *env-purge-doc* (the reason for that will be covered later).

Prerequisites

As with *Developing a “Hello world” extension*, we will not be distributing this plugin via PyPI so once again we need a Sphinx project to call this from. You can use an existing project or create a new one using **sphinx-quickstart**.

We assume you are using separate source (source) and build (build) folders. Your extension file could be in any folder of your project. In our case, let’s do the following:

1. Create an `_ext` folder in `source`
2. Create a new Python file in the `_ext` folder called `todo.py`

Here is an example of the folder structure you might obtain:

```
└─ source
   └─ _ext
      └─ todo.py
   └─ _static
   └─ conf.py
   └─ somefolder
   └─ index.rst
   └─ somefile.rst
   └─ someotherfile.rst
```

Writing the extension

Open `todo.py` and paste the following code in it, all of which we will explain in detail shortly:

```
1 from docutils import nodes
2 from docutils.parsers.rst import Directive
3
4 from sphinx.application import Sphinx
5 from sphinx.locale import _
6 from sphinx.util.docutils import SphinxDirective
7 from sphinx.util.typing import ExtensionMetadata
8
9
10 class todo(nodes.Admonition, nodes.Element):
11     pass
12
13
14 class todolist(nodes.General, nodes.Element):
15     pass
16
17
18 def visit_todo_node(self, node):
19     self.visit_admonition(node)
20
21
22 def depart_todo_node(self, node):
23     self.depart_admonition(node)
24
25
26 class TodolistDirective(Directive):
```

(continues on next page)

(continued from previous page)

```

27     def run(self):
28         return [todolist('')]
29
30
31 class TodoDirective(SphinxDirective):
32     # this enables content in the directive
33     has_content = True
34
35     def run(self):
36         targetid = 'todo-%d' % self.env.new_serialno('todo')
37         targetnode = nodes.target('', '', ids=[targetid])
38
39         todo_node = todo('\n'.join(self.content))
40         todo_node += nodes.title(_('Todo'), _('Todo'))
41         self.state.nested_parse(self.content, self.content_offset, todo_node)
42
43         if not hasattr(self.env, 'todo_all_todos'):
44             self.env.todo_all_todos = []
45
46         self.env.todo_all_todos.append({
47             'docname': self.env.docname,
48             'lineno': self.lineno,
49             'todo': todo_node.deepcopy(),
50             'target': targetnode,
51         })
52
53         return [targetnode, todo_node]
54
55
56 def purge_todos(app, env, docname):
57     if not hasattr(env, 'todo_all_todos'):
58         return
59
60     env.todo_all_todos = [todo for todo in env.todo_all_todos if todo['docname'] !=
61 ↪ docname]
62
63 def merge_todos(app, env, docnames, other):
64     if not hasattr(env, 'todo_all_todos'):
65         env.todo_all_todos = []
66     if hasattr(other, 'todo_all_todos'):
67         env.todo_all_todos.extend(other.todo_all_todos)
68
69
70 def process_todo_nodes(app, doctree, fromdocname):
71     if not app.config.todo_include_todos:
72         for node in doctree.findall(todo):
73             node.parent.remove(node)
74
75     # Replace all todolist nodes with a list of the collected todos.
76     # Augment each todo with a backlink to the original location.
77     env = app.builder.env

```

(continues on next page)

(continued from previous page)

```

78
79     if not hasattr(env, 'todo_all_todos'):
80         env.todo_all_todos = []
81
82     for node in doctree.findall(todolist):
83         if not app.config.todo_include_todos:
84             node.replace_self([])
85             continue
86
87     content = []
88
89     for todo_info in env.todo_all_todos:
90         para = nodes.paragraph()
91         filename = env.doc2path(todo_info['docname'], base=None)
92         description = _(
93             '(The original entry is located in %s, line %d and can be found '
94             ) % (filename, todo_info['lineno'])
95         para += nodes.Text(description)
96
97         # Create a reference
98         newnode = nodes.reference('', '')
99         innernode = nodes.emphasis(_('here'), _('here'))
100        newnode['refdocname'] = todo_info['docname']
101        newnode['refuri'] = app.builder.get_relative_uri(fromdocname, todo_info[
102        ↪ 'docname'])
103        newnode['refuri'] += '#' + todo_info['target']['refid']
104        newnode.append(innernode)
105        para += newnode
106        para += nodes.Text('.')
107
108        # Insert into the todolist
109        content.extend((
110            todo_info['todo'],
111            para,
112        ))
113
114        node.replace_self(content)
115
116 def setup(app: Sphinx) -> ExtensionMetadata:
117     app.add_config_value('todo_include_todos', False, 'html')
118
119     app.add_node(todolist)
120     app.add_node(
121         todo,
122         html=(visit_todo_node, depart_todo_node),
123         latex=(visit_todo_node, depart_todo_node),
124         text=(visit_todo_node, depart_todo_node),
125     )
126
127     app.add_directive('todo', TodoDirective)
128     app.add_directive('todolist', TodolistDirective)

```

(continues on next page)

(continued from previous page)

```

129 app.connect('doctree-resolved', process_todo_nodes)
130 app.connect('env-purge-doc', purge_todos)
131 app.connect('env-merge-info', merge_todos)
132
133 return {
134     'version': '0.1',
135     'env_version': 1,
136     'parallel_read_safe': True,
137     'parallel_write_safe': True,
138 }
```

This is far more extensive extension than the one detailed in *Developing a “Hello world” extension*, however, we will look at each piece step-by-step to explain what’s happening.

The node classes

Let’s start with the node classes:

```

1
2
3 class todo(nodes.Admonition, nodes.Element):
4     pass
5
6
7 class todolist(nodes.General, nodes.Element):
8     pass
9
10
11 def visit_todo_node(self, node):
12     self.visit_admonition(node)
13
14
```

Node classes usually don’t have to do anything except inherit from the standard docutils classes defined in docutils. `nodes.todo` inherits from `Admonition` because it should be handled like a note or warning, `todolist` is just a “general” node.

Note: Many extensions will not have to create their own node classes and work fine with the nodes already provided by docutils³⁹⁴ and *Sphinx*.

Attention: It is important to know that while you can extend Sphinx without leaving your `conf.py`, if you declare an inherited node right there, you’ll hit an unobvious `PickleError`³⁹⁵. So if something goes wrong, please make sure that you put inherited nodes into a separate Python module.

For more details, see:

- <https://github.com/sphinx-doc/sphinx/issues/6751>
- <https://github.com/sphinx-doc/sphinx/issues/1493>

³⁹⁴ <https://docutils.sourceforge.io/docs/ref/doctree.html>

- <https://github.com/sphinx-doc/sphinx/issues/1424>

The directive classes

A directive class is a class deriving usually from `docutils.parsers.rst.Directive`. The directive interface is also covered in detail in the [docutils documentation](#)³⁹⁶; the important thing is that the class should have attributes that configure the allowed markup, and a `run` method that returns a list of nodes.

Looking first at the `TodolistDirective` directive:

```
1
2
3 class TodolistDirective(Directive):
4     def run(self):
```

It's very simple, creating and returning an instance of our `todolist` node class. The `TodolistDirective` directive itself has neither content nor arguments that need to be handled. That brings us to the `TodoDirective` directive:

```
1
2 class TodoDirective(SphinxDirective):
3     # this enables content in the directive
4     has_content = True
5
6     def run(self):
7         targetid = 'todo-%d' % self.env.new_serialno('todo')
8         targetnode = nodes.target('', '', ids=[targetid])
9
10        todo_node = todo('\n'.join(self.content))
11        todo_node += nodes.title(_('Todo'), _('Todo'))
12        self.state.nested_parse(self.content, self.content_offset, todo_node)
13
14        if not hasattr(self.env, 'todo_all_todos'):
15            self.env.todo_all_todos = []
16
17        self.env.todo_all_todos.append({
18            'docname': self.env.docname,
19            'lineno': self.lineno,
20            'todo': todo_node.deepcopy(),
21            'target': targetnode,
22        })
23
24        return [targetnode, todo_node]
```

Several important things are covered here. First, as you can see, we're now subclassing the `SphinxDirective` helper class instead of the usual `Directive` class. This gives us access to the *build environment instance* using the `self.env` property. Without this, we'd have to use the rather convoluted `self.state.document.settings.env`. Then, to act as a link target (from `TodolistDirective`), the `TodoDirective` directive needs to return a target node in addition to the `todo` node. The target ID (in HTML, this will be the anchor name) is generated by using `env.new_serialno` which returns a new unique integer on each call and therefore leads to unique target names. The target node is instantiated without any text (the first two arguments).

³⁹⁵ <https://docs.python.org/3/library/pickle.html#pickle.PickleError>

³⁹⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html>

On creating admonition node, the content body of the directive are parsed using `self.state.nested_parse`. The first argument gives the content body, and the second one gives content offset. The third argument gives the parent node of parsed result, in our case the `todo` node. Following this, the `todo` node is added to the environment. This is needed to be able to create a list of all todo entries throughout the documentation, in the place where the author puts a `todo` directive. For this case, the environment attribute `todo_all_todos` is used (again, the name should be unique, so it is prefixed by the extension name). It does not exist when a new environment is created, so the directive must check and create it if necessary. Various information about the todo entry's location are stored along with a copy of the node.

In the last line, the nodes that should be put into the doctree are returned: the target node and the admonition node.

The node structure that the directive returns looks like this:

```
+-----+
| target node |
+-----+
+-----+
| todo node   |
+-----+
\__+-----+
   | admonition title |
   +-----+
   | paragraph        |
   +-----+
   | ...              |
   +-----+
```

The event handlers

Event handlers are one of Sphinx's most powerful features, providing a way to do hook into any part of the documentation process. There are many events provided by Sphinx itself, as detailed in *the API guide*, and we're going to use a subset of them here.

Let's look at the event handlers used in the above example. First, the one for the `env-purge-doc` event:

```
1 def purge_todos(app, env, docname):
2     if not hasattr(env, 'todo_all_todos'):
3         return
4
5     env.todo_all_todos = [todo for todo in env.todo_all_todos if todo['docname'] !=
6     docname]
```

Since we store information from source files in the environment, which is persistent, it may become out of date when the source file changes. Therefore, before each source file is read, the environment's records of it are cleared, and the `env-purge-doc` event gives extensions a chance to do the same. Here we clear out all todos whose docname matches the given one from the `todo_all_todos` list. If there are todos left in the document, they will be added again during parsing.

The next handler, for the `env-merge-info` event, is used during parallel builds. As during parallel builds all threads have their own `env`, there's multiple `todo_all_todos` lists that need to be merged:

```
1     if not hasattr(env, 'todo_all_todos'):
2         env.todo_all_todos = []
3     if hasattr(other, 'todo_all_todos'):
```

(continues on next page)

(continued from previous page)

```
env.todo_all_todos.extend(other.todo_all_todos)
```

The other handler belongs to the *doctree-resolved* event:

```

1  if not app.config.todo_include_todos:
2      for node in doctree.findall(todo):
3          node.parent.remove(node)
4
5      # Replace all todolist nodes with a list of the collected todos.
6      # Augment each todo with a backlink to the original location.
7      env = app.builder.env
8
9      if not hasattr(env, 'todo_all_todos'):
10         env.todo_all_todos = []
11
12     for node in doctree.findall(todolist):
13         if not app.config.todo_include_todos:
14             node.replace_self([])
15             continue
16
17         content = []
18
19         for todo_info in env.todo_all_todos:
20             para = nodes.paragraph()
21             filename = env.doc2path(todo_info['docname'], base=None)
22             description = _(
23                 '(The original entry is located in %s, line %d and can be found '
24                 ) % (filename, todo_info['lineno'])
25             para += nodes.Text(description)
26
27             # Create a reference
28             newnode = nodes.reference('', '')
29             innernode = nodes.emphasis(_('here'), _('here'))
30             newnode['refdocname'] = todo_info['docname']
31             newnode['refuri'] = app.builder.get_relative_uri(fromdocname, todo_info[
32 → 'docname'])
33             newnode['refuri'] += '#' + todo_info['target']['refid']
34             newnode.append(innernode)
35             para += newnode
36             para += nodes.Text('.')
37
38             # Insert into the todolist
39             content.extend((
40                 todo_info['todo'],
41                 para,
42             ))
43
44         node.replace_self(content)

```

The *doctree-resolved* event is emitted at the end of *phase 3 (resolving)* and allows custom resolving to be done. The handler we have written for this event is a bit more involved. If the `todo_include_todos` config value (which we'll describe shortly) is false, all todo and todolist nodes are removed from the documents. If not, todo nodes just stay

where and how they are. `todo` nodes are replaced by a list of todo entries, complete with backlinks to the location where they come from. The list items are composed of the nodes from the `todo` entry and docutils nodes created on the fly: a paragraph for each entry, containing text that gives the location, and a link (reference node containing an italic node) with the backreference. The reference URI is built by `sphinx.builders.Builder.get_relative_uri()` which creates a suitable URI depending on the used builder, and appending the `todo` node's (the target's) ID as the anchor name.

The setup function

As noted *previously*, the `setup` function is a requirement and is used to plug directives into Sphinx. However, we also use it to hook up the other parts of our extension. Let's look at our `setup` function:

```

1 def setup(app: Sphinx) -> ExtensionMetadata:
2     app.add_config_value('todo_include_todos', False, 'html')
3
4     app.add_node(todo)
5     app.add_node(
6         todo,
7         html=(visit_todo_node, depart_todo_node),
8         latex=(visit_todo_node, depart_todo_node),
9         text=(visit_todo_node, depart_todo_node),
10    )
11
12    app.add_directive('todo', TodoDirective)
13    app.add_directive('todolist', TodolistDirective)
14    app.connect('doctree-resolved', process_todo_nodes)
15    app.connect('env-purge-doc', purge_todos)
16    app.connect('env-merge-info', merge_todos)
17
18    return {
19        'version': '0.1',
20        'env_version': 1,
21        'parallel_read_safe': True,
22        'parallel_write_safe': True,
23    }

```

The calls in this function refer to the classes and functions we added earlier. What the individual calls do is the following:

- `add_config_value()` lets Sphinx know that it should recognize the new *config value* `todo_include_todos`, whose default value should be `False` (this also tells Sphinx that it is a boolean value).

If the third argument was `'html'`, HTML documents would be full rebuild if the config value changed its value. This is needed for config values that influence reading (build *phase 1 (reading)*).

- `add_node()` adds a new *node class* to the build system. It also can specify visitor functions for each supported output format. These visitor functions are needed when the new nodes stay until *phase 4 (writing)*. Since the `todo` node is always replaced in *phase 3 (resolving)*, it doesn't need any.
- `add_directive()` adds a new *directive*, given by name and class.
- Finally, `connect()` adds an *event handler* to the event whose name is given by the first argument. The event handler function is called with several arguments which are documented with the event.

With this, our extension is complete.

Using the extension

As before, we need to enable the extension by declaring it in our `conf.py` file. There are two steps necessary here:

1. Add the `_ext` directory to the `Python path`³⁹⁷ using `sys.path.append`. This should be placed at the top of the file.
2. Update or create the `extensions` list and add the extension file name to the list

In addition, we may wish to set the `todo_include_todos` config value. As noted above, this defaults to `False` but we can set it explicitly.

For example:

```
import os
import sys

sys.path.append(os.path.abspath("./_ext"))

extensions = ['todo']

todo_include_todos = False
```

You can now use the extension throughout your project. For example:

Listing 1: index.rst

```
Hello, world
=====

.. toctree::
   somefile.rst
   someotherfile.rst

Hello world. Below is the list of TODOs.

.. todolist::
```

Listing 2: somefile.rst

```
foo
===

Some intro text here...

.. todo:: Fix this
```

Listing 3: someotherfile.rst

```
bar
===

Some more text here...
```

(continues on next page)

³⁹⁷ <https://docs.python.org/3/using/cmdline.html#envvar-PYTHONPATH>

(continued from previous page)

```
.. todo:: Fix that
```

Because we have configured `todo_include_todos` to `False`, we won't actually see anything rendered for the `todo` and `todolist` directives. However, if we toggle this to `true`, we will see the output described previously.

Further reading

For more information, refer to the [docutils](#)³⁹⁸ documentation and *Sphinx Extensions API*.

Developing a “recipe” extension

The objective of this tutorial is to illustrate roles, directives and domains. Once complete, we will be able to use this extension to describe a recipe and reference that recipe from elsewhere in our documentation.

Note: This tutorial is based on a guide first published on [opensource.com](#)³⁹⁹ and is provided here with the original author's permission.

Overview

We want the extension to add the following to Sphinx:

- A recipe *directive*, containing some content describing the recipe steps, along with a `:contains:` option highlighting the main ingredients of the recipe.
- A ref *role*, which provides a cross-reference to the recipe itself.
- A recipe *domain*, which allows us to tie together the above role and domain, along with things like indices.

For that, we will need to add the following elements to Sphinx:

- A new directive called `recipe`
- New indexes to allow us to reference ingredient and recipes
- A new domain called `recipe`, which will contain the `recipe` directive and `ref` role

Prerequisites

We need the same setup as in *the previous extensions*. This time, we will be putting out extension in a file called `recipe.py`.

Here is an example of the folder structure you might obtain:

```
├─ source
│   ├── _ext
│   │   └─ recipe.py
│   ├── conf.py
│   └─ index.rst
```

³⁹⁸ <https://docutils.sourceforge.io/docs/>

³⁹⁹ <https://opensource.com/article/18/11/building-custom-workflows-sphinx>

Writing the extension

Open `recipe.py` and paste the following code in it, all of which we will explain in detail shortly:

```

1  from collections import defaultdict
2
3  from docutils.parsers.rst import directives
4
5  from sphinx import addnodes
6  from sphinx.application import Sphinx
7  from sphinx.directives import ObjectDescription
8  from sphinx.domains import Domain, Index
9  from sphinx.roles import XRefRole
10 from sphinx.util.nodes import make_refnode
11 from sphinx.util.typing import ExtensionMetadata
12
13
14 class RecipeDirective(ObjectDescription):
15     """A custom directive that describes a recipe."""
16
17     has_content = True
18     required_arguments = 1
19     option_spec = {
20         'contains': directives.unchanged_required,
21     }
22
23     def handle_signature(self, sig, signode):
24         signode += addnodes.desc_name(text=sig)
25         return sig
26
27     def add_target_and_index(self, name_cls, sig, signode):
28         signode['ids'].append('recipe' + '-' + sig)
29         if 'contains' in self.options:
30             ingredients = [x.strip() for x in self.options.get('contains').split(',')]
31
32             recipes = self.env.get_domain('recipe')
33             recipes.add_recipe(sig, ingredients)
34
35
36 class IngredientIndex(Index):
37     """A custom index that creates an ingredient matrix."""
38
39     name = 'ingredient'
40     localname = 'Ingredient Index'
41     shortname = 'Ingredient'
42
43     def generate(self, docnames=None):
44         content = defaultdict(list)
45
46         recipes = {
47             name: (dispname, typ, docname, anchor)
48             for name, dispname, typ, docname, anchor, _ in self.domain.get_objects()
49         }

```

(continues on next page)

(continued from previous page)

```

50     recipe_ingredients = self.domain.data['recipe_ingredients']
51     ingredient_recipes = defaultdict(list)
52
53     # flip from recipe_ingredients to ingredient_recipes
54     for recipe_name, ingredients in recipe_ingredients.items():
55         for ingredient in ingredients:
56             ingredient_recipes[ingredient].append(recipe_name)
57
58     # convert the mapping of ingredient to recipes to produce the expected
59     # output, shown below, using the ingredient name as a key to group
60     #
61     # name, subtype, docname, anchor, extra, qualifier, description
62     for ingredient, recipe_names in ingredient_recipes.items():
63         for recipe_name in recipe_names:
64             dispname, typ, docname, anchor = recipes[recipe_name]
65             content[ingredient].append((dispname, 0, docname, anchor, docname, ' ',
→ typ))
66
67     # convert the dict to the sorted list of tuples expected
68     content = sorted(content.items())
69
70     return content, True
71
72
73 class RecipeIndex(Index):
74     """A custom index that creates an recipe matrix."""
75
76     name = 'recipe'
77     localname = 'Recipe Index'
78     shortname = 'Recipe'
79
80     def generate(self, docnames=None):
81         content = defaultdict(list)
82
83         # sort the list of recipes in alphabetical order
84         recipes = self.domain.get_objects()
85         recipes = sorted(recipes, key=lambda recipe: recipe[0])
86
87         # generate the expected output, shown below, from the above using the
88         # first letter of the recipe as a key to group thing
89         #
90         # name, subtype, docname, anchor, extra, qualifier, description
91         for _name, dispname, typ, docname, anchor, _priority in recipes:
92             content[dispname[0].lower()].append((
93                 dispname,
94                 0,
95                 docname,
96                 anchor,
97                 docname,
98                 ' ',
99                 typ,
100             ))

```

(continues on next page)

(continued from previous page)

```

101     # convert the dict to the sorted list of tuples expected
102     content = sorted(content.items())
103
104
105     return content, True
106
107
108 class RecipeDomain(Domain):
109     name = 'recipe'
110     label = 'Recipe Sample'
111     roles = {
112         'ref': XRefRole(),
113     }
114     directives = {
115         'recipe': RecipeDirective,
116     }
117     indices = {
118         RecipeIndex,
119         IngredientIndex,
120     }
121     initial_data = {
122         'recipes': [], # object list
123         'recipe_ingredients': {}, # name -> object
124     }
125     data_version = 0
126
127     def get_full_qualified_name(self, node):
128         return f'recipe.{node.arguments[0]}'
129
130     def get_objects(self):
131         yield from self.data['recipes']
132
133     def resolve_xref(self, env, fromdocname, builder, typ, target, node, contnode):
134         match = [
135             (docname, anchor)
136             for name, sig, typ, docname, anchor, prio in self.get_objects()
137             if sig == target
138         ]
139
140         if len(match) > 0:
141             todocname = match[0][0]
142             targ = match[0][1]
143
144             return make_refnode(builder, fromdocname, todocname, targ, contnode, targ)
145         else:
146             print('Awww, found nothing')
147             return None
148
149     def add_recipe(self, signature, ingredients):
150         """Add a new recipe to the domain."""
151         name = f'recipe.{signature}'
152         anchor = f'recipe-{signature}'

```

(continues on next page)

(continued from previous page)

```

153     self.data['recipe_ingredients'][name] = ingredients
154     # name, dispname, type, docname, anchor, priority
155     self.data['recipes'].append((name, signature, 'Recipe', self.env.docname, anchor,
156     ↪ 0))
157
158
159 def setup(app: Sphinx) -> ExtensionMetadata:
160     app.add_domain(RecipeDomain)
161
162     return {
163         'version': '0.1',
164         'parallel_read_safe': True,
165         'parallel_write_safe': True,
166     }

```

Let's look at each piece of this extension step-by-step to explain what's going on.

The directive class

The first thing to examine is the `RecipeDirective` directive:

```

1 class RecipeDirective(ObjectDescription):
2     """A custom directive that describes a recipe."""
3
4     has_content = True
5     required_arguments = 1
6     option_spec = {
7         'contains': directives.unchanged_required,
8     }
9
10    def handle_signature(self, sig, signode):
11        signode += addnodes.desc_name(text=sig)
12        return sig
13
14    def add_target_and_index(self, name_cls, sig, signode):
15        signode['ids'].append('recipe' + '-' + sig)
16        if 'contains' in self.options:
17            ingredients = [x.strip() for x in self.options.get('contains').split(',')]
18
19            recipes = self.env.get_domain('recipe')
20            recipes.add_recipe(sig, ingredients)

```

Unlike *Developing a “Hello world” extension* and *Developing a “TODO” extension*, this directive doesn't derive from `docutils.parsers.rst.Directive` and doesn't define a `run` method. Instead, it derives from `sphinx.directives.ObjectDescription` and defines `handle_signature` and `add_target_and_index` methods. This is because `ObjectDescription` is a special-purpose directive that's intended for describing things like classes, functions, or, in our case, recipes. More specifically, `handle_signature` implements parsing the signature of the directive and passes on the object's name and type to its superclass, while `add_target_and_index` adds a target (to link to) and an entry to the index for this node.

We also see that this directive defines `has_content`, `required_arguments` and `option_spec`. Unlike the `TodoDirective` directive added in the *previous tutorial*, this directive takes a single argument, the recipe name, and

an option, contains, in addition to the nested reStructuredText in the body.

The index classes

Todo: Add brief overview of indices

```
1 class IngredientIndex(Index):
2     """A custom index that creates an ingredient matrix."""
3
4     name = 'ingredient'
5     localname = 'Ingredient Index'
6     shortname = 'Ingredient'
7
8     def generate(self, docnames=None):
9         content = defaultdict(list)
10
11         recipes = {
12             name: (dispname, typ, docname, anchor)
13             for name, dispname, typ, docname, anchor, _ in self.domain.get_objects()
14         }
15         recipe_ingredients = self.domain.data['recipe_ingredients']
16         ingredient_recipes = defaultdict(list)
17
18         # flip from recipe_ingredients to ingredient_recipes
19         for recipe_name, ingredients in recipe_ingredients.items():
20             for ingredient in ingredients:
21                 ingredient_recipes[ingredient].append(recipe_name)
22
23         # convert the mapping of ingredient to recipes to produce the expected
24         # output, shown below, using the ingredient name as a key to group
25         #
26         # name, subtype, docname, anchor, extra, qualifier, description
27         for ingredient, recipe_names in ingredient_recipes.items():
28             for recipe_name in recipe_names:
29                 dispname, typ, docname, anchor = recipes[recipe_name]
30                 content[ingredient].append((dispname, 0, docname, anchor, docname, '',
31                 ↪ typ))
32
33         # convert the dict to the sorted list of tuples expected
34         content = sorted(content.items())
35
36         return content, True
```

```
1 class RecipeIndex(Index):
2     """A custom index that creates an recipe matrix."""
3
4     name = 'recipe'
5     localname = 'Recipe Index'
6     shortname = 'Recipe'
7
```

(continues on next page)

(continued from previous page)

```

8  def generate(self, docnames=None):
9      content = defaultdict(list)
10
11     # sort the list of recipes in alphabetical order
12     recipes = self.domain.get_objects()
13     recipes = sorted(recipes, key=lambda recipe: recipe[0])
14
15     # generate the expected output, shown below, from the above using the
16     # first letter of the recipe as a key to group things
17     #
18     # name, subtype, docname, anchor, extra, qualifier, description
19     for _name, dispname, typ, docname, anchor, _priority in recipes:
20         content[dispname[0].lower()].append((
21             dispname,
22             0,
23             docname,
24             anchor,
25             docname,
26             '',
27             typ,
28         ))
29
30     # convert the dict to the sorted list of tuples expected
31     content = sorted(content.items())
32
33     return content, True

```

Both `IngredientIndex` and `RecipeIndex` are derived from `Index`. They implement custom logic to generate a tuple of values that define the index. Note that `RecipeIndex` is a simple index that has only one entry. Extending it to cover more object types is not yet part of the code.

Both indices use the method `Index.generate()` to do their work. This method combines the information from our domain, sorts it, and returns it in a list structure that will be accepted by Sphinx. This might look complicated but all it really is is a list of tuples like `('tomato', 'TomatoSoup', 'test', 'rec-TomatoSoup', ...)`. Refer to the [domain API guide](#) for more information on this API.

These index pages can be referenced with the `ref` role by combining the domain name and the index name value. For example, `RecipeIndex` can be referenced with `:ref:`recipe-recipe`` and `IngredientIndex` can be referenced with `:ref:`recipe-ingredient``.

The domain

A Sphinx domain is a specialized container that ties together roles, directives, and indices, among other things. Let's look at the domain we're creating here.

```

1  class RecipeDomain(Domain):
2      name = 'recipe'
3      label = 'Recipe Sample'
4      roles = {
5          'ref': XRefRole(),
6      }
7      directives = {

```

(continues on next page)

(continued from previous page)

```

8         'recipe': RecipeDirective,
9     }
10    indices = {
11        RecipeIndex,
12        IngredientIndex,
13    }
14    initial_data = {
15        'recipes': [], # object list
16        'recipe_ingredients': {}, # name -> object
17    }
18    data_version = 0
19
20    def get_full_qualified_name(self, node):
21        return f'recipe.{node.arguments[0]}'
22
23    def get_objects(self):
24        yield from self.data['recipes']
25
26    def resolve_xref(self, env, fromdocname, builder, typ, target, node, contnode):
27        match = [
28            (docname, anchor)
29            for name, sig, typ, docname, anchor, prio in self.get_objects()
30            if sig == target
31        ]
32
33        if len(match) > 0:
34            todocname = match[0][0]
35            targ = match[0][1]
36
37            return make_refnode(builder, fromdocname, todocname, targ, contnode, targ)
38        else:
39            print('Awww, found nothing')
40            return None
41
42    def add_recipe(self, signature, ingredients):
43        """Add a new recipe to the domain."""
44        name = f'recipe.{signature}'
45        anchor = f'recipe-{signature}'
46
47        self.data['recipe_ingredients'][name] = ingredients
48        # name, dispname, type, docname, anchor, priority
49        self.data['recipes'].append((name, signature, 'Recipe', self.env.docname, anchor,
50    ↪ 0))

```

There are some interesting things to note about this recipe domain and domains in general. Firstly, we actually register our directives, roles and indices here, via the `directives`, `roles` and `indices` attributes, rather than via calls later on in setup. We can also note that we aren't actually defining a custom role and are instead reusing the `sphinx.roles.XRefRole` role and defining the `sphinx.domains.Domain.resolve_xref` method. This method takes two arguments, `typ` and `target`, which refer to the cross-reference type and its target name. We'll use `target` to resolve our destination from our domain's recipes because we currently have only one type of node.

Moving on, we can see that we've defined `initial_data`. The values defined in `initial_data` will be copied to `env.domaindata[domain_name]` as the initial data of the domain, and domain instances can access it via `self.data`. We

see that we have defined two items in `initial_data`: `recipes` and `recipe_ingredients`. Each contains a list of all objects defined (i.e. all recipes) and a hash that maps a canonical ingredient name to the list of objects. The way we name objects is common across our extension and is defined in the `get_full_qualified_name` method. For each object created, the canonical name is `recipe.<recipename>`, where `<recipename>` is the name the documentation writer gives the object (a recipe). This enables the extension to use different object types that share the same name. Having a canonical name and central place for our objects is a huge advantage. Both our indices and our cross-referencing code use this feature.

The setup function

As always, the `setup` function is a requirement and is used to hook the various parts of our extension into Sphinx. Let's look at the `setup` function for this extension.

```

1 def setup(app: Sphinx) -> ExtensionMetadata:
2     app.add_domain(RecipeDomain)
3
4     return {
5         'version': '0.1',
6         'parallel_read_safe': True,
7         'parallel_write_safe': True,
8     }
```

This looks a little different to what we're used to seeing. There are no calls to `add_directive()` or even `add_role()`. Instead, we have a single call to `add_domain()` followed by some initialization of the *standard domain*. This is because we had already registered our directives, roles and indexes as part of the directive itself.

Using the extension

You can now use the extension throughout your project. For example:

Listing 4: index.rst

Joe's Recipes

Below are a collection of my favourite recipes. I highly recommend the `:recipe:ref:`TomatoSoup`` recipe in particular!

```

.. toctree::
    tomato-soup
```

Listing 5: tomato-soup.rst

The recipe contains ``tomato`` and ``cilantro``.

```

.. recipe:recipe:: TomatoSoup
   :contains: tomato, cilantro, salt, pepper
```

This recipe is a tasty tomato soup, combine all ingredients and cook.

The important things to note are the use of the `:recipe:ref:` role to cross-reference the recipe actually defined elsewhere (using the `:recipe:recipe:` directive).

Further reading

For more information, refer to the [docutils⁴⁰⁰](#) documentation and *Sphinx Extensions API*.

Developing autodoc extension for IntEnum

The objective of this tutorial is to create an extension that adds support for new type for autodoc. This autodoc extension will format the `IntEnum` class from Python standard library. (module `enum`)

Overview

We want the extension that will create auto-documentation for `IntEnum`. `IntEnum` is the integer enum class from standard library `enum` module.

Currently this class has no special auto documentation behavior.

We want to add following to autodoc:

- A new `autointenum` directive that will document the `IntEnum` class.
- The generated documentation will have all the enum possible values with names.
- The `autointenum` directive will have an option `:hex:` which will cause the integers be printed in hexadecimal form.

Prerequisites

We need the same setup as in *the previous extensions*. This time, we will be putting out extension in a file called `autodoc_intenum.py`. The `my_enums.py` will contain the sample enums we will document.

Here is an example of the folder structure you might obtain:

```
├── source
│   ├── _ext
│   │   └── autodoc_intenum.py
│   ├── conf.py
│   ├── index.rst
│   └── my_enums.py
```

Writing the extension

Start with `setup` function for the extension.

```
1 def setup(app: Sphinx) -> ExtensionMetadata:
2     app.setup_extension('sphinx.ext.autodoc') # Require autodoc extension
3     app.add_autodocumenter(IntEnumDocumenter)
4     return {
5         'version': '1',
```

(continues on next page)

⁴⁰⁰ <https://docutils.sourceforge.io/docs/>

(continued from previous page)

```

6     'parallel_read_safe': True,
7 }

```

The `setup_extension()` method will pull the autodoc extension because our new extension depends on autodoc. `add_autodocumenter()` is the method that registers our new auto documenter class.

We want to import certain objects from the autodoc extension:

```

1 from __future__ import annotations
2
3 from enum import IntEnum
4 from typing import TYPE_CHECKING, Any
5
6 from sphinx.ext.autodoc import ClassDocumenter, bool_option
7

```

There are several different documenter classes such as `MethodDocumenter` or `AttributeDocumenter` available in the autodoc extension but our new class is the subclass of `ClassDocumenter` which a documenter class used by autodoc to document classes.

This is the definition of our new the auto-documenter class:

```

1 class IntEnumDocumenter(ClassDocumenter):
2     objtype = 'intenum'
3     directivetype = ClassDocumenter.objtype
4     priority = 10 + ClassDocumenter.priority
5     option_spec = dict(ClassDocumenter.option_spec)
6     option_spec['hex'] = bool_option
7
8     @classmethod
9     def can_document_member(
10         cls, member: Any, membername: str, isattr: bool, parent: Any
11     ) -> bool:
12         try:
13             return issubclass(member, IntEnum)
14         except TypeError:
15             return False
16
17     def add_directive_header(self, sig: str) -> None:
18         super().add_directive_header(sig)
19         self.add_line('    :final:', self.get_sourcename())
20
21     def add_content(
22         self,
23         more_content: StringList | None,
24         no_docstring: bool = False,
25     ) -> None:
26         super().add_content(more_content, no_docstring)
27
28         source_name = self.get_sourcename()
29         enum_object: IntEnum = self.object
30         use_hex = self.options.hex
31         self.add_line('', source_name)

```

(continues on next page)

(continued from previous page)

```

32
33     for the_member_name, enum_member in enum_object.__members__.items():
34         the_member_value = enum_member.value
35         if use_hex:
36             the_member_value = hex(the_member_value)
37
38         self.add_line(f'**{the_member_name}**: {the_member_value}', source_name)
39         self.add_line(' ', source_name)

```

Important attributes of the new class:

objtype

This attribute determines the auto directive name. In this case the auto directive will be `autointenum`.

directivetype

This attribute sets the generated directive name. In this example the generated directive will be `..:py:class::`.

priority

the larger the number the higher is the priority. We want our documenter be higher priority than the parent.

option_spec

option specifications. We copy the parent class options and add a new option `hex`.

Overridden members:

can_document_member

This member is important to override. It should return `True` when the passed object can be documented by this class.

add_directive_header

This method generates the directive header. We add `:final:` directive option. Remember to call `super` or no directive will be generated.

add_content

This method generates the body of the class documentation. After calling the super method we generate lines for enum description.

Using the extension

You can now use the new autodoc directive to document any `IntEnum`.

For example, you have the following `IntEnum`:

Listing 6: `my_enums.py`

```

class Colors(IntEnum):
    """Colors enumerator"""
    NONE = 0
    RED = 1
    GREEN = 2
    BLUE = 3

```

This will be the documentation file with auto-documentation directive:

Listing 7: index.rst

```
.. autointenum:: my_enums.Colors
```

5.3 Configuring builders

Discover builders by entry point

Added in version 1.6.

builder extensions can be discovered by means of [entry points](#)⁴⁰¹ so that they do not have to be listed in the *extensions* configuration value.

Builder extensions should define an entry point in the "sphinx.builders" group. The name of the entry point needs to match your builder's *name* attribute, which is the name passed to the *sphinx-build -b* option. The entry point value should equal the dotted name of the extension module. Here is an example of how an entry point for 'mybuilder' can be defined in the extension's `pyproject.toml`

```
[project.entry-points."sphinx.builders"]
mybuilder = "my.extension.module"
```

Note that it is still necessary to register the builder using *add_builder()* in the extension's *setup()* function.

5.4 Templating

Sphinx uses the [Jinja](#)⁴⁰² templating engine for its HTML templates. Jinja is a text-based engine, inspired by Django templates, so anyone having used Django will already be familiar with it. It also has excellent documentation for those who need to make themselves familiar with it.

Do I need to use Sphinx's templates to produce HTML?

No. You have several other options:

- You can write a *TemplateBridge* subclass that calls your template engine of choice, and set the *template_bridge* configuration value accordingly.
- You can *write a custom builder* that derives from *StandaloneHTMLBuilder* and calls your template engine of choice.
- You can use the *PickleHTMLBuilder* that produces pickle files with the page contents, and postprocess them using a custom tool, or use them in your Web application.

⁴⁰¹ https://setuptools.pypa.io/en/latest/userguide/entry_point.html

⁴⁰² <https://jinja.palletsprojects.com/>

Jinja/Sphinx Templating Primer

The default templating language in Sphinx is Jinja. It's Django/Smarty inspired and easy to understand. The most important concept in Jinja is *template inheritance*, which means that you can overwrite only specific blocks within a template, customizing it while also keeping the changes at a minimum.

To customize the output of your documentation you can override all the templates (both the layout templates and the child templates) by adding files with the same name as the original filename into the template directory of the structure the Sphinx quickstart generated for you.

Sphinx will look for templates in the folders of `templates_path` first, and if it can't find the template it's looking for there, it falls back to the selected theme's templates.

A template contains **variables**, which are replaced with values when the template is evaluated, **tags**, which control the logic of the template and **blocks** which are used for template inheritance.

Sphinx's *basic* theme provides base templates with a couple of blocks it will fill with data. These are located in the `themes/basic` subdirectory of the Sphinx installation directory, and used by all builtin Sphinx themes. Templates with the same name in the `templates_path` override templates supplied by the selected theme.

For example, to add a new link to the template area containing related links all you have to do is to add a new template called `layout.html` with the following contents:

```
{% extends "!layout.html" %}
{% block rootrellink %}
    <li><a href="https://project.invalid/">Project Homepage</a> &raquo;</li>
    {{ super() }}
{% endblock %}
```

By prefixing the name of the overridden template with an exclamation mark, Sphinx will load the layout template from the underlying HTML theme.

Important: If you override a block, call `{{ super() }}` somewhere to render the block's original content in the extended template – unless you don't want that content to show up.

Working with the builtin templates

The builtin **basic** theme supplies the templates that all builtin Sphinx themes are based on. It has the following elements you can override or use:

Blocks

The following blocks exist in the `layout.html` template:

doctype

The doctype of the output format. By default this is XHTML 1.0 Transitional as this is the closest to what Sphinx and Docutils generate and it's a good idea not to change it unless you want to switch to HTML 5 or a different but compatible XHTML doctype.

linktags

This block adds a couple of `<link>` tags to the head section of the template.

extrahead

This block is empty by default and can be used to add extra contents into the `<head>` tag of the generated HTML file. This is the right place to add references to JavaScript or extra CSS files.

relbar1, relbar2

This block contains the *relation bar*, the list of related links (the parent documents on the left, and the links to index, modules etc. on the right). `relbar1` appears before the document, `relbar2` after the document. By default, both blocks are filled; to show the relbar only before the document, you would override `relbar2` like this:

```
{% block relbar2 %}{% endblock %}
```

rootrellink, relbaritems

Inside the relbar there are three sections: The `rootrellink`, the links from the documentation and the custom `relbaritems`. The `rootrellink` is a block that by default contains a list item pointing to the root document by default, the `relbaritems` is an empty block. If you override them to add extra links into the bar make sure that they are list items and end with the `reldelim1`.

document

The contents of the document itself. It contains the block “body” where the individual content is put by subtemplates like `page.html`.

Note: In order for the built-in JavaScript search to show a page preview on the results page, the document or body content should be wrapped in an HTML element containing the `role="main"` attribute. For example:

```
<div role="main">
  {% block document %}{% endblock %}
</div>
```

sidebar1, sidebar2

A possible location for a sidebar. `sidebar1` appears before the document and is empty by default, `sidebar2` after the document and contains the default sidebar. If you want to swap the sidebar location override this and call the sidebar helper:

```
{% block sidebar1 %}{{ sidebar() }}{% endblock %}
{% block sidebar2 %}{% endblock %}
```

(The `sidebar2` location for the sidebar is needed by the `sphinxdoc.css` stylesheet, for example.)

sidebarlogo

The logo location within the sidebar. Override this if you want to place some content at the top of the sidebar.

footer

The block for the footer div. If you want a custom footer or markup before or after it, override this one.

The following four blocks are *only* used for pages that do not have assigned a list of custom sidebars in the `html_sidebars` config value. Their use is deprecated in favor of separate sidebar templates, which can be included via `html_sidebars`.

sidebartoc

The table of contents within the sidebar.

Deprecated since version 1.0.

sidebarrel

The relation links (previous, next document) within the sidebar.

Deprecated since version 1.0.

sidebarsourcelink

The “Show source” link within the sidebar (normally only shown if this is enabled by `html_show_sourcelink`).

Deprecated since version 1.0.

sidebarsearch

The search box within the sidebar. Override this if you want to place some content at the bottom of the sidebar.

Deprecated since version 1.0.

Configuration Variables

Inside templates you can set a couple of variables used by the layout template using the `{% set %}` tag:

reldelim1

The delimiter for the items on the left side of the related bar. This defaults to ' »'. Each item in the related bar ends with the value of this variable.

reldelim2

The delimiter for the items on the right side of the related bar. This defaults to ' | '. Each item except of the last one in the related bar ends with the value of this variable.

Overriding works like this:

```
{% extends "!layout.html" %}
{% set reldelim1 = ' &gt;' %}
```

script_files

Add additional script files here, like this:

```
{% set script_files = script_files + ["_static/myscript.js"] %}
```

Deprecated since version 1.8.0: Please use `.Sphinx.add_js_file()` instead.

Helper Functions

Sphinx provides various Jinja functions as helpers in the template. You can use them to generate links or output multiply used elements.

pathto(*document*)

Return the path to a Sphinx document as a URL. Use this to refer to built documents.

pathto(*file*, *l*)

Return the path to a *file* which is a filename relative to the root of the generated output. Use this to refer to static files.

hasdoc(*document*)

Check if a document with the name *document* exists.

sidebar()

Return the rendered sidebar.

relbar()

Return the rendered relation bar.

warning(*message*)

Emit a warning message.

Global Variables

These global variables are available in every template and are safe to use. There are more, but most of them are an implementation detail and might change in the future.

builder

The name of the builder (e.g. `html` or `htmlhelp`).

copyright

The value of `copyright`.

docstitle

The title of the documentation (the value of `html_title`), except when the “single-file” builder is used, when it is set to `None`.

embedded

True if the built HTML is meant to be embedded in some viewing application that handles navigation, not the web browser, such as for HTML help or Qt help formats. In this case, the sidebar is not included.

favicon_url

The relative path to the HTML favicon image from the current document, or URL to the favicon, or `''`.

Added in version 4.0.

file_suffix

The value of the builder’s `out_suffix` attribute, i.e. the file name extension that the output files will get. For a standard HTML builder, this is usually `.html`.

has_source

True if the reST document sources are copied (if `html_copy_source` is `True`).

language

The value of `language`.

last_updated

The build date.

logo_url

The relative path to the HTML logo image from the current document, or URL to the logo, or `''`.

Added in version 4.0.

master_doc

Same as `root_doc`.

Changed in version 4.0: Renamed to `root_doc`.

root_doc

The value of `root_doc`, for usage with `path_to()`.

Changed in version 4.0: Renamed from `master_doc`.

pagename

The “page name” of the current file, i.e. either the document name if the file is generated from a reST source, or the equivalent hierarchical name relative to the output directory (`[directory/]filename_without_extension`).

project

The value of `project`.

release

The value of *release*.

rellinks

A list of links to put at the left side of the relbar, next to “next” and “prev”. This usually contains links to the general index and other indices, such as the Python module index. If you add something yourself, it must be a tuple (pagename, link title, accesskey, link text).

shorttitle

The value of *html_short_title*.

show_source

True if *html_show_sourcelink* is True.

sphinx_version

The version of Sphinx used to build represented as a string for example “3.5.1”.

sphinx_version_tuple

The version of Sphinx used to build represented as a tuple of five elements. For Sphinx version 3.5.1 beta 3 this would be (3, 5, 1, 'beta', 3). The fourth element can be one of: alpha, beta, rc, final. final always has 0 as the last element.

Added in version 4.2.

docutils_version_info

The version of Docutils used to build represented as a tuple of five elements. For Docutils version 0.16.1 beta 2 this would be (0, 16, 1, 'beta', 2). The fourth element can be one of: alpha, beta, candidate, final. final always has 0 as the last element.

Added in version 5.0.2.

styles

A list of the names of the main stylesheets as given by the theme or *html_style*.

Added in version 5.1.

title

The title of the current document, as used in the <title> tag.

use_opensearch

The value of *html_use_opensearch*.

version

The value of *version*.

In addition to these values, there are also all **theme options** available (prefixed by *theme_*), as well as the values given by the user in *html_context*.

In documents that are created from source files (as opposed to automatically-generated files like the module index, or documents that already are in HTML form), these variables are also available:

body

A string containing the content of the page in HTML form as produced by the HTML builder, before the theme is applied.

display_toc

A boolean that is True if the toc contains more than one entry.

meta

Document metadata (a dictionary), see *File-wide metadata*.

metatags

A string containing the page's HTML `meta`⁴⁰³ tags.

next

The next document for the navigation. This variable is either false or has two attributes `link` and `title`. The title contains HTML markup. For example, to generate a link to the next page, you can use this snippet:

```
{% if next %}
<a href="{{ next.link|e }}">{{ next.title }}</a>
{% endif %}
```

page_source_suffix

The suffix of the file that was rendered. Since we support a list of *source_suffix*, this will allow you to properly link to the original source file.

parents

A list of parent documents for navigation, structured like the *next* item.

prev

Like *next*, but for the previous page.

sourcename

The name of the copied source file for the current document. This is only nonempty if the *html_copy_source* value is True. This has empty value on creating automatically-generated files.

toc

The local table of contents for the current page, rendered as HTML bullet lists.

toctree

A callable yielding the global TOC tree containing the current page, rendered as HTML bullet lists. Optional keyword arguments:

collapse

If true, all TOC entries that are not ancestors of the current page are collapsed. True by default.

maxdepth

The maximum depth of the tree. Set it to -1 to allow unlimited depth. Defaults to the max depth selected in the toctree directive.

titles_only

If true, put only top-level document titles in the tree. False by default.

includehidden

If true, the ToC tree will also contain hidden entries. False by default.

⁴⁰³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#meta>

5.5 HTML theme development

Added in version 0.6.

Note: This document provides information about creating your own theme. If you simply wish to use a pre-existing HTML themes, refer to *HTML Theming*.

Sphinx supports changing the appearance of its HTML output via *themes*. A theme is a collection of HTML templates, stylesheet(s) and other static files. Additionally, it has a configuration file which specifies from which theme to inherit, which highlighting style to use, and what options exist for customizing the theme's look and feel.

Themes are meant to be project-unaware, so they can be used for different projects without change.

Note: See *Sphinx Extensions API* for more information that may be helpful in developing themes.

Creating themes

Themes take the form of either a directory or a zipfile (whose name is the theme name), containing the following:

- Either a `theme.toml` file (preferred) or a `theme.conf` file.
- HTML templates, if needed.
- A `static/` directory containing any static files that will be copied to the output static directory on build. These can be images, styles, script files.

Theme configuration (`theme.toml`)

The `theme.toml` file is a [TOML](https://toml.io/en/)⁴⁰⁴ document, containing two tables: `[theme]` and `[options]`.

The `[theme]` table defines the theme's settings:

- **inherit** (string): The name of the base theme from which to inherit settings, options, templates, and static files. All static files from theme 'ancestors' will be used. The theme will use all options defined in inherited themes. Finally, inherited themes will be used to locate missing templates (for example, if "basic" is used as the base theme, most templates will already be defined).

If set to "none", the theme will not inherit from any other theme. Inheritance is recursive, forming a chain of inherited themes (e.g. `default -> classic -> basic -> none`).

- **stylesheets** (list of strings): A list of CSS filenames which will be included in generated HTML header. Setting the `html_style` config value will override this setting.

Other mechanisms for including multiple stylesheets include `@import` in CSS or using a custom HTML template with appropriate `<link rel="stylesheet">` tags.

- **sidebars** (list of strings): A list of sidebar templates. This can be overridden by the user via the `html_sidebars` config value.
- **pygments_style** (table): A TOML table defining the names of Pygments styles to use for highlighting syntax. The table has two recognised keys: `default` and `dark`. The style defined in the `dark` key will be used when the CSS media query (`prefers-color-scheme: dark`) evaluates to true.

`[theme.pygments_style.default]` can be overridden by the user via the `pygments_style` config value.

⁴⁰⁴ <https://toml.io/en/>

The `[options]` table defines the options for the theme. It is structured such that each key-value pair corresponds to a variable name and the corresponding default value. These options can be overridden by the user in `html_theme_options` and are accessible from all templates as `theme_<name>`.

Added in version 7.3: `theme.toml` support.

Exemplar `theme.toml` file:

```
[theme]
inherit = "basic"
stylesheets = [
    "main-CSS-stylesheet.css",
]
sidebars = [
    "localtoc.html",
    "relations.html",
    "sourcelink.html",
    "searchbox.html",
]
# Style names from https://pygments.org/styles/
pygments_style = { default = "style_name", dark = "dark_style" }

[options]
variable = "default value"
```

Theme configuration (`theme.conf`)

The `theme.conf` file is in INI format¹ (readable by the standard Python `configparser`⁴⁰⁵ module) and has the following structure:

```
[theme]
inherit = base theme
stylesheet = main CSS name
pygments_style = stylename
sidebars = localtoc.html, relations.html, sourcelink.html, searchbox.html

[options]
variable = default value
```

- The **inherit** setting gives the name of a “base theme”, or `none`. The base theme will be used to locate missing templates (most themes will not have to supply most templates if they use `basic` as the base theme), its options will be inherited, and all of its static files will be used as well. If you want to also inherit the stylesheet, include it via CSS’ `@import` in your own.
- The **stylesheet** setting gives a list of CSS filenames separated commas which will be referenced in the HTML header. You can also use CSS’ `@import` technique to include one from the other, or use a custom HTML template that adds `<link rel="stylesheet">` tags as necessary. Setting the `html_style` config value will override this setting.
- The **pygments_style** setting gives the name of a Pygments style to use for highlighting. This can be overridden by the user in the `pygments_style` config value.

¹ It is not an executable Python file, as opposed to `conf.py`, because that would pose an unnecessary security risk if themes are shared.

⁴⁰⁵ <https://docs.python.org/3/library/configparser.html#module-configparser>

- The `pygments_dark_style` setting gives the name of a Pygments style to use for highlighting when the CSS media query (`prefers-color-scheme: dark`) evaluates to true. It is injected into the page using `add_css_file()`.
- The `sidebars` setting gives the comma separated list of sidebar templates for constructing sidebars. This can be overridden by the user in the `html_sidebars` config value.
- The `options` section contains pairs of variable names and default values. These options can be overridden by the user in `html_theme_options` and are accessible from all templates as `theme_<name>`.

Added in version 1.7: sidebar settings

Changed in version 5.1: The stylesheet setting accepts multiple CSS filenames

Convert `theme.conf` to `theme.toml`

INI-style theme configuration files (`theme.conf`) can be converted to TOML via a helper programme distributed with Sphinx. This is intended for one-time use, and may be removed without notice in a future version of Sphinx.

```
$ python -m sphinx.theming conf_to_toml [THEME DIRECTORY PATH]
```

The required argument is a path to a directory containing a `theme.conf` file. The programme will write a `theme.toml` file in the same directory, and will not modify the original `theme.conf` file.

Added in version 7.3.

Distribute your theme as a Python package

As a way to distribute your theme, you can use a Python package. This makes it easier for users to set up your theme.

To distribute your theme as a Python package, please define an entry point called `sphinx.html_themes` in your `pyproject.toml` file, and write a `setup()` function to register your theme using the `add_html_theme()` API:

```
# pyproject.toml

[project.entry-points."sphinx.html_themes"]
name_of_theme = "your_theme_package"
```

```
# your_theme_package.py
from os import path

def setup(app):
    app.add_html_theme('name_of_theme', path.abspath(path.dirname(__file__)))
```

If your theme package contains two or more themes, please call `add_html_theme()` twice or more.

Added in version 1.2: ‘`sphinx_themes`’ entry_points feature.

Deprecated since version 1.6: `sphinx_themes` entry_points has been deprecated.

Added in version 1.6: `sphinx.html_themes` entry_points feature.

Templating

The *guide to templating* is helpful if you want to write your own templates. What is important to keep in mind is the order in which Sphinx searches for templates:

- First, in the user’s `templates_path` directories.
- Then, in the selected theme.
- Then, in its base theme, its base’s base theme, etc.

When extending a template in the base theme with the same name, use the theme name as an explicit directory: `{% extends "basic/layout.html" %}`. From a user `templates_path` template, you can still use the “exclamation mark” syntax as *described in the templating document*.

Static templates

Since theme options are meant for the user to configure a theme more easily, without having to write a custom stylesheet, it is necessary to be able to template static files as well as HTML files. Therefore, Sphinx supports so-called “static templates”, like this:

If the name of a file in the `static/` directory of a theme (or in the user’s static path) ends with `.jinja` or `_t`, it will be processed by the template engine. The suffix will be removed from the final file name.

For example, a theme with a `static/theme_styles.css.jinja` file could use templating to put options into the stylesheet. When a documentation project is built with that theme, the output directory will contain a `_static/theme_styles.css` file where all template tags have been processed.

Changed in version 7.4:

The preferred suffix for static templates is now `.jinja`, in line with the Jinja project’s [recommended file extension](#)⁴⁰⁶.

The `_t` file suffix for static templates is now considered ‘legacy’, and support may eventually be removed.

If a static template with either a `_t` suffix or a `.jinja` suffix is detected, it will be processed by the template engine, with the suffix removed from the final file name.

Use custom page metadata in HTML templates

Any key / value pairs in *field lists* that are placed *before* the page’s title will be available to the Jinja template when building the page within the *meta* attribute. For example, if a page had the following text before its first title:

```
:mykey: My value
```

```
My first title
```

Then it could be accessed within a Jinja template like so:

```
{%- if meta is mapping %}
    {{ meta.get("mykey") }}
{%- endif %}
```

Note the check that `meta` is a dictionary (“mapping” in Jinja terminology) to ensure that using it in this way is valid.

⁴⁰⁶ <https://jinja.palletsprojects.com/en/latest/templates/#template-file-extension>

Defining custom template functions

Sometimes it is useful to define your own function in Python that you wish to then use in a template. For example, if you'd like to insert a template value with logic that depends on the user's configuration in the project, or if you'd like to include non-trivial checks and provide friendly error messages for incorrect configuration in the template.

To define your own template function, you'll need to define two functions inside your module:

- A **page context event handler** (or **registration**) function. This is connected to the *Sphinx* application via an event callback.
- A **template function** that you will use in your Jinja template.

First, define the registration function, which accepts the arguments for *html-page-context*.

Within the registration function, define the template function that you'd like to use within Jinja. The template function should return a string or Python objects (lists, dictionaries) with strings inside that Jinja uses in the templating process

Note: The template function will have access to all of the variables that are passed to the registration function.

At the end of the registration function, add the template function to the Sphinx application's context with `context['template_func'] = template_func`.

Finally, in your extension's `setup()` function, add your registration function as a callback for *html-page-context*.

```
# The registration function
def setup_my_func(app, pagename, templatename, context, doctree):
    # The template function
    def my_func(mystring):
        return "Your string is %s" % mystring
    # Add it to the page's context
    context['my_func'] = my_func

# Your extension's setup function
def setup(app):
    app.connect("html-page-context", setup_my_func)
```

Now, you will have access to this function in Jinja like so:

```
<div>
{{ my_func("some string") }}
</div>
```

Add your own static files to the build assets

By default, Sphinx copies static files on the `static/` directory of the template directory. However, if your package needs to place static files outside of the `static/` directory for some reasons, you need to copy them to the `_static/` directory of HTML outputs manually at the build via an event hook. Here is an example of code to accomplish this:

```
from os import path
from sphinx.util.fileutil import copy_asset_file

def copy_custom_files(app, exc):
    if app.builder.format == 'html' and not exc:
        staticdir = path.join(app.builder.outdir, '_static')
```

(continues on next page)

(continued from previous page)

```

copy_asset_file('path/to/myextension/_static/myjsfile.js', staticdir)

def setup(app):
    app.connect('build-finished', copy_custom_files)

```

Inject JavaScript based on user configuration

If your extension makes use of JavaScript, it can be useful to allow users to control its behavior using their Sphinx configuration. However, this can be difficult to do if your JavaScript comes in the form of a static library (which will not be built with Jinja).

There are two ways to inject variables into the JavaScript space based on user configuration.

First, you may append `_t` to the end of any static files included with your extension. This will cause Sphinx to process these files with the templating engine, allowing you to embed variables and control behavior.

For example, the following JavaScript structure:

```

mymodule/
├── _static
│   └── myjsfile.js_t
└── mymodule.py

```

Will result in the following static file placed in your HTML's build output:

```

_build/
├── html
│   └── _static
│       └── myjsfile.js

```

See *Static templates* for more information.

Second, you may use the `Sphinx.add_js_file()` method without pointing it to a file. Normally, this method is used to insert a new JavaScript file into your site. However, if you do *not* pass a file path, but instead pass a string to the “body” argument, then this text will be inserted as JavaScript into your site's head. This allows you to insert variables into your project's JavaScript from Python.

For example, the following code will read in a user-configured value and then insert this value as a JavaScript variable, which your extension's JavaScript code may use:

```

# This function reads in a variable and inserts it into JavaScript
def add_js_variable(app):
    # This is a configuration that you've specified for users in `conf.py`
    js_variable = app.config['my_javascript_variable']
    js_text = "var my_variable = '%s';" % js_variable
    app.add_js_file(None, body=js_text)
# We connect this function to the step after the builder is initialized
def setup(app):
    # Tell Sphinx about this configuration variable
    app.add_config_value('my_javascript_variable', 0, 'html')
    # Run the function after the builder is initialized
    app.connect('builder-inited', add_js_variable)

```

As a result, in your theme you can use code that depends on the presence of this variable. Users can control the variable's value by defining it in their `conf.py` file.

LATEX CUSTOMIZATION

Unlike *the HTML builders*, the `latex` builder does not benefit from prepared themes. The *Options for LaTeX output*, and particularly the `latex_elements` variable, provides much of the interface for customization. For example:

```
# inside conf.py
latex_engine = 'xelatex'
latex_elements = {
    'fontpkg': r'''
\setmainfont{DejaVu Serif}
\setsansfont{DejaVu Sans}
\setmonofont{DejaVu Sans Mono}
''',
    'preamble': r'''
\usepackage[titles]{tocloft}
\cftsetpnumwidth {1.25cm}\cftsetrmarg{1.5cm}
\setlength{\cftchapnumwidth}{0.75cm}
\setlength{\cftsecindent}{\cftchapnumwidth}
\setlength{\cftsecnumwidth}{1.25cm}
''',
    'fncychap': r'\usepackage[Bjornstrup]{fncychap}',
    'printindex': r'\footnotesize\raggedright\printindex',
}
latex_show_urls = 'footnote'
```

Note: Keep in mind that backslashes must be doubled in Python string literals to avoid interpretation as escape sequences. Alternatively, you may use raw strings as is done above.

6.1 The `latex_elements` configuration setting

A dictionary that contains LaTeX snippets overriding those Sphinx usually puts into the generated `.tex` files. Its `'sphinxsetup'` key is described *separately*. It allows also local configurations inserted in generated files, via `raw`⁴⁰⁷ directives. For example, in the PDF documentation this chapter is styled especially, as will be described later.

Keys that you may want to override include:

'papersize'

Paper size option of the document class ('a4paper' or 'letterpaper')

⁴⁰⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#raw>

Default: 'letterpaper'

'pointsize'

Point size option of the document class ('10pt', '11pt' or '12pt')

Default: '10pt'

'pxunit'

The value of the `px` when used in image attributes `width` and `height`. The default value is '0.75bp' which achieves `96px=1in` (in TeX `1in = 72bp = 72.27pt`.) To obtain for example `100px=1in` use '0.01in' or '0.7227pt' (the latter leads to TeX computing a more precise value, due to the smaller unit used in the specification); for `72px=1in`, simply use '1bp'; for `90px=1in`, use '0.8bp' or '0.803pt'.

Default: '0.75bp'

Added in version 1.5.

'passoptionstopackages'

A string which will be positioned early in the preamble, designed to contain `\PassOptionsToPackage{options}{foo}` commands.

Hint: It may be also used for loading LaTeX packages very early in the preamble. For example package `fancybox` is incompatible with being loaded via the 'preamble' key, it must be loaded earlier.

Default: ''

Added in version 1.4.

'babel'

"babel" package inclusion, default `'\usepackage{babel}'` (the suitable document language string is passed as class option, and `english` is used if no language.) For Japanese documents, the default is the empty string.

With XeLaTeX and LuaLaTeX, Sphinx configures the LaTeX document to use `polyglossia`⁴⁰⁸, but one should be aware that current `babel`⁴⁰⁹ has improved its support for Unicode engines in recent years and for some languages it may make sense to prefer `babel` over `polyglossia`.

Hint: After modifying a core LaTeX key like this one, clean up the LaTeX build repertory before next PDF build, else left-over auxiliary files are likely to break the build.

Default: `'\usepackage{babel}'` ('' for Japanese documents)

Changed in version 1.5: For `latex_engine` set to 'xelatex', the default is `'\usepackage{polyglossia}\n\setmainlanguage{<language>}'`.

Changed in version 1.6: 'lualatex' uses same default setting as 'xelatex'

Changed in version 1.7.6: For French, `xelatex` and `lualatex` default to using `babel`, not `polyglossia`.

'fontpkg'

Font package inclusion. The default is:

```
r"""\usepackage{tgtermes}
\usepackage{tgheros}
\renewcommand\ttdefault{txtt}
"""
```

⁴⁰⁸ <https://ctan.org/pkg/polyglossia>

⁴⁰⁹ <https://ctan.org/pkg/babel>

For 'xelatex' and 'lualatex' however the default is to use the GNU FreeFont.

Changed in version 1.2: Defaults to '' when the *language* uses the Cyrillic script.

Changed in version 2.0: Incorporates some font substitution commands to help support occasional Greek or Cyrillic in a document using 'pdflatex' engine.

Changed in version 4.0.0:

- The font substitution commands added at 2.0 have been moved to the 'fontsubstitution' key, as their presence here made it complicated for user to customize the value of 'fontpkg'.
- The default font setting has changed: it still uses Times and Helvetica clones for serif and sans serif, but via better, more complete TeX fonts and associated LaTeX packages. The monospace font has been changed to better match the Times clone.

'fncychap'

Inclusion of the “fncychap” package (which makes fancy chapter titles), default '\\usepackage[Bjarne]{fncychap}' for English documentation (this option is slightly customized by Sphinx), '\\usepackage[Sonny]{fncychap}' for internationalized docs (because the “Bjarne” style uses numbers spelled out in English). Other “fncychap” styles you can try are “Lenny”, “Glenn”, “Conny”, “Rejne” and “Bjornstrup”. You can also set this to '' to disable fncychap.

Default: '\\usepackage[Bjarne]{fncychap}' for English documents, '\\usepackage[Sonny]{fncychap}' for internationalized documents, and '' for Japanese documents.

'preamble'

Additional preamble content. One may move all needed macros into some file `mystyle.tex.txt` of the project source repository, and get LaTeX to import it at run time:

```
'preamble': r'\input{mystyle.tex.txt}',
# or, if the \ProvidesPackage LaTeX macro is used in a file mystyle.sty
'preamble': r'\usepackage{mystyle}',
```

It is then needed to set appropriately *latex_additional_files*, for example:

```
latex_additional_files = ["mystyle.sty"]
```

Do not use .tex as suffix, else the file is submitted itself to the PDF build process, use .tex.txt or .sty as in the examples above.

Default: ''

'figure_align'

Latex figure float alignment. Whenever an image doesn't fit into the current page, it will be 'floated' into the next page but may be preceded by any other text. If you don't like this behavior, use 'H' which will disable floating and position figures strictly in the order they appear in the source.

Default: 'htbp' (here, top, bottom, page)

Added in version 1.3.

'atendofbody'

Additional document content (right before the indices).

Default: ''

Added in version 1.5.

'extrapackages'

Additional LaTeX packages. For example:

```
latex_elements = {  
    'extrapackages': r'\usepackage{isodate}'  
}
```

The specified LaTeX packages will be loaded before hyperref package and packages loaded from Sphinx extensions.

Hint: If you'd like to load additional LaTeX packages after hyperref, use 'preamble' key instead.

Default: ''

Added in version 2.3.

'footer'

Additional footer content (before the indices).

Default: ''

Deprecated since version 1.5: Use 'atendofbody' key instead.

Keys that don't need to be overridden unless in special cases are:

'extraclassoptions'

The default is the empty string. Example: 'extraclassoptions': 'openany' will allow chapters (for documents of the 'manual' type) to start on any page.

Default: ''

Added in version 1.2.

Changed in version 1.6: Added this documentation.

'maxlistdepth'

LaTeX allows by default at most 6 levels for nesting list and quote-like environments, with at most 4 enumerated lists, and 4 bullet lists. Setting this key for example to '10' (as a string) will allow up to 10 nested levels (of all sorts). Leaving it to the empty string means to obey the LaTeX default.

Warning:

- Using this key may prove incompatible with some LaTeX packages or special document classes which do their own list customization.
- The key setting is silently *ignored* if `\usepackage{enumitem}` is executed inside the document preamble. Use then rather the dedicated commands of this LaTeX package.

Default: 6

Added in version 1.5.

'inputenc'

"inputenc" package inclusion.

Default: `'\usepackage[utf8]{inputenc}'` when using pdflatex, else ''.

Note: If using `utf8x` in place of `utf8` it is mandatory to extend the LaTeX preamble with suitable `\PreloadUnicodePage{<number>}` commands, as per the `utf8x` documentation (texdoc ucs on a TeXLive based TeX installation). Else, unexpected and possibly hard-to-spot problems (i.e. not causing a build crash) may arise in the PDF, in particular regarding hyperlinks.

Even if these precautions are taken, PDF build via `pdflatex` engine may crash due to upstream LaTeX not being fully compatible with `utf8x`. For example, in certain circumstances related to code-blocks, or attempting to include images whose filenames contain Unicode characters. Indeed, starting in 2015, upstream LaTeX with `pdflatex` engine has somewhat enhanced native support for Unicode and is becoming more and more incompatible with `utf8x`. In particular, since the October 2019 LaTeX release, filenames can use Unicode characters, and even spaces. At Sphinx level this means e.g. that the `image`⁴¹⁰ and `figure`⁴¹¹ directives are now compatible with such filenames for PDF via LaTeX output. But this is broken if `utf8x` is in use.

Changed in version 1.4.3: Previously `'\\usepackage[utf8]{inputenc}'` was used for all compilers.

'cmappkg'

“cmap” package inclusion.

Default: `'\\usepackage{cmap}'`

Added in version 1.2.

'fontenc'

Customize this from its default `'\\usepackage[T1]{fontenc}'` to:

- `'\\usepackage[X2,T1]{fontenc}'` if you need occasional Cyrillic letters (физика частиц),
- `'\\usepackage[LGR,T1]{fontenc}'` if you need occasional Greek letters (Σωματιδιακή φυσική).

Use `[LGR,X2,T1]` rather if both are needed.

Attention:

- Do not use this key for a `latex_engine` other than `'pdflatex'`.
- If Greek is main language, do not use this key. Since Sphinx 2.2.1, `xelatex` will be used automatically as `latex_engine`.
- The TeX installation may need some extra packages. For example, on Ubuntu xenial, packages `texlive-lang-greek` and `cm-super` are needed for LGR to work. And `texlive-lang-cyrillic` and `cm-super` are needed for support of Cyrillic.

Changed in version 1.5: Defaults to `'\\usepackage{fontspec}'` when `latex_engine` is `'xelatex'`.

Changed in version 1.6: `'lualatex'` uses `fontspec` per default like `'xelatex'`.

Changed in version 2.0: `'lualatex'` executes `\defaultfontfeatures[\rmfamily,\sffamily]{}` to disable TeX ligatures transforming `<<` and `>>` as escaping working with `pdflatex/xelatex` failed with `lualatex`.

Changed in version 2.0: Detection of LGR, T2A, X2 to trigger support of occasional Greek or Cyrillic letters (`'pdflatex'`).

Changed in version 2.3.0: `'xelatex'` executes `\defaultfontfeatures[\rmfamily,\sffamily]{}` in order to avoid contractions of `--` into en-dash or transforms of straight quotes into curly ones in PDF (in non-literal text paragraphs) despite `smartquotes` being set to `False`.

⁴¹⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#image>

⁴¹¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#figure>

'fontsubstitution'

Ignored if 'fontenc' was not configured to use LGR or X2 (or T2A). In case 'fontpkg' key is configured for usage with some TeX fonts known to be available in the LGR or X2 encodings, set this one to be the empty string. Else leave to its default.

Ignored with *latex_engine* other than 'pdflatex'.

Added in version 4.0.0.

'textgreek'

For the support of occasional Greek letters.

It is ignored with 'platex', 'xelatex' or 'lualatex' as *latex_engine* and defaults to either the empty string or to `'\usepackage{textalpha}'` for 'pdflatex' depending on whether the 'fontenc' key was used with LGR or not. Only expert LaTeX users may want to customize this key.

It can also be used as `r'\usepackage{textalpha,alphabeta}'` to let 'pdflatex' support Greek Unicode input in *math* context. For example `:math:`\alpha` (U+03B1)` will render as α .

Default: `'\usepackage{textalpha}'` or '' if fontenc does not include the LGR option.

Added in version 2.0.

'geometry'

“geometry” package inclusion, the default definition is:

```
'\usepackage{geometry}'
```

with an additional [dvipdfm] for Japanese documents. The Sphinx LaTeX style file executes:

```
\PassOptionsToPackage{hmargin=1in,vmargin=1in,marginpar=0.5in}{geometry}
```

which can be customized via corresponding *'sphinxsetup' options*.

Default: `'\usepackage{geometry}'` (or `'\usepackage[dvipdfm]{geometry}'` for Japanese documents)

Added in version 1.5.

Changed in version 1.5.2: dvipdfm option if *latex_engine* is 'platex'.

Added in version 1.5.3: The *'sphinxsetup' keys for the margins*.

Changed in version 1.5.3: The location in the LaTeX file has been moved to after `\usepackage{sphinx}` and `\sphinxsetup{...}`, hence also after insertion of 'fontpkg' key. This is in order to handle the paper layout options in a special way for Japanese documents: the text width will be set to an integer multiple of the *zenkaku* width, and the text height to an integer multiple of the baseline. See the *hmargin* documentation for more.

'hyperref'

“hyperref” package inclusion; also loads package “hycap” and issues `\urlstyle{same}`. This is done after sphinx.sty file is loaded and before executing the contents of 'preamble' key.

Attention: Loading of packages “hyperref” and “hycap” is mandatory.

Added in version 1.5: Previously this was done from inside sphinx.sty.

'maketitle'

“maketitle” call. Override if you want to generate a differently styled title page.

Hint: If the key value is set to `r'\newcommand\sphinxbackoftitlepage{<Extra material>}\sphinxmaketitle'`, then <Extra material> will be typeset on back of title page ('manual' docclass only).

Default: `'\sphinxmaketitle'`

Changed in version 1.8.3: Original `\maketitle` from document class is not overwritten, hence is reusable as part of some custom setting for this key.

Added in version 1.8.3: `\sphinxbackoftitlepage` optional macro. It can also be defined inside 'preamble' key rather than this one.

'releasename'

Value that prefixes 'release' element on title page. As for *title* and *author* used in the tuples of [latex_documents](#), it is inserted as LaTeX markup.

Default: 'Release'

'tableofcontents'

“tableofcontents” call. The default of `'\sphinxtableofcontents'` is a wrapper of unmodified `\tableofcontents`, which may itself be customized by user loaded packages. Override if you want to generate a different table of contents or put content between the title page and the TOC.

Default: `'\sphinxtableofcontents'`

Changed in version 1.5: Previously the meaning of `\tableofcontents` itself was modified by Sphinx. This created an incompatibility with dedicated packages modifying it also such as “tocloft” or “etoc”.

'transition'

Commands used to display transitions. Override if you want to display transitions differently.

Default: `'\n\n\bigskip\hrule\bigskip\n\n'`

Added in version 1.2.

Changed in version 1.6: Remove unneeded `{}` after `\hrule`.

'makeindex'

“makeindex” call, the last thing before `\begin{document}`. With `'\usepackage[columns=1]{idxlayout}\makeindex'` the index will use only one column. You may have to install `idxlayout` LaTeX package.

Default: `'\makeindex'`

'printindex'

“printindex” call, the last thing in the file. Override if you want to generate the index differently, append some content after the index, or change the font. As LaTeX uses two-column mode for the index it is often advisable to set this key to `'\footnotesize\raggedright\printindex'`. Or, to obtain a one-column index, use `'\def\twocolumn[#1]{#1}\printindex'` (this trick may fail if using a custom document class; then try the `idxlayout` approach described in the documentation of the 'makeindex' key).

Default: `'\printindex'`

'fvset'

Customization of `fancyvrb` LaTeX package.

The default value is `'\fvset{fontsize=auto}'` which means that the font size will adjust correctly if a code-block ends up in a footnote. You may need to modify this if you use custom fonts: `'\fvset{fontsize=\small}'` if the monospace font is Courier-like.

Default: `'\fvset{fontsize=auto}'`

Added in version 1.8.

Changed in version 2.0: For 'xelatex' and 'lualatex' defaults to '`\fvset{fontsize=\small}`' as this is adapted to the relative widths of the FreeFont family.

Changed in version 4.0.0: Changed default for 'pdflatex'. Previously it was using '`\fvset{fontsize=\small}`'.

Changed in version 4.1.0: Changed default for Chinese documents to '`\fvset{fontsize=\small, formatcom=\xeCJKVerbAddon}`'

Keys that are set by other options and therefore should not be overridden are:

'docclass' 'classoptions' 'title' 'release' 'author'

6.2 The sphinxsetup configuration setting

Added in version 1.5.

The 'sphinxsetup' key of *latex_elements* provides a LaTeX-type customization interface:

```
latex_elements = {
    'sphinxsetup': 'key1=value1, key2=value2, ...',
}
```

It defaults to empty. If non-empty, it will be passed as argument to the `\sphinxsetup` macro inside the document preamble, like this:

```
\usepackage{sphinx}
\sphinxsetup{key1=value1, key2=value2,...}
```

The colors used in the above are provided by the `svgnames` option of the “xcolor” package:

```
latex_elements = {
    'passoptionstopackages': r'\PassOptionsToPackage{svgnames}{xcolor}',
}
```

It is possible to insert uses of the `\sphinxsetup` LaTeX macro directly into the body of the document, via the `raw` directive. This chapter is styled in the PDF output using the following insertion at its start. This uses keys described later in *Additional CSS-like 'sphinxsetup' keys*.

```
.. raw:: latex

\begingroup
\sphinxsetup{%
    TitleColor={named}{DarkGoldenrod},
    % pre_border-width is 5.1.0 alias for verbatimborder
    pre_border-width=2pt,
    pre_border-right-width=8pt,
    % pre_padding is a 5.1.0 alias for verbatimsep
    pre_padding=5pt,
    % Rounded boxes are new at 5.1.0
    pre_border-radius=5pt,
```

(continues on next page)

(continued from previous page)

```

% TeXcolor reminds that syntax must be as for LaTeX \definecolor
pre_background-TeXcolor={named}{OldLace},
% ... and since 5.3.0 also xcolor \colorlet syntax is accepted and we
% can thus drop the {named}{...} thing if xcolor is available!
pre_border-TeXcolor=Gold,
% ... and even take more advantage of xcolor syntax:
pre_border-TeXcolor=Gold!90,
% add a shadow to code-blocks
pre_box-shadow=6pt 6pt,
pre_box-shadow-TeXcolor=gray!20,
%
% This 5.1.0 CSS-named option is alias for warningborder
div.warning_border-width=3pt,
% Prior to 5.1.0, padding for admonitions was not customizable
div.warning_padding=6pt,
div.warning_padding-right=18pt,
div.warning_padding-bottom=18pt,
% Assume xcolor has been loaded with its svgnames option
div.warning_border-TeXcolor=DarkCyan,
div.warning_background-TeXcolor=LightCyan,
% This one is the only option with space separated input:
div.warning_box-shadow=-12pt -12pt inset,
div.warning_box-shadow-TeXcolor=Cyan,
%
% The 5.1.0 new name would be div.attention_border-width
attentionborder=3pt,
% The 5.1.0 name here would be div.attention_border-TeXcolor
attentionBorderColor=Crimson,
% The 5.1.0 name would be div.attention_background-TeXcolor
attentionBgColor=FloralWhite,
%
% For note/hint/important/tip, the CSS syntax was added at 6.2.0
% Legacy syntax still works
noteborder=1pt,
noteBorderColor=Olive,
% But setting a background color via the new noteBgColor means that
% it will be rendered using the same interface as warning type
noteBgColor=Olive!10,
% We can customize separately the four border-widths, and mimic
% the legacy "light" rendering, but now with a background color:
% div.note_border-left-width=0pt,
% div.note_border-right-width=0pt,
% Let's rather for variety use lateral borders:
div.note_border-top-width=0pt,
div.note_border-bottom-width=0pt,
%
% As long as only border width and border color are set, *and* using
% for this the old interface, the rendering will be the "light" one
hintBorderColor=LightCoral,
% but if we had used div.hint_border-TeXcolor or *any* CSS-named
% option we would have triggered the more complex "heavybox" code.

```

(continues on next page)

(continued from previous page)

}

And this is placed at the end of the chapter source to end the scope of the configuration:

```
.. raw:: latex
    \endgroup
```

LaTeX syntax for boolean keys requires *lowercase* `true` or `false` e.g. `'sphinxsetup': "verbatimwrapslines=false"`. If setting the boolean key to `true`, `=true` is optional. Spaces around the commas and equal signs are ignored, spaces inside LaTeX macros may be significant. Do not use quotes to enclose values, whether numerical or strings.

bookmarksdepth

Controls the depth of the collapsible bookmarks panel in the PDF. May be either a number (e.g. 3) or a LaTeX sectioning name (e.g. `subsubsection`, i.e. without backslash). For details, refer to the `hyperref` LaTeX docs.

Default: 5

Added in version 4.0.0.

hmargin, vmargin

The dimensions of the horizontal (resp. vertical) margins, passed as `hmargin` (resp. `vmargin`) option to the `geometry` package. Example:

```
'sphinxsetup': 'hmargin={2in,1.5in}, vmargin={1.5in,2in}, marginpar=1in',
```

Japanese documents currently accept only the one-dimension format for these parameters. The `geometry` package is then passed suitable options to get the text width set to an exact multiple of the *zenkaku* width, and the text height set to an integer multiple of the `baselineskip`, with the closest fit for the margins.

Default: 1in (equivalent to `{1in,1in}`)

Hint: For Japanese `'manual'` docclass with `pointsize 11pt` or `12pt`, use the `nomag` extra document class option (cf. `'extraclassoptions'` key of *latex_elements*) or so-called TeX “true” units:

```
'sphinxsetup': 'hmargin=1.5truein, vmargin=1.5truein, marginpar=5zw',
```

Added in version 1.5.3.

marginpar

The `\marginparwidth` LaTeX dimension. For Japanese documents, the value is modified to be the closest integer multiple of the *zenkaku* width.

Default: 0.5in

Added in version 1.5.3.

verbatimwithframe

Boolean to specify if *code-blocks* and literal includes are framed. Setting it to `false` does not deactivate use of package “`framed`”, because it is still in use for the optional background color.

Default: `true`.

verbatimwrapslines

Boolean to specify if long lines in *code-block*'s contents are wrapped.

If `true`, line breaks may happen at spaces (the last space before the line break will be rendered using a special symbol), and at ascii punctuation characters (i.e. not at letters or digits). Whenever a long string has no break points, it is moved to next line. If its length is longer than the line width it will overflow.

Default: `true`

verbatimforcewraps

Boolean to specify if long lines in *code-block*'s contents should be forcefully wrapped to never overflow due to long strings.

Note: It is assumed that the [Pygments](https://pygments.org/)⁴¹² `LaTeXFormatter` has not been used with its `texcomments` or similar options which allow additional (arbitrary) LaTeX mark-up.

Also, in case of `latex_engine` set to `'pdflatex'`, only the default LaTeX handling of Unicode code points, i.e. `utf8` not `utf8x` is allowed.

Default: `false`

Added in version 3.5.0.

verbatimmaxoverflow

A number. If an unbreakable long string has length larger than the total linewidth plus this number of characters, and if `verbatimforcewraps` mode is on, the input line will be reset using the forceful algorithm which applies breakpoints at each character.

Default: 3

Added in version 3.5.0.

verbatimmaxunderfull

A number. If `verbatimforcewraps` mode applies, and if after applying the line wrapping at spaces and punctuation, the first part of the split line is lacking at least that number of characters to fill the available width, then the input line will be reset using the forceful algorithm.

As the default is set to a high value, the forceful algorithm is triggered only in overfull case, i.e. in presence of a string longer than full linewidth. Set this to 0 to force all input lines to be hard wrapped at the current available linewidth:

```
latex_elements = {
    'sphinxsetup': "verbatimforcewraps, verbatimmaxunderfull=0",
}
```

This can be done locally for a given code-block via the use of raw latex directives to insert suitable `\sphinxsetup` (before and after) into the latex file.

Default: 100

Added in version 3.5.0.

verbatimhintsturnover

Boolean to specify if code-blocks display “continued on next page” and “continued from previous page” hints in case of page breaks.

Default: `true`

⁴¹² <https://pygments.org/>

Added in version 1.6.3.

Changed in version 1.7: the default changed from `false` to `true`.

verbatimcontinuedalign, verbatimcontinuesalign

Horizontal position relative to the framed contents: either `l` (left aligned), `r` (right aligned) or `c` (centered).

Default: `r`

Added in version 1.7.

parsedliteralwraps

Boolean to specify if long lines in `parsed-literal`⁴¹³'s contents should wrap.

Default: `true`

Added in version 1.5.2: set this option value to `false` to recover former behavior.

inlineliteralwraps

Boolean to specify if line breaks are allowed inside inline literals: but extra potential break-points (additionally to those allowed by LaTeX at spaces or for hyphenation) are currently inserted only after the characters `. , ; ? ! /` and `\`. Due to TeX internals, white space in the line will be stretched (or shrunk) in order to accommodate the linebreak.

Default: `true`

Added in version 1.5: set this option value to `false` to recover former behavior.

Changed in version 2.3.0: added potential breakpoint at `\` characters.

verbatimvisiblepace

When a long code line is split, the last space character from the source code line right before the linebreak location is typeset using this.

Default: `\textcolor{red}{\textvisiblespace}`

verbatimcontinued

A LaTeX macro inserted at start of continuation code lines. Its (complicated...) default typesets a small red hook pointing to the right:

```
\makebox[2\fontcharwd\font`\x][r]{\textcolor{red}{\tiny$\hookrightarrow$}}
```

Changed in version 1.5: The breaking of long code lines was added at 1.4.2. The default definition of the continuation symbol was changed at 1.5 to accommodate various font sizes (e.g. code-blocks can be in footnotes).

Note: Values for color keys must either:

- obey the syntax of the `\definecolor` LaTeX command, e.g. something such as `VerbatimColor={rgb}{0.2,0.3,0.5}` or `{RGB}{37,23,255}` or `{gray}{0.75}` or (only with package `xcolor`) `{HTML}{808080}` or ...
- or obey the syntax of the `\colorlet` command from package `xcolor` (which then must exist in the LaTeX installation), e.g. `VerbatimColor=red!10` or `red!50!green` or `-red!75` or `MyPreviouslyDefinedColor` or ... Refer to `xcolor`⁴¹⁴ documentation for this syntax.

Changed in version 5.3.0: Formerly only the `\definecolor` syntax was accepted.

⁴¹³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#parsed-literal>

⁴¹⁴ <https://ctan.org/pkg/xcolor>

TitleColor

The color for titles (as configured via use of package “titlesec”).

Default: `{rgb}{0.126,0.263,0.361}`

InnerLinkColor

A color passed to `hyperref` as value of `linkcolor` and `citecolor`.

Default: `{rgb}{0.208,0.374,0.486}`.

OuterLinkColor

A color passed to `hyperref` as value of `filecolor`, `menucolor`, and `urlcolor`.

Default: `{rgb}{0.216,0.439,0.388}`

VerbatimColor

The background color for *code-blocks*.

Default: `{gray}{0.95}`

Changed in version 6.0.0: Formerly, it was `{rgb}{1,1,1}` (white).

VerbatimBorderColor

The frame color.

Default: `{RGB}{32,32,32}`

Changed in version 6.0.0: Formerly it was `{rgb}{0,0,0}` (black).

VerbatimHighlightColor

The color for highlighted lines.

Default: `{rgb}{0.878,1,1}`

Added in version 1.6.6.

TableRowColorHeader

Sets the background color for (all) the header rows of tables.

It will have an effect only if either the `latex_table_style` contains 'colorrows' or if the table is assigned the `colorrows` class. It is ignored for tables with `nocolorrows` class.

As for the other 'sphinxsetup' keys, it can also be set or modified from a `\sphinxsetup{...}` LaTeX command inserted via the `raw`⁴¹⁵ directive, or also from a LaTeX environment associated to a *container class* and using such `\sphinxsetup{...}`.

Default: `{gray}{0.86}`

There is also `TableMergeColorHeader`. If used, sets a specific color for merged single-row cells in the header.

Added in version 5.3.0.

TableRowColorOdd

Sets the background color for odd rows in tables (the row count starts at 1 at the first non-header row). Has an effect only if the `latex_table_style` contains 'colorrows' or for specific tables assigned the `colorrows` class.

Default: `{gray}{0.92}`

There is also `TableMergeColorOdd`.

Added in version 5.3.0.

⁴¹⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#raw>

TableRowColorEven

Sets the background color for even rows in tables.

Default `{gray}{0.98}`

There is also `TableMergeColorEven`.

Added in version 5.3.0.

verbatimsep

The separation between code lines and the frame.

See *Additional CSS-like 'sphinxsetup' keys* for its alias `pre_padding` and additional keys.

Default: `\fboxsep`

verbatimborder

The width of the frame around *code-blocks*. See also *Additional CSS-like 'sphinxsetup' keys* for `pre_border-width`.

Default: `\fboxrule`

shadowsep

The separation between contents and frame for *contents*⁴¹⁶ and *topic*⁴¹⁷ boxes.

See *Additional CSS-like 'sphinxsetup' keys* for the alias `div.topic_padding`.

Default: 5pt

shadowsize

The width of the lateral “shadow” to the right and bottom.

See *Additional CSS-like 'sphinxsetup' keys* for `div.topic_box-shadow` which allows to configure separately the widths of the vertical and horizontal shadows.

Default: 4pt

Changed in version 6.1.2: Fixed a regression introduced at 5.1.0 which modified unintentionally the width of topic boxes and worse had made usage of this key break PDF builds.

shadowrule

The width of the frame around *topic*⁴¹⁸ boxes. See also *Additional CSS-like 'sphinxsetup' keys* for `div.topic_border-width`.

Default: `\fboxrule`

noteBorderColor, hintBorderColor, importantBorderColor, tipBorderColor

The color for the two horizontal rules used by Sphinx in LaTeX for styling a *note*⁴¹⁹ type admonition.

Default: `{rgb}{0,0,0}` (black)

noteBgColor, hintBgColor, importantBgColor, tipBgColor

The optional color for the background. It is a priori set to white, but is not used, unless it has been set explicitly, and doing this triggers Sphinx into switching to the more complex LaTeX code which is employed also for *warning* type admonitions. There are then additional options which are described in *Additional CSS-like 'sphinxsetup' keys*.

Default: `{rgb}{1,1,1}` (white)

Added in version 6.2.0.

⁴¹⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

⁴¹⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴¹⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴¹⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

noteTextColor, hintTextColor, importantTextColor, tipTextColor

The optional color for the contents.

Default: unset (uses ambient text color, a priori black)

Added in version 6.2.0: To be considered experimental until 7.0.0. These options have aliases `div.note_TeXcolor` (etc) described in *Additional CSS-like 'sphinxsetup' keys*. Using the latter will let Sphinx switch to a more complex LaTeX code, which supports the customizability described in *Additional CSS-like 'sphinxsetup' keys*.

noteTeXtras, hintTeXtras, importantTeXtras, tipTeXtras

Some extra LaTeX code (such as `\bfseries` or `\footnotesize`) to be executed at start of the contents.

Default: empty

Added in version 6.2.0: To be considered experimental until 7.0.0. These options have aliases `div.note_TeXextras` (etc) described in *Additional CSS-like 'sphinxsetup' keys*.

noteborder, hintborder, importantborder, tipborder

The width of the two horizontal rules.

If the background color is set, or the alternative *Additional CSS-like 'sphinxsetup' keys* syntax is used (e.g. `div.note_border-width=1pt` in place of `noteborder=1pt`), or *any* option with a CSS-alike name is used, then the border is a full frame and this parameter sets its width also for left and right.

Default: 0.5pt

warningBorderColor, and (caution|attention|danger|error)BorderColor

The color for the admonition frame.

Default: `{rgb}{0,0,0}` (black)

warningBgColor, cautionBgColor, attentionBgColor, dangerBgColor, errorBgColor

The background colors for the respective admonitions.

Default: `{rgb}{1,1,1}` (white)

warningborder, cautionborder, attentionborder, dangerborder, errorborder

The width of the frame. See *Additional CSS-like 'sphinxsetup' keys* for keys allowing to configure separately each border width.

Default: 1pt

AtStartFootnote

LaTeX macros inserted at the start of the footnote text at bottom of page, after the footnote number.

Default: `\mbox{ }`

BeforeFootnote

LaTeX macros inserted before the footnote mark. The default removes possible space before it (else, TeX could insert a line break there).

Default: `\leavevmode\unskip`

Added in version 1.5.

HeaderFamily

default `\sffamily\bfseries`. Sets the font used by headings.

6.3 Additional CSS-like 'sphinxsetup' keys

Added in version 5.1.0: For `code-block`, `topic`⁴²⁰ and `contents`⁴²¹ directive, and strong-type admonitions (`warning`⁴²², `error`⁴²³, ...).

Added in version 6.2.0: Also the `note`⁴²⁴, `hint`⁴²⁵, `important`⁴²⁶ and `tip`⁴²⁷ admonitions can be styled this way. Using for them *any* of the listed options will trigger usage of a more complex LaTeX code than the one used per default (`sphinxheavybox` vs `sphinxlightbox`). Setting the new `noteBgColor` (or `hintBgColor`, ...) also triggers usage of `sphinxheavybox` for `note`⁴²⁸ (or `hint`⁴²⁹, ...).

Perhaps in future these 5.1.0 (and 6.2.0) novel settings will be optionally imported from some genuine CSS external file, but currently they have to be used via the 'sphinxsetup' interface (or the `\sphinxsetup` LaTeX command inserted via the `raw`⁴³⁰ directive) and the CSS syntax is only imitated.

Important: Low-level LaTeX errors causing a build failure can happen if the input syntax is not respected.

- In particular colors must be input as for the other color related options previously described, i.e. either in the `\definecolor` syntax or, if package `xcolor` is available (it is then automatically used) also the `\colorlet` syntax:

```
...<other options>
div.warning_border-TeXcolor={rgb}{1,0,0},% (always works)
div.error_background-TeXcolor=red!10,% (works only if xcolor is available)
...<other options>
```

- A colon in place of the equal sign will break LaTeX.
- `...border-width` or `...padding` expect a *single* dimension: they can not be used so far with space separated dimensions.
- `...top-right-radius` et al. values may be either a single or *two* space separated dimensions.
- Dimension specifications must use TeX units such as `pt` or `cm` or `in`. The `px` unit is recognized by `pdflatex` and `lualatex` but not by `xelatex` or `platex`.
- It is allowed for such specifications to be so-called “dimensional expressions”, e.g. `\fboxsep+2pt` or `0.5\baselineskip` are valid inputs. The expressions will be evaluated only at the typesetting time. Be careful though if using as in these examples TeX control sequences to double the backslash or to employ a raw Python string for the value of the ‘*sphinxsetup*’ key.
- As a rule, avoid inserting unneeded spaces in the key values: especially for the radii an input such `2 pt 3pt` will break LaTeX. Beware also that `\fboxsep \fboxsep` will not be seen as space separated in LaTeX. You must use something such as `{\fboxsep} \fboxsep`. Or use directly `3pt 3pt` which is a priori equivalent and simpler.

⁴²⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴²¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

⁴²² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#warning>

⁴²³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#error>

⁴²⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

⁴²⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#hint>

⁴²⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#important>

⁴²⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#tip>

⁴²⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

⁴²⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#hint>

⁴³⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#raw>

The options are all named in a similar pattern which depends on a `prefix`, which is then followed by an underscore, then the property name.

Directive	Option prefix	LaTeX environment
<code>code-block</code>	<code>pre</code>	<code>sphinxVerbatim</code>
<code>topic</code> ⁴³¹	<code>div.topic</code>	<code>sphinxShadowBox</code>
<code>contents</code> ⁴³²	<code>div.topic</code>	<code>sphinxShadowBox</code>
<code>note</code> ⁴³³	<code>div.note</code>	<code>sphinxnote</code> using <code>sphinxheavybox</code>
<code>warning</code> ⁴³⁴	<code>div.warning</code>	<code>sphinxwarning</code> (uses <code>sphinxheavybox</code>)
admonition type	<code>div.<type></code>	<code>sphinx<type></code> (using <code>sphinxheavybox</code>)

Here are now these options as well as their common defaults. Replace below `<prefix>` by the actual prefix as explained above. Don't forget the underscore separating the prefix from the property names.

- `<prefix>_border-top-width`,
`<prefix>_border-right-width`,
`<prefix>_border-bottom-width`,
`<prefix>_border-left-width`,
`<prefix>_border-width`. The latter can (currently) be only a *single* dimension which then sets all four others.

The default is that all those dimensions are equal. They are set to:

- `\fboxrule` (i.e. a priori 0.4pt) for `code-block`,
- `\fboxrule` for `topic`⁴³⁵ or `contents`⁴³⁶ directive,
- 1pt for `warning`⁴³⁷ and other “strong” admonitions,
- 0.5pt for `note`⁴³⁸ and other “light” admonitions. The framing style of the “lightbox” used for them in absence of usage of CSS-named options will be emulated by the richer “heavybox” if setting `border-left-width` and `border-right-width` both to 0pt.

- `<prefix>_box-decoration-break` can be set to either `clone` or `slice` and configures the behavior at page breaks. It defaults to `slice` for `code-block` (i.e. for `<prefix>=pre`) since 6.0.0. For other directives the default is `clone`.
- `<prefix>_padding-top`,
`<prefix>_padding-right`,
`<prefix>_padding-bottom`,
`<prefix>_padding-left`,
`<prefix>_padding`. The latter can (currently) be only a *single* dimension which then sets all four others.

The default is that all those dimensions are equal. They are set to:

- `\fboxsep` (i.e. a priori 3pt) for `code-block`,
- 5pt for `topic`⁴³⁹ or `contents`⁴⁴⁰ directive,

⁴³¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴³² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

⁴³³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

⁴³⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#warning>

⁴³⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴³⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

⁴³⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#warning>

⁴³⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

⁴³⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴⁴⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

- a special value for `warning`⁴⁴¹ and other “strong” admonitions, which ensures a backward compatible behavior.

Important: Prior to 5.1.0 there was no separate customizability of padding for warning-type boxes in PDF via LaTeX output. The sum of padding and border-width (as set for example for `warning`⁴⁴² by `warningborder`, now also named `div.warning_border-width`) was kept to a certain constant value. This limited the border-width to small values else the border could overlap the text contents. This behavior is kept as default.

- the same padding behavior is obeyed per default for `note`⁴⁴³ or other “light” admonitions when using `sphinxheavybox`.
- `<prefix>_border-top-left-radius`,
`<prefix>_border-top-right-radius`,
`<prefix>_border-bottom-right-radius`,
`<prefix>_border-bottom-left-radius`,
`<prefix>_border-radius`. This last key sets the first four to its assigned value. Each key value can be either a single, or *two*, dimensions which are then space separated.

The default is that all four corners are either circular or straight, with common radii:

- `\fboxsep` (i.e. a priori 3pt) for `code-block` (since 6.0.0).
- `0pt` for all other directives; this means to use straight corners.

See a remark above about traps with spaces in LaTeX.

- `<prefix>_box-shadow` is special in so far as it may be:
 - the `none` keyword,
 - or a single dimension (giving both x-offset and y-offset),
 - or two dimensions (separated by a space),
 - or two dimensions followed by the keyword `inset`.

The x-offset and y-offset may be negative. The default is `none`, *except* for the `topic`⁴⁴⁴ or `contents`⁴⁴⁵ directives, for which it is `4pt 4pt`, i.e. the shadow has a width of 4pt and extends to the right and below the frame. The lateral shadow then extends into the page right margin.

- `<prefix>_border-TeXcolor`,
`<prefix>_background-TeXcolor`,
`<prefix>_box-shadow-TeXcolor`,
`<prefix>_TeXcolor`. These are colors.

The shadow color defaults in all cases to `{rgb}{0,0,0}` i.e. to black.

Since 6.0.0 the border color and background color of `code-block`, i.e. `pre` prefix, default respectively to `{RGB}{32,32,32}` and `{gray}{0.95}`. They previously defaulted to black, respectively white.

For all other types, the border color defaults to black and the background color to white.

The `<prefix>_TeXcolor` stands for the CSS property “color”, i.e. it influences the text color of the contents. As for the three other options, the naming `TeXcolor` is to stress that the input syntax is the TeX one for colors

⁴⁴¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#warning>

⁴⁴² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#warning>

⁴⁴³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

⁴⁴⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴⁴⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

not an HTML/CSS one. If package `xcolor` is available in the LaTeX installation, one can use directly named colors as key values. Consider passing options such as `dvipsnames`, `svgnames` or `x11names` to `xcolor` via 'passoptionstopackages' key of `latex_elements`.

If `<prefix>_TeXcolor` is set, a `\color` command is inserted at start of the directive contents; for admonitions, this happens after the heading which reproduces the admonition type.

- `<prefix>_TeXextras`: if set, its value must be some LaTeX command or commands, for example `\itshape`. These commands will be inserted at the start of the contents; for admonitions, this happens after the heading which reproduces the admonition type.

Note:

- All directives support `box-decoration-break` to be set to `slice`.

Changed in version 6.2.0: Formerly, only `code-block` did. The default remains `clone` for all other directives, but this will probably change at 7.0.0.

- The corners of rounded boxes may be elliptical.

Changed in version 6.2.0: Formerly, only circular rounded corners were supported and a rounded corner forced the whole frame to use the same constant width from `<prefix>_border-width`.

- Inset shadows are incompatible with rounded corners. In case both are specified the inset shadow will simply be ignored.

Changed in version 6.2.0: Formerly it was to the contrary the rounded corners which were ignored in case an inset shadow was specified.

- `<prefix>_TeXcolor` and `<prefix>_TeXextras` are new with 6.2.0.

Usefulness is doubtful in the case of `code-block`:

- `pre_TeXcolor` will influence only the few non-Pygments highlighted tokens; it does color the line numbers, but if one wants to color *only* them one has to go through the `fancyvrb` interface.
- `pre_TeXextras=\footnotesize` for example may be replaced by usage of the `latex_elements` key 'fvset'. For 'lualatex' or 'xelatex' Sphinx includes in the preamble already `\fvset{fontsize=\small}` and this induces `fancyvrb` into overriding a `\footnotesize` coming from `pre_TeXextras`. One has to use `pre_TeXextras=\fvset{fontsize=\footnotesize}` syntax. Simpler to set directly the `latex_elements` key 'fvset'...

Consider these options experimental and that some implementation details may change. For example if the `pre_TeXextras` LaTeX commands were put by Sphinx in another location it could override the 'fvset' effect, perhaps this is what will be done in a future release.

- Rounded boxes are done using the `pict2e`⁴⁴⁶ interface to some basic PDF graphics operations. If this LaTeX package can not be found the build will proceed and render all boxes with straight corners.
- Elliptic corners use the `ellipse`⁴⁴⁷ LaTeX package which extends `pict2e`⁴⁴⁸. If this LaTeX package can not be found rounded corners will be circular arcs (or straight if `pict2e`⁴⁴⁹ is not available).

The following legacy behavior is currently not customizable:

- For `code-block`, padding and border-width and shadow (if one adds one) will go into the margin; the code lines remain at the same place independently of the values of the padding and border-width, except for being shifted vertically of course to not overwrite other text due to the width of the border or external shadow.

⁴⁴⁶ <https://ctan.org/pkg/pict2e>

⁴⁴⁷ <https://ctan.org/pkg/ellipse>

⁴⁴⁸ <https://ctan.org/pkg/pict2e>

⁴⁴⁹ <https://ctan.org/pkg/pict2e>

- For `topic`⁴⁵⁰ (and `contents`⁴⁵¹) the shadow (if on right) goes into the page margin, but the border and the extra padding are kept within the text area. Same for admonitions.
- The `contents`⁴⁵² and `topic`⁴⁵³ directives are governed by the same options with `div.topic` prefix: the Sphinx LaTeX mark-up uses for both directives the same `sphinxShadowBox` environment which has currently no additional branching, contrarily to the `sphinxadmonition` environment which branches according to the admonition directive name, e.g. either to `sphinxnote` or `sphinxwarning` etc...

6.4 LaTeX macros and environments

The “LaTeX package” file `sphinx.sty` loads various components providing support macros (aka commands), and environments, which are used in the mark-up produced on output from the `latex` builder, before conversion to pdf via the LaTeX toolchain. Also the “LaTeX class” files `sphinxhowto.cls` and `sphinxmanual.cls` define or customize some environments. All of these files can be found in the latex build repertory.

Some of these provide facilities not available from pre-existing LaTeX packages and work around LaTeX limitations with lists, table cells, verbatim rendering, footnotes, etc...

Others simply define macros with public names to make overwriting their defaults easy via user-added contents to the preamble. We will survey most of those public names here, but defaults have to be looked at in their respective definition files.

Hint: Sphinx LaTeX support code is split across multiple smaller-sized files. Rather than adding code to the preamble via `latex_elements['preamble']` it is also possible to replace entirely one of the component files of Sphinx LaTeX code with a custom version, simply by including a modified copy in the project source and adding the filename to the `latex_additional_files` list. Check the LaTeX build repertory for the filenames and contents.

Changed in version 4.0.0: split of `sphinx.sty` into multiple smaller units, to facilitate customization of many aspects simultaneously.

Macros

- Text styling commands:

Name, maps argument #1 to:	
<code>\sphinxstrong</code>	<code>\textbf{#1}</code>
<code>\sphinxcode</code>	<code>\texttt{#1}</code>
<code>\sphinxbfcodes</code>	<code>\textbf{\sphinxcode{#1}}</code>
<code>\sphinxemail</code>	<code>\textsf{#1}</code>
<code>\sphinxtablecontinued</code>	<code>\textsf{#1}</code>
<code>\sphinxtitleref</code>	<code>\emph{#1}</code>
<code>\sphinxmenuselection</code>	<code>\emph{#1}</code>
<code>\sphinxguilabel</code>	<code>\emph{#1}</code>
<code>\sphinxkeyboard</code>	<code>\sphinxcode{#1}</code>
<code>\sphinxaccelerator</code>	<code>\underline{#1}</code>
<code>\sphinxcrossref</code>	<code>\emph{#1}</code>

continues on next page

⁴⁵⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

⁴⁵¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

⁴⁵² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

⁴⁵³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

Table 1 – continued from previous page

Name, maps argument #1 to:	
<code>\sphinxtermref</code>	<code>\emph{#1}</code>
<code>\sphinxssamedocref</code>	<code>\emph{#1}</code>
<code>\sphinxxparam</code>	<code>\emph{#1}</code>
<code>\sphinxstypeparam</code>	<code>\emph{#1}</code>
<code>\sphinxxoptional</code>	<code>[#1]</code> with larger brackets, see source

Added in version 1.4.5: Use of `\sphinx` prefixed macro names to limit possibilities of conflict with LaTeX packages.

Added in version 1.8: `\sphinxguilabel`

Added in version 3.0: `\sphinxkeyboard`

Added in version 6.2.0: `\sphinxxparam`, `\sphinxssamedocref`

Added in version 7.1.0: `\sphinxxparamcomma` which defaults to a comma followed by a space and `\sphinxxparamcommaoneperline` which is used for one-parameter-per-line signatures (see [maximum_signature_line_length](#)). It defaults to `\texttt{,}` to make these end-of-line separators more distinctive.

Signatures of Python functions are rendered as `name<space>(parameters)` or `name<space>[type parameters]<space>(parameters)` (see [PEP 695](#)⁴⁵⁴) where the length of `<space>` is set to `0pt` by default. This can be changed via `\setlength{\sphinxsignaturelistskip}{1ex}` for instance.

- More text styling:

Name, maps argument #1 to:	
<code>\sphinxstyleindexentry</code>	<code>\texttt{#1}</code>
<code>\sphinxstyleindexextra</code>	<code>(\emph{#1})</code> (with a space upfront)
<code>\sphinxstyleindexpageref</code>	<code>, \pageref{#1}</code>
<code>\sphinxstyleindexpagemain</code>	<code>\textbf{#1}</code>
<code>\sphinxstyleindexlettergroup</code>	<code>{\Large\sffamily#1}\nopagebreak\vspace{1mm}</code>
<code>\sphinxstyleindexlettergroupDefault</code>	check source, too long for here
<code>\sphinxstyletopictitle</code>	<code>\textbf{#1}\par\medskip</code>
<code>\sphinxstylesidebartitle</code>	<code>\textbf{#1}\par\medskip</code>
<code>\sphinxstyleothertitle</code>	<code>\textbf{#1}</code>
<code>\sphinxstylesidebarsubtitle</code>	<code>~\\\textbf{#1} \smallskip</code>
<code>\sphinxstyletheadfamily</code>	<code>\sffamily</code> (<i>this one has no argument</i>)
<code>\sphinxstyleemphasis</code>	<code>\emph{#1}</code>
<code>\sphinxstyleliteralempphasis</code>	<code>\emph{\sphinxcode{#1}}</code>
<code>\sphinxstylestrong</code>	<code>\textbf{#1}</code>
<code>\sphinxstyleliteralstrong</code>	<code>\sphinxbfcode{#1}</code>
<code>\sphinxstyleabbreviation</code>	<code>\textsc{#1}</code>
<code>\sphinxstyleliteralintitle</code>	<code>\sphinxcode{#1}</code>
<code>\sphinxstylecodecontinued</code>	<code>{\footnotesize(#1)}</code>
<code>\sphinxstylecodecontinues</code>	<code>{\footnotesize(#1)}</code>
<code>\sphinxstylenotetitle</code>	<code>\sphinxstrong{#1}<space></code>
<code>\sphinxstylehinttitle</code>	<i>idem</i>
<code>\sphinxstyleimportanttitle</code>	<i>idem</i>
<code>\sphinxstyletipitle</code>	<i>idem</i>

continues on next page

⁴⁵⁴ <https://peps.python.org/pep-0695/>

Table 2 – continued from previous page

Name, maps argument #1 to:	
<code>\sphinxstylewarningtitle</code>	<i>idem</i>
<code>\sphinxstylecautiontitle</code>	<i>idem</i>
<code>\sphinxstyleattentiontitle</code>	<i>idem</i>
<code>\sphinxstyledangerertitle</code>	<i>idem</i>
<code>\sphinxstyleerrortitle</code>	<i>idem</i>
<code>\sphinxstyleseesalsotitle</code>	<code>\sphinxstrong{#1}\par\nopagebreak</code>

Added in version 1.5: These macros were formerly hard-coded as non customizable `\texttt`, `\emph`, etc...

Added in version 1.6: `\sphinxstyletheadfamily` which defaults to `\sffamily` and allows multiple paragraphs in header cells of tables.

Added in version 1.6.3: `\sphinxstylecodecontinued` and `\sphinxstylecodecontinues`.

Added in version 1.8: `\sphinxstyleindexlettergroup`, `\sphinxstyleindexlettergroupDefault`.

Added in version 6.2.0: `\sphinxstylenotetitle` et al. The #1 is the localized name of the directive, with a final colon. Wrap it as `\sphinxremovefinalcolon{#1}` if this final colon is to be removed. Examples:

```
\renewcommand\sphinxstylewarningtitle[1]{%
  \underline{\textbf{\sphinxremovefinalcolon{#1}}}\par
}
\renewcommand\sphinxstylenotetitle[1]{%
  \textit{\textbf{\sphinxremovefinalcolon{#1}}}\par\nobreak
  % LaTeX syntax is complex and we would be better off using \hrule.
  {\parskip0pt\noindent}%
  \raisebox{1ex}%
    {\makebox[\linewidth]{\textcolor{sphinxnoteBorderColor}{\dotfill}}}
  % It is complex to obtain nice vertical spacing for both a paragraph
  % or a list following up; this set-up is better for a paragraph next.
  \par\vskip-\parskip
}
```

- `\sphinxtableofcontents`: A wrapper (defined differently in `sphinxhowto.cls` and in `sphinxmanual.cls`) of standard `\tableofcontents`. The macro `\sphinxtableofcontentshook` is executed during its expansion right before `\tableofcontents` itself.

Changed in version 1.5: Formerly, the meaning of `\tableofcontents` was modified by Sphinx.

Changed in version 2.0: Hard-coded redefinitions of `\l@section` and `\l@subsection` formerly done during loading of 'manual' docclass are now executed later via `\sphinxtableofcontentshook`. This macro is also executed by the 'howto' docclass, but defaults to empty with it.

Hint: If adding to preamble the loading of `tocloft` package, also add to preamble `\renewcommand\sphinxtableofcontentshook{}` else it will reset `\l@section` and `\l@subsection` cancelling `tocloft` customization.

- `\sphinxmaketitle`: Used as the default setting of the 'maketitle' *latex_elements* key. Defined in the class files `sphinxmanual.cls` and `sphinxhowto.cls`.

Changed in version 1.8.3: Formerly, `\maketitle` from LaTeX document class was modified by Sphinx.

- `\sphinxbackoftitlepage`: For 'manual' docclass, and if it is defined, it gets executed at end of `\sphinxmaketitle`, before the final `\clearpage`. Use either the 'maketitle' key or the 'preamble' key of *latex_elements* to add a custom definition of `\sphinxbackoftitlepage`.

Added in version 1.8.3.

- `\sphinxcite`: A wrapper of standard `\cite` for citation references.

The `\sphinxbox` command

Added in version 6.2.0.

The `\sphinxbox[key=value,...]{inline text}` command can be used to “box” inline text elements with all the customizability which has been described in *Additional CSS-like 'sphinxsetup' keys*. It is a LaTeX command with one optional argument, which is a comma-separated list of key=value pairs, as for *The sphinxsetup configuration setting*. Here is the complete list of keys. They don't use any prefix.

- `border-width`,
- `border-top-width`, `border-right-width`, `border-bottom-width`, `border-left-width`,
- `padding`,
- `padding-top`, `padding-right`, `padding-bottom`, `padding-left`,
- `border-radius`,
- `border-top-left-radius`, `border-top-right-radius`, `border-bottom-right-radius`,
`border-bottom-left-radius`,
- `box-shadow`,
- `border-TeXcolor`, `background-TeXcolor`, `box-shadow-TeXcolor`, `TeXcolor`,
- `TeXextras`,
- and `addstrut` which is a boolean key, i.e. to be used as `addstrut=true`, or `addstrut` alone where `=true` is omitted, or `addstrut=false`.

This last key is specific to `\sphinxbox` and it means to add a `\strut` so that heights and depths are equalized across various instances on the same line with varying contents. The default is `addstrut=false`.

Important: Perhaps the default will turn into `addstrut=true` at 7.0.0 depending on feedback until then.

The combination `addstrut`, `padding-bottom=0pt`, `padding-top=1pt` is often satisfactory.

Refer to *Additional CSS-like 'sphinxsetup' keys* for important syntax information regarding the other keys. The default configuration uses no shadow, a border-width of `\fboxrule`, a padding of `\fboxsep`, circular corners with radii `\fboxsep` and background and border colors as for the default rendering of code-blocks.

When a `\sphinxbox` usage is nested within another one, it will ignore the options of the outer one: it first resets all options to their default state as they were prior to applying the outer box options, then it applies its own specific ones.

One can modify these defaults via the command `\sphinxboxsetup{key=value,...}`. The effect is cumulative, if one uses this command multiple times. Here the options are a mandatory argument so are within curly braces, not square brackets.

Here is some example of use:

```

latex_elements = {
    'preamble': r'''
% modify globally the defaults
\ sphinxboxsetup{border-width=2pt,%
                border-radius=4pt,%
                background-TeXcolor=yellow!20}
% configure some styling element with some extra specific options:
\ protected\ def\ sphinxkeyboard#1{\ sphinxbox[border-TeXcolor=green]{\ sphinxcode{#1}}}
'''
}

```

A utility `\newsphinxbox` is provided to create a new boxing macro, say `\foo` which will act exactly like `\sphinxbox` but with a given extra configuration:

```

% the specific options to \foo are within brackets
\ newsphinxbox[border-radius=0pt, box-shadow=2pt 2pt]{\foo}
% then use this \foo, possibly with some extra options still:
\ protected\ def\ sphinxguilabel#1{\foo{#1}}
\ protected\ def\ sphinxmenuselection#1{\foo[box-shadow-TeXcolor=gray]{#1}}

```

Boxes rendered with `\foo` obey as the ones using directly `\sphinxbox` the current configuration as set possibly mid-way in document via `\sphinxboxsetup` (from a [raw](https://docutils.sourceforge.io/docs/ref/rst/directives.html#raw)⁴⁵⁵ LaTeX mark-up), the only difference is that they have an initial additional set of default extras.

In the above examples, you can probably use `\renewcommand` syntax if you prefer it to `\protected\def` (with `[1]` in place of `#1` then).

Environments

- A [figure](https://docutils.sourceforge.io/docs/ref/rst/directives.html#figure)⁴⁵⁶ may have an optional legend with arbitrary body elements: they are rendered in a `sphinxlegend` environment. The default definition issues `\small`, and ends with `\par`.

Added in version 1.5.6: Formerly, the `\small` was hardcoded in LaTeX writer and the ending `\par` was lacking.

- Environments associated with admonitions:

- `sphinxnote`,
- `sphinxhint`,
- `sphinximportant`,
- `sphinxtip`,
- `sphinxwarning`,
- `sphinxcaution`,
- `sphinxattention`,
- `sphinxdanger`,
- `sphinxerror`.

⁴⁵⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#raw>

⁴⁵⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#figure>

They may be `\renewenvironment` 'd individually, and must then be defined with one argument (it is the heading of the notice, for example `Warning:` for `warning`⁴⁵⁷ directive, if English is the document language). Their default definitions use either the *sphinxheavybox* (for the last 5 ones) or the *sphinxlightbox* environments, configured to use the parameters (colors, border thickness) specific to each type, which can be set via 'sphinxsetup' string.

Changed in version 1.5: Use of public environment names, separate customizability of the parameters, such as `noteBorderColor`, `noteborder`, `warningBgColor`, `warningBorderColor`, `warningborder`, ...

- Environment for the `seealso` directive: `sphinxseealso`. It takes one argument which will be the localized string `See also` followed with a colon.

Added in version 6.1.0.

Changed in version 6.2.0: Colon made part of the mark-up rather than being inserted by the environment for coherence with how admonitions are handled generally.

- The `contents`⁴⁵⁸ directive (with `:local:` option) and the `topic`⁴⁵⁹ directive are implemented by environment `sphinxShadowBox`.

Added in version 1.4.2: Former code refactored into an environment allowing page breaks.

Changed in version 1.5: Options `shadowsep`, `shadowsize`, `shadowrule`.

- The literal blocks (via `::` or *code-block*), are implemented using `sphinxVerbatim` environment which is a wrapper of `Verbatim` environment from package `fancyvrb.sty`. It adds the handling of the top caption and the wrapping of long lines, and a frame which allows page breaks. Inside tables the used environment is `sphinxVerbatimintable` (it does not draw a frame, but allows a caption).

Changed in version 1.5: `Verbatim` keeps exact same meaning as in `fancyvrb.sty` (also under the name `OriginalVerbatim`); `sphinxVerbatimintable` is used inside tables.

Added in version 1.5: Options `verbatimwithframe`, `verbatimwrapslines`, `verbatimsep`, `verbatimborder`.

Added in version 1.6.6: Support for `:emphasize-lines:` option

Added in version 1.6.6: Easier customizability of the formatting via exposed to user LaTeX macros such as `\sphinxVerbatimHighlightLine`.

- The bibliography uses `sphinxthebibliography` and the Python Module index as well as the general index both use `sphinxtheindex`; these environments are wrappers of the `thebibliography` and respectively `theindex` environments as provided by the document class (or packages).

Changed in version 1.5: Formerly, the original environments were modified by Sphinx.

Miscellany

- Every text paragraph in document body starts with `\sphinxAtStartPar`. Currently, this is used to insert a zero width horizontal skip which is a trick to allow TeX hyphenation of the first word of a paragraph in a narrow context (like a table cell). For 'lualatex' which does not need the trick, the `\sphinxAtStartPar` does nothing.

Added in version 3.5.0.

- The section, subsection, ... headings are set using *titlesec*'s `\titleformat` command.
- For the 'manual' docclass, the chapter headings can be customized using *fncychap*'s commands `\ChNameVar`, `\ChNumVar`, `\ChTitleVar`. File `sphinx.sty` has custom re-definitions in case of *fncychap* option Bjarne.

Changed in version 1.5: Formerly, use of *fncychap* with other styles than Bjarne was dysfunctional.

⁴⁵⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#warning>

⁴⁵⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

⁴⁵⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

- Docutils `container`⁴⁶⁰ directives are supported in LaTeX output: to let a container class with name `foo` influence the final PDF via LaTeX, it is only needed to define in the preamble an environment `sphinxclassfoo`. A simple example would be:

```
\newenvironment{sphinxclassred}{\color{red}}{}
```

Currently the class names must contain only ascii characters and avoid characters special to LaTeX such as `\`.

Added in version 4.1.0.

Hint: As an experimental feature, Sphinx can use user-defined template file for LaTeX source if you have a file named `_templates/latex.tex.jinja` in your project.

Additional files `longtable.tex.jinja`, `tabulary.tex.jinja` and `tabular.tex.jinja` can be added to `_templates/` to configure some aspects of table rendering (such as the caption position).

Added in version 1.6: currently all template variables are unstable and undocumented.

Changed in version 7.4: Added support for the `.jinja` file extension, which is preferred. The old file names remain supported. (`latex.tex_t`, `longtable.tex_t`, `tabulary.tex_t`, and `tabular.tex_t`)

⁴⁶⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#container>

SPHINX EXTENSIONS API

Since many projects will need special features in their documentation, Sphinx is designed to be extensible on several levels.

Here are a few things you can do in an extension:

- Add new *builders* to support new output formats or actions on the parsed documents.
- Register custom reStructuredText roles and directives, extending the markup using the *Docutils markup API*.
- Add custom code to so-called “hook points” at strategic places throughout the build process, allowing you to register a hook and run specialized code. For example, see the *Sphinx core events*.

An extension is simply a Python module with a `setup()` function. A user activates the extension by placing the extension’s module name (or a sub-module) in their *extensions* configuration value.

When **sphinx-build** is executed, Sphinx will attempt to import each module that is listed, and execute `yourmodule.setup(app)`. This function is used to prepare the extension (e.g., by executing Python code), linking resources that Sphinx uses in the build process (like CSS or HTML files), and notifying Sphinx of everything the extension offers (such as directive or role definitions). The `app` argument is an instance of *Sphinx* and gives you control over most aspects of the Sphinx build.

Note: The configuration file itself can be treated as an extension if it contains a `setup()` function. All other extensions to load must be listed in the *extensions* configuration value.

The rest of this page describes some high-level aspects of developing extensions and various parts of Sphinx’s behavior that you can control. For some examples of how extensions can be built and used to control different parts of Sphinx, see the *Extension tutorials*.

7.1 Important objects

There are several key objects whose API you will use while writing an extension. These are:

Application

The application object (usually called `app`) is an instance of *Sphinx*. It controls most high-level functionality, such as the setup of extensions, event dispatching and producing output (logging).

If you have the environment object, the application is available as `env.app`.

Environment

The build environment object (usually called `env`) is an instance of *BuildEnvironment*. It is responsible for parsing the source documents, stores all metadata about the document collection and is serialized to disk after each build.

Its API provides methods to do with access to metadata, resolving references, etc. It can also be used by extensions to cache information that should persist for incremental rebuilds.

If you have the application or builder object, the environment is available as `app.env` or `builder.env`.

Builder

The builder object (usually called `builder`) is an instance of a specific subclass of *Builder*. Each builder class knows how to convert the parsed documents into an output format, or otherwise process them (e.g. check external links).

If you have the application object, the builder is available as `app.builder`.

Config

The config object (usually called `config`) provides the values of configuration values set in `conf.py` as attributes. It is an instance of *Config*.

The config is available as `app.config` or `env.config`.

To see an example of use of these objects, refer to *Extension tutorials*.

7.2 Build Phases

One thing that is vital in order to understand extension mechanisms is the way in which a Sphinx project is built: this works in several phases.

Phase 0: Initialization

In this phase, almost nothing of interest to us happens. The source directory is searched for source files, and extensions are initialized. Should a stored build environment exist, it is loaded, otherwise a new one is created.

Phase 1: Reading

In Phase 1, all source files (and on subsequent builds, those that are new or changed) are read and parsed. This is the phase where directives and roles are encountered by docutils, and the corresponding code is executed. The output of this phase is a *doctree* for each source file; that is a tree of docutils nodes. For document elements that aren't fully known until all existing files are read, temporary nodes are created.

There are nodes provided by docutils, which are documented in the *docutils documentation*⁴⁶¹. Additional nodes are provided by Sphinx and *documented here*.

During reading, the build environment is updated with all meta- and cross reference data of the read documents, such as labels, the names of headings, described Python objects and index entries. This will later be used to replace the temporary nodes.

The parsed doctrees are stored on the disk, because it is not possible to hold all of them in memory.

Phase 2: Consistency checks

Some checking is done to ensure no surprises in the built documents.

Phase 3: Resolving

Now that the metadata and cross-reference data of all existing documents is known, all temporary nodes are replaced by nodes that can be converted into output using components called transforms. For example, links are created for object references that exist, and simple literal nodes are created for those that don't.

Phase 4: Writing

This phase converts the resolved doctrees to the desired output format, such as HTML or LaTeX. This happens via a so-called docutils writer that visits the individual nodes of each doctree and produces some output in the process.

⁴⁶¹ <https://docutils.sourceforge.io/docs/ref/doctree.html>

Note: Some builders deviate from this general build plan, for example, the builder that checks external links does not need anything more than the parsed doctrees and therefore does not have phases 2–4.

To see an example of application, refer to *Developing a “TODO” extension*.

7.3 Extension metadata

Added in version 1.3.

The `setup()` function can return a dictionary. This is treated by Sphinx as metadata of the extension. Metadata keys currently recognized are:

- `'version'`: a string that identifies the extension version. It is used for extension version requirement checking (see *needs_extensions*) and informational purposes. If not given, `"unknown version"` is substituted.
- `'env_version'`: an integer that identifies the version of env data structure if the extension stores any data to environment. It is used to detect the data structure has been changed from last build. The extensions have to increment the version when data structure has changed. If not given, Sphinx considers the extension does not stores any data to environment.
- `'parallel_read_safe'`: a boolean that specifies if parallel reading of source files can be used when the extension is loaded. It defaults to `False`, i.e. you have to explicitly specify your extension to be parallel-read-safe after checking that it is.

Note: The *parallel-read-safe* extension must satisfy the following conditions:

- The core logic of the extension is parallelly executable during the reading phase.
 - It has event handlers for *env-merge-info* and *env-purge-doc* events if it stores data to the build environment object (env) during the reading phase.
-

- `'parallel_write_safe'`: a boolean that specifies if parallel writing of output files can be used when the extension is loaded. Since extensions usually don't negatively influence the process, this defaults to `True`.

Note: The *parallel-write-safe* extension must satisfy the following conditions:

- The core logic of the extension is parallelly executable during the writing phase.
-

7.4 APIs used for writing extensions

These sections provide a more complete description of the tools at your disposal when developing Sphinx extensions. Some are core to Sphinx (such as the *Application API*) while others trigger specific behavior (such as the *i18n API*)

Application API

Each Sphinx extension is a Python module with at least a `setup()` function. This function is called at initialization time with one argument, the application object representing the Sphinx process.

class sphinx.application.Sphinx

This application object has the public API described in the following.

Extension setup

These methods are usually called in an extension's `setup()` function.

Examples of using the Sphinx extension API can be seen in the `sphinx.ext` package.

Sphinx.setup_extension(*extname*: [str](https://docs.python.org/3/library/stdtypes.html#str)⁴⁶²) → [None](https://docs.python.org/3/library/constants.html#None)⁴⁶³

Import and setup a Sphinx extension module.

Load the extension given by the module *name*. Use this if your extension needs the features provided by another extension. No-op if called twice.

static Sphinx.require_sphinx(*version*: [tuple](https://docs.python.org/3/library/stdtypes.html#tuple)⁴⁶⁴[[int](https://docs.python.org/3/library/stdtypes.html#int)⁴⁶⁵, [int](https://docs.python.org/3/library/stdtypes.html#int)⁴⁶⁶] | [str](https://docs.python.org/3/library/stdtypes.html#str)⁴⁶⁷) → [None](https://docs.python.org/3/library/constants.html#None)⁴⁶⁸

Check the Sphinx version if requested.

Compare *version* with the version of the running Sphinx, and abort the build when it is too old.

Parameters

version – The required version in the form of `major.minor` or `(major, minor)`.

Added in version 1.0.

Changed in version 7.1: Type of *version* now allows `(major, minor)` form.

Sphinx.connect(*event*: [str](https://docs.python.org/3/library/stdtypes.html#str)⁴⁶⁹, *callback*: [Callable](https://docs.python.org/3/library/typing.html#typing.Callable)⁴⁷⁰, *priority*: [int](https://docs.python.org/3/library/stdtypes.html#int)⁴⁷¹ = 500) → [int](https://docs.python.org/3/library/stdtypes.html#int)⁴⁷²

Register *callback* to be called when *event* is emitted.

For details on available core events and the arguments of callback functions, please see [Sphinx core events](#).

Parameters

- **event** – The name of target event
- **callback** – Callback function for the event
- **priority** – The priority of the callback. The callbacks will be invoked in order of *priority* (ascending).

Returns

A listener ID. It can be used for [disconnect\(\)](#).

Changed in version 3.0: Support *priority*

⁴⁶² <https://docs.python.org/3/library/stdtypes.html#str>

⁴⁶³ <https://docs.python.org/3/library/constants.html#None>

⁴⁶⁴ <https://docs.python.org/3/library/stdtypes.html#tuple>

⁴⁶⁵ <https://docs.python.org/3/library/functions.html#int>

⁴⁶⁶ <https://docs.python.org/3/library/functions.html#int>

⁴⁶⁷ <https://docs.python.org/3/library/stdtypes.html#str>

⁴⁶⁸ <https://docs.python.org/3/library/constants.html#None>

⁴⁶⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁴⁷⁰ <https://docs.python.org/3/library/typing.html#typing.Callable>

⁴⁷¹ <https://docs.python.org/3/library/functions.html#int>

⁴⁷² <https://docs.python.org/3/library/functions.html#int>

`Sphinx.disconnect(listener_id: int473) → None474`

Unregister callback by *listener_id*.

Parameters

listener_id – A listener_id that `connect()` returns

`Sphinx.add_builder(builder: type475[Builder], override: bool476 = False) → None477`

Register a new builder.

Parameters

- **builder** – A builder class
- **override** – If true, install the builder forcibly even if another builder is already installed as the same name

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_config_value(name: str478, default: Any479, rebuild: Literal480['', 'env', 'epub', 'gettext', 'html', 'applehelp', 'devhelp'], types: type481 | Collection482[type483] | ENUM = ()) → None484`

Register a configuration value.

This is necessary for Sphinx to recognize new values and set default values accordingly.

Parameters

- **name** – The name of the configuration value. It is recommended to be prefixed with the extension name (ex. `html_logo`, `epub_title`)
- **default** – The default value of the configuration.
- **rebuild** – The condition of rebuild. It must be one of those values:
 - `'env'` if a change in the setting only takes effect when a document is parsed – this means that the whole environment must be rebuilt.
 - `'html'` if a change in the setting needs a full rebuild of HTML documents.
 - `''` if a change in the setting will not need any special rebuild.
- **types** – The type of configuration value. A list of types can be specified. For example, `[str]` is used to describe a configuration that takes string value.

Changed in version 0.4: If the *default* value is a callable, it will be called with the config object as its argument in order to get the default value. This can be used to implement config values whose default depends on other values.

Changed in version 0.6: Changed *rebuild* from a simple boolean (equivalent to `''` or `'env'`) to a string. However, booleans are still accepted and converted internally.

⁴⁷³ <https://docs.python.org/3/library/functions.html#int>

⁴⁷⁴ <https://docs.python.org/3/library/constants.html#None>

⁴⁷⁵ <https://docs.python.org/3/library/functions.html#type>

⁴⁷⁶ <https://docs.python.org/3/library/functions.html#bool>

⁴⁷⁷ <https://docs.python.org/3/library/constants.html#None>

⁴⁷⁸ <https://docs.python.org/3/library/stdtypes.html#str>

⁴⁷⁹ <https://docs.python.org/3/library/typing.html#typing.Any>

⁴⁸⁰ <https://docs.python.org/3/library/typing.html#typing.Literal>

⁴⁸¹ <https://docs.python.org/3/library/functions.html#type>

⁴⁸² <https://docs.python.org/3/library/collections.abc.html#collections.abc.Collection>

⁴⁸³ <https://docs.python.org/3/library/functions.html#type>

⁴⁸⁴ <https://docs.python.org/3/library/constants.html#None>

`Sphinx.add_event(name: str485) → None486`

Register an event called *name*.

This is needed to be able to emit it.

Parameters

name – The name of the event

`Sphinx.set_translator(name: str487, translator_class: type488[nodes.NodeVisitor], override: bool489 = False) → None490`

Register or override a Docutils translator class.

This is used to register a custom output translator or to replace a builtin translator. This allows extensions to use a custom translator and define custom nodes for the translator (see [add_node\(\)](#)).

Parameters

- **name** – The name of the builder for the translator
- **translator_class** – A translator class
- **override** – If true, install the translator forcedly even if another translator is already installed as the same name

Added in version 1.3.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_node(node: type491[Element], override: bool492 = False, **kwargs: tuple493[Callable, Callable | None494]) → None495`

Register a Docutils node class.

This is necessary for Docutils internals. It may also be used in the future to validate nodes in the parsed documents.

Parameters

- **node** – A node class
- **kwargs** – Visitor functions for each builder (see below)
- **override** – If true, install the node forcedly even if another node is already installed as the same name

Node visitor functions for the Sphinx HTML, LaTeX, text and manpage writers can be given as keyword arguments: the keyword should be one or more of 'html', 'latex', 'text', 'man', 'texinfo' or any other supported translators, the value a 2-tuple of (visit, depart) methods. depart can be None if the visit function raises `docutils.nodes.SkipNode`. Example:

```
class math(docutils.nodes.Element): pass

def visit_math_html(self, node):
    self.body.append(self.starttag(node, 'math'))
def depart_math_html(self, node):
    self.body.append('</math>')
```

(continues on next page)

⁴⁸⁵ <https://docs.python.org/3/library/stdtypes.html#str>

⁴⁸⁶ <https://docs.python.org/3/library/constants.html#None>

⁴⁸⁷ <https://docs.python.org/3/library/stdtypes.html#str>

⁴⁸⁸ <https://docs.python.org/3/library/functions.html#type>

⁴⁸⁹ <https://docs.python.org/3/library/functions.html#bool>

⁴⁹⁰ <https://docs.python.org/3/library/constants.html#None>

(continued from previous page)

```
app.add_node(math, html=(visit_math_html, depart_math_html))
```

Obviously, translators for which you don't specify visitor methods will choke on the node when encountered in a document to translate.

Changed in version 0.5: Added the support for keyword arguments giving visit functions.

`Sphinx.add_enumerable_node`(*node*: [type](#)⁴⁹⁶[*Element*], *figtype*: *str*⁴⁹⁷, *title_getter*: *TitleGetter* | *None*⁴⁹⁸ = *None*, *override*: *bool*⁴⁹⁹ = *False*, ***kwargs*: *tuple*⁵⁰⁰[*Callable*, *Callable*] → *None*⁵⁰¹

Register a Docutils node class as a numfig target.

Sphinx numbers the node automatically. And then the users can refer it using [numref](#).

Parameters

- **node** – A node class
- **figtype** – The type of enumerable nodes. Each figtype has individual numbering sequences. As system figtypes, `figure`, `table` and `code-block` are defined. It is possible to add custom nodes to these default figtypes. It is also possible to define new custom figtype if a new figtype is given.
- **title_getter** – A getter function to obtain the title of node. It takes an instance of the enumerable node, and it must return its title as string. The title is used to the default title of references for [ref](#). By default, Sphinx searches `docutils.nodes.caption` or `docutils.nodes.title` from the node as a title.
- **kwargs** – Visitor functions for each builder (same as [add_node\(\)](#))
- **override** – If true, install the node forcedly even if another node is already installed as the same name

Added in version 1.4.

`Sphinx.add_directive`(*name*: *str*⁵⁰², *cls*: *type*⁵⁰³[*Directive*], *override*: *bool*⁵⁰⁴ = *False*) → *None*⁵⁰⁵

Register a Docutils directive.

Parameters

- **name** – The name of the directive
- **cls** – A directive class
- **override** – If false, do not install it if another directive is already installed as the same name
If true, unconditionally install the directive.

For example, a custom directive named `my-directive` would be added like this:

⁴⁹¹ <https://docs.python.org/3/library/functions.html#type>
⁴⁹² <https://docs.python.org/3/library/functions.html#bool>
⁴⁹³ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁴⁹⁴ <https://docs.python.org/3/library/constants.html#None>
⁴⁹⁵ <https://docs.python.org/3/library/constants.html#None>
⁴⁹⁶ <https://docs.python.org/3/library/functions.html#type>
⁴⁹⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁴⁹⁸ <https://docs.python.org/3/library/constants.html#None>
⁴⁹⁹ <https://docs.python.org/3/library/functions.html#bool>
⁵⁰⁰ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁵⁰¹ <https://docs.python.org/3/library/constants.html#None>

```

from docutils.parsers.rst import Directive, directives

class MyDirective(Directive):
    has_content = True
    required_arguments = 1
    optional_arguments = 0
    final_argument_whitespace = True
    option_spec = {
        'class': directives.class_option,
        'name': directives.unchanged,
    }

    def run(self):
        ...

def setup(app):
    app.add_directive('my-directive', MyDirective)

```

For more details, see [the Docutils docs](#)⁵⁰⁶.

Changed in version 0.6: Docutils 0.5-style directive classes are now supported.

Deprecated since version 1.8: Docutils 0.4-style (function based) directives support is deprecated.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_role(name: str507, role: Any508, override: bool509 = False) → None510`

Register a Docutils role.

Parameters

- **name** – The name of role
- **role** – A role function
- **override** – If false, do not install it if another role is already installed as the same name If true, unconditionally install the role.

For more details about role functions, see [the Docutils docs](#)⁵¹¹.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_generic_role(name: str512, nodeclass: Any513, override: bool514 = False) → None515`

Register a generic Docutils role.

Register a Docutils role that does nothing but wrap its contents in the node given by *nodeclass*.

Parameters

- **override** – If false, do not install it if another role is already installed as the same name If true, unconditionally install the role.

⁵⁰² <https://docs.python.org/3/library/stdtypes.html#str>
⁵⁰³ <https://docs.python.org/3/library/functions.html#type>
⁵⁰⁴ <https://docs.python.org/3/library/functions.html#bool>
⁵⁰⁵ <https://docs.python.org/3/library/constants.html#None>
⁵⁰⁶ <https://docutils.sourceforge.io/docs/howto/rst-directives.html>
⁵⁰⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁵⁰⁸ <https://docs.python.org/3/library/typing.html#typing.Any>
⁵⁰⁹ <https://docs.python.org/3/library/functions.html#bool>
⁵¹⁰ <https://docs.python.org/3/library/constants.html#None>
⁵¹¹ <https://docutils.sourceforge.io/docs/howto/rst-roles.html>

Added in version 0.6.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_domain(domain: type516[Domain], override: bool517 = False) → None518`

Register a domain.

Parameters

- **domain** – A domain class
- **override** – If false, do not install it if another domain is already installed as the same name
If true, unconditionally install the domain.

Added in version 1.0.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_directive_to_domain(domain: str519, name: str520, cls: type521[Directive], override: bool522 = False) → None523`

Register a Docutils directive in a domain.

Like `add_directive()`, but the directive is added to the domain named *domain*.

Parameters

- **domain** – The name of target domain
- **name** – A name of directive
- **cls** – A directive class
- **override** – If false, do not install it if another directive is already installed as the same name
If true, unconditionally install the directive.

Added in version 1.0.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_role_to_domain(domain: str524, name: str525, role: RoleFunction | XRefRole, override: bool526 = False) → None527`

Register a Docutils role in a domain.

Like `add_role()`, but the role is added to the domain named *domain*.

Parameters

- **domain** – The name of the target domain
- **name** – The name of the role
- **role** – The role function

⁵¹² <https://docs.python.org/3/library/stdtypes.html#str>
⁵¹³ <https://docs.python.org/3/library/typing.html#typing.Any>
⁵¹⁴ <https://docs.python.org/3/library/functions.html#bool>
⁵¹⁵ <https://docs.python.org/3/library/constants.html#None>
⁵¹⁶ <https://docs.python.org/3/library/functions.html#type>
⁵¹⁷ <https://docs.python.org/3/library/functions.html#bool>
⁵¹⁸ <https://docs.python.org/3/library/constants.html#None>
⁵¹⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁵²⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁵²¹ <https://docs.python.org/3/library/functions.html#type>
⁵²² <https://docs.python.org/3/library/functions.html#bool>
⁵²³ <https://docs.python.org/3/library/constants.html#None>

- **override** – If false, do not install it if another role is already installed as the same name. If true, unconditionally install the role.

Added in version 1.0.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_index_to_domain(domain: str528, index: type529[Index], override: bool530 = False) → None531`

Register a custom index for a domain.

Add a custom *index* class to the domain named *domain*.

Parameters

- **domain** – The name of the target domain
- **index** – The index class
- **override** – If false, do not install it if another index is already installed as the same name. If true, unconditionally install the index.

Added in version 1.0.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_object_type(directivename: str532, rolename: str533, indextemplate: str534 = "", parse_node: Callable535 | None536 = None, ref_nodeclass: type537[TextElement] | None538 = None, objname: str539 = "", doc_field_types: Sequence540 = (), override: bool541 = False) → None542`

Register a new object type.

This method is a very convenient way to add a new *object* type that can be cross-referenced. It will do this:

- Create a new directive (called *directivename*) for documenting an object. It will automatically add index entries if *indextemplate* is nonempty; if given, it must contain exactly one instance of %s. See the example below for how the template will be interpreted.
- Create a new role (called *rolename*) to cross-reference to these object descriptions.
- If you provide *parse_node*, it must be a function that takes a string and a docutils node, and it must populate the node with children parsed from the string. It must then return the name of the item to be used in cross-referencing and index entries. See the `conf.py` file in the source for this documentation for an example.
- The *objname* (if not given, will default to *directivename*) names the type of object. It is used when listing objects, e.g. in search results.

For example, if you have this call in a custom Sphinx extension:

```
app.add_object_type('directive', 'dir', 'pair: %s; directive')
```

you can use this markup in your documents:

⁵²⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁵²⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁵²⁶ <https://docs.python.org/3/library/functions.html#bool>
⁵²⁷ <https://docs.python.org/3/library/constants.html#None>
⁵²⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁵²⁹ <https://docs.python.org/3/library/functions.html#type>
⁵³⁰ <https://docs.python.org/3/library/functions.html#bool>
⁵³¹ <https://docs.python.org/3/library/constants.html#None>

```
.. rst:directive:: function
```

```
    Document a function.
```

```
<...>
```

```
See also the :rst:dir:`function` directive.
```

For the directive, an index entry will be generated as if you had prepended

```
.. index:: pair: function; directive
```

The reference node will be of class `literal` (so it will be rendered in a proportional font, as appropriate for code) unless you give the `ref_nodeclass` argument, which must be a docutils node class. Most useful are `docutils.nodes.emphasis` or `docutils.nodes.strong` – you can also use `docutils.nodes.generated` if you want no further text decoration. If the text should be treated as literal (e.g. no smart quote replacement), but not have typewriter styling, use `sphinx.addnodes.literal_emphasis` or `sphinx.addnodes.literal_strong`.

For the role content, you have the same syntactical possibilities as for standard Sphinx roles (see [Cross-referencing syntax](#)).

If `override` is `True`, the given `object_type` is forcibly installed even if an `object_type` having the same name is already installed.

Changed in version 1.8: Add `override` keyword.

```
Sphinx.add_crossref_type(directivename: str543, rolename: str544, indextemplate: str545 = "", ref_nodeclass:
                        type546[TextElement] | None547 = None, objname: str548 = "", override: bool549 =
                        False) → None550
```

Register a new crossref object type.

This method is very similar to `add_object_type()` except that the directive it generates must be empty, and will produce no output.

That means that you can add semantic targets to your sources, and refer to them using custom roles instead of generic ones (like [ref](#)). Example call:

```
app.add_crossref_type('topic', 'topic', 'single: %s',
                    docutils.nodes.emphasis)
```

Example usage:

```
.. topic:: application API
```

```
The application API
```

```
-----
```

(continues on next page)

⁵³² <https://docs.python.org/3/library/stdtypes.html#str>

⁵³³ <https://docs.python.org/3/library/stdtypes.html#str>

⁵³⁴ <https://docs.python.org/3/library/stdtypes.html#str>

⁵³⁵ <https://docs.python.org/3/library/typing.html#typing.Callable>

⁵³⁶ <https://docs.python.org/3/library/constants.html#None>

⁵³⁷ <https://docs.python.org/3/library/functions.html#type>

⁵³⁸ <https://docs.python.org/3/library/constants.html#None>

⁵³⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁴⁰ <https://docs.python.org/3/library/collections.abc.html#collections.abc.Sequence>

⁵⁴¹ <https://docs.python.org/3/library/functions.html#bool>

⁵⁴² <https://docs.python.org/3/library/constants.html#None>

(continued from previous page)

Some random text here.

See also `:topic:`this section <application API>``.

(Of course, the element following the `topic` directive needn't be a section.)

Parameters

override – If false, do not install it if another cross-reference type is already installed as the same name. If true, unconditionally install the cross-reference type.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_transform(transform: type551[Transform]) → None552`

Register a Docutils transform to be applied after parsing.

Add the standard docutils Transform subclass *transform* to the list of transforms that are applied after Sphinx parses a reST document.

Parameters

transform – A transform class

Table 1: priority range categories for Sphinx transforms

Priority	Main purpose in Sphinx
0-99	Fix invalid nodes by docutils. Translate a doctree.
100-299	Preparation
300-399	early
400-699	main
700-799	Post processing. Deadline to modify text and referencing.
800-899	Collect referencing and referenced nodes. Domain processing.
900-999	Finalize and clean up.

refs: [Transform Priority Range Categories](#)⁵⁵³

`Sphinx.add_post_transform(transform: type554[Transform]) → None555`

Register a Docutils transform to be applied before writing.

Add the standard docutils Transform subclass *transform* to the list of transforms that are applied before Sphinx writes a document.

Parameters

transform – A transform class

⁵⁴³ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁴⁴ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁴⁵ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁴⁶ <https://docs.python.org/3/library/functions.html#type>

⁵⁴⁷ <https://docs.python.org/3/library/constants.html#None>

⁵⁴⁸ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁴⁹ <https://docs.python.org/3/library/functions.html#bool>

⁵⁵⁰ <https://docs.python.org/3/library/constants.html#None>

⁵⁵¹ <https://docs.python.org/3/library/functions.html#type>

⁵⁵² <https://docs.python.org/3/library/constants.html#None>

⁵⁵³ <https://docutils.sourceforge.io/docs/ref/transforms.html#transform-priority-range-categories>

⁵⁵⁴ <https://docs.python.org/3/library/functions.html#type>

⁵⁵⁵ <https://docs.python.org/3/library/constants.html#None>

`Sphinx.add_js_file(filename: str556 | None557, priority: int558 = 500, loading_method: str559 | None560 = None, **kwargs: Any561) → None562`

Register a JavaScript file to include in the HTML output.

Parameters

- **filename** – The name of a JavaScript file that the default HTML template will include. It must be relative to the HTML static path, or a full URI with scheme, or `None`. The `None` value is used to create an inline `<script>` tag. See the description of `kwargs` below.
- **priority** – Files are included in ascending order of priority. If multiple JavaScript files have the same priority, those files will be included in order of registration. See list of “priority range for JavaScript files” below.
- **loading_method** – The loading method for the JavaScript file. Either `'async'` or `'defer'` are allowed.
- **kwargs** – Extra keyword arguments are included as attributes of the `<script>` tag. If the special keyword argument `body` is given, its value will be added as the content of the `<script>` tag.

Example:

```
app.add_js_file('example.js')
# => <script src="_static/example.js"></script>

app.add_js_file('example.js', loading_method="async")
# => <script src="_static/example.js" async="async"></script>

app.add_js_file(None, body="var myVariable = 'foo';")
# => <script>var myVariable = 'foo';</script>
```

Table 2: priority range for JavaScript files

Priority	Main purpose in Sphinx
200	default priority for built-in JavaScript files
500	default priority for extensions
800	default priority for html_js_files

A JavaScript file can be added to the specific HTML page when an extension calls this method on [html-page-context](#) event.

Added in version 0.5.

Changed in version 1.8: Renamed from `app.add_javascript()`. And it allows keyword arguments as attributes of script tag.

Changed in version 3.5: Take priority argument. Allow to add a JavaScript file to the specific page.

Changed in version 4.4: Take `loading_method` argument. Allow to change the loading method of the JavaScript file.

⁵⁵⁶ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁵⁷ <https://docs.python.org/3/library/constants.html#None>

⁵⁵⁸ <https://docs.python.org/3/library/functions.html#int>

⁵⁵⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁶⁰ <https://docs.python.org/3/library/constants.html#None>

⁵⁶¹ <https://docs.python.org/3/library/typing.html#typing.Any>

⁵⁶² <https://docs.python.org/3/library/constants.html#None>

`Sphinx.add_css_file(filename: str563, priority: int564 = 500, **kwargs: Any565) → None566`

Register a stylesheet to include in the HTML output.

Parameters

- **filename** – The name of a CSS file that the default HTML template will include. It must be relative to the HTML static path, or a full URI with scheme.
- **priority** – Files are included in ascending order of priority. If multiple CSS files have the same priority, those files will be included in order of registration. See list of “priority range for CSS files” below.
- **kwargs** – Extra keyword arguments are included as attributes of the `<link>` tag.

Example:

```
app.add_css_file('custom.css')
# => <link rel="stylesheet" href="_static/custom.css" type="text/css" />

app.add_css_file('print.css', media='print')
# => <link rel="stylesheet" href="_static/print.css"
#       type="text/css" media="print" />

app.add_css_file('fancy.css', rel='alternate stylesheet', title='fancy')
# => <link rel="alternate stylesheet" href="_static/fancy.css"
#       type="text/css" title="fancy" />
```

Table 3: priority range for CSS files

Priority	Main purpose in Sphinx
200	default priority for built-in CSS files
500	default priority for extensions
800	default priority for html_css_files

A CSS file can be added to the specific HTML page when an extension calls this method on [html-page-context](#) event.

Added in version 1.0.

Changed in version 1.6: Optional `alternate` and/or `title` attributes can be supplied with the arguments `alternate` (a Boolean) and `title` (a string). The default is no title and `alternate` = `False`. For more information, refer to the [documentation](#)⁵⁶⁷.

Changed in version 1.8: Renamed from `app.add_stylesheet()`. And it allows keyword arguments as attributes of link tag.

Changed in version 3.5: Take priority argument. Allow to add a CSS file to the specific page.

`Sphinx.add_latex_package(packagename: str568, options: str569 | None570 = None, after_hyperref: bool571 = False) → None572`

Register a package to include in the LaTeX source code.

⁵⁶³ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁶⁴ <https://docs.python.org/3/library/functions.html#int>

⁵⁶⁵ <https://docs.python.org/3/library/typing.html#typing.Any>

⁵⁶⁶ <https://docs.python.org/3/library/constants.html#None>

⁵⁶⁷ https://mdn.io/Web/CSS/Alternative_style_sheets

Add *packagename* to the list of packages that LaTeX source code will include. If you provide *options*, it will be taken to the *usepackage* declaration. If you set *after_hyperref* truthy, the package will be loaded after *hyperref* package.

```
app.add_latex_package('mypackage')
# => \usepackage{mypackage}
app.add_latex_package('mypackage', 'foo,bar')
# => \usepackage[foo,bar]{mypackage}
```

Added in version 1.3.

Added in version 3.1: *after_hyperref* option.

Sphinx.add_lexer(*alias*: *str*⁵⁷³, *lexer*: *type*⁵⁷⁴[*Lexer*]) → *None*⁵⁷⁵

Register a new lexer for source code.

Use *lexer* to highlight code blocks with the given language *alias*.

Added in version 0.6.

Changed in version 2.1: Take a lexer class as an argument.

Changed in version 4.0: Removed support for lexer instances as an argument.

Sphinx.add_autodocumenter(*cls*: *Any*⁵⁷⁶, *override*: *bool*⁵⁷⁷ = *False*) → *None*⁵⁷⁸

Register a new documenter class for the autodoc extension.

Add *cls* as a new documenter class for the `sphinx.ext.autodoc` extension. It must be a subclass of `sphinx.ext.autodoc.Documenter`. This allows auto-documenting new types of objects. See the source of the autodoc module for examples on how to subclass `Documenter`.

If *override* is *True*, the given *cls* is forcedly installed even if a documenter having the same name is already installed.

See *Developing autodoc extension for IntEnum*.

Added in version 0.6.

Changed in version 2.2: Add *override* keyword.

Sphinx.add_autodoc_attrgetter(*typ*: *type*⁵⁷⁹, *getter*: *Callable*⁵⁸⁰[[*Any*⁵⁸¹, *str*⁵⁸², *Any*⁵⁸³], *Any*⁵⁸⁴]) → *None*⁵⁸⁵

Register a new `getattr`-like function for the autodoc extension.

Add *getter*, which must be a function with an interface compatible to the `getattr()`⁵⁸⁶ builtin, as the autodoc attribute getter for objects that are instances of *typ*. All cases where autodoc needs to get an attribute of a type are then handled by this function instead of `getattr()`⁵⁸⁷.

Added in version 0.6.

⁵⁶⁸ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁶⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁷⁰ <https://docs.python.org/3/library/constants.html#None>

⁵⁷¹ <https://docs.python.org/3/library/functions.html#bool>

⁵⁷² <https://docs.python.org/3/library/constants.html#None>

⁵⁷³ <https://docs.python.org/3/library/stdtypes.html#str>

⁵⁷⁴ <https://docs.python.org/3/library/functions.html#type>

⁵⁷⁵ <https://docs.python.org/3/library/constants.html#None>

⁵⁷⁶ <https://docs.python.org/3/library/typing.html#typing.Any>

⁵⁷⁷ <https://docs.python.org/3/library/functions.html#bool>

⁵⁷⁸ <https://docs.python.org/3/library/constants.html#None>

`Sphinx.add_search_language(cls: Any588) → None589`

Register a new language for the HTML search index.

Add *cls*, which must be a subclass of `sphinx.search.SearchLanguage`, as a support language for building the HTML full-text search index. The class must have a *lang* attribute that indicates the language it should be used for. See [html_search_language](#).

Added in version 1.1.

`Sphinx.add_source_suffix(suffix: str590, filetype: str591, override: bool592 = False) → None593`

Register a suffix of source files.

Same as [source_suffix](#). The users can override this using the config setting.

Parameters

override – If false, do not install it the same suffix is already installed. If true, unconditionally install the suffix.

Added in version 1.8.

`Sphinx.add_source_parser(parser: type594[Parser], override: bool595 = False) → None596`

Register a parser class.

Parameters

override – If false, do not install it if another parser is already installed for the same suffix. If true, unconditionally install the parser.

Added in version 1.4.

Changed in version 1.8: *suffix* argument is deprecated. It only accepts *parser* argument. Use [add_source_suffix\(\)](#) API to register suffix instead.

Changed in version 1.8: Add *override* keyword.

`Sphinx.add_env_collector(collector: type597[EnvironmentCollector]) → None598`

Register an environment collector class.

Refer to [Environment Collector API](#).

Added in version 1.6.

⁵⁷⁹ <https://docs.python.org/3/library/functions.html#type>
⁵⁸⁰ <https://docs.python.org/3/library/typing.html#typing.Callable>
⁵⁸¹ <https://docs.python.org/3/library/typing.html#typing.Any>
⁵⁸² <https://docs.python.org/3/library/stdtypes.html#str>
⁵⁸³ <https://docs.python.org/3/library/typing.html#typing.Any>
⁵⁸⁴ <https://docs.python.org/3/library/typing.html#typing.Any>
⁵⁸⁵ <https://docs.python.org/3/library/constants.html#None>
⁵⁸⁶ <https://docs.python.org/3/library/functions.html#getattr>
⁵⁸⁷ <https://docs.python.org/3/library/functions.html#getattr>
⁵⁸⁸ <https://docs.python.org/3/library/typing.html#typing.Any>
⁵⁸⁹ <https://docs.python.org/3/library/constants.html#None>
⁵⁹⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁵⁹¹ <https://docs.python.org/3/library/stdtypes.html#str>
⁵⁹² <https://docs.python.org/3/library/functions.html#bool>
⁵⁹³ <https://docs.python.org/3/library/constants.html#None>
⁵⁹⁴ <https://docs.python.org/3/library/functions.html#type>
⁵⁹⁵ <https://docs.python.org/3/library/functions.html#bool>
⁵⁹⁶ <https://docs.python.org/3/library/constants.html#None>
⁵⁹⁷ <https://docs.python.org/3/library/functions.html#type>
⁵⁹⁸ <https://docs.python.org/3/library/constants.html#None>

`Sphinx.add_html_theme(name: str599, theme_path: str600) → None601`

Register a HTML Theme.

The *name* is a name of theme, and *theme_path* is a full path to the theme (refs: [Distribute your theme as a Python package](#)).

Added in version 1.6.

`Sphinx.add_html_math_renderer(name: str602, inline_renderers: tuple603[Callable604, Callable605 | None606] | None607 = None, block_renderers: tuple608[Callable609, Callable610 | None611] | None612 = None) → None613`

Register a math renderer for HTML.

The *name* is a name of math renderer. Both *inline_renderers* and *block_renderers* are used as visitor functions for the HTML writer: the former for inline math node (`nodes.math`), the latter for block math node (`nodes.math_block`). Regarding visitor functions, see [add_node\(\)](#) for details.

Added in version 1.8.

`Sphinx.add_message_catalog(catalog: str614, locale_dir: str615) → None616`

Register a message catalog.

Parameters

- **catalog** – The name of the catalog
- **locale_dir** – The base path of the message catalog

For more details, see [sphinx.locale.get_translation\(\)](#).

Added in version 1.8.

`Sphinx.is_parallel_allowed(typ: str617) → bool618`

Check whether parallel processing is allowed or not.

Parameters

typ – A type of processing; 'read' or 'write'.

exception `sphinx.application.ExtensionError`

All these methods raise this exception if something went wrong with the extension API.

⁵⁹⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁰⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁰¹ <https://docs.python.org/3/library/constants.html#None>
⁶⁰² <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁰³ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁶⁰⁴ <https://docs.python.org/3/library/typing.html#typing.Callable>
⁶⁰⁵ <https://docs.python.org/3/library/typing.html#typing.Callable>
⁶⁰⁶ <https://docs.python.org/3/library/constants.html#None>
⁶⁰⁷ <https://docs.python.org/3/library/constants.html#None>
⁶⁰⁸ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁶⁰⁹ <https://docs.python.org/3/library/typing.html#typing.Callable>
⁶¹⁰ <https://docs.python.org/3/library/typing.html#typing.Callable>
⁶¹¹ <https://docs.python.org/3/library/constants.html#None>
⁶¹² <https://docs.python.org/3/library/constants.html#None>
⁶¹³ <https://docs.python.org/3/library/constants.html#None>
⁶¹⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁶¹⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁶¹⁶ <https://docs.python.org/3/library/constants.html#None>
⁶¹⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁶¹⁸ <https://docs.python.org/3/library/functions.html#bool>

Emitting events

class sphinx.application.Sphinx

emit(*event*: [str](#)⁶¹⁹, **args*: [Any](#)⁶²⁰, *allowed_exceptions*: [tuple](#)⁶²¹[[type](#)⁶²²[[Exception](#)⁶²³], ...] = ()) → [list](#)⁶²⁴

Emit *event* and pass *arguments* to the callback functions.

Return the return values of all callbacks as a list. Do not emit core Sphinx events in extensions!

Parameters

- **event** – The name of event that will be emitted
- **args** – The arguments for the event
- **allowed_exceptions** – The list of exceptions that are allowed in the callbacks

Changed in version 3.1: Added *allowed_exceptions* to specify path-through exceptions

emit_firstresult(*event*: [str](#)⁶²⁵, **args*: [Any](#)⁶²⁶, *allowed_exceptions*: [tuple](#)⁶²⁷[[type](#)⁶²⁸[[Exception](#)⁶²⁹], ...] = ()) → [Any](#)⁶³⁰

Emit *event* and pass *arguments* to the callback functions.

Return the result of the first callback that doesn't return `None`.

Parameters

- **event** – The name of event that will be emitted
- **args** – The arguments for the event
- **allowed_exceptions** – The list of exceptions that are allowed in the callbacks

Added in version 0.5.

Changed in version 3.1: Added *allowed_exceptions* to specify path-through exceptions

Sphinx runtime information

The application object also provides runtime information as attributes.

Sphinx.project

Target project. See [Project](#).

Sphinx.sourcedir

Source directory.

Sphinx.confdir

Directory containing `conf.py`.

⁶¹⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁶²⁰ <https://docs.python.org/3/library/typing.html#typing.Any>
⁶²¹ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁶²² <https://docs.python.org/3/library/functions.html#type>
⁶²³ <https://docs.python.org/3/library/exceptions.html#Exception>
⁶²⁴ <https://docs.python.org/3/library/stdtypes.html#list>
⁶²⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁶²⁶ <https://docs.python.org/3/library/typing.html#typing.Any>
⁶²⁷ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁶²⁸ <https://docs.python.org/3/library/functions.html#type>
⁶²⁹ <https://docs.python.org/3/library/exceptions.html#Exception>
⁶³⁰ <https://docs.python.org/3/library/typing.html#typing.Any>

Sphinx.doctreedir

Directory for storing pickled doctrees.

Sphinx.outdir

Directory for storing built document.

Sphinx core events

These events are known to the core. The arguments shown are given to the registered event handlers. Use [Sphinx.connect\(\)](#) in an extension's `setup` function (note that `conf.py` can also have a `setup` function) to connect handlers to the events. Example:

```
def source_read_handler(app, docname, source):
    print('do something here...')

def setup(app):
    app.connect('source-read', source_read_handler)
```

Below is an overview of each event that happens during a build. In the list below, we include the event name, its callback parameters, and the input and output type for that event:

```
1. event.config-initiated(app, config)
2. event.builder-initiated(app)
3. event.env-get-outdated(app, env, added, changed, removed)
4. event.env-before-read-docs(app, env, docnames)

for docname in docnames:
    5. event.env-purge-doc(app, env, docname)

    if doc changed and not removed:
        6. source-read(app, docname, source)
        7. run source parsers: text -> docutils.document
           - parsers can be added with the app.add_source_parser() API
        8. apply transforms based on priority: docutils.document -> docutils.document
           - event.doctree-read(app, doctree) is called in the middle of transforms,
             transforms come before/after this event depending on their priority.

9. event.env-merge-info(app, env, docnames, other)
   - if running in parallel mode, this event will be emitted for each process

10. event.env-updated(app, env)
11. event.env-get-updated(app, env)
12. event.env-check-consistency(app, env)

# The updated-docs list can be builder dependent, but generally includes all new/changed
  ↳ documents,
# plus any output from `env-get-updated`, and then all "parent" documents in the ToC tree
# For builders that output a single page, they are first joined into a single doctree
  ↳ before post-transforms
# or the doctree-resolved event is emitted
for docname in updated-docs:
    13. apply post-transforms (by priority): docutils.document -> docutils.document
    14. event.doctree-resolved(app, doctree, docname)
```

(continues on next page)

(continued from previous page)

- In the event that any reference nodes fail to resolve, the following may emit:
- `event.missing-reference(env, node, contnode)`
- `event.warn-missing-reference(domain, node)`

15. Generate output files

16. `event.build-finished(app, exception)`

Here is a more detailed list of these events.

builder-inited(*app*)

Emitted when the builder object has been created. It is available as `app.builder`.

config-inited(*app, config*)

Emitted when the config object has been initialized.

Added in version 1.8.

env-get-outdated(*app, env, added, changed, removed*)

Emitted when the environment determines which source files have changed and should be re-read. *added*, *changed* and *removed* are sets of docnames that the environment has determined. You can return a list of docnames to re-read in addition to these.

Added in version 1.1.

env-purge-doc(*app, env, docname*)

Emitted when all traces of a source file should be cleaned from the environment, that is, if the source file is removed or before it is freshly read. This is for extensions that keep their own caches in attributes of the environment.

For example, there is a cache of all modules on the environment. When a source file has been changed, the cache's entries for the file are cleared, since the module declarations could have been removed from the file.

Added in version 0.5.

env-before-read-docs(*app, env, docnames*)

Emitted after the environment has determined the list of all added and changed files and just before it reads them. It allows extension authors to reorder the list of docnames (*inplace*) before processing, or add more docnames that Sphinx did not consider changed (but never add any docnames that are not in `env.found_docs`).

You can also remove document names; do this with caution since it will make Sphinx treat changed files as unchanged.

Added in version 1.3.

source-read(*app, docname, source*)

Emitted when a source file has been read. The *source* argument is a list whose single element is the contents of the source file. You can process the contents and replace this item to implement source-level transformations.

For example, if you want to use \$ signs to delimit inline math, like in LaTeX, you can use a regular expression to replace `$...$` by `:math:`...``.

Added in version 0.5.

include-read(*app, relative_path, parent_docname, content*)

Emitted when a file has been read with the `include`⁶³¹ directive. The *relative_path* argument is a `Path`⁶³² object representing the relative path of the included file from the *source directory*. The *parent_docname* argument is the name of the document that contains the `include`⁶³³ directive. The *source* argument is a list whose single element is the contents of the included file. You can process the contents and replace this item to transform the included content, as with the *source-read* event.

Added in version 7.2.5.

See also:

The `include`⁶³⁴ directive and the `source-read` event.

object-description-transform(*app, domain, objtype, contentnode*)

Emitted when an object description directive has run. The *domain* and *objtype* arguments are strings indicating object description of the object. And *contentnode* is a content for the object. It can be modified in-place.

Added in version 2.4.

doctree-read(*app, doctree*)

Emitted when a doctree has been parsed and read by the environment, and is about to be pickled. The *doctree* can be modified in-place.

missing-reference(*app, env, node, contnode*)

Emitted when a cross-reference to an object cannot be resolved. If the event handler can resolve the reference, it should return a new docutils node to be inserted in the document tree in place of the node *node*. Usually this node is a `reference` node containing *contnode* as a child. If the handler can not resolve the cross-reference, it can either return `None` to let other handlers try, or raise `NoUri` to prevent other handlers in trying and suppress a warning about this cross-reference being unresolved.

Parameters

- **env** – The build environment (`app.builder.env`).
- **node** – The `pending_xref` node to be resolved. Its `reftype`, `reftarget`, `modname` and `classname` attributes determine the type and target of the reference.
- **contnode** – The node that carries the text and formatting inside the future reference and should be a child of the returned reference node.

Added in version 0.5.

warn-missing-reference(*app, domain, node*)

Emitted when a cross-reference to an object cannot be resolved even after `missing-reference`. If the event handler can emit warnings for the missing reference, it should return `True`. The configuration variables `nitpick_ignore` and `nitpick_ignore_regex` prevent the event from being emitted for the corresponding nodes.

Added in version 3.4.

doctree-resolved(*app, doctree, docname*)

Emitted when a doctree has been “resolved” by the environment, that is, all references have been resolved and TOCs have been inserted. The *doctree* can be modified in place.

Here is the place to replace custom nodes that don’t have visitor methods in the writers, so that they don’t cause errors when the writers encounter them.

env-merge-info(*app, env, docnames, other*)

This event is only emitted when parallel reading of documents is enabled. It is emitted once for every subprocess that has read some documents.

You must handle this event in an extension that stores data in the environment in a custom location. Otherwise the environment in the main process will not be aware of the information stored in the subprocess.

⁶³¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

⁶³² <https://docs.python.org/3/library/pathlib.html#pathlib.Path>

⁶³³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

⁶³⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

other is the environment object from the subprocess, *env* is the environment from the main process. *docnames* is a set of document names that have been read in the subprocess.

Added in version 1.3.

env-updated(*app*, *env*)

Emitted after reading all documents, when the environment and all doctrees are now up-to-date.

You can return an iterable of docnames from the handler. These documents will then be considered updated, and will be (re-)written during the writing phase.

Added in version 0.5.

Changed in version 1.3: The handlers' return value is now used.

env-check-consistency(*app*, *env*)

Emitted when Consistency checks phase. You can check consistency of metadata for whole of documents.

Added in version 1.6: As a **experimental** event

html-collect-pages(*app*)

Emitted when the HTML builder is starting to write non-document pages. You can add pages to write by returning an iterable from this event consisting of (*pagename*, *context*, *templatename*).

Added in version 1.0.

html-page-context(*app*, *pagename*, *templatename*, *context*, *doctree*)

Emitted when the HTML builder has created a context dictionary to render a template with – this can be used to add custom elements to the context.

The *pagename* argument is the canonical name of the page being rendered, that is, without `.html` suffix and using slashes as path separators. The *templatename* is the name of the template to render, this will be `'page.html'` for all pages from reST documents.

The *context* argument is a dictionary of values that are given to the template engine to render the page and can be modified to include custom values. Keys must be strings.

The *doctree* argument will be a doctree when the page is created from a reST documents; it will be `None` when the page is created from an HTML template alone.

You can return a string from the handler, it will then replace `'page.html'` as the HTML template for this page.

Note: You can install JS/CSS files for the specific page via `Sphinx.add_js_file()` and `Sphinx.add_css_file()` since v3.5.0.

Added in version 0.4.

Changed in version 1.3: The return value can now specify a template name.

linkcheck-process-uri(*app*, *uri*)

Emitted when the linkcheck builder collects hyperlinks from document. *uri* is a collected URI. The event handlers can modify the URI by returning a string.

Added in version 4.1.

build-finished(*app*, *exception*)

Emitted when a build has finished, before Sphinx exits, usually used for cleanup. This event is emitted even when the build process raised an exception, given as the *exception* argument. The exception is reraised in the application after the event handlers have run. If the build process raised no exception, *exception* will be `None`. This allows to customize cleanup actions depending on the exception status.

Added in version 0.5.

Checking the Sphinx version

Use this to adapt your extension to API changes in Sphinx.

```
sphinx.version_info = (7, 4, 0, 'beta', 0)
```

Version info for better programmatic use.

A tuple of five elements; for Sphinx version 1.2.1 beta 3 this would be (1, 2, 1, 'beta', 3). The fourth element can be one of: `alpha`, `beta`, `rc`, `final`. `final` always has 0 as the last element.

Added in version 1.2: Before version 1.2, check the string `sphinx.__version__`.

The Config object

```
class sphinx.config.Config(config: dict635[str636, Any637] | None638 = None, overrides: dict639[str640, Any641] | None642 = None)
```

Configuration file abstraction.

The Config object makes the values of all config options available as attributes.

It is exposed via the `Sphinx.config` and `sphinx.environment.BuildEnvironment.config` attributes. For example, to get the value of `language`, use either `app.config.language` or `env.config.language`.

The template bridge

```
class sphinx.application.TemplateBridge
```

This class defines the interface for a “template bridge”, that is, a class that renders templates given a template name and a context.

```
init(builder: Builder, theme: Theme | None643 = None, dirs: list644[str645] | None646 = None) → None647
```

Called by the builder to initialize the template system.

builder is the builder object; you’ll probably want to look at the value of `builder.config.templates_path`.

theme is a `sphinx.theming.Theme` object or `None`; in the latter case, *dirs* can be list of fixed directories to look for templates.

```
newest_template_mtime() → float648
```

Called by the builder to determine if output files are outdated because of template changes. Return the mtime of the newest template file that was changed. The default implementation returns 0.

```
render(template: str649, context: dict650) → None651
```

Called by the builder to render a template given as a filename with a specified context (a Python dictionary).

⁶³⁵ <https://docs.python.org/3/library/stdtypes.html#dict>

⁶³⁶ <https://docs.python.org/3/library/stdtypes.html#str>

⁶³⁷ <https://docs.python.org/3/library/typing.html#typing.Any>

⁶³⁸ <https://docs.python.org/3/library/constants.html#None>

⁶³⁹ <https://docs.python.org/3/library/stdtypes.html#dict>

⁶⁴⁰ <https://docs.python.org/3/library/stdtypes.html#str>

⁶⁴¹ <https://docs.python.org/3/library/typing.html#typing.Any>

⁶⁴² <https://docs.python.org/3/library/constants.html#None>

render_string(*template*: *str*⁶⁵², *context*: *dict*⁶⁵³) → *str*⁶⁵⁴

Called by the builder to render a template given as a string with a specified context (a Python dictionary).

Exceptions

exception sphinx.errors.SphinxError

Base class for Sphinx errors.

This is the base class for “nice” exceptions. When such an exception is raised, Sphinx will abort the build and present the exception category and message to the user.

Extensions are encouraged to derive from this exception for their custom errors.

Exceptions *not* derived from *SphinxError* are treated as unexpected and shown to the user with a part of the traceback (and the full traceback saved in a temporary file).

category

Description of the exception “category”, used in converting the exception to a string (“category: message”). Should be set accordingly in subclasses.

exception sphinx.errors.ConfigError

Configuration error.

exception sphinx.errors.ExtensionError(*message*: *str*⁶⁵⁵, *orig_exc*: *Exception*⁶⁵⁶ | *None*⁶⁵⁷ = *None*,
modname: *str*⁶⁵⁸ | *None*⁶⁵⁹ = *None*)

Extension error.

exception sphinx.errors.ThemeError

Theme error.

exception sphinx.errors.VersionRequirementError

Incompatible Sphinx version error.

⁶⁴³ <https://docs.python.org/3/library/constants.html#None>
⁶⁴⁴ <https://docs.python.org/3/library/stdtypes.html#list>
⁶⁴⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁴⁶ <https://docs.python.org/3/library/constants.html#None>
⁶⁴⁷ <https://docs.python.org/3/library/constants.html#None>
⁶⁴⁸ <https://docs.python.org/3/library/functions.html#float>
⁶⁴⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁵⁰ <https://docs.python.org/3/library/stdtypes.html#dict>
⁶⁵¹ <https://docs.python.org/3/library/constants.html#None>
⁶⁵² <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁵³ <https://docs.python.org/3/library/stdtypes.html#dict>
⁶⁵⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁵⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁵⁶ <https://docs.python.org/3/library/exceptions.html#Exception>
⁶⁵⁷ <https://docs.python.org/3/library/constants.html#None>
⁶⁵⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁵⁹ <https://docs.python.org/3/library/constants.html#None>

Project API

```
class sphinx.project.Project(srcdir: str660 | os.PathLike661[str662], source_suffix: Iterable[str663])
```

A project is the source code set of the Sphinx document(s).

```
    discover(exclude_paths: Iterable[str664] = (), include_paths: Iterable[str665] = ('**',)) → set666[str667]
```

Find all document files in the source directory and put them in *docnames*.

```
    doc2path(docname: str668, absolute: bool669) → str670
```

Return the filename for the document name.

If *absolute* is True, return as an absolute path. Else, return as a relative path to the source directory.

```
    path2doc(filename: str671 | PathLike672[str673]) → str674 | None675
```

Return the docname for the filename if the file is a document.

filename should be absolute or relative to the source directory.

```
    restore(other: Project) → None676
```

Take over a result of last build.

```
    docnames: set677[str678]
```

The name of documents belonging to this project.

source_suffix

source_suffix. Same as *source_suffix*.

srcdir

Source directory.

Build environment API

```
class sphinx.environment.BuildEnvironment
```

Attributes

app

Reference to the *Sphinx* (application) object.

⁶⁶⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁶¹ <https://docs.python.org/3/library/os.html#os.PathLike>
⁶⁶² <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁶³ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁶⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁶⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁶⁶ <https://docs.python.org/3/library/stdtypes.html#set>
⁶⁶⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁶⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁶⁹ <https://docs.python.org/3/library/functions.html#bool>
⁶⁷⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁷¹ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁷² <https://docs.python.org/3/library/os.html#os.PathLike>
⁶⁷³ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁷⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁷⁵ <https://docs.python.org/3/library/constants.html#None>
⁶⁷⁶ <https://docs.python.org/3/library/constants.html#None>
⁶⁷⁷ <https://docs.python.org/3/library/stdtypes.html#set>
⁶⁷⁸ <https://docs.python.org/3/library/stdtypes.html#str>

config

Reference to the [Config](#) object.

project

Target project. See [Project](#).

srcdir

Source directory.

doctreedir

Directory for storing pickled doctrees.

events

An [EventManager](#) object.

found_docs

A set of all existing docnames.

metadata

Dictionary mapping docnames to “metadata” (see [File-wide metadata](#)).

titles

Dictionary mapping docnames to the docutils node for their main title.

docname

Returns the docname of the document currently being parsed.

Utility methods

doc2path(*docname*: [str](#)⁶⁷⁹, *base*: [bool](#)⁶⁸⁰ = *True*) → [str](#)⁶⁸¹

Return the filename for the document name.

If *base* is *True*, return absolute path under `self.srcdir`. If *base* is *False*, return relative path to `self.srcdir`.

relfn2path(*filename*: [str](#)⁶⁸², *docname*: [str](#)⁶⁸³ | *None*⁶⁸⁴ = *None*) → [tuple](#)⁶⁸⁵[[str](#)⁶⁸⁶, [str](#)⁶⁸⁷]

Return paths to a file referenced from a document, relative to documentation root and absolute.

In the input “filename”, absolute filenames are taken as relative to the source dir, while relative filenames are relative to the dir of the containing document.

note_dependency(*filename*: [str](#)⁶⁸⁸) → *None*⁶⁸⁹

Add *filename* as a dependency of the current document.

This means that the document will be rebuilt if this file changes.

filename should be absolute or relative to the source directory.

new_serialno(*category*: [str](#)⁶⁹⁰ = “”) → [int](#)⁶⁹¹

Return a serial number, e.g. for index entry targets.

The number is guaranteed to be unique in the current document.

note_reread() → *None*⁶⁹²

Add the current document to the list of documents that will automatically be re-read at the next build.

Builder API

Todo: Expand this.

`class sphinx.builders.Builder`

This is the base class for all builders.

These attributes should be set on builder classes:

name = ''

The builder's name, for the `-b` command line option.

format = ''

The builder's output format, or '' if no document output is produced.

epilog = ''

The message emitted upon successful build completion. This can be a printf-style template string with the following keys: `outdir`, `project`

allow_parallel = `False`

allow parallel `write_doc()` calls

supported_image_types: `list`⁶⁹³ [`str`⁶⁹⁴] = []

The list of MIME types of image formats supported by the builder. Image files are searched in the order in which they appear here.

supported_remote_images = `False`

The builder supports remote images or not.

supported_data_uri_images = `False`

The builder supports data URIs or not.

default_translator_class: `type`⁶⁹⁵ [`nodes.NodeVisitor`]

default translator class for the builder. This can be overridden by `set_translator()`.

These methods are predefined and will be called from the application:

get_relative_uri (`from_`: `str`⁶⁹⁶, `to`: `str`⁶⁹⁷, `typ`: `str`⁶⁹⁸ | `None`⁶⁹⁹ = `None`) → `str`⁷⁰⁰

Return a relative URI between two source filenames.

May raise `environment.NoUri` if there's no way to return a sensible URI.

build_all() → `None`⁷⁰¹

Build all source files.

⁶⁷⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁸⁰ <https://docs.python.org/3/library/functions.html#bool>
⁶⁸¹ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁸² <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁸³ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁸⁴ <https://docs.python.org/3/library/constants.html#None>
⁶⁸⁵ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁶⁸⁶ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁸⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁸⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁸⁹ <https://docs.python.org/3/library/constants.html#None>
⁶⁹⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁶⁹¹ <https://docs.python.org/3/library/functions.html#int>
⁶⁹² <https://docs.python.org/3/library/constants.html#None>

build_specific(*filenames*: *list*⁷⁰²[*str*⁷⁰³]) → *None*⁷⁰⁴

Only rebuild as much as needed for changes in the *filenames*.

build_update() → *None*⁷⁰⁵

Only rebuild what was changed or added since last build.

build(*docnames*: *Iterable*[*str*⁷⁰⁶] | *None*⁷⁰⁷, *summary*: *str*⁷⁰⁸ | *None*⁷⁰⁹ = *None*, *method*: *str*⁷¹⁰ = 'update') → *None*⁷¹¹

Main build method.

First updates the environment, and then calls `write()`.

These methods can be overridden in concrete builder classes:

init() → *None*⁷¹²

Load necessary templates and perform initialization. The default implementation does nothing.

get_outdated_docs() → *str*⁷¹³ | *Iterable*[*str*⁷¹⁴]

Return an iterable of output files that are outdated, or a string describing what an update build will build.

If the builder does not output individual files corresponding to source files, return a string here. If it does, return an iterable of those files that need to be written.

get_target_uri(*docname*: *str*⁷¹⁵, *typ*: *str*⁷¹⁶ | *None*⁷¹⁷ = *None*) → *str*⁷¹⁸

Return the target URI for a document name.

typ can be used to qualify the link characteristic for individual builders.

prepare_writing(*docnames*: *set*⁷¹⁹[*str*⁷²⁰]) → *None*⁷²¹

A place where you can add logic before `write_doc()` is run

write_doc(*docname*: *str*⁷²², *doctree*: *document*) → *None*⁷²³

Where you actually write something to the filesystem.

finish() → *None*⁷²⁴

Finish the building process.

The default implementation does nothing.

Attributes

events

An *EventManager* object.

Environment Collector API

class sphinx.environment.collectors.EnvironmentCollector

An EnvironmentCollector is a specific data collector from each document.

It gathers data and stores *BuildEnvironment* as a database. Examples of specific data would be images, download files, section titles, metadatas, index entries and toctrees, etc.

clear_doc(app: *Sphinx*, env: *BuildEnvironment*, docname: *str*⁷²⁵) → *None*⁷²⁶

Remove specified data of a document.

This method is called on the removal of the document.

get_outdated_docs(app: *Sphinx*, env: *BuildEnvironment*, added: *set*⁷²⁷[*str*⁷²⁸], changed: *set*⁷²⁹[*str*⁷³⁰], removed: *set*⁷³¹[*str*⁷³²]) → *list*⁷³³[*str*⁷³⁴]

Return a list of docnames to re-read.

This methods is called before reading the documents.

get_updated_docs(app: *Sphinx*, env: *BuildEnvironment*) → *list*⁷³⁵[*str*⁷³⁶]

Return a list of docnames to re-read.

This methods is called after reading the whole of documents (experimental).

merge_other(app: *Sphinx*, env: *BuildEnvironment*, docnames: *set*⁷³⁷[*str*⁷³⁸], other: *BuildEnvironment*) → *None*⁷³⁹

Merge in specified data regarding docnames from a different *BuildEnvironment* object which coming from a subprocess in parallel builds.

693 <https://docs.python.org/3/library/stdtypes.html#list>
 694 <https://docs.python.org/3/library/stdtypes.html#str>
 695 <https://docs.python.org/3/library/functions.html#type>
 696 <https://docs.python.org/3/library/stdtypes.html#str>
 697 <https://docs.python.org/3/library/stdtypes.html#str>
 698 <https://docs.python.org/3/library/stdtypes.html#str>
 699 <https://docs.python.org/3/library/constants.html#None>
 700 <https://docs.python.org/3/library/stdtypes.html#str>
 701 <https://docs.python.org/3/library/constants.html#None>
 702 <https://docs.python.org/3/library/stdtypes.html#list>
 703 <https://docs.python.org/3/library/stdtypes.html#str>
 704 <https://docs.python.org/3/library/constants.html#None>
 705 <https://docs.python.org/3/library/constants.html#None>
 706 <https://docs.python.org/3/library/stdtypes.html#str>
 707 <https://docs.python.org/3/library/constants.html#None>
 708 <https://docs.python.org/3/library/stdtypes.html#str>
 709 <https://docs.python.org/3/library/constants.html#None>
 710 <https://docs.python.org/3/library/stdtypes.html#str>
 711 <https://docs.python.org/3/library/constants.html#None>
 712 <https://docs.python.org/3/library/constants.html#None>
 713 <https://docs.python.org/3/library/stdtypes.html#str>
 714 <https://docs.python.org/3/library/stdtypes.html#str>
 715 <https://docs.python.org/3/library/stdtypes.html#str>
 716 <https://docs.python.org/3/library/stdtypes.html#str>
 717 <https://docs.python.org/3/library/constants.html#None>
 718 <https://docs.python.org/3/library/stdtypes.html#str>
 719 <https://docs.python.org/3/library/stdtypes.html#set>
 720 <https://docs.python.org/3/library/stdtypes.html#str>
 721 <https://docs.python.org/3/library/constants.html#None>
 722 <https://docs.python.org/3/library/stdtypes.html#str>
 723 <https://docs.python.org/3/library/constants.html#None>
 724 <https://docs.python.org/3/library/constants.html#None>

`process_doc(app: Sphinx, doctree: nodes.document) → None`⁷⁴⁰

Process a document and gather specific data from it.

This method is called after the document is read.

Docutils markup API

This section describes the API for adding ReST markup elements (roles and directives).

Roles

Directives

Directives are handled by classes derived from `docutils.parsers.rst.Directive`. They have to be registered by an extension using `Sphinx.add_directive()` or `Sphinx.add_directive_to_domain()`.

class `docutils.parsers.rst.Directive`

The markup syntax of the new directive is determined by the follow five class attributes:

required_arguments = 0

Number of required directive arguments.

optional_arguments = 0

Number of optional arguments after the required arguments.

final_argument_whitespace = False

May the final argument contain whitespace?

option_spec = None

Mapping of option names to validator functions.

Option validator functions take a single parameter, the option argument (or `None` if not given), and should validate it or convert it to the proper form. They raise `ValueError`⁷⁴¹ or `TypeError`⁷⁴² to indicate failure.

There are several predefined and possibly useful validators in the `docutils.parsers.rst.directives` module.

has_content = False

May the directive have content?

New directives must implement the `run()` method:

⁷²⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁷²⁶ <https://docs.python.org/3/library/constants.html#None>
⁷²⁷ <https://docs.python.org/3/library/stdtypes.html#set>
⁷²⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁷²⁹ <https://docs.python.org/3/library/stdtypes.html#set>
⁷³⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁷³¹ <https://docs.python.org/3/library/stdtypes.html#set>
⁷³² <https://docs.python.org/3/library/stdtypes.html#str>
⁷³³ <https://docs.python.org/3/library/stdtypes.html#list>
⁷³⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁷³⁵ <https://docs.python.org/3/library/stdtypes.html#list>
⁷³⁶ <https://docs.python.org/3/library/stdtypes.html#str>
⁷³⁷ <https://docs.python.org/3/library/stdtypes.html#set>
⁷³⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁷³⁹ <https://docs.python.org/3/library/constants.html#None>
⁷⁴⁰ <https://docs.python.org/3/library/constants.html#None>

run()

This method must process the directive arguments, options and content, and return a list of Docutils/Sphinx nodes that will be inserted into the document tree at the point where the directive was encountered.

Instance attributes that are always set on the directive are:

name

The directive name (useful when registering the same directive class under multiple names).

arguments

The arguments given to the directive, as a list.

options

The options given to the directive, as a dictionary mapping option names to validated/converted values.

content

The directive content, if given, as a `ViewList`.

lineno

The absolute line number on which the directive appeared. This is not always a useful value; use `srcline` instead.

content_offset

Internal offset of the directive content. Used when calling `nested_parse` (see below).

block_text

The string containing the entire directive.

state**state_machine**

The state and state machine which controls the parsing. Used for `nested_parse`.

ViewLists

Docutils represents document source lines in a class `docutils.statemachine.ViewList`. This is a list with extended functionality – for one, slicing creates views of the original list, and also the list contains information about the source line numbers.

The `Directive.content` attribute is a `ViewList`. If you generate content to be parsed as ReST, you have to create a `ViewList` yourself. Important for content generation are the following points:

- The constructor takes a list of strings (lines) and a source (document) name.
- The `.append()` method takes a line and a source name as well.

⁷⁴¹ <https://docs.python.org/3/library/exceptions.html#ValueError>

⁷⁴² <https://docs.python.org/3/library/exceptions.html#TypeError>

Parsing directive content as ReST

Many directives will contain more markup that must be parsed. To do this, use one of the following APIs from the `Directive.run()` method:

- `self.state.nested_parse`
- `sphinx.util.nodes.nested_parse_with_titles()` – this allows titles in the parsed content.

Both APIs parse the content into a given node. They are used like this:

```
node = docutils.nodes.paragraph()
# either
nested_parse_with_titles(self.state, self.result, node)
# or
self.state.nested_parse(self.result, 0, node)
```

Note: `sphinx.util.docutils.switch_source_input()` allows to change a target file during `nested_parse`. It is useful to mixed contents. For example, `sphinx.ext.autodoc` uses it to parse docstrings:

```
from sphinx.util.docutils import switch_source_input

# Switch source_input between parsing content.
# Inside this context, all parsing errors and warnings are reported as
# happened in new source_input (in this case, `self.result`).
with switch_source_input(self.state, self.result):
    node = docutils.nodes.paragraph()
    self.state.nested_parse(self.result, 0, node)
```

Deprecated since version 1.7: Until Sphinx 1.6, `sphinx.ext.autodoc.AutodocReporter` was used for this purpose. It is replaced by `switch_source_input()`.

If you don't need the wrapping node, you can use any concrete node type and return `node.children` from the Directive.

See also:

[Creating directives](#)⁷⁴³ HOWTO of the Docutils documentation

Domain API

class `sphinx.domains.Domain`(*env*: `BuildEnvironment`)

A Domain is meant to be a group of “object” description directives for objects of a similar nature, and corresponding roles to create references to them. Examples would be Python modules, classes, functions etc., elements of a templating language, Sphinx roles and directives, etc.

Each domain has a separate storage for information about existing objects and how to reference them in `self.data`, which must be a dictionary. It also must implement several functions that expose the object information in a uniform way to parts of Sphinx that allow the user to reference or search for objects in a domain-agnostic way.

About `self.data`: since all object and cross-referencing information is stored on a `BuildEnvironment` instance, the `domain.data` object is also stored in the `env.domaindata` dict under the key `domain.name`. Before the build process starts, every active domain is instantiated and given the environment object; the `domaindata` dict must then either be nonexistent or a dictionary whose ‘version’ key is equal to the domain class’ `data_version` attribute. Otherwise, `OSError` is raised and the pickled environment is discarded.

⁷⁴³ <https://docutils.sourceforge.io/docs/howto/rst-directives.html>

add_object_type(*name*: *str*⁷⁴⁴, *objtype*: *ObjType*) → *None*⁷⁴⁵

Add an object type.

check_consistency() → *None*⁷⁴⁶

Do consistency checks (**experimental**).

clear_doc(*docname*: *str*⁷⁴⁷) → *None*⁷⁴⁸

Remove traces of a document in the domain-specific inventories.

directive(*name*: *str*⁷⁴⁹) → *Callable*⁷⁵⁰ | *None*⁷⁵¹

Return a directive adapter class that always gives the registered directive its full name ('domain:name') as `self.name`.

get_enumerable_node_type(*node*: *Node*) → *str*⁷⁵² | *None*⁷⁵³

Get type of enumerable nodes (**experimental**).

get_full_qualified_name(*node*: *Element*) → *str*⁷⁵⁴ | *None*⁷⁵⁵

Return full qualified name for given node.

get_objects() → *Iterable*[*tuple*⁷⁵⁶[*str*⁷⁵⁷, *str*⁷⁵⁸, *str*⁷⁵⁹, *str*⁷⁶⁰, *str*⁷⁶¹, *int*⁷⁶²]]

Return an iterable of "object descriptions".

Object descriptions are tuples with six items:

name

Fully qualified name.

dispname

Name to display when searching/linking.

type

Object type, a key in `self.object_types`.

docname

The document where it is to be found.

anchor

The anchor name for the object.

priority

How "important" the object is (determines placement in search results). One of:

1

Default priority (placed before full-text matches).

0

Object is important (placed before default-priority objects).

2

Object is unimportant (placed after full-text matches).

-1

Object should not show up in search at all.

get_type_name(*type*: *ObjType*, *primary*: *bool*⁷⁶³ = *False*) → *str*⁷⁶⁴

Return full name for given *ObjType*.

merge_domaindata(*docnames*: *list*⁷⁶⁵[*str*⁷⁶⁶], *otherdata*: *dict*⁷⁶⁷[*str*⁷⁶⁸, *Any*⁷⁶⁹]) → *None*⁷⁷⁰

Merge in data regarding *docnames* from a different domaindata inventory (coming from a subprocess in parallel builds).

process_doc(*env*: BuildEnvironment, *docname*: str⁷⁷¹, *document*: nodes.document) → None⁷⁷²

Process a document after it is read by the environment.

process_field_xref(*pnode*: pending_xref) → None⁷⁷³

Process a pending xref created in a doc field. For example, attach information about the current scope.

resolve_any_xref(*env*: BuildEnvironment, *fromdocname*: str⁷⁷⁴, *builder*: Builder, *target*: str⁷⁷⁵, *node*: pending_xref, *contnode*: Element) → list⁷⁷⁶[tuple⁷⁷⁷[str⁷⁷⁸, Element]]

Resolve the pending_xref *node* with the given *target*.

The reference comes from an “any” or similar role, which means that we don’t know the type. Otherwise, the arguments are the same as for [resolve_xref\(\)](#).

The method must return a list (potentially empty) of tuples ('domain:role', newnode), where 'domain:role' is the name of a role that could have created the same reference, e.g. 'py:func'. newnode is what [resolve_xref\(\)](#) would return.

Added in version 1.3.

resolve_xref(*env*: BuildEnvironment, *fromdocname*: str⁷⁷⁹, *builder*: Builder, *typ*: str⁷⁸⁰, *target*: str⁷⁸¹, *node*: pending_xref, *contnode*: Element) → Element | None⁷⁸²

Resolve the pending_xref *node* with the given *typ* and *target*.

This method should return a new node, to replace the xref node, containing the *contnode* which is the markup content of the cross-reference.

If no resolution can be found, None can be returned; the xref node will then given to the [missing-reference](#) event, and if that yields no resolution, replaced by *contnode*.

The method can also raise sphinx.environment.NoUri to suppress the [missing-reference](#) event being emitted.

role(*name*: str⁷⁸³) → RoleFunction | None⁷⁸⁴

Return a role adapter function that always gives the registered role its full name ('domain:name') as the first argument.

setup() → None⁷⁸⁵

Set up domain object.

dangling_warnings: dict⁷⁸⁶[str⁷⁸⁷, str⁷⁸⁸] = {}

role name -> a warning message if reference is missing

data: dict⁷⁸⁹

data value

data_version = 0

data version, bump this when the format of *self.data* changes

directives: dict⁷⁹⁰[str⁷⁹¹, type⁷⁹²[Directive]] = {}

directive name -> directive class

enumerable_nodes: dict⁷⁹³[type⁷⁹⁴[Node], tuple⁷⁹⁵[str⁷⁹⁶, TitleGetter | None⁷⁹⁷]] = {}

node_class -> (enum_node_type, title_getter)

indices: list⁷⁹⁸[type⁷⁹⁹[Index]] = []

a list of Index subclasses

initial_data: dict⁸⁰⁰ = {}

data value for a fresh environment

```
label = ''
    domain label: longer, more descriptive (used in messages)
name = ''
    domain name: should be short, but unique
object_types: dict801[str802, ObjType] = {}
    type (usually directive) name -> ObjType instance
roles: dict803[str804, RoleFunction | XRefRole] = {}
    role name -> role callable
```

class sphinx.domains.ObjType(lname: *str*⁸⁰⁵, *roles: *Any*⁸⁰⁶, **attrs: *Any*⁸⁰⁷)

An ObjType is the description for a type of object that a domain can document. In the object_types attribute of Domain subclasses, object type names are mapped to instances of this class.

```
744 https://docs.python.org/3/library/stdtypes.html#str
745 https://docs.python.org/3/library/constants.html#None
746 https://docs.python.org/3/library/constants.html#None
747 https://docs.python.org/3/library/stdtypes.html#str
748 https://docs.python.org/3/library/constants.html#None
749 https://docs.python.org/3/library/stdtypes.html#str
750 https://docs.python.org/3/library/typing.html#typing.Callable
751 https://docs.python.org/3/library/constants.html#None
752 https://docs.python.org/3/library/stdtypes.html#str
753 https://docs.python.org/3/library/constants.html#None
754 https://docs.python.org/3/library/stdtypes.html#str
755 https://docs.python.org/3/library/constants.html#None
756 https://docs.python.org/3/library/stdtypes.html#tuple
757 https://docs.python.org/3/library/stdtypes.html#str
758 https://docs.python.org/3/library/stdtypes.html#str
759 https://docs.python.org/3/library/stdtypes.html#str
760 https://docs.python.org/3/library/stdtypes.html#str
761 https://docs.python.org/3/library/stdtypes.html#str
762 https://docs.python.org/3/library/functions.html#int
763 https://docs.python.org/3/library/functions.html#bool
764 https://docs.python.org/3/library/stdtypes.html#str
765 https://docs.python.org/3/library/stdtypes.html#list
766 https://docs.python.org/3/library/stdtypes.html#str
767 https://docs.python.org/3/library/stdtypes.html#dict
768 https://docs.python.org/3/library/stdtypes.html#str
769 https://docs.python.org/3/library/typing.html#typing.Any
770 https://docs.python.org/3/library/constants.html#None
771 https://docs.python.org/3/library/stdtypes.html#str
772 https://docs.python.org/3/library/constants.html#None
773 https://docs.python.org/3/library/constants.html#None
774 https://docs.python.org/3/library/stdtypes.html#str
775 https://docs.python.org/3/library/stdtypes.html#str
776 https://docs.python.org/3/library/stdtypes.html#list
777 https://docs.python.org/3/library/stdtypes.html#tuple
778 https://docs.python.org/3/library/stdtypes.html#str
779 https://docs.python.org/3/library/stdtypes.html#str
780 https://docs.python.org/3/library/stdtypes.html#str
781 https://docs.python.org/3/library/stdtypes.html#str
782 https://docs.python.org/3/library/constants.html#None
783 https://docs.python.org/3/library/stdtypes.html#str
784 https://docs.python.org/3/library/constants.html#None
785 https://docs.python.org/3/library/constants.html#None
786 https://docs.python.org/3/library/stdtypes.html#dict
787 https://docs.python.org/3/library/stdtypes.html#str
788 https://docs.python.org/3/library/stdtypes.html#str
789 https://docs.python.org/3/library/stdtypes.html#dict
790 https://docs.python.org/3/library/stdtypes.html#dict
791 https://docs.python.org/3/library/stdtypes.html#str
792 https://docs.python.org/3/library/functions.html#type
793 https://docs.python.org/3/library/stdtypes.html#dict
794 https://docs.python.org/3/library/functions.html#type
795 https://docs.python.org/3/library/stdtypes.html#tuple
796 https://docs.python.org/3/library/stdtypes.html#str
797 https://docs.python.org/3/library/constants.html#None
798 https://docs.python.org/3/library/stdtypes.html#list
799 https://docs.python.org/3/library/functions.html#type
800 https://docs.python.org/3/library/stdtypes.html#dict
801 https://docs.python.org/3/library/stdtypes.html#dict
802 https://docs.python.org/3/library/stdtypes.html#str
803 https://docs.python.org/3/library/stdtypes.html#dict
804 https://docs.python.org/3/library/stdtypes.html#str
```

Constructor arguments:

- *lname*: localized name of the type (do not include domain name)
- *roles*: all the roles that can refer to an object of this type
- *attrs*: object attributes – currently only “searchprio” is known, which defines the object’s priority in the full-text search index, see [Domain.get_objects\(\)](#).

class sphinx.domains.Index(domain: Domain)

An Index is the description for a domain-specific index. To add an index to a domain, subclass Index, overriding the three name attributes:

- *name* is an identifier used for generating file names. It is also used for a hyperlink target for the index. Therefore, users can refer the index page using ref role and a string which is combined domain name and name attribute (ex. :ref: `py-modindex`).
- *localname* is the section title for the index.
- *shortname* is a short name for the index, for use in the relation bar in HTML output. Can be empty to disable entries in the relation bar.

and providing a [generate\(\)](#) method. Then, add the index class to your domain’s *indices* list. Extensions can add indices to existing domains using [add_index_to_domain\(\)](#).

Changed in version 3.0: Index pages can be referred by domain name and index name via [ref](#) role.

abstract generate(docnames: Iterable[str⁸⁰⁵] | None⁸⁰⁶ = None) → tuple⁸¹⁰[list⁸¹¹[tuple⁸¹²[str⁸¹³, list⁸¹⁴[IndexEntry]]], bool⁸¹⁵]

Get entries for the index.

If docnames is given, restrict to entries referring to these docnames.

The return value is a tuple of (content, collapse):

collapse

A boolean that determines if sub-entries should start collapsed (for output formats that support collapsing sub-entries).

content:

A sequence of (letter, entries) tuples, where letter is the “heading” for the given entries, usually the starting letter, and entries is a sequence of single entries. Each entry is a sequence [name, subtype, docname, anchor, extra, qualifier, descr]. The items in this sequence have the following meaning:

name

The name of the index entry to be displayed.

subtype

The sub-entry related type. One of:

0

A normal entry.

1

An entry with sub-entries.

2

A sub-entry.

⁸⁰⁵ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁰⁶ <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁰⁷ <https://docs.python.org/3/library/typing.html#typing.Any>

docname

docname where the entry is located.

anchor

Anchor for the entry within *docname*

extra

Extra info for the entry.

qualifier

Qualifier for the description.

descr

Description for the entry.

Qualifier and description are not rendered for some output formats such as LaTeX.

class `sphinx.directives.ObjectDescription`(*name*, *arguments*, *options*, *content*, *lineno*, *content_offset*,
block_text, *state*, *state_machine*)

Directive to describe a class, function or similar object. Not used directly, but subclassed (in domain-specific directives) to add custom behavior.

_object_hierarchy_parts(*sig_node*: *desc_signature*) → `tuple`⁸¹⁶[`str`⁸¹⁷, ...]

Returns a tuple of strings, one entry for each part of the object's hierarchy (e.g. ('module', 'submodule', 'Class', 'method')). The returned tuple is used to properly nest children within parents in the table of contents, and can also be used within the `_toc_entry_name()` method.

This method must not be used outwith table of contents generation.

_toc_entry_name(*sig_node*: *desc_signature*) → `str`⁸¹⁸

Returns the text of the table of contents entry for the object.

This function is called once, in `run()`, to set the name for the table of contents entry (a special attribute `_toc_name` is set on the object node, later used in `environment.collectors.tocTree.TocTreeCollector.process_doc().build_toc()` when the table of contents entries are collected).

To support table of contents entries for their objects, domains must override this method, also respecting the configuration setting `toc_object_entries_show_parents`. Domains must also override `_object_hierarchy_parts()`, with one (string) entry for each part of the object's hierarchy. The result of this method is set on the signature node, and can be accessed as `sig_node['_toc_parts']` for use within this method. The resulting tuple is also used to properly nest children within parents in the table of contents.

An example implementations of this method is within the python domain (`PyObject._toc_entry_name()`). The python domain sets the `_toc_parts` attribute within the `handle_signature()` method.

add_target_and_index(*name*: *ObjDescT*, *sig*: `str`⁸¹⁹, *signode*: *desc_signature*) → `None`⁸²⁰

Add cross-reference IDs and entries to `self.indexnode`, if applicable.

name is whatever `handle_signature()` returned.

⁸⁰⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁰⁹ <https://docs.python.org/3/library/constants.html#None>
⁸¹⁰ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁸¹¹ <https://docs.python.org/3/library/stdtypes.html#list>
⁸¹² <https://docs.python.org/3/library/stdtypes.html#tuple>
⁸¹³ <https://docs.python.org/3/library/stdtypes.html#str>
⁸¹⁴ <https://docs.python.org/3/library/stdtypes.html#list>
⁸¹⁵ <https://docs.python.org/3/library/functions.html#bool>

after_content() → `None`⁸²¹

Called after parsing content. Used to reset information about the current directive context on the build environment.

before_content() → `None`⁸²²

Called before parsing content. Used to set information about the current directive context on the build environment.

get_signatures() → `list`⁸²³[`str`⁸²⁴]

Retrieve the signatures to document from the directive arguments. By default, signatures are given as arguments, one per line.

handle_signature(*sig*: `str`⁸²⁵, *signode*: `desc_signature`) → `ObjDescT`

Parse the signature *sig* into individual nodes and append them to *signode*. If `ValueError` is raised, parsing is aborted and the whole *sig* is put into a single `desc_name` node.

The return value should be a value that identifies the object. It is passed to `add_target_and_index()` unchanged, and otherwise only used to skip duplicates.

run() → `list`⁸²⁶[`Node`]

Main directive entry function, called by docutils upon encountering the directive.

This directive is meant to be quite easily subclassable, so it delegates to several additional methods. What it does:

- find out if called as a domain-specific directive, set `self.domain`
- create a `desc` node to fit all description inside
- parse standard options, currently *no-index*
- create an index node if needed as `self.indexnode`
- parse all given signatures (as returned by `self.get_signatures()`) using `self.handle_signature()`, which should either return a name or raise `ValueError`
- add index entries using `self.add_target_and_index()`
- parse the content and handle doc fields in it

transform_content(*contentnode*: `desc_content`) → `None`⁸²⁷

Called after creating the content through nested parsing, but before the `object-description-transform` event is emitted, and before the `info-fields` are transformed. Can be used to manipulate the content.

final_argument_whitespace = True

May the final argument contain whitespace?

has_content = True

May the directive have content?

```
option_spec: ClassVar828[dict829[str830, Callable831[[str832], Any833]]] =
{'no-contents-entry': <function flag>, 'no-index': <function flag>,
'no-index-entry': <function flag>, 'no-typesetting': <function flag>,
'nocontentsentry': <function flag>, 'noindex': <function flag>, 'noindexentry':
<function flag>}
```

Mapping of option names to validator functions.

optional_arguments = 0

Number of optional arguments after the required arguments.

required_arguments = 1

Number of required directive arguments.

Python Domain

class sphinx.domains.python.**PythonDomain**(*env*: BuildEnvironment)

Python language domain.

objects

modules

note_object(*name*: [str](#)⁸³⁴, *objtype*: [str](#)⁸³⁵, *node_id*: [str](#)⁸³⁶, *aliased*: [bool](#)⁸³⁷ = False, *location*: [Any](#)⁸³⁸ = None) → None⁸³⁹

Note a python object for cross reference.

Added in version 2.1.

note_module(*name*: [str](#)⁸⁴⁰, *node_id*: [str](#)⁸⁴¹, *synopsis*: [str](#)⁸⁴², *platform*: [str](#)⁸⁴³, *deprecated*: [bool](#)⁸⁴⁴) → None⁸⁴⁵

Note a python module for cross reference.

Added in version 2.1.

⁸¹⁶ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁸¹⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁸¹⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁸¹⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁸²⁰ <https://docs.python.org/3/library/constants.html#None>
⁸²¹ <https://docs.python.org/3/library/constants.html#None>
⁸²² <https://docs.python.org/3/library/constants.html#None>
⁸²³ <https://docs.python.org/3/library/stdtypes.html#list>
⁸²⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁸²⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁸²⁶ <https://docs.python.org/3/library/stdtypes.html#list>
⁸²⁷ <https://docs.python.org/3/library/constants.html#None>
⁸²⁸ <https://docs.python.org/3/library/typing.html#typing.ClassVar>
⁸²⁹ <https://docs.python.org/3/library/stdtypes.html#dict>
⁸³⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁸³¹ <https://docs.python.org/3/library/typing.html#typing.Callable>
⁸³² <https://docs.python.org/3/library/stdtypes.html#str>
⁸³³ <https://docs.python.org/3/library/typing.html#typing.Any>
⁸³⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁸³⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁸³⁶ <https://docs.python.org/3/library/stdtypes.html#str>
⁸³⁷ <https://docs.python.org/3/library/functions.html#bool>
⁸³⁸ <https://docs.python.org/3/library/typing.html#typing.Any>
⁸³⁹ <https://docs.python.org/3/library/constants.html#None>
⁸⁴⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁴¹ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁴² <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁴³ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁴⁴ <https://docs.python.org/3/library/functions.html#bool>
⁸⁴⁵ <https://docs.python.org/3/library/constants.html#None>

Parser API

The [docutils documentation](#) describes⁸⁴⁶ parsers as follows:

The Parser analyzes the input document and creates a node tree representation.

In Sphinx, the parser modules works as same as docutils. The parsers are registered to Sphinx by extensions using Application APIs; `Sphinx.add_source_suffix()` and `Sphinx.add_source_parser()`.

The *source suffix* is a mapping from file suffix to file type. For example, `.rst` file is mapped to `'restructuredtext'` type. Sphinx uses the file type to looking for parsers from registered list. On searching, Sphinx refers to the `Parser.supported` attribute and picks up a parser which contains the file type in the attribute.

The users can override the source suffix mappings using *source_suffix* like following:

```
# a mapping from file suffix to file types
source_suffix = {
    '.rst': 'restructuredtext',
    '.md': 'markdown',
}
```

You should indicate file types your parser supports. This will allow users to configure their settings appropriately.

`class sphinx.parsers.Parser`

A base class of source parsers. The additional parsers should inherit this class instead of `docutils.parsers.Parser`. Compared with `docutils.parsers.Parser`, this class improves accessibility to Sphinx APIs.

The subclasses can access sphinx core runtime objects (`app`, `config` and `env`).

set_application(*app*: `Sphinx`) → `None`⁸⁴⁷

`set_application` will be called from Sphinx to set `app` and other instance variables

Parameters

app (`sphinx.application.Sphinx`) – Sphinx application object

config: `Config`

The config object

env: `BuildEnvironment`

The environment object

Doctree node classes added by Sphinx

Nodes for domain-specific object descriptions

Top-level nodes

These nodes form the top-most levels of object descriptions.

class sphinx.addnodes.desc(*rawsource*="", **children*, ***attributes*)

Node for a list of object signatures and a common description of them.

Contains one or more *desc_signature* nodes and then a single *desc_content* node.

This node always has two classes:

⁸⁴⁶ <https://docutils.sourceforge.io/docs/dev/hacking.html#parsing-the-document>

⁸⁴⁷ <https://docs.python.org/3/library/constants.html#None>

- The name of the domain it belongs to, e.g., `py` or `cpp`.
- The name of the object type in the domain, e.g., `function`.

class `sphinx.addnodes.desc_signature(*args: Any848, **kwargs: Any849)`

Node for a single object signature.

As default the signature is a single-line signature. Set `is_multiline = True` to describe a multi-line signature. In that case all child nodes must be `desc_signature_line` nodes.

This node always has the classes `sig`, `sig-object`, and the domain it belongs to.

class `sphinx.addnodes.desc_signature_line(rawsource="", text="", *children, **attributes)`

Node for a line in a multi-line object signature.

It should only be used as a child of a `desc_signature` with `is_multiline` set to `True`. Set `add_permalink = True` for the line that should get the permalink.

class `sphinx.addnodes.desc_content(rawsource="", *children, **attributes)`

Node for object description content.

Must be the last child node in a `desc` node.

class `sphinx.addnodes.desc_inline(domain: str850, *args: Any851, **kwargs: Any852)`

Node for a signature fragment in inline text.

This is for example used for roles like `cpp:expr`.

This node always has the classes `sig`, `sig-inline`, and the name of the domain it belongs to.

Nodes for high-level structure in signatures

These nodes occur in in non-multiline `desc_signature` nodes and in `desc_signature_line` nodes.

class `sphinx.addnodes.desc_name(*args: Any853, **kwargs: Any854)`

Node for the main object name.

For example, in the declaration of a Python class `MyModule.MyClass`, the main name is `MyClass`.

This node always has the class `sig-name`.

class `sphinx.addnodes.desc_addname(*args: Any855, **kwargs: Any856)`

Node for additional name parts for an object.

For example, in the declaration of a Python class `MyModule.MyClass`, the additional name part is `MyModule..`

This node always has the class `sig-prename`.

class `sphinx.addnodes.desc_type(rawsource="", text="", *children, **attributes)`

Node for return type or object type names.

⁸⁴⁸ <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁴⁹ <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁵⁰ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁵¹ <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁵² <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁵³ <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁵⁴ <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁵⁵ <https://docs.python.org/3/library/typing.html#typing.Any>

⁸⁵⁶ <https://docs.python.org/3/library/typing.html#typing.Any>

```
class sphinx.addnodes.desc_returns(rawsource="", text="", *children, **attributes)
```

Node for a “returns” annotation (a la -> in Python).

```
class sphinx.addnodes.desc_parameterlist(rawsource="", text="", *children, **attributes)
```

Node for a general parameter list.

As default the parameter list is written in line with the rest of the signature. Set `multi_line_parameter_list = True` to describe a multi-line parameter list. In that case each parameter will then be written on its own, indented line.

```
class sphinx.addnodes.desc_parameter(rawsource="", text="", *children, **attributes)
```

Node for a single parameter.

```
class sphinx.addnodes.desc_optional(rawsource="", text="", *children, **attributes)
```

Node for marking optional parts of the parameter list.

```
class sphinx.addnodes.desc_annotation(rawsource="", text="", *children, **attributes)
```

Node for signature annotations (not Python 3-style annotations).

Nodes for signature text elements

These nodes inherit `desc_sig_element` and are generally translated to `docutils.nodes.inline` by `SigElementFallbackTransform`.

Extensions may create additional `desc_sig_*`-like nodes but in order for `SigElementFallbackTransform` to translate them to inline nodes automatically, they must be added to `SIG_ELEMENTS` via the class keyword argument `_sig_element=True` of `desc_sig_element`, e.g.:

```
class desc_custom_sig_node(desc_sig_element, _sig_element=True): ...
```

For backwards compatibility, it is still possible to add the nodes directly using `SIG_ELEMENTS.add(desc_custom_sig_node)`.

```
sphinx.addnodes.SIG_ELEMENTS: set857[type858[desc_sig_element]]
```

A set of classes inheriting `desc_sig_element`. Each node class is expected to be handled by the builder’s translator class if the latter does not inherit from `SphinxTranslator`.

This set can be extended manually by third-party extensions or by subclassing `desc_sig_element` and using the class keyword argument `_sig_element=True`.

```
class sphinx.addnodes.desc_sig_element(rawsource: str859 = "", text: str860 = "", *children: Element,
                                     **attributes: Any)
```

Common parent class of nodes for inline text of a signature.

```
class sphinx.addnodes.desc_sig_space(rawsource: str861 = "", text: str862 = ' ', *children: Element,
                                   **attributes: Any)
```

Node for a space in a signature.

```
class sphinx.addnodes.desc_sig_name(rawsource: str863 = "", text: str864 = "", *children: Element,
                                   **attributes: Any)
```

Node for an identifier in a signature.

⁸⁵⁷ <https://docs.python.org/3/library/stdtypes.html#set>

⁸⁵⁸ <https://docs.python.org/3/library/functions.html#type>

⁸⁵⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶⁰ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶¹ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶² <https://docs.python.org/3/library/stdtypes.html#str>

```
class sphinx.addnodes.desc_sig_operator(rawsource: str865 = "", text: str866 = "", *children: Element,  
                                     **attributes: Any)
```

Node for an operator in a signature.

```
class sphinx.addnodes.desc_sig_punctuation(rawsource: str867 = "", text: str868 = "", *children: Element,  
                                         **attributes: Any)
```

Node for punctuation in a signature.

```
class sphinx.addnodes.desc_sig_keyword(rawsource: str869 = "", text: str870 = "", *children: Element,  
                                     **attributes: Any)
```

Node for a general keyword in a signature.

```
class sphinx.addnodes.desc_sig_keyword_type(rawsource: str871 = "", text: str872 = "", *children: Element,  
                                           **attributes: Any)
```

Node for a keyword which is a built-in type in a signature.

```
class sphinx.addnodes.desc_sig_literal_number(rawsource: str873 = "", text: str874 = "", *children:  
                                             Element, **attributes: Any)
```

Node for a numeric literal in a signature.

```
class sphinx.addnodes.desc_sig_literal_string(rawsource: str875 = "", text: str876 = "", *children:  
                                             Element, **attributes: Any)
```

Node for a string literal in a signature.

```
class sphinx.addnodes.desc_sig_literal_char(rawsource: str877 = "", text: str878 = "", *children: Element,  
                                           **attributes: Any)
```

Node for a character literal in a signature.

New admonition-like constructs

```
class sphinx.addnodes.versionmodified(rawsource="", text="", *children, **attributes)
```

Node for version change entries.

Currently used for “versionadded”, “versionchanged”, “deprecated” and “versionremoved” directives.

```
class sphinx.addnodes.seealso(rawsource="", *children, **attributes)
```

Custom “see also” admonition.

⁸⁶³ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶⁴ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶⁵ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶⁶ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶⁷ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶⁸ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁶⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷⁰ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷¹ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷² <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷³ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷⁴ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷⁵ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷⁶ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷⁷ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁷⁸ <https://docs.python.org/3/library/stdtypes.html#str>

Other paragraph-level nodes

class sphinx.addnodes.compact_paragraph(*rawsource*="", *text*="", **children*, ***attributes*)

Node for a compact paragraph (which never makes a <p> node).

New inline nodes

class sphinx.addnodes.index(*rawsource*="", *text*="", **children*, ***attributes*)

Node for index entries.

This node is created by the `index` directive and has one attribute, `entries`. Its value is a list of 5-tuples of (entrytype, entryname, target, ignored, key).

entrytype is one of “single”, “pair”, “double”, “triple”.

key is categorization characters (usually a single character) for general index page. For the details of this, please see also: [glossary](#) and issue #2320.

class sphinx.addnodes.pending_xref(*rawsource*="", **children*, ***attributes*)

Node for cross-references that cannot be resolved without complete information about all documents.

These nodes are resolved before writing output, in `BuildEnvironment.resolve_references`.

class sphinx.addnodes.pending_xref_condition(*rawsource*="", *text*="", **children*, ***attributes*)

Node representing a potential way to create a cross-reference and the condition in which this way should be used.

This node is only allowed to be placed under a `pending_xref` node. A `pending_xref` node must contain either no `pending_xref_condition` nodes or it must only contains `pending_xref_condition` nodes.

The cross-reference resolver will replace a `pending_xref` which contains `pending_xref_condition` nodes by the content of exactly one of those `pending_xref_condition` nodes’ content. It uses the `condition` attribute to decide which `pending_xref_condition` node’s content to use. For example, let us consider how the cross-reference resolver acts on:

```
<pending_xref refdomain="py" reftarget="io.StringIO ...>
  <pending_xref_condition condition="resolved">
    <literal>
      StringIO
    <pending_xref_condition condition="">
      <literal>
        io.StringIO
```

If the cross-reference resolver successfully resolves the cross-reference, then it rewrites the `pending_xref` as:

```
<reference>
  <literal>
    StringIO
```

Otherwise, if the cross-reference resolution failed, it rewrites the `pending_xref` as:

```
<reference>
  <literal>
    io.StringIO
```

The `pending_xref_condition` node should have `condition` attribute. Domains can store their individual conditions into the attribute to filter contents on resolving phase. As a reserved condition name,

`condition=""` is used for the fallback of resolution failure. Additionally, as a recommended condition name, `condition="resolved"` represents a resolution success in the intersphinx module.

Added in version 4.0.

class `sphinx.addnodes.literal_emphasis`(*rawsource=""*, *text=""*, **children*, ***attributes*)

Node that behaves like *emphasis*, but further text processors are not applied (e.g. *smartypants* for HTML output).

class `sphinx.addnodes.download_reference`(*rawsource=""*, *text=""*, **children*, ***attributes*)

Node for download references, similar to `pending_xref`.

Special nodes

class `sphinx.addnodes.only`(*rawsource=""*, **children*, ***attributes*)

Node for “only” directives (conditional inclusion based on tags).

class `sphinx.addnodes.highlightlang`(*rawsource=""*, **children*, ***attributes*)

Inserted to set the highlight language and line number options for subsequent code blocks.

You should not need to generate the nodes below in extensions.

class `sphinx.addnodes.glossary`(*rawsource=""*, **children*, ***attributes*)

Node to insert a glossary.

class `sphinx.addnodes.tocentry`(*rawsource=""*, **children*, ***attributes*)

Node for inserting a “TOC tree”.

class `sphinx.addnodes.start_of_file`(*rawsource=""*, **children*, ***attributes*)

Node to mark start of a new file, used in the LaTeX builder only.

class `sphinx.addnodes.productionlist`(*rawsource=""*, **children*, ***attributes*)

Node for grammar production lists.

Contains production nodes.

class `sphinx.addnodes.production`(*rawsource=""*, *text=""*, **children*, ***attributes*)

Node for a single grammar production rule.

Logging API

`sphinx.util.logging.getLogger`(*name*)

Get logger wrapped by `sphinx.util.logging.SphinxLoggerAdapter`.

Sphinx logger always uses `sphinx.*` namespace to be independent from settings of root logger. It ensures logging is consistent even if a third-party extension or imported application resets logger settings.

Example usage:

```
>>> from sphinx.util import logging
>>> logger = logging.getLogger(__name__)
>>> logger.info('Hello, this is an extension!')
Hello, this is an extension!
```

class `sphinx.util.logging.SphinxLoggerAdapter`(*logging.LoggerAdapter*)

`LoggerAdapter` allowing type and subtype keywords.

error(*msg*, **args*, ***kwargs*)

critical(*msg*, **args*, ***kwargs*)

warning(*msg*, **args*, ***kwargs*)

Logs a message on this logger with the specified level. Basically, the arguments are as with python's logging module.

In addition, Sphinx logger supports following keyword arguments:

type, ***subtype***

Categories of warning logs. It is used to suppress warnings by [suppress_warnings](#) setting.

location

Where the warning happened. It is used to include the path and line number in each log. It allows docname, tuple of docname and line number and nodes:

```
logger = sphinx.util.logging.getLogger(__name__)
logger.warning('Warning happened!', location='index')
logger.warning('Warning happened!', location=('chapter1/index', 10))
logger.warning('Warning happened!', location=some_node)
```

color

The color of logs. By default, error level logs are colored as "darkred", critical level ones is not colored, and warning level ones are colored as "red".

log(*level*, *msg*, **args*, ***kwargs*)

info(*msg*, **args*, ***kwargs*)

verbose(*msg*, **args*, ***kwargs*)

debug(*msg*, **args*, ***kwargs*)

Logs a message to this logger with the specified level. Basically, the arguments are as with python's logging module.

In addition, Sphinx logger supports following keyword arguments:

nonl

If true, the logger does not fold lines at the end of the log message. The default is False.

location

Where the message emitted. For more detail, see [SphinxLoggerAdapter.warning\(\)](#).

color

The color of logs. By default, info and verbose level logs are not colored, and debug level ones are colored as "darkgray".

`sphinx.util.logging.pending_logging()`

Context manager to postpone logging all logs temporarily.

For example:

```
>>> with pending_logging():
>>>     logger.warning('Warning message!') # not flushed yet
>>>     some_long_process()
>>>
Warning message! # the warning is flushed here
```

`sphinx.util.logging.pending_warnings()`

Context manager to postpone logging warnings temporarily.

Similar to `pending_logging()`.

`sphinx.util.logging.prefixed_warnings()`

Context manager to prepend prefix to all warning log records temporarily.

For example:

```
>>> with prefixed_warnings("prefix:"):
>>>     logger.warning('Warning message!') # => prefix: Warning message!
```

Added in version 2.0.

i18n API

`sphinx.locale.init(locale_dirs: Iterable[str879 | None880], language: str881 | None882, catalog: str883 = 'sphinx', namespace: str884 = 'general') → tuple885[NullTranslations, bool886]`

Look for message catalogs in *locale_dirs* and *ensure* that there is at least a `NullTranslations` catalog set in *translators*. If called multiple times or if several `.mo` files are found, their contents are merged together (thus making `init` reentrant).

`sphinx.locale.init_console(locale_dir: str887 | None888 = None, catalog: str889 = 'sphinx') → tuple890[NullTranslations891, bool892]`

Initialize locale for console.

Added in version 1.8.

`sphinx.locale.get_translation(catalog: str893, namespace: str894 = 'general') → Callable[[str895], str896]`

Get a translation function based on the *catalog* and *namespace*.

The extension can use this API to translate the messages on the extension:

```
import os
from sphinx.locale import get_translation

MESSAGE_CATALOG_NAME = 'myextension' # name of *.pot, *.po and *.mo files
_ = get_translation(MESSAGE_CATALOG_NAME)
text = _('Hello Sphinx!')

def setup(app):
```

(continues on next page)

⁸⁷⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁸⁰ <https://docs.python.org/3/library/constants.html#None>

⁸⁸¹ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁸² <https://docs.python.org/3/library/constants.html#None>

⁸⁸³ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁸⁴ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁸⁵ <https://docs.python.org/3/library/stdtypes.html#tuple>

⁸⁸⁶ <https://docs.python.org/3/library/functions.html#bool>

⁸⁸⁷ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁸⁸ <https://docs.python.org/3/library/constants.html#None>

⁸⁸⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁸⁹⁰ <https://docs.python.org/3/library/stdtypes.html#tuple>

⁸⁹¹ <https://docs.python.org/3/library/gettext.html#gettext.NullTranslations>

⁸⁹² <https://docs.python.org/3/library/functions.html#bool>

(continued from previous page)

```
package_dir = os.path.abspath(os.path.dirname(__file__))
locale_dir = os.path.join(package_dir, 'locales')
app.add_message_catalog(MESSAGE_CATALOG_NAME, locale_dir)
```

With this code, sphinx searches a message catalog from `${package_dir}/locales/${language}/LC_MESSAGES/myextension.mo`. The `language` is used for the searching.

Added in version 1.8.

`sphinx.locale._(message: str897) → str898`

Translation function for messages on documentation (menu, labels, themes and so on). This function follows `language` setting.

`sphinx.locale.__(message: str899) → str900`

Translation function for console messages This function follows locale setting (`LC_ALL`, `LC_MESSAGES` and so on).

Extension internationalization (i18n) and localization (l10n) using i18n API

Added in version 1.8.

An extension may naturally come with message translations. This is briefly summarized in `sphinx.locale.get_translation()` help.

In practice, you have to:

1. Choose a name for your message catalog, which must be unique. Usually the name of your extension is used for the name of message catalog.
2. Mark in your extension sources all messages as translatable, via `sphinx.locale.get_translation()` function, usually renamed `_()`, e.g.:

Listing 1: `src/__init__.py`

```
from sphinx.locale import get_translation

MESSAGE_CATALOG_NAME = 'myextension'
_ = get_translation(MESSAGE_CATALOG_NAME)

translated_text = _('Hello Sphinx!')
```

3. Set up your extension to be aware of its dedicated translations:

Listing 2: `src/__init__.py`

```
def setup(app):
    package_dir = path.abspath(path.dirname(__file__))
```

(continues on next page)

⁸⁹³ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁹⁴ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁹⁵ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁹⁶ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁹⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁹⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁸⁹⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁹⁰⁰ <https://docs.python.org/3/library/stdtypes.html#str>

(continued from previous page)

```
locale_dir = os.path.join(package_dir, 'locales')
app.add_message_catalog(MESSAGE_CATALOG_NAME, locale_dir)
```

4. Generate message catalog template *.pot file, usually in locale/ source directory, for example via [Babel](#)⁹⁰¹:

```
$ pybabel extract --output=src/locale/myextension.pot src/
```

5. Create message catalogs (*.po) for each language which your extension will provide localization, for example via [Babel](#)⁹⁰²:

```
$ pybabel init --input-file=src/locale/myextension.pot --domain=myextension --
↪ output-dir=src/locale --locale=fr_FR
```

6. Translate message catalogs for each language manually
7. Compile message catalogs into *.mo files, for example via [Babel](#)⁹⁰³:

```
$ pybabel compile --directory=src/locale --domain=myextension
```

8. Ensure that message catalog files are distributed when your package will be installed, by adding equivalent line in your extension `MANIFEST.in`:

Listing 3: MANIFEST.in

```
recursive-include src *.pot *.po *.mo
```

When the messages on your extension has been changed, you need to also update message catalog template and message catalogs, for example via [Babel](#)⁹⁰⁴:

```
$ pybabel extract --output=src/locale/myextension.pot src/
$ pybabel update --input-file=src/locale/myextension.pot --domain=myextension --output-
↪ dir=src/locale
```

Utilities

Sphinx provides utility classes and functions to develop extensions.

Base classes for components

These base classes are useful to allow your extensions to obtain Sphinx components (e.g. [Config](#), [BuildEnvironment](#) and so on) easily.

Note: The subclasses of them might not work with bare docutils because they are strongly coupled with Sphinx.

class sphinx.transforms.**SphinxTransform**(*document*, *startnode=None*)

A base class of Transforms.

Compared with `docutils.transforms.Transform`, this class improves accessibility to Sphinx APIs.

⁹⁰¹ <https://babel.pocoo.org/>

⁹⁰² <https://babel.pocoo.org/>

⁹⁰³ <https://babel.pocoo.org/>

⁹⁰⁴ <https://babel.pocoo.org/>

property app: [*Sphinx*](#)

Reference to the [*Sphinx*](#) object.

property config: [*Config*](#)

Reference to the [*Config*](#) object.

property env: [*BuildEnvironment*](#)

Reference to the [*BuildEnvironment*](#) object.

class sphinx.transforms.post_transforms.**SphinxPostTransform**(*document*, *startnode=None*)

A base class of post-transforms.

Post transforms are invoked to modify the document to restructure it for outputting. They resolve references, convert images, do special transformation for each output formats and so on. This class helps to implement these post transforms.

apply(**kwargs: [*Any*](#)⁹⁰⁵) → [*None*](#)⁹⁰⁶

Override to apply the transform to the document tree.

is_supported() → [*bool*](#)⁹⁰⁷

Check this transform working for current builder.

run(**kwargs: [*Any*](#)⁹⁰⁸) → [*None*](#)⁹⁰⁹

Main method of post transforms.

Subclasses should override this method instead of **apply**().

class sphinx.util.docutils.**SphinxDirective**(*name*, *arguments*, *options*, *content*, *lineno*, *content_offset*, *block_text*, *state*, *state_machine*)

A base class for Sphinx directives.

This class provides helper methods for Sphinx directives.

Note: The subclasses of this class might not work with docutils. This class is strongly coupled with Sphinx.

get_location() → [*str*](#)⁹¹⁰

Get current location info for logging.

get_source_info() → [*tuple*](#)⁹¹¹[[*str*](#)⁹¹², [*int*](#)⁹¹³]

Get source and line number.

set_source_info(*node: Node*) → [*None*](#)⁹¹⁴

Set source and line number to the node.

property config: [*Config*](#)

Reference to the [*Config*](#) object.

property env: [*BuildEnvironment*](#)

Reference to the [*BuildEnvironment*](#) object.

⁹⁰⁵ <https://docs.python.org/3/library/typing.html#typing.Any>

⁹⁰⁶ <https://docs.python.org/3/library/constants.html#None>

⁹⁰⁷ <https://docs.python.org/3/library/functions.html#bool>

⁹⁰⁸ <https://docs.python.org/3/library/typing.html#typing.Any>

⁹⁰⁹ <https://docs.python.org/3/library/constants.html#None>

class sphinx.util.docutils.SphinxRole

A base class for Sphinx roles.

This class provides helper methods for Sphinx roles.

Note: The subclasses of this class might not work with docutils. This class is strongly coupled with Sphinx.

get_location() → [str](#)⁹¹⁵

Get current location info for logging.

property config: [Config](#)

Reference to the [Config](#) object.

content: [Sequence](#)⁹¹⁶[[str](#)⁹¹⁷]

A list of strings, the directive content for customisation (from the “role” directive).

property env: [BuildEnvironment](#)

Reference to the [BuildEnvironment](#) object.

inliner: [Inliner](#)

The `docutils.parsers.rst.states.Inliner` object.

lineno: [int](#)⁹¹⁸

The line number where the interpreted text begins.

name: [str](#)⁹¹⁹

The role name actually used in the document.

options: [dict](#)⁹²⁰[[str](#)⁹²¹, [Any](#)⁹²²]

A dictionary of directive options for customisation (from the “role” directive).

rawtext: [str](#)⁹²³

A string containing the entire interpreted text input.

text: [str](#)⁹²⁴

The interpreted text content.

class sphinx.util.docutils.ReferenceRole

A base class for reference roles.

The reference roles can accept `link title <target> style` as a text for the role. The parsed result; link title and target will be stored to `self.title` and `self.target`.

⁹¹⁰ <https://docs.python.org/3/library/stdtypes.html#str>

⁹¹¹ <https://docs.python.org/3/library/stdtypes.html#tuple>

⁹¹² <https://docs.python.org/3/library/stdtypes.html#str>

⁹¹³ <https://docs.python.org/3/library/functions.html#int>

⁹¹⁴ <https://docs.python.org/3/library/constants.html#None>

⁹¹⁵ <https://docs.python.org/3/library/stdtypes.html#str>

⁹¹⁶ <https://docs.python.org/3/library/collections.abc.html#collections.abc.Sequence>

⁹¹⁷ <https://docs.python.org/3/library/stdtypes.html#str>

⁹¹⁸ <https://docs.python.org/3/library/functions.html#int>

⁹¹⁹ <https://docs.python.org/3/library/stdtypes.html#str>

⁹²⁰ <https://docs.python.org/3/library/stdtypes.html#dict>

⁹²¹ <https://docs.python.org/3/library/stdtypes.html#str>

⁹²² <https://docs.python.org/3/library/typing.html#typing.Any>

⁹²³ <https://docs.python.org/3/library/stdtypes.html#str>

⁹²⁴ <https://docs.python.org/3/library/stdtypes.html#str>

disabled: `bool`⁹²⁵

A boolean indicates the reference is disabled.

has_explicit_title: `bool`⁹²⁶

A boolean indicates the role has explicit title or not.

target: `str`⁹²⁷

The link target for the interpreted text.

title: `str`⁹²⁸

The link title for the interpreted text.

class `sphinx.transforms.post_transforms.images.ImageConverter`(*document*, *startnode=None*)

A base class for image converters.

An image converter is kind of Docutils transform module. It is used to convert image files which are not supported by a builder to the appropriate format for that builder.

For example, *LaTeX builder* supports PDF, PNG and JPEG as image formats. However it does not support SVG images. For such case, using image converters allows to embed these unsupported images into the document. One of the image converters; *sphinx.ext.imgconverter* can convert a SVG image to PNG format using Imagemagick internally.

There are three steps to make your custom image converter:

1. Make a subclass of `ImageConverter` class
2. Override `conversion_rules`, `is_available()` and `convert()`
3. Register your image converter to Sphinx using *Sphinx.add_post_transform()*

convert(*_from: str*⁹²⁹, *_to: str*⁹³⁰) → `bool`⁹³¹

Convert an image file to the expected format.

_from is a path of the source image file, and *_to* is a path of the destination file.

is_available() → `bool`⁹³²

Return the image converter is available or not.

available: `bool`⁹³³ | `None`⁹³⁴ = `None`

The converter is available or not. Will be filled at the first call of the build. The result is shared in the same process.

Todo: This should be refactored not to store the state without class variable.

conversion_rules: `list`⁹³⁵[`tuple`⁹³⁶[`str`⁹³⁷, `str`⁹³⁸]] = []

A conversion rules the image converter supports. It is represented as a list of pair of source image format (mimetype) and destination one:

```
conversion_rules = [
    ('image/svg+xml', 'image/png'),
    ('image/gif', 'image/png'),
    ('application/pdf', 'image/png'),
]
```

⁹²⁵ <https://docs.python.org/3/library/functions.html#bool>

⁹²⁶ <https://docs.python.org/3/library/functions.html#bool>

⁹²⁷ <https://docs.python.org/3/library/stdtypes.html#str>

⁹²⁸ <https://docs.python.org/3/library/stdtypes.html#str>

default_priority = 200

Numerical priority of this transform, 0 through 999 (override).

Utility components

class sphinx.events.EventManager(app: Sphinx)

Event manager for Sphinx.

add(name: str⁹²⁹) → None⁹⁴⁰

Register a custom Sphinx event.

connect(name: str⁹⁴¹, callback: Callable⁹⁴², priority: int⁹⁴³) → int⁹⁴⁴

Connect a handler to specific event.

disconnect(listener_id: int⁹⁴⁵) → None⁹⁴⁶

Disconnect a handler.

emit(name: str⁹⁴⁷, *args: Any⁹⁴⁸, allowed_exceptions: tuple⁹⁴⁹[type⁹⁵⁰[Exception⁹⁵¹], ...] = ()) → list⁹⁵²

Emit a Sphinx event.

emit_firstresult(name: str⁹⁵³, *args: Any⁹⁵⁴, allowed_exceptions: tuple⁹⁵⁵[type⁹⁵⁶[Exception⁹⁵⁷], ...] = ()) → Any⁹⁵⁸

Emit a Sphinx event and returns first result.

This returns the result of the first handler that doesn't return None.

⁹²⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁹³⁰ <https://docs.python.org/3/library/stdtypes.html#str>
⁹³¹ <https://docs.python.org/3/library/functions.html#bool>
⁹³² <https://docs.python.org/3/library/functions.html#bool>
⁹³³ <https://docs.python.org/3/library/functions.html#bool>
⁹³⁴ <https://docs.python.org/3/library/constants.html#None>
⁹³⁵ <https://docs.python.org/3/library/stdtypes.html#list>
⁹³⁶ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁹³⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁹³⁸ <https://docs.python.org/3/library/stdtypes.html#str>
⁹³⁹ <https://docs.python.org/3/library/stdtypes.html#str>
⁹⁴⁰ <https://docs.python.org/3/library/constants.html#None>
⁹⁴¹ <https://docs.python.org/3/library/stdtypes.html#str>
⁹⁴² <https://docs.python.org/3/library/typing.html#typing.Callable>
⁹⁴³ <https://docs.python.org/3/library/functions.html#int>
⁹⁴⁴ <https://docs.python.org/3/library/functions.html#int>
⁹⁴⁵ <https://docs.python.org/3/library/functions.html#int>
⁹⁴⁶ <https://docs.python.org/3/library/constants.html#None>
⁹⁴⁷ <https://docs.python.org/3/library/stdtypes.html#str>
⁹⁴⁸ <https://docs.python.org/3/library/typing.html#typing.Any>
⁹⁴⁹ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁹⁵⁰ <https://docs.python.org/3/library/functions.html#type>
⁹⁵¹ <https://docs.python.org/3/library/exceptions.html#Exception>
⁹⁵² <https://docs.python.org/3/library/stdtypes.html#list>
⁹⁵³ <https://docs.python.org/3/library/stdtypes.html#str>
⁹⁵⁴ <https://docs.python.org/3/library/typing.html#typing.Any>
⁹⁵⁵ <https://docs.python.org/3/library/stdtypes.html#tuple>
⁹⁵⁶ <https://docs.python.org/3/library/functions.html#type>
⁹⁵⁷ <https://docs.python.org/3/library/exceptions.html#Exception>
⁹⁵⁸ <https://docs.python.org/3/library/typing.html#typing.Any>

Utility types

`class sphinx.util.typing.ExtensionMetadata`

The metadata returned by an extension's `setup()` function.

See [Extension metadata](#).

env_version: `int`⁹⁵⁹

An integer that identifies the version of env data added by the extension.

parallel_read_safe: `bool`⁹⁶⁰

Indicate whether parallel reading of source files is supported by the extension.

parallel_write_safe: `bool`⁹⁶¹

Indicate whether parallel writing of output files is supported by the extension (default: `True`).

version: `str`⁹⁶²

The extension version (default: `'unknown version'`).

Deprecated APIs

On developing Sphinx, we are always careful to the compatibility of our APIs. But, sometimes, the change of interface are needed for some reasons. In such cases, we've marked them as deprecated. And they are kept during the two major versions (for more details, please see [Deprecation policy](#)).

The following is a list of deprecated interfaces.

Table 4: deprecated APIs

Target	Depre- cated	Re- moved	Alternatives
<code>sphinx.testing.util.strip_escseq</code>	7.3	9.0	<code>sphinx.util.console.strip_colors</code>
Old-style Makefiles in <code>sphinx-quickstart</code> and the <code>-M</code> , <code>-m</code> , <code>--no-use-make-mode</code> , and <code>--use-make-mode</code> options	7.3	9.0	Vendoring the old style Makefile templates ⁹⁶³
<code>sphinx.ext.autodoc.preserve_defaults.get_function_def()</code>	7.2	9.0	N/A (replacement is private)
<code>sphinx.builders.html.StandaloneHTMLBuilder.css_files</code>	7.2	9.0	N/A
<code>sphinx.builders.html.StandaloneHTMLBuilder.script_files</code>	7.2	9.0	N/A
<code>sphinx.builders.html.Stylesheet</code>	7.2	9.0	<code>sphinx.application.Sphinx.add_css_file()</code>
<code>sphinx.builders.html.JavaScript</code>	7.2	9.0	<code>sphinx.application.Sphinx.add_js_file()</code>
<code>sphinx.util.split_into</code>	7.2	9.0	N/A

continues on next page

⁹⁵⁹ <https://docs.python.org/3/library/functions.html#int>

⁹⁶⁰ <https://docs.python.org/3/library/functions.html#bool>

⁹⁶¹ <https://docs.python.org/3/library/functions.html#bool>

⁹⁶² <https://docs.python.org/3/library/stdtypes.html#str>

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>sphinx.util.split_index_msg</code>	7.2	9.0	<code>sphinx.util.index_entries.split_index_msg</code>
<code>sphinx.testing.path</code>	7.2	9.0	<code>os.path</code> or <code>pathlib</code>
<code>sphinx.util.md5</code>	7.2	9.0	<code>hashlib.md5</code>
<code>sphinx.util.sha1</code>	7.2	9.0	<code>hashlib.sha1</code>
<code>sphinx.util.osutil.cd</code>	6.2	8.0	<code>contextlib.chdir</code>
<code>sphinx.util.save_traceback</code>	6.1	8.0	<code>sphinx.util.exceptions.save_traceback</code>
<code>sphinx.util.format_exception_cut_frames</code>	6.1	8.0	<code>sphinx.util.exceptions.format_exception_cut_frames</code>
<code>sphinx.util.epoch_to_rfc1123</code>	6.1	8.0	<code>sphinx.util.http_date.epoch_to_rfc1123</code>
<code>sphinx.util.rfc1123_to_epoch</code>	6.1	8.0	<code>sphinx.util.http_date.rfc1123_to_epoch</code>
<code>sphinx.util.status_iterator</code>	6.1	8.0	<code>sphinx.util.display.status_iterator</code>
<code>sphinx.util.display_chunk</code>	6.1	8.0	<code>sphinx.util.display.display_chunk</code>
<code>sphinx.util.SkipProgressMessage</code>	6.1	8.0	<code>sphinx.util.display.SkipProgressMessage</code>
<code>sphinx.util.progress_message</code>	6.1	8.0	<code>sphinx.util.display.progress_message</code>
<code>sphinx.util.typing.stringify</code>	6.1	8.0	<code>sphinx.util.typing.stringify_annotation</code>
HTML 4 support	5.2	7.0	N/A
<code>sphinx.util.path_stabilize</code>	5.1	7.0	<code>sphinx.util.osutil.path_stabilize</code>
<code>sphinx.util.get_matching_files</code>	5.1	7.0	<code>sphinx.util.matching.get_matching_files</code>
<code>sphinx.ext.napoleon.iterators</code>	5.1	7.0	<code>pockets.iterators</code>
<code>sphinx.util.stemmer</code>	5.1	7.0	<code>snowballstemmer</code>
<code>sphinx.util.jsdump</code>	5.0	7.0	The standard library <code>json</code> module.
The Setuptools integration (<code>setup.py build_sphinx</code>)	5.0	7.0	N/A
The locale argument of <code>sphinx.util.i18n.babel_format_date()</code>	5.0	7.0	N/A
The language argument of <code>sphinx.util.i18n.format_date()</code>	5.0	7.0	N/A
<code>sphinx.builders.html.html5_ready</code>	5.0	7.0	N/A
<code>sphinx.io.read_doc()</code>	5.0	7.0	<code>sphinx.builders.Builder.read_doc()</code>
<code>sphinx.util.docutils.__version_info__</code>	5.0	7.0	<code>docutils.__version_info__</code>
<code>sphinx.util.docutils.is_html5_writer_available()</code>	5.0	7.0	N/A
<code>sphinx.writers.latex.LaTeXWriter.docclasses</code>	5.0	7.0	N/A
<code>sphinx.ext.napoleon.docstring.GoogleDocstring._qualify_name()</code>	4.5	6.0	N/A

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
sphinx.ext.autodoc. AttributeDocumenter. _datadescriptor	4.3	6.0	N/A
sphinx.writers.html. HTMLTranslator. _fieldlist_row_index	4.3	6.0	sphinx.writers.html. HTMLTranslator. _fieldlist_row_indices
sphinx.writers.html. HTMLTranslator._table_row_index	4.3	6.0	sphinx.writers.html. HTMLTranslator. _table_row_indices
sphinx.writers.html5. HTML5Translator. _fieldlist_row_index	4.3	6.0	sphinx.writers.html5. HTML5Translator. _fieldlist_row_indices
sphinx.writers.html5. HTML5Translator._table_row_index	4.3	6.0	sphinx.writers.html5. HTML5Translator. _table_row_indices
The optional argument <code>app</code> for <code>sphinx. environment.BuildEnvironment</code>	4.1	6.0	The required argument
<code>sphinx.application.Sphinx. html_theme</code>	4.1	6.0	<code>sphinx.registry. SphinxComponentRegistry. html_themes</code>
<code>sphinx.ext.autosummary._app</code>	4.1	6.0	N/A
<code>sphinx.util.docstrings. extract_metadata()</code>	4.1	6.0	<code>sphinx.util.docstrings. separate_metadata()</code>
<code>favicon</code> variable in HTML templates	4.0	6.0	<code>favicon_url</code>
<code>logo</code> variable in HTML templates	4.0	6.0	<code>logo_url</code>
<code>sphinx.directives.patches. ListTable</code>	4.0	6.0	<code>docutils.parsers.rst. directives.tables.ListSVTable</code>
<code>sphinx.directives.patches. RSTTable</code>	4.0	6.0	<code>docutils.parsers.rst. directives.tables.RSTTable</code>
<code>sphinx.ext.autodoc.directive. DocumenterBridge.filename_set</code>	4.0	6.0	<code>sphinx.ext.autodoc.directive. DocumenterBridge. record_dependencies</code>
<code>sphinx.ext.autodoc.directive. DocumenterBridge.warn()</code>	4.0	6.0	<i>Logging API</i>
<code>sphinx.registry. SphinxComponentRegistry. get_source_input()</code>	4.0	6.0	N/A
<code>sphinx.registry. SphinxComponentRegistry. source_inputs</code>	4.0	6.0	N/A
<code>sphinx.transforms.FigureAligner</code>	4.0	6.0	N/A
<code>sphinx.util.pycompat. convert_with_2to3()</code>	4.0	6.0	N/A
<code>sphinx.util.pycompat.execfile_()</code>	4.0	6.0	N/A
<code>sphinx.util.smartypants</code>	4.0	6.0	<code>docutils.utils.smartquotes</code>
<code>sphinx.util.typing. DirectiveOption</code>	4.0	6.0	N/A
<code>pending_xref</code> node for <code>viewcode</code> extension	3.5	5.0	<code>sphinx.ext.viewcode. viewcode_anchor</code>

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder. anchors_ignore</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder.auth</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder.broken</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder.good</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder. redirected</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder.rqueue</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder. to_ignore</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder.workers</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. CheckExternalLinksBuilder.wqueue</code>	3.5	5.0	N/A
<code>sphinx.builders.linkcheck. node_line_or_0()</code>	3.5	5.0	<code>sphinx.util.nodes. get_node_line()</code>
<code>sphinx.ext.autodoc. AttributeDocumenter. isinstanceattribute()</code>	3.5	5.0	N/A
<code>sphinx.ext.autodoc.importer. get_module_members()</code>	3.5	5.0	<code>sphinx.ext.autodoc. ModuleDocumenter. get_module_members()</code>
<code>sphinx.ext.autosummary.generate. _simple_info()</code>	3.5	5.0	<i>Logging API</i>
<code>sphinx.ext.autosummary.generate. _simple_warn()</code>	3.5	5.0	<i>Logging API</i>
<code>sphinx.writers.html. HTMLTranslator.permalink_text</code>	3.5	5.0	<i>html_permaLinks_icon</i>
<code>sphinx.writers.html5. HTML5Translator.permalink_text</code>	3.5	5.0	<i>html_permaLinks_icon</i>
The <code>follow_wrapped</code> argument of <code>sphinx.util.inspect.signature()</code>	3.4	5.0	N/A
The <code>no_docstring</code> argument of <code>sphinx.ext.autodoc.Documenter. add_content()</code>	3.4	5.0	<code>sphinx.ext.autodoc.Documenter. get_doc()</code>
<code>sphinx.ext.autodoc.Documenter. get_object_members()</code>	3.4	6.0	<code>sphinx.ext.autodoc. ClassDocumenter. get_object_members()</code>
<code>sphinx.ext.autodoc. DataDeclarationDocumenter</code>	3.4	5.0	<code>sphinx.ext.autodoc. DataDocumenter</code>
<code>sphinx.ext.autodoc. GenericAliasDocumenter</code>	3.4	5.0	<code>sphinx.ext.autodoc. DataDocumenter</code>

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
sphinx.ext.autodoc. InstanceAttributeDocumenter	3.4	5.0	sphinx.ext.autodoc. AttributeDocumenter
sphinx.ext.autodoc. SlotsAttributeDocumenter	3.4	5.0	sphinx.ext.autodoc. AttributeDocumenter
sphinx.ext.autodoc. TypeVarDocumenter	3.4	5.0	sphinx.ext.autodoc. DataDocumenter
sphinx.ext.autodoc.directive. DocumenterBridge.reporter	3.5	5.0	sphinx.util.logging
sphinx.ext.autodoc.importer. _getannotations()	3.4	4.0	sphinx.util.inspect. getannotations()
sphinx.ext.autodoc.importer. _getmro()	3.4	4.0	sphinx.util.inspect.getmro()
sphinx.pycode.ModuleAnalyzer. parse()	3.4	5.0	sphinx.pycode.ModuleAnalyzer. analyze()
sphinx.util.osutil.movefile()	3.4	5.0	os.replace()
sphinx.util.requests. is_ssl_error()	3.4	5.0	N/A
sphinx.builders.latex. LaTeXBuilder.usepackages	3.3	5.0	N/A
sphinx.builders.latex. LaTeXBuilder. usepackages_afger_hyperref	3.3	5.0	N/A
sphinx.ext.autodoc. SingledispatchFunctionDocumenter	3.3	5.0	sphinx.ext.autodoc. FunctionDocumenter
sphinx.ext.autodoc. SingledispatchMethodDocumenter	3.3	5.0	sphinx.ext.autodoc. MethodDocumenter
sphinx.ext.autodoc. members_set_option()	3.2	5.0	N/A
sphinx.ext.autodoc. merge_special_members_option()	3.2	5.0	sphinx.ext.autodoc. merge_members_option()
sphinx.writers.texinfo. TexinfoWriter.desc	3.2	5.0	sphinx.writers.texinfo. TexinfoWriter.descs
The first argument for sphinx.ext.autosummary.generate. AutosummaryRenderer has been changed to Sphinx object	3.1	5.0	N/A
sphinx.ext.autosummary.generate. AutosummaryRenderer takes an object type as an argument	3.1	5.0	N/A
The ignore argument of sphinx.ext. autodoc.Documenter.get_doc()	3.1	5.0	N/A
The template_dir argument of sphinx.ext.autosummary.generate. AutosummaryRenderer	3.1	5.0	N/A
The module argument of sphinx.ext.autosummary.generate. find_autosummary_in_docstring()	3.0	5.0	N/A

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
The builder argument of <code>sphinx.ext.autosummary.generate.generate_autosummary_docs()</code>	3.1	5.0	N/A
The <code>template_dir</code> argument of <code>sphinx.ext.autosummary.generate.generate_autosummary_docs()</code>	3.1	5.0	N/A
<code>sphinx.ext.autosummary.generate.AutosummaryRenderer.exists()</code>	3.1	5.0	N/A
The <code>ignore</code> argument of <code>sphinx.util.docstring.prepare_docstring()</code>	3.1	5.0	N/A
<code>sphinx.util.rpartition()</code>	3.1	5.0	<code>str.rpartition()</code>
<code>desc_signature['first']</code>		3.0	N/A
<code>sphinx.directives.DescDirective</code>	3.0	5.0	<code>sphinx.directives.ObjectDescription</code>
<code>sphinx.domains.std.StandardDomain.add_object()</code>	3.0	5.0	<code>sphinx.domains.std.StandardDomain.note_object()</code>
<code>sphinx.domains.python.PyDecoratorMixin</code>	3.0	5.0	N/A
<code>sphinx.ext.autodoc.get_documenters()</code>	3.0	5.0	<code>sphinx.registry.documenters</code>
<code>sphinx.ext.autosummary.process_autosummary_toc()</code>	3.0	5.0	N/A
<code>sphinx.parsers.Parser.app</code>	3.0	5.0	N/A
<code>sphinx.testing.path.Path.text()</code>	3.0	5.0	<code>sphinx.testing.path.Path.read_text()</code>
<code>sphinx.testing.path.Path.bytes()</code>	3.0	5.0	<code>sphinx.testing.path.Path.read_bytes()</code>
<code>sphinx.util.inspect.getargspec()</code>	3.0	5.0	<code>inspect.getargspec()</code>
<code>sphinx.writers.latex.LaTeXWriter.format_docclass()</code>	3.0	5.0	LaTeX Themes
decode argument of <code>sphinx.pycode.ModuleAnalyzer()</code>	2.4	4.0	N/A
<code>sphinx.directives.other.Index</code>	2.4	4.0	<code>sphinx.domains.index.IndexDirective</code>
<code>sphinx.environment.temp_data['gloss_entries']</code>	2.4	4.0	<code>documents.nameids</code>
<code>sphinx.environment.BuildEnvironment.indexentries</code>	2.4	4.0	<code>sphinx.domains.index.IndexDomain</code>
<code>sphinx.environment.collectors.indexentries.IndexEntriesCollector</code>	2.4	4.0	<code>sphinx.domains.index.IndexDomain</code>
<code>sphinx.io.FiletypeNotFoundError</code>	2.4	4.0	<code>sphinx.errors.FiletypeNotFoundError</code>
<code>sphinx.ext.apidoc.INITPY</code>	2.4	4.0	N/A
<code>sphinx.ext.apidoc.shall_skip()</code>	2.4	4.0	<code>sphinx.ext.apidoc.is_skipped_package</code>
<code>sphinx.io.get_filetype()</code>	2.4	4.0	<code>sphinx.util.get_filetype()</code>
<code>sphinx.pycode.ModuleAnalyzer.encoding</code>	2.4	4.0	N/A

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>sphinx.roles.Index</code>	2.4	4.0	<code>sphinx.domains.index.IndexRole</code>
<code>sphinx.util.detect_encoding()</code>	2.4	4.0	<code>tokenize.detect_encoding()</code>
<code>sphinx.util.get_module_source()</code>	2.4	4.0	N/A
<code>sphinx.util.inspect.Signature</code>	2.4	4.0	<code>sphinx.util.inspect.signature</code> and <code>sphinx.util.inspect.stringify_signature()</code>
<code>sphinx.util.inspect.safe_getmembers()</code>	2.4	4.0	<code>inspect.getmembers()</code>
<code>sphinx.writers.latex.LaTeXTranslator.settings.author</code>	2.4	4.0	N/A
<code>sphinx.writers.latex.LaTeXTranslator.settings.contentsname</code>	2.4	4.0	<code>document['contentsname']</code>
<code>sphinx.writers.latex.LaTeXTranslator.settings.docclass</code>	2.4	4.0	<code>document['docclass']</code>
<code>sphinx.writers.latex.LaTeXTranslator.settings.docname</code>	2.4	4.0	N/A
<code>sphinx.writers.latex.LaTeXTranslator.settings.title</code>	2.4	4.0	N/A
<code>sphinx.writers.latex.ADDITIONAL_SETTINGS</code>	2.4	4.0	<code>sphinx.builders.latex.constants.ADDITIONAL_SETTINGS</code>
<code>sphinx.writers.latex.DEFAULT_SETTINGS</code>	2.4	4.0	<code>sphinx.builders.latex.constants.DEFAULT_SETTINGS</code>
<code>sphinx.writers.latex.LUALATEX_DEFAULT_FONTPKG</code>	2.4	4.0	<code>sphinx.builders.latex.constants.LUALATEX_DEFAULT_FONTPKG</code>
<code>sphinx.writers.latex.PDFLATEX_DEFAULT_FONTPKG</code>	2.4	4.0	<code>sphinx.builders.latex.constants.PDFLATEX_DEFAULT_FONTPKG</code>
<code>sphinx.writers.latex.XELATEX_DEFAULT_FONTPKG</code>	2.4	4.0	<code>sphinx.builders.latex.constants.XELATEX_DEFAULT_FONTPKG</code>
<code>sphinx.writers.latex.XELATEX_GREEK_DEFAULT_FONTPKG</code>	2.4	4.0	<code>sphinx.builders.latex.constants.XELATEX_GREEK_DEFAULT_FONTPKG</code>
<code>sphinx.builders.gettext.POHEADER</code>	2.3	4.0	<code>sphinx/templates/gettext/message.pot_t</code> (template file)
<code>sphinx.io.SphinxStandaloneReader.app</code>	2.3	4.0	<code>sphinx.io.SphinxStandaloneReader.setup()</code>
<code>sphinx.io.SphinxStandaloneReader.env</code>	2.3	4.0	<code>sphinx.io.SphinxStandaloneReader.setup()</code>
<code>sphinx.util.texescape.tex_escape_map</code>	2.3	4.0	<code>sphinx.util.texescape.escape()</code>
<code>sphinx.util.texescape.tex_hl_escape_map_new</code>	2.3	4.0	<code>sphinx.util.texescape.hlescape()</code>
<code>sphinx.writers.latex.LaTeXTranslator.no_contractions</code>	2.3	4.0	N/A
<code>sphinx.domains.math.MathDomain.add_equation()</code>	2.2	4.0	<code>sphinx.domains.math.MathDomain.note_equation()</code>

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>sphinx.domains.math.MathDomain.get_next_equation_number()</code>	2.2	4.0	<code>sphinx.domains.math.MathDomain.note_equation()</code>
The <code>info</code> and <code>warn</code> arguments of <code>sphinx.ext.autosummary.generate.generate_autosummary_docs()</code>	2.2	4.0	<code>logging.info()</code> and <code>logging.warning()</code>
<code>sphinx.ext.autosummary.generate._simple_info()</code>	2.2	4.0	<code>logging.info()</code>
<code>sphinx.ext.autosummary.generate._simple_warn()</code>	2.2	4.0	<code>logging.warning()</code>
<code>sphinx.ext.todo.merge_info()</code>	2.2	4.0	<code>sphinx.ext.todo.TODODomain</code>
<code>sphinx.ext.todo.process_todo_nodes()</code>	2.2	4.0	<code>sphinx.ext.todo.TODODomain</code>
<code>sphinx.ext.todo.process_todos()</code>	2.2	4.0	<code>sphinx.ext.todo.TODODomain</code>
<code>sphinx.ext.todo.purge_todos()</code>	2.2	4.0	<code>sphinx.ext.todo.TODODomain</code>
<code>sphinx.builders.latex.LaTeXBuilder.apply_transforms()</code>	2.1	4.0	N/A
<code>sphinx.builders._epub_base.EpubBuilder.esc()</code>	2.1	4.0	<code>html.escape()</code>
<code>sphinx.directives.Acks</code>	2.1	4.0	<code>sphinx.directives.other.Acks</code>
<code>sphinx.directives.Author</code>	2.1	4.0	<code>sphinx.directives.other.Author</code>
<code>sphinx.directives.Centered</code>	2.1	4.0	<code>sphinx.directives.other.Centered</code>
<code>sphinx.directives.Class</code>	2.1	4.0	<code>sphinx.directives.other.Class</code>
<code>sphinx.directives.CodeBlock</code>	2.1	4.0	<code>sphinx.directives.code.CodeBlock</code>
<code>sphinx.directives.Figure</code>	2.1	4.0	<code>sphinx.directives.patches.Figure</code>
<code>sphinx.directives.HList</code>	2.1	4.0	<code>sphinx.directives.other.HList</code>
<code>sphinx.directives.Highlight</code>	2.1	4.0	<code>sphinx.directives.code.Highlight</code>
<code>sphinx.directives.Include</code>	2.1	4.0	<code>sphinx.directives.other.Include</code>
<code>sphinx.directives.Index</code>	2.1	4.0	<code>sphinx.directives.other.Index</code>
<code>sphinx.directives.LiteralInclude</code>	2.1	4.0	<code>sphinx.directives.code.LiteralInclude</code>
<code>sphinx.directives.Meta</code>	2.1	4.0	<code>sphinx.directives.patches.Meta</code>
<code>sphinx.directives.Only</code>	2.1	4.0	<code>sphinx.directives.other.Only</code>
<code>sphinx.directives.SeeAlso</code>	2.1	4.0	<code>sphinx.directives.other.SeeAlso</code>
<code>sphinx.directives.TabularColumns</code>	2.1	4.0	<code>sphinx.directives.other.TabularColumns</code>
<code>sphinx.directives.TocTree</code>	2.1	4.0	<code>sphinx.directives.other.TocTree</code>
<code>sphinx.directives.VersionChange</code>	2.1	4.0	<code>sphinx.directives.other.VersionChange</code>

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>sphinx.domains.python. PyClassmember</code>	2.1	4.0	<code>sphinx.domains.python. PyAttribute</code> , <code>sphinx.domains.python.PyMethod</code> , <code>sphinx.domains.python. PyClassMethod</code> , <code>sphinx.domains.python.PyObject</code> and <code>sphinx.domains.python. PyStaticMethod</code>
<code>sphinx.domains.python. PyModulelevel</code>	2.1	4.0	<code>sphinx.domains.python. PyFunction</code> , <code>sphinx.domains.python.PyObject</code> and <code>sphinx.domains.python. PyVariable</code>
<code>sphinx.domains.std. StandardDomain. _resolve_citation_xref()</code>	2.1	4.0	<code>sphinx.domains.citation. CitationDomain.resolve_xref()</code>
<code>sphinx.domains.std. StandardDomain.note_citations()</code>	2.1	4.0	<code>sphinx.domains.citation. CitationDomain.note_citation()</code>
<code>sphinx.domains.std. StandardDomain. note_citation_refs()</code>	2.1	4.0	<code>sphinx.domains.citation. CitationDomain. note_citation_reference()</code>
<code>sphinx.domains.std. StandardDomain.note_labels()</code>	2.1	4.0	<code>sphinx.domains.std. StandardDomain.process_doc()</code>
<code>sphinx.domains.js.JSObject. display_prefix</code>		4.3	<code>sphinx.domains.js.JSObject. get_display_prefix()</code>
<code>sphinx.environment.NoUri</code>	2.1	3.0	<code>sphinx.errors.NoUri</code>
<code>sphinx.ext.apidoc. format_directive()</code>	2.1	4.0	N/A
<code>sphinx.ext.apidoc. format_heading()</code>	2.1	4.0	N/A
<code>sphinx.ext.apidoc.makename()</code>	2.1	4.0	<code>sphinx.ext.apidoc.module_join()</code>
<code>sphinx.ext.autodoc.importer. MockFinder</code>	2.1	4.0	<code>sphinx.ext.autodoc.mock. MockFinder</code>
<code>sphinx.ext.autodoc.importer. MockLoader</code>	2.1	4.0	<code>sphinx.ext.autodoc.mock. MockLoader</code>
<code>sphinx.ext.autodoc.importer. mock()</code>	2.1	4.0	<code>sphinx.ext.autodoc.mock.mock()</code>
<code>sphinx.ext.autosummary. autolink_role()</code>	2.1	4.0	<code>sphinx.ext.autosummary.AutoLink</code>
<code>sphinx.ext.imgmath.DOC_BODY</code>	2.1	4.0	N/A
<code>sphinx.ext.imgmath. DOC_BODY_PREVIEW</code>	2.1	4.0	N/A
<code>sphinx.ext.imgmath.DOC_HEAD</code>	2.1	4.0	N/A
<code>sphinx.transforms. CitationReferences</code>	2.1	4.0	<code>sphinx.domains.citation. CitationReferenceTransform</code>
<code>sphinx.transforms. SmartQuotesSkipper</code>	2.1	4.0	<code>sphinx.domains.citation. CitationDefinitionTransform</code>

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
sphinx.util.docfields. DocFieldTransformer. preprocess_fieldtypes()	2.1	4.0	sphinx.directives. ObjectDescription. get_field_type_map()
sphinx.util.node. find_source_node()	2.1	4.0	sphinx.util.node. get_node_source()
sphinx.util.i18n.find_catalog()	2.1	4.0	sphinx.util.i18n. docname_to_domain()
sphinx.util.i18n. find_catalog_files()	2.1	4.0	sphinx.util.i18n. CatalogRepository
sphinx.util.i18n. find_catalog_source_files()	2.1	4.0	sphinx.util.i18n. CatalogRepository
encoding argument of autodoc.Documenter.get_doc(), autodoc.DocstringSignatureMixin. get_doc(), autodoc.DocstringSignatureMixin. _find_signature(), and autodoc.ClassDocumenter.get_doc()	2.0	4.0	N/A
arguments of EpubBuilder.build_mimetype(), EpubBuilder.build_container(), EpubBuilder.build_content(), EpubBuilder.build_toc() and EpubBuilder.build_epub()	2.0	4.0	N/A
arguments of Epub3Builder. build_navigation_doc()	2.0	4.0	N/A
nodetype argument of sphinx.search. WordCollector.is_meta_keywords()	2.0	4.0	N/A
suffix argument of BuildEnvironment.doc2path()	2.0	4.0	N/A
string style base argument of BuildEnvironment.doc2path()	2.0	4.0	os.path.join()
sphinx.addnodes.abbreviation	2.0	4.0	docutils.nodes.abbreviation
sphinx.builders.applehelp	2.0	4.0	sphinxcontrib.applehelp
sphinx.builders.devhelp	2.0	4.0	sphinxcontrib.devhelp
sphinx.builders.epub3. Epub3Builder. validate_config_value()	2.0	4.0	sphinx.builders.epub3. validate_config_values()
sphinx.builders.html. JSONHTMLBuilder	2.0	4.0	sphinx.builders. serializinghtml.JSONHTMLBuilder
sphinx.builders.html. PickleHTMLBuilder	2.0	4.0	sphinx.builders. serializinghtml. PickleHTMLBuilder
sphinx.builders.html. SerializingHTMLBuilder	2.0	4.0	sphinx.builders. serializinghtml. SerializingHTMLBuilder
sphinx.builders.html. SingleFileHTMLBuilder	2.0	4.0	sphinx.builders.singlehtml. SingleFileHTMLBuilder

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
sphinx.builders.html. WebHTMLBuilder	2.0	4.0	sphinx.builders. serializinghtml. PickleHTMLBuilder
sphinx.builders.htmlhelp	2.0	4.0	sphinxcontrib.htmlhelp
sphinx.builders.htmlhelp. HTMLHelpBuilder.open_file()	2.0	4.0	open()
sphinx.builders.qthelp	2.0	4.0	sphinxcontrib.qthelp
sphinx.cmd.quickstart. term_decode()	2.0	4.0	N/A
sphinx.cmd.quickstart. TERM_ENCODING	2.0	4.0	sys.stdin.encoding
sphinx.config.check_unicode()	2.0	4.0	N/A
sphinx.config.string_classes	2.0	4.0	[str]
sphinx.domains.cpp. DefinitionError.description	2.0	4.0	str(exc)
sphinx.domains.cpp.NoOldIdError. description	2.0	4.0	str(exc)
sphinx.domains.cpp. UnsupportedMultiCharacterCharLitera decoded	2.0	4.0	str(exc)
sphinx.ext.autosummary. Autosummary.warn()	2.0	4.0	N/A
sphinx.ext.autosummary. Autosummary.genopt	2.0	4.0	N/A
sphinx.ext.autosummary. Autosummary.warnings	2.0	4.0	N/A
sphinx.ext.autosummary. Autosummary.result	2.0	4.0	N/A
sphinx.ext.doctest. doctest_encode()	2.0	4.0	N/A
sphinx.ext.jsmath	2.0	4.0	sphinxcontrib.jsmath
sphinx.roles.abbr_role()	2.0	4.0	sphinx.roles.Abbreviation
sphinx.roles.emph_literal_role()	2.0	4.0	sphinx.roles.EmphasizedLiteral
sphinx.roles.menuul_role()	2.0	4.0	sphinx.roles.GUILabel or sphinx.roles.MenuSelection
sphinx.roles.index_role()	2.0	4.0	sphinx.roles.Index
sphinx.roles.indexmarkup_role()	2.0	4.0	sphinx.roles.PEP or sphinx.roles.RFC
sphinx.testing.util. remove_unicode_literal()	2.0	4.0	N/A
sphinx.util.attrdict	2.0	4.0	N/A
sphinx.util.force_decode()	2.0	5.0	N/A
sphinx.util.get_matching_docs()	2.0	4.0	sphinx.util. get_matching_files()
sphinx.util.inspect.Parameter	2.0	3.0	N/A
sphinx.util.jsonimpl	2.0	4.0	sphinxcontrib.serializinghtml. jsonimpl
sphinx.util.osutil.EEXIST	2.0	4.0	errno.EEXIST or FileExistsError
sphinx.util.osutil.EINVAL	2.0	4.0	errno.EINVAL

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>sphinx.util.osutil.ENOENT</code>	2.0	4.0	<code>errno.ENOENT</code> or <code>FileNotFoundError</code>
<code>sphinx.util.osutil.EPIPE</code>	2.0	4.0	<code>errno.ENOENT</code> or <code>BrokenPipeError</code>
<code>sphinx.util.osutil.walk()</code>	2.0	4.0	<code>os.walk()</code>
<code>sphinx.util.pycompat.NoneType</code>	2.0	4.0	<code>sphinx.util.typing.NoneType</code>
<code>sphinx.util.pycompat.TextIOWrapper</code>	2.0	4.0	<code>io.TextIOWrapper</code>
<code>sphinx.util.pycompat.UnicodeMixin</code>	2.0	4.0	N/A
<code>sphinx.util.pycompat.html.escape()</code>	2.0	4.0	<code>html.escape()</code>
<code>sphinx.util.pycompat.indent()</code>	2.0	4.0	<code>textwrap.indent()</code>
<code>sphinx.util.pycompat.sys_encoding</code>	2.0	4.0	<code>sys.getdefaultencoding()</code>
<code>sphinx.util.pycompat.terminal_safe()</code>	2.0	4.0	<code>sphinx.util.console.terminal_safe()</code>
<code>sphinx.util.pycompat.u</code>	2.0	4.0	N/A
<code>sphinx.util.PeekableIterator</code>	2.0	4.0	N/A
Omitting the filename argument in an overridden <code>IndexBuilder.feed()</code> method.	2.0	4.0	<code>IndexBuilder.feed(docname, filename, title, doctree)</code>
<code>sphinx.writers.latex.ExtBabel</code>	2.0	4.0	<code>sphinx.builders.latex.util.ExtBabel</code>
<code>sphinx.writers.latex.LaTeXTranslator.babel_defmacro()</code>	2.0	4.0	N/A
<code>sphinx.application.Sphinx._setting_up_extension</code>	2.0	3.0	N/A
The importer argument of <code>sphinx.ext.autodoc.importer._MockModule</code>	2.0	3.0	N/A
<code>sphinx.ext.autodoc.importer._MockImporter</code>	2.0	3.0	N/A
<code>sphinx.io.SphinxBaseFileInput</code>	2.0	3.0	N/A
<code>sphinx.io.SphinxFileInput.supported</code>	2.0	3.0	N/A
<code>sphinx.io.SphinxRSTFileInput</code>	2.0	3.0	N/A
<code>sphinx.registry.SphinxComponentRegistry.add_source_input()</code>	2.0	3.0	N/A
<code>sphinx.writers.latex.LaTeXTranslator._make_visit_admonition()</code>	2.0	3.0	N/A
<code>sphinx.writers.latex.LaTeXTranslator.collect_footnotes()</code>	2.0	4.0	N/A
<code>sphinx.writers.texinfo.TexinfoTranslator._make_visit_admonition()</code>	2.0	3.0	N/A
<code>sphinx.writers.text.TextTranslator._make_depart_admonition()</code>	2.0	3.0	N/A
<code>sphinx.writers.latex.LaTeXTranslator.generate_numfig_format()</code>	2.0	4.0	N/A

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>highlightlang</code>	1.8	4.0	<i>highlight</i>
<code>add_stylesheet()</code>	1.8	6.0	<i>add_css_file()</i>
<code>add_javascript()</code>	1.8	4.0	<i>add_js_file()</i>
<i>autodoc_default_flags</i>	1.8	4.0	<i>autodoc_default_options</i>
content arguments of <code>sphinx.util.</code>	1.8	3.0	N/A
<code>image.guess_mimetype()</code>			
<code>gettext_compact</code> arguments of <code>sphinx.util.i18n.</code>	1.8	3.0	N/A
<code>find_catalog_source_files()</code>			
<code>sphinx.io.SphinxI18nReader.</code>	1.8	3.0	N/A
<code>set_lineno_for_reporter()</code>			
<code>sphinx.io.SphinxI18nReader.line</code>	1.8	3.0	N/A
<code>sphinx.directives.other.</code>	1.8	3.0	<code>sphinx.domains.changeset.</code>
<code>VersionChanges</code>			<code>VersionChanges</code>
<code>sphinx.highlighting.</code>	1.8	3.0	N/A
<code>PygmentsBridge.unhighlight()</code>			
<code>trim_doctest_flags</code> arguments of <code>sphinx.highlighting.</code>	1.8	3.0	N/A
<code>PygmentsBridge</code>			
<code>sphinx.ext.mathbase</code>	1.8	3.0	N/A
<code>sphinx.ext.mathbase.MathDomain</code>	1.8	3.0	<code>sphinx.domains.math.MathDomain</code>
<code>sphinx.ext.mathbase.MathDirective</code>	1.8	3.0	<code>sphinx.directives.patches.</code> <code>MathDirective</code>
<code>sphinx.ext.mathbase.math_role()</code>	1.8	3.0	<code>docutils.parsers.rst.roles.</code> <code>math_role()</code>
<code>sphinx.ext.mathbase.setup_math()</code>	1.8	3.0	<i>add_html_math_renderer()</i>
<code>sphinx.ext.mathbase.</code>	1.8	3.0	N/A
<code>is_in_section_title()</code>			
<code>sphinx.ext.mathbase.</code>	1.8	3.0	<code>sphinx.util.math.</code>
<code>get_node_equation_number()</code>			<code>get_node_equation_number()</code>
<code>sphinx.ext.mathbase.</code>	1.8	3.0	<code>sphinx.util.math.</code>
<code>wrap_displaymath()</code>			<code>wrap_displaymath()</code>
<code>sphinx.ext.mathbase.math (node)</code>	1.8	3.0	<code>docutils.nodes.math</code>
<code>sphinx.ext.mathbase.displaymath (node)</code>	1.8	3.0	<code>docutils.nodes.math_block</code>
<code>sphinx.ext.mathbase.eqref (node)</code>	1.8	3.0	<code>sphinx.builders.latex.nodes.</code> <code>math_reference</code>
<code>viewcode_import</code> (config value)	1.8	3.0	<i>viewcode_follow_imported_members</i>
<code>sphinx.writers.latex.Table.</code>	1.8	3.0	N/A
<code>caption_footnotetexts</code>			
<code>sphinx.writers.latex.Table.</code>	1.8	3.0	N/A
<code>header_footnotetexts</code>			
<code>sphinx.writers.latex.</code>	1.8	3.0	N/A
<code>LaTeXTranslator.footnotestack</code>			
<code>sphinx.writers.latex.</code>	1.8	3.0	N/A
<code>LaTeXTranslator.</code>			
<code>in_container_literal_block</code>			
<code>sphinx.writers.latex.</code>	1.8	3.0	N/A
<code>LaTeXTranslator.next_section_ids</code>			

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
sphinx.writers.latex. LaTeXTranslator. next_hyperlink_ids	1.8	3.0	N/A
sphinx.writers.latex. LaTeXTranslator. restrict_footnote()	1.8	3.0	N/A
sphinx.writers.latex. LaTeXTranslator. unrestrict_footnote()	1.8	3.0	N/A
sphinx.writers.latex. LaTeXTranslator. push_hyperlink_ids()	1.8	3.0	N/A
sphinx.writers.latex. LaTeXTranslator. pop_hyperlink_ids()	1.8	3.0	N/A
sphinx.writers.latex. LaTeXTranslator.bibitems	1.8	3.0	N/A
sphinx.writers.latex. LaTeXTranslator.hlstettingstack	1.8	3.0	N/A
sphinx.writers.latex.ExtBabel. get_shorthandoff()	1.8	3.0	N/A
sphinx.writers.html. HTMLTranslator.highlightlang()	1.8	3.0	N/A
sphinx.writers.html. HTMLTranslator. highlightlang_base()	1.8	3.0	N/A
sphinx.writers.html. HTMLTranslator. highlightlangopts()	1.8	3.0	N/A
sphinx.writers.html. HTMLTranslator. highlightlinenothreshold()	1.8	3.0	N/A
sphinx.writers.html5. HTMLTranslator.highlightlang()	1.8	3.0	N/A
sphinx.writers.html5. HTMLTranslator. highlightlang_base()	1.8	3.0	N/A
sphinx.writers.html5. HTMLTranslator. highlightlangopts()	1.8	3.0	N/A
sphinx.writers.html5. HTMLTranslator. highlightlinenothreshold()	1.8	3.0	N/A
sphinx.writers.latex. LaTeXTranslator. check_latex_elements()	1.8	3.0	Nothing
sphinx.application. CONFIG_FILENAME	1.8	3.0	sphinx.config.CONFIG_FILENAME
Config.check_unicode()	1.8	3.0	sphinx.config.check_unicode()

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>Config.check_types()</code>	1.8	3.0	<code>sphinx.config. check_confval_types()</code>
<code>dirname, filename and tags arguments of Config.__init__()</code>	1.8	3.0	<code>Config.read()</code>
The value of <code>html_search_options</code>	1.8	3.0	see <code>html_search_options</code>
<code>sphinx.versioning.prepare()</code>	1.8	3.0	<code>sphinx.versioning.UIDTransform</code>
<code>Sphinx.override_domain()</code>	1.8	3.0	<code>add_domain()</code>
<code>Sphinx.import_object()</code>	1.8	3.0	<code>sphinx.util.import_object()</code>
suffix argument of <code>add_source_parser()</code>	1.8	3.0	<code>add_source_suffix()</code>
<code>BuildEnvironment.load()</code>	1.8	3.0	<code>pickle.load()</code>
<code>BuildEnvironment.loads()</code>	1.8	3.0	<code>pickle.loads()</code>
<code>BuildEnvironment.frompickle()</code>	1.8	3.0	<code>pickle.load()</code>
<code>BuildEnvironment.dump()</code>	1.8	3.0	<code>pickle.dump()</code>
<code>BuildEnvironment.dumps()</code>	1.8	3.0	<code>pickle.dumps()</code>
<code>BuildEnvironment.topickle()</code>	1.8	3.0	<code>pickle.dump()</code>
<code>BuildEnvironment._nitpick_ignore</code>	1.8	3.0	<code>nitpick_ignore</code>
<code>BuildEnvironment.versionchanges</code>	1.8	3.0	N/A
<code>BuildEnvironment.update()</code>	1.8	3.0	<code>Builder.read()</code>
<code>BuildEnvironment.read_doc()</code>	1.8	3.0	<code>Builder.read_doc()</code>
<code>BuildEnvironment._read_serial()</code>	1.8	3.0	<code>Builder.read()</code>
<code>BuildEnvironment._read_parallel()</code>	1.8	3.0	<code>Builder.read()</code>
<code>BuildEnvironment.write_doctree()</code>	1.8	3.0	<code>Builder.write_doctree()</code>
<code>BuildEnvironment. note_versionchange()</code>	1.8	3.0	<code>ChangesDomain.note_changeset()</code>
<code>warn()</code> (template helper function)	1.8	3.0	<code>warning()</code>
<code>source_parsers</code>	1.8	3.0	<code>add_source_parser()</code>
<code>sphinx.util.docutils. directive_helper()</code>	1.8	3.0	Directive class of <code>docutils</code>
<code>sphinx.cmdline</code>	1.8	3.0	<code>sphinx.cmd.build</code>
<code>sphinx.make_mode</code>	1.8	3.0	<code>sphinx.cmd.make_mode</code>
<code>sphinx.locale.l_()</code>	1.8	3.0	<code>sphinx.locale._()</code>
<code>sphinx.locale.lazy_gettext()</code>	1.8	3.0	<code>sphinx.locale._()</code>
<code>sphinx.locale.mygettext()</code>	1.8	3.0	<code>sphinx.locale._()</code>
<code>sphinx.util.copy_static_entry()</code>	1.5	3.0	<code>sphinx.util.fileutil. copy_asset()</code>
<code>sphinx.build_main()</code>	1.7	2.0	<code>sphinx.cmd.build.build_main()</code>
<code>sphinx.ext.intersphinx.debug()</code>	1.7	2.0	<code>sphinx.ext.intersphinx. inspect_main()</code>
<code>sphinx.ext.autodoc. format_annotation()</code>	1.7	2.0	<code>sphinx.util.inspect.Signature</code>
<code>sphinx.ext.autodoc. formatargspec()</code>	1.7	2.0	<code>sphinx.util.inspect.Signature</code>
<code>sphinx.ext.autodoc. AutodocReporter</code>	1.7	2.0	<code>sphinx.util.docutils. switch_source_input()</code>
<code>sphinx.ext.autodoc. add_documenter()</code>	1.7	2.0	<code>add_autodocumenter()</code>
<code>sphinx.ext.autodoc.AutoDirective. _register</code>	1.7	2.0	<code>add_autodocumenter()</code>

continues on next page

Table 4 – continued from previous page

Target	Depre- cated	Re- moved	Alternatives
<code>AutoDirective._special_attrgetters</code>	1.7	2.0	<code>add_autodoc_attrgetter()</code>
<code>Sphinx.warn()</code> , <code>Sphinx.info()</code>	1.6	2.0	<i>Logging API</i>
<code>BuildEnvironment.set_warnfunc()</code>	1.6	2.0	<i>Logging API</i>
<code>BuildEnvironment.note_toctree()</code>	1.6	2.0	<code>Toctree.note()</code> (in <code>sphinx.environment.adapters.toc tree</code>)
<code>BuildEnvironment.get_toc_for()</code>	1.6	2.0	<code>Toctree.get_toc_for()</code> (in <code>sphinx.environment.adapters.toc tree</code>)
<code>BuildEnvironment.get_toc tree_for()</code>	1.6	2.0	<code>Toctree.get_toc tree_for()</code> (in <code>sphinx.environment.adapters.toc tree</code>)
<code>BuildEnvironment.create_index()</code>	1.6	2.0	<code>IndexEntries.create_index()</code> (in <code>sphinx.environment.adapters.indexentries</code>)
<code>sphinx.websupport</code>	1.6	2.0	<code>sphinxcontrib-websupport</code> ⁹⁶⁴
<code>StandaloneHTMLBuilder.css_files</code>	1.6	2.0	<code>add_stylesheet()</code>
<code>document.settings.gettext_compact</code>	1.8	1.8	<code>gettext_compact</code>
<code>Sphinx.status_iterator()</code>	1.6	1.7	<code>sphinx.util.status_iterator()</code>
<code>Sphinx.old_status_iterator()</code>	1.6	1.7	<code>sphinx.util.old_status_iterator()</code>
<code>Sphinx._directive_helper()</code>	1.6	1.7	<code>sphinx.util.docutils.directive_helper()</code>
<code>sphinx.util.compat.Directive</code>	1.6	1.7	<code>docutils.parsers.rst.Directive</code>
<code>sphinx.util.compat.docutils_version</code>	1.6	1.7	<code>sphinx.util.docutils.__version_info__</code>

Note: On deprecating on public APIs (internal functions and classes), we also follow the policy as much as possible.

⁹⁶³ https://github.com/sphinx-doc/sphinx/blob/v7.0.0/sphinx/templates/quickstart/Makefile_t

⁹⁶⁴ <https://pypi.org/project/sphinxcontrib-websupport/>

GET SUPPORT

For questions or to report problems with Sphinx, join the [sphinx-users](https://groups.google.com/group/sphinx-users)⁹⁶⁵ mailing list on Google Groups, come to the `#sphinx-doc` channel on [libera.chat](https://web.libera.chat/?channel=#sphinx-doc)⁹⁶⁶, or open an issue at the [tracker](https://github.com/sphinx-doc/sphinx/issues)⁹⁶⁷.

Examples of other projects using Sphinx can be found in the *examples page*. A useful [tutorial](https://matplotlib.sourceforge.net/sampledoc/)⁹⁶⁸ has been written by the matplotlib developers.

There is a translation team in [Transifex](https://www.transifex.com/sphinx-doc/sphinx-doc/dashboard/)⁹⁶⁹ of this documentation, thanks to the Sphinx document translators.

⁹⁶⁵ <https://groups.google.com/group/sphinx-users>

⁹⁶⁶ <https://web.libera.chat/?channel=#sphinx-doc>

⁹⁶⁷ <https://github.com/sphinx-doc/sphinx/issues>

⁹⁶⁸ <https://matplotlib.sourceforge.net/sampledoc/>

⁹⁶⁹ <https://www.transifex.com/sphinx-doc/sphinx-doc/dashboard/>

CONTRIBUTE TO SPHINX

This guide contains information about the Sphinx open source project itself. This is where you can find information about how Sphinx is managed and learn how to contribute to the project.

9.1 Contributing to Sphinx

There are many ways you can contribute to Sphinx, be it filing bug reports or feature requests, writing new documentation or submitting patches for new or fixed behavior. This guide serves to illustrate how you can get started with this.

Get help

The Sphinx community maintains a number of mailing lists and IRC channels.

Stack Overflow with tag `python-sphinx`^{Page 383, 970}

Questions and answers about use and development.

sphinx-users <sphinx-users@googlegroups.com>

Mailing list for user support.

sphinx-dev <sphinx-dev@googlegroups.com>

Mailing list for development related discussions.

#sphinx-doc on [irc.libera.chat](https://libera.chat)

IRC channel for development questions and user support.

Bug Reports and Feature Requests

If you have encountered a problem with Sphinx or have an idea for a new feature, please submit it to the [issue tracker](#)⁹⁷¹ on GitHub or discuss it on the [sphinx-dev](#)⁹⁷² mailing list.

For bug reports, please include the output produced during the build process and also the log file Sphinx creates after it encounters an unhandled exception. The location of this file should be shown towards the end of the error message.

Including or providing a link to the source files involved may help us fix the issue. If possible, try to create a minimal project that produces the error and post that instead.

⁹⁷⁰ <https://stackoverflow.com/questions/tagged/python-sphinx>

⁹⁷¹ <https://github.com/sphinx-doc/sphinx/issues>

⁹⁷² sphinx-dev@googlegroups.com

Contribute code

The Sphinx source code is managed using Git and is hosted on [GitHub](https://github.com/sphinx-doc/sphinx)⁹⁷³. The recommended way for new contributors to submit code to Sphinx is to fork this repository and submit a pull request after committing changes to their fork. The pull request will then need to be approved by one of the core developers before it is merged into the main repository.

Getting started

Before starting on a patch, we recommend checking for open issues or open a fresh issue to start a discussion around a feature idea or a bug. If you feel uncomfortable or uncertain about an issue or your changes, feel free to email the *sphinx-dev* mailing list.

These are the basic steps needed to start developing on Sphinx.

1. Create an account on GitHub.
2. Fork the main Sphinx repository ([sphinx-doc/sphinx](https://github.com/sphinx-doc/sphinx)⁹⁷⁴) using the GitHub interface.
3. Clone the forked repository to your machine.

```
git clone https://github.com/USERNAME/sphinx
cd sphinx
```

4. Checkout the appropriate branch.

Sphinx adopts Semantic Versioning 2.0.0 (refs: <https://semver.org/>).

For changes that preserves backwards-compatibility of API and features, they should be included in the next MINOR release, use the `A.x` branch.

```
git checkout A.x
```

For incompatible or other substantial changes that should wait until the next MAJOR release, use the `master` branch.

For urgent release, a new PATCH branch must be branched from the newest release tag (see [Sphinx's release process](#) for detail).

5. Setup a virtual environment.

This is not necessary for unit testing, thanks to `tox`, but it is necessary if you wish to run `sphinx-build` locally or run unit tests without the help of `tox`:

```
virtualenv ~/.venv
. ~/.venv/bin/activate
pip install -e .
```

6. Create a new working branch. Choose any name you like.

```
git checkout -b feature-xyz
```

7. Hack, hack, hack.

Write your code along with tests that shows that the bug was fixed or that the feature works as expected.

8. Add a bullet point to `CHANGES.rst` if the fix or feature is not trivial (small doc updates, typo fixes), then commit:

⁹⁷³ <https://github.com/sphinx-doc/sphinx>

⁹⁷⁴ <https://github.com/sphinx-doc/sphinx>

```
git commit -m '#42: Add useful new feature that does this.'
```

GitHub recognizes certain phrases that can be used to automatically update the issue tracker. For example:

```
git commit -m 'Closes #42: Fix invalid markup in docstring of Foo.bar.'
```

would close issue #42.

9. Push changes in the branch to your forked repository on GitHub:

```
git push origin feature-xyz
```

10. Submit a pull request from your branch to the respective branch (master or A.x).

11. Wait for a core developer to review your changes.

Coding style

Please follow these guidelines when writing code for Sphinx:

- Try to use the same code style as used in the rest of the project.
- For non-trivial changes, please update the `CHANGES.rst` file. If your changes alter existing behavior, please document this.
- New features should be documented. Include examples and use cases where appropriate. If possible, include a sample that is displayed in the generated output.
- When adding a new configuration variable, be sure to document it and update `sphinx/cmd/quickstart.py` if it's important enough.
- Add appropriate unit tests.

Style and type checks can be run as follows:

```
ruff .
mypy sphinx/
```

Unit tests

Sphinx is tested using [pytest](https://docs.pytest.org/en/latest/)⁹⁷⁵ for Python code and [Karma](https://karma-runner.github.io)⁹⁷⁶ for JavaScript.

To run Python unit tests, we recommend using `tox`, which provides a number of targets and allows testing against multiple different Python environments:

- To list all possible targets:

```
tox -av
```

- To run unit tests for a specific Python version, such as Python 3.10:

```
tox -e py310
```

- To run unit tests for a specific Python version and turn on deprecation warnings so they're shown in the test output:

⁹⁷⁵ <https://docs.pytest.org/en/latest/>

⁹⁷⁶ <https://karma-runner.github.io>

```
PYTHONWARNINGS=error tox -e py310
```

- Arguments to pytest can be passed via tox, e.g., in order to run a particular test:

```
tox -e py310 tests/test_module.py::test_new_feature
```

You can also test by installing dependencies in your local environment:

```
pip install .[test]
```

To run JavaScript tests, use npm:

```
npm install
npm run test
```

Tip: karma requires a Firefox binary to use as a test browser.

For Unix-based systems, you can specify the path to the Firefox binary using:

```
FIREFOX_BIN="/Applications/Firefox.app/Contents/MacOS/firefox" npm test
```

New unit tests should be included in the `tests` directory where necessary:

- For bug fixes, first add a test that fails without your changes and passes after they are applied.
- Tests that need a `sphinx-build` run should be integrated in one of the existing test modules if possible. New tests that to `@with_app` and then `build_all` for a few assertions are not good since *the test suite should not take more than a minute to run*.

Added in version 1.8: Sphinx also runs JavaScript tests.

Added in version 1.6: `sphinx.testing` is added as a experimental.

Changed in version 1.5.2: Sphinx was switched from nose to pytest.

Todo: The below belongs in the developer guide

Utility functions and pytest fixtures for testing are provided in `sphinx.testing`. If you are a developer of Sphinx extensions, you can write unit tests by using pytest. At this time, `sphinx.testing` will help your test implementation.

How to use pytest fixtures that are provided by `sphinx.testing`? You can require `'sphinx.testing.fixtures'` in your test modules or `conftest.py` files like this:

```
pytest_plugins = 'sphinx.testing.fixtures'
```

If you want to know more detailed usage, please refer to `tests/conftest.py` and other `test_*.py` files under the `tests` directory.

Contribute documentation

Contributing to documentation involves modifying the source files found in the `doc/` folder. To get started, you should first follow *Getting started*, and then take the steps below to work with the documentation.

The following sections describe how to get started with contributing documentation, as well as key aspects of a few different tools that we use.

Todo: Add a more extensive documentation contribution guide.

Build the documentation

To build the documentation, run the following command:

```
sphinx-build -M html ./doc ./build/sphinx -W --keep-going
```

This will parse the Sphinx documentation’s source files and generate HTML for you to preview in `build/sphinx/html`.

You can also build a **live version of the documentation** that you can preview in the browser. It will detect changes and reload the page any time you make edits. To do so, run the following command:

```
sphinx-autobuild ./doc ./build/sphinx/
```

Translations

The parts of messages in Sphinx that go into builds are translated into several locales. The translations are kept as gettext `.po` files translated from the master template `sphinx/locale/sphinx.pot`.

Sphinx uses [Babel](https://babel.pocoo.org/en/latest/)⁹⁷⁷ to extract messages and maintain the catalog files. The `utils` directory contains a helper script, `babel_runner.py`.

- Use `python babel_runner.py extract` to update the `.pot` template.
- Use `python babel_runner.py update` to update all existing language catalogs in `sphinx/locale/*/LC_MESSAGES` with the current messages in the template file.
- Use `python babel_runner.py compile` to compile the `.po` files to binary `.mo` files and `.js` files.

When an updated `.po` file is submitted, run `python babel_runner.py compile` to commit both the source and the compiled catalogs.

When a new locale is submitted, add a new directory with the ISO 639-1 language identifier and put `sphinx.po` in there. Don’t forget to update the possible values for `language` in `doc/usage/configuration.rst`.

The Sphinx core messages can also be translated on [Transifex](https://www.transifex.com/sphinx-doc/sphinx-1/)⁹⁷⁸. There `tx` client tool, which is provided by the `transifex_client` Python package, can be used to pull translations in `.po` format from Transifex. To do this, go to `sphinx/locale` and then run `tx pull -f -l LANG` where `LANG` is an existing language identifier. It is good practice to run `python babel_runner.py update` afterwards to make sure the `.po` file has the canonical Babel formatting.

⁹⁷⁷ <https://babel.pocoo.org/en/latest/>

⁹⁷⁸ <https://www.transifex.com/sphinx-doc/sphinx-1/>

Debugging tips

- Delete the build cache before building documents if you make changes in the code by running the command `make clean` or using the `sphinx-build -E` option.
- Use the `sphinx-build -P` option to run `pdb` on exceptions.
- Use `node.pformat()` and `node.asdom().toxml()` to generate a printable representation of the document structure.
- Set the configuration variable `keep_warnings` to `True` so warnings will be displayed in the generated output.
- Set the configuration variable `nitpicky` to `True` so that Sphinx will complain about references without a known target.
- Set the debugging options in the [Docutils configuration file](#)⁹⁷⁹.
- JavaScript stemming algorithms in `sphinx/search/non-minified-js/*.js` are generated using `snowball`⁹⁸⁰ by cloning the repository, executing `make dist_libstemmer_js` and then unpacking the tarball which is generated in `dist` directory.

Minified files in `sphinx/search/minified-js/*.js` are generated from non-minified ones using `uglifyjs` (installed via `npm`), with `-m` option to enable mangling.

9.2 Sphinx’s release process

Versioning

Sphinx adheres to [PEP 440](#)⁹⁸¹ versions, with a `major.minor.micro` scheme for the *release segment* (e.g. 1.2.3). The major, minor, and micro version parts should be altered as follows:

- The major version part should be incremented for incompatible behavior change and public API updates.
- The minor version part should be incremented for most releases of Sphinx, where backwards-compatibility of API and features are preserves.
- The micro version part should only be incremented for urgent bugfix-only releases.

When the major version part is incremented, the minor and micro version parts must be set to `0`. When the minor version part is incremented, the micro version part must be set to `0`.

New major versions should come with a beta-testing period before the final release.

Deprecating a feature

There are a couple reasons that code in Sphinx might be deprecated:

- If a feature has been improved or modified in a backwards-incompatible way, the old feature or behavior will be deprecated.
- Sometimes Sphinx will include a backport of a Python library that’s not included in a version of Python that Sphinx currently supports. When Sphinx no longer needs to support the older version of Python that doesn’t include the library, the library will be deprecated in Sphinx.

⁹⁷⁹ <https://docutils.sourceforge.io/docs/user/config.html>

⁹⁸⁰ <https://github.com/snowballstem/snowball>

⁹⁸¹ <https://peps.python.org/pep-0440/>

As the [Deprecation policy](#) describes, the first release of Sphinx that deprecates a feature (A.B) should raise a `RemovedInSphinxXXWarning` (where `XX` is the Sphinx version where the feature will be removed) when the deprecated feature is invoked. Assuming we have good test coverage, these warnings are converted to errors when running the test suite with warnings enabled:

```
pytest -Wall
```

Thus, when adding a `RemovedInSphinxXXWarning` you need to eliminate or silence any warnings generated when running the tests.

Deprecation policy

MAJOR and MINOR releases may deprecate certain features from previous releases. If a feature is deprecated in a release A.x, it will continue to work in all A.x.x versions (for all versions of x). It will continue to work in all B.x.x versions but raise deprecation warnings. Deprecated features will be removed at the C.0.0. It means the deprecated feature will work during 2 MAJOR releases at least.

So, for example, if we decided to start the deprecation of a function in Sphinx 2.x:

- Sphinx 2.x will contain a backwards-compatible replica of the function which will raise a `RemovedInSphinx40Warning`. This is a subclass of `PendingDeprecationWarning`⁹⁸², i.e. it will not get displayed by default.
- Sphinx 3.x will still contain the backwards-compatible replica, but `RemovedInSphinx40Warning` will be a subclass of `DeprecationWarning`⁹⁸³ then, and gets displayed by default.
- Sphinx 4.0 will remove the feature outright.

Deprecation warnings

Sphinx will enable its `RemovedInNextVersionWarning` warnings by default, if `PYTHONWARNINGS`⁹⁸⁴ is not set. Therefore you can disable them using:

- `PYTHONWARNINGS= make html` (Linux/Mac)
- `export PYTHONWARNINGS= and do make html` (Linux/Mac)
- `set PYTHONWARNINGS= and do make html` (Windows)

But you can also explicitly enable the pending ones using e.g. `PYTHONWARNINGS=default` (see the [Python docs on configuring warnings](#)⁹⁸⁵) for more details.

Python version support policy

Sphinx supports at all minor versions of Python released in the past 42 months from the anticipated release date with a minimum of 3 minor versions of Python. This policy is derived from [NEP 29](#)⁹⁸⁶, a scientific Python domain standard.

For example, a version of Sphinx released in May 2024 would support Python 3.10, 3.11, and 3.12.

This is a summary table with the current policy:

⁹⁸² <https://docs.python.org/3/library/exceptions.html#PendingDeprecationWarning>

⁹⁸³ <https://docs.python.org/3/library/exceptions.html#DeprecationWarning>

⁹⁸⁴ <https://docs.python.org/3/using/cmdline.html#envvar-PYTHONWARNINGS>

⁹⁸⁵ <https://docs.python.org/3/library/warnings.html#describing-warning-filters>

⁹⁸⁶ https://numpy.org/neps/nep-0029-deprecation_policy.html

Date	Python
26 Dec 2021	3.8+
14 Apr 2023	3.9+
05 Apr 2024	3.10+
04 Apr 2025	3.11+
24 Apr 2026	3.12+

Release procedures

The release procedures are listed in `utils/release-checklist.rst`.

9.3 Organization of the Sphinx project

The guide explains how the Sphinx project is organized.

Core developers

The core developers of Sphinx have write access to the main repository. They can commit changes, accept/reject pull requests, and manage items on the issue tracker.

Guidelines

The following are some general guidelines for core developers:

- Questionable or extensive changes should be submitted as a pull request instead of being committed directly to the main repository. The pull request should be reviewed by another core developer before it is merged.
- Trivial changes can be committed directly but be sure to keep the repository in a good working state and that all tests pass before pushing your changes.
- When committing code written by someone else, please attribute the original author in the commit message and any relevant `CHANGES.rst` entry.

Membership

Core membership is predicated on continued active contribution to the project. In general, prospective cores should demonstrate:

- a good understanding of one of more components of Sphinx
- a history of helpful, constructive contributions
- a willingness to invest time improving Sphinx

Refer to *Contributing to Sphinx* for more information on how you can get started.

Other contributors

You do not need to be a core developer or have write access to be involved in the development of Sphinx. You can submit patches or create pull requests from forked repositories and have a core developer add the changes for you.

Similarly, contributions are not limited to code patches. We also welcome help triaging bugs, input on design decisions, reviews of existing patches and documentation improvements. More information can be found in [Contributing to Sphinx](#).

A list of people that have contributed to Sphinx can be found in [Sphinx authors](#).

9.4 Sphinx Code of Conduct

Like the technical community as a whole, the Sphinx team and community is made up of volunteers from all over the world. Diversity is a strength, but it can also lead to communication issues and unhappiness. To that end, we have a few ground rules that we ask people to adhere to.

- **Be friendly and patient.**
- **Be welcoming.** We strive to be a community that welcomes and supports people of all backgrounds and identities. This includes, but is not limited to members of any race, ethnicity, culture, national origin, colour, immigration status, social and economic class, educational level, sex, sexual orientation, gender identity and expression, age, size, family status, political belief, religion, and mental and physical ability.
- **Be considerate.** Your work will be used by other people, and you in turn will depend on the work of others. Any decision you take will affect users and colleagues, and you should take those consequences into account when making decisions. Remember that we're a world-wide community, so you might not be communicating in someone else's primary language.
- **Be respectful.** Not all of us will agree all the time, but disagreement is no excuse for poor behavior and poor manners. We might all experience some frustration now and then, but we cannot allow that frustration to turn into a personal attack. It's important to remember that a community where people feel uncomfortable or threatened is not a productive one. Members of the Sphinx community should be respectful when dealing with other members as well as with people outside the Sphinx community.
- **Be careful in the words that you choose.** We are a community of professionals, and we conduct ourselves professionally. Be kind to others. Do not insult or put down other participants. Harassment and other exclusionary behavior aren't acceptable. This includes, but is not limited to:
 - Violent threats or language directed against another person.
 - Discriminatory jokes and language.
 - Posting sexually explicit or violent material.
 - Posting (or threatening to post) other people's personally identifying information ("doxing").
 - Personal insults, especially those using racist or sexist terms.
 - Unwelcome sexual attention.
 - Advocating for, or encouraging, any of the above behavior.
 - Repeated harassment of others. In general, if someone asks you to stop, then stop.
- **When we disagree, try to understand why.** Disagreements, both social and technical, happen all the time and Sphinx is no exception. It is important that we resolve disagreements and differing views constructively. Remember that we're different. Different people have different perspectives on issues. Being unable to understand why someone holds a viewpoint doesn't mean that they're wrong. Don't forget that it is human to err and blaming each other doesn't get us anywhere. Instead, focus on helping to resolve issues and learning from mistakes.

This isn't an exhaustive list of things that you can't do. Rather, take it in the spirit in which it's intended - a guide to make it easier to enrich all of us and the technical communities in which we participate. This code of conduct applies to all spaces of the Sphinx community.

Attribution

Original text courtesy of the Speak Up! project: <http://web.archive.org/web/20141109123859/http://speakup.io/coc.html>.

SPHINX FAQ

This is a list of Frequently Asked Questions about Sphinx. Feel free to suggest new entries!

10.1 How do I...

... create PDF files without LaTeX?

[rinohtype](#)⁹⁸⁷ provides a PDF builder that can be used as a drop-in replacement for the LaTeX builder.

... get section numbers?

They are automatic in LaTeX output; for HTML, give a `:numbered:` option to the `toctree` directive where you want to start numbering.

... customize the look of the built HTML files?

Use themes, see *HTML Theming*.

... add global substitutions or includes?

Add them in the `rst_prolog` or `rst_epilog` config value.

... display the whole TOC tree in the sidebar?

Use the `toctree` callable in a custom layout template, probably in the `sidebartoc` block.

... write my own extension?

See the *Extension tutorials*.

... convert from my existing docs using MoinMoin markup?

The easiest way is to convert to xhtml, then convert xhtml to reST⁹⁸⁸. You'll still need to mark up classes and such, but the headings and code examples come through cleanly.

For many more extensions and other contributed stuff, see the [sphinx-contrib](#)⁹⁸⁹ repository.

⁹⁸⁷ <https://github.com/breichtm/rinohtype>

⁹⁸⁸ <https://docutils.sourceforge.io/sandbox/xhtml2rest/xhtml2rest.py>

⁹⁸⁹ <https://github.com/sphinx-contrib/>

10.2 Using Sphinx with...

Read the Docs

[Read the Docs](https://readthedocs.org)⁹⁹⁰ is a documentation hosting service based around Sphinx. They will host sphinx documentation, along with supporting a number of other features including version support, PDF generation, and more. The [Getting Started](https://docs.readthedocs.io/en/stable/intro/getting-started-with-sphinx.html)⁹⁹¹ guide is a good place to start.

Epydoc

There's a third-party extension providing an [api role](#)⁹⁹² which refers to Epydoc's API docs for a given identifier.

Doxygen

Michael Jones is developing a reST/Sphinx bridge to doxygen called [breathe](#)⁹⁹³.

SCons

Glenn Hutchings has written a SCons build script to build Sphinx documentation; it is hosted here: <https://bitbucket-archive.softwareheritage.org/projects/zo/zondo/sphinx-scons.html>

PyPI

Jannis Leidel wrote a [setuptools command](#)⁹⁹⁴ that automatically uploads Sphinx documentation to the PyPI package documentation area at <https://pythonhosted.org/>.

GitHub Pages

Please add [sphinx.ext.githubpages](#) to your project. It allows you to publish your document in GitHub Pages. It generates helper files for GitHub Pages on building HTML document automatically.

MediaWiki

See [sphinx-wiki](#)⁹⁹⁵, a project by Kevin Dunn.

Google Analytics

You can use a custom `layout.html` template, like this:

```
{% extends "!layout.html" %}

{%- block extrahead %}
{{ super() }}
<script>
    var _gaq = _gaq || [];
    _gaq.push(['_setAccount', 'XXX account number XXX']);
    _gaq.push(['_trackPageview']);
</script>
{% endblock %}

{% block footer %}
{{ super() }}
<div class="footer">This page uses <a href="https://analytics.google.com/">
Google Analytics</a> to collect statistics. You can disable it by blocking
the JavaScript coming from www.google-analytics.com.
<script>
    (function() {
        var ga = document.createElement('script');
        ga.src = ('https:' == document.location.protocol ?
```

(continues on next page)

⁹⁹⁰ <https://readthedocs.org>

⁹⁹¹ <https://docs.readthedocs.io/en/stable/intro/getting-started-with-sphinx.html>

⁹⁹² <https://git.savannah.gnu.org/cgit/kenozoid.git/tree/doc/extapi.py>

⁹⁹³ <https://github.com/michaeljones/breathe/tree/master>

⁹⁹⁴ <https://pypi.org/project/Sphinx-PyPI-upload/>

⁹⁹⁵ <https://bitbucket-archive.softwareheritage.org/projects/ke/kevindunn/sphinx-wiki.html>

(continued from previous page)

```

        'https://ssl' : 'https://www') + '.google-analytics.com/ga.js';
    ga.setAttribute('async', 'true');
    document.documentElement.firstChild.appendChild(ga);
  })();
</script>
</div>
{% endblock %}

```

Google Search

To replace Sphinx’s built-in search function with Google Search, proceed as follows:

1. Go to <https://cse.google.com/cse/all> to create the Google Search code snippet.
2. Copy the code snippet and paste it into `_templates/searchbox.html` in your Sphinx project:

```

<div>
  <h3>{{ _('Quick search') }}</h3>
  <script>
    (function() {
      var cx = '.....';
      var gcse = document.createElement('script');
      gcse.async = true;
      gcse.src = 'https://cse.google.com/cse.js?cx=' + cx;
      var s = document.getElementsByTagName('script')[0];
      s.parentNode.insertBefore(gcse, s);
    })();
  </script>
  <gcse:search></gcse:search>
</div>

```

3. Add `searchbox.html` to the `html_sidebars` configuration value.

10.3 Sphinx vs. Docutils

tl;dr: *docutils* converts reStructuredText to multiple output formats. Sphinx builds upon docutils to allow construction of cross-referenced and indexed bodies of documentation.

*docutils*⁹⁹⁶ is a text processing system for converting plain text documentation into other, richer formats. As noted in the *docutils documentation*⁹⁹⁷, docutils uses *readers* to read a document, *parsers* for parsing plain text formats into an internal tree representation made up of different types of *nodes*, and *writers* to output this tree in various document formats. docutils provides parsers for one plain text format - *reStructuredText*⁹⁹⁸ - though other, *out-of-tree* parsers have been implemented including Sphinx’s *Markdown parser*. On the other hand, it provides writers for many different formats including HTML, LaTeX, man pages, Open Document Format and XML.

docutils exposes all of its functionality through a variety of *front-end tools*⁹⁹⁹, such as `rst2html`, `rst2odt` and `rst2xml`. Crucially though, all of these tools, and docutils itself, are concerned with individual documents. They don’t support concepts such as cross-referencing, indexing of documents, or the construction of a document hierarchy (typically manifesting in a table of contents).

⁹⁹⁶ <https://docutils.sourceforge.io/>

⁹⁹⁷ <https://docutils.sourceforge.io/docs/dev/hacking.html>

⁹⁹⁸ <https://docutils.sourceforge.io/rst.html>

⁹⁹⁹ <https://docutils.sourceforge.io/docs/user/tools.html>

Sphinx builds upon docutils by harnessing docutils' readers and parsers and providing its own *Builders*. As a result, Sphinx wraps some of the *writers* provided by docutils. This allows Sphinx to provide many features that would simply not be possible with docutils, such as those outlined above.

10.4 Epub info

The following list gives some hints for the creation of epub files:

- Split the text into several files. The longer the individual HTML files are, the longer it takes the ebook reader to render them. In extreme cases, the rendering can take up to one minute.
- Try to minimize the markup. This also pays in rendering time.
- For some readers you can use embedded or external fonts using the CSS `@font-face` directive. This is *extremely* useful for code listings which are often cut at the right margin. The default Courier font (or variant) is quite wide and you can only display up to 60 characters on a line. If you replace it with a narrower font, you can get more characters on a line. You may even use [FontForge](https://fontforge.github.io/)¹⁰⁰⁰ and create narrow variants of some free font. In my case I get up to 70 characters on a line.

You may have to experiment a little until you get reasonable results.

- Test the created epubs. You can use several alternatives. The ones I am aware of are [Epubcheck](https://github.com/IDPF/epubcheck)¹⁰⁰¹, [Calibre](https://calibre-ebook.com/)¹⁰⁰², [FBReader](https://fbreader.org/)¹⁰⁰³ (although it does not render the CSS), and [Bookworm](https://www.oreilly.com/bookworm/index.html)¹⁰⁰⁴. For Bookworm, you can download the source from <https://code.google.com/archive/p/threepress> and run your own local server.
- Large floating divs are not displayed properly. If they cover more than one page, the div is only shown on the first page. In that case you can copy the `epub.css` from the `sphinx/themes/epub/static/` directory to your local `_static/` directory and remove the float settings.
- Files that are inserted outside of the `toctree` directive must be manually included. This sometimes applies to appendixes, e.g. the glossary or the indices. You can add them with the `epub_post_files` option.
- The handling of the epub cover page differs from the reStructuredText procedure which automatically resolves image paths and puts the images into the `_images` directory. For the epub cover page put the image in the `html_static_path` directory and reference it with its full path in the `epub_cover` config option.
- [kindlegen](https://www.amazon.com/gp/feature.html?docId=1000765211)¹⁰⁰⁵ command can convert from epub3 resulting file to .mobi file for Kindle. You can get yourdoc.mobi under `_build/epub` after the following command:

```
$ make epub
$ kindlegen _build/epub/yourdoc.epub
```

The `kindlegen` command doesn't accept documents that have section titles surrounding `toctree` directive:

```
Section Title
=====

.. toctree::

    subdocument
```

(continues on next page)

¹⁰⁰⁰ <https://fontforge.github.io/>

¹⁰⁰¹ <https://github.com/IDPF/epubcheck>

¹⁰⁰² <https://calibre-ebook.com/>

¹⁰⁰³ <https://fbreader.org/>

¹⁰⁰⁴ <https://www.oreilly.com/bookworm/index.html>

¹⁰⁰⁵ <https://www.amazon.com/gp/feature.html?docId=1000765211>

(continued from previous page)

Section After Toc Tree

kindlegen assumes all documents order in line, but the resulting document has complicated order for kindlegen:

```
``parent.xhtml`` -> ``child.xhtml`` -> ``parent.xhtml``
```

If you get the following error, fix your document structure:

```
Error(prcgen):E24011: TOC section scope is not included in the parent_
↳chapter:(title)
Error(prcgen):E24001: The table of content could not be built.
```

10.5 Texinfo info

There are two main programs for reading Info files, `info` and GNU Emacs. The `info` program has less features but is available in most Unix environments and can be quickly accessed from the terminal. Emacs provides better font and color display and supports extensive customization (of course).

Displaying Links

One noticeable problem you may encounter with the generated Info files is how references are displayed. If you read the source of an Info file, a reference to this section would look like:

```
* note Displaying Links: target-id
```

In the stand-alone reader, `info`, references are displayed just as they appear in the source. Emacs, on the other-hand, will by default replace `*note:` with `see` and hide the `target-id`. For example:

Displaying Links

One can disable generation of the inline references in a document with `texinfo_cross_references`. That makes an info file more readable with stand-alone reader (`info`).

The exact behavior of how Emacs displays references is dependent on the variable `Info-hide-note-references`. If set to the value of `hide`, Emacs will hide both the `*note:` part and the `target-id`. This is generally the best way to view Sphinx-based documents since they often make frequent use of links and do not take this limitation into account. However, changing this variable affects how all Info documents are displayed and most do take this behavior into account.

If you want Emacs to display Info files produced by Sphinx using the value `hide` for `Info-hide-note-references` and the default value for all other Info files, try adding the following Emacs Lisp code to your start-up file, `~/ .emacs.d/init.el`.

```
(defadvice info-insert-file-contents (after
                                       sphinx-info-insert-file-contents
                                       activate)
  "Hack to make 'Info-hide-note-references' buffer-local and
  automatically set to 'hide' iff it can be determined that this file
  was created from a Texinfo file generated by Docutils or Sphinx."
  (set (make-local-variable 'Info-hide-note-references)
       (default-value 'Info-hide-note-references)))
```

(continues on next page)

(continued from previous page)

```
(save-excursion
  (save-restriction
    (widen) (goto-char (point-min))
    (when (re-search-forward
      "^Generated by \\\(Sphinx\\|Docutils\\)"
      (save-excursion (search-forward "\x1f" nil t)) t)
      (set (make-local-variable 'Info-hide-note-references)
        'hide))))
```

Notes

The following notes may be helpful if you want to create Texinfo files:

- Each section corresponds to a different node in the Info file.
- Colons (:) cannot be properly escaped in menu entries and xrefs. They will be replaced with semicolons (;).
- Links to external Info files can be created using the somewhat official URI scheme `info`. For example:

```
info:Texinfo#makeinfo_options
```

SPHINX AUTHORS

11.1 Maintainers

Listed alphabetically in forename, surname order

- Adam Turner <@AA-Turner>
- Bénédict Tran <@picnixz>
- Chris Sewell <@chrisjsewell>
- François Freitag <@francoisfreitag>
- Jakob Lykke Andersen <@jakobandersen>
- Jean-François Burnol <@jfbu>
- Stephen Finucane <@stephenfin>
- Takayuki Shimizukawa <@shimizukawa>
- Takeshi Komiya <@tk0miya>

11.2 Contributors

Listed alphabetically in forename, surname order

- Adrián Chaves (Gallaecio) – coverage builder improvements
- Alastair Houghton – Apple Help builder
- Alexander Todorov – inheritance_diagram tests and improvements
- Andi Albrecht – agogo theme
- Antonio Valentino – qthelp builder, docstring inheritance
- Antti Kaihola – doctest extension (skipif option)
- Barry Warsaw – setup command improvements
- Ben Egan – Napoleon improvements
- Benjamin Peterson – unittests
- Blaise Laflamme – pyramid theme
- Bruce Mitchener – Minor epub improvement
- Buck Evan – dummy builder

- Charles Duffy – original graphviz extension
- Chris Lamb – reproducibility fixes
- Christopher Perkins – autosummary integration
- Dan MacKinlay – metadata fixes
- Daniel Bültmann – todo extension
- Daniel Neuhäuser – JavaScript domain, Python 3 support (GSOC)
- Daniel Pizetta – inheritance diagram improvements
- Dave Kuhlman – original LaTeX writer
- Doug Hellmann – graphviz improvements
- Eric N. Vander Weele – autodoc improvements
- Etienne Desautels – apidoc module
- Ezio Melotti – collapsible sidebar JavaScript
- Filip Vavera – napoleon todo directive
- Glenn Matthews – python domain signature improvements
- Gregory Szorc – performance improvements
- Henrique Bastos – SVG support for graphviz extension
- Hernan Grecco – search improvements
- Hong Xu – svg support in imgmath extension and various bug fixes
- Horst Gutmann – internationalization support
- Hugo van Kemenade – support FORCE_COLOR and NO_COLOR
- Ian Lee – quickstart improvements
- Jacob Mason – websupport library (GSOC project)
- Jeppe Pihl – literalinclude improvements
- Joel Wurtz – cellspanning support in LaTeX
- John Waltman – Texinfo builder
- Josip Dzolonga – coverage builder
- Julien Palard – Colspan and rowspan in text builder
- Kevin Dunn – MathJax extension
- KINEBUCHI Tomohiko – typing Sphinx as well as docutils
- Kurt McKee – documentation updates
- Lars Hupfeldt Nielsen - OpenSSL FIPS mode md5 bug fix
- Łukasz Langa – partial support for autodoc
- Marco Buttu – doctest extension (pyversion option)
- Martin Hans – autodoc improvements
- Martin Larralde – additional napoleon admonitions
- Martin Mahner – nature theme

- Matthew Fernandez – todo extension fix
- Matthew Woodcraft – text output improvements
- Michael Droettboom – inheritance_diagram extension
- Michael Wilson – Intersphinx HTTP basic auth support
- Nathan Damon – bugfix in validation of static paths in html builders
- Pauli Virtanen – autodoc improvements, autosummary extension
- Rob Ruana – napoleon extension
- Robert Lehmann – gettext builder (GSOC project)
- Roland Meister – epub builder
- Sebastian Wiesner – image handling, distutils support
- Stefan Seefeld – toctree improvements
- Stefan van der Walt – autosummary extension
- T. Powers – HTML output improvements
- Taku Shimizu – epub3 builder
- Thomas Lamb – linkcheck builder
- Thomas Waldmann – apidoc module fixes
- Tim Hoffmann – theme improvements
- Vince Salvino – JavaScript search improvements
- Will Maier – directory HTML builder
- Zac Hatfield-Dodds – doctest reporting improvements, intersphinx performance

11.3 Former maintainers

Listed alphabetically in forename, surname order

Former maintainers are those who haven't committed in the last two years. Those on the list below may become active maintainers again at any time.

- Armin Ronacher <@mitsuhiko>
- Daniel Neuhäuser <@DasIch>
- Georg Brandl <georg@python.org>
- Rob Ruana <@RobRuana>
- Robert Lehmann <@lehmannro>
- Timotheus Kampik <@TimKam>
- Yoshiki Shibukawa <@shibukawa>

Many thanks for all contributions!

COMMAND-LINE TOOLS

These are the applications provided as part of Sphinx.

12.1 Core Applications

sphinx-quickstart

Synopsis

sphinx-quickstart

Description

sphinx-quickstart is an interactive tool that asks some questions about your project and then generates a complete documentation directory and sample Makefile to be used with *sphinx-build(1)*.

Options

-q, --quiet

Quiet mode that skips the interactive wizard for specifying options. This option requires *-p*, *-a* and *-v* options.

-h, --help, --version

Display usage summary or Sphinx version.

Structure Options

--sep

If specified, separate source and build directories.

--no-sep

If specified, create build directory under source directory.

--dot=DOT

Inside the root directory, two more directories will be created; “_templates” for custom HTML templates and “_static” for custom stylesheets and other static files. You can enter another prefix (such as “.”) to replace the underscore.

Project Basic Options

- p PROJECT, --project=PROJECT**
Project name will be set. (see [project](#)).
- a AUTHOR, --author=AUTHOR**
Author names. (see [copyright](#)).
- v VERSION**
Version of project. (see [version](#)).
- r RELEASE, --release=RELEASE**
Release of project. (see [release](#)).
- l LANGUAGE, --language=LANGUAGE**
Document language. (see [language](#)).
- suffix=SUFFIX**
Source file suffix. (see [source_suffix](#)).
- master=MASTER**
Master document name. (see [root_doc](#)).

Extension Options

- ext-autodoc**
Enable [sphinx.ext.autodoc](#) extension.
- ext-doctest**
Enable [sphinx.ext.doctest](#) extension.
- ext-intersphinx**
Enable [sphinx.ext.intersphinx](#) extension.
- ext-todo**
Enable [sphinx.ext.todo](#) extension.
- ext-coverage**
Enable [sphinx.ext.coverage](#) extension.
- ext-imgmath**
Enable [sphinx.ext.imgmath](#) extension.
- ext-mathjax**
Enable [sphinx.ext.mathjax](#) extension.
- ext-ifconfig**
Enable [sphinx.ext.ifconfig](#) extension.
- ext-viewcode**
Enable [sphinx.ext.viewcode](#) extension.
- ext-githubpages**
Enable [sphinx.ext.githubpages](#) extension.
- extensions=EXTENSIONS**
Enable arbitrary extensions.

Makefile and Batchfile Creation Options

--use-make-mode (-m), **--no-use-make-mode** (-M)

Makefile/make.bat uses (or doesn't use) *make-mode*. Default is use, which generates a more concise Makefile/make.bat.

Changed in version 1.5: make-mode is default.

Changed in version 7.3: Support for disabling the make-mode will be removed in Sphinx 8.

--makefile, **--no-makefile**

Create (or not create) makefile.

--batchfile, **--no-batchfile**

Create (or not create) batchfile

Project templating

Added in version 1.5: Project templating options for sphinx-quickstart

-t, **--templatedir=TEMPLATEDIR**

Template directory for template files. You can modify the templates of sphinx project files generated by quickstart. Following Jinja2 template files are allowed:

- root_doc.rst_t
- conf.py_t
- Makefile_t
- Makefile.new_t
- make.bat_t
- make.bat.new_t

In detail, please refer the system template files Sphinx provides. (sphinx/templates/quickstart)

-d NAME=VALUE

Define a template variable

See also

sphinx-build(1)

sphinx-build

Synopsis

sphinx-build [*options*] <*sourcedir*> <*outputdir*> [*filenames* ...]

Description

sphinx-build generates documentation from the files in < sourcedir > and places it in the < outputdir >.

sphinx-build looks for < sourcedir >/conf.py for the configuration settings. *sphinx-quickstart(1)* may be used to generate template files, including conf.py.

sphinx-build can create documentation in different formats. A format is selected by specifying the builder name on the command line; it defaults to HTML. Builders can also perform other tasks related to documentation processing. For a list of available builders, refer to *Builders*.

By default, everything that is outdated is built. Output only for selected files can be built by specifying individual filenames.

Options

-M buildername

Select a builder, using the *make-mode*. See *Builders* for a list of all of Sphinx's built-in builders. Extensions can add their own builders.

Important: Sphinx only recognizes the -M option if it is used first, along with the source and output directories, before any other options are passed. For example:

```
sphinx-build -M html ./source ./build -W --keep-going
```

The *make-mode* provides the same build functionality as a default *Makefile* or *Make.bat*, and provides the following additional build pipelines:

latexpdf

Build LaTeX files and run them through **pdf_latex**, or as per *latex_engine* setting. If *language* is set to 'ja', will use automatically the **platex/dvipdfmx** latex to PDF pipeline.

info

Build Texinfo files and run them through **makeinfo**.

Note: The default output directory locations when using *make-mode* differ from the defaults when using *-b*.

- doctrees are saved to < outputdir >/doctrees
 - output files are saved to < outputdir >/< builder name >
-

Added in version 1.2.1.

-b buildername, **--builder** buildername

Selects a builder.

See *Builders* for a list of all of Sphinx's built-in builders. Extensions can add their own builders.

Changed in version 7.3: Add --builder long option.

-a, **--write-all**

If given, always write all output files. The default is to only write output files for new and changed source files. (This may not apply to all builders.)

Note: This option does not re-read source files. To read and re-process every file, use `--fresh-env` instead.

Changed in version 7.3: Add `--write-all` long option.

-E, --fresh-env

Don't use a saved *environment* (the structure caching all cross-references), but rebuild it completely. The default is to only read and parse source files that are new or have changed since the last run.

Changed in version 7.3: Add `--fresh-env` long option.

-t tag, --tag tag

Define the tag *tag*. This is relevant for *only* directives that only include their content if this tag is set.

Added in version 0.6.

Changed in version 7.3: Add `--tag` long option.

-d path, --doctree-dir path

Since Sphinx has to read and parse all source files before it can write an output file, the parsed source files are cached as “doctree pickles”. Normally, these files are put in a directory called `.doctrees` under the build directory; with this option you can select a different cache directory (the doctrees can be shared between all builders).

Changed in version 7.3: Add `--doctree-dir` long option.

-j N, --jobs N

Distribute the build over *N* processes in parallel, to make building on multiprocessor machines more effective. Note that not all parts and not all builders of Sphinx can be parallelized. If `auto` argument is given, Sphinx uses the number of CPUs as *N*.

Added in version 1.2: This option should be considered *experimental*.

Changed in version 1.7: Support `auto` argument.

Changed in version 6.2: Add `--jobs` long option.

-c path, --config-dir path

Don't look for the `conf.py` in the source directory, but use the given configuration directory instead. Note that various other files and paths given by configuration values are expected to be relative to the configuration directory, so they will have to be present at this location too.

Added in version 0.3.

Changed in version 7.3: Add `--config-dir` long option.

-C, --isolated

Don't look for a configuration file; only take options via the `--define` option.

Added in version 0.5.

Changed in version 7.3: Add `--isolated` long option.

-D setting=value, --define setting=value

Override a configuration value set in the `conf.py` file. The value must be a number, string, list or dictionary value.

For lists, you can separate elements with a comma like this: `-D html_theme_path=path1,path2`.

For dictionary values, supply the setting name and key like this: `-D latex_elements.docclass=srartcl`.

For boolean values, use `0` or `1` as the value.

Changed in version 0.6: The value can now be a dictionary value.

Changed in version 1.3: The value can now also be a list value.

Changed in version 7.3: Add `--define` long option.

-A name=value, --html-define name=value

Make the *name* assigned to *value* in the HTML templates.

Added in version 0.5.

Changed in version 7.3: Add `--html-define` long option.

-n, --nitpicky

Run in nit-picky mode. Currently, this generates warnings for all missing references. See the config value [`nitpick_ignore`](#) for a way to exclude some references as “known missing”.

Changed in version 7.3: Add `--nitpicky` long option.

-N, --no-color

Do not emit colored output.

Changed in version 1.6: Add `--no-color` long option.

--color

Emit colored output. Auto-detected by default.

Added in version 1.6.

-v, --verbose

Increase verbosity (log-level). This option can be given up to three times to get more debug logging output. It implies `-T`.

Added in version 1.2.

Changed in version 7.3: Add `--verbose` long option.

-q, --quiet

Do not output anything on standard output, only write warnings and errors to standard error.

Changed in version 7.3: Add `--quiet` long option.

-Q, --silent

Do not output anything on standard output, also suppress warnings. Only errors are written to standard error.

Changed in version 7.3: Add `--silent` long option.

-w file, --warning-file file

Write warnings (and errors) to the given file, in addition to standard error.

Changed in version 7.3: ANSI control sequences are stripped when writing to *file*.

Changed in version 7.3: Add `--warning-file` long option.

-W, --fail-on-warning

Turn warnings into errors. This means that the build stops at the first warning and `sphinx-build` exits with exit status 1.

Changed in version 7.3: Add `--fail-on-warning` long option.

--keep-going

With `-W` option, keep going processing when getting warnings to the end of build, and `sphinx-build` exits with exit status 1.

Added in version 1.8.

-T, --show-traceback

Display the full traceback when an unhandled exception occurs. Otherwise, only a summary is displayed and the traceback information is saved to a file for further analysis.

Added in version 1.2.

Changed in version 7.3: Add `--show-traceback` long option.

-P, --pdb

(Useful for debugging only.) Run the Python debugger, `pdb`¹⁰⁰⁶, if an unhandled exception occurs while building.

Changed in version 7.3: Add `--pdb` long option.

-h, --help, --version

Display usage summary or Sphinx version.

Added in version 1.2.

You can also give one or more filenames on the command line after the source and build directories. Sphinx will then try to build only these output files (and their dependencies).

Environment Variables

The **sphinx-build** refers following environment variables:

MAKE

A path to make command. A command name is also allowed. **sphinx-build** uses it to invoke sub-build process on make-mode.

Makefile Options

The Makefile and `make.bat` files created by **sphinx-quickstart** usually run **sphinx-build** only with the `-b` and `-d` options. However, they support the following variables to customize behavior:

PAPER

This sets the 'papersize' key of `latex_elements`: i.e. `PAPER=a4` sets it to 'a4paper' and `PAPER=letter` to 'letterpaper'.

Note: Usage of this environment variable got broken at Sphinx 1.5 as `a4` or `letter` ended up as option to LaTeX document in place of the needed `a4paper`, resp. `letterpaper`. Fixed at 1.7.7.

SPHINXBUILD

The command to use instead of `sphinx-build`.

BUILDDIR

The build directory to use instead of the one chosen in **sphinx-quickstart**.

¹⁰⁰⁶ <https://docs.python.org/3/library/pdb.html#module-pdb>

SPHINXOPTS

Additional options for **sphinx-build**. These options can also be set via the shortcut variable **O** (capital ‘o’).

NO_COLOR

When set (regardless of value), **sphinx-build** will not use color in terminal output. **NO_COLOR** takes precedence over **FORCE_COLOR**. See no-color.org¹⁰⁰⁷ for other libraries supporting this community standard.

Added in version 4.5.0.

FORCE_COLOR

When set (regardless of value), **sphinx-build** will use color in terminal output. **NO_COLOR** takes precedence over **FORCE_COLOR**.

Added in version 4.5.0.

Deprecation Warnings

If any deprecation warning like `RemovedInSphinxXXXWarning` are displayed when building a user’s document, some Sphinx extension is using deprecated features. In that case, please report it to author of the extension.

To disable the deprecation warnings, please set `PYTHONWARNINGS=` environment variable to your environment. For example:

- `PYTHONWARNINGS= make html` (Linux/Mac)
- `export PYTHONWARNINGS=` and do `make html` (Linux/Mac)
- `set PYTHONWARNINGS=` and do `make html` (Windows)
- modify your Makefile/make.bat and set the environment variable

See also

`sphinx-quickstart(1)`

12.2 Additional Applications

sphinx-apidoc

Synopsis

sphinx-apidoc [*OPTIONS*] -o <*OUTPUT_PATH*> <*MODULE_PATH*> [*EXCLUDE_PATTERN* ...]

¹⁰⁰⁷ <https://no-color.org/>

Description

sphinx-apidoc is a tool for automatic generation of Sphinx sources that, using the [autodoc](#) extension, document a whole package in the style of other automatic API documentation tools.

MODULE_PATH is the path to a Python package to document, and *OUTPUT_PATH* is the directory where the generated sources are placed. Any *EXCLUDE_PATTERNS* given are [fnmatch-style](#)¹⁰⁰⁸ file and/or directory patterns that will be excluded from generation.

Warning: **sphinx-apidoc** generates source files that use [sphinx.ext.autodoc](#) to document all found modules. If any modules have side effects on import, these will be executed by autodoc when **sphinx-build** is run.

If you document scripts (as opposed to library modules), make sure their main routine is protected by a `if __name__ == '__main__':` condition.

Options

- o** <OUTPUT_PATH>
Directory to place the output files. If it does not exist, it is created.
- q**
Do not output anything on standard output, only write warnings and errors to standard error.
- f, --force**
Force overwriting of any existing generated files.
- l, --follow-links**
Follow symbolic links. Defaults to False.
- n, --dry-run**
Do not create any files.
- s** <suffix>
Suffix for the source files generated. Defaults to `rst`.
- d** <MAXDEPTH>
Maximum depth for the generated table of contents file. Defaults to 4.
- tocfile**
Filename for a table of contents file. Defaults to `modules`.
- T, --no-toc**
Do not create a table of contents file. Ignored when **--full** is provided.
- F, --full**
Generate a full Sphinx project (`conf.py`, `Makefile` etc.) using the same mechanism as **sphinx-quickstart**.
- e, --separate**
Put documentation for each module on its own page.
Added in version 1.2.

¹⁰⁰⁸ <https://docs.python.org/3/library/fnmatch.html>

-E, --no-headings

Do not create headings for the modules/packages. This is useful, for example, when docstrings already contain headings.

-P, --private

Include “_private” modules.

Added in version 1.2.

--implicit-namespaces

By default sphinx-apidoc processes `sys.path` searching for modules only. Python 3.3 introduced [PEP 420¹⁰⁰⁹](#) implicit namespaces that allow module path structures such as `foo/bar/module.py` or `foo/bar/baz/__init__.py` (notice that `bar` and `foo` are namespaces, not modules).

Interpret paths recursively according to PEP-0420.

-M, --module-first

Put module documentation before submodule documentation.

These options are used when `--full` is specified:

-a

Append `module_path` to `sys.path`.

-H <project>

Sets the project name to put in generated files (see [project](#)).

-A <author>

Sets the author name(s) to put in generated files (see [copyright](#)).

-V <version>

Sets the project version to put in generated files (see [version](#)).

-R <release>

Sets the project release to put in generated files (see [release](#)).

Project templating

Added in version 2.2: Project templating options for sphinx-apidoc

-t, --templatedir=TEMPLATEDIR

Template directory for template files. You can modify the templates of sphinx project files generated by apidoc. Following Jinja2 template files are allowed:

- `module.rst_t`
- `package.rst_t`
- `toc.rst_t`
- `root_doc.rst_t`
- `conf.py_t`
- `Makefile_t`
- `Makefile.new_t`
- `make.bat_t`

¹⁰⁰⁹ <https://peps.python.org/pep-0420/>

- `make.bat.new_t`

In detail, please refer the system template files Sphinx provides. (`sphinx/templates/apidoc` and `sphinx/templates/quickstart`)

Environment

SPHINX_APIDOC_OPTIONS

A comma-separated list of option to append to generated automodule directives. Defaults to `members, undoc-members, show-inheritance`.

See also

sphinx-build(1), *sphinx-autogen(1)*

sphinx-autogen

Synopsis

sphinx-autogen [*options*] <sourcefile> ...

Description

sphinx-autogen is a tool for automatic generation of Sphinx sources that, using the *autodoc* extension, document items included in *autosummary* listing(s).

sourcefile is the path to one or more reStructuredText documents containing *autosummary* entries with the `:toctree::` option set. *sourcefile* can be an *fnmatch*¹⁰¹⁰-style pattern.

Options

-o <outputdir>

Directory to place the output file. If it does not exist, it is created. Defaults to the value passed to the `:toctree:` option.

-s <suffix>, **--suffix** <suffix>

Default suffix to use for generated files. Defaults to `rst`.

-t <templates>, **--templates** <templates>

Custom template directory. Defaults to `None`.

-i, **--imported-members**

Document imported members.

-a, **--respect-module-all**

Document exactly the members in a module's `__all__` attribute.

¹⁰¹⁰ <https://docs.python.org/3/library/fnmatch.html#module-fnmatch>

Example

Given the following directory structure:

```
docs
├── index.rst
└── ...
foobar
├── foo
│   └── __init__.py
├── bar
│   ├── __init__.py
│   ├── baz
│   └── __init__.py
```

and assuming docs/index.rst contained the following:

```
Modules
=====

.. autosummary::
   :toctree: modules

   foobar.foo
   foobar.bar
   foobar.bar.baz
```

If you run the following:

```
$ PYTHONPATH=. sphinx-autogen docs/index.rst
```

then the following stub files will be created in docs:

```
docs
├── index.rst
├── modules
│   ├── foobar.bar.rst
│   ├── foobar.bar.baz.rst
│   └── foobar.foo.rst
```

and each of those files will contain a `autodoc` directive and some other information.

See also

`sphinx-build(1)`, `sphinx-apidoc(1)`

GLOSSARY

builder

A class (inheriting from *Builder*) that takes parsed documents and performs an action on them. Normally, builders translate the documents to an output format, but it is also possible to use builders that e.g. check for broken links in the documentation, or build coverage information.

See *Builders* for an overview over Sphinx’s built-in builders.

configuration directory

The directory containing `conf.py`. By default, this is the same as the *source directory*, but can be set differently with the `-c` command-line option.

directive

A reStructuredText markup element that allows marking a block of content with special meaning. Directives are supplied not only by docutils, but Sphinx and custom extensions can add their own. The basic directive syntax looks like this:

```
.. directivename:: argument ...  
   :option: value  
  
   Content of the directive.
```

See *Directives* for more information.

document name

Since reST source files can have different extensions (some people like `.txt`, some like `.rst` – the extension can be configured with *source_suffix*) and different OSes have different path separators, Sphinx abstracts them: *document names* are always relative to the *source directory*, the extension is stripped, and path separators are converted to slashes. All values, parameters and such referring to “documents” expect such document names.

Examples for document names are `index`, `library/zipfile`, or `reference/datamodel/types`. Note that there is no leading or trailing slash.

domain

A domain is a collection of markup (reStructuredText *directives* and *roles*) to describe and link to *objects* belonging together, e.g. elements of a programming language. Directive and role names in a domain have names like `domain:name`, e.g. `py:function`.

Having domains means that there are no naming problems when one set of documentation wants to refer to e.g. C++ and Python classes. It also means that extensions that support the documentation of whole new languages are much easier to write.

For more information, refer to *Domains*.

environment

A structure where information about all documents under the root is saved, and used for cross-referencing. The

environment is pickled after the parsing stage, so that successive runs only need to read and parse new and changed documents.

extension

A custom *role*, *directive* or other aspect of Sphinx that allows users to modify any aspect of the build process within Sphinx.

For more information, refer to *Extensions*.

master document

The document that contains the root *toctree* directive.

root document

Same as *master document*.

object

The basic building block of Sphinx documentation. Every “object directive” (e.g. *py:function* or *object*) creates such a block; and most objects can be cross-referenced to.

RemoveInSphinxXXXWarning

The feature which is warned will be removed in Sphinx-XXX version. It usually caused from Sphinx extensions which is using deprecated. See also *Deprecation Warnings*.

role

A reStructuredText markup element that allows marking a piece of text. Like directives, roles are extensible. The basic syntax looks like this: `:rolename: `content``. See *Inline markup* for details.

source directory

The directory which, including its subdirectories, contains all source files for one Sphinx project.

reStructuredText

An easy-to-read, what-you-see-is-what-you-get plaintext markup syntax and parser system.

CHANGELOG

14.1 Release 7.4.0 (in development)

Dependencies

Incompatible changes

Deprecated

Features added

- [#11165](#)¹⁰¹¹: Support the [officially recommended](#)¹⁰¹² `.jinja` suffix for template files. Patch by James Addison and Adam Turner
- Flatten `Union[Literal[T], Literal[U], ...]` to `Literal[T, U, ...]` when turning annotations into strings. Patch by Adam Turner.

Bugs fixed

- [#12314](#)¹⁰¹³: Properly format `collections.abc.Callable` in annotations. Patch by Adam Turner.
- [#12162](#)¹⁰¹⁴: Fix a performance regression in the C domain that has been present since version 3.0.0. Patch by Donald Hunter.
- [#12320](#)¹⁰¹⁵: Fix removal of anchors from search summaries (regression in 7.3.0). Patch by Will Lachance.
- [#12251](#)¹⁰¹⁶: Fix `merge_domaindata()` in `sphinx.ext.duration`. Patch by Matthias Geier.
- [#12224](#)¹⁰¹⁷: Properly detect WebP files. Patch by Benjamin Cabé.

¹⁰¹¹ <https://github.com/sphinx-doc/sphinx/issues/11165>

¹⁰¹² <https://jinja.palletsprojects.com/en/latest/templates/#template-file-extension>

¹⁰¹³ <https://github.com/sphinx-doc/sphinx/issues/12314>

¹⁰¹⁴ <https://github.com/sphinx-doc/sphinx/issues/12162>

¹⁰¹⁵ <https://github.com/sphinx-doc/sphinx/issues/12320>

¹⁰¹⁶ <https://github.com/sphinx-doc/sphinx/issues/12251>

¹⁰¹⁷ <https://github.com/sphinx-doc/sphinx/issues/12224>

Testing

14.2 Release 7.3.7 (released Apr 19, 2024)

Bugs fixed

- [#12299](#)¹⁰¹⁸: Defer loading themes defined via entry points until their explicit use by the user or a child theme. Patch by Adam Turner.
- [#12305](#)¹⁰¹⁹: Return the default value for `theme.get_config()` with an unsupported theme configuration section. Patch by Adam Turner.

14.3 Release 7.3.6 (released Apr 17, 2024)

Bugs fixed

- [#12295](#)¹⁰²⁰: Re-export all AST types in the C and C++ domains. Patch by Adam Turner.
- [#12295](#)¹⁰²¹: Re-export various objects from `sphinx.domains.python._annotations` in `sphinx.domains.python`. Patch by Jacob Chesslo and Adam Turner.

14.4 Release 7.3.5 (released Apr 17, 2024)

Bugs fixed

- [#12295](#)¹⁰²²: Re-export various objects from `sphinx.domains.python._object` in `sphinx.domains.python`. Patch by Jacob Chesslo and Adam Turner.

14.5 Release 7.3.4 (released Apr 17, 2024)

Bugs fixed

- Handle cases when `Any` is not an instance of `type`. Patch by Adam Turner.

¹⁰¹⁸ <https://github.com/sphinx-doc/sphinx/issues/12299>

¹⁰¹⁹ <https://github.com/sphinx-doc/sphinx/issues/12305>

¹⁰²⁰ <https://github.com/sphinx-doc/sphinx/issues/12295>

¹⁰²¹ <https://github.com/sphinx-doc/sphinx/issues/12295>

¹⁰²² <https://github.com/sphinx-doc/sphinx/issues/12295>

14.6 Release 7.3.3 (released Apr 17, 2024)

Bugs fixed

- [#12290](#)¹⁰²³: Fix a false-positive warning when setting a configuration value with `Any` as the valid type to a type other than the value's default. Patch by Adam Turner.

14.7 Release 7.3.2 (released Apr 17, 2024)

Bugs fixed

- Preload all themes defined via entry points. Patch by Adam Turner.
- Fix a bad interaction between the 'Furo' theme and the new-style for configuration values. Patch by Adam Turner.

14.8 Release 7.3.1 (released Apr 17, 2024)

Dependencies

- Require `tomli` on Python 3.10 and earlier. Patch by Adam Turner.

14.9 Release 7.3.0 (released Apr 16, 2024)

Dependencies

- [#11858](#)¹⁰²⁴: Increase the minimum supported version of Alabaster to 0.7.14. Patch by Adam Turner.
- [#11411](#)¹⁰²⁵: Support `Docutils 0.21`¹⁰²⁶. Patch by Adam Turner.
- [#12012](#)¹⁰²⁷: Use `types-docutils` instead of `docutils-stubs`.

Deprecated

- [#11693](#)¹⁰²⁸: Support for old-style Makefile and `make.bat` output in **sphinx-quickstart**, and the associated options `-M`, `-m`, `--no-use-make-mode`, and `--use-make-mode`.
- [#11285](#)¹⁰²⁹: Direct access to `sphinx.testing.util.SphinxTestApp._status` or `sphinx.testing.util.SphinxTestApp._warning` is deprecated. Use the public properties `sphinx.testing.util.SphinxTestApp.status` and `sphinx.testing.util.SphinxTestApp.warning` instead. Patch by Bénédict Tran.

¹⁰²³ <https://github.com/sphinx-doc/sphinx/issues/12290>

¹⁰²⁴ <https://github.com/sphinx-doc/sphinx/issues/11858>

¹⁰²⁵ <https://github.com/sphinx-doc/sphinx/issues/11411>

¹⁰²⁶ <https://docutils.sourceforge.io/RELEASE-NOTES.html#release-0-21-2024-04-09>

¹⁰²⁷ <https://github.com/sphinx-doc/sphinx/issues/12012>

¹⁰²⁸ <https://github.com/sphinx-doc/sphinx/issues/11693>

¹⁰²⁹ <https://github.com/sphinx-doc/sphinx/issues/11285>

- tests: `sphinx.testing.util.strip_escseq()` is deprecated in favour of `sphinx.util.console.strip_colors()`. Patch by B  n  dikt Tran.

Features added

- [#12265](#)¹⁰³⁰: Support theme configuration via `theme.toml`.
- [#11701](#)¹⁰³¹: HTML Search: Adopt the new `<search>`¹⁰³² element. Patch by Bénédict Tran.
- [#11776](#)¹⁰³³: Add long option names to `sphinx-build`. Patch by Hugo van Kemenade, Adam Turner, Bénédict Tran, and Ezio Melotti.
- Organise the `sphinx-build` options into groups. Patch by Adam Turner.
- [#11855](#)¹⁰³⁴: Defer computation of configuration values. Patch by Adam Turner.
- Add `:no-search:` as an alias of the `:nosearch:` metadata field. Patch by Adam Turner.
- [#11803](#)¹⁰³⁵: autodoc: Use an overridden `__repr__()` function in an enum, if defined. Patch by Shengyu Zhang.
- [#11825](#)¹⁰³⁶: Allow custom targets in the manpage role. Patch by Nicolas Peugnet.
- [#11892](#)¹⁰³⁷: Improved performance when resolving cross references in the C++ domain. Patch by Rouslan Korneychuk.
- [#11905](#)¹⁰³⁸: Add a `versionremoved` directive. Patch by Hugo van Kemenade, Adam Turner, and C.A.M. Gerlach.
- [#11981](#)¹⁰³⁹: Improve rendering of signatures using slice syntax, e.g., `def foo(arg: np.float64[:, :]) -> None: ...`.
- The manpage builder now adds `OSC 8`¹⁰⁴⁰ anchors to hyperlinks, using the `groff`¹⁰⁴¹ device control command.
- [#11015](#)¹⁰⁴²: Change the text of the `versionadded` directive from `New in [...]` to `Added in [...]`. Patch by Bénédict Tran.
- [#12131](#)¹⁰⁴³: Added `show_warning_types` configuration option. Patch by Chris Sewell.
- [#12193](#)¹⁰⁴⁴: Improve external warnings for unknown roles. In particular, suggest related role names if an object type is mistakenly used. Patch by Chris Sewell.
- Add public type alias `sphinx.util.typing.ExtensionMetadata`. This can be used by extension developers to annotate the return type of their `setup` function. Patch by Chris Sewell.

¹⁰³⁰ <https://github.com/sphinx-doc/sphinx/issues/12265>

¹⁰³¹ <https://github.com/sphinx-doc/sphinx/issues/11701>

¹⁰³² <https://developer.mozilla.org/en-US/docs/Web/HTML/Element/search>

¹⁰³³ <https://github.com/sphinx-doc/sphinx/issues/11776>

¹⁰³⁴ <https://github.com/sphinx-doc/sphinx/issues/11855>

¹⁰³⁵ <https://github.com/sphinx-doc/sphinx/issues/11803>

¹⁰³⁶ <https://github.com/sphinx-doc/sphinx/issues/11825>

¹⁰³⁷ <https://github.com/sphinx-doc/sphinx/issues/11892>

¹⁰³⁸ <https://github.com/sphinx-doc/sphinx/issues/11905>

¹⁰³⁹ <https://github.com/sphinx-doc/sphinx/issues/11981>

¹⁰⁴⁰ <https://gist.github.com/egmontkob/eb114294efbcd5adb1944c9f3>

¹⁰⁴¹ <https://lists.gnu.org/archive/html/groff/2021-10/ms>

¹⁰⁴² <https://github.com/sphinx-doc/sphinx/issues/11015>

¹⁰⁴³ <https://github.com/sphinx-doc/sphinx/issues/12131>

Bugs fixed

- [#11668](#)¹⁰⁴⁵: Raise a useful error when `theme.conf` is missing. Patch by Vinay Sajip.
- [#11622](#)¹⁰⁴⁶: Ensure that the order of keys in `searchindex.js` is deterministic. Patch by Pietro Albini.
- [#11617](#)¹⁰⁴⁷: ANSI control sequences are stripped from the output when writing to a warnings file with `-w`. Patch by Bénédict Tran.
- [#11666](#)¹⁰⁴⁸: Skip all hidden directories in `CatalogRepository.pofiles`. Patch by Aryaz Eghbali.
- [#9686](#)¹⁰⁴⁹: html builder: Fix MathJax lazy loading when equations appear in titles. Patch by Bénédict Tran.
- [#11483](#)¹⁰⁵⁰: singlehtml builder: Fix MathJax lazy loading when the index does not contain any math equations. Patch by Bénédict Tran.
- [#11697](#)¹⁰⁵¹: HTML Search: add 'noindex' meta robots tag. Patch by James Addison.
- [#11678](#)¹⁰⁵²: Fix a possible `ZeroDivisionError` in `sphinx.ext.coverage`. Patch by Stephen Finucane.
- [#11756](#)¹⁰⁵³: LaTeX: build error with recent TeXLive due to missing `substitutefont` package (triggered if using `fontenc` with `T2A` option and document language is not a Cyrillic one). Patch by Jean-François B.
- [#11675](#)¹⁰⁵⁴: Fix rendering of progression bars in environments that do not support ANSI control sequences. Patch by Bénédict Tran.
- [#11861](#)¹⁰⁵⁵: Whitelist more types with an incorrect `__module__` attribute. Patch by Adam Turner.
- [#11715](#)¹⁰⁵⁶: Apply `tls_verify` and `tls_cacerts` config to `ImageDownloader`. Patch by Nick Touran.
- Allow hyphens in group names for [productionlist](#) cross-references. Patch by Adam Turner.
- [#11433](#)¹⁰⁵⁷: Added the [linkcheck_allow_unauthorized](#) configuration option. Set this option to `False` to report HTTP 401 (unauthorized) server responses as broken. Patch by James Addison.
- [#11868](#)¹⁰⁵⁸: linkcheck: added a distinct `timeout` reporting status code. This can be enabled by setting [linkcheck_report_timeouts_as_broken](#) to `False`. Patch by James Addison.
- [#11869](#)¹⁰⁵⁹: Refresh the documentation for the `linkcheck_timeout` setting. Patch by James Addison.
- [#11874](#)¹⁰⁶⁰: Configure a default 30-second value for `linkcheck_timeout`. Patch by James Addison.
- [#11886](#)¹⁰⁶¹: Print the Jinja2 template path chain in `TemplateNotFound` exceptions. Patch by Colin Marquardt.
- [#11598](#)¹⁰⁶²: Do not use query components in URLs for assets in EPUB rendering. Patch by David Runge.
- [#11904](#)¹⁰⁶³: Support unary subtraction when parsing annotations. Patch by James Addison.

¹⁰⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/11668>

¹⁰⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/11622>

¹⁰⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/11617>

¹⁰⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/11666>

1049 <https://github.com/sphinx-doc/sphinx/issues/9686>

1050 <https://github.com/sphinx-doc/sphinx/issues/11483>

1051 <https://github.com/sphinx-doc/sphinx/issues/11697>

1052 <https://github.com/sphinx-doc/sphinx/issues/11678>

1053 <https://github.com/sphinx-doc/sphinx/issues/11756>

1054 <https://github.com/sphinx-doc/sphinx/issues/11675>

1055 <https://github.com/sphinx-doc/sphinx/issues/11861>

1056 <https://github.com/sphinx-doc/sphinx/issues/11715>

1057 <https://github.com/sphinx-doc/sphinx/issues/11433>

1058 <https://github.com/sphinx-doc/sphinx/issues/11868>

1059 <https://github.com/sphinx-doc/sphinx/issues/11869>

1060 <https://github.com/sphinx-doc/sphinx/issues/11874>

1061 <https://github.com/sphinx-doc/sphinx/issues/11886>

1062 <https://github.com/sphinx-doc/sphinx/issues/11508>

1063 <https://github.com/sphinx-doc/sphinx/issues/11004>

- [#11925](#)¹⁰⁶⁴: Blacklist the `sphinxprettysearchresults` extension; the functionality it provides was merged into Sphinx v2.0.0. Patch by James Addison.
- [#11917](#)¹⁰⁶⁵: Fix rendering of annotated inherited members for Python 3.9. Patch by Janet Carson.
- [#11935](#)¹⁰⁶⁶: C Domain: Fix namespace-pop context. Patch by Frank Dana.
- [#11923](#)¹⁰⁶⁷: Avoid zombie processes when parallel builds fail. Patch by Felix von Drigalski.
- [#11353](#)¹⁰⁶⁸: Support enumeration classes inheriting from mixin or data types. Patch by Bénédict Tran.
- [#11962](#)¹⁰⁶⁹: Fix target resolution when using `:paramtype:` fields. Patch by Bénédict Tran.
- [#11944](#)¹⁰⁷⁰: Use anchor in search preview. Patch by Will Lachance.
- [#12008](#)¹⁰⁷¹: Fix case-sensitive lookup of `std:label` names in intersphinx inventory. Patch by Michael Goerz.
- [#11958](#)¹⁰⁷²: HTML Search: Fix partial matches overwriting full matches. Patch by William Lachance.
- [#11959](#)¹⁰⁷³: Fix multiple term matching when word appears in both title and document. Patch by Will Lachance.
- [#11474](#)¹⁰⁷⁴: Fix doctrees caching causing files not be rebuilt in some cases, e.g., when `numfig` is True. Patch by Bénédict Tran.
- [#11278](#)¹⁰⁷⁵: autodoc: Fix rendering of `functools singledispatchmethod`¹⁰⁷⁶ combined with `@classmethod`¹⁰⁷⁷. Patch by Bénédict Tran.
- [#11894](#)¹⁰⁷⁸: Do not add checksums to css files if building using the htmlhelp builder. Patch by reduerK akiM.
- [#12052](#)¹⁰⁷⁹: Remove `<script>` and `<style>` tags from the content of search result summary snippets. Patch by James Addison.
- [#11578](#)¹⁰⁸⁰: HTML Search: Order non-main index entries after other results. Patch by Brad King.
- [#12147](#)¹⁰⁸¹: autosummary: Fix a bug whereby the wrong file extension may be used, when multiple suffixes are specified in `source_suffix`. Patch by Sutou Kouhei.
- [#10786](#)¹⁰⁸²: improve the error message when a file to be copied (e.g., an asset) is removed during Sphinx execution. Patch by Bénédict Tran.
- [#12040](#)¹⁰⁸³: HTML Search: Ensure that document titles that are partially-matched by the user search query are included in search results. Patch by James Addison.

¹⁰⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/11925>

¹⁰⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/11917>

¹⁰⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/11935>

¹⁰⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/11923>

¹⁰⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/11353>

¹⁰⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/11962>

¹⁰⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/11944>

¹⁰⁷¹ <https://github.com/sphinx-doc/sphinx/issues/12008>

¹⁰⁷² <https://github.com/sphinx-doc/sphinx/issues/11958>

¹⁰⁷³ <https://github.com/sphinx-doc/sphinx/issues/11959>

¹⁰⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/11474>

¹⁰⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/11278>

¹⁰⁷⁶ <https://docs.python.org/3/library/functools.html#functools.singledispatchmethod>

¹⁰⁷⁷ <https://docs.python.org/3/library/functions.html#classmethod>

¹⁰⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/11894>

¹⁰⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/12052>

¹⁰⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/11578>

¹⁰⁸¹ <https://github.com/sphinx-doc/sphinx/issues/12147>

¹⁰⁸² <https://github.com/sphinx-doc/sphinx/issues/10786>

¹⁰⁸³ <https://github.com/sphinx-doc/sphinx/issues/12040>

- [#11970](#)¹⁰⁸⁴: singlehtml builder: make target URIs to be same-document references in the sense of [RFC 3986](#), §4.4¹⁰⁸⁵, e.g., `index.html#foo` becomes `#foo`. Patch by Eric Norige.
- [#12271](#)¹⁰⁸⁶: Partially revert Docutils' [r9562](#)¹⁰⁸⁷ to fix EPUB files. Patch by Adam Turner.
- [#12253](#)¹⁰⁸⁸: Escape reserved path characters in the remote images post-transform download cache. Patch by James Addison and Adam Turner.

Testing

- Reorganise tests into directories. Patch by Adam Turner.
- Clean up global state in `SphinxTestApp`. Patch by Adam Turner.
- [#11285](#)¹⁰⁸⁹: `pytest.mark.sphinx()` and `sphinx.testing.util.SphinxTestApp` accept `warningiserror`, `keep_going` and `verbosity` as keyword arguments. Patch by Bénédict Tran.
- [#11285](#)¹⁰⁹⁰: `sphinx.testing.util.SphinxTestApp` `status` and `warning` arguments are checked to be `io.StringIO`¹⁰⁹¹ objects (the public API incorrectly assumed this without checking it). Patch by Bénédict Tran.
- Report the result of `test_run_epubcheck` as `skipped` instead of `success` when either Java or `epubcheck` are not available.
- Use dynamic allocation of unused port numbers for the test HTTP(S) servers. As a side-effect, this removes the need for test server lockfiles, meaning that any remaining `tests/test-server.lock` files can safely be deleted.

14.10 Release 7.2.6 (released Sep 13, 2023)

Bugs fixed

- [#11679](#)¹⁰⁹²: Add the `SPHINX_AUTODOC_RELOAD_MODULES` environment variable, which if set reloads modules when using autodoc with `TYPE_CHECKING = True`. Patch by Matt Wozniski and Adam Turner.
- [#11679](#)¹⁰⁹³: Use `importlib.reload()`¹⁰⁹⁴ to reload modules in autodoc. Patch by Matt Wozniski and Adam Turner.

¹⁰⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/11970>

¹⁰⁸⁵ <https://datatracker.ietf.org/doc/html/rfc3986.html#section-4.4>

¹⁰⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/12271>

¹⁰⁸⁷ <https://sourceforge.net/p/docutils/code/9562/>

¹⁰⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/12253>

¹⁰⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/11285>

¹⁰⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/11285>

¹⁰⁹¹ <https://docs.python.org/3/library/io.html#io.StringIO>

¹⁰⁹² <https://github.com/sphinx-doc/sphinx/issues/11679>

¹⁰⁹³ <https://github.com/sphinx-doc/sphinx/issues/11679>

¹⁰⁹⁴ <https://docs.python.org/3/library/importlib.html#importlib.reload>

14.11 Release 7.2.5 (released Aug 30, 2023)

Bugs fixed

- [#11645](#)¹⁰⁹⁵: Fix a regression preventing autodoc from importing modules within packages that make use of `if typing.TYPE_CHECKING:` to guard circular imports needed by type checkers. Patch by Matt Wozniski.
- [#11634](#)¹⁰⁹⁶: Fixed inheritance diagram relative link resolution for sibling files in a subdirectory. Patch by Albert Shih.
- [#11659](#)¹⁰⁹⁷: Allow `?config=...` in `mathjax_path`.
- [#11654](#)¹⁰⁹⁸: autodoc: Fail with a more descriptive error message when an object claims to be an instance of `type`, but is not a class. Patch by James Braza.
- 11620: Cease emitting `source-read` events for files read via the `include`¹⁰⁹⁹ directive.
- 11620: Add a new `include-read` for observing and transforming the content of included files via the `include`¹¹⁰⁰ directive.
- [#11627](#)¹¹⁰¹: Restore support for copyright lines of the form YYYY when `SOURCE_DATE_EPOCH` is set.

14.12 Release 7.2.4 (released Aug 28, 2023)

Bugs fixed

- [#11618](#)¹¹⁰²: Fix a regression in the `MoveModuleTargets` transform, introduced in [#10478](#)¹¹⁰³ ([#9662](#)¹¹⁰⁴).
- [#11649](#)¹¹⁰⁵: linkcheck: Resolve hanging tests for timezones west of London and incorrect conversion from UTC to offsets from the UNIX epoch. Patch by Dmitry Shachnev and Adam Turner.

14.13 Release 7.2.3 (released Aug 23, 2023)

Dependencies

- [#11576](#)¹¹⁰⁶: Require `sphinxcontrib-serializinghtml` 1.1.9.

¹⁰⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/11645>

¹⁰⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/11634>

¹⁰⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/11659>

¹⁰⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/11654>

¹⁰⁹⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

¹¹⁰⁰ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

¹¹⁰¹ <https://github.com/sphinx-doc/sphinx/issues/11627>

¹¹⁰² <https://github.com/sphinx-doc/sphinx/issues/11618>

¹¹⁰³ <https://github.com/sphinx-doc/sphinx/issues/10478>

¹¹⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/9662>

¹¹⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/11649>

¹¹⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/11576>

Bugs fixed

- Fix regression in `autodoc.Documenter.parse_name()`.
- Fix regression in JSON serialisation.
- [#11543](#)¹¹⁰⁷: `autodoc`: Support positional-only parameters in `classmethod` methods when `autodoc_preserve_defaults` is `True`.
- Restore support string methods on path objects. This is deprecated and will be removed in Sphinx 8. Use `os.fspath()`¹¹⁰⁸ to convert `Path`¹¹⁰⁹ objects to strings, or `Path`¹¹¹⁰'s methods to work with path objects.

14.14 Release 7.2.2 (released Aug 17, 2023)

Bugs fixed

- Fix the signature of the `StateMachine.insert_input()` patch, for when calling with keyword arguments.
- Fixed membership testing (`in`) for the `str`¹¹¹¹ interface of the asset classes (`_CascadingStyleSheet` and `_JavaScript`), which several extensions relied upon.
- Fixed a type error in `SingleFileHTMLBuilder._get_local_toctree`, `includehidden` may be passed as a string or a boolean.
- Fix `:noindex:` for `PyModule` and `JModule`.

14.15 Release 7.2.1 (released Aug 17, 2023)

Bugs fixed

- Restored the the `str`¹¹¹² interface of the asset classes (`_CascadingStyleSheet` and `_JavaScript`), which several extensions relied upon. This will be removed in Sphinx 9.
- Restored calls to `Builder.add_{css,js}_file()`, which several extensions relied upon.
- Restored the private API `TocTree.get_toctree_ancestors()`, which several extensions relied upon.

14.16 Release 7.2.0 (released Aug 17, 2023)

Dependencies

- [#11511](#)¹¹¹³: Drop Python 3.8 support.
- [#11576](#)¹¹¹⁴: Require `Pygments` 2.14 or later.

¹¹⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/11543>

¹¹⁰⁸ <https://docs.python.org/3/library/os.html#os.fspath>

¹¹⁰⁹ <https://docs.python.org/3/library/pathlib.html#pathlib.Path>

¹¹¹⁰ <https://docs.python.org/3/library/pathlib.html#pathlib.Path>

¹¹¹¹ <https://docs.python.org/3/library/stdtypes.html#str>

¹¹¹² <https://docs.python.org/3/library/stdtypes.html#str>

¹¹¹³ <https://github.com/sphinx-doc/sphinx/issues/11511>

¹¹¹⁴ <https://github.com/sphinx-doc/sphinx/issues/11576>

Deprecated

- [#11512](#)¹¹¹⁵: Deprecate `sphinx.util.md5` and `sphinx.util.sha1`. Use `hashlib` instead.
- [#11526](#)¹¹¹⁶: Deprecate `sphinx.testing.path`. Use `os.path` or `pathlib` instead.
- [#11528](#)¹¹¹⁷: Deprecate `sphinx.util.split_index_msg` and `sphinx.util.split_into`. Use `sphinx.util.index_entries.split_index_msg` instead.
- Deprecate `sphinx.builders.html.Stylesheet` and `sphinx.builders.html.Javascript`. Use `sphinx.application.Sphinx.add_css_file()` and `sphinx.application.Sphinx.add_js_file()` instead.
- [#11582](#)¹¹¹⁸: Deprecate `sphinx.builders.html.StandaloneHTMLBuilder.css_files` and `sphinx.builders.html.StandaloneHTMLBuilder.script_files`. Use `sphinx.application.Sphinx.add_css_file()` and `sphinx.application.Sphinx.add_js_file()` instead.
- [#11459](#)¹¹¹⁹: Deprecate `sphinx.ext.autodoc.preserve_defaults.get_function_def()`. Patch by Bénédict Tran.

Features added

- [#11526](#)¹¹²⁰: Support `os.PathLike` types and `pathlib.Path` objects in many more places.
- [#5474](#)¹¹²¹: coverage: Print summary statistics tables. Patch by Jorge Leitao.
- [#6319](#)¹¹²²: viewcode: Add `viewcode_line_numbers` to control whether line numbers are added to rendered source code. Patch by Ben Krikler.
- [#9662](#)¹¹²³: Add the `:no-typesetting:` option to suppress textual output and only create a linkable anchor. Patch by Latosha Maltba.
- [#11221](#)¹¹²⁴: C++: Support domain objects in the table of contents. Patch by Rouslan Korneychuk.
- [#10938](#)¹¹²⁵: doctest: Add `doctest_show_successes` option. Patch by Trey Hunner.
- [#11533](#)¹¹²⁶: Add `:no-index:`, `:no-index-entry:`, and `:no-contents-entry:`.
- [#11572](#)¹¹²⁷: Improve debug logging of reasons why files are detected as out of date. Patch by Eric Larson.
- [#10678](#)¹¹²⁸: Emit `source-read` events for files read via the `include`¹¹²⁹ directive. Patch by Halldor Fannar.
- [#11570](#)¹¹³⁰: Use short names when using **PEP 585**¹¹³¹ built-in generics. Patch by Riccardo Mori.

¹¹¹⁵ <https://github.com/sphinx-doc/sphinx/issues/11512>

¹¹¹⁶ <https://github.com/sphinx-doc/sphinx/issues/11526>

¹¹¹⁷ <https://github.com/sphinx-doc/sphinx/issues/11528>

¹¹¹⁸ <https://github.com/sphinx-doc/sphinx/issues/11582>

¹¹¹⁹ <https://github.com/sphinx-doc/sphinx/issues/11459>

¹¹²⁰ <https://github.com/sphinx-doc/sphinx/issues/11526>

¹¹²¹ <https://github.com/sphinx-doc/sphinx/issues/5474>

¹¹²² <https://github.com/sphinx-doc/sphinx/issues/6319>

¹¹²³ <https://github.com/sphinx-doc/sphinx/issues/9662>

¹¹²⁴ <https://github.com/sphinx-doc/sphinx/issues/11221>

¹¹²⁵ <https://github.com/sphinx-doc/sphinx/issues/10938>

¹¹²⁶ <https://github.com/sphinx-doc/sphinx/issues/11533>

¹¹²⁷ <https://github.com/sphinx-doc/sphinx/issues/11572>

¹¹²⁸ <https://github.com/sphinx-doc/sphinx/issues/10678>

¹¹²⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

¹¹³⁰ <https://github.com/sphinx-doc/sphinx/issues/11570>

¹¹³¹ <https://peps.python.org/pep-0585/>

- [#11300](#)¹¹³²: Improve `SigElementFallbackTransform` fallback logic and signature text elements nodes. See *the documentation* for more details. Patch by B  n  dikt Tran.
- Allow running Sphinx with `python -m sphinx build`

Bugs fixed

- [#11077](#)¹¹³³: graphviz: Fix relative links from within the graph. Patch by Ralf Grubenmann.
- [#11529](#)¹¹³⁴: Line Block in LaTeX builder outputs spurious empty token. Patch by Adrian Vollmer.
- [#11196](#)¹¹³⁵: autosummary: Summary line extraction failed with “e.g.”
- [#10614](#)¹¹³⁶: Fixed a number of bugs in inheritance diagrams that resulted in missing or broken links. Patch by Albert Shih.
- [#9428](#)¹¹³⁷: Exclude substitution definitions when running the `gettext` builder. Patch by Alvin Wong.
- [#10795](#)¹¹³⁸: Raise a descriptive error if `graphviz_dot` is falsy.
- [#11546](#)¹¹³⁹: Translated nodes identical to their original text are now marked with the `translated=True` attribute.
- [#10049](#)¹¹⁴⁰: html: Change “Permalink” to “Link” for title text in link anchors.
- [#4225](#)¹¹⁴¹: Relax Pygments parsing on lexing failures.
- [#11246](#)¹¹⁴²: Allow inline links in the first line of a docstring and one-line type comments `#: :meta ...:` when using `sphinx.ext.napoleon`. Patch by B  n  dikt Tran.
- [#10930](#)¹¹⁴³: Highlight all search terms on the search results page. Patch by Dmitry Shachnev.
- [#11473](#)¹¹⁴⁴: Type annotations containing `Literal`¹¹⁴⁵ enumeration values now render correctly. Patch by B  n  dikt Tran.
- [#11591](#)¹¹⁴⁶: Fix support for C coverage in `sphinx.ext.coverage` extension. Patch by Stephen Finucane.
- [#11594](#)¹¹⁴⁷: HTML Theme: Enhancements to horizontal scrolling on smaller devices in the agogo theme. Patch by Lukas Engelter.
- [#11459](#)¹¹⁴⁸: Fix support for async and lambda functions in `sphinx.ext.autodoc.preserve_defaults`. Patch by B  n  dikt Tran.

¹¹³² <https://github.com/sphinx-doc/sphinx/issues/11300>

¹¹³³ <https://github.com/sphinx-doc/sphinx/issues/11077>

¹¹³⁴ <https://github.com/sphinx-doc/sphinx/issues/11529>

¹¹³⁵ <https://github.com/sphinx-doc/sphinx/issues/11196>

¹¹³⁶ <https://github.com/sphinx-doc/sphinx/issues/10614>

¹¹³⁷ <https://github.com/sphinx-doc/sphinx/issues/9428>

¹¹³⁸ <https://github.com/sphinx-doc/sphinx/issues/10795>

¹¹³⁹ <https://github.com/sphinx-doc/sphinx/issues/11546>

¹¹⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/10049>

¹¹⁴¹ <https://github.com/sphinx-doc/sphinx/issues/4225>

¹¹⁴² <https://github.com/sphinx-doc/sphinx/issues/11246>

¹¹⁴³ <https://github.com/sphinx-doc/sphinx/issues/10930>

¹¹⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/11473>

¹¹⁴⁵ <https://docs.python.org/3/library/typing.html#typing.Literal>

¹¹⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/11591>

¹¹⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/11594>

¹¹⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/11459>

Testing

- [#11577](#)¹¹⁴⁹: pytest: Fail tests on “XPASS”.
- [#11577](#)¹¹⁵⁰: pytest: Use “importlib” import mode.
- [#11577](#)¹¹⁵¹: pytest: Set PYTHONWARNINGS=error.
- [#11577](#)¹¹⁵²: pytest: Set strict config and strict markers.

14.17 Release 7.1.2 (released Aug 02, 2023)

Bugs fixed

- [#11542](#)¹¹⁵³: linkcheck: Properly respect `linkcheck_anchors` and do not spuriously report failures to validate anchors. Patch by James Addison.

14.18 Release 7.1.1 (released Jul 27, 2023)

Bugs fixed

- [#11514](#)¹¹⁵⁴: Fix `SOURCE_DATE_EPOCH` in multi-line copyright footer. Patch by B  n  dikt Tran.

14.19 Release 7.1.0 (released Jul 24, 2023)

Incompatible changes

- Releases are no longer signed, given the [change in PyPI policy](#)¹¹⁵⁵.

Deprecated

- [#11412](#)¹¹⁵⁶: Emit warnings on using a deprecated Python-specific index entry type (namely, `module`, `keyword`, `operator`, `object`, `exception`, `statement`, and `builtin`) in the `index` directive, and set the removal version to Sphinx 9. Patch by Adam Turner.

¹¹⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/11577>

¹¹⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/11577>

¹¹⁵¹ <https://github.com/sphinx-doc/sphinx/issues/11577>

¹¹⁵² <https://github.com/sphinx-doc/sphinx/issues/11577>

¹¹⁵³ <https://github.com/sphinx-doc/sphinx/issues/11542>

¹¹⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/11514>

¹¹⁵⁵ <https://blog.pypi.org/posts/2023-05-23-removing-pgp/>

¹¹⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/11412>

Features added

- [#11415](#)¹¹⁵⁷: Add a checksum to JavaScript and CSS asset URIs included within generated HTML, using the CRC32 algorithm.
- `require_sphinx()` now allows the version requirement to be specified as (major, minor).
- [#11011](#)¹¹⁵⁸: Allow configuring a line-length limit for object signatures, via `maximum_signature_line_length` and the domain-specific variants. If the length of the signature (in characters) is greater than the configured limit, each parameter in the signature will be split to its own logical line. This behaviour may also be controlled by options on object description directives, for example `py:function:single-line-parameter-list`. Patch by Thomas Louf, Adam Turner, and Jean-François B.
- [#10983](#)¹¹⁵⁹: Support for multiline copyright statements in the footer block. Patch by Stefanie Molin
- `sphinx.util.display.status_iterator` now clears the current line with ANSI control codes, rather than overprinting with space characters.
- [#11431](#)¹¹⁶⁰: linkcheck: Treat SSL failures as broken links. Patch by James Addison.
- [#11157](#)¹¹⁶¹: Keep the translated attribute on translated nodes.
- [#11451](#)¹¹⁶²: Improve the traceback displayed when using `sphinx-build -T` in parallel builds. Patch by Bénédict Tran
- [#11324](#)¹¹⁶³: linkcheck: Use session-based HTTP requests.
- [#11438](#)¹¹⁶⁴: Add support for the `py:class` and `py:function` directives for PEP 695 (generic classes and functions declarations) and PEP 696 (default type parameters). Multi-line support ([#11011](#)¹¹⁶⁵) is enabled for type parameters list and can be locally controlled on object description directives, e.g., `py:function:single-line-type-parameter-list`. Patch by Bénédict Tran.
- [#11484](#)¹¹⁶⁶: linkcheck: Allow HTML anchors to be ignored on a per-URL basis via `linkcheck_anchors_ignore_for_url` while still checking the validity of the page itself. Patch by Bénédict Tran
- [#1246](#)¹¹⁶⁷: Add translation progress statistics and inspection support, via a new substitution (`|translation progress|`) and a new configuration variable (`translation_progress_classes`). These enable determining the percentage of translated elements within a document, and the remaining translated and untranslated elements.

¹¹⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/11415>

¹¹⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/11011>

¹¹⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/10983>

¹¹⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/11431>

¹¹⁶¹ <https://github.com/sphinx-doc/sphinx/issues/11157>

¹¹⁶² <https://github.com/sphinx-doc/sphinx/issues/11451>

¹¹⁶³ <https://github.com/sphinx-doc/sphinx/issues/11324>

¹¹⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/11438>

¹¹⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/11011>

¹¹⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/11484>

¹¹⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/1246>

Bugs fixed

- Restored the `footnote-reference` class that has been removed in the latest (unreleased) version of Docutils.
- [#11486](#)¹¹⁶⁸: Use [RFC 8081](#)¹¹⁶⁹ font file MIME types in the EPUB builder. Using the correct MIME type will prevent warnings from `epubcheck` and will generate a valid EPUB.
- [#11435](#)¹¹⁷⁰: Use microsecond-resolution timestamps for outdated file detection in `BuildEnvironment.get_outdated_files`.
- [#11437](#)¹¹⁷¹: Top-level headings starting with a `reStructuredText` role now render properly when `rst_prolog` is set. Previously, a file starting with the below would have improperly rendered due to where the prologue text was inserted into the document.

```
:mod:`lobster` -- The lobster module
=====

...

```

Patch by B  n  dikt Tran.

- [#11337](#)¹¹⁷²: Fix a `MemoryError` in `sphinx.ext.intersphinx` when using `None` or `typing.*` as inline type references. Patch by B  n  dikt Tran ([picnixz](#))

Testing

- [#11345](#)¹¹⁷³: Always delete `docutils.conf` in test directories when running `SphinxTestApp.cleanup()`.

14.20 Release 7.0.1 (released May 12, 2023)

Dependencies

- [#11411](#)¹¹⁷⁴: Support [Docutils 0.20](#)¹¹⁷⁵. Patch by Adam Turner.

Bugs fixed

- [#11418](#)¹¹⁷⁶: Clean up remaining references to `sphinx.setup_command` following the removal of support for `setuptools`. Patch by Willem Mulder.

¹¹⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/11486>

¹¹⁶⁹ <https://datatracker.ietf.org/doc/html/rfc8081.html>

¹¹⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/11435>

¹¹⁷¹ <https://github.com/sphinx-doc/sphinx/issues/11437>

¹¹⁷² <https://github.com/sphinx-doc/sphinx/issues/11337>

¹¹⁷³ <https://github.com/sphinx-doc/sphinx/issues/11345>

¹¹⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/11411>

¹¹⁷⁵ <https://docutils.sourceforge.io/RELEASE-NOTES.html#release-0-20-2023-05-04>

¹¹⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/11418>

14.21 Release 7.0.0 (released Apr 29, 2023)

Incompatible changes

- [#11359](https://github.com/sphinx-doc/sphinx/issues/11359)¹¹⁷⁷: Remove long-deprecated aliases for `MecabSplitter` and `DefaultSplitter` in `sphinx.search.ja`.
- [#11360](https://github.com/sphinx-doc/sphinx/issues/11360)¹¹⁷⁸: Remove deprecated `make_old_id` functions in domain object description classes.
- [#11363](https://github.com/sphinx-doc/sphinx/issues/11363)¹¹⁷⁹: Remove the Setuptools integration (`build_sphinx` hook in `setup.py`).
- [#11364](https://github.com/sphinx-doc/sphinx/issues/11364)¹¹⁸⁰: Remove deprecated `sphinx.ext.napoleon.iterators` module.
- [#11365](https://github.com/sphinx-doc/sphinx/issues/11365)¹¹⁸¹: Remove support for the `jsdump` format in `sphinx.search`.
- [#11366](https://github.com/sphinx-doc/sphinx/issues/11366)¹¹⁸²: Make `locale` a required argument to `sphinx.util.i18n.format_date()`.
- [#11370](https://github.com/sphinx-doc/sphinx/issues/11370)¹¹⁸³: Remove deprecated `sphinx.util.stemmer` module.
- [#11371](https://github.com/sphinx-doc/sphinx/issues/11371)¹¹⁸⁴: Remove deprecated `sphinx.pycode.ast.parse()` function.
- [#11372](https://github.com/sphinx-doc/sphinx/issues/11372)¹¹⁸⁵: Remove deprecated `sphinx.io.read_doc()` function.
- [#11373](https://github.com/sphinx-doc/sphinx/issues/11373)¹¹⁸⁶: Removed deprecated `sphinx.util.get_matching_files()` function.
- [#11378](https://github.com/sphinx-doc/sphinx/issues/11378)¹¹⁸⁷: Remove deprecated `sphinx.util.docutils.is_html5_writer_available()` function.
- [#11379](https://github.com/sphinx-doc/sphinx/issues/11379)¹¹⁸⁸: Make the `env` argument to `Builder` subclasses required.
- [#11380](https://github.com/sphinx-doc/sphinx/issues/11380)¹¹⁸⁹: `autosummary`: Always emit grouped import exceptions.
- [#11381](https://github.com/sphinx-doc/sphinx/issues/11381)¹¹⁹⁰: Remove deprecated `style` key for HTML templates.
- [#11382](https://github.com/sphinx-doc/sphinx/issues/11382)¹¹⁹¹: Remove deprecated `sphinx.writers.latex.LaTeXTranslator.docclasses` attribute.
- [#11383](https://github.com/sphinx-doc/sphinx/issues/11383)¹¹⁹²: Remove deprecated `sphinx.builders.html.html5_ready` and `sphinx.builders.html.HTMLTranslator` attributes.
- [#11385](https://github.com/sphinx-doc/sphinx/issues/11385)¹¹⁹³: Remove support for HTML 4 output.

¹¹⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/11359>

¹¹⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/11360>

¹¹⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/11363>

¹¹⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/11364>

¹¹⁸¹ <https://github.com/sphinx-doc/sphinx/issues/11365>

¹¹⁸² <https://github.com/sphinx-doc/sphinx/issues/11366>

¹¹⁸³ <https://github.com/sphinx-doc/sphinx/issues/11370>

¹¹⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/11371>

¹¹⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/11372>

¹¹⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/11373>

¹¹⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/11378>

¹¹⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/11379>

¹¹⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/11380>

¹¹⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/11381>

¹¹⁹¹ <https://github.com/sphinx-doc/sphinx/issues/11382>

¹¹⁹² <https://github.com/sphinx-doc/sphinx/issues/11383>

¹¹⁹³ <https://github.com/sphinx-doc/sphinx/issues/11385>

14.22 Release 6.2.1 (released Apr 25, 2023)

Bugs fixed

- [#11355](#)¹¹⁹⁴: Revert the default type of `nitpick_ignore` and `nitpick_ignore_regex` to list.

14.23 Release 6.2.0 (released Apr 23, 2023)

Dependencies

- Require Docutils 0.18.1 or greater.

Incompatible changes

- LaTeX: removal of some internal TeX `\dimen` registers (not previously publicly documented) as per 5.1.0 code comments in `sphinx.sty`: `\sphinxverbatimsep`, `\sphinxverbatimborder`, `\sphinxshadowsep`, `\sphinxshadowsize`, and `\sphinxshadowrule`. (refs: [#11105](#)¹¹⁹⁵)
- Remove `.egg` support from `pycode ModuleAnalyser`; Python eggs are a now-obsolete binary distribution format
- [#11089](#)¹¹⁹⁶: Remove deprecated code in `sphinx.builders.linkcheck`. Patch by Daniel Eades
- Remove internal-only `sphinx.locale.setlocale`

Deprecated

- [#11247](#)¹¹⁹⁷: Deprecate the legacy `intersphinx_mapping` format
- `sphinx.util.osutil.cd` is deprecated in favour of `contextlib.chdir`.

Features added

- [#11277](#)¹¹⁹⁸: `autoproperty` allows the return type to be specified as a type comment (e.g., `# type: () -> int`). Patch by B  n  dikt Tran
- [#10811](#)¹¹⁹⁹: Autosummary: extend `__all__` to imported members for template rendering when option `autosummary_ignore_module_all` is set to `False`. Patch by Clement Pinard
- [#11147](#)¹²⁰⁰: Add a `content_offset` parameter to `nested_parse_with_titles()`, allowing for correct line numbers during nested parsing. Patch by Jeremy Maitin-Shepard
- Update to Unicode CLDR 42
- Add a `--jobs` synonym for `-j`. Patch by Hugo van Kemenade

¹¹⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/11355>

¹¹⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/11105>

¹¹⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/11089>

¹¹⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/11247>

¹¹⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/11277>

¹¹⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/10811>

¹²⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/11147>

- LaTeX: a command `\sphinxbox` for styling text elements with a (possibly rounded) box, optional background color and shadow, has been added. See *The `\sphinxbox` command*. (refs: #11224¹²⁰¹)
- LaTeX: add `\sphinxstylenotetitle`, ..., `\sphinxstylewarningtitle`, ..., for an extra layer of mark-up freeing up `\sphinxstrong` for other uses. See *Macros*. (refs: #11267¹²⁰²)
- LaTeX: `note`¹²⁰³, `hint`¹²⁰⁴, `important`¹²⁰⁵ and `tip`¹²⁰⁶ can now each be styled as the other admonitions, i.e. possibly with a background color, individual border widths and paddings, possibly rounded corners, and optional shadow. See *Additional CSS-like 'sphinxsetup' keys*. (refs: #11234¹²⁰⁷)
- LaTeX: admonitions and `topic`¹²⁰⁸ (and `contents`¹²⁰⁹) directives, and not only `code-block`, support `box-decoration-break=slice`.
- LaTeX: let rounded boxes support up to 4 distinct border-widths (refs: #11243¹²¹⁰)
- LaTeX: new options `noteTextColor`, `noteTeXextras` et al. See *Additional CSS-like 'sphinxsetup' keys*.
- LaTeX: support elliptical corners in rounded boxes. (refs: #11254¹²¹¹)
- #11150¹²¹²: Include source location in highlighting warnings, when lexing fails. Patch by Jeremy Maitin-Shepard
- #11281¹²¹³: Support for `imgmath_latex = 'tectonic'` or `'xelatex'`. Patch by Dimitar Dimitrov
- #11109¹²¹⁴, #9643¹²¹⁵: Add `python_display_short_literal_types` option for condensed rendering of `Literal` types.

Bugs fixed

- #11079¹²¹⁶: LaTeX: figures with `align` attribute may disappear and strangely impact following lists
- #11093¹²¹⁷: LaTeX: fix “multiply-defined references” PDF build warnings when one or more reST labels directly precede an `py:module` or `automodule` directive. Patch by B  n  dikt Tran (picnixz)
- #11110¹²¹⁸: LaTeX: Figures go missing from latex pdf if their files have the same base name and they use a post transform. Patch by aaron-cooper
- LaTeX: fix potential color leak from shadow to border of rounded boxes, if shadow color is set but border color is not
- LaTeX: fix unintended 1pt upwards vertical shift of code blocks frames respective to contents (when using rounded corners)
- #11235¹²¹⁹: LaTeX: added `\color` in topic (or admonition) contents may cause color leak to the shadow and border at a page break

¹²⁰¹ <https://github.com/sphinx-doc/sphinx/issues/11224>

¹²⁰² <https://github.com/sphinx-doc/sphinx/issues/11267>

¹²⁰³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#note>

¹²⁰⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#hint>

¹²⁰⁵ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#important>

¹²⁰⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#tip>

¹²⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/11234>

¹²⁰⁸ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

¹²⁰⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

¹²¹⁰ <https://github.com/sphinx-doc/sphinx/issues/11243>

¹²¹¹ <https://github.com/sphinx-doc/sphinx/issues/11254>

¹²¹² <https://github.com/sphinx-doc/sphinx/issues/11150>

¹²¹³ <https://github.com/sphinx-doc/sphinx/issues/11281>

¹²¹⁴ <https://github.com/sphinx-doc/sphinx/issues/11109>

¹²¹⁵ <https://github.com/sphinx-doc/sphinx/issues/9643>

¹²¹⁶ <https://github.com/sphinx-doc/sphinx/issues/11079>

¹²¹⁷ <https://github.com/sphinx-doc/sphinx/issues/11093>

¹²¹⁸ <https://github.com/sphinx-doc/sphinx/issues/11110>

¹²¹⁹ <https://github.com/sphinx-doc/sphinx/issues/11235>

- [#11264](#)¹²²⁰: LaTeX: missing space before colon after “Voir aussi” for *seealso* directive in French
- [#11268](#)¹²²¹: LaTeX: longtable with left alignment breaks out of current list indentation context in PDF. Thanks to picnixz.
- [#11274](#)¹²²²: LaTeX: external links are not properly escaped for `\sphinxupquote` compatibility
- [#11147](#)¹²²³: Fix source file/line number info in object description content and in other uses of `nested_parse_with_titles`. Patch by Jeremy Maitin-Shepard.
- [#11192](#)¹²²⁴: Restore correct parallel search index building. Patch by Jeremy Maitin-Shepard
- Use the new Transifex `tx` client

Testing

- Fail testing when any Python warnings are emitted
- Migrate remaining `unittest.TestCase` style test functions to `pytest` style
- Remove tests that rely on `setuptools`

14.24 Release 6.1.3 (released Jan 10, 2023)

Bugs fixed

- [#11116](#)¹²²⁵: Reverted to previous Sphinx 5 node copying method
- [#11117](#)¹²²⁶: Reverted changes to parallel image processing from Sphinx 6.1.0
- [#11119](#)¹²²⁷: Suppress `ValueError` in the `linkcheck` builder

14.25 Release 6.1.2 (released Jan 07, 2023)

Bugs fixed

- [#11101](#)¹²²⁸: LaTeX: `div.topic_padding` key of `sphinxsetup` documented at 5.1.0 was implemented with name `topic_padding`
- [#11099](#)¹²²⁹: LaTeX: `shadowrule` key of `sphinxsetup` causes PDF build to crash since Sphinx 5.1.0
- [#11096](#)¹²³⁰: LaTeX: `shadowsize` key of `sphinxsetup` causes PDF build to crash since Sphinx 5.1.0

¹²²⁰ <https://github.com/sphinx-doc/sphinx/issues/11264>

¹²²¹ <https://github.com/sphinx-doc/sphinx/issues/11268>

¹²²² <https://github.com/sphinx-doc/sphinx/issues/11274>

¹²²³ <https://github.com/sphinx-doc/sphinx/issues/11147>

¹²²⁴ <https://github.com/sphinx-doc/sphinx/issues/11192>

¹²²⁵ <https://github.com/sphinx-doc/sphinx/issues/11116>

¹²²⁶ <https://github.com/sphinx-doc/sphinx/issues/11117>

¹²²⁷ <https://github.com/sphinx-doc/sphinx/issues/11119>

¹²²⁸ <https://github.com/sphinx-doc/sphinx/issues/11101>

¹²²⁹ <https://github.com/sphinx-doc/sphinx/issues/11099>

¹²³⁰ <https://github.com/sphinx-doc/sphinx/issues/11096>

- [#11095](#)¹²³¹: LaTeX: shadow of `topic`¹²³² and `contents`¹²³³ boxes not in page margin since Sphinx 5.1.0
- [#11100](#)¹²³⁴: Fix copying images when running under parallel mode.

14.26 Release 6.1.1 (released Jan 05, 2023)

Bugs fixed

- [#11091](#)¹²³⁵: Fix `util.nodes.apply_source_workaround` for `literal_block` nodes with no source information in the node or the node's parents.

14.27 Release 6.1.0 (released Jan 05, 2023)

Dependencies

- Adopted the [Ruff](#)¹²³⁶ code linter.

Incompatible changes

- [#10979](#)¹²³⁷: gettext: Removed support for pluralisation in `get_translation`. This was unused and complicated other changes to `sphinx.locale`.

Deprecated

- `sphinx.util` functions:
 - Renamed `sphinx.util.typing.stringify()` to `sphinx.util.typing.stringify_annotation()`
 - Moved `sphinx.util.xmlname_checker()` to `sphinx.builders.epub3._XML_NAME_PATTERN`
- Moved to `sphinx.util.display`:
 - `sphinx.util.status_iterator`
 - `sphinx.util.display_chunk`
 - `sphinx.util.SkipProgressMessage`
 - `sphinx.util.progress_message`
- Moved to `sphinx.util.http_date`:
 - `sphinx.util.epoch_to_rfc1123`
 - `sphinx.util.rfc1123_to_epoch`

¹²³¹ <https://github.com/sphinx-doc/sphinx/issues/11095>

¹²³² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

¹²³³ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#table-of-contents>

¹²³⁴ <https://github.com/sphinx-doc/sphinx/issues/11100>

¹²³⁵ <https://github.com/sphinx-doc/sphinx/issues/11091>

¹²³⁶ <https://github.com/charliermarsh/ruff>

¹²³⁷ <https://github.com/sphinx-doc/sphinx/issues/10979>

Moved to `sphinx.util.exceptions`:

- `sphinx.util.save_traceback`
- `sphinx.util.format_exception_cut_frames`

Features added

- Cache doctrees in the build environment during the writing phase.
- Make all writing phase tasks support parallel execution.
- [#11072](#)¹²³⁸: Use PEP 604 (`X | Y`) display conventions for `typing.Optional` and `typing.Optional` types within the Python domain and autodoc.
- [#10700](#)¹²³⁹: autodoc: Document `typing.NewType()` types as classes rather than ‘data’.
- Cache doctrees between the reading and writing phases.

Bugs fixed

- [#10962](#)¹²⁴⁰: HTML: Fix the multi-word key name lookup table.
- Fixed support for Python 3.12 alpha 3 (changes in the `enum` module).
- [#11069](#)¹²⁴¹: HTML Theme: Removed outdated “shortcut” link relation keyword.
- [#10952](#)¹²⁴²: Properly terminate parallel processes on programme interruption.
- [#10988](#)¹²⁴³: Speed up `TocTree.resolve()` through more efficient copying.
- [#6744](#)¹²⁴⁴: LaTeX: support for `seealso` directive should be via an environment to allow styling.
- [#11074](#)¹²⁴⁵: LaTeX: Can’t change `sphinxnote` to use `sphinxheavybox` starting with 5.1.0

14.28 Release 6.0.1 (released Jan 05, 2023)

Dependencies

- Require Pygments 2.13 or later.

¹²³⁸ <https://github.com/sphinx-doc/sphinx/issues/11072>

¹²³⁹ <https://github.com/sphinx-doc/sphinx/issues/10700>

¹²⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/10962>

¹²⁴¹ <https://github.com/sphinx-doc/sphinx/issues/11069>

¹²⁴² <https://github.com/sphinx-doc/sphinx/issues/10952>

¹²⁴³ <https://github.com/sphinx-doc/sphinx/issues/10988>

¹²⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/6744>

¹²⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/11074>

Bugs fixed

- [#10944](#)¹²⁴⁶: `imgmath`: Fix resolving image paths for files in nested folders.

14.29 Release 6.0.0 (released Dec 29, 2022)

Dependencies

- [#10468](#)¹²⁴⁷: Drop Python 3.6 support
- [#10470](#)¹²⁴⁸: Drop Python 3.7, Docutils 0.14, Docutils 0.15, Docutils 0.16, and Docutils 0.17 support. Patch by Adam Turner

Incompatible changes

- [#7405](#)¹²⁴⁹: Removed the jQuery and underscore.js JavaScript frameworks.

These frameworks are no longer be automatically injected into themes from Sphinx 6.0. If you develop a theme or extension that uses the `jQuery`, `$`, or `$u` global objects, you need to update your JavaScript to modern standards, or use the mitigation below.

The first option is to use the `sphinxcontrib.jquery`¹²⁵⁰ extension, which has been developed by the Sphinx team and contributors. To use this, add `sphinxcontrib.jquery` to the `extensions` list in `conf.py`, or call `app.setup_extension("sphinxcontrib.jquery")` if you develop a Sphinx theme or extension.

The second option is to manually ensure that the frameworks are present. To re-add jQuery and underscore.js, you will need to copy `jquery.js` and `underscore.js` from [the Sphinx repository](#)¹²⁵¹ to your `static` directory, and add the following to your `layout.html`:

```
{%- block scripts %}
<script src="{{ pathto('_static/jquery.js', resource=True) }}"></script>
<script src="{{ pathto('_static/underscore.js', resource=True) }}"></script>
{{ super() }}
{%- endblock %}
```

Patch by Adam Turner.

- [#10471](#)¹²⁵², [#10565](#)¹²⁵³: Removed deprecated APIs scheduled for removal in Sphinx 6.0. See [Deprecated APIs](#) for details. Patch by Adam Turner.
- [#10901](#)¹²⁵⁴: C Domain: Remove support for parsing pre-v3 style type directives and roles. Also remove associated configuration variables `c_allow_pre_v3` and `c_warn_on_allowed_pre_v3`. Patch by Adam Turner.

¹²⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/10944>

¹²⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/10468>

¹²⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/10470>

¹²⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/7405>

¹²⁵⁰ <https://github.com/sphinx-contrib/jquery/>

¹²⁵¹ <https://github.com/sphinx-doc/sphinx/tree/v5.3.0/sphinx/themes/basic/static>

¹²⁵² <https://github.com/sphinx-doc/sphinx/issues/10471>

¹²⁵³ <https://github.com/sphinx-doc/sphinx/issues/10565>

¹²⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/10901>

Features added

- [#10924](#)¹²⁵⁵: LaTeX: adopt better looking defaults for tables and code-blocks. See `latex_table_style` and the `pre_border-radius` and `pre_background-TeXcolor` *Additional CSS-like 'sphinxsetup' keys* for the former defaults and how to re-enact them if desired.

Bugs fixed

- [#10984](#)¹²⁵⁶: LaTeX: Document `latex_additional_files` behavior for files with `.tex` extension.

14.30 Release 5.3.0 (released Oct 16, 2022)

- [#10759](#)¹²⁵⁷: LaTeX: add `latex_table_style` and support the 'booktabs', 'borderless', and 'colorrows' styles. (thanks to Stefan Wiehler for initial pull requests [#6666](#)¹²⁵⁸, [#6671](#)¹²⁵⁹)
- [#10840](#)¹²⁶⁰: One can cross-reference including an option value like `:option:--module=foobar``, `:option:--module[=foobar`]`, or `:option:--module foobar``. Patch by Martin Liska.
- [#10881](#)¹²⁶¹: `autosectionlabel`: Record the generated section label to the debug log.
- [#10268](#)¹²⁶²: Correctly URI-escape image filenames.
- [#10887](#)¹²⁶³: `domains`: Allow sections in all the content of all object description directives (e.g. `py:function`). Patch by Adam Turner

14.31 Release 5.2.3 (released Sep 30, 2022)

- [#10878](#)¹²⁶⁴: Fix base64 image embedding in `sphinx.ext.imgmath`
- [#10886](#)¹²⁶⁵: Add `:nocontentsentry:` flag and global domain table of contents entry control option. Patch by Adam Turner

¹²⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/10924>

¹²⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/10984>

¹²⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/10759>

¹²⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/6666>

¹²⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/6671>

¹²⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/10840>

¹²⁶¹ <https://github.com/sphinx-doc/sphinx/issues/10881>

¹²⁶² <https://github.com/sphinx-doc/sphinx/issues/10268>

¹²⁶³ <https://github.com/sphinx-doc/sphinx/issues/10887>

¹²⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/10878>

¹²⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/10886>

14.32 Release 5.2.2 (released Sep 27, 2022)

- [#10872](#)¹²⁶⁶: Restore link targets for autodoc modules to the top of content. Patch by Dominic Davis-Foster.

14.33 Release 5.2.1 (released Sep 25, 2022)

Bugs fixed

- [#10861](#)¹²⁶⁷: Always normalise the pycon3 lexer to pycon.
- Fix using `sphinx.ext.autosummary` with modules containing titles in the module-level docstring.

14.34 Release 5.2.0.post0 (released Sep 24, 2022)

- Recreated source tarballs for Debian maintainers.

14.35 Release 5.2.0 (released Sep 24, 2022)

Dependencies

- [#10356](#)¹²⁶⁸: Sphinx now uses declarative metadata with `pyproject.toml` to create packages, using PyPA’s `flit` project as a build backend. Patch by Adam Turner.

Deprecated

- [#10843](#)¹²⁶⁹: Support for HTML 4 output. Patch by Adam Turner.

Features added

- [#10738](#)¹²⁷⁰: `napoleon`: Add support for docstring types using ‘of’, like `type of type`. Example: `tuple of int`.
- [#10286](#)¹²⁷¹: C++, support requires clauses not just between the template parameter lists and the declaration.
- [#10755](#)¹²⁷²: `linkcheck`: Check the source URL of raw directives that use the `url` option.
- [#10781](#)¹²⁷³: Allow `ref` role to be used with definitions and fields.
- [#10717](#)¹²⁷⁴: HTML Search: Increase priority for full title and subtitle matches in search results

¹²⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/10872>

¹²⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/10861>

¹²⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/10356>

¹²⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/10843>

¹²⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/10738>

¹²⁷¹ <https://github.com/sphinx-doc/sphinx/issues/10286>

¹²⁷² <https://github.com/sphinx-doc/sphinx/issues/10755>

¹²⁷³ <https://github.com/sphinx-doc/sphinx/issues/10781>

¹²⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/10717>

- [#10718](#)¹²⁷⁵: HTML Search: Save search result score to the HTML element for debugging
- [#10673](#)¹²⁷⁶: Make toctree accept ‘genindex’, ‘modindex’ and ‘search’ docnames
- [#6316](#)¹²⁷⁷, [#10804](#)¹²⁷⁸: Add domain objects to the table of contents. Patch by Adam Turner
- [#6692](#)¹²⁷⁹: HTML Search: Include explicit `index` directive index entries in the search index and search results. Patch by Adam Turner
- [#10816](#)¹²⁸⁰: imgmath: Allow embedding images in HTML as base64
- [#10854](#)¹²⁸¹: HTML Search: Use browser localStorage for highlight control, stop storing highlight parameters in URL query strings. Patch by Adam Turner.

Bugs fixed

- [#10723](#)¹²⁸²: LaTeX: 5.1.0 has made the ‘sphinxsetup’ `verbatimwithframe=false` become without effect.
- [#10257](#)¹²⁸³: C++, ensure consistent non-specialization template argument representation.
- [#10729](#)¹²⁸⁴: C++, fix parsing of certain non-type template parameter packs.
- [#10715](#)¹²⁸⁵: Revert [#10520](#)¹²⁸⁶: “Fix” use of sidebar classes in `agogo.css_t`

14.36 Release 5.1.1 (released Jul 26, 2022)

Bugs fixed

- [#10701](#)¹²⁸⁷: Fix ValueError in the new deque based `sphinx.ext.napoleon` iterator implementation.
- [#10702](#)¹²⁸⁸: Restore compatability with third-party builders.

14.37 Release 5.1.0 (released Jul 24, 2022)

Dependencies

- [#10656](#)¹²⁸⁹: Support Docutils 0.19¹²⁹⁰. Patch by Adam Turner.

¹²⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/10718>

¹²⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/10673>

¹²⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/6316>

¹²⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/10804>

¹²⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/6692>

¹²⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/10816>

¹²⁸¹ <https://github.com/sphinx-doc/sphinx/issues/10854>

¹²⁸² <https://github.com/sphinx-doc/sphinx/issues/10723>

¹²⁸³ <https://github.com/sphinx-doc/sphinx/issues/10257>

¹²⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/10729>

¹²⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/10715>

¹²⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/10520>

¹²⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/10701>

¹²⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/10702>

¹²⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/10656>

¹²⁹⁰ <https://docutils.sourceforge.io/RELEASE-NOTES.html#release-0-19-2022-07-05>

Deprecated

- [#10467](#)¹²⁹¹: Deprecated `sphinx.util.stemmer` in favour of `snowballstemmer`. Patch by Adam Turner.
- [#9856](#)¹²⁹²: Deprecated `sphinx.ext.napoleon.iterators`.

Features added

- [#10444](#)¹²⁹³: html theme: Allow specifying multiple CSS files through the `stylesheet` setting in `theme.conf` or by setting `html_style` to an iterable of strings.
- [#10366](#)¹²⁹⁴: std domain: Add support for emphasising placeholders in `option` directives through a new `option_emphasise_placeholders` configuration option.
- [#10439](#)¹²⁹⁵: std domain: Use the repr of some variables when displaying warnings, making whitespace issues easier to identify.
- [#10571](#)¹²⁹⁶: quickstart: Reduce content in the generated `conf.py` file. Patch by Pradyun Gedam.
- [#10648](#)¹²⁹⁷: LaTeX: CSS-named-alike additional `'sphinxsetup'` keys allow to configure four separate border-widths, four paddings, four corner radii, a shadow (possibly inset), colours for border, background, shadow for each of the code-block, topic, attention, caution, danger, error and warning directives.
- [#10655](#)¹²⁹⁸: LaTeX: Explain non-standard encoding in `LatinRules.xdy`
- [#10599](#)¹²⁹⁹: HTML Theme: Wrap consecutive footnotes in an `<aside>` element when using Docutils 0.18 or later, to allow for easier styling. This matches the behaviour introduced in Docutils 0.19. Patch by Adam Turner.
- [#10518](#)¹³⁰⁰: config: Add `include_patterns` as the opposite of `exclude_patterns`. Patch by Adam Turner.

Bugs fixed

- [#10594](#)¹³⁰¹: HTML Theme: field term colons are doubled if using Docutils 0.18+
- [#10596](#)¹³⁰²: Build failure if Docutils version is 0.18 (not 0.18.1) due to missing `Node.findall()`
- [#10506](#)¹³⁰³: LaTeX: build error if highlighting inline code role in figure caption (refs: [#10251](#)¹³⁰⁴)
- [#10634](#)¹³⁰⁵: Make `-P (pdb)` option work better with exceptions triggered from events
- [#10550](#)¹³⁰⁶: py domain: Fix spurious whitespace in unparsing various operators (`+`, `-`, `~`, and `**`). Patch by Adam Turner (refs: [#10551](#)¹³⁰⁷).

¹²⁹¹ <https://github.com/sphinx-doc/sphinx/issues/10467>

¹²⁹² <https://github.com/sphinx-doc/sphinx/issues/9856>

¹²⁹³ <https://github.com/sphinx-doc/sphinx/issues/10444>

¹²⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/10366>

¹²⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/10439>

¹²⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/10571>

¹²⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/10648>

¹²⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/10655>

¹²⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/10599>

¹³⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/10518>

¹³⁰¹ <https://github.com/sphinx-doc/sphinx/issues/10594>

¹³⁰² <https://github.com/sphinx-doc/sphinx/issues/10596>

¹³⁰³ <https://github.com/sphinx-doc/sphinx/issues/10506>

¹³⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/10251>

¹³⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/10634>

¹³⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/10550>

¹³⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/10551>

- [#10460](#)¹³⁰⁸: logging: Always show node source locations as absolute paths.
- HTML Search: HTML tags are displayed as a part of object name
- HTML Search: search snippets should not be folded
- HTML Search: Minor errors are emitted on fetching search snippets
- HTML Search: The markers for header links are shown in the search result
- [#10520](#)¹³⁰⁹: HTML Theme: Fix use of sidebar classes in `agogo.css_t`.
- [#6679](#)¹³¹⁰: HTML Theme: Fix inclusion of hidden toctrees in the agogo theme.
- [#10566](#)¹³¹¹: HTML Theme: Fix `enable_search_shortcuts` does not work
- [#8686](#)¹³¹²: LaTeX: Text can fall out of code-block at end of page and leave artifact on next page
- [#10633](#)¹³¹³: LaTeX: user injected `\color` commands in topic or admonition boxes may cause color leaks in PDF due to upstream `framed.sty`¹³¹⁴ bug
- [#10638](#)¹³¹⁵: LaTeX: framed coloured boxes in highlighted code (e.g. highlighted diffs using Pygments style `'manni'`) inherit thickness of code-block frame
- [#10647](#)¹³¹⁶: LaTeX: Only one `\label` is generated for `desc_signature` node even if it has multiple node IDs
- [#10579](#)¹³¹⁷: i18n: `UnboundLocalError` is raised on translating raw directive
- [#9577](#)¹³¹⁸, [#10088](#)¹³¹⁹: py domain: Fix warning for duplicate Python references when using `:any:` and `autodoc`.
- [#10548](#)¹³²⁰: HTML Search: fix minor summary issues.

14.38 Release 5.0.2 (released Jun 17, 2022)

Features added

- [#10523](#)¹³²¹: HTML Theme: Expose the Docutils's version info tuple as a template variable, `docutils_version_info`. Patch by Adam Turner.

¹³⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/10460>

¹³⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/10520>

¹³¹⁰ <https://github.com/sphinx-doc/sphinx/issues/6679>

¹³¹¹ <https://github.com/sphinx-doc/sphinx/issues/10566>

¹³¹² <https://github.com/sphinx-doc/sphinx/issues/8686>

¹³¹³ <https://github.com/sphinx-doc/sphinx/issues/10633>

¹³¹⁴ <https://ctan.org/pkg/framed>

¹³¹⁵ <https://github.com/sphinx-doc/sphinx/issues/10638>

¹³¹⁶ <https://github.com/sphinx-doc/sphinx/issues/10647>

¹³¹⁷ <https://github.com/sphinx-doc/sphinx/issues/10579>

¹³¹⁸ <https://github.com/sphinx-doc/sphinx/issues/9577>

¹³¹⁹ <https://github.com/sphinx-doc/sphinx/issues/10088>

¹³²⁰ <https://github.com/sphinx-doc/sphinx/issues/10548>

¹³²¹ <https://github.com/sphinx-doc/sphinx/issues/10523>

Bugs fixed

- [#10538](#)¹³²²: autodoc: Inherited class attribute having docstring is documented even if `autodoc_inherit_docstring` is disabled
- [#10509](#)¹³²³: autosummary: autosummary fails with a shared library
- [#10497](#)¹³²⁴: py domain: Failed to resolve strings in Literal. Patch by Adam Turner.
- [#10523](#)¹³²⁵: HTML Theme: Fix double brackets on citation references in Docutils 0.18+. Patch by Adam Turner.
- [#10534](#)¹³²⁶: Missing CSS for `nav.contents` in Docutils 0.18+. Patch by Adam Turner.

14.39 Release 5.0.1 (released Jun 03, 2022)

Bugs fixed

- [#10498](#)¹³²⁷: gettext: `TypeError` is raised when sorting warning messages if a node has no line number. Patch by Adam Turner.
- [#10493](#)¹³²⁸: HTML Theme: `topic`¹³²⁹ directive is rendered incorrectly with Docutils 0.18. Patch by Adam Turner.
- [#10495](#)¹³³⁰: `IndexError` is raised for a `kbd` role having a separator. Patch by Adam Turner.

14.40 Release 5.0.0 (released May 30, 2022)

Dependencies

5.0.0 b1

- [#10164](#)¹³³¹: Support Docutils 0.18¹³³². Patch by Adam Turner.

Incompatible changes

5.0.0 b1

- [#10031](#)¹³³³: autosummary: `sphinx.ext.autosummary.import_by_name()` now raises `ImportExceptionGroup` instead of `ImportError` when it failed to import target object. Please handle the exception if your extension uses the function to import Python object. As a workaround, you can disable the behavior via `grouped_exception=False` keyword argument until v7.0.

¹³²² <https://github.com/sphinx-doc/sphinx/issues/10538>

¹³²³ <https://github.com/sphinx-doc/sphinx/issues/10509>

¹³²⁴ <https://github.com/sphinx-doc/sphinx/issues/10497>

¹³²⁵ <https://github.com/sphinx-doc/sphinx/issues/10523>

¹³²⁶ <https://github.com/sphinx-doc/sphinx/issues/10534>

¹³²⁷ <https://github.com/sphinx-doc/sphinx/issues/10498>

¹³²⁸ <https://github.com/sphinx-doc/sphinx/issues/10493>

¹³²⁹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#topic>

¹³³⁰ <https://github.com/sphinx-doc/sphinx/issues/10495>

¹³³¹ <https://github.com/sphinx-doc/sphinx/issues/10164>

¹³³² <https://docutils.sourceforge.io/RELEASE-NOTES.html#release-0-18-2021-10-26>

¹³³³ <https://github.com/sphinx-doc/sphinx/issues/10031>

- [#9962](#)¹³³⁴: texinfo: Customizing styles of emphasized text via `@definfoenclose` command was not supported because the command was deprecated since texinfo 6.8
- [#2068](#)¹³³⁵: `intersphinx_disabled_reftypes` has changed default value from an empty list to `['std:doc']` as avoid too surprising silent intersphinx resolutions. To migrate: either add an explicit inventory name to the references intersphinx should resolve, or explicitly set the value of this configuration variable to an empty list.
- [#10197](#)¹³³⁶: html theme: Reduce `body_min_width` setting in basic theme to 360px
- [#9999](#)¹³³⁷: LaTeX: separate terms from their definitions by a CR (refs: [#9985](#)¹³³⁸)
- [#10062](#)¹³³⁹: Change the default language to 'en' if any language is not set in `conf.py`

5.0.0 final

- [#10474](#)¹³⁴⁰: `language` does not accept `None` as it value. The default value of `language` becomes to 'en' now. Patch by Adam Turner and Takeshi KOMIYA.

Deprecated

5.0.0 b1

- [#10028](#)¹³⁴¹: jQuery and underscore.js will no longer be automatically injected into themes from Sphinx 6.0. If you develop a theme or extension that uses the jQuery, \$, or \$u global objects, you need to update your JavaScript or use the mitigation below.

To re-add jQuery and underscore.js, you will need to copy `jquery.js` and `underscore.js` from the [Sphinx repository](#)¹³⁴² to your `static` directory, and add the following to your `layout.html`:

```
{%- block scripts %}
<script src="{{ pathto('_static/jquery.js', resource=True) }}"></script>
<script src="{{ pathto('_static/underscore.js', resource=True) }}"></script>
{{ super() }}
{%- endblock %}
```

Patch by Adam Turner.

- `setuptools` integration. The `build_sphinx` sub-command for `setup.py` is marked as deprecated to follow the policy of `setuptools` team.
- The `locale` argument of `sphinx.util.i18n:babel_format_date()` becomes required
- The `language` argument of `sphinx.util.i18n:format_date()` becomes required
- `sphinx.builders.html.html5_ready`
- `sphinx.io.read_doc()`
- `sphinx.util.docutils.__version_info__`
- `sphinx.util.docutils.is_html5_writer_available()`
- `sphinx.writers.latex.LaTeXWriter.docclasses`

¹³³⁴ <https://github.com/sphinx-doc/sphinx/issues/9962>

¹³³⁵ <https://github.com/sphinx-doc/sphinx/issues/2068>

¹³³⁶ <https://github.com/sphinx-doc/sphinx/issues/10197>

¹³³⁷ <https://github.com/sphinx-doc/sphinx/issues/9999>

¹³³⁸ <https://github.com/sphinx-doc/sphinx/issues/9985>

¹³³⁹ <https://github.com/sphinx-doc/sphinx/issues/10062>

¹³⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/10474>

¹³⁴¹ <https://github.com/sphinx-doc/sphinx/issues/10028>

¹³⁴² <https://github.com/sphinx-doc/sphinx/tree/v5.3.0/sphinx/themes/basic/static>

Features added

5.0.0 b1

- [#9075](#)¹³⁴³: autodoc: The default value of `autodoc_typehints_format` is changed to 'smart'. It will suppress the leading module names of typehints (ex. `io.StringIO` -> `StringIO`).
- [#8417](#)¹³⁴⁴: autodoc: `:inherited-members:` option now takes multiple classes. It allows to suppress inherited members of several classes on the module at once by specifying the option to `automodule` directive
- [#9792](#)¹³⁴⁵: autodoc: Add new option for `autodoc_typehints_description_target` to include undocumented return values but not undocumented parameters.
- [#10285](#)¹³⁴⁶: autodoc: singledispatch functions having typehints are not documented
- autodoc: `autodoc_typehints_format` now also applies to attributes, data, properties, and type variable bounds.
- [#10258](#)¹³⁴⁷: autosummary: Recognize a documented attribute of a module as non-imported
- [#10028](#)¹³⁴⁸: Removed internal usages of JavaScript frameworks (jQuery and underscore.js) and modernised `doctools.js` and `searchtools.js` to ECMAScript 2018. Patch by Adam Turner.
- [#10302](#)¹³⁴⁹: C++, add support for conditional expressions (`?:`).
- [#5157](#)¹³⁵⁰, [#10251](#)¹³⁵¹: Inline code is able to be highlighted via `role`¹³⁵² directive
- [#10337](#)¹³⁵³: Make sphinx-build faster by caching Publisher object during build. Patch by Adam Turner.

Bugs fixed

5.0.0 b1

- [#10200](#)¹³⁵⁴: apidoc: Duplicated submodules are shown for modules having both `.pyx` and `.so` files. Patch by Adam Turner and Takeshi KOMIYA.
- [#10279](#)¹³⁵⁵: autodoc: Default values for keyword only arguments in overloaded functions are rendered as a string literal
- [#10280](#)¹³⁵⁶: autodoc: `autodoc_docstring_signature` unexpectedly generates return value typehint for constructors if docstring has multiple signatures
- [#10266](#)¹³⁵⁷: autodoc: `autodoc_preserve_defaults` does not work for mixture of keyword only arguments with/without defaults
- [#10310](#)¹³⁵⁸: autodoc: class methods are not documented when decorated with mocked function

¹³⁴³ <https://github.com/sphinx-doc/sphinx/issues/9075>

¹³⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/8417>

¹³⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/9792>

¹³⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/10285>

¹³⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/10258>

¹³⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/10028>

¹³⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/10302>

¹³⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/5157>

¹³⁵¹ <https://github.com/sphinx-doc/sphinx/issues/10251>

¹³⁵² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#role>

¹³⁵³ <https://github.com/sphinx-doc/sphinx/issues/10337>

¹³⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/10200>

¹³⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/10279>

¹³⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/10280>

¹³⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/10266>

¹³⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/10310>

- [#10305](#)¹³⁵⁹: autodoc: Failed to extract optional forward-ref'ed typehints correctly via `autodoc_type_aliases`
- [#10421](#)¹³⁶⁰: autodoc: `autodoc_preserve_defaults` doesn't work on class methods
- [#10214](#)¹³⁶¹: html: invalid language tag was generated if `language` contains a country code (ex. `zh_CN`)
- [#9974](#)¹³⁶²: html: Updated jQuery version from 3.5.1 to 3.6.0
- [#10236](#)¹³⁶³: html search: objects are duplicated in search result
- [#9962](#)¹³⁶⁴: texinfo: Deprecation message for `@definfoenclose` command on bulding texinfo document
- [#10000](#)¹³⁶⁵: LaTeX: glossary terms with common definition are rendered with too much vertical whitespace
- [#10188](#)¹³⁶⁶: LaTeX: alternating multiply referred footnotes produce a ? in pdf output
- [#10363](#)¹³⁶⁷: LaTeX: make 'howto' title page rule use `\linewidth` for compatibility with usage of a `twocolumn` class option
- [#10318](#)¹³⁶⁸: `:prepend:` option of `literalinclude` directive does not work with `:dedent:` option

5.0.0 final

- [#9575](#)¹³⁶⁹: autodoc: The annotation of return value should not be shown when `autodoc_typehints="description"`
- [#9648](#)¹³⁷⁰: autodoc: `*args` and `**kwargs` entries are duplicated when `autodoc_typehints="description"`
- [#8180](#)¹³⁷¹: autodoc: Docstring metadata ignored for attributes
- [#10443](#)¹³⁷²: epub: EPUB builder can't detect the mimetype of `.webp` file
- [#10104](#)¹³⁷³: gettext: Duplicated locations are shown if 3rd party extension does not provide correct information
- [#10456](#)¹³⁷⁴: py domain: `:meta:` fields are displayed if docstring contains two or more meta-field
- [#9096](#)¹³⁷⁵: sphinx-build: the value of progress bar for paralle build is wrong
- [#10110](#)¹³⁷⁶: sphinx-build: exit code is not changed when error is raised on builder-finished event

¹³⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/10305>

¹³⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/10421>

¹³⁶¹ <https://github.com/sphinx-doc/sphinx/issues/10214>

¹³⁶² <https://github.com/sphinx-doc/sphinx/issues/9974>

¹³⁶³ <https://github.com/sphinx-doc/sphinx/issues/10236>

¹³⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/9962>

¹³⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/10000>

¹³⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/10188>

¹³⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/10363>

¹³⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/10318>

¹³⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/9575>

¹³⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/9648>

¹³⁷¹ <https://github.com/sphinx-doc/sphinx/issues/8180>

¹³⁷² <https://github.com/sphinx-doc/sphinx/issues/10443>

¹³⁷³ <https://github.com/sphinx-doc/sphinx/issues/10104>

¹³⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/10456>

¹³⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/9096>

¹³⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/10110>

14.41 Release 4.5.0 (released Mar 28, 2022)

Incompatible changes

- [#10112](#)¹³⁷⁷: extlinks: Disable hardcoded links detector by default
- [#9993](#)¹³⁷⁸, [#10177](#)¹³⁷⁹: std domain: Disallow to refer an inline target via *ref* role

Deprecated

- `sphinx.ext.napoleon.docstring.GoogleDocstring._qualify_name()`

Features added

- [#10260](#)¹³⁸⁰: Enable `FORCE_COLOR` and `NO_COLOR` for terminal colouring
- [#10234](#)¹³⁸¹: autosummary: Add “autosummary” CSS class to summary tables
- [#10125](#)¹³⁸²: extlinks: Improve suggestion message for a reference having title
- [#10112](#)¹³⁸³: extlinks: Add `extlinks_detect_hardcoded_links` to enable hardcoded links detector feature
- [#9494](#)¹³⁸⁴, [#9456](#)¹³⁸⁵: html search: Add a config variable `html_show_search_summary` to enable/disable the search summaries
- [#9337](#)¹³⁸⁶: HTML theme, add option `enable_search_shortcuts` that enables `/` as a Quick search shortcut and `Esc` shortcut that removes search highlighting.
- [#10107](#)¹³⁸⁷: i18n: Allow to suppress translation warnings by adding `#noqa` comment to the tail of each translation message
- [#10252](#)¹³⁸⁸: C++, support attributes on classes, unions, and enums.
- [#10253](#)¹³⁸⁹: *pep* role now generates URLs based on `peps.python.org`¹³⁹⁰

¹³⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/10112>

¹³⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/9993>

¹³⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/10177>

¹³⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/10260>

¹³⁸¹ <https://github.com/sphinx-doc/sphinx/issues/10234>

¹³⁸² <https://github.com/sphinx-doc/sphinx/issues/10125>

¹³⁸³ <https://github.com/sphinx-doc/sphinx/issues/10112>

¹³⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/9494>

¹³⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/9456>

¹³⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/9337>

¹³⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/10107>

¹³⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/10252>

¹³⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/10253>

¹³⁹⁰ <https://peps.python.org>

Bugs fixed

- [#9876](#)¹³⁹¹: autodoc: Failed to document an imported class that is built from native binary module
- [#10133](#)¹³⁹²: autodoc: Crashed when mocked module is used for type annotation
- [#10146](#)¹³⁹³: autodoc: `autodoc_default_options` does not support `no-value` option
- [#9971](#)¹³⁹⁴: autodoc: `TypeError` is raised when the target object is annotated by unhashable object
- [#10205](#)¹³⁹⁵: extlinks: Failed to compile regexp on checking hardcoded links
- [#10277](#)¹³⁹⁶: html search: Could not search short words (ex. “use”)
- [#9529](#)¹³⁹⁷: LaTeX: named auto numbered footnote (ex. `[#named]`) that is referred multiple times was rendered to a question mark
- [#9924](#)¹³⁹⁸: LaTeX: multi-line `cpp:function` directive has big vertical spacing in Latexpdf
- [#10158](#)¹³⁹⁹: LaTeX: excessive whitespace since v4.4.0 for undocumented variables/structure members
- [#10175](#)¹⁴⁰⁰: LaTeX: named footnote reference is linked to an incorrect footnote if the name is also used in the different document
- [#10269](#)¹⁴⁰¹: manpage: Failed to resolve the title of `ref` cross references
- [#10179](#)¹⁴⁰²: i18n: suppress “rST localization” warning
- [#10118](#)¹⁴⁰³: imgconverter: Unnecessary availability check is called for remote URIs
- [#10181](#)¹⁴⁰⁴: napoleon: attributes are displayed like class attributes for google style docstrings when `napoleon_use_ivar` is enabled
- [#10122](#)¹⁴⁰⁵: sphinx-build: `make.bat` does not check the installation of `sphinx-build` command before showing help

14.42 Release 4.4.0 (released Jan 17, 2022)

Dependencies

- [#10007](#)¹⁴⁰⁶: Use `importlib_metadata` for python-3.9 or older
- [#10007](#)¹⁴⁰⁷: Drop `setuptools`

¹³⁹¹ <https://github.com/sphinx-doc/sphinx/issues/9876>

¹³⁹² <https://github.com/sphinx-doc/sphinx/issues/10133>

¹³⁹³ <https://github.com/sphinx-doc/sphinx/issues/10146>

¹³⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/9971>

¹³⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/10205>

¹³⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/10277>

¹³⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/9529>

¹³⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/9924>

¹³⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/10158>

¹⁴⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/10175>

¹⁴⁰¹ <https://github.com/sphinx-doc/sphinx/issues/10269>

¹⁴⁰² <https://github.com/sphinx-doc/sphinx/issues/10179>

¹⁴⁰³ <https://github.com/sphinx-doc/sphinx/issues/10118>

¹⁴⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/10181>

¹⁴⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/10122>

¹⁴⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/10007>

¹⁴⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/10007>

Features added

- #9075¹⁴⁰⁸: autodoc: Add a config variable `autodoc_typehints_format` to suppress the leading module names of typehints of function signatures (ex. `io.StringIO` -> `StringIO`)
- #9831¹⁴⁰⁹: Autosummary now documents only the members specified in a module's `__all__` attribute if `autosummary_ignore_module_all` is set to `False`. The default behaviour is unchanged. Autogen also now supports this behavior with the `--respect-module-all` switch.
- #9555¹⁴¹⁰: autosummary: Improve error messages on failure to load target object
- #9800¹⁴¹¹: extlinks: Emit warning if a hardcoded link is replaceable by an extlink, suggesting a replacement.
- #9961¹⁴¹²: html: Support nested `<kbd>` HTML elements in other HTML builders
- #10013¹⁴¹³: html: Allow to change the loading method of JS via `loading_method` parameter for `Sphinx.add_js_file()`
- #9551¹⁴¹⁴: html search: “Hide Search Matches” link removes “highlight” parameter from URL
- #9815¹⁴¹⁵: html theme: Wrap sidebar components in div to allow customizing their layout via CSS
- #9827¹⁴¹⁶: i18n: Sort items in glossary by translated terms
- #9899¹⁴¹⁷: py domain: Allows to specify cross-reference specifier (`.` and `~`) as `:type:` option
- #9894¹⁴¹⁸: linkcheck: add option `linkcheck_exclude_documents` to disable link checking in matched documents.
- #9793¹⁴¹⁹: sphinx-build: Allow to use the parallel build feature in macOS on macOS and Python3.8+
- #10055¹⁴²⁰: sphinx-build: Create directories when `-w` option given
- #9993¹⁴²¹: std domain: Allow to refer an inline target (ex. `_`target` name``) via `ref` role
- #9981¹⁴²²: std domain: Strip value part of the option directive from general index
- #9391¹⁴²³: texinfo: improve variable in `samp` role
- #9578¹⁴²⁴: texinfo: Add `texinfo_cross_references` to disable cross references for readability with standalone readers
- #9822¹⁴²⁵ (and #9062¹⁴²⁶), add new Intersphinx role `external` for explicit lookup in the external projects, without resolving to the local project.

¹⁴⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/9075>

¹⁴⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/9831>

¹⁴¹⁰ <https://github.com/sphinx-doc/sphinx/issues/9555>

¹⁴¹¹ <https://github.com/sphinx-doc/sphinx/issues/9800>

¹⁴¹² <https://github.com/sphinx-doc/sphinx/issues/9961>

¹⁴¹³ <https://github.com/sphinx-doc/sphinx/issues/10013>

¹⁴¹⁴ <https://github.com/sphinx-doc/sphinx/issues/9551>

¹⁴¹⁵ <https://github.com/sphinx-doc/sphinx/issues/9815>

¹⁴¹⁶ <https://github.com/sphinx-doc/sphinx/issues/9827>

¹⁴¹⁷ <https://github.com/sphinx-doc/sphinx/issues/9899>

¹⁴¹⁸ <https://github.com/sphinx-doc/sphinx/issues/9894>

¹⁴¹⁹ <https://github.com/sphinx-doc/sphinx/issues/9793>

¹⁴²⁰ <https://github.com/sphinx-doc/sphinx/issues/10055>

¹⁴²¹ <https://github.com/sphinx-doc/sphinx/issues/9993>

¹⁴²² <https://github.com/sphinx-doc/sphinx/issues/9981>

¹⁴²³ <https://github.com/sphinx-doc/sphinx/issues/9391>

¹⁴²⁴ <https://github.com/sphinx-doc/sphinx/issues/9578>

¹⁴²⁵ <https://github.com/sphinx-doc/sphinx/issues/9822>

¹⁴²⁶ <https://github.com/sphinx-doc/sphinx/issues/9062>

Bugs fixed

- #9866¹⁴²⁷: autodoc: doccomment for the imported class was ignored
- #9883¹⁴²⁸: autodoc: doccomment for the alias to mocked object was ignored
- #9908¹⁴²⁹: autodoc: debug message is shown on building document using NewTypes with Python 3.10
- #9968¹⁴³⁰: autodoc: instance variables are not shown if `__init__` method has position-only-arguments
- #9194¹⁴³¹: autodoc: types under the “typing” module are not hyperlinked
- #10009¹⁴³²: autodoc: Crashes if target object raises an error on getting docstring
- #10058¹⁴³³: autosummary: Imported members are not shown when `autodoc_class_signature = 'separated'`
- #9947¹⁴³⁴: i18n: topic directive having a bullet list can’t be translatable
- #9878¹⁴³⁵: mathjax: MathJax configuration is placed after loading MathJax itself
- #9932¹⁴³⁶: napoleon: empty “returns” section is generated even if no description
- #9857¹⁴³⁷: Generated RFC links use outdated base url
- #9909¹⁴³⁸: HTML, prevent line-wrapping in literal text.
- #10061¹⁴³⁹: html theme: Configuration values added by themes are not be able to override from `conf.py`
- #10073¹⁴⁴⁰: imgconverter: Unnecessary availability check is called for “data” URIs
- #9925¹⁴⁴¹: LaTeX: prohibit also with `'xelatex'` line splitting at dashes of inline and parsed literals
- #9944¹⁴⁴²: LaTeX: extra vertical whitespace for some nested declarations
- #9940¹⁴⁴³: LaTeX: Multi-function declaration in Python domain has cramped vertical spacing in latexpdf output
- #10015¹⁴⁴⁴: py domain: types under the “typing” module are not hyperlinked defined at `info-field-list`
- #9390¹⁴⁴⁵: texinfo: Do not emit labels inside footnotes
- #9413¹⁴⁴⁶: xml: Invalid XML was generated when cross referencing python objects
- #9979¹⁴⁴⁷: Error level messages were displayed as warning messages
- #10057¹⁴⁴⁸: Failed to scan documents if the project is placed onto the root directory

¹⁴²⁷ <https://github.com/sphinx-doc/sphinx/issues/9866>
¹⁴²⁸ <https://github.com/sphinx-doc/sphinx/issues/9883>
¹⁴²⁹ <https://github.com/sphinx-doc/sphinx/issues/9908>
¹⁴³⁰ <https://github.com/sphinx-doc/sphinx/issues/9968>
¹⁴³¹ <https://github.com/sphinx-doc/sphinx/issues/9194>
¹⁴³² <https://github.com/sphinx-doc/sphinx/issues/10009>
¹⁴³³ <https://github.com/sphinx-doc/sphinx/issues/10058>
¹⁴³⁴ <https://github.com/sphinx-doc/sphinx/issues/9947>
¹⁴³⁵ <https://github.com/sphinx-doc/sphinx/issues/9878>
¹⁴³⁶ <https://github.com/sphinx-doc/sphinx/issues/9932>
¹⁴³⁷ <https://github.com/sphinx-doc/sphinx/issues/9857>
¹⁴³⁸ <https://github.com/sphinx-doc/sphinx/issues/9909>
¹⁴³⁹ <https://github.com/sphinx-doc/sphinx/issues/10061>
¹⁴⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/10073>
¹⁴⁴¹ <https://github.com/sphinx-doc/sphinx/issues/9925>
¹⁴⁴² <https://github.com/sphinx-doc/sphinx/issues/9944>
¹⁴⁴³ <https://github.com/sphinx-doc/sphinx/issues/9940>
¹⁴⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/10015>
¹⁴⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/9390>
¹⁴⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/9413>
¹⁴⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/9979>
¹⁴⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/10057>

- [#9636](#)¹⁴⁴⁹: code-block: :dedent: without argument did strip newlines

14.43 Release 4.3.2 (released Dec 19, 2021)

Bugs fixed

- [#9917](#)¹⁴⁵⁰: C and C++, parse fundamental types no matter the order of simple type specifiers.

14.44 Release 4.3.1 (released Nov 28, 2021)

Features added

- [#9864](#)¹⁴⁵¹: mathjax: Support changing the loading method of MathJax to “defer” via *mathjax_options*

Bugs fixed

- [#9838](#)¹⁴⁵²: autodoc: AttributeError is raised on building document for functions decorated by `functools.lru_cache`
- [#9879](#)¹⁴⁵³: autodoc: AttributeError is raised on building document for an object having invalid `__doc__` attribute
- [#9844](#)¹⁴⁵⁴: autodoc: Failed to process a function wrapped with `functools.partial` if *autodoc_preserve_defaults* enabled
- [#9872](#)¹⁴⁵⁵: html: Class namespace collision between autodoc signatures and Docutils 0.17
- [#9868](#)¹⁴⁵⁶: imgmath: Crashed if the `dvisvgm` command failed to convert equation
- [#9864](#)¹⁴⁵⁷: mathjax: Failed to render equations via MathJax v2. The loading method of MathJax is back to “async” method again

14.45 Release 4.3.0 (released Nov 11, 2021)

Dependencies

- Support Python 3.10

¹⁴⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/9636>

¹⁴⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/9917>

¹⁴⁵¹ <https://github.com/sphinx-doc/sphinx/issues/9864>

¹⁴⁵² <https://github.com/sphinx-doc/sphinx/issues/9838>

¹⁴⁵³ <https://github.com/sphinx-doc/sphinx/issues/9879>

¹⁴⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/9844>

¹⁴⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/9872>

¹⁴⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/9868>

¹⁴⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/9864>

Incompatible changes

- #9649¹⁴⁵⁸: `searchindex.js`: the embedded data has changed format to allow objects with the same name in different domains.
- #9672¹⁴⁵⁹: The rendering of Python domain declarations is implemented with more Docutils nodes to allow better CSS styling. It may break existing styling.
- #9672¹⁴⁶⁰: the signature of `domains.python.PyObject.get_signature_prefix` has changed to return a list of nodes instead of a plain string.
- #9695¹⁴⁶¹: `domains.js.JSObject.display_prefix` has been changed into a method `get_display_prefix` which now returns a list of nodes instead of a plain string.
- #9695¹⁴⁶²: The rendering of Javascript domain declarations is implemented with more Docutils nodes to allow better CSS styling. It may break existing styling.
- #9450¹⁴⁶³: mathjax: Load MathJax via “defer” strategy

Deprecated

- `sphinx.ext.autodoc.AttributeDocumenter._datadescriptor`
- `sphinx.writers.html.HTMLTranslator._fieldlist_row_index`
- `sphinx.writers.html.HTMLTranslator._table_row_index`
- `sphinx.writers.html5.HTML5Translator._fieldlist_row_index`
- `sphinx.writers.html5.HTML5Translator._table_row_index`

Features added

- #9639¹⁴⁶⁴: autodoc: Support asynchronous generator functions
- #9664¹⁴⁶⁵: autodoc: `autodoc-process-bases` supports to inject reST snippet as a base class
- #9691¹⁴⁶⁶: C, added new info-field `retval` for `c: function` and `c: macro`.
- C++, added new info-field `retval` for `cpp: function`.
- #9618¹⁴⁶⁷: i18n: Add `gettext_allow_fuzzy_translations` to allow “fuzzy” messages for translation
- #9672¹⁴⁶⁸: More CSS classes on Python domain descriptions
- #9695¹⁴⁶⁹: More CSS classes on Javascript domain descriptions
- #9683¹⁴⁷⁰: Revert the removal of `add_stylesheet()` API. It will be kept until the Sphinx 6.0 release

¹⁴⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/9649>

¹⁴⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/9672>

¹⁴⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/9672>

¹⁴⁶¹ <https://github.com/sphinx-doc/sphinx/issues/9695>

¹⁴⁶² <https://github.com/sphinx-doc/sphinx/issues/9695>

¹⁴⁶³ <https://github.com/sphinx-doc/sphinx/issues/9450>

¹⁴⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/9639>

¹⁴⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/9664>

¹⁴⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/9691>

¹⁴⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/9618>

¹⁴⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/9672>

¹⁴⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/9695>

¹⁴⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/9683>

- #2068¹⁴⁷¹, add `intersphinx_disabled_reftypes` for disabling intersphinx resolution of cross-references that do not have an explicit inventory specification. Specific types of cross-references can be disabled, e.g., `std:doc` or all cross-references in a specific domain, e.g., `std:*`.
- #9623¹⁴⁷²: Allow to suppress “toctree contains reference to excluded document” warnings using `suppress_warnings`

Bugs fixed

- #9630¹⁴⁷³: autodoc: Failed to build cross references if `primary_domain` is not ‘py’
- #9644¹⁴⁷⁴: autodoc: Crashed on getting source info from problematic object
- #9655¹⁴⁷⁵: autodoc: mocked object having doc comment is warned unexpectedly
- #9651¹⁴⁷⁶: autodoc: return type field is not generated even if `autodoc_typehints_description_target` is set to “documented” when its info-field-list contains `:returns:` field
- #9657¹⁴⁷⁷: autodoc: The base class for a subclass of mocked object is incorrect
- #9607¹⁴⁷⁸: autodoc: Incorrect base class detection for the subclasses of the generic class
- #9755¹⁴⁷⁹: autodoc: memory addresses are shown for aliases
- #9752¹⁴⁸⁰: autodoc: Failed to detect type annotation for slots attribute
- #9756¹⁴⁸¹: autodoc: Crashed if classmethod does not have `__func__` attribute
- #9757¹⁴⁸²: autodoc: `autodoc_inherit_docstrings` does not effect to overridden classmethods
- #9781¹⁴⁸³: autodoc: `autodoc_preserve_defaults` does not support hexadecimal numeric
- #9630¹⁴⁸⁴: autosummary: Failed to build summary table if `primary_domain` is not ‘py’
- #9670¹⁴⁸⁵: html: Fix download file with special characters
- #9710¹⁴⁸⁶: html: Wrong styles for even/odd rows in nested tables
- #9763¹⁴⁸⁷: html: parameter name and its type annotation are not separated in HTML
- #9649¹⁴⁸⁸: HTML search: when objects have the same name but in different domains, return all of them as result instead of just one.
- #7634¹⁴⁸⁹: intersphinx: references on the file in sub directory are broken

¹⁴⁷¹ <https://github.com/sphinx-doc/sphinx/issues/2068>

¹⁴⁷² <https://github.com/sphinx-doc/sphinx/issues/9623>

¹⁴⁷³ <https://github.com/sphinx-doc/sphinx/issues/9630>

¹⁴⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/9644>

¹⁴⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/9655>

¹⁴⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/9651>

¹⁴⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/9657>

¹⁴⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/9607>

¹⁴⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/9755>

¹⁴⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/9752>

¹⁴⁸¹ <https://github.com/sphinx-doc/sphinx/issues/9756>

¹⁴⁸² <https://github.com/sphinx-doc/sphinx/issues/9757>

¹⁴⁸³ <https://github.com/sphinx-doc/sphinx/issues/9781>

¹⁴⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/9630>

¹⁴⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/9670>

¹⁴⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/9710>

¹⁴⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/9763>

¹⁴⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/9649>

¹⁴⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/7634>

- [#9737](#)¹⁴⁹⁰: LaTeX: hlist is rendered as a list containing “aggregated” text
- [#9678](#)¹⁴⁹¹: linkcheck: file extension was shown twice in warnings
- [#9697](#)¹⁴⁹²: py domain: An index entry with parens was registered for `py:method` directive with `:property:` option
- [#9775](#)¹⁴⁹³: py domain: Literal typehint was converted to a cross reference when `autodoc_typehints='description'`
- [#9708](#)¹⁴⁹⁴: needs_extension failed to check double-digit version correctly
- [#9688](#)¹⁴⁹⁵: Fix Sphinx patched `code`¹⁴⁹⁶ does not recognize `:class:` option
- [#9733](#)¹⁴⁹⁷: Fix for logging handler flushing warnings in the middle of the docs build
- [#9656](#)¹⁴⁹⁸: Fix warnings without subtype being incorrectly suppressed
- Intersphinx, for unresolved references with an explicit inventory, e.g., `proj:myFunc`, leave the inventory prefix in the unresolved text.

14.46 Release 4.2.0 (released Sep 12, 2021)

Features added

- [#9445](#)¹⁴⁹⁹: autodoc: Support class properties
- [#9479](#)¹⁵⁰⁰: autodoc: Emit a warning if target is a mocked object
- [#9560](#)¹⁵⁰¹: autodoc: Allow to refer NewType instances with module name in Python 3.10 or above
- [#9447](#)¹⁵⁰²: html theme: Expose the version of Sphinx in the form of tuple as a template variable `sphinx_version_tuple`
- [#9594](#)¹⁵⁰³: manpage: Suppress the title of man page if description is empty
- [#9445](#)¹⁵⁰⁴: py domain: `py:property` directive supports `:classmethod:` option to describe the class property
- [#9524](#)¹⁵⁰⁵: test: SphinxTestApp can take `builddir` as an argument
- [#9535](#)¹⁵⁰⁶: C and C++, support more fundamental types, including GNU extensions.

¹⁴⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/9737>

¹⁴⁹¹ <https://github.com/sphinx-doc/sphinx/issues/9678>

¹⁴⁹² <https://github.com/sphinx-doc/sphinx/issues/9697>

¹⁴⁹³ <https://github.com/sphinx-doc/sphinx/issues/9775>

¹⁴⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/9708>

¹⁴⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/9688>

¹⁴⁹⁶ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#code>

¹⁴⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/9733>

¹⁴⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/9656>

¹⁴⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/9445>

¹⁵⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/9479>

¹⁵⁰¹ <https://github.com/sphinx-doc/sphinx/issues/9560>

¹⁵⁰² <https://github.com/sphinx-doc/sphinx/issues/9447>

¹⁵⁰³ <https://github.com/sphinx-doc/sphinx/issues/9594>

¹⁵⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/9445>

¹⁵⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/9524>

¹⁵⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/9535>

Bugs fixed

- [#9608¹⁵⁰⁷](#): apidoc: apidoc does not generate a module definition for implicit namespace package
- [#9504¹⁵⁰⁸](#): autodoc: generate incorrect reference to the parent class if the target class inherits the class having `_name` attribute
- [#9537¹⁵⁰⁹](#), [#9589¹⁵¹⁰](#): autodoc: Some objects under `typing` module are not displayed well with the HEAD of 3.10
- [#9487¹⁵¹¹](#): autodoc: typehint for `cached_property` is not shown
- [#9509¹⁵¹²](#): autodoc: `AttributeError` is raised on failed resolving typehints
- [#9518¹⁵¹³](#): autodoc: `autodoc_docstring_signature` does not effect to `__init__()` and `__new__()`
- [#9522¹⁵¹⁴](#): autodoc: PEP 585 style typehints having arguments (ex. `list[int]`) are not displayed well
- [#9481¹⁵¹⁵](#): autosummary: some warnings contain non-existing filenames
- [#9568¹⁵¹⁶](#): autosummary: summarise overlined sectioned headings correctly
- [#9600¹⁵¹⁷](#): autosummary: Type annotations which contain commas in autosummary table are not removed completely
- [#9481¹⁵¹⁸](#): c domain: some warnings contain non-existing filenames
- [#9481¹⁵¹⁹](#): cpp domain: some warnings contain non-existing filenames
- [#9456¹⁵²⁰](#): html search: abbreviation marks are inserted to the search result if failed to fetch the content of the page
- [#9617¹⁵²¹](#): html search: The JS requirement warning is shown if browser is slow
- [#9267¹⁵²²](#): html theme: CSS and JS files added by theme were loaded twice
- [#9585¹⁵²³](#): py domain: `:type:` option for `py:property` directive does not create a hyperlink
- [#9576¹⁵²⁴](#): py domain: Literal typehint was converted to a cross reference
- [#9535¹⁵²⁵](#) comment: C++, fix parsing of defaulted function parameters that are function pointers.
- [#9564¹⁵²⁶](#): smartquotes: don't adjust typography for text with language-highlighted `:code:` role.
- [#9512¹⁵²⁷](#): sphinx-build: crashed with the HEAD of Python 3.10

¹⁵⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/9608>

¹⁵⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/9504>

¹⁵⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/9537>

¹⁵¹⁰ <https://github.com/sphinx-doc/sphinx/issues/9589>

¹⁵¹¹ <https://github.com/sphinx-doc/sphinx/issues/9487>

¹⁵¹² <https://github.com/sphinx-doc/sphinx/issues/9509>

¹⁵¹³ <https://github.com/sphinx-doc/sphinx/issues/9518>

¹⁵¹⁴ <https://github.com/sphinx-doc/sphinx/issues/9522>

¹⁵¹⁵ <https://github.com/sphinx-doc/sphinx/issues/9481>

¹⁵¹⁶ <https://github.com/sphinx-doc/sphinx/issues/9568>

¹⁵¹⁷ <https://github.com/sphinx-doc/sphinx/issues/9600>

¹⁵¹⁸ <https://github.com/sphinx-doc/sphinx/issues/9481>

¹⁵¹⁹ <https://github.com/sphinx-doc/sphinx/issues/9481>

¹⁵²⁰ <https://github.com/sphinx-doc/sphinx/issues/9456>

¹⁵²¹ <https://github.com/sphinx-doc/sphinx/issues/9617>

¹⁵²² <https://github.com/sphinx-doc/sphinx/issues/9267>

¹⁵²³ <https://github.com/sphinx-doc/sphinx/issues/9585>

¹⁵²⁴ <https://github.com/sphinx-doc/sphinx/issues/9576>

¹⁵²⁵ <https://github.com/sphinx-doc/sphinx/issues/9535>

¹⁵²⁶ <https://github.com/sphinx-doc/sphinx/issues/9564>

¹⁵²⁷ <https://github.com/sphinx-doc/sphinx/issues/9512>

14.47 Release 4.1.2 (released Jul 27, 2021)

Incompatible changes

- [#9435](#)¹⁵²⁸: linkcheck: Disable checking automatically generated anchors on github.com (ex. anchors in reST/Markdown documents)

Bugs fixed

- [#9489](#)¹⁵²⁹: autodoc: Custom types using `typing.NewType` are not displayed well with the HEAD of 3.10
- [#9490](#)¹⁵³⁰: autodoc: Some objects under `typing` module are not displayed well with the HEAD of 3.10
- [#9436](#)¹⁵³¹, [#9471](#)¹⁵³²: autodoc: crashed if `autodoc_class_signature = "separated"`
- [#9456](#)¹⁵³³: html search: `html_copy_source` can't control the search summaries
- [#9500](#)¹⁵³⁴: LaTeX: Failed to build Japanese document on Windows
- [#9435](#)¹⁵³⁵: linkcheck: Failed to check anchors in github.com

14.48 Release 4.1.1 (released Jul 15, 2021)

Dependencies

- [#9434](#)¹⁵³⁶: sphinxcontrib-htmlhelp-2.0.0 or above
- [#9434](#)¹⁵³⁷: sphinxcontrib-serializinghtml-1.1.5 or above

Bugs fixed

- [#9438](#)¹⁵³⁸: html: HTML logo or Favicon specified as file not being found on output

¹⁵²⁸ <https://github.com/sphinx-doc/sphinx/issues/9435>

¹⁵²⁹ <https://github.com/sphinx-doc/sphinx/issues/9489>

¹⁵³⁰ <https://github.com/sphinx-doc/sphinx/issues/9490>

¹⁵³¹ <https://github.com/sphinx-doc/sphinx/issues/9436>

¹⁵³² <https://github.com/sphinx-doc/sphinx/issues/9471>

¹⁵³³ <https://github.com/sphinx-doc/sphinx/issues/9456>

¹⁵³⁴ <https://github.com/sphinx-doc/sphinx/issues/9500>

¹⁵³⁵ <https://github.com/sphinx-doc/sphinx/issues/9435>

¹⁵³⁶ <https://github.com/sphinx-doc/sphinx/issues/9434>

¹⁵³⁷ <https://github.com/sphinx-doc/sphinx/issues/9434>

¹⁵³⁸ <https://github.com/sphinx-doc/sphinx/issues/9438>

14.49 Release 4.1.0 (released Jul 12, 2021)

Dependencies

- Support jinja2-3.0

Deprecated

- The `app` argument of `sphinx.environment.BuildEnvironment` becomes required
- `sphinx.application.Sphinx.html_theme`
- `sphinx.ext.autosummary._app`
- `sphinx.util.docstrings.extract_metadata()`

Features added

- [#8107](#)¹⁵³⁹: autodoc: Add `class-doc-from` option to `autoclass` directive to control the content of the specific class like `autoclass_content`
- [#8588](#)¹⁵⁴⁰: autodoc: `autodoc_type_aliases` now supports dotted name. It allows you to define an alias for a class with module name like `foo.bar.BazClass`
- [#9175](#)¹⁵⁴¹: autodoc: Special member is not documented in the module
- [#9195](#)¹⁵⁴²: autodoc: The arguments of `typing.Literal` are wrongly rendered
- [#9185](#)¹⁵⁴³: autodoc: `autodoc_typehints` allows 'both' setting to allow typehints to be included both in the signature and description
- [#4257](#)¹⁵⁴⁴: autodoc: Add `autodoc_class_signature` to separate the class entry and the definition of `__init__()` method
- [#8061](#)¹⁵⁴⁵, [#9218](#)¹⁵⁴⁶: autodoc: Support variable comment for alias classes
- [#3014](#)¹⁵⁴⁷: autodoc: Add `autodoc-process-bases` to modify the base classes of the class definitions
- [#9272](#)¹⁵⁴⁸: autodoc: Render enum values for the default argument value better
- [#9384](#)¹⁵⁴⁹: autodoc: `autodoc_typehints='none'` now erases typehints for variables, attributes and properties
- [#3257](#)¹⁵⁵⁰: autosummary: Support instance attributes for classes
- [#9358](#)¹⁵⁵¹: html: Add “heading” role to the toctree items
- [#9225](#)¹⁵⁵²: html: Add `span` tag to the return typehint of method/function

¹⁵³⁹ <https://github.com/sphinx-doc/sphinx/issues/8107>

¹⁵⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/8588>

¹⁵⁴¹ <https://github.com/sphinx-doc/sphinx/issues/9175>

¹⁵⁴² <https://github.com/sphinx-doc/sphinx/issues/9195>

¹⁵⁴³ <https://github.com/sphinx-doc/sphinx/issues/9185>

¹⁵⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/4257>

¹⁵⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/8061>

¹⁵⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/9218>

¹⁵⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/3014>

¹⁵⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/9272>

¹⁵⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/9384>

¹⁵⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/3257>

¹⁵⁵¹ <https://github.com/sphinx-doc/sphinx/issues/9358>

¹⁵⁵² <https://github.com/sphinx-doc/sphinx/issues/9225>

- [#9129](#)¹⁵⁵³: html search: Show search summaries when `html_copy_source = False`
- [#9307](#)¹⁵⁵⁴: html search: Prevent corrections and completions in search field
- [#9120](#)¹⁵⁵⁵: html theme: Eliminate prompt characters of code-block from copyable text
- [#9176](#)¹⁵⁵⁶: i18n: Emit a debug message if message catalog file not found under `locale_dirs`
- [#9414](#)¹⁵⁵⁷: LaTeX: Add `xeCJKVerbAddOn` to default `fvset` config for Chinese documents
- [#9016](#)¹⁵⁵⁸: linkcheck: Support checking anchors on github.com
- [#9016](#)¹⁵⁵⁹: linkcheck: Add a new event `linkcheck-process-uri` to modify URIs before checking hyperlinks
- [#6525](#)¹⁵⁶⁰: linkcheck: Add `linkcheck_allowed_redirects` to mark hyperlinks that are redirected to expected URLs as “working”
- [#1874](#)¹⁵⁶¹: py domain: Support union types using `|` in info-field-list
- [#9268](#)¹⁵⁶²: py domain: `python_use_unqualified_type_names` supports type field in info-field-list
- [#9097](#)¹⁵⁶³: Optimize the parallel build
- [#9131](#)¹⁵⁶⁴: Add `nitpick_ignore_regex` to ignore nitpicky warnings using regular expressions
- [#9174](#)¹⁵⁶⁵: Add `Sphinx.set_html_assets_policy` to tell extensions to include HTML assets in all the pages. Extensions can check this via `Sphinx.registry.html_assets_policy`
- C++, add support for
 - `inline` variables,
 - `constexpr` functions,
 - `constexpr` variables,
 - `char8_t`,
 - `explicit(<constant expression>)` specifier,
 - digit separators in literals, and
 - constraints in placeholder type specifiers, aka. adjective syntax (e.g., `Sortable auto &v`).
- C, add support for digit separators in literals.
- [#9166](#)¹⁵⁶⁶: LaTeX: support containers in LaTeX output

¹⁵⁵³ <https://github.com/sphinx-doc/sphinx/issues/9129>

¹⁵⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/9307>

¹⁵⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/9120>

¹⁵⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/9176>

¹⁵⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/9414>

¹⁵⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/9016>

¹⁵⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/9016>

¹⁵⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/6525>

¹⁵⁶¹ <https://github.com/sphinx-doc/sphinx/issues/1874>

¹⁵⁶² <https://github.com/sphinx-doc/sphinx/issues/9268>

¹⁵⁶³ <https://github.com/sphinx-doc/sphinx/issues/9097>

¹⁵⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/9131>

¹⁵⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/9174>

¹⁵⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/9166>

Bugs fixed

- [#8872](#)¹⁵⁶⁷: autodoc: stacked singledispatches are wrongly rendered
- [#8597](#)¹⁵⁶⁸: autodoc: a docstring having metadata only should be treated as undocumented
- [#9185](#)¹⁵⁶⁹: autodoc: typehints for overloaded functions and methods are inaccurate
- [#9250](#)¹⁵⁷⁰: autodoc: The inherited method not having docstring is wrongly parsed
- [#9283](#)¹⁵⁷¹: autodoc: autoattribute directive failed to generate document for an attribute not having any comment
- [#9364](#)¹⁵⁷²: autodoc: single element tuple on the default argument value is wrongly rendered
- [#9362](#)¹⁵⁷³: autodoc: AttributeError is raised on processing a subclass of Tuple[()]
- [#9404](#)¹⁵⁷⁴: autodoc: TypeError is raised on processing dict-like object (not a class) via autoclass directive
- [#9317](#)¹⁵⁷⁵: html: Pushing left key causes visiting the next page at the first page
- [#9381](#)¹⁵⁷⁶: html: URL for html_favicon and html_log does not work
- [#9270](#)¹⁵⁷⁷: html theme : pyramid theme generates incorrect logo links
- [#9217](#)¹⁵⁷⁸: manpage: The name of manpage directory that is generated by `man_make_section_directory` is not correct
- [#9350](#)¹⁵⁷⁹: manpage: Fix font isn't reset after keyword at the top of samp role
- [#9306](#)¹⁵⁸⁰: Linkcheck reports broken link when remote server closes the connection on HEAD request
- [#9280](#)¹⁵⁸¹: py domain: "exceptions" module is not displayed
- [#9418](#)¹⁵⁸²: py domain: a Callable annotation with no parameters (e.g. `Callable[[], None]`) will be rendered with a bracket missing (`Callable[[], None]`)
- [#9319](#)¹⁵⁸³: quickstart: Make sphinx-quickstart exit when conf.py already exists
- [#9387](#)¹⁵⁸⁴: xml: XML Builder ignores custom visitors
- [#9224](#)¹⁵⁸⁵: `:param:` and `:type:` fields does not support a type containing whitespace (ex. `Dict[str, str]`)
- [#8945](#)¹⁵⁸⁶: when transforming typed fields, call the specified role instead of making an single xref. For C and C++, use the `expr` role for typed fields.

¹⁵⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/8872>

¹⁵⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/8597>

¹⁵⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/9185>

¹⁵⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/9250>

¹⁵⁷¹ <https://github.com/sphinx-doc/sphinx/issues/9283>

¹⁵⁷² <https://github.com/sphinx-doc/sphinx/issues/9364>

¹⁵⁷³ <https://github.com/sphinx-doc/sphinx/issues/9362>

¹⁵⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/9404>

¹⁵⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/9317>

¹⁵⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/9381>

¹⁵⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/9270>

¹⁵⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/9217>

¹⁵⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/9350>

¹⁵⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/9306>

¹⁵⁸¹ <https://github.com/sphinx-doc/sphinx/issues/9280>

¹⁵⁸² <https://github.com/sphinx-doc/sphinx/issues/9418>

¹⁵⁸³ <https://github.com/sphinx-doc/sphinx/issues/9319>

¹⁵⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/9387>

¹⁵⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/9224>

¹⁵⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/8945>

14.50 Release 4.0.3 (released Jul 05, 2021)

Features added

- C, add C23 keywords `_Decimal32`, `_Decimal64`, and `_Decimal128`.
- #9354¹⁵⁸⁷: C, add `c_extra_keywords` to allow user-defined keywords during parsing.
- Revert the removal of `sphinx.util:force_decode()` to become some 3rd party extensions available again during 5.0

Bugs fixed

- #9330¹⁵⁸⁸: changeset domain: `versionchanged` with contents being a list will cause error during pdf build
- #9313¹⁵⁸⁹: LaTeX: complex table with merged cells broken since 4.0
- #9305¹⁵⁹⁰: LaTeX: backslash may cause Improper discretionary list pdf build error with Japanese engines
- #9354¹⁵⁹¹: C, remove special macro names from the keyword list. See also `c_extra_keywords`.
- #9322¹⁵⁹²: KeyError is raised on PropagateDescDomain transform

14.51 Release 4.0.2 (released May 20, 2021)

Dependencies

- #9216¹⁵⁹³: Support jinja2-3.0

Incompatible changes

- #9222¹⁵⁹⁴: Update Underscore.js to 1.13.1
- #9217¹⁵⁹⁵: `manpage`: Stop creating a section directory on build manpage by default (see `man_make_section_directory`)

¹⁵⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/9354>

¹⁵⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/9330>

¹⁵⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/9313>

¹⁵⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/9305>

¹⁵⁹¹ <https://github.com/sphinx-doc/sphinx/issues/9354>

¹⁵⁹² <https://github.com/sphinx-doc/sphinx/issues/9322>

¹⁵⁹³ <https://github.com/sphinx-doc/sphinx/issues/9216>

¹⁵⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/9222>

¹⁵⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/9217>

Bugs fixed

- #9210¹⁵⁹⁶: viewcode: crashed if non importable modules found on parallel build
- #9240¹⁵⁹⁷: Unknown node error for pending_xref_condition is raised if an extension that does not support the node installs a missing-reference handler

14.52 Release 4.0.1 (released May 11, 2021)

Bugs fixed

- #9189¹⁵⁹⁸: autodoc: crashed when ValueError is raised on generating signature from a property of the class
- #9188¹⁵⁹⁹: autosummary: warning is emitted if list value is set to autosummary_generate
- #8380¹⁶⁰⁰: html search: tags for search result are broken
- #9198¹⁶⁰¹: i18n: Babel emits errors when running compile_catalog
- #9205¹⁶⁰²: py domain: The :canonical: option causes “more than one target for cross-reference” warning
- #9201¹⁶⁰³: websupport: UndefinedError is raised: ‘css_tag’ is undefined

14.53 Release 4.0.0 (released May 09, 2021)

Dependencies

4.0.0b1

- Drop python 3.5 support
- Drop Docutils 0.12 and 0.13 support
- LaTeX: add tex-gyre font dependency

4.0.0b2

- Support Docutils 0.17. Please notice it changes the output of HTML builder. Some themes do not support it, and you need to update your custom CSS to upgrade it.

¹⁵⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/9210>

¹⁵⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/9240>

¹⁵⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/9189>

¹⁵⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/9188>

¹⁶⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/8380>

¹⁶⁰¹ <https://github.com/sphinx-doc/sphinx/issues/9198>

¹⁶⁰² <https://github.com/sphinx-doc/sphinx/issues/9205>

¹⁶⁰³ <https://github.com/sphinx-doc/sphinx/issues/9201>

Incompatible changes

4.0.0b1

- [#8539](#)¹⁶⁰⁴: `autodoc`: `info-field-list` is generated into the class description when `autodoc_typehints='description'` and `autoclass_content='class'` set
- [#8898](#)¹⁶⁰⁵: `extlinks`: “%s” becomes required keyword in the link caption string
- `domain`: The `Index` class becomes subclasses of `abc.ABC` to indicate methods that must be overridden in the concrete classes
- [#4826](#)¹⁶⁰⁶: `py` domain: The structure of python objects is changed. A boolean value is added to indicate that the python object is canonical one
- [#7425](#)¹⁶⁰⁷: `MathJax`: The `MathJax` was changed from 2 to 3. Users using a custom `MathJax` configuration may have to set the old `MathJax` path or update their configuration for version 3. See [sphinx.ext.mathjax](#).
- [#7784](#)¹⁶⁰⁸: `i18n`: The `msgid` for alt text of image is changed
- [#5560](#)¹⁶⁰⁹: `napoleon`: `napoleon_use_param` also affect “other parameters” section
- [#7996](#)¹⁶¹⁰: `manpage`: Make a section directory on build manpage by default (see `man_make_section_directory`)
- [#7849](#)¹⁶¹¹: `html`: Change the default setting of `html_codeblock_linenos_style` to 'inline'
- [#8380](#)¹⁶¹²: `html search`: search results are wrapped with `<p>` instead of `<div>`
- `html theme`: Move a script tag for `documentation_options.js` in `basic/layout.html` to `script_files` variable
- `html theme`: Move CSS tags in `basic/layout.html` to `css_files` variable
- [#8915](#)¹⁶¹³: `html theme`: Emit a warning for `sphinx_rtd_theme` 0.2.4 or older
- [#8508](#)¹⁶¹⁴: `LaTeX`: `uplatex` becomes a default setting of `latex_engine` for Japanese documents
- [#5977](#)¹⁶¹⁵: `py` domain: `:var:`, `:cvar:` and `:ivar:` fields do not create cross-references
- [#4550](#)¹⁶¹⁶: The `align` attribute of `figure` and `table` nodes becomes `None` by default instead of 'default'
- [#8769](#)¹⁶¹⁷: `LaTeX` refactoring: split `sphinx.sty` into multiple files and rename some auxiliary files created in `latex` build output repertory
- [#8937](#)¹⁶¹⁸: Use explicit title instead of `<no title>`
- [#8487](#)¹⁶¹⁹: The `:file:` option for `csv-table` directive now recognizes an absolute path as a relative path from source directory

4.0.0b2

¹⁶⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/8539>

¹⁶⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/8898>

¹⁶⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/4826>

¹⁶⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/7425>

¹⁶⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/7784>

¹⁶⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/5560>

¹⁶¹⁰ <https://github.com/sphinx-doc/sphinx/issues/7996>

¹⁶¹¹ <https://github.com/sphinx-doc/sphinx/issues/7849>

¹⁶¹² <https://github.com/sphinx-doc/sphinx/issues/8380>

¹⁶¹³ <https://github.com/sphinx-doc/sphinx/issues/8915>

¹⁶¹⁴ <https://github.com/sphinx-doc/sphinx/issues/8508>

¹⁶¹⁵ <https://github.com/sphinx-doc/sphinx/issues/5977>

¹⁶¹⁶ <https://github.com/sphinx-doc/sphinx/issues/4550>

¹⁶¹⁷ <https://github.com/sphinx-doc/sphinx/issues/8769>

¹⁶¹⁸ <https://github.com/sphinx-doc/sphinx/issues/8937>

¹⁶¹⁹ <https://github.com/sphinx-doc/sphinx/issues/8487>

- #9023¹⁶²⁰: Change the CSS classes on `cpp:expr` and `cpp:texpr`.

Deprecated

- `html_codeblock_linenos_style`
- favicon and logo variable in HTML templates
- `sphinx.directives.patches.CSVTable`
- `sphinx.directives.patches.ListTable`
- `sphinx.directives.patches.RSTTable`
- `sphinx.ext.autodoc.directive.DocumenterBridge.filename_set`
- `sphinx.ext.autodoc.directive.DocumenterBridge.warn()`
- `sphinx.registry.SphinxComponentRegistry.get_source_input()`
- `sphinx.registry.SphinxComponentRegistry.source_inputs`
- `sphinx.transforms.FigureAligner`
- `sphinx.util.pycompat.convert_with_2to3()`
- `sphinx.util.pycompat.execfile_()`
- `sphinx.util.smartypants`
- `sphinx.util.typing.DirectiveOption`

Features added

4.0.0b1

- #8924¹⁶²¹: autodoc: Support bound argument for TypeVar
- #7383¹⁶²²: autodoc: Support typehints for properties
- #5603¹⁶²³: autodoc: Allow to refer to a python class using its canonical name when the class has two different names; a canonical name and an alias name
- #8539¹⁶²⁴: autodoc: Add `autodoc_typehints_description_target` to control the behavior of `autodoc_typehints=description`
- #8841¹⁶²⁵: autodoc: `autodoc_docstring_signature` will continue to look for multiple signature lines without backslash character
- #7549¹⁶²⁶: autosummary: Enable `autosummary_generate` by default
- #8898¹⁶²⁷: extlinks: Allow %s in link caption string
- #4826¹⁶²⁸: py domain: Add `:canonical:` option to python directives to describe the location where the object is defined

¹⁶²⁰ <https://github.com/sphinx-doc/sphinx/issues/9023>

¹⁶²¹ <https://github.com/sphinx-doc/sphinx/issues/8924>

¹⁶²² <https://github.com/sphinx-doc/sphinx/issues/7383>

¹⁶²³ <https://github.com/sphinx-doc/sphinx/issues/5603>

¹⁶²⁴ <https://github.com/sphinx-doc/sphinx/issues/8539>

¹⁶²⁵ <https://github.com/sphinx-doc/sphinx/issues/8841>

¹⁶²⁶ <https://github.com/sphinx-doc/sphinx/issues/7549>

¹⁶²⁷ <https://github.com/sphinx-doc/sphinx/issues/8898>

¹⁶²⁸ <https://github.com/sphinx-doc/sphinx/issues/4826>

- #7199¹⁶²⁹: py domain: Add `python_use_unqualified_type_names` to suppress the module name of the python reference if it can be resolved (experimental)
- #7068¹⁶³⁰: py domain: Add `py:property` directive to describe a property
- #7784¹⁶³¹: i18n: The alt text for image is translated by default (without `gettext_additional_targets` setting)
- #2018¹⁶³²: html: `html_favicon` and `html_logo` now accept URL for the image
- #8070¹⁶³³: html search: Support searching for 2characters word
- #9036¹⁶³⁴: html theme: Allow to inherit the search page
- #8938¹⁶³⁵: imgconverter: Show the error of the command availability check
- #7830¹⁶³⁶: Add debug logs for change detection of sources and templates
- #8201¹⁶³⁷: Emit a warning if toctree contains duplicated entries
- #8326¹⁶³⁸: `master_doc` is now renamed to `root_doc`
- #8942¹⁶³⁹: C++, add support for the C++20 spaceship operator, `<=>`.
- #7199¹⁶⁴⁰: A new node, `sphinx.addnodes.pending_xref_condition` has been added. It can be used to choose appropriate content of the reference by conditions.

4.0.0b2

- #8818¹⁶⁴¹: autodoc: Super class having Any arguments causes nit-picky warning
- #9095¹⁶⁴²: autodoc: TypeError is raised on processing broken metaclass
- #9110¹⁶⁴³: autodoc: metadata of GenericAlias is not rendered as a reference in py37+
- #9098¹⁶⁴⁴: html: copy-range protection for doctests doesn't work in Safari
- #9103¹⁶⁴⁵: LaTeX: imgconverter: conversion runs even if not needed
- #8127¹⁶⁴⁶: py domain: Ellipsis in info-field-list causes nit-picky warning
- #9121¹⁶⁴⁷: py domain: duplicated warning is emitted when both canonical and its alias objects are defined on the document
- #9023¹⁶⁴⁸: More CSS classes on domain descriptions, see *Doctree node classes added by Sphinx* for details.
- #8195¹⁶⁴⁹: mathjax: Rename `mathjax_config` to `mathjax2_config` and add `mathjax3_config`

¹⁶²⁹ <https://github.com/sphinx-doc/sphinx/issues/7199>

¹⁶³⁰ <https://github.com/sphinx-doc/sphinx/issues/7068>

¹⁶³¹ <https://github.com/sphinx-doc/sphinx/issues/7784>

¹⁶³² <https://github.com/sphinx-doc/sphinx/issues/2018>

¹⁶³³ <https://github.com/sphinx-doc/sphinx/issues/8070>

¹⁶³⁴ <https://github.com/sphinx-doc/sphinx/issues/9036>

¹⁶³⁵ <https://github.com/sphinx-doc/sphinx/issues/8938>

¹⁶³⁶ <https://github.com/sphinx-doc/sphinx/issues/7830>

¹⁶³⁷ <https://github.com/sphinx-doc/sphinx/issues/8201>

¹⁶³⁸ <https://github.com/sphinx-doc/sphinx/issues/8326>

¹⁶³⁹ <https://github.com/sphinx-doc/sphinx/issues/8942>

¹⁶⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/7199>

¹⁶⁴¹ <https://github.com/sphinx-doc/sphinx/issues/8818>

¹⁶⁴² <https://github.com/sphinx-doc/sphinx/issues/9095>

¹⁶⁴³ <https://github.com/sphinx-doc/sphinx/issues/9110>

¹⁶⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/9098>

¹⁶⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/9103>

¹⁶⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/8127>

¹⁶⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/9121>

¹⁶⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/9023>

¹⁶⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/8195>

Bugs fixed

4.0.0b1

- [#8917](#)¹⁶⁵⁰: autodoc: Raises a warning if function has wrong `__globals__` value
- [#8415](#)¹⁶⁵¹: autodoc: a `TypeVar` imported from other module is not resolved (in Python 3.7 or above)
- [#8992](#)¹⁶⁵²: autodoc: Failed to resolve types.`TracebackType` type annotation
- [#8905](#)¹⁶⁵³: html: `html_add_permalink=None` and `html_add_permalink=""` are ignored
- [#8380](#)¹⁶⁵⁴: html search: Paragraphs in search results are not identified as `<p>`
- [#8915](#)¹⁶⁵⁵: html theme: The translation of `sphinx_rtd_theme` does not work
- [#8342](#)¹⁶⁵⁶: Emit a warning if a unknown domain is given for directive or role (ex. `:unknown:doc:`)
- [#7241](#)¹⁶⁵⁷: LaTeX: No wrapping for `cpp:enumerator`
- [#8711](#)¹⁶⁵⁸: LaTeX: backticks in code-blocks trigger latexpdf build warning (and font change) with late TeXLive 2019
- [#8253](#)¹⁶⁵⁹: LaTeX: Figures with no size defined get overscaled (compared to images with size explicitly set in pixels) (fixed for 'pdflatex'/'lualatex' only)
- [#8881](#)¹⁶⁶⁰: LaTeX: The depth of bookmarks panel in PDF is not enough for navigation
- [#8874](#)¹⁶⁶¹: LaTeX: the fix to two minor Pygments LaTeXFormatter output issues ignore Pygments style
- [#8925](#)¹⁶⁶²: LaTeX: 3.5.0 `verbatimmaxunderfull` setting does not work as expected
- [#8980](#)¹⁶⁶³: LaTeX: missing line break in `\pysigline`
- [#8995](#)¹⁶⁶⁴: LaTeX: legacy `\pysiglinewithargsret` does not compute correctly available horizontal space and should use a ragged right style
- [#9009](#)¹⁶⁶⁵: LaTeX: “release” value with underscore leads to invalid LaTeX
- [#8911](#)¹⁶⁶⁶: C++: remove the longest matching prefix in `cpp_index_common_prefix` instead of the first that matches.
- C, properly reject function declarations when a keyword is used as parameter name.
- [#8933](#)¹⁶⁶⁷: viewcode: Failed to create back-links on parallel build
- [#8960](#)¹⁶⁶⁸: C and C++, fix rendering of (member) function pointer types in function parameter lists.

¹⁶⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/8917>

¹⁶⁵¹ <https://github.com/sphinx-doc/sphinx/issues/8415>

¹⁶⁵² <https://github.com/sphinx-doc/sphinx/issues/8992>

¹⁶⁵³ <https://github.com/sphinx-doc/sphinx/issues/8905>

¹⁶⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/8380>

¹⁶⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/8915>

¹⁶⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/8342>

¹⁶⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/7241>

¹⁶⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/8711>

¹⁶⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/8253>

¹⁶⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/8881>

¹⁶⁶¹ <https://github.com/sphinx-doc/sphinx/issues/8874>

¹⁶⁶² <https://github.com/sphinx-doc/sphinx/issues/8925>

¹⁶⁶³ <https://github.com/sphinx-doc/sphinx/issues/8980>

¹⁶⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/8995>

¹⁶⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/9009>

¹⁶⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/8911>

¹⁶⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/8933>

¹⁶⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/8960>

- C++, fix linking of names in array declarators, pointer to member (function) declarators, and in the argument to `sizeof`...
- C, fix linking of names in array declarators.

4.0.0b2

- C, C++, fix `KeyError` when an `alias` directive is the first C/C++ directive in a file with another C/C++ directive later.

4.0.0b3

- [#9167](#)¹⁶⁶⁹: html: Failed to add CSS files to the specific page

14.54 Release 3.5.5 (in development)

14.55 Release 3.5.4 (released Apr 11, 2021)

Dependencies

- [#9071](#)¹⁶⁷⁰: Restrict Docutils to 0.16

Bugs fixed

- [#9078](#)¹⁶⁷¹: autodoc: Async staticmethods and classmethods are considered as non async coroutine-functions with Python3.10
- [#8870](#)¹⁶⁷², [#9001](#)¹⁶⁷³, [#9051](#)¹⁶⁷⁴: html theme: The style are not applied with Docutils 0.17
 - toctree captions
 - The content of `sidebar` directive
 - figures

14.56 Release 3.5.3 (released Mar 20, 2021)

Features added

- [#8959](#)¹⁶⁷⁵: using UNIX path separator in image directive confuses Sphinx on Windows

¹⁶⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/9167>

¹⁶⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/9071>

¹⁶⁷¹ <https://github.com/sphinx-doc/sphinx/issues/9078>

¹⁶⁷² <https://github.com/sphinx-doc/sphinx/issues/8870>

¹⁶⁷³ <https://github.com/sphinx-doc/sphinx/issues/9001>

¹⁶⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/9051>

¹⁶⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/8959>

14.57 Release 3.5.2 (released Mar 06, 2021)

Bugs fixed

- [#8943](#)¹⁶⁷⁶: i18n: Crashed by broken translation messages in ES, EL and HR
- [#8936](#)¹⁶⁷⁷: LaTeX: A custom LaTeX builder fails with unknown node error
- [#8952](#)¹⁶⁷⁸: Exceptions raised in a Directive cause parallel builds to hang

14.58 Release 3.5.1 (released Feb 16, 2021)

Bugs fixed

- [#8883](#)¹⁶⁷⁹: autodoc: AttributeError is raised on assigning `__annotations__` on read-only class
- [#8884](#)¹⁶⁸⁰: html: minified js stemmers not included in the distributed package
- [#8885](#)¹⁶⁸¹: html: AttributeError is raised if CSS/JS files are installed via `html_context`
- [#8880](#)¹⁶⁸²: viewcode: ExtensionError is raised on incremental build after unparsable python module found

14.59 Release 3.5.0 (released Feb 14, 2021)

Dependencies

- LaTeX: `multicol` (it is anyhow a required part of the official latex2e base distribution)

Incompatible changes

- Update Underscore.js to 1.12.0
- [#6550](#)¹⁶⁸³: html: The config variable `html_add_permalink` is replaced by `html_permalink` and `html_permalink_icon`

¹⁶⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/8943>

¹⁶⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/8936>

¹⁶⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/8952>

¹⁶⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/8883>

¹⁶⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/8884>

¹⁶⁸¹ <https://github.com/sphinx-doc/sphinx/issues/8885>

¹⁶⁸² <https://github.com/sphinx-doc/sphinx/issues/8880>

¹⁶⁸³ <https://github.com/sphinx-doc/sphinx/issues/6550>

Deprecated

- `pending_xref` node for viewcode extension
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.anchors_ignore`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.auth`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.broken`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.good`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.redirected`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.rqueue`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.to_ignore`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.workers`
- `sphinx.builders.linkcheck.CheckExternalLinksBuilder.wqueue`
- `sphinx.builders.linkcheck.node_line_or_0()`
- `sphinx.ext.autodoc.AttributeDocumenter.isinstanceattribute()`
- `sphinx.ext.autodoc.directive.DocumenterBridge.reporter`
- `sphinx.ext.autodoc.importer.get_module_members()`
- `sphinx.ext.autosummary.generate._simple_info()`
- `sphinx.ext.autosummary.generate._simple_warn()`
- `sphinx.writers.html.HTMLTranslator.permalink_text`
- `sphinx.writers.html5.HTML5Translator.permalink_text`

Features added

- [#8022](https://github.com/sphinx-doc/sphinx/issues/8022)¹⁶⁸⁴: autodoc: autodata and autoattribute directives does not show right-hand value of the variable if docstring contains `:meta hide-value:` in info-field-list
- [#8514](https://github.com/sphinx-doc/sphinx/issues/8514)¹⁶⁸⁵: autodoc: Default values of overloaded functions are taken from actual implementation if they're ellipsis
- [#8775](https://github.com/sphinx-doc/sphinx/issues/8775)¹⁶⁸⁶: autodoc: Support type union operator (PEP-604) in Python 3.10 or above
- [#8297](https://github.com/sphinx-doc/sphinx/issues/8297)¹⁶⁸⁷: autodoc: Allow to extend `autodoc_default_options` via directive options
- [#759](https://github.com/sphinx-doc/sphinx/issues/759)¹⁶⁸⁸: autodoc: Add a new configuration `autodoc_preserve_defaults` as an experimental feature. It preserves the default argument values of functions in source code and keep them not evaluated for readability.
- [#8619](https://github.com/sphinx-doc/sphinx/issues/8619)¹⁶⁸⁹: html: kbd role generates customizable HTML tags for compound keys
- [#8634](https://github.com/sphinx-doc/sphinx/issues/8634)¹⁶⁹⁰: html: Allow to change the order of JS/CSS via `priority` parameter for `Sphinx.add_js_file()` and `Sphinx.add_css_file()`

¹⁶⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/8022>

¹⁶⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/8514>

¹⁶⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/8775>

¹⁶⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/8297>

¹⁶⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/759>

¹⁶⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/8619>

¹⁶⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/8634>

- #6241¹⁶⁹¹: html: Allow to add JS/CSS files to the specific page when an extension calls `app.add_js_file()` or `app.add_css_file()` on `html-page-context` event
- #6550¹⁶⁹²: html: Allow to use HTML permalink texts via `html_permaLinks_icon`
- #1638¹⁶⁹³: html: Add permalink icons to glossary terms
- #8868¹⁶⁹⁴: html search: performance issue with massive lists
- #8867¹⁶⁹⁵: html search: Update JavaScript stemmer code to the latest version of Snowball (v2.1.0)
- #8852¹⁶⁹⁶: i18n: Allow to translate heading syntax in MyST-Parser
- #8649¹⁶⁹⁷: imgconverter: Skip availability check if builder supports the image type
- #8573¹⁶⁹⁸: napoleon: Allow to change the style of custom sections using `napoleon_custom_sections`
- #8004¹⁶⁹⁹: napoleon: Type definitions in Google style docstrings are rendered as references when `napoleon_preprocess_types` enabled
- #6241¹⁷⁰⁰: mathjax: Include mathjax.js only on the document using equations
- #8775¹⁷⁰¹: py domain: Support type union operator (PEP-604)
- #8651¹⁷⁰²: std domain: cross-reference for a rubric having inline item is broken
- #7642¹⁷⁰³: std domain: Optimize case-insensitive match of term
- #8681¹⁷⁰⁴: viewcode: Support incremental build
- #8132¹⁷⁰⁵: Add `project_copyright` as an alias of `copyright`
- #207¹⁷⁰⁶: Now `highlight_language` supports multiple languages
- #2030¹⁷⁰⁷: `code-block` and `literalinclude` supports automatic dedent via no-argument `:dedent:` option
- C++, also hyperlink operator overloads in expressions and alias declarations.
- #8247¹⁷⁰⁸: Allow production lists to refer to tokens from other production groups
- #8813¹⁷⁰⁹: Show what extension (or module) caused it on errors on event handler
- #8213¹⁷¹⁰: C++: add `maxdepth` option to `cpp:alias` to insert nested declarations.
- C, add `noroot` option to `c:alias` to render only nested declarations.
- C++, add `noroot` option to `cpp:alias` to render only nested declarations.

¹⁶⁹¹ <https://github.com/sphinx-doc/sphinx/issues/6241>

¹⁶⁹² <https://github.com/sphinx-doc/sphinx/issues/6550>

¹⁶⁹³ <https://github.com/sphinx-doc/sphinx/issues/1638>

¹⁶⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/8868>

¹⁶⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/8867>

¹⁶⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/8852>

¹⁶⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/8649>

¹⁶⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/8573>

¹⁶⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/8004>

¹⁷⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/6241>

¹⁷⁰¹ <https://github.com/sphinx-doc/sphinx/issues/8775>

¹⁷⁰² <https://github.com/sphinx-doc/sphinx/issues/8651>

¹⁷⁰³ <https://github.com/sphinx-doc/sphinx/issues/7642>

¹⁷⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/8681>

¹⁷⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/8132>

¹⁷⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/207>

¹⁷⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/2030>

¹⁷⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/8247>

¹⁷⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/8813>

¹⁷¹⁰ <https://github.com/sphinx-doc/sphinx/issues/8213>

Bugs fixed

- #8727¹⁷¹¹: apidoc: namespace module file is not generated if no submodules there
- #741¹⁷¹²: autodoc: inherited-members doesn't work for instance attributes on super class
- #8592¹⁷¹³: autodoc: `:meta public:` does not effect to variables
- #8594¹⁷¹⁴: autodoc: empty `__all__` attribute is ignored
- #8315¹⁷¹⁵: autodoc: Failed to resolve `struct.Struct` type annotation
- #8652¹⁷¹⁶: autodoc: All variable comments in the module are ignored if the module contains invalid type comments
- #8693¹⁷¹⁷: autodoc: Default values for overloaded functions are rendered as string
- #8134¹⁷¹⁸: autodoc: crashes when mocked decorator takes arguments
- #8800¹⁷¹⁹: autodoc: Uninitialized attributes in superclass are recognized as undocumented
- #8655¹⁷²⁰: autodoc: Failed to generate document if target module contains an object that raises an exception on `hasattr()`
- #8306¹⁷²¹: autosummary: mocked modules are documented as empty page when using `:recursive:` option
- #8232¹⁷²²: graphviz: Image node is not rendered if graph file is in subdirectory
- #8618¹⁷²³: html: kbd role produces incorrect HTML when compound-key separators (`-`, `+` or `^`) are used as keystrokes
- #8629¹⁷²⁴: html: A type warning for `html_use_opensearch` is shown twice
- #8714¹⁷²⁵: html: kbd role with “Caps Lock” rendered incorrectly
- #8123¹⁷²⁶: html search: fix searching for terms containing `+` (Requires a custom search language that does not split on `+`)
- #8665¹⁷²⁷: html theme: Could not override `globaltoc_maxdepth` in `theme.conf`
- #8446¹⁷²⁸: html: consecutive spaces are displayed as single space
- #8745¹⁷²⁹: i18n: crashes with `KeyError` when translation message adds a new auto footnote reference
- #4304¹⁷³⁰: linkcheck: Fix race condition that could lead to checking the availability of the same URL twice

¹⁷¹¹ <https://github.com/sphinx-doc/sphinx/issues/8727>

¹⁷¹² <https://github.com/sphinx-doc/sphinx/issues/741>

¹⁷¹³ <https://github.com/sphinx-doc/sphinx/issues/8592>

¹⁷¹⁴ <https://github.com/sphinx-doc/sphinx/issues/8594>

¹⁷¹⁵ <https://github.com/sphinx-doc/sphinx/issues/8315>

¹⁷¹⁶ <https://github.com/sphinx-doc/sphinx/issues/8652>

¹⁷¹⁷ <https://github.com/sphinx-doc/sphinx/issues/8693>

¹⁷¹⁸ <https://github.com/sphinx-doc/sphinx/issues/8134>

¹⁷¹⁹ <https://github.com/sphinx-doc/sphinx/issues/8800>

¹⁷²⁰ <https://github.com/sphinx-doc/sphinx/issues/8655>

¹⁷²¹ <https://github.com/sphinx-doc/sphinx/issues/8306>

¹⁷²² <https://github.com/sphinx-doc/sphinx/issues/8232>

¹⁷²³ <https://github.com/sphinx-doc/sphinx/issues/8618>

¹⁷²⁴ <https://github.com/sphinx-doc/sphinx/issues/8629>

¹⁷²⁵ <https://github.com/sphinx-doc/sphinx/issues/8714>

¹⁷²⁶ <https://github.com/sphinx-doc/sphinx/issues/8123>

¹⁷²⁷ <https://github.com/sphinx-doc/sphinx/issues/8665>

¹⁷²⁸ <https://github.com/sphinx-doc/sphinx/issues/8446>

¹⁷²⁹ <https://github.com/sphinx-doc/sphinx/issues/8745>

¹⁷³⁰ <https://github.com/sphinx-doc/sphinx/issues/4304>

- #8791¹⁷³¹: linkcheck: The docname for each hyperlink is not displayed
- #7118¹⁷³²: sphinx-quickstart: questionnaire got Mojibake if libreadline unavailable
- #8094¹⁷³³: texinfo: image files on the different directory with document are not copied
- #8782¹⁷³⁴: todo: Cross references in todolist get broken
- #8720¹⁷³⁵: viewcode: module pages are generated for epub on incremental build
- #8704¹⁷³⁶: viewcode: anchors are generated in incremental build after singlehtml
- #8756¹⁷³⁷: viewcode: highlighted code is generated even if not referenced
- #8671¹⁷³⁸: `highlight_options` is not working
- #8341¹⁷³⁹: C, fix intersphinx lookup types for names in declarations.
- C, C++: in general fix intersphinx and role lookup types.
- #8683¹⁷⁴⁰: `html_last_updated_fmt` does not support UTC offset (%z)
- #8683¹⁷⁴¹: `html_last_updated_fmt` generates wrong time zone for %Z
- #1112¹⁷⁴²: download role creates duplicated copies when relative path is specified
- #2616¹⁷⁴³ (fifth item): LaTeX: footnotes from captions are not clickable, and for manually numbered footnotes only first one with same number is an hyperlink
- #7576¹⁷⁴⁴: LaTeX with French babel and memoir crash: “Illegal parameter number in definition of \FNH@prefntext”
- #8055¹⁷⁴⁵: LaTeX (docs): A potential display bug with the LaTeX generation step in Sphinx (how to generate one-column index)
- #8072¹⁷⁴⁶: LaTeX: Directive `hlist` not implemented in LaTeX
- #8214¹⁷⁴⁷: LaTeX: The `index` role and the glossary generate duplicate entries in the LaTeX index (if both used for same term)
- #8735¹⁷⁴⁸: LaTeX: wrong internal links in pdf to captioned code-blocks when `numfig` is not True
- #8442¹⁷⁴⁹: LaTeX: some indexed terms are ignored when using xelatex engine (or pdflatex and `latex_use_xindy` set to True) with memoir class
- #8750¹⁷⁵⁰: LaTeX: URLs as footnotes fail to show in PDF if originating from inside function type signatures

¹⁷³¹ <https://github.com/sphinx-doc/sphinx/issues/8791>

¹⁷³² <https://github.com/sphinx-doc/sphinx/issues/7118>

¹⁷³³ <https://github.com/sphinx-doc/sphinx/issues/8094>

¹⁷³⁴ <https://github.com/sphinx-doc/sphinx/issues/8782>

¹⁷³⁵ <https://github.com/sphinx-doc/sphinx/issues/8720>

¹⁷³⁶ <https://github.com/sphinx-doc/sphinx/issues/8704>

¹⁷³⁷ <https://github.com/sphinx-doc/sphinx/issues/8756>

¹⁷³⁸ <https://github.com/sphinx-doc/sphinx/issues/8671>

¹⁷³⁹ <https://github.com/sphinx-doc/sphinx/issues/8341>

¹⁷⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/8683>

¹⁷⁴¹ <https://github.com/sphinx-doc/sphinx/issues/8683>

¹⁷⁴² <https://github.com/sphinx-doc/sphinx/issues/1112>

¹⁷⁴³ <https://github.com/sphinx-doc/sphinx/issues/2616>

¹⁷⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/7576>

¹⁷⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/8055>

¹⁷⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/8072>

¹⁷⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/8214>

¹⁷⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/8735>

¹⁷⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/8442>

¹⁷⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/8750>

- [#8780](#)¹⁷⁵¹: LaTeX: long words in narrow columns may not be hyphenated
- [#8788](#)¹⁷⁵²: LaTeX: `\titleformat` last argument in `sphinx.sty` should be bracketed, not braced (and is anyhow not needed)
- [#8849](#)¹⁷⁵³: LaTeX: code-block printed out of margin (see the opt-in LaTeX syntax boolean *verbatimforcewraps* for use via the *'sphinxsetup'* key of `latex_elements`)
- [#8183](#)¹⁷⁵⁴: LaTeX: Remove `substitution_reference` nodes from doctree only on LaTeX builds
- [#8865](#)¹⁷⁵⁵: LaTeX: Restructure the index nodes inside title nodes only on LaTeX builds
- [#8796](#)¹⁷⁵⁶: LaTeX: potentially critical low level TeX coding mistake has gone unnoticed so far
- C, *c:alias* skip symbols without explicit declarations instead of crashing.
- C, *c:alias* give a warning when the root symbol is not declared.
- C, `expr` role should start symbol lookup in the current scope.

14.60 Release 3.4.3 (released Jan 08, 2021)

Bugs fixed

- [#8655](#)¹⁷⁵⁷: autodoc: Failed to generate document if target module contains an object that raises an exception on `hasattr()`

14.61 Release 3.4.2 (released Jan 04, 2021)

Bugs fixed

- [#8164](#)¹⁷⁵⁸: autodoc: Classes that inherit mocked class are not documented
- [#8602](#)¹⁷⁵⁹: autodoc: The `autodoc-process-docstring` event is emitted to the non-datadescriptors unexpectedly
- [#8616](#)¹⁷⁶⁰: autodoc: `AttributeError` is raised on non-class object is passed to `autoclass` directive

¹⁷⁵¹ <https://github.com/sphinx-doc/sphinx/issues/8780>

¹⁷⁵² <https://github.com/sphinx-doc/sphinx/issues/8788>

¹⁷⁵³ <https://github.com/sphinx-doc/sphinx/issues/8849>

¹⁷⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/8183>

¹⁷⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/8865>

¹⁷⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/8796>

¹⁷⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/8655>

¹⁷⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/8164>

¹⁷⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/8602>

¹⁷⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/8616>

14.62 Release 3.4.1 (released Dec 25, 2020)

Bugs fixed

- [#8559](#)¹⁷⁶¹: autodoc: AttributeError is raised when using forward-reference type annotations
- [#8568](#)¹⁷⁶²: autodoc: TypeError is raised on checking slots attribute
- [#8567](#)¹⁷⁶³: autodoc: Instance attributes are incorrectly added to Parent class
- [#8566](#)¹⁷⁶⁴: autodoc: The autodoc-process-docstring event is emitted to the alias classes unexpectedly
- [#8583](#)¹⁷⁶⁵: autodoc: Unnecessary object comparison via `__eq__` method
- [#8565](#)¹⁷⁶⁶: linkcheck: Fix PriorityQueue crash when link tuples are not comparable

14.63 Release 3.4.0 (released Dec 20, 2020)

Incompatible changes

- [#8105](#)¹⁷⁶⁷: autodoc: the signature of class constructor will be shown for decorated classes, not a signature of decorator

Deprecated

- The `follow_wrapped` argument of `sphinx.util.inspect.signature()`
- The `no_docstring` argument of `sphinx.ext.autodoc.Documenter.add_content()`
- `sphinx.ext.autodoc.Documenter.get_object_members()`
- `sphinx.ext.autodoc.DataDeclarationDocumenter`
- `sphinx.ext.autodoc.GenericAliasDocumenter`
- `sphinx.ext.autodoc.InstanceAttributeDocumenter`
- `sphinx.ext.autodoc.SlotsAttributeDocumenter`
- `sphinx.ext.autodoc.TypeVarDocumenter`
- `sphinx.ext.autodoc.importer._getannotations()`
- `sphinx.ext.autodoc.importer._getmro()`
- `sphinx.pycode.ModuleAnalyzer.parse()`
- `sphinx.util.osutil.movefile()`
- `sphinx.util.requests.is_ssl_error()`

¹⁷⁶¹ <https://github.com/sphinx-doc/sphinx/issues/8559>

¹⁷⁶² <https://github.com/sphinx-doc/sphinx/issues/8568>

¹⁷⁶³ <https://github.com/sphinx-doc/sphinx/issues/8567>

¹⁷⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/8566>

¹⁷⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/8583>

¹⁷⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/8565>

¹⁷⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/8105>

Features added

- [#8119](#)¹⁷⁶⁸: autodoc: Allow to determine whether a member not included in `__all__` attribute of the module should be documented or not via `autodoc-skip-member` event
- [#8219](#)¹⁷⁶⁹: autodoc: Parameters for generic class are not shown when super class is a generic class and show-inheritance option is given (in Python 3.7 or above)
- autodoc: Add `Documenter.config` as a shortcut to access the config object
- autodoc: Add `Optional[t]` to annotation of function and method if a default value equal to `None` is set.
- [#8209](#)¹⁷⁷⁰: autodoc: Add `:no-value:` option to `autoattribute` and `autodata` directive to suppress the default value of the variable
- [#8460](#)¹⁷⁷¹: autodoc: Support custom types defined by `typing.NewType`
- [#8285](#)¹⁷⁷²: napoleon: Add `napoleon_attr_annotations` to merge type hints on source code automatically if any type is specified in docstring
- [#8236](#)¹⁷⁷³: napoleon: Support numpydoc's "Receives" section
- [#6914](#)¹⁷⁷⁴: Add a new event `warn-missing-reference` to custom warning messages when failed to resolve a cross-reference
- [#6914](#)¹⁷⁷⁵: Emit a detailed warning when failed to resolve a `:ref:` reference
- [#6629](#)¹⁷⁷⁶: linkcheck: The builder now handles rate limits. See `linkcheck_rate_limit_timeout` for details.

Bugs fixed

- [#7613](#)¹⁷⁷⁷: autodoc: autodoc does not respect `__signature__` of the class
- [#4606](#)¹⁷⁷⁸: autodoc: the location of the warning is incorrect for inherited method
- [#8105](#)¹⁷⁷⁹: autodoc: the signature of class constructor is incorrect if the class is decorated
- [#8434](#)¹⁷⁸⁰: autodoc: `autodoc_type_aliases` does not effect to variables and attributes
- [#8443](#)¹⁷⁸¹: autodoc: `autodata` directive can't create document for PEP-526 based type annotated variables
- [#8443](#)¹⁷⁸²: autodoc: `autoattribute` directive can't create document for PEP-526 based uninitialized variables
- [#8480](#)¹⁷⁸³: autodoc: `autoattribute` could not create document for `__slots__` attributes
- [#8503](#)¹⁷⁸⁴: autodoc: `autoattribute` could not create document for a `GenericAlias` as class attributes correctly

¹⁷⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/8119>

¹⁷⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/8219>

¹⁷⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/8209>

¹⁷⁷¹ <https://github.com/sphinx-doc/sphinx/issues/8460>

¹⁷⁷² <https://github.com/sphinx-doc/sphinx/issues/8285>

¹⁷⁷³ <https://github.com/sphinx-doc/sphinx/issues/8236>

¹⁷⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/6914>

¹⁷⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/6914>

¹⁷⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/6629>

¹⁷⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/7613>

¹⁷⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/4606>

¹⁷⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/8105>

¹⁷⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/8434>

¹⁷⁸¹ <https://github.com/sphinx-doc/sphinx/issues/8443>

¹⁷⁸² <https://github.com/sphinx-doc/sphinx/issues/8443>

¹⁷⁸³ <https://github.com/sphinx-doc/sphinx/issues/8480>

¹⁷⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/8503>

- #8534¹⁷⁸⁵: autodoc: autoattribute could not create document for a commented attribute in alias class
- #8452¹⁷⁸⁶: autodoc: autodoc_type_aliases doesn't work when autodoc_typehints is set to "description"
- #8541¹⁷⁸⁷: autodoc: autodoc_type_aliases doesn't work for the type annotation to instance attributes
- #8460¹⁷⁸⁸: autodoc: autodata and autoattribute directives do not display type information of TypeVars
- #8493¹⁷⁸⁹: autodoc: references to builtins not working in class aliases
- #8522¹⁷⁹⁰: autodoc: __bool__ method could be called
- #8067¹⁷⁹¹: autodoc: A typehint for the instance variable having type_comment on super class is not displayed
- #8545¹⁷⁹²: autodoc: a __slots__ attribute is not documented even having docstring
- #741¹⁷⁹³: autodoc: inherited-members doesn't work for instance attributes on super class
- #8477¹⁷⁹⁴: autosummary: non utf-8 reST files are generated when template contains multibyte characters
- #8501¹⁷⁹⁵: autosummary: summary extraction splits text after "el at." unexpectedly
- #8524¹⁷⁹⁶: html: Wrong url_root has been generated on a document named "index"
- #8419¹⁷⁹⁷: html search: Do not load language_data.js in non-search pages
- #8549¹⁷⁹⁸: i18n: -D gettext_compact=0 is no longer working
- #8454¹⁷⁹⁹: graphviz: The layout option for graph and digraph directives don't work
- #8131¹⁸⁰⁰: linkcheck: Use GET when HEAD requests cause Too Many Redirects, to accommodate infinite redirect loops on HEAD
- #8437¹⁸⁰¹: Makefile: make clean with empty BUILDDIR is dangerous
- #8365¹⁸⁰²: py domain: :type: and :rtype: gives false ambiguous class lookup warnings
- #8352¹⁸⁰³: std domain: Failed to parse an option that starts with bracket
- #8519¹⁸⁰⁴: LaTeX: Prevent page brake in the middle of a seealso
- #8520¹⁸⁰⁵: C, fix copying of AliasNode.

¹⁷⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/8534>

¹⁷⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/8452>

¹⁷⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/8541>

¹⁷⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/8460>

¹⁷⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/8493>

¹⁷⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/8522>

¹⁷⁹¹ <https://github.com/sphinx-doc/sphinx/issues/8067>

¹⁷⁹² <https://github.com/sphinx-doc/sphinx/issues/8545>

¹⁷⁹³ <https://github.com/sphinx-doc/sphinx/issues/741>

¹⁷⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/8477>

¹⁷⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/8501>

¹⁷⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/8524>

¹⁷⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/8419>

¹⁷⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/8549>

¹⁷⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/8454>

¹⁸⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/8131>

¹⁸⁰¹ <https://github.com/sphinx-doc/sphinx/issues/8437>

¹⁸⁰² <https://github.com/sphinx-doc/sphinx/issues/8365>

¹⁸⁰³ <https://github.com/sphinx-doc/sphinx/issues/8352>

¹⁸⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/8519>

¹⁸⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/8520>

14.64 Release 3.3.1 (released Nov 12, 2020)

Bugs fixed

- [#8372](https://github.com/sphinx-doc/sphinx/issues/8372)¹⁸⁰⁶: autodoc: autoclass directive became slower than Sphinx 3.2
- [#7727](https://github.com/sphinx-doc/sphinx/issues/7727)¹⁸⁰⁷: autosummary: raise PycodeError when documenting python package without `__init__.py`
- [#8350](https://github.com/sphinx-doc/sphinx/issues/8350)¹⁸⁰⁸: autosummary: `autosummary_mock_imports` causes slow down builds
- [#8364](https://github.com/sphinx-doc/sphinx/issues/8364)¹⁸⁰⁹: C, properly initialize attributes in empty symbols.
- [#8399](https://github.com/sphinx-doc/sphinx/issues/8399)¹⁸¹⁰: i18n: Put system locale path after the paths specified by configuration

14.65 Release 3.3.0 (released Nov 02, 2020)

Deprecated

- `sphinx.builders.latex.LaTeXBuilder.usepackages`
- `sphinx.builders.latex.LaTeXBuilder.usepackages_after_hyperref`
- `sphinx.ext.autodoc.SingledispatchFunctionDocumenter`
- `sphinx.ext.autodoc.SingledispatchMethodDocumenter`

Features added

- [#8100](https://github.com/sphinx-doc/sphinx/issues/8100)¹⁸¹¹: html: Show a better error message for failures on copying `html_static_files`
- [#8141](https://github.com/sphinx-doc/sphinx/issues/8141)¹⁸¹²: C: added a `maxdepth` option to `c:alias` to insert nested declarations.
- [#8081](https://github.com/sphinx-doc/sphinx/issues/8081)¹⁸¹³: LaTeX: Allow to add LaTeX package via `app.add_latex_package()` until just before writing .tex file
- [#7996](https://github.com/sphinx-doc/sphinx/issues/7996)¹⁸¹⁴: manpage: Add `man_make_section_directory` to make a section directory on build man page
- [#8289](https://github.com/sphinx-doc/sphinx/issues/8289)¹⁸¹⁵: epub: Allow to suppress “duplicated ToC entry found” warnings from epub builder using `suppress_warnings`.
- [#8298](https://github.com/sphinx-doc/sphinx/issues/8298)¹⁸¹⁶: sphinx-quickstart: Add `sphinx-quickstart --no-sep` option
- [#8304](https://github.com/sphinx-doc/sphinx/issues/8304)¹⁸¹⁷: sphinx.testing: Register public markers in `sphinx.testing.fixtures`
- [#8051](https://github.com/sphinx-doc/sphinx/issues/8051)¹⁸¹⁸: napoleon: use the `obj` role for all See Also items

¹⁸⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/8372>

¹⁸⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/7727>

¹⁸⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/8350>

¹⁸⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/8364>

¹⁸¹⁰ <https://github.com/sphinx-doc/sphinx/issues/8399>

¹⁸¹¹ <https://github.com/sphinx-doc/sphinx/issues/8100>

¹⁸¹² <https://github.com/sphinx-doc/sphinx/issues/8141>

¹⁸¹³ <https://github.com/sphinx-doc/sphinx/issues/8081>

¹⁸¹⁴ <https://github.com/sphinx-doc/sphinx/issues/7996>

¹⁸¹⁵ <https://github.com/sphinx-doc/sphinx/issues/8289>

¹⁸¹⁶ <https://github.com/sphinx-doc/sphinx/issues/8298>

¹⁸¹⁷ <https://github.com/sphinx-doc/sphinx/issues/8304>

¹⁸¹⁸ <https://github.com/sphinx-doc/sphinx/issues/8051>

- #8050¹⁸¹⁹: napoleon: Apply *napoleon_preprocess_types* to every field
- C and C++, show line numbers for previous declarations when duplicates are detected.
- #8183¹⁸²⁰: Remove substitution_reference nodes from doctree only on LaTeX builds

Bugs fixed

- #8085¹⁸²¹: i18n: Add support for having single text domain
- #6640¹⁸²²: i18n: Failed to override system message translation
- #8143¹⁸²³: autodoc: `AttributeError` is raised when `False` value is passed to *autodoc_default_options*
- #8103¹⁸²⁴: autodoc: `functools.cached_property` is not considered as a property
- #8190¹⁸²⁵: autodoc: parsing error is raised if some extension replaces docstring by string not ending with blank lines
- #8142¹⁸²⁶: autodoc: Wrong constructor signature for the class derived from `typing.Generic`
- #8157¹⁸²⁷: autodoc: `TypeError` is raised when annotation has invalid `__args__`
- #7964¹⁸²⁸: autodoc: Tuple in default value is wrongly rendered
- #8200¹⁸²⁹: autodoc: type aliases break type formatting of `autoattribute`
- #7786¹⁸³⁰: autodoc: can't detect overloaded methods defined in other file
- #8294¹⁸³¹: autodoc: single-string `__slots__` is not handled correctly
- #7785¹⁸³²: autodoc: `autodoc_typehints='none'` does not effect to overloaded functions
- #8192¹⁸³³: napoleon: description is disappeared when it contains inline literals
- #8142¹⁸³⁴: napoleon: Potential of regex denial of service in google style docs
- #8169¹⁸³⁵: LaTeX: `pxjahyper` loaded even when `latex_engine` is not `platex`
- #8215¹⁸³⁶: LaTeX: 'oneside' classoption causes build warning
- #8175¹⁸³⁷: intersphinx: Potential of regex denial of service by broken inventory
- #8277¹⁸³⁸: sphinx-build: missing and redundant spacing (and etc) for console output on building

¹⁸¹⁹ <https://github.com/sphinx-doc/sphinx/issues/8050>

¹⁸²⁰ <https://github.com/sphinx-doc/sphinx/issues/8183>

¹⁸²¹ <https://github.com/sphinx-doc/sphinx/issues/8085>

¹⁸²² <https://github.com/sphinx-doc/sphinx/issues/6640>

¹⁸²³ <https://github.com/sphinx-doc/sphinx/issues/8143>

¹⁸²⁴ <https://github.com/sphinx-doc/sphinx/issues/8103>

¹⁸²⁵ <https://github.com/sphinx-doc/sphinx/issues/8190>

¹⁸²⁶ <https://github.com/sphinx-doc/sphinx/issues/8142>

¹⁸²⁷ <https://github.com/sphinx-doc/sphinx/issues/8157>

¹⁸²⁸ <https://github.com/sphinx-doc/sphinx/issues/7964>

¹⁸²⁹ <https://github.com/sphinx-doc/sphinx/issues/8200>

¹⁸³⁰ <https://github.com/sphinx-doc/sphinx/issues/7786>

¹⁸³¹ <https://github.com/sphinx-doc/sphinx/issues/8294>

¹⁸³² <https://github.com/sphinx-doc/sphinx/issues/7785>

¹⁸³³ <https://github.com/sphinx-doc/sphinx/issues/8192>

¹⁸³⁴ <https://github.com/sphinx-doc/sphinx/issues/8142>

¹⁸³⁵ <https://github.com/sphinx-doc/sphinx/issues/8169>

¹⁸³⁶ <https://github.com/sphinx-doc/sphinx/issues/8215>

¹⁸³⁷ <https://github.com/sphinx-doc/sphinx/issues/8175>

¹⁸³⁸ <https://github.com/sphinx-doc/sphinx/issues/8277>

- [#7973](#)¹⁸³⁹: imgconverter: Check availability of imagemagick many times
- [#8255](#)¹⁸⁴⁰: py domain: number in default argument value is changed from hexadecimal to decimal
- [#8316](#)¹⁸⁴¹: html: Prevent arrow keys changing page when button elements are focused
- [#8343](#)¹⁸⁴²: html search: Fix unnecessary load of images when parsing the document
- [#8254](#)¹⁸⁴³: html theme: Line numbers misalign with code lines
- [#8093](#)¹⁸⁴⁴: The highlight warning has wrong location in some builders (LaTeX, singlehtml and so on)
- [#8215](#)¹⁸⁴⁵: Eliminate Fancyhdr build warnings for oneside documents
- [#8239](#)¹⁸⁴⁶: Failed to refer a token in productionlist if it is indented
- [#8268](#)¹⁸⁴⁷: linkcheck: Report HTTP errors when `linkcheck_anchors` is `True`
- [#8245](#)¹⁸⁴⁸: linkcheck: take source directory into account for local files
- [#8321](#)¹⁸⁴⁹: linkcheck: `tel`: schema hyperlinks are detected as errors
- [#8323](#)¹⁸⁵⁰: linkcheck: An exit status is incorrect when links having unsupported schema found
- [#8188](#)¹⁸⁵¹: C, add missing items to internal object types dictionary, e.g., preventing intersphinx from resolving them.
- C, fix anon objects in intersphinx.
- [#8270](#)¹⁸⁵²: C++, properly reject functions as duplicate declarations if a non-function declaration of the same name already exists.
- C, fix references to function parameters. Link to the function instead of a non-existing anchor.
- [#6914](#)¹⁸⁵³: figure numbers are unexpectedly assigned to uncaptioned items
- [#8320](#)¹⁸⁵⁴: make “inline” line numbers un-selectable

Testing

- [#8257](#)¹⁸⁵⁵: Support parallel build in `sphinx.testing`

¹⁸³⁹ <https://github.com/sphinx-doc/sphinx/issues/7973>
¹⁸⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/8255>
¹⁸⁴¹ <https://github.com/sphinx-doc/sphinx/issues/8316>
¹⁸⁴² <https://github.com/sphinx-doc/sphinx/issues/8343>
¹⁸⁴³ <https://github.com/sphinx-doc/sphinx/issues/8254>
¹⁸⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/8093>
¹⁸⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/8215>
¹⁸⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/8239>
¹⁸⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/8268>
¹⁸⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/8245>
¹⁸⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/8321>
¹⁸⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/8323>
¹⁸⁵¹ <https://github.com/sphinx-doc/sphinx/issues/8188>
¹⁸⁵² <https://github.com/sphinx-doc/sphinx/issues/8270>
¹⁸⁵³ <https://github.com/sphinx-doc/sphinx/issues/6914>
¹⁸⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/8320>
¹⁸⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/8257>

14.66 Release 3.2.1 (released Aug 14, 2020)

Features added

- [#8095](#)¹⁸⁵⁶: napoleon: Add *napoleon_preprocess_types* to enable the type preprocessor for numpy style docstrings
- [#8114](#)¹⁸⁵⁷: C and C++, parse function attributes after parameters and qualifiers.

Bugs fixed

- [#8074](#)¹⁸⁵⁸: napoleon: Crashes during processing C-ext module
- [#8088](#)¹⁸⁵⁹: napoleon: “Inline literal start-string without end-string” warning in Numpy style Parameters section
- [#8084](#)¹⁸⁶⁰: autodoc: KeyError is raised on documenting an attribute of the broken class
- [#8091](#)¹⁸⁶¹: autodoc: AttributeError is raised on documenting an attribute on Python 3.5.2
- [#8099](#)¹⁸⁶²: autodoc: NameError is raised when target code uses TYPE_CHECKING
- C++, fix parsing of template template parameters, broken by the fix of [#7944](#)¹⁸⁶³

14.67 Release 3.2.0 (released Aug 08, 2020)

Deprecated

- `sphinx.ext.autodoc.members_set_option()`
- `sphinx.ext.autodoc.merge_special_members_option()`
- `sphinx.writers.texinfo.TexinfoWriter.desc`
- C, parsing of pre-v3 style type directives and roles, along with the options `c_allow_pre_v3` and `c_warn_on_allowed_pre_v3`.

Features added

- [#2076](#)¹⁸⁶⁴: autodoc: Allow overriding of exclude-members in skip-member function
- [#8034](#)¹⁸⁶⁵: autodoc: `:private-member:` can take an explicit list of member names to be documented
- [#2024](#)¹⁸⁶⁶: autosummary: Add *autosummary_filename_map* to avoid conflict of filenames between two object with different case

¹⁸⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/8095>

¹⁸⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/8114>

¹⁸⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/8074>

¹⁸⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/8088>

¹⁸⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/8084>

¹⁸⁶¹ <https://github.com/sphinx-doc/sphinx/issues/8091>

¹⁸⁶² <https://github.com/sphinx-doc/sphinx/issues/8099>

¹⁸⁶³ <https://github.com/sphinx-doc/sphinx/issues/7944>

¹⁸⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/2076>

¹⁸⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/8034>

¹⁸⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/2024>

- #8011¹⁸⁶⁷: autosummary: Support instance attributes as a target of autosummary directive
- #7849¹⁸⁶⁸: html: Add `html_codeblock_linenos_style` to change the style of line numbers for code-blocks
- #7853¹⁸⁶⁹: C and C++, support parameterized GNU style attributes.
- #7888¹⁸⁷⁰: napoleon: Add aliases Warn and Raise.
- #7690¹⁸⁷¹: napoleon: parse type strings and make them hyperlinks as possible. The conversion rule can be updated via `napoleon_type_aliases`
- #8049¹⁸⁷²: napoleon: Create a hyperlink for each the type of parameter when `napoleon_use_param` is False
- C, added `c:alias` directive for inserting copies of existing declarations.
- #7745¹⁸⁷³: html: inventory is broken if the docname contains a space
- #7991¹⁸⁷⁴: html search: Allow searching for numbers
- #7902¹⁸⁷⁵: html theme: Add a new option `globaltoc_maxdepth` to control the behavior of globaltoc in sidebar
- #7840¹⁸⁷⁶: i18n: Optimize the dependencies check on bootstrap
- #7768¹⁸⁷⁷: i18n: `figure_language_filename` supports docpath token
- #5208¹⁸⁷⁸: linkcheck: Support checks for local links
- #5090¹⁸⁷⁹: setuptools: Link verbosity to distutils' -v and -q option
- #6698¹⁸⁸⁰: doctest: Add `:trim-doctest-flags:` and `:no-trim-doctest-flags:` options to doctest, test-code and testoutput directives
- #7052¹⁸⁸¹: add `:noindexentry:` to the Python, C, C++, and Javascript domains. Update the documentation to better reflect the relationship between this option and the `:noindex:` option.
- #7899¹⁸⁸²: C, add possibility of parsing of some pre-v3 style type directives and roles and try to convert them to equivalent v3 directives/roles. Set the new option `c_allow_pre_v3` to True to enable this. The warnings printed from this functionality can be suppressed by setting `c_warn_on_allowed_pre_v3` to True. The functionality is immediately deprecated.
- #7999¹⁸⁸³: C, add support for named variadic macro arguments.
- #8071¹⁸⁸⁴: Allow to suppress “self referenced toctrees” warning

¹⁸⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/8011>

¹⁸⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/7849>

¹⁸⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/7853>

¹⁸⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/7888>

¹⁸⁷¹ <https://github.com/sphinx-doc/sphinx/issues/7690>

¹⁸⁷² <https://github.com/sphinx-doc/sphinx/issues/8049>

¹⁸⁷³ <https://github.com/sphinx-doc/sphinx/issues/7745>

¹⁸⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/7991>

¹⁸⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/7902>

¹⁸⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/7840>

¹⁸⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/7768>

¹⁸⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/5208>

¹⁸⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/5090>

¹⁸⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/6698>

¹⁸⁸¹ <https://github.com/sphinx-doc/sphinx/issues/7052>

¹⁸⁸² <https://github.com/sphinx-doc/sphinx/issues/7899>

¹⁸⁸³ <https://github.com/sphinx-doc/sphinx/issues/7999>

¹⁸⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/8071>

Bugs fixed

- [#7886](#)¹⁸⁸⁵: autodoc: `TypeError` is raised on mocking generic-typed classes
- [#7935](#)¹⁸⁸⁶: autodoc: function signature is not shown when the function has a parameter having `inspect._empty` as its default value
- [#7901](#)¹⁸⁸⁷: autodoc: type annotations for overloaded functions are not resolved
- [#904](#)¹⁸⁸⁸: autodoc: An instance attribute cause a crash of autofunction directive
- [#1362](#)¹⁸⁸⁹: autodoc: `private-members` option does not work for class attributes
- [#7983](#)¹⁸⁹⁰: autodoc: Generator type annotation is wrongly rendered in py36
- [#8030](#)¹⁸⁹¹: autodoc: An uninitialized annotated instance variable is not documented when `:inherited-members:` option given
- [#8032](#)¹⁸⁹²: autodoc: A type hint for the instance variable defined at parent class is not shown in the document of the derived class
- [#8041](#)¹⁸⁹³: autodoc: An annotated instance variable on super class is not documented when derived class has other annotated instance variables
- [#7839](#)¹⁸⁹⁴: autosummary: cannot handle umlauts in function names
- [#7865](#)¹⁸⁹⁵: autosummary: Failed to extract summary line when abbreviations found
- [#7866](#)¹⁸⁹⁶: autosummary: Failed to extract correct summary line when docstring contains a hyperlink target
- [#7469](#)¹⁸⁹⁷: autosummary: “Module attributes” header is not translatable
- [#7940](#)¹⁸⁹⁸: apidoc: An extra newline is generated at the end of the rst file if a module has submodules
- [#4258](#)¹⁸⁹⁹: napoleon: decorated special methods are not shown
- [#7799](#)¹⁹⁰⁰: napoleon: parameters are not escaped for combined params in numpypdoc
- [#7780](#)¹⁹⁰¹: napoleon: multiple parameters declaration in numpypdoc was wrongly recognized when `napoleon_use_param=True`
- [#7715](#)¹⁹⁰²: LaTeX: `numfig_secnum_depth > 1` leads to wrong figure links
- [#7846](#)¹⁹⁰³: html theme: XML-invalid files were generated
- [#7894](#)¹⁹⁰⁴: gettext: Wrong source info is shown when using `rst_epilog`

¹⁸⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/7886>

¹⁸⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/7935>

¹⁸⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/7901>

¹⁸⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/904>

¹⁸⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/1362>

¹⁸⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/7983>

¹⁸⁹¹ <https://github.com/sphinx-doc/sphinx/issues/8030>

¹⁸⁹² <https://github.com/sphinx-doc/sphinx/issues/8032>

¹⁸⁹³ <https://github.com/sphinx-doc/sphinx/issues/8041>

¹⁸⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/7839>

¹⁸⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/7865>

¹⁸⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/7866>

¹⁸⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/7469>

¹⁸⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/7940>

¹⁸⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/4258>

¹⁹⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/7799>

¹⁹⁰¹ <https://github.com/sphinx-doc/sphinx/issues/7780>

¹⁹⁰² <https://github.com/sphinx-doc/sphinx/issues/7715>

¹⁹⁰³ <https://github.com/sphinx-doc/sphinx/issues/7846>

¹⁹⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/7894>

- [#7691](#)¹⁹⁰⁵: linkcheck: HEAD requests are not used for checking
- [#4888](#)¹⁹⁰⁶: i18n: Failed to add an explicit title to `:ref:` role on translation
- [#7928](#)¹⁹⁰⁷: py domain: failed to resolve a type annotation for the attribute
- [#8008](#)¹⁹⁰⁸: py domain: failed to parse a type annotation containing ellipsis
- [#7994](#)¹⁹⁰⁹: std domain: option directive does not generate old `node_id` compatible with 2.x or older
- [#7968](#)¹⁹¹⁰: i18n: The content of `math` directive is interpreted as reST on translation
- [#7768](#)¹⁹¹¹: i18n: The root element for `figure_language_filename` is not a path that user specifies in the document
- [#7993](#)¹⁹¹²: texinfo: `TypeError` is raised for nested object descriptions
- [#7993](#)¹⁹¹³: texinfo: a warning not supporting `desc_signature_line` node is shown
- [#7869](#)¹⁹¹⁴: `abbr` role without an explanation will show the explanation from the previous `abbr` role
- [#8048](#)¹⁹¹⁵: graphviz: `graphviz.css` was copied on building non-HTML document
- C and C++, removed `noindex` directive option as it did nothing.
- [#7619](#)¹⁹¹⁶: Duplicated node IDs are generated if node has multiple IDs
- [#2050](#)¹⁹¹⁷: Symbols sections are appeared twice in the index page
- [#8017](#)¹⁹¹⁸: Fix circular import in `sphinx.addnodes`
- [#7986](#)¹⁹¹⁹: CSS: make “highlight” selector more robust
- [#7944](#)¹⁹²⁰: C++, parse non-type template parameters starting with a dependent qualified name.
- C, don't deepcopy the entire symbol table and make a mess every time an enumerator is handled.

14.68 Release 3.1.2 (released Jul 05, 2020)

Incompatible changes

- [#7650](#)¹⁹²¹: autodoc: the signature of base function will be shown for decorated functions, not a signature of decorator

¹⁹⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/7691>

¹⁹⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/4888>

¹⁹⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/7928>

¹⁹⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/8008>

¹⁹⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/7994>

¹⁹¹⁰ <https://github.com/sphinx-doc/sphinx/issues/7968>

¹⁹¹¹ <https://github.com/sphinx-doc/sphinx/issues/7768>

¹⁹¹² <https://github.com/sphinx-doc/sphinx/issues/7993>

¹⁹¹³ <https://github.com/sphinx-doc/sphinx/issues/7993>

¹⁹¹⁴ <https://github.com/sphinx-doc/sphinx/issues/7869>

¹⁹¹⁵ <https://github.com/sphinx-doc/sphinx/issues/8048>

¹⁹¹⁶ <https://github.com/sphinx-doc/sphinx/issues/7619>

¹⁹¹⁷ <https://github.com/sphinx-doc/sphinx/issues/2050>

¹⁹¹⁸ <https://github.com/sphinx-doc/sphinx/issues/8017>

¹⁹¹⁹ <https://github.com/sphinx-doc/sphinx/issues/7986>

¹⁹²⁰ <https://github.com/sphinx-doc/sphinx/issues/7944>

¹⁹²¹ <https://github.com/sphinx-doc/sphinx/issues/7650>

Bugs fixed

- [#7844](#)¹⁹²²: autodoc: Failed to detect module when relative module name given
- [#7856](#)¹⁹²³: autodoc: AttributeError is raised when non-class object is given to the autoclass directive
- [#7850](#)¹⁹²⁴: autodoc: KeyError is raised for invalid mark up when autodoc_typehints is ‘description’
- [#7812](#)¹⁹²⁵: autodoc: crashed if the target name matches to both an attribute and module that are same name
- [#7650](#)¹⁹²⁶: autodoc: function signature becomes (*args, **kwargs) if the function is decorated by generic decorator
- [#7812](#)¹⁹²⁷: autosummary: generates broken stub files if the target code contains an attribute and module that are same name
- [#7806](#)¹⁹²⁸: viewcode: Failed to resolve viewcode references on 3rd party builders
- [#7838](#)¹⁹²⁹: html theme: List items have extra vertical space
- [#7878](#)¹⁹³⁰: html theme: Undesired interaction between “overflow” and “float”

14.69 Release 3.1.1 (released Jun 14, 2020)

Incompatible changes

- [#7808](#)¹⁹³¹: napoleon: a type for attribute are represented as typed field

Features added

- [#7807](#)¹⁹³²: autodoc: Show detailed warning when type_comment is mismatched with its signature

Bugs fixed

- [#7808](#)¹⁹³³: autodoc: Warnings raised on variable and attribute type annotations
- [#7802](#)¹⁹³⁴: autodoc: EOFError is raised on parallel build
- [#7821](#)¹⁹³⁵: autodoc: TypeError is raised for overloaded C-ext function
- [#7805](#)¹⁹³⁶: autodoc: an object which descriptors returns is unexpectedly documented

¹⁹²² <https://github.com/sphinx-doc/sphinx/issues/7844>

¹⁹²³ <https://github.com/sphinx-doc/sphinx/issues/7856>

¹⁹²⁴ <https://github.com/sphinx-doc/sphinx/issues/7850>

¹⁹²⁵ <https://github.com/sphinx-doc/sphinx/issues/7812>

¹⁹²⁶ <https://github.com/sphinx-doc/sphinx/issues/7650>

¹⁹²⁷ <https://github.com/sphinx-doc/sphinx/issues/7812>

¹⁹²⁸ <https://github.com/sphinx-doc/sphinx/issues/7806>

¹⁹²⁹ <https://github.com/sphinx-doc/sphinx/issues/7838>

¹⁹³⁰ <https://github.com/sphinx-doc/sphinx/issues/7878>

¹⁹³¹ <https://github.com/sphinx-doc/sphinx/issues/7808>

¹⁹³² <https://github.com/sphinx-doc/sphinx/issues/7807>

¹⁹³³ <https://github.com/sphinx-doc/sphinx/issues/7808>

¹⁹³⁴ <https://github.com/sphinx-doc/sphinx/issues/7802>

¹⁹³⁵ <https://github.com/sphinx-doc/sphinx/issues/7821>

¹⁹³⁶ <https://github.com/sphinx-doc/sphinx/issues/7805>

- [#7807](#)¹⁹³⁷: autodoc: wrong signature is shown for the function using contextmanager
- [#7812](#)¹⁹³⁸: autosummary: generates broken stub files if the target code contains an attribute and module that are same name
- [#7808](#)¹⁹³⁹: napoleon: Warnings raised on variable and attribute type annotations
- [#7811](#)¹⁹⁴⁰: sphinx.util.inspect causes circular import problem

14.70 Release 3.1.0 (released Jun 08, 2020)

Dependencies

- [#7746](#)¹⁹⁴¹: mathjax: Update to 2.7.5

Incompatible changes

- [#7477](#)¹⁹⁴²: imgconverter: Invoke “magick convert” command by default on Windows

Deprecated

- The first argument for `sphinx.ext.autosummary.generate.AutosummaryRenderer` has been changed to Sphinx object
- `sphinx.ext.autosummary.generate.AutosummaryRenderer` takes an object type as an argument
- The `ignore` argument of `sphinx.ext.autodoc.Documenter.get_doc()`
- The `template_dir` argument of `sphinx.ext.autosummary.generate.AutosummaryRenderer`
- The `module` argument of `sphinx.ext.autosummary.generate.find_autosummary_in_docstring()`
- The `builder` argument of `sphinx.ext.autosummary.generate.generate_autosummary_docs()`
- The `template_dir` argument of `sphinx.ext.autosummary.generate.generate_autosummary_docs()`
- The `ignore` argument of `sphinx.util.docstring.prepare_docstring()`
- `sphinx.ext.autosummary.generate.AutosummaryRenderer.exists()`
- `sphinx.util.rpartition()`

¹⁹³⁷ <https://github.com/sphinx-doc/sphinx/issues/7807>

¹⁹³⁸ <https://github.com/sphinx-doc/sphinx/issues/7812>

¹⁹³⁹ <https://github.com/sphinx-doc/sphinx/issues/7808>

¹⁹⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/7811>

¹⁹⁴¹ <https://github.com/sphinx-doc/sphinx/issues/7746>

¹⁹⁴² <https://github.com/sphinx-doc/sphinx/issues/7477>

Features added

- LaTeX: Make the `toplevel_sectioning` setting optional in LaTeX theme
- LaTeX: Allow to override `papersize` and `pointsize` from LaTeX themes
- LaTeX: Add `latex_theme_options` to override theme options
- #7410¹⁹⁴³: Allow to suppress “circular toctree references detected” warnings using `suppress_warnings`
- C, added scope control directives, `c:namespace`, `c:namespace-push`, and `c:namespace-pop`.
- #2044¹⁹⁴⁴: autodoc: Suppress default value for instance attributes
- #7473¹⁹⁴⁵: autodoc: consider a member public if docstring contains `:meta public:` in info-field-list
- #7487¹⁹⁴⁶: autodoc: Allow to generate docs for singledispatch functions by `py:autofunction`
- #7143¹⁹⁴⁷: autodoc: Support final classes and methods
- #7384¹⁹⁴⁸: autodoc: Support signatures defined by `__new__()`, metaclasses and builtin base classes
- #2106¹⁹⁴⁹: autodoc: Support multiple signatures on docstring
- #4422¹⁹⁵⁰: autodoc: Support GenericAlias in Python 3.7 or above
- #3610¹⁹⁵¹: autodoc: Support overloaded functions
- #7722¹⁹⁵²: autodoc: Support TypeVar
- #7466¹⁹⁵³: autosummary: headings in generated documents are not translated
- #7490¹⁹⁵⁴: autosummary: Add `:caption:` option to autosummary directive to set a caption to the toctree
- #7469¹⁹⁵⁵: autosummary: Support module attributes
- #248¹⁹⁵⁶, #6040¹⁹⁵⁷: autosummary: Add `:recursive:` option to autosummary directive to generate stub files recursively
- #4030¹⁹⁵⁸: autosummary: Add `autosummary_context` to add template variables for custom templates
- #7530¹⁹⁵⁹: html: Support nested `<kbd>` elements
- #7481¹⁹⁶⁰: html theme: Add right margin to footnote/citation labels
- #7482¹⁹⁶¹, #7717¹⁹⁶²: html theme: CSS spacing for code blocks with captions and line numbers

¹⁹⁴³ <https://github.com/sphinx-doc/sphinx/issues/7410>

¹⁹⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/2044>

¹⁹⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/7473>

¹⁹⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/7487>

¹⁹⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/7143>

¹⁹⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/7384>

¹⁹⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/2106>

¹⁹⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/4422>

¹⁹⁵¹ <https://github.com/sphinx-doc/sphinx/issues/3610>

¹⁹⁵² <https://github.com/sphinx-doc/sphinx/issues/7722>

¹⁹⁵³ <https://github.com/sphinx-doc/sphinx/issues/7466>

¹⁹⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/7490>

¹⁹⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/7469>

¹⁹⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/248>

¹⁹⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/6040>

¹⁹⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/4030>

¹⁹⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/7530>

¹⁹⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/7481>

¹⁹⁶¹ <https://github.com/sphinx-doc/sphinx/issues/7482>

¹⁹⁶² <https://github.com/sphinx-doc/sphinx/issues/7717>

- [#7443](#)¹⁹⁶³: html theme: Add new options `globaltoc_collapse` and `globaltoc_includehidden` to control the behavior of `globaltoc` in sidebar
- [#7484](#)¹⁹⁶⁴: html theme: Avoid clashes between sidebar and other blocks
- [#7476](#)¹⁹⁶⁵: html theme: Relbar breadcrumb should contain current page
- [#7506](#)¹⁹⁶⁶: html theme: A canonical URL is not escaped
- [#7533](#)¹⁹⁶⁷: html theme: Avoid whitespace at the beginning of `genindex.html`
- [#7541](#)¹⁹⁶⁸: html theme: Add a “clearer” at the end of the “body”
- [#7542](#)¹⁹⁶⁹: html theme: Make admonition/topic/sidebar scrollable
- [#7543](#)¹⁹⁷⁰: html theme: Add top and bottom margins to tables
- [#7695](#)¹⁹⁷¹: html theme: Add viewport meta tag for basic theme
- [#7721](#)¹⁹⁷²: html theme: classic: default `codetextcolor/codebgcolor` doesn’t override Pygments
- C and C++: allow semicolon in the end of declarations.
- C++, parse parameterized `noexcept` specifiers.
- [#7294](#)¹⁹⁷³: C++, parse expressions with user-defined literals.
- C++, parse trailing return types.
- [#7143](#)¹⁹⁷⁴: py domain: Add `:final:` option to `py:class`, `py:exception` and `py:method` directives
- [#7596](#)¹⁹⁷⁵: py domain: Change a type annotation for variables to a hyperlink
- [#7770](#)¹⁹⁷⁶: std domain: `option` directive support arguments in the form of `foo[=bar]`
- [#7582](#)¹⁹⁷⁷: napoleon: a type for attribute are represented like type annotation
- [#7734](#)¹⁹⁷⁸: napoleon: overescaped trailing underscore on attribute
- [#7247](#)¹⁹⁷⁹: linkcheck: Add `linkcheck_request_headers` to send custom HTTP headers for specific host
- [#7792](#)¹⁹⁸⁰: setup tools: Support `--verbosity` option
- [#7683](#)¹⁹⁸¹: Add `allowed_exceptions` parameter to `Sphinx.emit()` to allow handlers to raise specified exceptions
- [#7295](#)¹⁹⁸²: C++, parse (trailing) `requires` clauses.

¹⁹⁶³ <https://github.com/sphinx-doc/sphinx/issues/7443>

¹⁹⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/7484>

¹⁹⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/7476>

¹⁹⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/7506>

¹⁹⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/7533>

¹⁹⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/7541>

¹⁹⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/7542>

¹⁹⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/7543>

¹⁹⁷¹ <https://github.com/sphinx-doc/sphinx/issues/7695>

¹⁹⁷² <https://github.com/sphinx-doc/sphinx/issues/7721>

¹⁹⁷³ <https://github.com/sphinx-doc/sphinx/issues/7294>

¹⁹⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/7143>

¹⁹⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/7596>

¹⁹⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/7770>

¹⁹⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/7582>

¹⁹⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/7734>

¹⁹⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/7247>

¹⁹⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/7792>

¹⁹⁸¹ <https://github.com/sphinx-doc/sphinx/issues/7683>

¹⁹⁸² <https://github.com/sphinx-doc/sphinx/issues/7295>

Bugs fixed

- #6703¹⁹⁸³: autodoc: incremental build does not work for imported objects
- #7564¹⁹⁸⁴: autodoc: annotations not to be shown for descriptors
- #6588¹⁹⁸⁵: autodoc: Decorated inherited method has no documentation
- #7469¹⁹⁸⁶: autodoc: The change of autodoc-process-docstring for variables is cached unexpectedly
- #7559¹⁹⁸⁷: autodoc: misdetects a sync function is async
- #6857¹⁹⁸⁸: autodoc: failed to detect a classmethod on Enum class
- #7562¹⁹⁸⁹: autodoc: a typehint contains spaces is wrongly rendered under `autodoc_typehints='description'` mode
- #7551¹⁹⁹⁰: autodoc: failed to import nested class
- #7362¹⁹⁹¹: autodoc: does not render correct signatures for built-in functions
- #7654¹⁹⁹²: autodoc: `Optional[Union[foo, bar]]` is presented as `Union[foo, bar, None]`
- #7629¹⁹⁹³: autodoc: autofunction emits an unfriendly warning if an invalid object specified
- #7650¹⁹⁹⁴: autodoc: undecorated signature is shown for decorated functions
- #7676¹⁹⁹⁵: autodoc: typo in the default value of `autodoc_member_order`
- #7676¹⁹⁹⁶: autodoc: wrong value for `:member-order:` option is ignored silently
- #7676¹⁹⁹⁷: autodoc: `member-order="bysource"` does not work for C module
- #3673¹⁹⁹⁸: autodoc: `member-order="bysource"` does not work for a module having `__all__`
- #7668¹⁹⁹⁹: autodoc: wrong retann value is passed to a handler of `autodoc-process-signature`
- #7711²⁰⁰⁰: autodoc: fails with `ValueError` when processing numpy objects
- #7791²⁰⁰¹: autodoc: `TypeError` is raised on documenting `singledispatch` function
- #7551²⁰⁰²: autosummary: a nested class is indexed as non-nested class
- #7661²⁰⁰³: autosummary: `autosummary` directive emits warnings twice if failed to import the target module

¹⁹⁸³ <https://github.com/sphinx-doc/sphinx/issues/6703>

¹⁹⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/7564>

¹⁹⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/6588>

¹⁹⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/7469>

¹⁹⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/7559>

¹⁹⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/6857>

¹⁹⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/7562>

¹⁹⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/7551>

¹⁹⁹¹ <https://github.com/sphinx-doc/sphinx/issues/7362>

¹⁹⁹² <https://github.com/sphinx-doc/sphinx/issues/7654>

¹⁹⁹³ <https://github.com/sphinx-doc/sphinx/issues/7629>

¹⁹⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/7650>

¹⁹⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/7676>

¹⁹⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/7676>

¹⁹⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/7676>

¹⁹⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/3673>

¹⁹⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/7668>

²⁰⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/7711>

²⁰⁰¹ <https://github.com/sphinx-doc/sphinx/issues/7791>

²⁰⁰² <https://github.com/sphinx-doc/sphinx/issues/7551>

²⁰⁰³ <https://github.com/sphinx-doc/sphinx/issues/7661>

- #7685²⁰⁰⁴: autosummary: The template variable “members” contains imported members even if `autosummary_imported_members` is False
- #7671²⁰⁰⁵: autosummary: The location of import failure warning is missing
- #7535²⁰⁰⁶: sphinx-autogen: crashes when custom template uses inheritance
- #7536²⁰⁰⁷: sphinx-autogen: crashes when template uses i18n feature
- #7781²⁰⁰⁸: sphinx-build: Wrong error message when outdir is not directory
- #7653²⁰⁰⁹: sphinx-quickstart: Fix multiple directory creation for nested relpath
- #2785²⁰¹⁰: html: Bad alignment of equation links
- #7718²⁰¹¹: html theme: some themes does not respect background color of Pygments style (agogo, haiku, nature, pyramid, scrolls, sphinxdoc and traditional)
- #7544²⁰¹²: html theme: inconsistent padding in admonitions
- #7581²⁰¹³: napoleon: bad parsing of inline code in attribute docstrings
- #7628²⁰¹⁴: imgconverter: runs imagemagick once unnecessary for builders not supporting images
- #7610²⁰¹⁵: incorrectly renders consecutive backslashes for Docutils 0.16
- #7646²⁰¹⁶: handle errors on event handlers
- #4187²⁰¹⁷: LaTeX: EN DASH disappears from PDF bookmarks in Japanese documents
- #7701²⁰¹⁸: LaTeX: Anonymous indirect hyperlink target causes duplicated labels
- #7723²⁰¹⁹: LaTeX: pdflatex crashed when URL contains a single quote
- #7756²⁰²⁰: py domain: The default value for positional only argument is not shown
- #7760²⁰²¹: coverage: Add `coverage_show_missing_items` to show coverage result to console
- C++, fix rendering and xrefs in nested names explicitly starting in global scope, e.g., `::A::B`.
- C, fix rendering and xrefs in nested names explicitly starting in global scope, e.g., `.A.B`.
- #7763²⁰²²: C and C++, don’t crash during display stringification of unary expressions and fold expressions.

²⁰⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/7685>

²⁰⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/7671>

²⁰⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/7535>

²⁰⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/7536>

²⁰⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/7781>

²⁰⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/7653>

²⁰¹⁰ <https://github.com/sphinx-doc/sphinx/issues/2785>

²⁰¹¹ <https://github.com/sphinx-doc/sphinx/issues/7718>

²⁰¹² <https://github.com/sphinx-doc/sphinx/issues/7544>

²⁰¹³ <https://github.com/sphinx-doc/sphinx/issues/7581>

²⁰¹⁴ <https://github.com/sphinx-doc/sphinx/issues/7628>

²⁰¹⁵ <https://github.com/sphinx-doc/sphinx/issues/7610>

²⁰¹⁶ <https://github.com/sphinx-doc/sphinx/issues/7646>

²⁰¹⁷ <https://github.com/sphinx-doc/sphinx/issues/4187>

²⁰¹⁸ <https://github.com/sphinx-doc/sphinx/issues/7701>

²⁰¹⁹ <https://github.com/sphinx-doc/sphinx/issues/7723>

²⁰²⁰ <https://github.com/sphinx-doc/sphinx/issues/7756>

²⁰²¹ <https://github.com/sphinx-doc/sphinx/issues/7760>

²⁰²² <https://github.com/sphinx-doc/sphinx/issues/7763>

14.71 Release 3.0.4 (released May 27, 2020)

Bugs fixed

- [#7567](#)²⁰²³: autodoc: parametrized types are shown twice for generic types
- [#7637](#)²⁰²⁴: autodoc: system defined TypeVars are shown in Python 3.9
- [#7696](#)²⁰²⁵: html: Updated jQuery version from 3.4.1 to 3.5.1 for security reasons
- [#7611](#)²⁰²⁶: md5 fails when OpenSSL FIPS is enabled
- [#7626](#)²⁰²⁷: release package does not contain CODE_OF_CONDUCT

14.72 Release 3.0.3 (released Apr 26, 2020)

Features added

- C, parse array declarators with static, qualifiers, and VLA specification.

Bugs fixed

- [#7516](#)²⁰²⁸: autodoc: crashes if target object raises an error on accessing its attributes

14.73 Release 3.0.2 (released Apr 19, 2020)

Features added

- C, parse attributes and add `c_id_attributes` and `c_paren_attributes` to support user-defined attributes.

Bugs fixed

- [#7461](#)²⁰²⁹: py domain: fails with IndexError for empty tuple in type annotation
- [#7510](#)²⁰³⁰: py domain: keyword-only arguments are documented as having a default of None
- [#7418](#)²⁰³¹: std domain: `term` role could not match case-insensitively
- [#7461](#)²⁰³²: autodoc: empty tuple in type annotation is not shown correctly
- [#7479](#)²⁰³³: autodoc: Sphinx builds has been slower since 3.0.0 on mocking

²⁰²³ <https://github.com/sphinx-doc/sphinx/issues/7567>

²⁰²⁴ <https://github.com/sphinx-doc/sphinx/issues/7637>

²⁰²⁵ <https://github.com/sphinx-doc/sphinx/issues/7696>

²⁰²⁶ <https://github.com/sphinx-doc/sphinx/issues/7611>

²⁰²⁷ <https://github.com/sphinx-doc/sphinx/issues/7626>

²⁰²⁸ <https://github.com/sphinx-doc/sphinx/issues/7516>

²⁰²⁹ <https://github.com/sphinx-doc/sphinx/issues/7461>

²⁰³⁰ <https://github.com/sphinx-doc/sphinx/issues/7510>

²⁰³¹ <https://github.com/sphinx-doc/sphinx/issues/7418>

²⁰³² <https://github.com/sphinx-doc/sphinx/issues/7461>

²⁰³³ <https://github.com/sphinx-doc/sphinx/issues/7479>

- C++, fix spacing issue in east-const declarations.
- #7414²⁰³⁴: LaTeX: Xindy language options were incorrect
- Sphinx crashes with ImportError on python3.5.1

14.74 Release 3.0.1 (released Apr 11, 2020)

Incompatible changes

- #7418²⁰³⁵: std domain: `term` role becomes case sensitive

Bugs fixed

- #7428²⁰³⁶: py domain: a reference to class `None` emits a nitpicky warning
- #7445²⁰³⁷: py domain: a return annotation `None` in the function signature is not converted to a hyperlink when using intersphinx
- #7418²⁰³⁸: std domain: duplication warning for glossary terms is case insensitive
- #7438²⁰³⁹: C++, fix merging overloaded functions in parallel builds.
- #7422²⁰⁴⁰: autodoc: fails with `ValueError` when using `autodoc_mock_imports`
- #7435²⁰⁴¹: autodoc: `autodoc_typehints='description'` doesn't suppress typehints in signature for classes/methods
- #7451²⁰⁴²: autodoc: fails with `AttributeError` when an object returns non-string object as a `__doc__` member
- #7423²⁰⁴³: crashed when giving a non-string object to logger
- #7479²⁰⁴⁴: html theme: Do not include `xmlns` attribute with HTML 5 doctype
- #7426²⁰⁴⁵: html theme: Escape some links in HTML templates

²⁰³⁴ <https://github.com/sphinx-doc/sphinx/issues/7414>

²⁰³⁵ <https://github.com/sphinx-doc/sphinx/issues/7418>

²⁰³⁶ <https://github.com/sphinx-doc/sphinx/issues/7428>

²⁰³⁷ <https://github.com/sphinx-doc/sphinx/issues/7445>

²⁰³⁸ <https://github.com/sphinx-doc/sphinx/issues/7418>

²⁰³⁹ <https://github.com/sphinx-doc/sphinx/issues/7438>

²⁰⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/7422>

²⁰⁴¹ <https://github.com/sphinx-doc/sphinx/issues/7435>

²⁰⁴² <https://github.com/sphinx-doc/sphinx/issues/7451>

²⁰⁴³ <https://github.com/sphinx-doc/sphinx/issues/7423>

²⁰⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/7479>

²⁰⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/7426>

14.75 Release 3.0.0 (released Apr 06, 2020)

Dependencies

3.0.0b1

- LaTeX: drop dependency on **extractbb** for image inclusion in Japanese documents as `.xbb` files are unneeded by **dvipdfmx** since TeXLive2015 (refs: [#6189](#)²⁰⁴⁶)
- babel-2.0 or above is available (Unpinned)

Incompatible changes

3.0.0b1

- Drop features and APIs deprecated in 1.8.x
- [#247](#)²⁰⁴⁷: `autosummary: stub` files are overwritten automatically by default. see `autosummary_generate_overwrite` to change the behavior
- [#5923](#)²⁰⁴⁸: `autodoc`: the members of `object` class are not documented by default when `:inherited-members:` and `:special-members:` are given.
- [#6830](#)²⁰⁴⁹: `py` domain: `meta` fields in `info-field-list` becomes reserved. They are not displayed on output document now
- [#6417](#)²⁰⁵⁰: `py` domain: `doctree` of `desc_parameterlist` has been changed. The argument names, annotations and default values are wrapped with inline node
- The structure of `sphinx.events.EventManager.listeners` has changed
- Due to the scoping changes for `productionlist` some uses of `token` must be modified to include the scope which was previously ignored.
- [#6903](#)²⁰⁵¹: Internal data structure of Python, reST and standard domains have changed. The `node_id` is added to the index of objects and modules. Now they contains a pair of `docname` and `node_id` for cross reference.
- [#7276](#)²⁰⁵²: `C++` domain: Non intended behavior is removed such as `say_hello_` links to `.. cpp:function:: say_hello()`
- [#7210](#)²⁰⁵³: `js` domain: Non intended behavior is removed such as `parseInt_` links to `.. js:function:: parseInt`
- [#7229](#)²⁰⁵⁴: `rst` domain: Non intended behavior is removed such as `numref_` links to `.. rst:role:: numref`
- [#6903](#)²⁰⁵⁵: `py` domain: Non intended behavior is removed such as `say_hello_` links to `.. py:function:: say_hello()`
- [#7246](#)²⁰⁵⁶: `py` domain: Drop special cross reference helper for exceptions, functions and methods

²⁰⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/6189>

²⁰⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/247>

²⁰⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/5923>

²⁰⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/6830>

²⁰⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/6417>

²⁰⁵¹ <https://github.com/sphinx-doc/sphinx/issues/6903>

²⁰⁵² <https://github.com/sphinx-doc/sphinx/issues/7276>

²⁰⁵³ <https://github.com/sphinx-doc/sphinx/issues/7210>

²⁰⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/7229>

²⁰⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/6903>

²⁰⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/7246>

- The C domain has been rewritten, with additional directives and roles. The existing ones are now more strict, resulting in new warnings.
- The attribute `sphinx_cpp_tagname` in the `desc_signature_line` node has been renamed to `sphinx_line_type`.
- #6462²⁰⁵⁷: double backslashes in domain directives are no longer replaced by single backslashes as default. A new configuration value `strip_signature_backslash` can be used by users to re-enable it.

3.0.0 final

- #7222²⁰⁵⁸: `sphinx.util.inspect.unwrap()` is renamed to `unwrap_all()`

Deprecated

3.0.0b1

- `desc_signature['first']`
- `sphinx.directives.DescDirective`
- `sphinx.domains.std.StandardDomain.add_object()`
- `sphinx.domains.python.PyDecoratorMixin`
- `sphinx.ext.autodoc.get_documenters()`
- `sphinx.ext.autosummary.process_autosummary_toc()`
- `sphinx.parsers.Parser.app`
- `sphinx.testing.path.Path.text()`
- `sphinx.testing.path.Path.bytes()`
- `sphinx.util.inspect.getargspec()`
- `sphinx.writers.latex.LaTeXWriter.format_docclass()`

Features added

3.0.0b1

- #247²⁰⁵⁹: autosummary: Add `autosummary_generate_overwrite` to overwrite old stub file
- #5923²⁰⁶⁰: autodoc: `:inherited-members:` option takes a name of ancestor class not to document inherited members of the class and uppers
- #6830²⁰⁶¹: autodoc: consider a member private if docstring contains `:meta private:` in info-field-list
- #7165²⁰⁶²: autodoc: Support Annotated type (PEP-593)
- #2815²⁰⁶³: autodoc: Support singledispatch functions and methods
- #7079²⁰⁶⁴: autodoc: `autodoc_typehints` accepts "description" configuration. It shows typehints as object description

²⁰⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/6462>

²⁰⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/7222>

²⁰⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/247>

²⁰⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/5923>

²⁰⁶¹ <https://github.com/sphinx-doc/sphinx/issues/6830>

²⁰⁶² <https://github.com/sphinx-doc/sphinx/issues/7165>

²⁰⁶³ <https://github.com/sphinx-doc/sphinx/issues/2815>

²⁰⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/7079>

- #7314²⁰⁶⁵: apidoc: Propagate `--maxdepth` option through package documents
- #6558²⁰⁶⁶: glossary: emit a warning for duplicated glossary entry
- #3106²⁰⁶⁷: domain: Register hyperlink target for index page automatically
- #6558²⁰⁶⁸: std domain: emit a warning for duplicated generic objects
- #6830²⁰⁶⁹: py domain: Add new event: *object-description-transform*
- #6895²⁰⁷⁰: py domain: Do not emit nitpicky warnings for built-in types
- py domain: Support lambda functions in function signature
- #6417²⁰⁷¹: py domain: Allow to make a style for arguments of functions and methods
- #7238²⁰⁷², #7239²⁰⁷³: py domain: Emit a warning on describing a python object if the entry is already added as the same name
- #7341²⁰⁷⁴: py domain: type annotations in signature are converted to cross refs
- Support priority of event handlers. For more detail, see *Sphinx.connect()*
- #3077²⁰⁷⁵: Implement the scoping for *productionlist* as indicated in the documentation.
- #1027²⁰⁷⁶: Support backslash line continuation in *productionlist*.
- #7108²⁰⁷⁷: config: Allow to show an error message from `conf.py` via `ConfigError`
- #7032²⁰⁷⁸: html: *html_scaled_image_link* will be disabled for images having `no-scaled-link` class
- #7144²⁰⁷⁹: Add CSS class indicating its domain for each desc node
- #7211²⁰⁸⁰: latex: Use babel for Chinese document when using XeLaTeX
- #6672²⁰⁸¹: LaTeX: Support LaTeX Theming (experimental)
- #7005²⁰⁸²: LaTeX: Add LaTeX styling macro for *kbd* role
- #7220²⁰⁸³: genindex: Show “main” index entries at first
- #7103²⁰⁸⁴: linkcheck: writes all links to `output.json`
- #7025²⁰⁸⁵: html search: full text search can be disabled for individual document using `:nosearch:` file-wide metadata

²⁰⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/7314>

²⁰⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/6558>

²⁰⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/3106>

²⁰⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/6558>

²⁰⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/6830>

²⁰⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/6895>

²⁰⁷¹ <https://github.com/sphinx-doc/sphinx/issues/6417>

²⁰⁷² <https://github.com/sphinx-doc/sphinx/issues/7238>

²⁰⁷³ <https://github.com/sphinx-doc/sphinx/issues/7239>

²⁰⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/7341>

²⁰⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/3077>

²⁰⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/1027>

²⁰⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/7108>

²⁰⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/7032>

²⁰⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/7144>

²⁰⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/7211>

²⁰⁸¹ <https://github.com/sphinx-doc/sphinx/issues/6672>

²⁰⁸² <https://github.com/sphinx-doc/sphinx/issues/7005>

²⁰⁸³ <https://github.com/sphinx-doc/sphinx/issues/7220>

²⁰⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/7103>

²⁰⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/7025>

- [#7293](#)²⁰⁸⁶: html search: Allow to override JavaScript splitter via `SearchLanguage.js_splitter_code`
- [#7142](#)²⁰⁸⁷: html theme: Add a theme option: `pygments_dark_style` to switch the style of code-blocks in dark mode
- The C domain has been rewritten adding for example:
 - Cross-referencing respecting the current scope.
 - Possible to document anonymous entities.
 - More specific directives and roles for each type of entity, e.g., handling scoping of enumerators.
 - New role `c:expr` for rendering expressions and types in text.
- Added `SphinxDirective.get_source_info()` and `SphinxRole.get_source_info()`.
- [#7324](#)²⁰⁸⁸: sphinx-build: Emit a warning if multiple files having different file extensions for same document found

3.0.0 final

- Added `ObjectDescription.transform_content()`.

Bugs fixed

3.0.0b1

- C++, fix cross reference lookup in certain cases involving function overloads.
- [#5078](#)²⁰⁸⁹: C++, fix cross reference lookup when a directive contains multiple declarations.
- C++, suppress warnings for directly dependent typenames in cross references generated automatically in signatures.
- [#5637](#)²⁰⁹⁰: autodoc: Incorrect handling of nested class names on show-inheritance
- [#7267](#)²⁰⁹¹: autodoc: error message for invalid directive options has wrong location
- [#7329](#)²⁰⁹²: autodoc: info-field-list is wrongly generated from type hints into the class description even if `autoclass_content='class'` set
- [#7331](#)²⁰⁹³: autodoc: a cython-function is not recognized as a function
- [#5637](#)²⁰⁹⁴: inheritance_diagram: Incorrect handling of nested class names
- [#7139](#)²⁰⁹⁵: code-block:: guess does not work
- [#7325](#)²⁰⁹⁶: html: source_suffix containing dot leads to wrong source link
- [#7357](#)²⁰⁹⁷: html: Resizing SVG image fails with ValueError
- [#7278](#)²⁰⁹⁸: html search: Fix use of `html_file_suffix` instead of `html_link_suffix` in search results

²⁰⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/7293>

²⁰⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/7142>

²⁰⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/7324>

²⁰⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/5078>

²⁰⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/5637>

²⁰⁹¹ <https://github.com/sphinx-doc/sphinx/issues/7267>

²⁰⁹² <https://github.com/sphinx-doc/sphinx/issues/7329>

²⁰⁹³ <https://github.com/sphinx-doc/sphinx/issues/7331>

²⁰⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/5637>

²⁰⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/7139>

²⁰⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/7325>

²⁰⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/7357>

²⁰⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/7278>

- [#7297](#)²⁰⁹⁹: html theme: bizstyle does not support sidebarwidth
- [#3842](#)²¹⁰⁰: singlehtml: Path to images broken when master doc is not in source root
- [#7179](#)²¹⁰¹: std domain: Fix whitespaces are suppressed on referring GenericObject
- [#7289](#)²¹⁰²: console: use bright colors instead of bold
- [#1539](#)²¹⁰³: C, parse array types.
- [#2377](#)²¹⁰⁴: C, parse function pointers even in complex types.
- [#7345](#)²¹⁰⁵: sphinx-build: Sphinx crashes if output directory exists as a file
- [#7290](#)²¹⁰⁶: sphinx-build: Ignore bdb.BdbQuit when handling exceptions
- [#6240](#)²¹⁰⁷: napoleon: Attributes and Methods sections ignore :noindex: option

3.0.0 final

- [#7364](#)²¹⁰⁸: autosummary: crashed when `autosummary_generate` is False
- [#7370](#)²¹⁰⁹: autosummary: raises UnboundLocalError when unknown module given
- [#7367](#)²¹¹⁰: C++, alternate operator spellings are now supported.
- C, alternate operator spellings are now supported.
- [#7368](#)²¹¹¹: C++, comma operator in expressions, pack expansion in template argument lists, and more comprehensive error messages in some cases.
- C, C++, fix crash and wrong duplicate warnings related to anon symbols.
- [#6477](#)²¹¹²: Escape first “!” in a cross reference linking no longer possible
- [#7219](#)²¹¹³: py domain: The index entry generated by `py:function` directive is different with one from `index` directive with “builtin” type
- [#7301](#)²¹¹⁴: capital characters are not allowed for `node_id`
- [#7301](#)²¹¹⁵: epub: duplicated `node_ids` are generated
- [#6564](#)²¹¹⁶: html: a width of table was ignored on HTML builder
- [#7401](#)²¹¹⁷: Incorrect argument is passed for `env-get-outdated` handlers
- [#7355](#)²¹¹⁸: autodoc: a signature of cython-function is not recognized well

²⁰⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/7297>

²¹⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/3842>

²¹⁰¹ <https://github.com/sphinx-doc/sphinx/issues/7179>

²¹⁰² <https://github.com/sphinx-doc/sphinx/issues/7289>

²¹⁰³ <https://github.com/sphinx-doc/sphinx/issues/1539>

²¹⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/2377>

²¹⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/7345>

²¹⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/7290>

²¹⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/6240>

²¹⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/7364>

²¹⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/7370>

²¹¹⁰ <https://github.com/sphinx-doc/sphinx/issues/7367>

²¹¹¹ <https://github.com/sphinx-doc/sphinx/issues/7368>

²¹¹² <https://github.com/sphinx-doc/sphinx/issues/6477>

²¹¹³ <https://github.com/sphinx-doc/sphinx/issues/7219>

²¹¹⁴ <https://github.com/sphinx-doc/sphinx/issues/7301>

²¹¹⁵ <https://github.com/sphinx-doc/sphinx/issues/7301>

²¹¹⁶ <https://github.com/sphinx-doc/sphinx/issues/6564>

²¹¹⁷ <https://github.com/sphinx-doc/sphinx/issues/7401>

²¹¹⁸ <https://github.com/sphinx-doc/sphinx/issues/7355>

- #7222²¹¹⁹: autodoc: `__wrapped__` functions are not documented correctly
- #7409²¹²⁰: intersphinx: `ValueError` is raised when an extension sets up `intersphinx_mapping` on `config-inited` event
- #7343²¹²¹: Sphinx builds has been slower since 2.4.0 on debug mode

14.76 Release 2.4.5 (released Nov 18, 2021)

Dependencies

- #9807²¹²²: Restrict Docutils to 0.17.x or older

14.77 Release 2.4.4 (released Mar 05, 2020)

Bugs fixed

- #7197²¹²³: LaTeX: platex cause error to build image directive with target url
- #7223²¹²⁴: Sphinx builds has been slower since 2.4.0

14.78 Release 2.4.3 (released Feb 22, 2020)

Bugs fixed

- #7184²¹²⁵: autodoc: `*args` and `**kwargs` in type comments are not handled properly
- #7189²¹²⁶: autodoc: classmethod coroutines are not detected
- #7183²¹²⁷: intersphinx: `:attr:` reference to property is broken
- #6244²¹²⁸, #6387²¹²⁹: html search: Search breaks/hangs when built with dirhtml builder
- #7195²¹³⁰: todo: emit doctree-resolved event with non-document node incorrectly

²¹¹⁹ <https://github.com/sphinx-doc/sphinx/issues/7222>

²¹²⁰ <https://github.com/sphinx-doc/sphinx/issues/7409>

²¹²¹ <https://github.com/sphinx-doc/sphinx/issues/7343>

²¹²² <https://github.com/sphinx-doc/sphinx/issues/9807>

²¹²³ <https://github.com/sphinx-doc/sphinx/issues/7197>

²¹²⁴ <https://github.com/sphinx-doc/sphinx/issues/7223>

²¹²⁵ <https://github.com/sphinx-doc/sphinx/issues/7184>

²¹²⁶ <https://github.com/sphinx-doc/sphinx/issues/7189>

²¹²⁷ <https://github.com/sphinx-doc/sphinx/issues/7183>

²¹²⁸ <https://github.com/sphinx-doc/sphinx/issues/6244>

²¹²⁹ <https://github.com/sphinx-doc/sphinx/issues/6387>

²¹³⁰ <https://github.com/sphinx-doc/sphinx/issues/7195>

14.79 Release 2.4.2 (released Feb 19, 2020)

Bugs fixed

- [#7138](#)²¹³¹: autodoc: autodoc.typehints crashed when variable has unbound object as a value
- [#7156](#)²¹³²: autodoc: separator for keyword only arguments is not shown
- [#7146](#)²¹³³: autodoc: IndexError is raised on suppressed type_comment found
- [#7161](#)²¹³⁴: autodoc: typehints extension does not support parallel build
- [#7178](#)²¹³⁵: autodoc: TypeError is raised on fetching type annotations
- [#7151](#)²¹³⁶: crashed when extension assigns a value to env.indexentries
- [#7170](#)²¹³⁷: text: Remove debug print
- [#7137](#)²¹³⁸: viewcode: Avoid to crash when non-python code given

14.80 Release 2.4.1 (released Feb 11, 2020)

Bugs fixed

- [#7120](#)²¹³⁹: html: crashed when on scaling SVG images which have float dimensions
- [#7126](#)²¹⁴⁰: autodoc: TypeError: 'getset_descriptor' object is not iterable

14.81 Release 2.4.0 (released Feb 09, 2020)

Deprecated

- The decode argument of sphinx.pycode.ModuleAnalyzer()
- sphinx.directives.other.Index
- sphinx.environment.temp_data['gloss_entries']
- sphinx.environment.BuildEnvironment.indexentries
- sphinx.environment.collectors.indexentries.IndexEntriesCollector
- sphinx.ext.apidoc.INITPY
- sphinx.ext.apidoc.shall_skip()
- sphinx.io.FiletypeNotFoundError

²¹³¹ <https://github.com/sphinx-doc/sphinx/issues/7138>

²¹³² <https://github.com/sphinx-doc/sphinx/issues/7156>

²¹³³ <https://github.com/sphinx-doc/sphinx/issues/7146>

²¹³⁴ <https://github.com/sphinx-doc/sphinx/issues/7161>

²¹³⁵ <https://github.com/sphinx-doc/sphinx/issues/7178>

²¹³⁶ <https://github.com/sphinx-doc/sphinx/issues/7151>

²¹³⁷ <https://github.com/sphinx-doc/sphinx/issues/7170>

²¹³⁸ <https://github.com/sphinx-doc/sphinx/issues/7137>

²¹³⁹ <https://github.com/sphinx-doc/sphinx/issues/7120>

²¹⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/7126>

- `sphinx.io.get_filetype()`
- `sphinx.pycode.ModuleAnalyzer.encoding`
- `sphinx.roles.Index`
- `sphinx.util.detect_encoding()`
- `sphinx.util.get_module_source()`
- `sphinx.util.inspect.Signature`
- `sphinx.util.inspect.safe_getmembers()`
- `sphinx.writers.latex.LaTeXTranslator.settings.author`
- `sphinx.writers.latex.LaTeXTranslator.settings.contentsname`
- `sphinx.writers.latex.LaTeXTranslator.settings.docclass`
- `sphinx.writers.latex.LaTeXTranslator.settings.docname`
- `sphinx.writers.latex.LaTeXTranslator.settings.title`
- `sphinx.writers.latex.ADDITIONAL_SETTINGS`
- `sphinx.writers.latex.DEFAULT_SETTINGS`
- `sphinx.writers.latex.LUALATEX_DEFAULT_FONTPKG`
- `sphinx.writers.latex.PDFLATEX_DEFAULT_FONTPKG`
- `sphinx.writers.latex.XELATEX_DEFAULT_FONTPKG`
- `sphinx.writers.latex.XELATEX_GREEK_DEFAULT_FONTPKG`

Features added

- #6910²¹⁴¹: `inheritance_diagram`: Make the background of diagrams transparent
- #6446²¹⁴²: `duration`: Add `sphinx.ext.durations` to inspect which documents slow down the build
- #6837²¹⁴³: LaTeX: Support a nested table
- #7115²¹⁴⁴: LaTeX: Allow to override `LATEXOPTS` and `LATEXMKOPTS` via environment variable
- #6966²¹⁴⁵: `graphviz`: Support `:class:` option
- #6696²¹⁴⁶: `html`: `:scale:` option of `image/figure` directive not working for SVG images (`imagesize-1.2.0` or above is required)
- #6994²¹⁴⁷: `imgconverter`: Support illustrator file (`.ai`) to `.png` conversion
- `autodoc`: Support Positional-Only Argument separator (PEP-570 compliant)
- `autodoc`: Support type annotations for variables
- #2755²¹⁴⁸: `autodoc`: Add new event: *`autodoc-before-process-signature`*

²¹⁴¹ <https://github.com/sphinx-doc/sphinx/issues/6910>

²¹⁴² <https://github.com/sphinx-doc/sphinx/issues/6446>

²¹⁴³ <https://github.com/sphinx-doc/sphinx/issues/6837>

²¹⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/7115>

²¹⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/6966>

²¹⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/6696>

²¹⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/6994>

²¹⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/2755>

- [#2755](#)²¹⁴⁹: autodoc: Support type_comment style (ex. `# type: (str) -> str`) annotation (python3.8+ or `typed_ast`²¹⁵⁰ is required)
- [#7051](#)²¹⁵¹: autodoc: Support instance variables without defaults (PEP-526)
- [#6418](#)²¹⁵²: autodoc: Add a new extension `sphinx.ext.autodoc.typehints`. It shows typehints as object description if `autodoc_typehints = "description"` set. This is an experimental extension and it will be integrated into autodoc core in Sphinx 3.0
- SphinxTranslator now calls visitor/departure method for super node class if visitor/departure method for original node class not found
- [#6418](#)²¹⁵³: Add new event: *object-description-transform*
- py domain: *py:data* and *py:attribute* take new options named `:type:` and `:value:` to describe its type and initial value
- [#6785](#)²¹⁵⁴: py domain: `:py:attr:` is able to refer properties again
- [#6772](#)²¹⁵⁵: apidoc: Add `-q` option for quiet mode

Bugs fixed

- [#6925](#)²¹⁵⁶: html: Remove redundant `type="text/javascript"` from `<script>` elements
- [#7112](#)²¹⁵⁷: html: SVG image is not layouted as float even if aligned
- [#6906](#)²¹⁵⁸, [#6907](#)²¹⁵⁹: autodoc: failed to read the source codes encoded in cp1251
- [#6961](#)²¹⁶⁰: latex: warning for babel shown twice
- [#7059](#)²¹⁶¹: latex: LaTeX compilation falls into infinite loop (wrapfig issue)
- [#6581](#)²¹⁶²: latex: `:reversed:` option for toctree does not effect to LaTeX build
- [#6559](#)²¹⁶³: Wrong node-ids are generated in glossary directive
- [#6986](#)²¹⁶⁴: apidoc: misdetects module name for `.so` file inside module
- [#6899](#)²¹⁶⁵: apidoc: private members are not shown even if `--private` given
- [#6327](#)²¹⁶⁶: apidoc: Support a python package consisted of `__init__.so` file
- [#6999](#)²¹⁶⁷: napoleon: fails to parse tilde in `:exc:` role

²¹⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/2755>

²¹⁵⁰ https://github.com/python/typed_ast

²¹⁵¹ <https://github.com/sphinx-doc/sphinx/issues/7051>

²¹⁵² <https://github.com/sphinx-doc/sphinx/issues/6418>

²¹⁵³ <https://github.com/sphinx-doc/sphinx/issues/6418>

²¹⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/6785>

²¹⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/6772>

²¹⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/6925>

²¹⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/7112>

²¹⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/6906>

²¹⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/6907>

²¹⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/6961>

²¹⁶¹ <https://github.com/sphinx-doc/sphinx/issues/7059>

²¹⁶² <https://github.com/sphinx-doc/sphinx/issues/6581>

²¹⁶³ <https://github.com/sphinx-doc/sphinx/issues/6559>

²¹⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/6986>

²¹⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/6899>

²¹⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/6327>

²¹⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/6999>

- [#7019](#)²¹⁶⁸: gettext: Absolute path used in message catalogs
- [#7023](#)²¹⁶⁹: autodoc: nested partial functions are not listed
- [#7023](#)²¹⁷⁰: autodoc: partial functions imported from other modules are listed as module members without `:imported-members`: option
- [#6889](#)²¹⁷¹: autodoc: Trailing comma in `:members::` option causes cryptic warning
- [#6568](#)²¹⁷²: autosummary: `autosummary_imported_members` is ignored on generating a stub file for submodule
- [#7055](#)²¹⁷³: linkcheck: redirect is treated as an error
- [#7088](#)²¹⁷⁴: HTML template: If `navigation_with_keys` option is activated, modifier keys are ignored, which means the feature can interfere with browser features
- [#7090](#)²¹⁷⁵: std domain: Can't assign numfig-numbers for custom container nodes
- [#7106](#)²¹⁷⁶: std domain: enumerated nodes are marked as duplicated when extensions call `note_explicit_target()`
- [#7095](#)²¹⁷⁷: dirhtml: Cross references are broken via intersphinx and `:doc:` role
- C++:
 - Don't crash when using the `struct` role in some cases.
 - Don't warn when using the `var/member` role for function parameters.
 - Render call and braced-init expressions correctly.
- [#7097](#)²¹⁷⁸: Filenames of images generated by `sphinx.transforms.post_transforms.images.ImageConverter` or its subclasses (used for latex build) are now sanitized, to prevent broken paths

14.82 Release 2.3.1 (released Dec 22, 2019)

Bugs fixed

- [#6936](#)²¹⁷⁹: sphinx-autogen: raises `AttributeError`

²¹⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/7019>

²¹⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/7023>

²¹⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/7023>

²¹⁷¹ <https://github.com/sphinx-doc/sphinx/issues/6889>

²¹⁷² <https://github.com/sphinx-doc/sphinx/issues/6568>

²¹⁷³ <https://github.com/sphinx-doc/sphinx/issues/7055>

²¹⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/7088>

²¹⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/7090>

²¹⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/7106>

²¹⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/7095>

²¹⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/7097>

²¹⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/6936>

14.83 Release 2.3.0 (released Dec 15, 2019)

Incompatible changes

- #6742²¹⁸⁰: end-before option of *literalinclude* directive does not match the first line of the code block.
- #1331²¹⁸¹: Change default User-Agent header to "Sphinx/X.Y.Z requests/X.Y.Z python/X.Y.Z". It can be changed via *user_agent*.
- #6867²¹⁸²: text: content of admonitions starts after a blank line

Deprecated

- `sphinx.builders.gettext.POHEADER`
- `sphinx.io.SphinxStandaloneReader.app`
- `sphinx.io.SphinxStandaloneReader.env`
- `sphinx.util.texescape.tex_escape_map`
- `sphinx.util.texescape.tex_hl_escape_map_new`
- `sphinx.writers.latex.LaTeXTranslator.no_contractions`

Features added

- #6707²¹⁸³: C++, support bit-fields.
- #267²¹⁸⁴: html: Eliminate prompt characters of doctest block from copyable text
- #6548²¹⁸⁵: html: Use favicon for OpenSearch if available
- #6729²¹⁸⁶: html theme: agogo theme now supports *rightsidebar* option
- #6780²¹⁸⁷: Add PEP-561 Support
- #6762²¹⁸⁸: latex: Allow to load additional LaTeX packages via *extrapackages* key of *latex_elements*
- #1331²¹⁸⁹: Add new config variable: *user_agent*
- #6000²¹⁹⁰: LaTeX: have backslash also be an inline literal word wrap break character
- #4186²¹⁹¹: LaTeX: Support upLaTeX as a new *latex_engine* (experimental)
- #6812²¹⁹²: Improve a warning message when extensions are not parallel safe
- #6818²¹⁹³: Improve Intersphinx performance for multiple remote inventories.

²¹⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/6742>

²¹⁸¹ <https://github.com/sphinx-doc/sphinx/issues/1331>

²¹⁸² <https://github.com/sphinx-doc/sphinx/issues/6867>

²¹⁸³ <https://github.com/sphinx-doc/sphinx/issues/6707>

²¹⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/267>

²¹⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/6548>

²¹⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/6729>

²¹⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/6780>

²¹⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/6762>

²¹⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/1331>

²¹⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/6000>

²¹⁹¹ <https://github.com/sphinx-doc/sphinx/issues/4186>

²¹⁹² <https://github.com/sphinx-doc/sphinx/issues/6812>

²¹⁹³ <https://github.com/sphinx-doc/sphinx/issues/6818>

- #2546²¹⁹⁴: apidoc: .so file support
- #6798²¹⁹⁵: autosummary: emit autodoc-skip-member event on generating stub file
- #6483²¹⁹⁶: i18n: make explicit titles in toctree translatable
- #6816²¹⁹⁷: linkcheck: Add `linkcheck_auth` option to provide authentication information when doing linkcheck builds
- #6872²¹⁹⁸: linkcheck: Handles HTTP 308 Permanent Redirect
- #6613²¹⁹⁹: html: Wrap section number in span tag
- #6781²²⁰⁰: gettext: Add `gettext_last_translator` and `gettext_language_team` to customize headers of POT file

Bugs fixed

- #6668²²⁰¹: LaTeX: Longtable before header has incorrect distance (refs: [latex3/latex2e`#173 <https://github.com/sphinx-doc/sphinx/issues/173>`_`²²⁰²\)](https://github.com/sphinx-doc/sphinx/issues/173)
- #6618²²⁰³: LaTeX: Avoid section names at the end of a page
- #6738²²⁰⁴: LaTeX: Do not replace unicode characters by LaTeX macros on unicode supported LaTeX engines: ℓ, §, €, ∞, ±, →, →, −, superscript and subscript digits go through “as is” (as default OpenType font supports them)
- #6704²²⁰⁵: linkcheck: Be defensive and handle newly defined HTTP error code
- #6806²²⁰⁶: linkcheck: Failure on parsing content
- #6655²²⁰⁷: image URLs containing data: causes gettext builder crashed
- #6584²²⁰⁸: i18n: Error when compiling message catalogs on Hindi
- #6718²²⁰⁹: i18n: KeyError is raised if section title and table title are same
- #6743²²¹⁰: i18n: `rst_prolog` breaks the translation
- #6708²²¹¹: mathbase: Some deprecated functions have removed
- #6709²²¹²: autodoc: mock object does not work as a class decorator
- #5070²²¹³: epub: Wrong internal href fragment links

²¹⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/2546>

²¹⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/6798>

²¹⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/6483>

²¹⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/6816>

²¹⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/6872>

²¹⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/6613>

²²⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/6781>

²²⁰¹ <https://github.com/sphinx-doc/sphinx/issues/6668>

²²⁰² <https://github.com/latex3/latex2e/issues/173>

²²⁰³ <https://github.com/sphinx-doc/sphinx/issues/6618>

²²⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/6738>

²²⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/6704>

²²⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/6806>

²²⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/6655>

²²⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/6584>

²²⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/6718>

²²¹⁰ <https://github.com/sphinx-doc/sphinx/issues/6743>

²²¹¹ <https://github.com/sphinx-doc/sphinx/issues/6708>

²²¹² <https://github.com/sphinx-doc/sphinx/issues/6709>

²²¹³ <https://github.com/sphinx-doc/sphinx/issues/5070>

- #6712²²¹⁴: Allow not to install sphinx.testing as runtime (mainly for ALT Linux)
- #6741²²¹⁵: html: search result was broken with empty `html_file_suffix`
- #6001²²¹⁶: LaTeX does not wrap long code lines at backslash character
- #6804²²¹⁷: LaTeX: PDF build breaks if admonition of danger type contains code-block long enough not to fit on one page
- #6809²²¹⁸: LaTeX: code-block in a danger type admonition can easily spill over bottom of page
- #6793²²¹⁹: texinfo: Code examples broken following “sidebar”
- #6813²²²⁰: An orphan warning is emitted for included document on Windows. Thanks to @drillan
- #6850²²²¹: Fix smartypants module calls re.sub() with wrong options
- #6824²²²²: HTML search: If a search term is partially matched in the title and fully matched in a text paragraph on the same page, the search does not include this match.
- #6848²²²³: config.py shouldn't pop extensions from overrides
- #6867²²²⁴: text: extra spaces are inserted to hyphenated words on folding lines
- #6886²²²⁵: LaTeX: xelatex converts straight double quotes into right curly ones (shows when `smartquotes` is `False`)
- #6890²²²⁶: LaTeX: even with smartquotes off, PDF output transforms straight quotes and consecutive hyphens into curly quotes and dashes
- #6876²²²⁷: LaTeX: multi-line display of authors on title page has ragged edges
- #6887²²²⁸: Sphinx crashes with Docutils 0.16b0
- #6920²²²⁹: sphinx-build: A console message is wrongly highlighted
- #6900²²³⁰: sphinx-build: -D option does not considers 0 and 1 as a boolean value

²²¹⁴ <https://github.com/sphinx-doc/sphinx/issues/6712>

²²¹⁵ <https://github.com/sphinx-doc/sphinx/issues/6741>

²²¹⁶ <https://github.com/sphinx-doc/sphinx/issues/6001>

²²¹⁷ <https://github.com/sphinx-doc/sphinx/issues/6804>

²²¹⁸ <https://github.com/sphinx-doc/sphinx/issues/6809>

²²¹⁹ <https://github.com/sphinx-doc/sphinx/issues/6793>

²²²⁰ <https://github.com/sphinx-doc/sphinx/issues/6813>

²²²¹ <https://github.com/sphinx-doc/sphinx/issues/6850>

²²²² <https://github.com/sphinx-doc/sphinx/issues/6824>

²²²³ <https://github.com/sphinx-doc/sphinx/issues/6848>

²²²⁴ <https://github.com/sphinx-doc/sphinx/issues/6867>

²²²⁵ <https://github.com/sphinx-doc/sphinx/issues/6886>

²²²⁶ <https://github.com/sphinx-doc/sphinx/issues/6890>

²²²⁷ <https://github.com/sphinx-doc/sphinx/issues/6876>

²²²⁸ <https://github.com/sphinx-doc/sphinx/issues/6887>

²²²⁹ <https://github.com/sphinx-doc/sphinx/issues/6920>

²²³⁰ <https://github.com/sphinx-doc/sphinx/issues/6900>

14.84 Release 2.2.2 (released Dec 03, 2019)

Incompatible changes

- [#6803](#)²²³¹: For security reason of python, parallel mode is disabled on macOS and Python3.8+

Bugs fixed

- [#6776](#)²²³²: LaTeX: 2019-10-01 LaTeX release breaks `sphinxcyrillic.sty`
- [#6815](#)²²³³: i18n: French, Hindi, Chinese, Japanese and Korean translation messages has been broken
- [#6803](#)²²³⁴: parallel build causes `AttributeError` on macOS and Python3.8

14.85 Release 2.2.1 (released Oct 26, 2019)

Bugs fixed

- [#6641](#)²²³⁵: LaTeX: Undefined control sequence `\sphinxmaketitle`
- [#6710](#)²²³⁶: LaTeX not well configured for Greek language as main language
- [#6759](#)²²³⁷: validation of html static paths and extra paths no longer throws an error if the paths are in different directories

14.86 Release 2.2.0 (released Aug 19, 2019)

Incompatible changes

- apidoc: template files are renamed to `.rst_t`
- html: Field lists will be styled by grid layout

Deprecated

- `sphinx.domains.math.MathDomain.add_equation()`
- `sphinx.domains.math.MathDomain.get_next_equation_number()`
- The `info` and `warn` arguments of `sphinx.ext.autosummary.generate.generate_autosummary_docs()`
- `sphinx.ext.autosummary.generate._simple_info()`
- `sphinx.ext.autosummary.generate._simple_warn()`
- `sphinx.ext.todo.merge_info()`

²²³¹ <https://github.com/sphinx-doc/sphinx/issues/6803>

²²³² <https://github.com/sphinx-doc/sphinx/issues/6776>

²²³³ <https://github.com/sphinx-doc/sphinx/issues/6815>

²²³⁴ <https://github.com/sphinx-doc/sphinx/issues/6803>

²²³⁵ <https://github.com/sphinx-doc/sphinx/issues/6641>

²²³⁶ <https://github.com/sphinx-doc/sphinx/issues/6710>

²²³⁷ <https://github.com/sphinx-doc/sphinx/issues/6759>

- `sphinx.ext.todo.process_todo_nodes()`
- `sphinx.ext.todo.process_todos()`
- `sphinx.ext.todo.purge_todos()`

Features added

- #5124²²³⁸: graphviz: `:graphviz_dot:` option is renamed to `:layout:`
- #1464²²³⁹: html: emit a warning if `html_static_path` and `html_extra_path` directories are inside output directory
- #6514²²⁴⁰: html: Add a label to search input for accessibility purposes
- #5602²²⁴¹: apidoc: Add `--templatedir` option
- #6475²²⁴²: Add override argument to `app.add_autodocumenter()`
- #6310²²⁴³: imgmath: let `imgmath_use_preview` work also with the SVG format for images rendering inline math
- #6533²²⁴⁴: LaTeX: refactor `visit_enumerated_list()` to use `\sphinxsetlistlabels`
- #6628²²⁴⁵: quickstart: Use `https://docs.python.org/3/` for default setting of `intersphinx_mapping`
- #6419²²⁴⁶: sphinx-build: give reasons why rebuilt

Bugs fixed

- py domain: duplicated warning does not point the location of source code
- #6499²²⁴⁷: html: Sphinx never updates a copy of `html_logo` even if original file has changed
- #1125²²⁴⁸: html theme: scrollbar is hard to see on classic theme and macOS
- #5502²²⁴⁹: linkcheck: Consider HTTP 503 response as not an error
- #6439²²⁵⁰: Make generated download links reproducible
- #6486²²⁵¹: UnboundLocalError is raised if broken extension installed
- #6567²²⁵²: autodoc: `autodoc_inherit_docstrings` does not effect to `__init__()` and `__new__()`
- #6574²²⁵³: autodoc: `autodoc_member_order` does not refer order of imports when 'bysource' order
- #6574²²⁵⁴: autodoc: missing type annotation for variadic and keyword parameters

²²³⁸ <https://github.com/sphinx-doc/sphinx/issues/5124>

²²³⁹ <https://github.com/sphinx-doc/sphinx/issues/1464>

²²⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/6514>

²²⁴¹ <https://github.com/sphinx-doc/sphinx/issues/5602>

²²⁴² <https://github.com/sphinx-doc/sphinx/issues/6475>

²²⁴³ <https://github.com/sphinx-doc/sphinx/issues/6310>

²²⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/6533>

²²⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/6628>

²²⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/6419>

²²⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/6499>

²²⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/1125>

²²⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/5502>

²²⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/6439>

²²⁵¹ <https://github.com/sphinx-doc/sphinx/issues/6486>

²²⁵² <https://github.com/sphinx-doc/sphinx/issues/6567>

²²⁵³ <https://github.com/sphinx-doc/sphinx/issues/6574>

²²⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/6574>

- [#6589²²⁵⁵](#): autodoc: Formatting issues with `autodoc_typehints='none'`
- [#6605²²⁵⁶](#): autodoc: crashed when target code contains custom method-like objects
- [#6498²²⁵⁷](#): autosummary: crashed with wrong `autosummary_generate` setting
- [#6507²²⁵⁸](#): autosummary: crashes without `no_autosummary_generate` setting
- [#6511²²⁵⁹](#): LaTeX: autonumbered list can not be customized in LaTeX since Sphinx 1.8.0 (refs: [#6533²²⁶⁰](#))
- [#6531²²⁶¹](#): Failed to load last environment object when extension added
- [#736²²⁶²](#): Invalid sort in pair index
- [#6527²²⁶³](#): `last_updated` wrongly assumes timezone as UTC
- [#5592²²⁶⁴](#): std domain: `option` directive registers an index entry for each comma separated option
- [#6549²²⁶⁵](#): sphinx-build: Escaped characters in error messages
- [#6545²²⁶⁶](#): doctest comments not getting trimmed since Sphinx 1.8.0
- [#6561²²⁶⁷](#): glossary: Wrong hyperlinks are generated for non alphanumeric terms
- [#6620²²⁶⁸](#): i18n: classifiers of definition list are not translated with Docutils 0.15
- [#6474²²⁶⁹](#): DocFieldTransformer raises `AttributeError` when given directive is not a subclass of `ObjectDescription`

14.87 Release 2.1.2 (released Jun 19, 2019)

Bugs fixed

- [#6497²²⁷⁰](#): custom lexers fails highlighting when syntax error
- [#6478²²⁷¹](#), [#6488²²⁷²](#): info field lists are incorrectly recognized

²²⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/6589>

²²⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/6605>

²²⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/6498>

²²⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/6507>

²²⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/6511>

²²⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/6533>

²²⁶¹ <https://github.com/sphinx-doc/sphinx/issues/6531>

²²⁶² <https://github.com/sphinx-doc/sphinx/issues/736>

²²⁶³ <https://github.com/sphinx-doc/sphinx/issues/6527>

²²⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/5592>

²²⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/6549>

²²⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/6545>

²²⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/6561>

²²⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/6620>

²²⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/6474>

²²⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/6497>

²²⁷¹ <https://github.com/sphinx-doc/sphinx/issues/6478>

²²⁷² <https://github.com/sphinx-doc/sphinx/issues/6488>

14.88 Release 2.1.1 (released Jun 10, 2019)

Incompatible changes

- [#6447](#)²²⁷³: autodoc: Stop to generate document for undocumented module variables

Bugs fixed

- [#6442](#)²²⁷⁴: LaTeX: admonitions of *note* type can get separated from immediately preceding section title by pagebreak
- [#6448](#)²²⁷⁵: autodoc: crashed when aut documenting classes with `__slots__ = None`
- [#6451](#)²²⁷⁶: autodoc: generates docs for “optional import”ed modules as variables
- [#6452](#)²²⁷⁷: autosummary: crashed when generating document of properties
- [#6455](#)²²⁷⁸: napoleon: docstrings for properties are not processed
- [#6436](#)²²⁷⁹: napoleon: “Unknown target name” error if variable name ends with underscore
- [#6440](#)²²⁸⁰: apidoc: missing blank lines between modules

14.89 Release 2.1.0 (released Jun 02, 2019)

Incompatible changes

- Ignore filenames without file extension given to `Builder.build_specific()` API directly
- [#6230](#)²²⁸¹: The anchor of term in glossary directive is changed if it is consisted by non-ASCII characters
- [#4550](#)²²⁸²: html: Centering tables by default using CSS
- [#6239](#)²²⁸³: latex: xelatex and xeCJK are used for Chinese documents by default
- `Sphinx.add_lexer()` now takes a Lexer class instead of instance. An instance of lexers are still supported until Sphinx 3.x.

²²⁷³ <https://github.com/sphinx-doc/sphinx/issues/6447>

²²⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/6442>

²²⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/6448>

²²⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/6451>

²²⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/6452>

²²⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/6455>

²²⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/6436>

²²⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/6440>

²²⁸¹ <https://github.com/sphinx-doc/sphinx/issues/6230>

²²⁸² <https://github.com/sphinx-doc/sphinx/issues/4550>

²²⁸³ <https://github.com/sphinx-doc/sphinx/issues/6239>

Deprecated

- `sphinx.builders.latex.LaTeXBuilder.apply_transforms()`
- `sphinx.builders._epub_base.EpubBuilder.esc()`
- `sphinx.directives.Acks`
- `sphinx.directives.Author`
- `sphinx.directives.Centered`
- `sphinx.directives.Class`
- `sphinx.directives.CodeBlock`
- `sphinx.directives.Figure`
- `sphinx.directives.HList`
- `sphinx.directives.Highlight`
- `sphinx.directives.Include`
- `sphinx.directives.Index`
- `sphinx.directives.LiteralInclude`
- `sphinx.directives.Meta`
- `sphinx.directives.Only`
- `sphinx.directives.SeeAlso`
- `sphinx.directives.TabularColumns`
- `sphinx.directives.TocTree`
- `sphinx.directives.VersionChange`
- `sphinx.domains.python.PyClassmember`
- `sphinx.domains.python.PyModulelevel`
- `sphinx.domains.std.StandardDomain._resolve_citation_xref()`
- `sphinx.domains.std.StandardDomain.note_citations()`
- `sphinx.domains.std.StandardDomain.note_citation_refs()`
- `sphinx.domains.std.StandardDomain.note_labels()`
- `sphinx.environment.NoUri`
- `sphinx.ext.apidoc.format_directive()`
- `sphinx.ext.apidoc.format_heading()`
- `sphinx.ext.apidoc.makename()`
- `sphinx.ext.autodoc.importer.MockFinder`
- `sphinx.ext.autodoc.importer.MockLoader`
- `sphinx.ext.autodoc.importer.mock()`
- `sphinx.ext.autosummary.autolink_role()`
- `sphinx.ext.imgmath.DOC_BODY`
- `sphinx.ext.imgmath.DOC_BODY_PREVIEW`

- `sphinx.ext.imgmath.DOC_HEAD`
- `sphinx.transforms.CitationReferences`
- `sphinx.transforms.SmartQuotesSkipper`
- `sphinx.util.docfields.DocFieldTransformer.preprocess_fielddtypes()`
- `sphinx.util.node.find_source_node()`
- `sphinx.util.i18n.find_catalog()`
- `sphinx.util.i18n.find_catalog_files()`
- `sphinx.util.i18n.find_catalog_source_files()`

For more details, see *deprecation APIs list*.

Features added

- Add a helper class `sphinx.transforms.post_transforms.SphinxPostTransform`
- Add helper methods
 - `PythonDomain.note_module()`
 - `PythonDomain.note_object()`
 - `SphinxDirective.set_source_info()`
- [#6180](#)²²⁸⁴: Support `--keep-going` with `BuildDoc` setup command
- `math` directive now supports `:class:` option
- `todo`: `todo` directive now supports `:name:` option
- Enable override via environment of `SPHINXOPTS` and `SPHINXBUILD` Makefile variables (refs: [#6232](#)²²⁸⁵, [#6303](#)²²⁸⁶)
- [#6287](#)²²⁸⁷: autodoc: Unable to document bound instance methods exported as module functions
- [#6289](#)²²⁸⁸: autodoc: `autodoc_default_options` now supports `imported-members` option
- [#4777](#)²²⁸⁹: autodoc: Support coroutine
- [#744](#)²²⁹⁰: autodoc: Support `abstractmethod`
- [#6325](#)²²⁹¹: autodoc: Support attributes in `__slots__`. For dict-style `__slots__`, autodoc considers values as a docstring of the attribute
- [#6361](#)²²⁹²: autodoc: Add `autodoc_typehints` to suppress typehints from signature
- [#1063](#)²²⁹³: autodoc: `automodule` directive now handles undocumented module level variables

²²⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/6180>

²²⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/6232>

²²⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/6303>

²²⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/6287>

²²⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/6289>

²²⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/4777>

²²⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/744>

²²⁹¹ <https://github.com/sphinx-doc/sphinx/issues/6325>

²²⁹² <https://github.com/sphinx-doc/sphinx/issues/6361>

²²⁹³ <https://github.com/sphinx-doc/sphinx/issues/1063>

- #6212²²⁹⁴ autosummary: Add `autosummary_imported_members` to display imported members on autosummary
- #6271²²⁹⁵: `make clean` is catastrophically broken if building into ‘.’
- #6363²²⁹⁶: Support %0% environment variable in `make.bat`
- #4777²²⁹⁷: `py` domain: Add `:async:` option to `py:function` directive
- `py` domain: Add new options to `py:method` directive
 - `:abstractmethod:`
 - `:async:`
 - `:classmethod:`
 - `:property:`
 - `:staticmethod:`
- `rst` domain: Add `rst:directive:option` directive to describe the option for directive
- #6306²²⁹⁸: `html`: Add a label to search form for accessibility purposes
- #4390²²⁹⁹: `html`: Consistent and semantic CSS for signatures
- #6358²³⁰⁰: The `rawsource` property of `production` nodes now contains the full production rule
- #6373²³⁰¹: `autosectionlabel`: Allow suppression of warnings
- `coverage`: Support a new `coverage_ignore_pyobjects` option
- #6239²³⁰²: `latex`: Support to build Chinese documents

Bugs fixed

- #6230²³⁰³: Inappropriate `node_id` has been generated by `glossary` directive if term is consisted by non-ASCII characters
- #6213²³⁰⁴: `ifconfig`: contents after headings are not shown
- commented term in `glossary` directive is wrongly recognized
- #6299²³⁰⁵: `rst` domain: `rst:directive` directive generates waste space
- #6379²³⁰⁶: `py` domain: Module index (`py-modindex.html`) has duplicate titles
- #6331²³⁰⁷: `man`: invalid output when `doctest` follows rubric
- #6351²³⁰⁸: “Hyperlink target is not referenced” message is shown even if referenced

²²⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/6212>

²²⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/6271>

²²⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/6363>

²²⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/4777>

²²⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/6306>

²²⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/4390>

²³⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/6358>

²³⁰¹ <https://github.com/sphinx-doc/sphinx/issues/6373>

²³⁰² <https://github.com/sphinx-doc/sphinx/issues/6239>

²³⁰³ <https://github.com/sphinx-doc/sphinx/issues/6230>

²³⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/6213>

²³⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/6299>

²³⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/6379>

²³⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/6331>

²³⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/6351>

- [#6165²³⁰⁹](#): autodoc: `tab_width` setting of Docutils has been ignored
- [#6347²³¹⁰](#): autodoc: crashes with a plain Tuple on Python 3.6 and 3.5
- [#6311²³¹¹](#): autosummary: autosummary table gets confused by complex type hints
- [#6350²³¹²](#): autosummary: confused by an argument having some kind of default value
- Generated Makefiles lack a final EOL (refs: [#6232²³¹³](#))
- [#6375²³¹⁴](#): extlinks: Cannot escape angle brackets in link caption
- [#6378²³¹⁵](#): linkcheck: Send commonly used User-Agent
- [#6387²³¹⁶](#): html search: failed to search document with haiku and scrolls themes
- [#6408²³¹⁷](#): html search: Fix the ranking of search results
- [#6406²³¹⁸](#): Wrong year is returned for `SOURCE_DATE_EPOCH`
- [#6402²³¹⁹](#): image directive crashes by unknown image format
- [#6286²³²⁰](#): C++, allow 8 and 9 in hexadecimal integer literals.
- [#6305²³²¹](#): Fix the string in quickstart for ‘path’ argument of parser
- LaTeX: Figures in admonitions produced errors (refs: [#6364²³²²](#))

14.90 Release 2.0.1 (released Apr 08, 2019)

Bugs fixed

- LaTeX: some system labels are not translated
- `RemovedInSphinx30Warning` is marked as pending
- deprecation warnings are not emitted
 - `sphinx.application.CONFIG_FILENAME`
 - `sphinx.builders.htmlhelp`
 - `viewcode_import`
- [#6208²³²³](#): C++, properly parse full xrefs that happen to have a short xref as prefix
- [#6220²³²⁴](#), [#6225²³²⁵](#): napoleon: `AttributeError` is raised for raised section having references

²³⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/6165>

²³¹⁰ <https://github.com/sphinx-doc/sphinx/issues/6347>

²³¹¹ <https://github.com/sphinx-doc/sphinx/issues/6311>

²³¹² <https://github.com/sphinx-doc/sphinx/issues/6350>

²³¹³ <https://github.com/sphinx-doc/sphinx/issues/6232>

²³¹⁴ <https://github.com/sphinx-doc/sphinx/issues/6375>

²³¹⁵ <https://github.com/sphinx-doc/sphinx/issues/6378>

²³¹⁶ <https://github.com/sphinx-doc/sphinx/issues/6387>

²³¹⁷ <https://github.com/sphinx-doc/sphinx/issues/6408>

²³¹⁸ <https://github.com/sphinx-doc/sphinx/issues/6406>

²³¹⁹ <https://github.com/sphinx-doc/sphinx/issues/6402>

²³²⁰ <https://github.com/sphinx-doc/sphinx/issues/6286>

²³²¹ <https://github.com/sphinx-doc/sphinx/issues/6305>

²³²² <https://github.com/sphinx-doc/sphinx/issues/6364>

²³²³ <https://github.com/sphinx-doc/sphinx/issues/6208>

²³²⁴ <https://github.com/sphinx-doc/sphinx/issues/6220>

²³²⁵ <https://github.com/sphinx-doc/sphinx/issues/6225>

- #6245²³²⁶: circular import error on importing SerializingHTMLBuilder
- #6243²³²⁷: LaTeX: 'releasename' setting for latex_elements is ignored
- #6244²³²⁸: html: Search function is broken with 3rd party themes
- #6263²³²⁹: html: HTML5Translator crashed with invalid field node
- #6262²³³⁰: html theme: The style of field lists has changed in bizstyle theme

14.91 Release 2.0.0 (released Mar 29, 2019)

Dependencies

2.0.0b1

- LaTeX builder now depends on TeX Live 2015 or above.
- LaTeX builder (with 'pdflatex' *latex_engine*) will process Unicode Greek letters in text (not in math mark-up) via the text font and will not escape them to math mark-up. See the discussion of the 'fontenc' key of *latex_elements*; such (optional) support for Greek adds, for example on Ubuntu xenial, the `texlive-lang-greek` and (if default font set-up is not modified) `cm-super(-minimal)` as additional Sphinx LaTeX requirements.
- LaTeX builder with *latex_engine* set to 'xelatex' or to 'lualatex' requires (by default) the FreeFont fonts, which in Ubuntu xenial are provided by package `fonts-freefont-otf`, and e.g. in Fedora 29 via package `texlive-gnu-freefont`.
- requests 2.5.0 or above
- The six package is no longer a dependency
- The sphinxcontrib-websupport package is no longer a dependency
- Some packages are separated to sub packages:
 - sphinxcontrib.applehelp
 - sphinxcontrib.devhelp
 - sphinxcontrib.htmlhelp
 - sphinxcontrib.jsmath
 - sphinxcontrib.serializinghtml
 - sphinxcontrib.qthelp

²³²⁶ <https://github.com/sphinx-doc/sphinx/issues/6245>

²³²⁷ <https://github.com/sphinx-doc/sphinx/issues/6243>

²³²⁸ <https://github.com/sphinx-doc/sphinx/issues/6244>

²³²⁹ <https://github.com/sphinx-doc/sphinx/issues/6263>

²³³⁰ <https://github.com/sphinx-doc/sphinx/issues/6262>

Incompatible changes

2.0.0b1

- Drop python 2.7 and 3.4 support
- Drop Docutils 0.11 support
- Drop features and APIs deprecated in 1.7.x
- The default setting for `master_doc` is changed to 'index' which has been longly used as default of sphinx-quickstart.
- LaTeX: Move message resources to `sphinxmessage.sty`
- LaTeX: Stop using `\captions<lang>` macro for some labels
- LaTeX: for 'xelatex' and 'lualatex', use the FreeFont OpenType fonts as default choice (refs: [#5645](#)²³³¹)
- LaTeX: 'xelatex' and 'lualatex' now use `\small` in code-blocks (due to FreeMono character width) like 'pdfflatex' already did (due to Courier character width). You may need to adjust this via `latex_elements` 'fvset' key, in case of usage of some other OpenType fonts (refs: [#5768](#)²³³²)
- LaTeX: Greek letters in text are not escaped to math mode mark-up, and they will use the text font not the math font. The LGR font encoding must be added to the 'fontenc' key of `latex_elements` for this to work (only if it is needed by the document, of course).
- LaTeX: setting the `language` to 'en' triggered Sonny option of `fncychap`, now it is Bjarne to match case of no language specified. (refs: [#5772](#)²³³³)
- [#5770](#)²³³⁴: doctest: Follow `highlight_language` on highlighting doctest block. As a result, they are highlighted as python3 by default.
- The order of argument for `HTMLTranslator`, `HTML5Translator` and `ManualPageTranslator` are changed
- LaTeX: hard-coded redefinitions of `\l@section` and `\l@subsection` formerly done during loading of 'manual' docclass get executed later, at time of `\sphinxtableofcontents`. This means that custom user definitions from LaTeX preamble now get overwritten. Use `\sphinxtableofcontentshook` to insert custom user definitions. See [Macros](#).
- quickstart: Simplify generated `conf.py`
- [#4148](#)²³³⁵: quickstart: some questions are removed. They are still able to specify via command line options
- websupport: unbundled from Sphinx core. Please use `sphinxcontrib-websupport`
- C++, the visibility of base classes is now always rendered as present in the input. That is, `private` is now shown, where it was ellided before.
- LaTeX: graphics inclusion of oversized images rescales to not exceed the text width and height, even if width and/or height option were used. (refs: [#5956](#)²³³⁶)
- epub: `epub_title` defaults to the `project` option
- [#4550](#)²³³⁷: All tables and figures without `align` option are displayed to center
- [#4587](#)²³³⁸: html: Output HTML5 by default

²³³¹ <https://github.com/sphinx-doc/sphinx/issues/5645>

²³³² <https://github.com/sphinx-doc/sphinx/issues/5768>

²³³³ <https://github.com/sphinx-doc/sphinx/issues/5772>

²³³⁴ <https://github.com/sphinx-doc/sphinx/issues/5770>

²³³⁵ <https://github.com/sphinx-doc/sphinx/issues/4148>

²³³⁶ <https://github.com/sphinx-doc/sphinx/issues/5956>

²³³⁷ <https://github.com/sphinx-doc/sphinx/issues/4550>

²³³⁸ <https://github.com/sphinx-doc/sphinx/issues/4587>

2.0.0b2

- texinfo: image files are copied into name-figure directory

Deprecated

2.0.0b1

- Support for evaluating Python 2 syntax is deprecated. This includes configuration files which should be converted to Python 3.
- The arguments of `EpubBuilder.build_mimetype()`, `EpubBuilder.build_container()`, `EpubBuilder.build_content()`, `EpubBuilder.build_toc()` and `EpubBuilder.build_epub()`
- The arguments of `Epub3Builder.build_navigation_doc()`
- The config variables
 - `html_experimental_html5_writer`
- The encoding argument of `autodoc.Documenter.get_doc()`, `autodoc.DocstringSignatureMixin.get_doc()`, `autodoc.DocstringSignatureMixin._find_signature()`, and `autodoc.ClassDocumenter.get_doc()` are deprecated.
- The importer argument of `sphinx.ext.autodoc.importer._MockModule`
- The nodetype argument of `sphinx.search.WordCollector.is_meta_keywords()`
- The suffix argument of `env.doc2path()` is deprecated.
- The string style base argument of `env.doc2path()` is deprecated.
- The fallback to allow omitting the filename argument from an overridden `IndexBuilder.feed()` method is deprecated.
- `sphinx.addnodes.abbreviation`
- `sphinx.application.Sphinx._setting_up_extension`
- `sphinx.builders.epub3.Epub3Builder.validate_config_value()`
- `sphinx.builders.html.SingleFileHTMLBuilder`
- `sphinx.builders.htmlhelp.HTMLHelpBuilder.open_file()`
- `sphinx.cmd.quickstart.term_decode()`
- `sphinx.cmd.quickstart.TERM_ENCODING`
- `sphinx.config.check_unicode()`
- `sphinx.config.string_classes`
- `sphinx.domains.cpp.DefinitionError.description`
- `sphinx.domains.cpp.NoOldIdError.description`
- `sphinx.domains.cpp.UnsupportedMultiCharacterCharLiteral.decoded`
- `sphinx.ext.autodoc.importer._MockImporter`
- `sphinx.ext.autosummary.Autosummary.warn()`
- `sphinx.ext.autosummary.Autosummary.genopt`
- `sphinx.ext.autosummary.Autosummary.warnings`
- `sphinx.ext.autosummary.Autosummary.result`

- `sphinx.ext.doctest.doctest_encode()`
- `sphinx.io.SphinxBaseFileInput`
- `sphinx.io.SphinxFileInput.supported`
- `sphinx.io.SphinxRSTFileInput`
- `sphinx.registry.SphinxComponentRegistry.add_source_input()`
- `sphinx.roles.abbr_role()`
- `sphinx.roles.emph_literal_role()`
- `sphinx.roles.menu sel_role()`
- `sphinx.roles.index_role()`
- `sphinx.roles.indexmarkup_role()`
- `sphinx.testing.util.remove_unicode_literal()`
- `sphinx.util.attrdict`
- `sphinx.util.force_decode()`
- `sphinx.util.get_matching_docs()`
- `sphinx.util.inspect.Parameter`
- `sphinx.util.jsonimpl`
- `sphinx.util.osutil.EEXIST`
- `sphinx.util.osutil.EINVAL`
- `sphinx.util.osutil.ENOENT`
- `sphinx.util.osutil.EPIPE`
- `sphinx.util.osutil.walk()`
- `sphinx.util.PeekableIterator`
- `sphinx.util.pycompat.NoneType`
- `sphinx.util.pycompat.TextIOWrapper`
- `sphinx.util.pycompat.UnicodeMixin`
- `sphinx.util.pycompat.htmlescape`
- `sphinx.util.pycompat.indent`
- `sphinx.util.pycompat.sys_encoding`
- `sphinx.util.pycompat.terminal_safe()`
- `sphinx.util.pycompat.u`
- `sphinx.writers.latex.ExtBabel`
- `sphinx.writers.latex.LaTeXTranslator._make_visit_admonition()`
- `sphinx.writers.latex.LaTeXTranslator.babel_defmacro()`
- `sphinx.writers.latex.LaTeXTranslator.collect_footnotes()`
- `sphinx.writers.latex.LaTeXTranslator.generate_numfig_format()`
- `sphinx.writers.texinfo.TexinfoTranslator._make_visit_admonition()`

- `sphinx.writers.text.TextTranslator._make_depart_admonition()`
- template variables for LaTeX template
 - `logo`
 - `numfig_format`
 - `pageautorefname`
 - `translatablestrings`

For more details, see *deprecation APIs list*.

Features added

2.0.0b1

- #1618²³³⁹: The search results preview of generated HTML documentation is reader-friendlier: instead of showing the snippets as raw reStructuredText markup, Sphinx now renders the corresponding HTML. This means the Sphinx extension `Sphinx: pretty search results`²³⁴⁰ is no longer necessary. Note that changes to the search function of your custom or 3rd-party HTML template might overwrite this improvement.
- #4182²³⁴¹: autodoc: Support `suppress_warnings`
- #5533²³⁴²: autodoc: `autodoc_default_options` supports `member-order`
- #5394²³⁴³: autodoc: Display readable names in type annotations for mocked objects
- #5459²³⁴⁴: autodoc: `autodoc_default_options` accepts `True` as a value
- #1148²³⁴⁵: autodoc: Add `autodecorator` directive for decorators
- #5635²³⁴⁶: autosummary: Add `autosummary_mock_imports` to mock external libraries on importing targets
- #4018²³⁴⁷: htmlhelp: Add `htmlhelp_file_suffix` and `htmlhelp_link_suffix`
- #5559²³⁴⁸: text: Support complex tables (colspan and rowspan)
- LaTeX: support rendering (not in math, yet) of Greek and Cyrillic Unicode letters in non-Cyrillic document even with 'pdflatex' as `latex_engine` (refs: #5645²³⁴⁹)
- #5660²³⁵⁰: The `versionadded`, `versionchanged` and `deprecated` directives are now generated with their own specific CSS classes (`added`, `changed` and `deprecated`, respectively) in addition to the generic `versionmodified` class.
- #5841²³⁵¹: apidoc: Add `-extensions` option to `sphinx-apidoc`
- #4981²³⁵²: C++, added an alias directive for inserting lists of declarations, that references existing declarations (e.g., for making a synopsis).

²³³⁹ <https://github.com/sphinx-doc/sphinx/issues/1618>

²³⁴⁰ <https://github.com/sphinx-contrib/sphinx-pretty-searchresults>

²³⁴¹ <https://github.com/sphinx-doc/sphinx/issues/4182>

²³⁴² <https://github.com/sphinx-doc/sphinx/issues/5533>

²³⁴³ <https://github.com/sphinx-doc/sphinx/issues/5394>

²³⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/5459>

²³⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/1148>

²³⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/5635>

²³⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/4018>

²³⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/5559>

²³⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/5645>

²³⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/5660>

²³⁵¹ <https://github.com/sphinx-doc/sphinx/issues/5841>

²³⁵² <https://github.com/sphinx-doc/sphinx/issues/4981>

- C++: add `cpp:struct` to complement `cpp:class`.
- #1341²³⁵³ the HTML search considers words that contain a search term of length three or longer a match.
- #4611²³⁵⁴: epub: Show warning for duplicated ToC entries
- #1851²³⁵⁵: Allow to omit an argument for `code-block` directive. If omitted, it follows `highlight` or `highlight_language`
- #4587²³⁵⁶: html: Add `html4_writer` to use old HTML4 writer
- #6016²³⁵⁷: HTML search: A placeholder for the search summary prevents search result links from changing their position when the search terminates. This makes navigating search results easier.
- #5196²³⁵⁸: linkcheck also checks remote images exist
- #5924²³⁵⁹: githubpages: create CNAME file for custom domains when `html_baseurl` set
- #4261²³⁶⁰: autosectionlabel: restrict the labeled sections by new config value; `autosectionlabel_maxdepth`

Bugs fixed

2.0.0b1

- #1682²³⁶¹: LaTeX: writer should not translate Greek unicode, but use `textgreek` package
- #5247²³⁶²: LaTeX: PDF does not build with default font config for Russian language and 'xelatex' or 'lualatex' as `latex_engine` (refs: #5251²³⁶³)
- #5248²³⁶⁴: LaTeX: Greek letters in section titles disappear from PDF bookmarks
- #5249²³⁶⁵: LaTeX: Unicode Greek letters in math directive break PDF build (fix requires extra set-up, see `latex_elements` 'textgreek' key and/or `latex_engine` setting)
- #5772²³⁶⁶: LaTeX: should the Bjarne style of `fncychap` be used for English also if passed as language option?
- #5179²³⁶⁷: LaTeX: (lualatex only) escaping of `>` by `\textgreater{}` is not enough as `\textgreater{}`\textgreater{} applies TeX-ligature
- LaTeX: project name is not escaped if `latex_documents` omitted
- LaTeX: authors are not shown if `latex_documents` omitted
- HTML: Invalid HTML5 file is generated for a glossary having multiple terms for one description (refs: #4611²³⁶⁸)
- QtHelp: OS dependent path separator is used in .qhp file
- HTML search: search always returns nothing when multiple search terms are used and one term is shorter than three characters

²³⁵³ <https://github.com/sphinx-doc/sphinx/issues/1341>

²³⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/4611>

²³⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/1851>

²³⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/4587>

²³⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/6016>

²³⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/5196>

²³⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/5924>

²³⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/4261>

²³⁶¹ <https://github.com/sphinx-doc/sphinx/issues/1682>

²³⁶² <https://github.com/sphinx-doc/sphinx/issues/5247>

²³⁶³ <https://github.com/sphinx-doc/sphinx/issues/5251>

²³⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/5248>

²³⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/5249>

²³⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/5772>

²³⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/5179>

²³⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/4611>

2.0.0b2

- [#6096²³⁶⁹](#): html: Anchor links are not added to figures
- [#3620²³⁷⁰](#): html: Defer searchindex.js rather than loading it via ajax
- [#6113²³⁷¹](#): html: Table cells and list items have large margins
- [#5508²³⁷²](#): linenothreshold option for highlight directive was ignored
- texinfo: make install-info causes syntax error
- texinfo: make install-info fails on macOS
- [#3079²³⁷³](#): texinfo: image files are not copied on make install-info
- [#5391²³⁷⁴](#): A cross reference in heading is rendered as literal
- [#5946²³⁷⁵](#): C++, fix cpp:alias problems in LaTeX (and singlehtml)
- [#6147²³⁷⁶](#): classes attribute of citation_reference node is lost
- AssertionError is raised when custom citation_reference node having classes attribute refers missing citation (refs: [#6147²³⁷⁷](#))
- [#2155²³⁷⁸](#): Support code directive
- C++, fix parsing of braced initializers.
- [#6172²³⁷⁹](#): AttributeError is raised for old styled index nodes
- [#4872²³⁸⁰](#): inheritance_diagram: correctly describe behavior of parts option in docs, allow negative values.
- [#6178²³⁸¹](#): i18n: Captions missing in translations for hidden TOCs

2.0.0 final

- [#6196²³⁸²](#): py domain: unexpected prefix is generated

Testing

2.0.0b1

- Stop to use SPHINX_TEST_TEMPDIR envvar

2.0.0b2

- Add a helper function: `sphinx.testing.restructuredtext.parse()`

²³⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/6096>

²³⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/3620>

²³⁷¹ <https://github.com/sphinx-doc/sphinx/issues/6113>

²³⁷² <https://github.com/sphinx-doc/sphinx/issues/5508>

²³⁷³ <https://github.com/sphinx-doc/sphinx/issues/3079>

²³⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/5391>

²³⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/5946>

²³⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/6147>

²³⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/6147>

²³⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/2155>

²³⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/6172>

²³⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/4872>

²³⁸¹ <https://github.com/sphinx-doc/sphinx/issues/6178>

²³⁸² <https://github.com/sphinx-doc/sphinx/issues/6196>

14.92 Release 1.8.6 (released Nov 18, 2021)

Dependencies

- [#9807](#)²³⁸³: Restrict Docutils to 0.17.x or older

14.93 Release 1.8.5 (released Mar 10, 2019)

Bugs fixed

- LaTeX: Remove extraneous space after author names on PDF title page (refs: [#6004](#)²³⁸⁴)
- [#6026](#)²³⁸⁵: LaTeX: A cross reference to definition list does not work
- [#6046](#)²³⁸⁶: LaTeX: `TypeError` is raised when invalid `latex_elements` given
- [#6067](#)²³⁸⁷: LaTeX: images having a target are concatenated to next line
- [#6067](#)²³⁸⁸: LaTeX: images having a target are not aligned even if specified
- [#6149](#)²³⁸⁹: LaTeX: `:index:` role in titles causes Use of `\@icentercr` doesn't match its definition error on `latexpdf` build
- [#6019](#)²³⁹⁰: `imgconverter`: Including multipage PDF fails
- [#6047](#)²³⁹¹: `autodoc`: `autofunction` emits a warning for method objects
- [#6028](#)²³⁹²: `graphviz`: Ensure the `graphviz` filenames are reproducible
- [#6068](#)²³⁹³: `doctest`: `skipif` option may remove the code block from documentation
- [#6136](#)²³⁹⁴: `:name:` option for `math` directive causes a crash
- [#6139](#)²³⁹⁵: `intersphinx`: `ValueError` on failure reporting
- [#6135](#)²³⁹⁶: `changes`: Fix `UnboundLocalError` when any module found
- [#3859](#)²³⁹⁷: `manpage`: code-block captions are not displayed correctly

²³⁸³ <https://github.com/sphinx-doc/sphinx/issues/9807>

²³⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/6004>

²³⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/6026>

²³⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/6046>

²³⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/6067>

²³⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/6067>

²³⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/6149>

²³⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/6019>

²³⁹¹ <https://github.com/sphinx-doc/sphinx/issues/6047>

²³⁹² <https://github.com/sphinx-doc/sphinx/issues/6028>

²³⁹³ <https://github.com/sphinx-doc/sphinx/issues/6068>

²³⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/6136>

²³⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/6139>

²³⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/6135>

²³⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/3859>

14.94 Release 1.8.4 (released Feb 03, 2019)

Bugs fixed

- [#3707](#)²³⁹⁸: latex: no bold checkmark (✓) available.
- [#5605](#)²³⁹⁹: with the documentation language set to Chinese, English words could not be searched.
- [#5889](#)²⁴⁰⁰: LaTeX: user `numfig_format` is stripped of spaces and may cause build failure
- C++, fix hyperlinks for declarations involving `cv-qualifiers`.
- [#5755](#)²⁴⁰¹: C++, fix duplicate declaration error on function templates with constraints in the return type.
- C++, parse unary right fold expressions and binary fold expressions.
- pycode could not handle egg files on windows
- [#5928](#)²⁴⁰²: KeyError: 'DOCUTILSCONFIG' when running build
- [#5936](#)²⁴⁰³: LaTeX: PDF build broken by inclusion of image taller than page height in an admonition
- [#5231](#)²⁴⁰⁴: "make html" does not read and build "po" files in "locale" dir
- [#5954](#)²⁴⁰⁵: `:scale:` image option may break PDF build if image in an admonition
- [#5966](#)²⁴⁰⁶: mathjax has not been loaded on incremental build
- [#5960](#)²⁴⁰⁷: LaTeX: modified PDF layout since September 2018 TeXLive update of `parskip.sty`
- [#5948](#)²⁴⁰⁸: LaTeX: duplicated labels are generated for sections
- [#5958](#)²⁴⁰⁹: `versionadded` directive causes crash with Python 3.5.0
- [#5995](#)²⁴¹⁰: autodoc: `autodoc_mock_imports` conflict with metaclass on Python 3.7
- [#5871](#)²⁴¹¹: texinfo: a section title `.` is not allowed

14.95 Release 1.8.3 (released Dec 26, 2018)

Features added

- LaTeX: it is possible to insert custom material to appear on back of title page, see discussion of `'maketitle'` key of `latex_elements` (`'manual'` docclass only)

²³⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/3707>

²³⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/5605>

²⁴⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/5889>

²⁴⁰¹ <https://github.com/sphinx-doc/sphinx/issues/5755>

²⁴⁰² <https://github.com/sphinx-doc/sphinx/issues/5928>

²⁴⁰³ <https://github.com/sphinx-doc/sphinx/issues/5936>

²⁴⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/5231>

²⁴⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/5954>

²⁴⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/5966>

²⁴⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/5960>

²⁴⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/5948>

²⁴⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/5958>

²⁴¹⁰ <https://github.com/sphinx-doc/sphinx/issues/5995>

²⁴¹¹ <https://github.com/sphinx-doc/sphinx/issues/5871>

Bugs fixed

- [#5725](#)²⁴¹²: mathjax: Use CDN URL for “latest” version by default
- [#5460](#)²⁴¹³: html search does not work with some 3rd party themes
- [#5520](#)²⁴¹⁴: LaTeX, caption package incompatibility since Sphinx 1.6
- [#5614](#)²⁴¹⁵: autodoc: incremental build is broken when builtin modules are imported
- [#5627](#)²⁴¹⁶: qthelp: index.html missing in QtHelp
- [#5659](#)²⁴¹⁷: linkcheck: crashes for a hyperlink containing multibyte character
- [#5754](#)²⁴¹⁸: DOC: Fix some mistakes in *LaTeX customization*
- [#5810](#)²⁴¹⁹: LaTeX: sphinxVerbatim requires explicit “hllines” set-up since 1.6.6 (refs: [#1238](#)²⁴²⁰)
- [#5636](#)²⁴²¹: C++, fix parsing of floating point literals.
- [#5496](#)²⁴²² (again): C++, fix assertion in partial builds with duplicates.
- [#5724](#)²⁴²³: quickstart: sphinx-quickstart fails when \$LC_ALL is empty
- [#1956](#)²⁴²⁴: Default conf.py is not PEP8-compliant
- [#5849](#)²⁴²⁵: LaTeX: document class \maketitle is overwritten with no possibility to use original meaning in place of Sphinx custom one
- [#5834](#)²⁴²⁶: apidoc: wrong help for --tocfile
- [#5800](#)²⁴²⁷: todo: crashed if todo is defined in TextElement
- [#5846](#)²⁴²⁸: htmlhelp: convert hex escaping to decimal escaping in .hhc/.hhk files
- htmlhelp: broken .hhk file generated when title contains a double quote

²⁴¹² <https://github.com/sphinx-doc/sphinx/issues/5725>

²⁴¹³ <https://github.com/sphinx-doc/sphinx/issues/5460>

²⁴¹⁴ <https://github.com/sphinx-doc/sphinx/issues/5520>

²⁴¹⁵ <https://github.com/sphinx-doc/sphinx/issues/5614>

²⁴¹⁶ <https://github.com/sphinx-doc/sphinx/issues/5627>

²⁴¹⁷ <https://github.com/sphinx-doc/sphinx/issues/5659>

²⁴¹⁸ <https://github.com/sphinx-doc/sphinx/issues/5754>

²⁴¹⁹ <https://github.com/sphinx-doc/sphinx/issues/5810>

²⁴²⁰ <https://github.com/sphinx-doc/sphinx/issues/1238>

²⁴²¹ <https://github.com/sphinx-doc/sphinx/issues/5636>

²⁴²² <https://github.com/sphinx-doc/sphinx/issues/5496>

²⁴²³ <https://github.com/sphinx-doc/sphinx/issues/5724>

²⁴²⁴ <https://github.com/sphinx-doc/sphinx/issues/1956>

²⁴²⁵ <https://github.com/sphinx-doc/sphinx/issues/5849>

²⁴²⁶ <https://github.com/sphinx-doc/sphinx/issues/5834>

²⁴²⁷ <https://github.com/sphinx-doc/sphinx/issues/5800>

²⁴²⁸ <https://github.com/sphinx-doc/sphinx/issues/5846>

14.96 Release 1.8.2 (released Nov 11, 2018)

Incompatible changes

- [#5497](#)²⁴²⁹: Do not include MathJax.js and jsmath.js unless it is really needed

Features added

- [#5471](#)²⁴³⁰: Show appropriate deprecation warnings

Bugs fixed

- [#5490](#)²⁴³¹: latex: enumerated list causes a crash with recommonmark
- [#5492](#)²⁴³²: sphinx-build fails to build docs w/ Python < 3.5.2
- [#3704](#)²⁴³³: latex: wrong \label positioning for figures with a legend
- [#5496](#)²⁴³⁴: C++, fix assertion when a symbol is declared more than twice.
- [#5493](#)²⁴³⁵: gettext: crashed with broken template
- [#5495](#)²⁴³⁶: csv-table directive with file option in included file is broken (refs: [#4821](#)²⁴³⁷)
- [#5498](#)²⁴³⁸: autodoc: unable to find type hints for a `functools.partial`
- [#5480](#)²⁴³⁹: autodoc: unable to find type hints for unresolvable Forward references
- [#5419](#)²⁴⁴⁰: incompatible math_block node has been generated
- [#5548](#)²⁴⁴¹: Fix `ensuredir()` in case of pre-existing file
- [#5549](#)²⁴⁴²: graphviz Correctly deal with non-existing static dir
- [#3002](#)²⁴⁴³: i18n: multiple footnote_references referring same footnote cause duplicated node_ids
- [#5563](#)²⁴⁴⁴: latex: footnote_references generated by extension causes a LaTeX builder crash
- [#5561](#)²⁴⁴⁵: make all-pdf fails with old xindy version
- [#5557](#)²⁴⁴⁶: quickstart: `--no-batchfile` isn't honored

²⁴²⁹ <https://github.com/sphinx-doc/sphinx/issues/5497>

²⁴³⁰ <https://github.com/sphinx-doc/sphinx/issues/5471>

²⁴³¹ <https://github.com/sphinx-doc/sphinx/issues/5490>

²⁴³² <https://github.com/sphinx-doc/sphinx/issues/5492>

²⁴³³ <https://github.com/sphinx-doc/sphinx/issues/3704>

²⁴³⁴ <https://github.com/sphinx-doc/sphinx/issues/5496>

²⁴³⁵ <https://github.com/sphinx-doc/sphinx/issues/5493>

²⁴³⁶ <https://github.com/sphinx-doc/sphinx/issues/5495>

²⁴³⁷ <https://github.com/sphinx-doc/sphinx/issues/4821>

²⁴³⁸ <https://github.com/sphinx-doc/sphinx/issues/5498>

²⁴³⁹ <https://github.com/sphinx-doc/sphinx/issues/5480>

²⁴⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/5419>

²⁴⁴¹ <https://github.com/sphinx-doc/sphinx/issues/5548>

²⁴⁴² <https://github.com/sphinx-doc/sphinx/issues/5549>

²⁴⁴³ <https://github.com/sphinx-doc/sphinx/issues/3002>

²⁴⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/5563>

²⁴⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/5561>

²⁴⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/5557>

- [#3080²⁴⁴⁷](#): texinfo: multiline rubrics are broken
- [#3080²⁴⁴⁸](#): texinfo: multiline citations are broken

14.97 Release 1.8.1 (released Sep 22, 2018)

Incompatible changes

- LaTeX `\pagestyle` commands have been moved to the LaTeX template. No changes in PDF, except possibly if `\sphinxtableofcontents`, which contained them, had been customized in `conf.py`. (refs: [#5455²⁴⁴⁹](#))

Bugs fixed

- [#5418²⁴⁵⁰](#): Incorrect default path for sphinx-build -d/doctrees files
- [#5421²⁴⁵¹](#): autodoc emits deprecation warning for `autodoc_default_flags`
- [#5422²⁴⁵²](#): lambda object causes PicklingError on storing environment
- [#5417²⁴⁵³](#): Sphinx fails to build with syntax error in Python 2.7.5
- [#4911²⁴⁵⁴](#): add latexpdf to make.bat for non make-mode
- [#5436²⁴⁵⁵](#): Autodoc does not work with enum subclasses with properties/methods
- [#5437²⁴⁵⁶](#): autodoc: crashed on modules importing eggs
- [#5433²⁴⁵⁷](#): latex: ImportError: cannot import name 'DEFAULT_SETTINGS'
- [#5431²⁴⁵⁸](#): autodoc: `autofunction` emits a warning for callable objects
- [#5457²⁴⁵⁹](#): Fix TypeError in error message when override is prohibited
- [#5453²⁴⁶⁰](#): PDF builds of 'howto' documents have no page numbers
- [#5463²⁴⁶¹](#): mathbase: `math_role` and `MathDirective` was disappeared in 1.8.0
- [#5454²⁴⁶²](#): latex: Index has disappeared from PDF for Japanese documents
- [#5432²⁴⁶³](#): py domain: `:type:` field can't process `:term:` references
- [#5426²⁴⁶⁴](#): py domain: TypeError has been raised for class attribute

²⁴⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/3080>

²⁴⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/3080>

²⁴⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/5455>

²⁴⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/5418>

²⁴⁵¹ <https://github.com/sphinx-doc/sphinx/issues/5421>

²⁴⁵² <https://github.com/sphinx-doc/sphinx/issues/5422>

²⁴⁵³ <https://github.com/sphinx-doc/sphinx/issues/5417>

²⁴⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/4911>

²⁴⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/5436>

²⁴⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/5437>

²⁴⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/5433>

²⁴⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/5431>

²⁴⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/5457>

²⁴⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/5453>

²⁴⁶¹ <https://github.com/sphinx-doc/sphinx/issues/5463>

²⁴⁶² <https://github.com/sphinx-doc/sphinx/issues/5454>

²⁴⁶³ <https://github.com/sphinx-doc/sphinx/issues/5432>

²⁴⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/5426>

14.98 Release 1.8.0 (released Sep 13, 2018)

Dependencies

1.8.0b1

- LaTeX: `latex_use_xindy`, if True (default for xelatex/lualatex), instructs `make latexpdf` to use **xindy** for general index. Make sure your LaTeX distribution includes it. (refs: #5134²⁴⁶⁵)
- LaTeX: `latexmk` is required for `make latexpdf` on Windows

Incompatible changes

1.8.0b2

- #5282²⁴⁶⁶: html theme: refer `pygments_style` settings of HTML themes preferentially
- The URL of download files are changed
- #5127²⁴⁶⁷: quickstart: `Makefile` and `make.bat` are not overwritten if exists

1.8.0b1

- #5156²⁴⁶⁸: the `sphinx.ext.graphviz` extension runs `dot` in the directory of the document being built instead of in the root directory of the documentation.
- #4460²⁴⁶⁹: extensions which stores any data to environment should return the version of its env data structure as metadata. In detail, please see *Extension metadata*.
- Sphinx expects source parser modules to have supported file formats as `Parser.supported` attribute
- The default value of `epub_author` and `epub_publisher` are changed from 'unknown' to the value of `author`. This is same as a `conf.py` file `sphinx-build` generates.
- The `gettext_compact` attribute is removed from `document.settings` object. Please use `config.gettext_compact` instead.
- The processing order on reading phase is changed. `smart_quotes`, `sphinx domains`, `doctree-read` event and versioning doctrees are invoked earlier than so far. For more details, please read a description of `Sphinx.add_transform()`
- #4827²⁴⁷⁰: All `substitution_definition` nodes are removed from doctree on reading phase
- `docutils.conf` in `$HOME` or `/etc` directories are ignored. Only `docutils.conf` from `confdir` is obeyed.
- #789²⁴⁷¹: `:samp:` role supports to escape curly braces with backslash
- #4811²⁴⁷²: The files under `html_static_path` are excluded from source files.
- latex: Use `\sphinxcite` for citation references instead `\hyperref`
- The config value `viewcode_import` is renamed to `viewcode_follow_imported_members` (refs: #4035²⁴⁷³)

²⁴⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/5134>

²⁴⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/5282>

²⁴⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/5127>

²⁴⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/5156>

²⁴⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/4460>

²⁴⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/4827>

²⁴⁷¹ <https://github.com/sphinx-doc/sphinx/issues/789>

²⁴⁷² <https://github.com/sphinx-doc/sphinx/issues/4811>

²⁴⁷³ <https://github.com/sphinx-doc/sphinx/issues/4035>

- [#1857²⁴⁷⁴](#): latex: `latex_show_pagerefs` does not add pagerefs for citations
- [#4648²⁴⁷⁵](#): latex: Now “rubric” elements are rendered as unnumbered section title
- [#4983²⁴⁷⁶](#): html: The anchor for productionlist tokens has been changed
- Modifying a template variable `script_files` in templates is allowed now. Please use `app.add_js_file()` instead.
- [#5072²⁴⁷⁷](#): Save environment object also with only new documents
- [#5035²⁴⁷⁸](#): qthelp builder allows dashes in `qthelp_namespace`
- LaTeX: with lualatex or xelatex use by default **xindy** as UTF-8 able replacement of **makeindex** (refs: [#5134²⁴⁷⁹](#)). After upgrading Sphinx, please clean latex build repertory of existing project before new build.
- [#5163²⁴⁸⁰](#): html: hlist items are now aligned to top
- `highlightlang` directive is processed on resolving phase
- [#4000²⁴⁸¹](#): LaTeX: template changed. Following elements moved to it:
 - `\begin{document}`
 - `shorthandoff` variable
 - `maketitle` variable
 - `tableofcontents` variable

Deprecated

1.8.0b2

- `sphinx.io.SphinxI18nReader.set_lineno_for_reporter()` is deprecated
- `sphinx.io.SphinxI18nReader.line` is deprecated
- `sphinx.util.i18n.find_catalog_source_file()` has changed; the `gettext_compact` argument has been deprecated
- [#5403²⁴⁸²](#): `sphinx.util.images.guess_mimetype()` has changed; the `content` argument has been deprecated

1.8.0b1

- `source_parsers` is deprecated
- `autodoc_default_flags` is deprecated
- quickstart: `--epub` option becomes default, so it is deprecated
- Drop function based directive support. For now, Sphinx only supports class based directives (see [Directive](#))
- `sphinx.util.docutils.directive_helper()` is deprecated
- `sphinx.cmdline` is deprecated

²⁴⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/1857>

²⁴⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/4648>

²⁴⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/4983>

²⁴⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/5072>

²⁴⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/5035>

²⁴⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/5134>

²⁴⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/5163>

²⁴⁸¹ <https://github.com/sphinx-doc/sphinx/issues/4000>

²⁴⁸² <https://github.com/sphinx-doc/sphinx/issues/5403>

- `sphinx.make_mode` is deprecated
- `sphinx.locale.l_()` is deprecated
- #2157²⁴⁸³: helper function `warn()` for HTML themes is deprecated
- `app.override_domain()` is deprecated
- `app.add_stylesheet()` is deprecated
- `app.add_javascript()` is deprecated
- `app.import_object()` is deprecated
- `app.add_source_parser()` has changed; the *suffix* argument has been deprecated
- `sphinx.versioning.prepare()` is deprecated
- `Config.__init__()` has changed; the *dirname*, *filename* and *tags* argument has been deprecated
- `Config.check_types()` is deprecated
- `Config.check_unicode()` is deprecated
- `sphinx.application.CONFIG_FILENAME` is deprecated
- `highlightlang` directive is deprecated
- `BuildEnvironment.load()` is deprecated
- `BuildEnvironment.loads()` is deprecated
- `BuildEnvironment.frompickle()` is deprecated
- `env.read_doc()` is deprecated
- `env.update()` is deprecated
- `env._read_serial()` is deprecated
- `env._read_parallel()` is deprecated
- `env.write_doctree()` is deprecated
- `env._nitpick_ignore` is deprecated
- `env.versionchanges` is deprecated
- `env.dump()` is deprecated
- `env.dumps()` is deprecated
- `env.topickle()` is deprecated
- `env.note_versionchange()` is deprecated
- `sphinx.writers.latex.Table.caption_footnotetexts` is deprecated
- `sphinx.writers.latex.Table.header_footnotetexts` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.footnotestack` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.in_container_literal_block` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.next_section_ids` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.next_hyperlink_ids` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.restrict_footnote()` is deprecated

²⁴⁸³ <https://github.com/sphinx-doc/sphinx/issues/2157>

- `sphinx.writers.latex.LaTeXTranslator.unrestrict_footnote()` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.push_hyperlink_ids()` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.pop_hyperlink_ids()` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.check_latex_elements()` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.bibitems` is deprecated
- `sphinx.writers.latex.LaTeXTranslator.hlsettingstack` is deprecated
- `sphinx.writers.latex.ExtBabel.get_shorthandoff()` is deprecated
- `sphinx.writers.html.HTMLTranslator.highlightlang` is deprecated
- `sphinx.writers.html.HTMLTranslator.highlightlang_base` is deprecated
- `sphinx.writers.html.HTMLTranslator.highlightlangopts` is deprecated
- `sphinx.writers.html.HTMLTranslator.highlightlinenothreshold` is deprecated
- `sphinx.writers.html5.HTMLTranslator.highlightlang` is deprecated
- `sphinx.writers.html5.HTMLTranslator.highlightlang_base` is deprecated
- `sphinx.writers.html5.HTMLTranslator.highlightlangopts` is deprecated
- `sphinx.writers.html5.HTMLTranslator.highlightlinenothreshold` is deprecated
- `sphinx.ext.mathbase` extension is deprecated
- `sphinx.ext.mathbase.math` node is deprecated
- `sphinx.ext.mathbase.displaymath` node is deprecated
- `sphinx.ext.mathbase.eqref` node is deprecated
- `sphinx.ext.mathbase.is_in_section_title()` is deprecated
- `sphinx.ext.mathbase.MathDomain` is deprecated
- `sphinx.ext.mathbase.MathDirective` is deprecated
- `sphinx.ext.mathbase.math_role` is deprecated
- `sphinx.ext.mathbase.setup_math()` is deprecated
- `sphinx.directives.other.VersionChanges` is deprecated
- `sphinx.highlighting.PygmentsBridge.unhighlight()` is deprecated
- `sphinx.ext.mathbase.get_node_equation_number()` is deprecated
- `sphinx.ext.mathbase.wrap_displaymath()` is deprecated
- The `trim_doctest_flags` argument of `sphinx.highlighting.PygmentsBridge` is deprecated

For more details, see [deprecation APIs list](#).

Features added

1.8.0b2

- [#5388](#)²⁴⁸⁴: Ensure frozen object descriptions are reproducible
- [#5362](#)²⁴⁸⁵: apidoc: Add `--tocfile` option to change the filename of ToC

1.8.0b1

- Add `config-initiated` event
- Add `sphinx.config.Any` to represent the config value accepts any type of value
- `source_suffix` allows a mapping fileext to file types
- Add `author` as a configuration value
- [#2852](#)²⁴⁸⁶: imgconverter: Support to convert GIF to PNG
- `sphinx-build` command supports `i18n` console output
- Add `app.add_message_catalog()` and `sphinx.locale.get_translations()` to support translation for 3rd party extensions
- helper function `warning()` for HTML themes is added
- Add `Domain.enumerable_nodes` to manage own enumerable nodes for domains (experimental)
- Add a new keyword argument `override` to Application APIs
- LaTeX: new key 'fvset' for `latex_elements`. For XeLaTeX/LuaLaTeX its default sets `fanvysvrb` to use normal, not small, fontsize in code-blocks (refs: [#4793](#)²⁴⁸⁷)
- Add `html_css_files` and `epub_css_files` for adding CSS files from configuration
- Add `html_js_files` for adding JS files from configuration
- [#4834](#)²⁴⁸⁸: Ensure set object descriptions are reproducible.
- [#4828](#)²⁴⁸⁹: Allow to override `numfig_format` partially. Full definition is not needed.
- Improve warning messages during including (refs: [#4818](#)²⁴⁹⁰)
- LaTeX: separate customizability of `guilabel` and `menuselection` (refs: [#4830](#)²⁴⁹¹)
- Add `Config.read()` classmethod to create a new config object from configuration file
- [#4866](#)²⁴⁹²: Wrap graphviz diagrams in `<div>` tag
- viewcode: Add `viewcode-find-source` and `viewcode-follow-imported` to load source code without loading
- [#4785](#)²⁴⁹³: napoleon: Add strings to translation file for localisation
- [#4927](#)²⁴⁹⁴: Display a warning when invalid values are passed to `linenothreshold` option of highlight directive

²⁴⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/5388>

²⁴⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/5362>

²⁴⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/2852>

²⁴⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/4793>

²⁴⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/4834>

²⁴⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/4828>

²⁴⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/4818>

²⁴⁹¹ <https://github.com/sphinx-doc/sphinx/issues/4830>

²⁴⁹² <https://github.com/sphinx-doc/sphinx/issues/4866>

²⁴⁹³ <https://github.com/sphinx-doc/sphinx/issues/4785>

²⁴⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/4927>

- C++:
 - Add a `cpp:texpr` role as a sibling to `cpp:expr`.
 - Add support for unions.
 - #3593²⁴⁹⁵, #2683²⁴⁹⁶: add support for anonymous entities using names starting with @.
 - #5147²⁴⁹⁷: add support for (most) character literals.
 - Cross-referencing entities inside primary templates is supported, and now properly documented.
 - #1552²⁴⁹⁸: add new cross-referencing format for `cpp:any` and `cpp:func` roles, for referencing specific function overloads.
- #3606²⁴⁹⁹: MathJax should be loaded with `async` attribute
- `html`: Output `canonical_url` metadata if `html_baseurl` set (refs: #4193²⁵⁰⁰)
- #5029²⁵⁰¹: `autosummary`: expose `inherited_members` to template
- #3784²⁵⁰²: `mathjax`: Add `mathjax_options` to give options to script tag for mathjax
- #726²⁵⁰³, #969²⁵⁰⁴: `mathjax`: Add `mathjax_config` to give in-line configurations for mathjax
- #4362²⁵⁰⁵: `latex`: Don't overwrite `.tex` file if document not changed
- #1431²⁵⁰⁶: `latex`: Add alphanumeric enumerated list support
- Add `latex_use_xindy` for UTF-8 savvy indexing, defaults to True if `latex_engine` is 'xelatex' or 'lualatex'. (refs: #5134²⁵⁰⁷, #5192²⁵⁰⁸, #5212²⁵⁰⁹)
- #4976²⁵¹⁰: `SphinxLoggerAdapter.info()` now supports `location` parameter
- #5122²⁵¹¹: `setuptools`: support `nitpicky` option
- #2820²⁵¹²: `autoclass` directive supports nested class
- Add `app.add_html_math_renderer()` to register a math renderer for HTML
- Apply `trim_doctest_flags` to all builders (cf. `text`, `manpages`)
- #5140²⁵¹³: `linkcheck`: Add better Accept header to HTTP client
- #4614²⁵¹⁴: `sphinx-build`: Add `--keep-going` option to show all warnings
- Add `math:numref` role to refer equations (Same as `eq`)

²⁴⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/3593>

²⁴⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/2683>

²⁴⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/5147>

²⁴⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/1552>

²⁴⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/3606>

²⁵⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/4193>

²⁵⁰¹ <https://github.com/sphinx-doc/sphinx/issues/5029>

²⁵⁰² <https://github.com/sphinx-doc/sphinx/issues/3784>

²⁵⁰³ <https://github.com/sphinx-doc/sphinx/issues/726>

²⁵⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/969>

²⁵⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/4362>

²⁵⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/1431>

²⁵⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/5134>

²⁵⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/5192>

²⁵⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/5212>

²⁵¹⁰ <https://github.com/sphinx-doc/sphinx/issues/4976>

²⁵¹¹ <https://github.com/sphinx-doc/sphinx/issues/5122>

²⁵¹² <https://github.com/sphinx-doc/sphinx/issues/2820>

²⁵¹³ <https://github.com/sphinx-doc/sphinx/issues/5140>

²⁵¹⁴ <https://github.com/sphinx-doc/sphinx/issues/4614>

- quickstart: epub builder is enabled by default
- [#5246](#)²⁵¹⁵: Add `singlehtml_sidebars` to configure sidebars for singlehtml builder
- [#5273](#)²⁵¹⁶: doctest: Skip doctest conditionally
- [#5306](#)²⁵¹⁷: autodoc: emit a warning for invalid typehints
- [#4075](#)²⁵¹⁸, [#5215](#)²⁵¹⁹: autodoc: Add `autodoc_default_options` which accepts option values as dict

Bugs fixed

1.8.0b2

- html: search box overrides to other elements if scrolled
- i18n: warnings for translation catalogs have wrong line numbers (refs: [#5321](#)²⁵²⁰)
- [#5325](#)²⁵²¹: latex: cross references has been broken by multiply labeled objects
- C++, fixes for symbol addition and lookup. Lookup should no longer break in partial builds. See also [#5337](#)²⁵²².
- [#5348](#)²⁵²³: download reference to remote file is not displayed
- [#5282](#)²⁵²⁴: html theme: `pygments_style` of theme was overridden by `conf.py` by default
- [#4379](#)²⁵²⁵: toctree shows confusing warning when document is excluded
- [#2401](#)²⁵²⁶: autodoc: `:members:` causes `:special-members:` not to be shown
- autodoc: ImportError is replaced by AttributeError for deeper module
- [#2720](#)²⁵²⁷, [#4034](#)²⁵²⁸: Incorrect links with `:download:`, duplicate names, and parallel builds
- [#5290](#)²⁵²⁹: autodoc: failed to analyze source code in egg package
- [#5399](#)²⁵³⁰: Sphinx crashes if unknown po file exists

1.8.0b1

- i18n: message catalogs were reset on each initialization
- [#4850](#)²⁵³¹: latex: footnote inside footnote was not rendered
- [#4945](#)²⁵³²: i18n: fix `lang_COUNTRY` not fallback correctly for IndexBuilder. Thanks to Shengjing Zhu.
- [#4983](#)²⁵³³: productionlist directive generates invalid IDs for the tokens

²⁵¹⁵ <https://github.com/sphinx-doc/sphinx/issues/5246>

²⁵¹⁶ <https://github.com/sphinx-doc/sphinx/issues/5273>

²⁵¹⁷ <https://github.com/sphinx-doc/sphinx/issues/5306>

²⁵¹⁸ <https://github.com/sphinx-doc/sphinx/issues/4075>

²⁵¹⁹ <https://github.com/sphinx-doc/sphinx/issues/5215>

²⁵²⁰ <https://github.com/sphinx-doc/sphinx/issues/5321>

²⁵²¹ <https://github.com/sphinx-doc/sphinx/issues/5325>

²⁵²² <https://github.com/sphinx-doc/sphinx/issues/5337>

²⁵²³ <https://github.com/sphinx-doc/sphinx/issues/5348>

²⁵²⁴ <https://github.com/sphinx-doc/sphinx/issues/5282>

²⁵²⁵ <https://github.com/sphinx-doc/sphinx/issues/4379>

²⁵²⁶ <https://github.com/sphinx-doc/sphinx/issues/2401>

²⁵²⁷ <https://github.com/sphinx-doc/sphinx/issues/2720>

²⁵²⁸ <https://github.com/sphinx-doc/sphinx/issues/4034>

²⁵²⁹ <https://github.com/sphinx-doc/sphinx/issues/5290>

²⁵³⁰ <https://github.com/sphinx-doc/sphinx/issues/5399>

²⁵³¹ <https://github.com/sphinx-doc/sphinx/issues/4850>

²⁵³² <https://github.com/sphinx-doc/sphinx/issues/4945>

²⁵³³ <https://github.com/sphinx-doc/sphinx/issues/4983>

- [#5132](#)²⁵³⁴: lualatex: PDF build fails if indexed word starts with Unicode character
- [#5133](#)²⁵³⁵: latex: index headings “Symbols” and “Numbers” not internationalized
- [#5114](#)²⁵³⁶: sphinx-build: Handle errors on scanning documents
- epub: spine has been broken when “self” is listed on toctree (refs: [#4611](#)²⁵³⁷)
- [#344](#)²⁵³⁸: autosummary does not understand docstring of module level attributes
- [#5191](#)²⁵³⁹: C++, prevent nested declarations in functions to avoid lookup problems.
- [#5126](#)²⁵⁴⁰: C++, add missing isPack method for certain template parameter types.
- [#5187](#)²⁵⁴¹: C++, parse attributes on declarators as well.
- C++, parse delete expressions and basic new expressions as well.
- [#5002](#)²⁵⁴²: graphviz: SVGs do not adapt to the column width

Features removed

1.8.0b1

- `sphinx.ext.pngmath` extension

Documentation

1.8.0b1

- [#5083](#)²⁵⁴³: Fix wrong make.bat option for internationalization.
- [#5115](#)²⁵⁴⁴: napoleon: add admonitions added by [#4613](#)²⁵⁴⁵ to the docs.

14.99 Release 1.7.9 (released Sep 05, 2018)

Features added

- [#5359](#)²⁵⁴⁶: Make generated texinfo files reproducible by sorting the anchors

²⁵³⁴ <https://github.com/sphinx-doc/sphinx/issues/5132>

²⁵³⁵ <https://github.com/sphinx-doc/sphinx/issues/5133>

²⁵³⁶ <https://github.com/sphinx-doc/sphinx/issues/5114>

²⁵³⁷ <https://github.com/sphinx-doc/sphinx/issues/4611>

²⁵³⁸ <https://github.com/sphinx-doc/sphinx/issues/344>

²⁵³⁹ <https://github.com/sphinx-doc/sphinx/issues/5191>

²⁵⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/5126>

²⁵⁴¹ <https://github.com/sphinx-doc/sphinx/issues/5187>

²⁵⁴² <https://github.com/sphinx-doc/sphinx/issues/5002>

²⁵⁴³ <https://github.com/sphinx-doc/sphinx/issues/5083>

²⁵⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/5115>

²⁵⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/4613>

²⁵⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/5359>

Bugs fixed

- [#5361](#)²⁵⁴⁷: crashed on incremental build if document uses include directive

14.100 Release 1.7.8 (released Aug 29, 2018)

Incompatible changes

- The type of `env.included` has been changed to dict of set

Bugs fixed

- [#5320](#)²⁵⁴⁸: intersphinx: crashed if invalid url given
- [#5326](#)²⁵⁴⁹: manpage: crashed when invalid docname is specified as `man_pages`
- [#5322](#)²⁵⁵⁰: autodoc: Any typehint causes formatting error
- [#5327](#)²⁵⁵¹: “document isn’t included in any toctree” warning on rebuild with generated files
- [#5335](#)²⁵⁵²: quickstart: escape sequence has been displayed with MacPorts’ python

14.101 Release 1.7.7 (released Aug 19, 2018)

Bugs fixed

- [#5198](#)²⁵⁵³: document not in toctree warning when including files only for parallel builds
- LaTeX: reduce “Token not allowed in a PDF string” hyperref warnings in latex console output (refs: [#5236](#)²⁵⁵⁴)
- LaTeX: suppress “remreset Warning: The remreset package is obsolete” in latex console output with recent LaTeX (refs: [#5237](#)²⁵⁵⁵)
- [#5234](#)²⁵⁵⁶: PDF output: usage of PAPER environment variable is broken since Sphinx 1.5
- LaTeX: fix the *latex_engine* documentation regarding Latin Modern font with XeLaTeX/LuaLateX (refs: [#5251](#)²⁵⁵⁷)
- [#5280](#)²⁵⁵⁸: autodoc: Fix wrong type annotations for complex typing
- autodoc: Optional types are wrongly rendered
- [#5291](#)²⁵⁵⁹: autodoc crashed by ForwardRef types

²⁵⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/5361>

²⁵⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/5320>

²⁵⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/5326>

²⁵⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/5322>

²⁵⁵¹ <https://github.com/sphinx-doc/sphinx/issues/5327>

²⁵⁵² <https://github.com/sphinx-doc/sphinx/issues/5335>

²⁵⁵³ <https://github.com/sphinx-doc/sphinx/issues/5198>

²⁵⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/5236>

²⁵⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/5237>

²⁵⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/5234>

²⁵⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/5251>

²⁵⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/5280>

²⁵⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/5291>

- [#5211](#)²⁵⁶⁰: autodoc: No docs generated for functools.partial functions
- [#5306](#)²⁵⁶¹: autodoc: getargspec() raises NameError for invalid typehints
- [#5298](#)²⁵⁶²: imgmath: math_number_all causes equations to have two numbers in html
- [#5294](#)²⁵⁶³: sphinx-quickstart blank prompts in PowerShell

14.102 Release 1.7.6 (released Jul 17, 2018)

Bugs fixed

- [#5037](#)²⁵⁶⁴: LaTeX \sphinxupquote{} breaks in Russian
- sphinx.testing uses deprecated pytest API; Node.get_marker(name)
- [#5016](#)²⁵⁶⁵: crashed when recommonmark.AutoStrictify is enabled
- [#5022](#)²⁵⁶⁶: latex: crashed with Docutils package provided by Debian/Ubuntu
- [#5009](#)²⁵⁶⁷: latex: a label for table is vanished if table does not have a caption
- [#5048](#)²⁵⁶⁸: crashed with numbered toctree
- [#2410](#)²⁵⁶⁹: C, render empty argument lists for macros.
- C++, fix lookup of full template specializations with no template arguments.
- [#4667](#)²⁵⁷⁰: C++, fix assertion on missing references in global scope when using intersphinx. Thanks to Alan M. Carroll.
- [#5019](#)²⁵⁷¹: autodoc: crashed by Form Feed Character
- [#5032](#)²⁵⁷²: autodoc: loses the first staticmethod parameter for old styled classes
- [#5036](#)²⁵⁷³: quickstart: Typing Ctrl-U clears the whole of line
- [#5066](#)²⁵⁷⁴: html: “relations” sidebar is not shown by default
- [#5091](#)²⁵⁷⁵: latex: curly braces in index entries are not handled correctly
- [#5070](#)²⁵⁷⁶: epub: Wrong internal href fragment links
- [#5104](#)²⁵⁷⁷: apidoc: Interface of sphinx.apidoc:main() has changed

²⁵⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/5211>

²⁵⁶¹ <https://github.com/sphinx-doc/sphinx/issues/5306>

²⁵⁶² <https://github.com/sphinx-doc/sphinx/issues/5298>

²⁵⁶³ <https://github.com/sphinx-doc/sphinx/issues/5294>

²⁵⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/5037>

²⁵⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/5016>

²⁵⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/5022>

²⁵⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/5009>

²⁵⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/5048>

²⁵⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/2410>

²⁵⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/4667>

²⁵⁷¹ <https://github.com/sphinx-doc/sphinx/issues/5019>

²⁵⁷² <https://github.com/sphinx-doc/sphinx/issues/5032>

²⁵⁷³ <https://github.com/sphinx-doc/sphinx/issues/5036>

²⁵⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/5066>

²⁵⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/5091>

²⁵⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/5070>

²⁵⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/5104>

- [#4272](#)²⁵⁷⁸: PDF builds of French projects have issues with XeTeX
- [#5076](#)²⁵⁷⁹: napoleon raises RuntimeError with python 3.7
- [#5125](#)²⁵⁸⁰: sphinx-build: Interface of `sphinx.main()` has changed
- sphinx-build: `sphinx.cmd.build.main()` refers `sys.argv` instead of given argument
- [#5146](#)²⁵⁸¹: autosummary: warning is emitted when the first line of docstring ends with literal notation
- autosummary: warnings of autosummary indicates wrong location (refs: [#5146](#)²⁵⁸²)
- [#5143](#)²⁵⁸³: autodoc: crashed on inspecting dict like object which does not support sorting
- [#5139](#)²⁵⁸⁴: autodoc: Enum argument missing if it shares value with another
- [#4946](#)²⁵⁸⁵: py domain: rtype field could not handle “None” as a type
- [#5176](#)²⁵⁸⁶: LaTeX: indexing of terms containing @, !, or " fails
- [#5161](#)²⁵⁸⁷: html: crashes if copying static files are failed
- [#5167](#)²⁵⁸⁸: autodoc: Fix formatting type annotations for tuples with more than two arguments
- [#3329](#)²⁵⁸⁹: i18n: crashed by auto-symbol footnote references
- [#5158](#)²⁵⁹⁰: autosummary: module summary has been broken when it starts with heading

14.103 Release 1.7.5 (released May 29, 2018)

Bugs fixed

- [#4924](#)²⁵⁹¹: html search: Upper characters problem in any other languages
- [#4932](#)²⁵⁹²: apidoc: some subpackage is ignored if sibling subpackage contains a module starting with underscore
- [#4863](#)²⁵⁹³, [#4938](#)²⁵⁹⁴, [#4939](#)²⁵⁹⁵: i18n doesn’t handle correctly node.title as used for contents, topic, admonition, table and section.
- [#4913](#)²⁵⁹⁶: i18n: literal blocks in bullet list are not translated
- [#4962](#)²⁵⁹⁷: C++, raised TypeError on duplicate declaration.

²⁵⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/4272>

²⁵⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/5076>

²⁵⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/5125>

²⁵⁸¹ <https://github.com/sphinx-doc/sphinx/issues/5146>

²⁵⁸² <https://github.com/sphinx-doc/sphinx/issues/5146>

²⁵⁸³ <https://github.com/sphinx-doc/sphinx/issues/5143>

²⁵⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/5139>

²⁵⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/4946>

²⁵⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/5176>

²⁵⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/5161>

²⁵⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/5167>

²⁵⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/3329>

²⁵⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/5158>

²⁵⁹¹ <https://github.com/sphinx-doc/sphinx/issues/4924>

²⁵⁹² <https://github.com/sphinx-doc/sphinx/issues/4932>

²⁵⁹³ <https://github.com/sphinx-doc/sphinx/issues/4863>

²⁵⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/4938>

²⁵⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/4939>

²⁵⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/4913>

²⁵⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/4962>

- [#4825²⁵⁹⁸](#): C++, properly parse expr roles and give better error messages when (escaped) line breaks are present.
- C++, properly use desc_addname nodes for prefixes of names.
- C++, parse pack expansions in function calls.
- [#4915²⁵⁹⁹](#), [#4916²⁶⁰⁰](#): links on search page are broken when using dirhtml builder
- [#4969²⁶⁰¹](#): autodoc: constructor method should not have return annotation
- latex: deeply nested enumerated list which is beginning with non-1 causes LaTeX engine crashed
- [#4978²⁶⁰²](#): latex: shorthandoff is not set up for Brazil locale
- [#4928²⁶⁰³](#): i18n: Ignore dot-directories like .git/ in LC_MESSAGES/
- [#4946²⁶⁰⁴](#): py domain: type field could not handle “None” as a type
- [#4979²⁶⁰⁵](#): latex: Incorrect escaping of curly braces in index entries
- [#4956²⁶⁰⁶](#): autodoc: Failed to extract document from a subclass of the class on mocked module
- [#4973²⁶⁰⁷](#): latex: glossary directive adds whitespace to each item
- [#4980²⁶⁰⁸](#): latex: Explicit labels on code blocks are duplicated
- [#4919²⁶⁰⁹](#): node.asdom() crashes if toctree has :numbered: option
- [#4914²⁶¹⁰](#): autodoc: Parsing error when using dataclasses without default values
- [#4931²⁶¹¹](#): autodoc: crashed when handler for autodoc-skip-member raises an error
- [#4931²⁶¹²](#): autodoc: crashed when subclass of mocked class are processed by napoleon module
- [#5007²⁶¹³](#): sphinx-build crashes when error log contains a “%” character

14.104 Release 1.7.4 (released Apr 25, 2018)

Bugs fixed

- [#4885²⁶¹⁴](#), [#4887²⁶¹⁵](#): domains: Crashed with duplicated objects
- [#4889²⁶¹⁶](#): latex: sphinx.writers.latex causes recursive import

²⁵⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/4825>

²⁵⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/4915>

²⁶⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/4916>

²⁶⁰¹ <https://github.com/sphinx-doc/sphinx/issues/4969>

²⁶⁰² <https://github.com/sphinx-doc/sphinx/issues/4978>

²⁶⁰³ <https://github.com/sphinx-doc/sphinx/issues/4928>

²⁶⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/4946>

²⁶⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/4979>

²⁶⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/4956>

²⁶⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/4973>

²⁶⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/4980>

²⁶⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/4919>

²⁶¹⁰ <https://github.com/sphinx-doc/sphinx/issues/4914>

²⁶¹¹ <https://github.com/sphinx-doc/sphinx/issues/4931>

²⁶¹² <https://github.com/sphinx-doc/sphinx/issues/4931>

²⁶¹³ <https://github.com/sphinx-doc/sphinx/issues/5007>

²⁶¹⁴ <https://github.com/sphinx-doc/sphinx/issues/4885>

²⁶¹⁵ <https://github.com/sphinx-doc/sphinx/issues/4887>

²⁶¹⁶ <https://github.com/sphinx-doc/sphinx/issues/4889>

14.105 Release 1.7.3 (released Apr 23, 2018)

Bugs fixed

- [#4769](#)²⁶¹⁷: autodoc loses the first staticmethod parameter
- [#4790](#)²⁶¹⁸: autosummary: too wide two column tables in PDF builds
- [#4795](#)²⁶¹⁹: Latex customization via `_templates/longtable.tex_t` is broken
- [#4789](#)²⁶²⁰: imgconverter: confused by convert.exe of Windows
- [#4783](#)²⁶²¹: On windows, Sphinx crashed when drives of srcdir and outdir are different
- [#4812](#)²⁶²²: autodoc ignores type annotated variables
- [#4817](#)²⁶²³: wrong URLs on warning messages
- [#4784](#)²⁶²⁴: latex: `latex_show_urls` assigns incorrect footnote numbers if hyperlinks exists inside substitutions
- [#4837](#)²⁶²⁵: latex with class memoir Error: Font command `\sf` is not supported
- [#4803](#)²⁶²⁶: latex: too slow in proportion to number of auto numbered footnotes
- [#4838](#)²⁶²⁷: htmlhelp: The entries in .hhp file is not ordered
- toctree directive tries to glob for URL having query_string
- [#4871](#)²⁶²⁸: html search: Upper characters problem in German
- [#4717](#)²⁶²⁹: latex: Compilation for German docs failed with LuaLaTeX and XeLaTeX
- [#4459](#)²⁶³⁰: duplicated labels detector does not work well in parallel build
- [#4878](#)²⁶³¹: Crashed with extension which returns invalid metadata

14.106 Release 1.7.2 (released Mar 21, 2018)

Incompatible changes

- [#4520](#)²⁶³²: apidoc: folders with an empty `__init__.py` are no longer excluded from TOC

²⁶¹⁷ <https://github.com/sphinx-doc/sphinx/issues/4769>

²⁶¹⁸ <https://github.com/sphinx-doc/sphinx/issues/4790>

²⁶¹⁹ <https://github.com/sphinx-doc/sphinx/issues/4795>

²⁶²⁰ <https://github.com/sphinx-doc/sphinx/issues/4789>

²⁶²¹ <https://github.com/sphinx-doc/sphinx/issues/4783>

²⁶²² <https://github.com/sphinx-doc/sphinx/issues/4812>

²⁶²³ <https://github.com/sphinx-doc/sphinx/issues/4817>

²⁶²⁴ <https://github.com/sphinx-doc/sphinx/issues/4784>

²⁶²⁵ <https://github.com/sphinx-doc/sphinx/issues/4837>

²⁶²⁶ <https://github.com/sphinx-doc/sphinx/issues/4803>

²⁶²⁷ <https://github.com/sphinx-doc/sphinx/issues/4838>

²⁶²⁸ <https://github.com/sphinx-doc/sphinx/issues/4871>

²⁶²⁹ <https://github.com/sphinx-doc/sphinx/issues/4717>

²⁶³⁰ <https://github.com/sphinx-doc/sphinx/issues/4459>

²⁶³¹ <https://github.com/sphinx-doc/sphinx/issues/4878>

²⁶³² <https://github.com/sphinx-doc/sphinx/issues/4520>

Bugs fixed

- [#4669](#)²⁶³³: sphinx.build_main and sphinx.make_main throw NameError
- [#4685](#)²⁶³⁴: autosummary emits meaningless warnings
- autodoc: crashed when invalid options given
- pydomain: always strip parenthesis if empty (refs: [#1042](#)²⁶³⁵)
- [#4689](#)²⁶³⁶: autosummary: unexpectedly strips docstrings containing “i.e.”
- [#4701](#)²⁶³⁷: viewcode: Misplaced <div> in viewcode html output
- [#4444](#)²⁶³⁸: Don’t require numfig to use :numref: on sections
- [#4727](#)²⁶³⁹: Option clash for package textcomp
- [#4725](#)²⁶⁴⁰: Sphinx does not work with python 3.5.0 and 3.5.1
- [#4716](#)²⁶⁴¹: Generation PDF file with TexLive on Windows, file not found error
- [#4574](#)²⁶⁴²: vertical space before equation in latex
- [#4720](#)²⁶⁴³: message when an image is mismatched for builder is not clear
- [#4655](#)²⁶⁴⁴, [#4684](#)²⁶⁴⁵: Incomplete localization strings in Polish and Chinese
- [#2286](#)²⁶⁴⁶: Sphinx crashes when error is happens in rendering HTML pages
- [#4688](#)²⁶⁴⁷: Error to download remote images having long URL
- [#4754](#)²⁶⁴⁸: sphinx/pycode/__init__.py raises AttributeError
- [#1435](#)²⁶⁴⁹: qthelp builder should htmlescape keywords
- epub: Fix docTitle elements of toc.ncx is not escaped
- [#4520](#)²⁶⁵⁰: apidoc: Subpackage not in toc (introduced in 1.6.6) now fixed
- [#4767](#)²⁶⁵¹: html: search highlighting breaks mathjax equations

²⁶³³ <https://github.com/sphinx-doc/sphinx/issues/4669>

²⁶³⁴ <https://github.com/sphinx-doc/sphinx/issues/4685>

²⁶³⁵ <https://github.com/sphinx-doc/sphinx/issues/1042>

²⁶³⁶ <https://github.com/sphinx-doc/sphinx/issues/4689>

²⁶³⁷ <https://github.com/sphinx-doc/sphinx/issues/4701>

²⁶³⁸ <https://github.com/sphinx-doc/sphinx/issues/4444>

²⁶³⁹ <https://github.com/sphinx-doc/sphinx/issues/4727>

²⁶⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/4725>

²⁶⁴¹ <https://github.com/sphinx-doc/sphinx/issues/4716>

²⁶⁴² <https://github.com/sphinx-doc/sphinx/issues/4574>

²⁶⁴³ <https://github.com/sphinx-doc/sphinx/issues/4720>

²⁶⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/4655>

²⁶⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/4684>

²⁶⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/2286>

²⁶⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/4688>

²⁶⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/4754>

²⁶⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/1435>

²⁶⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/4520>

²⁶⁵¹ <https://github.com/sphinx-doc/sphinx/issues/4767>

14.107 Release 1.7.1 (released Feb 23, 2018)

Deprecated

- [#4623](#)²⁶⁵²: `sphinx.build_main()` is deprecated.
- autosummary: The interface of `sphinx.ext.autosummary.get_documenter()` has been changed (Since 1.7.0)
- [#4664](#)²⁶⁵³: `sphinx.ext.intersphinx.debug()` is deprecated.

For more details, see *deprecation APIs list*.

Bugs fixed

- [#4608](#)²⁶⁵⁴: epub: Invalid meta tag is generated
- [#4260](#)²⁶⁵⁵: autodoc: keyword only argument separator is not disappeared if it is appeared at top of the argument list
- [#4622](#)²⁶⁵⁶: epub: `epub_scheme` does not effect to content.opf
- [#4627](#)²⁶⁵⁷: graphviz: Fit graphviz images to page
- [#4617](#)²⁶⁵⁸: quickstart: `PROJECT_DIR` argument is required
- [#4623](#)²⁶⁵⁹: `sphinx.build_main` no longer exists in 1.7.0
- [#4615](#)²⁶⁶⁰: The argument of `sphinx.build` has been changed in 1.7.0
- autosummary: The interface of `sphinx.ext.autosummary.get_documenter()` has been changed
- [#4630](#)²⁶⁶¹: Have order on msgids in `sphinx.pot` deterministic
- [#4563](#)²⁶⁶²: autosummary: Incorrect end of line punctuation detection
- [#4577](#)²⁶⁶³: Enumerated sublists with explicit start with wrong number
- [#4641](#)²⁶⁶⁴: A external link in TOC cannot contain “?” with `:glob:` option
- C++, add missing parsing of explicit casts and typeid in expression parsing.
- C++, add missing parsing of `this` in expression parsing.
- [#4655](#)²⁶⁶⁵: Fix incomplete localization strings in Polish
- [#4653](#)²⁶⁶⁶: Fix error reporting for parameterless ImportErrors

²⁶⁵² <https://github.com/sphinx-doc/sphinx/issues/4623>

²⁶⁵³ <https://github.com/sphinx-doc/sphinx/issues/4664>

²⁶⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/4608>

²⁶⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/4260>

²⁶⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/4622>

²⁶⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/4627>

²⁶⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/4617>

²⁶⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/4623>

²⁶⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/4615>

²⁶⁶¹ <https://github.com/sphinx-doc/sphinx/issues/4630>

²⁶⁶² <https://github.com/sphinx-doc/sphinx/issues/4563>

²⁶⁶³ <https://github.com/sphinx-doc/sphinx/issues/4577>

²⁶⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/4641>

²⁶⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/4655>

²⁶⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/4653>

- [#4664](#)²⁶⁶⁷: Reading objects.inv fails again
- [#4662](#)²⁶⁶⁸: any refs with term targets crash when an ambiguity is encountered

14.108 Release 1.7.0 (released Feb 12, 2018)

Dependencies

1.7.0b1

- Add packaging package

Incompatible changes

1.7.0b1

- [#3668](#)²⁶⁶⁹: The arguments has changed of main functions for each command
- [#3893](#)²⁶⁷⁰: Unknown html_theme_options throw warnings instead of errors
- [#3927](#)²⁶⁷¹: Python parameter/variable types should match classes, not all objects
- [#3962](#)²⁶⁷²: sphinx-apidoc now recognizes given directory as an implicit namespace package when `--implicit-namespaces` option given, not subdirectories of given directory.
- [#3929](#)²⁶⁷³: apidoc: Move sphinx.apidoc to sphinx.ext.apidoc
- [#4226](#)²⁶⁷⁴: apidoc: Generate new style makefile (make-mode)
- [#4274](#)²⁶⁷⁵: sphinx-build returns 2 as an exit code on argument error
- [#4389](#)²⁶⁷⁶: output directory will be created after loading extensions
- autodoc does not generate warnings messages to the generated document even if `keep_warnings` is True. They are only emitted to stderr.
- shebang line is removed from generated conf.py
- [#2557](#)²⁶⁷⁷: autodoc: `autodoc_mock_imports` only mocks specified modules with their descendants. It does not mock their ancestors. If you want to mock them, please specify the name of ancestors explicitly.
- [#3620](#)²⁶⁷⁸: html theme: move DOCUMENTATION_OPTIONS to independent JavaScript file (refs: [#4295](#)²⁶⁷⁹)
- [#4246](#)²⁶⁸⁰: Limit width of text body for all themes. Configurable via theme options `body_min_width` and `body_max_width`.

²⁶⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/4664>

²⁶⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/4662>

²⁶⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/3668>

²⁶⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/3893>

²⁶⁷¹ <https://github.com/sphinx-doc/sphinx/issues/3927>

²⁶⁷² <https://github.com/sphinx-doc/sphinx/issues/3962>

²⁶⁷³ <https://github.com/sphinx-doc/sphinx/issues/3929>

²⁶⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/4226>

²⁶⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/4274>

²⁶⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/4389>

²⁶⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/2557>

²⁶⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/3620>

²⁶⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/4295>

²⁶⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/4246>

- [#4771](#)²⁶⁸¹: apidoc: The `exclude_patterns` arguments are ignored if they are placed just after command line options

1.7.0b2

- [#4467](#)²⁶⁸²: html theme: Rename `csss` block to `css`

Deprecated

1.7.0b1

- using a string value for `html_sidebars` is deprecated and only list values will be accepted at 2.0.
- `format_annotation()` and `formatargspec()` is deprecated. Please use `sphinx.util.inspect.Signature` instead.
- `sphinx.ext.autodoc.AutodocReporter` is replaced by `sphinx.util.docutils.switch_source_input()` and now deprecated. It will be removed in Sphinx 2.0.
- `sphinx.ext.autodoc.add_documenter()` and `AutoDirective._register` is now deprecated. Please use `app.add_autodocumenter()` instead.
- `AutoDirective._special_attrgetters` is now deprecated. Please use `app.add_autodoc_attrgetter()` instead.

Features added

1.7.0b1

- C++, handle `decltype(auto)`.
- [#2406](#)²⁶⁸³: C++, add proper parsing of expressions, including linking of identifiers.
- C++, add a `cpp:expr` role for inserting inline C++ expressions or types.
- C++, support explicit member instantiations with shorthand `template` prefix
- C++, make function parameters linkable, like template params.
- [#3638](#)²⁶⁸⁴: Allow to change a label of reference to equation using `math_eqref_format`
- Now `suppress_warnings` accepts following configurations:
 - `ref.python` (ref: [#3866](#)²⁶⁸⁵)
- [#3872](#)²⁶⁸⁶: Add `latex` key to configure literal blocks caption position in PDF output (refs [#3792](#)²⁶⁸⁷, [#1723](#)²⁶⁸⁸)
- In case of missing docstring try to retrieve doc from base classes (ref: [#3140](#)²⁶⁸⁹)
- [#4023](#)²⁶⁹⁰: Clarify error message when any role has more than one target.
- [#3973](#)²⁶⁹¹: epub: allow to override build date

²⁶⁸¹ <https://github.com/sphinx-doc/sphinx/issues/4771>

²⁶⁸² <https://github.com/sphinx-doc/sphinx/issues/4467>

²⁶⁸³ <https://github.com/sphinx-doc/sphinx/issues/2406>

²⁶⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/3638>

²⁶⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/3866>

²⁶⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/3872>

²⁶⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/3792>

²⁶⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/1723>

²⁶⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/3140>

²⁶⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/4023>

²⁶⁹¹ <https://github.com/sphinx-doc/sphinx/issues/3973>

- #3972²⁶⁹²: epub: Sort manifest entries by filename
- #4052²⁶⁹³: viewcode: Sort before highlighting module code
- #1448²⁶⁹⁴: qthelp: Add new config value; *qthelp_namespace*
- #4140²⁶⁹⁵: html themes: Make body tag inheritable
- #4168²⁶⁹⁶: improve zh search with jieba
- HTML themes can set up default sidebars through `theme.conf`
- #3160²⁶⁹⁷: html: Use `<kdb>` to represent `:kbd:` role
- #4212²⁶⁹⁸: autosummary: catch all exceptions when importing modules
- #4166²⁶⁹⁹: Add *math_numfig* for equation numbering by section (refs: #3991²⁷⁰⁰, #4080²⁷⁰¹). Thanks to Oliver Jahn.
- #4311²⁷⁰²: Let LaTeX obey *numfig_secnum_depth* for figures, tables, and code-blocks
- #947²⁷⁰³: autodoc now supports ignore-module-all to ignore a module's `__all__`
- #4332²⁷⁰⁴: Let LaTeX obey *math_numfig* for equation numbering
- #4093²⁷⁰⁵: sphinx-build creates empty directories for unknown targets/builders
- Add `top-classes` option for the `sphinx.ext.inheritance_diagram` extension to limit the scope of inheritance graphs.
- #4183²⁷⁰⁶: doctest: `:pyversion:` option also follows PEP-440 specification
- #4235²⁷⁰⁷: html: Add *manpages_url* to make manpage roles to hyperlinks
- #3570²⁷⁰⁸: autodoc: Do not display ‘typing.’ module for type hints
- #4354²⁷⁰⁹: sphinx-build now emits finish message. Builders can modify it through `Builder.epilog` attribute
- #4245²⁷¹⁰: html themes: Add language to javascript vars list
- #4079²⁷¹¹: html: Add `nottranslate` class to each code-blocks, literals and maths to let Google Translate know they are not translatable
- #4137²⁷¹²: doctest: doctest block is always highlighted as python console (pycon)
- #4137²⁷¹³: doctest: testcode block is always highlighted as python

²⁶⁹² <https://github.com/sphinx-doc/sphinx/issues/3972>

²⁶⁹³ <https://github.com/sphinx-doc/sphinx/issues/4052>

²⁶⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/1448>

²⁶⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/4140>

²⁶⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/4168>

²⁶⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/3160>

²⁶⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/4212>

²⁶⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/4166>

²⁷⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/3991>

²⁷⁰¹ <https://github.com/sphinx-doc/sphinx/issues/4080>

²⁷⁰² <https://github.com/sphinx-doc/sphinx/issues/4311>

²⁷⁰³ <https://github.com/sphinx-doc/sphinx/issues/947>

²⁷⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/4332>

²⁷⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/4093>

²⁷⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/4183>

²⁷⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/4235>

²⁷⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/3570>

²⁷⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/4354>

²⁷¹⁰ <https://github.com/sphinx-doc/sphinx/issues/4245>

²⁷¹¹ <https://github.com/sphinx-doc/sphinx/issues/4079>

²⁷¹² <https://github.com/sphinx-doc/sphinx/issues/4137>

²⁷¹³ <https://github.com/sphinx-doc/sphinx/issues/4137>

- [#3998](#)²⁷¹⁴: text: Assign section numbers by default. You can control it using `text_add_secnumbers` and `text_secnumber_suffix`

1.7.0b2

- [#4271](#)²⁷¹⁵: sphinx-build supports an option called `-j auto` to adjust numbers of processes automatically.
- Napoleon: added option to specify custom section tags.

Features removed

1.7.0b1

- Configuration variables
 - `html_use_smartypants`
 - `latex_keep_old_macro_names`
 - `latex_elements['footer']`
- utility methods of `sphinx.application.Sphinx` class
 - `buildname` (property)
 - `_display_chunk()`
 - `old_status_iterator()`
 - `status_iterator()`
 - `_directive_helper()`
- utility methods of `sphinx.environment.BuildEnvironment` class
 - `currmodule` (property)
 - `currclass` (property)
- epub2 builder
- `prefix` and `colorfunc` parameter for `warn()`
- `sphinx.util.compat` module
- `sphinx.util.nodes.process_only_nodes()`
- LaTeX environment notice, use `sphinxadmonition` instead
- LaTeX `\sphinxstylethead`, use `\sphinxstyletheadfamily`
- C++, support of function concepts. Thanks to mickk-on-cpp.
- Not used and previously not documented LaTeX macros `\shortversion` and `\setshortversion`

²⁷¹⁴ <https://github.com/sphinx-doc/sphinx/issues/3998>

²⁷¹⁵ <https://github.com/sphinx-doc/sphinx/issues/4271>

Bugs fixed

1.7.0b1

- [#3882](https://github.com/sphinx-doc/sphinx/issues/3882)²⁷¹⁶: Update the order of files for HTMLHelp and QTHelp
- [#3962](https://github.com/sphinx-doc/sphinx/issues/3962)²⁷¹⁷: sphinx-apidoc does not recognize implicit namespace packages correctly
- [#4094](https://github.com/sphinx-doc/sphinx/issues/4094)²⁷¹⁸: C++, allow empty template argument lists.
- C++, also hyperlink types in the name of declarations with qualified names.
- C++, do not add index entries for declarations inside concepts.
- C++, support the template disambiguator for dependent names.
- [#4314](https://github.com/sphinx-doc/sphinx/issues/4314)²⁷¹⁹: For PDF ‘howto’ documents, numbering of code-blocks differs from the one of figures and tables
- [#4330](https://github.com/sphinx-doc/sphinx/issues/4330)²⁷²⁰: PDF ‘howto’ documents have an incoherent default LaTeX tocdepth counter setting
- [#4198](https://github.com/sphinx-doc/sphinx/issues/4198)²⁷²¹: autosummary emits multiple ‘autodoc-process-docstring’ event. Thanks to Joel Nothman.
- [#4081](https://github.com/sphinx-doc/sphinx/issues/4081)²⁷²²: Warnings and errors colored the same when building
- latex: Do not display ‘Release’ label if `release` is not set

1.7.0b2

- [#4415](https://github.com/sphinx-doc/sphinx/issues/4415)²⁷²³: autodoc classifies inherited classmethods as regular methods
- [#4415](https://github.com/sphinx-doc/sphinx/issues/4415)²⁷²⁴: autodoc classifies inherited staticmethods as regular methods
- [#4472](https://github.com/sphinx-doc/sphinx/issues/4472)²⁷²⁵: DOCUMENTATION_OPTIONS is not defined
- [#4491](https://github.com/sphinx-doc/sphinx/issues/4491)²⁷²⁶: autodoc: prefer `_MockImporter` over other importers in `sys.meta_path`
- [#4490](https://github.com/sphinx-doc/sphinx/issues/4490)²⁷²⁷: autodoc: type annotation is broken with python 3.7.0a4+
- `utils` package is no longer installed
- [#3952](https://github.com/sphinx-doc/sphinx/issues/3952)²⁷²⁸: apidoc: module header is too escaped
- [#4275](https://github.com/sphinx-doc/sphinx/issues/4275)²⁷²⁹: Formats accepted by `sphinx.util.i18n.format_date` are limited
- [#4493](https://github.com/sphinx-doc/sphinx/issues/4493)²⁷³⁰: recomcommonmark raises `AttributeError` if `AutoStructify` enabled
- [#4209](https://github.com/sphinx-doc/sphinx/issues/4209)²⁷³¹: intersphinx: In link title, “v” should be optional if target has no version
- [#4230](https://github.com/sphinx-doc/sphinx/issues/4230)²⁷³²: slowdown in writing pages with Sphinx 1.6
- [#4522](https://github.com/sphinx-doc/sphinx/issues/4522)²⁷³³: epub: document is not rebuilt even if config changed

²⁷¹⁶ <https://github.com/sphinx-doc/sphinx/issues/3882>

²⁷¹⁷ <https://github.com/sphinx-doc/sphinx/issues/3962>

²⁷¹⁸ <https://github.com/sphinx-doc/sphinx/issues/4094>

²⁷¹⁹ <https://github.com/sphinx-doc/sphinx/issues/4314>

²⁷²⁰ <https://github.com/sphinx-doc/sphinx/issues/4330>

²⁷²¹ <https://github.com/sphinx-doc/sphinx/issues/4198>

²⁷²² <https://github.com/sphinx-doc/sphinx/issues/4081>

²⁷²³ <https://github.com/sphinx-doc/sphinx/issues/4415>

²⁷²⁴ <https://github.com/sphinx-doc/sphinx/issues/4415>

²⁷²⁵ <https://github.com/sphinx-doc/sphinx/issues/4472>

²⁷²⁶ <https://github.com/sphinx-doc/sphinx/issues/4491>

²⁷²⁷ <https://github.com/sphinx-doc/sphinx/issues/4490>

²⁷²⁸ <https://github.com/sphinx-doc/sphinx/issues/3952>

²⁷²⁹ <https://github.com/sphinx-doc/sphinx/issues/4275>

²⁷³⁰ <https://github.com/sphinx-doc/sphinx/issues/4493>

²⁷³¹ <https://github.com/sphinx-doc/sphinx/issues/4209>

²⁷³² <https://github.com/sphinx-doc/sphinx/issues/4230>

²⁷³³ <https://github.com/sphinx-doc/sphinx/issues/4522>

1.7.0b3

- [#4019](#)²⁷³⁴: inheritance_diagram AttributeError stopping make process
- [#4531](#)²⁷³⁵: autosummary: methods are not treated as attributes
- [#4538](#)²⁷³⁶: autodoc: `sphinx.ext.autodoc.Options` has been moved
- [#4539](#)²⁷³⁷: autodoc emits warnings for partialmethods
- [#4223](#)²⁷³⁸: doctest: failing tests reported in wrong file, at wrong line
- [i18n](#): message catalogs are not compiled if specific filenames are given for `sphinx-build` as arguments (refs: [#4560](#)²⁷³⁹)
- [#4027](#)²⁷⁴⁰: `sphinx.ext.autosectionlabel` now expects labels to be the same as they are in the raw source; no smart quotes, nothing fancy.
- [#4581](#)²⁷⁴¹: apidoc: Excluded modules still included

Testing

1.7.0b1

- Add support for Docutils 0.14
- Add tests for the `sphinx.ext.inheritance_diagram` extension.

14.109 Release 1.6.7 (released Feb 04, 2018)

Bugs fixed

- [#1922](#)²⁷⁴²: html search: Upper characters problem in French
- [#4412](#)²⁷⁴³: Updated jQuery version from 3.1.0 to 3.2.1
- [#4438](#)²⁷⁴⁴: math: math with labels with whitespace cause html error
- [#2437](#)²⁷⁴⁵: make full reference for classes, aliased with “alias of”
- [#4434](#)²⁷⁴⁶: pure numbers as link targets produce warning
- [#4477](#)²⁷⁴⁷: Build fails after building specific files
- [#4449](#)²⁷⁴⁸: apidoc: include “empty” packages that contain modules

²⁷³⁴ <https://github.com/sphinx-doc/sphinx/issues/4019>

²⁷³⁵ <https://github.com/sphinx-doc/sphinx/issues/4531>

²⁷³⁶ <https://github.com/sphinx-doc/sphinx/issues/4538>

²⁷³⁷ <https://github.com/sphinx-doc/sphinx/issues/4539>

²⁷³⁸ <https://github.com/sphinx-doc/sphinx/issues/4223>

²⁷³⁹ <https://github.com/sphinx-doc/sphinx/issues/4560>

²⁷⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/4027>

²⁷⁴¹ <https://github.com/sphinx-doc/sphinx/issues/4581>

²⁷⁴² <https://github.com/sphinx-doc/sphinx/issues/1922>

²⁷⁴³ <https://github.com/sphinx-doc/sphinx/issues/4412>

²⁷⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/4438>

²⁷⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/2437>

²⁷⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/4434>

²⁷⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/4477>

²⁷⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/4449>

- [#3917²⁷⁴⁹](#): citation labels are transformed to ellipsis
- [#4501²⁷⁵⁰](#): graphviz: epub3 validation error caused if graph is not clickable
- [#4514²⁷⁵¹](#): graphviz: workaround for wrong map ID which graphviz generates
- [#4525²⁷⁵²](#): autosectionlabel does not support parallel build
- [#3953²⁷⁵³](#): Do not raise warning when there is a working intersphinx inventory
- [#4487²⁷⁵⁴](#): math: ValueError is raised on parallel build. Thanks to jschueller.
- [#2372²⁷⁵⁵](#): autosummary: invalid signatures are shown for type annotated functions
- [#3942²⁷⁵⁶](#): html: table is not aligned to center even if `:align: center`

14.110 Release 1.6.6 (released Jan 08, 2018)

Features added

- [#4181²⁷⁵⁷](#): autodoc: Sort dictionary keys when possible
- `VerbatimHighlightColor` is a new *LaTeX* ‘*sphinxsetup*’ key (refs: [#4285²⁷⁵⁸](#))
- Easier customizability of LaTeX macros involved in rendering of code-blocks
- Show traceback if `conf.py` raises an exception (refs: [#4369²⁷⁵⁹](#))
- Add `smartquotes` to disable smart quotes through `conf.py` (refs: [#3967²⁷⁶⁰](#))
- Add `smartquotes_action` and `smartquotes_excludes` (refs: [#4142²⁷⁶¹](#), [#4357²⁷⁶²](#))

Bugs fixed

- [#4334²⁷⁶³](#): sphinx-apidoc: Don’t generate references to non-existing files in TOC
- [#4206²⁷⁶⁴](#): latex: reST label between paragraphs loses paragraph break
- [#4231²⁷⁶⁵](#): html: Apply `fixFirefoxAnchorBug` only under Firefox
- [#4221²⁷⁶⁶](#): `napoleon` depends on `autodoc`, but users need to load it manually
- [#2298²⁷⁶⁷](#): `automodule` fails to document a class attribute

²⁷⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/3917>

²⁷⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/4501>

²⁷⁵¹ <https://github.com/sphinx-doc/sphinx/issues/4514>

²⁷⁵² <https://github.com/sphinx-doc/sphinx/issues/4525>

²⁷⁵³ <https://github.com/sphinx-doc/sphinx/issues/3953>

²⁷⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/4487>

²⁷⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/2372>

²⁷⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/3942>

²⁷⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/4181>

²⁷⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/4285>

²⁷⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/4369>

²⁷⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/3967>

²⁷⁶¹ <https://github.com/sphinx-doc/sphinx/issues/4142>

²⁷⁶² <https://github.com/sphinx-doc/sphinx/issues/4357>

²⁷⁶³ <https://github.com/sphinx-doc/sphinx/issues/4334>

²⁷⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/4206>

²⁷⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/4231>

²⁷⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/4221>

²⁷⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/2298>

- [#4099](#)²⁷⁶⁸: C++: properly link class reference to class from inside constructor
- [#4267](#)²⁷⁶⁹: PDF build broken by Unicode U+2116 NUMERO SIGN character
- [#4249](#)²⁷⁷⁰: PDF output: Pygments error highlighting increases line spacing in code blocks
- [#1238](#)²⁷⁷¹: Support `:emphasize-lines:` in PDF output
- [#4279](#)²⁷⁷²: Sphinx crashes with pickling error when run with multiple processes and remote image
- [#1421](#)²⁷⁷³: Respect the quiet flag in sphinx-quickstart
- [#4281](#)²⁷⁷⁴: Race conditions when creating output directory
- [#4315](#)²⁷⁷⁵: For PDF ‘howto’ documents, `latex_toplevel_sectioning='part'` generates `\chapter` commands
- [#4214](#)²⁷⁷⁶: Two todoclist directives break Sphinx 1.6.5
- Fix links to external option docs with intersphinx (refs: [#3769](#)²⁷⁷⁷)
- [#4091](#)²⁷⁷⁸: Private members not documented without `:undoc-members:`

14.111 Release 1.6.5 (released Oct 23, 2017)

Features added

- [#4107](#)²⁷⁷⁹: Make searchtools.js compatible with pre-Sphinx1.5 templates
- [#4112](#)²⁷⁸⁰: Don’t override the `smart_quotes` setting if it was already set
- [#4125](#)²⁷⁸¹: Display reference texts of original and translated passages on i18n warning message
- [#4147](#)²⁷⁸²: Include the exception when logging PO/MO file read/write

²⁷⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/4099>

²⁷⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/4267>

²⁷⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/4249>

²⁷⁷¹ <https://github.com/sphinx-doc/sphinx/issues/1238>

²⁷⁷² <https://github.com/sphinx-doc/sphinx/issues/4279>

²⁷⁷³ <https://github.com/sphinx-doc/sphinx/issues/1421>

²⁷⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/4281>

²⁷⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/4315>

²⁷⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/4214>

²⁷⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/3769>

²⁷⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/4091>

²⁷⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/4107>

²⁷⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/4112>

²⁷⁸¹ <https://github.com/sphinx-doc/sphinx/issues/4125>

²⁷⁸² <https://github.com/sphinx-doc/sphinx/issues/4147>

Bugs fixed

- [#4085](#)²⁷⁸³: Failed PDF build from image in parsed-literal using `:align:` option
- [#4100](#)²⁷⁸⁴: Remove debug print from autodoc extension
- [#3987](#)²⁷⁸⁵: Changing theme from `alabaster` causes HTML build to fail
- [#4096](#)²⁷⁸⁶: C++, don't crash when using the wrong role type. Thanks to mitya57.
- [#4070](#)²⁷⁸⁷, [#4111](#)²⁷⁸⁸: crashes when the warning message contains format strings (again)
- [#4108](#)²⁷⁸⁹: Search word highlighting breaks SVG images
- [#3692](#)²⁷⁹⁰: Unable to build HTML if writing `.buildinfo` failed
- [#4152](#)²⁷⁹¹: HTML writer crashes if a field list is placed on top of the document
- [#4063](#)²⁷⁹²: Sphinx crashes when labeling directive `.. todolist::`
- [#4134](#)²⁷⁹³: `[doc] docutils.conf` is not documented explicitly
- [#4169](#)²⁷⁹⁴: Chinese language doesn't trigger Chinese search automatically
- [#1020](#)²⁷⁹⁵: `ext.todo` `todolist` not linking to the page in `pdflatex`
- [#3965](#)²⁷⁹⁶: New quickstart generates wrong `SPHINXBUILD` in Makefile
- [#3739](#)²⁷⁹⁷: `:module:` option is ignored at content of `pyobjects`
- [#4149](#)²⁷⁹⁸: Documentation: Help choosing `latex_engine`
- [#4090](#)²⁷⁹⁹: `[doc] latex_additional_files` with extra LaTeX macros should not use `.tex` extension
- Failed to convert reST parser error to warning (refs: [#4132](#)²⁸⁰⁰)

²⁷⁸³ <https://github.com/sphinx-doc/sphinx/issues/4085>

²⁷⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/4100>

²⁷⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/3987>

²⁷⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/4096>

²⁷⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/4070>

²⁷⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/4111>

²⁷⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/4108>

²⁷⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/3692>

²⁷⁹¹ <https://github.com/sphinx-doc/sphinx/issues/4152>

²⁷⁹² <https://github.com/sphinx-doc/sphinx/issues/4063>

²⁷⁹³ <https://github.com/sphinx-doc/sphinx/issues/4134>

²⁷⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/4169>

²⁷⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/1020>

²⁷⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/3965>

²⁷⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/3739>

²⁷⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/4149>

²⁷⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/4090>

²⁸⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/4132>

14.112 Release 1.6.4 (released Sep 26, 2017)

Features added

- [#3926](#)²⁸⁰¹: Add `autodoc_warningiserror` to suppress the behavior of `-W` option during importing target modules on autodoc

Bugs fixed

- [#3924](#)²⁸⁰²: docname lost after dynamically parsing RST in extension
- [#3946](#)²⁸⁰³: Typo in `sphinx.sty` (this was a bug with no effect in default context)
- **pep**
and `:rfc:` does not supports `default-role` directive (refs: [#3960](#)²⁸⁰⁴)
- [#3960](#)²⁸⁰⁵: `default_role = 'guilabel'` not functioning
- Missing `texinputs_win/Makefile` to be used in `latexpdf` builder on windows.
- [#4026](#)²⁸⁰⁶: nature: Fix macOS Safari scrollbar color
- [#3877](#)²⁸⁰⁷: Fix for C++ multiline signatures.
- [#4006](#)²⁸⁰⁸: Fix crash on parallel build
- [#3969](#)²⁸⁰⁹: private instance attributes causes `AttributeError`
- [#4041](#)²⁸¹⁰: C++, remove extra name linking in function pointers.
- [#4038](#)²⁸¹¹: C, add missing documentation of `member` role.
- [#4044](#)²⁸¹²: An empty multicolumn cell causes extra row height in PDF output
- [#4049](#)²⁸¹³: Fix typo in output of `sphinx-build -h`
- [#4062](#)²⁸¹⁴: `hashlib.sha1()` must take bytes, not unicode on Python 3
- Avoid indent after index entries in latex (refs: [#4066](#)²⁸¹⁵)
- [#4070](#)²⁸¹⁶: crashes when the warning message contains format strings
- [#4067](#)²⁸¹⁷: Return non-zero exit status when make subprocess fails
- [#4055](#)²⁸¹⁸: `graphviz`: the `:align:` option does not work for SVG output

²⁸⁰¹ <https://github.com/sphinx-doc/sphinx/issues/3926>

²⁸⁰² <https://github.com/sphinx-doc/sphinx/issues/3924>

²⁸⁰³ <https://github.com/sphinx-doc/sphinx/issues/3946>

²⁸⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/3960>

²⁸⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/3960>

²⁸⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/4026>

²⁸⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/3877>

²⁸⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/4006>

²⁸⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/3969>

²⁸¹⁰ <https://github.com/sphinx-doc/sphinx/issues/4041>

²⁸¹¹ <https://github.com/sphinx-doc/sphinx/issues/4038>

²⁸¹² <https://github.com/sphinx-doc/sphinx/issues/4044>

²⁸¹³ <https://github.com/sphinx-doc/sphinx/issues/4049>

²⁸¹⁴ <https://github.com/sphinx-doc/sphinx/issues/4062>

²⁸¹⁵ <https://github.com/sphinx-doc/sphinx/issues/4066>

²⁸¹⁶ <https://github.com/sphinx-doc/sphinx/issues/4070>

²⁸¹⁷ <https://github.com/sphinx-doc/sphinx/issues/4067>

²⁸¹⁸ <https://github.com/sphinx-doc/sphinx/issues/4055>

- #4055²⁸¹⁹: graphviz: the :align: center option does not work for latex output
- #4051²⁸²⁰: warn() function for HTML theme outputs ‘None’ string

14.113 Release 1.6.3 (released Jul 02, 2017)

Features added

- latex: hint that code-block continues on next page (refs: #3764²⁸²¹, #3792²⁸²²)

Bugs fixed

- #3821²⁸²³: Failed to import sphinx.util.compat with Docutils 0.14rc1
- #3829²⁸²⁴: sphinx-quickstart template is incomplete regarding use of alabaster
- #3772²⁸²⁵: ‘str object’ has no attribute ‘filename’
- Emit wrong warnings if citation label includes hyphens (refs: #3565²⁸²⁶)
- #3858²⁸²⁷: Some warnings are not colored when using –color option
- #3775²⁸²⁸: Remove unwanted whitespace in default template
- #3835²⁸²⁹: sphinx.ext.imgmath fails to convert SVG images if project directory name contains spaces
- #3850²⁸³⁰: Fix color handling in make mode’s help command
- #3865²⁸³¹: use of self.env.warn in Sphinx extension fails
- #3824²⁸³²: production lists apply smart quotes transform since Sphinx 1.6.1
- latex: fix \sphinxbfcode swallows initial space of argument
- #3878²⁸³³: Quotes in auto-documented class attributes should be straight quotes in PDF output
- #3881²⁸³⁴: LaTeX figure floated to next page sometimes leaves extra vertical whitespace
- #3885²⁸³⁵: duplicated footnotes raises IndexError
- #3873²⁸³⁶: Failure of deprecation warning mechanism of sphinx.util.compat.Directive
- #3874²⁸³⁷: Bogus warnings for “citation not referenced” for cross-file citations

²⁸¹⁹ <https://github.com/sphinx-doc/sphinx/issues/4055>

²⁸²⁰ <https://github.com/sphinx-doc/sphinx/issues/4051>

²⁸²¹ <https://github.com/sphinx-doc/sphinx/issues/3764>

²⁸²² <https://github.com/sphinx-doc/sphinx/issues/3792>

²⁸²³ <https://github.com/sphinx-doc/sphinx/issues/3821>

²⁸²⁴ <https://github.com/sphinx-doc/sphinx/issues/3829>

²⁸²⁵ <https://github.com/sphinx-doc/sphinx/issues/3772>

²⁸²⁶ <https://github.com/sphinx-doc/sphinx/issues/3565>

²⁸²⁷ <https://github.com/sphinx-doc/sphinx/issues/3858>

²⁸²⁸ <https://github.com/sphinx-doc/sphinx/issues/3775>

²⁸²⁹ <https://github.com/sphinx-doc/sphinx/issues/3835>

²⁸³⁰ <https://github.com/sphinx-doc/sphinx/issues/3850>

²⁸³¹ <https://github.com/sphinx-doc/sphinx/issues/3865>

²⁸³² <https://github.com/sphinx-doc/sphinx/issues/3824>

²⁸³³ <https://github.com/sphinx-doc/sphinx/issues/3878>

²⁸³⁴ <https://github.com/sphinx-doc/sphinx/issues/3881>

²⁸³⁵ <https://github.com/sphinx-doc/sphinx/issues/3885>

²⁸³⁶ <https://github.com/sphinx-doc/sphinx/issues/3873>

²⁸³⁷ <https://github.com/sphinx-doc/sphinx/issues/3874>

- [#3860](#)²⁸³⁸: Don't download images when builders not supported images
- [#3860](#)²⁸³⁹: Remote image URIs without filename break builders not supported remote images
- [#3833](#)²⁸⁴⁰: command line messages are translated unintentionally with language setting.
- [#3840](#)²⁸⁴¹: make checking epub_uid strict
- [#3851](#)²⁸⁴², [#3706](#)²⁸⁴³: Fix about box drawing characters for PDF output
- [#3900](#)²⁸⁴⁴: autosummary could not find methods
- [#3902](#)²⁸⁴⁵: Emit error if latex_documents contains non-unicode string in py2

14.114 Release 1.6.2 (released May 28, 2017)

Incompatible changes

- [#3789](#)²⁸⁴⁶: Do not require typing module for python>=3.5

Bugs fixed

- [#3754](#)²⁸⁴⁷: HTML builder crashes if HTML theme appends own stylesheets
- [#3756](#)²⁸⁴⁸: epub: Entity 'mdash' not defined
- [#3758](#)²⁸⁴⁹: Sphinx crashed if logs are emitted in conf.py
- [#3755](#)²⁸⁵⁰: incorrectly warns about dedent with literalinclude
- [#3742](#)²⁸⁵¹: [RTD](#)²⁸⁵² PDF builds of Sphinx own docs are missing an index entry in the bookmarks and table of contents. This is [rtfd/readthedocs.org`#2857](#)²⁸⁵³ <<https://github.com/rtfd/readthedocs.org/issues/2857>>`_ issue, a workaround is obtained using some extra LaTeX code in Sphinx's own `conf.py`
- [#3770](#)²⁸⁵⁴: Build fails when a "code-block" has the option `emphasize-lines` and the number indicated is higher than the number of lines
- [#3774](#)²⁸⁵⁵: Incremental HTML building broken when using citations
- [#3763](#)²⁸⁵⁶: got epubcheck validations error if `epub_cover` is set

²⁸³⁸ <https://github.com/sphinx-doc/sphinx/issues/3860>

²⁸³⁹ <https://github.com/sphinx-doc/sphinx/issues/3860>

²⁸⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/3833>

²⁸⁴¹ <https://github.com/sphinx-doc/sphinx/issues/3840>

²⁸⁴² <https://github.com/sphinx-doc/sphinx/issues/3851>

²⁸⁴³ <https://github.com/sphinx-doc/sphinx/issues/3706>

²⁸⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/3900>

²⁸⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/3902>

²⁸⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/3789>

²⁸⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/3754>

²⁸⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/3756>

²⁸⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/3758>

²⁸⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/3755>

²⁸⁵¹ <https://github.com/sphinx-doc/sphinx/issues/3742>

²⁸⁵² <https://readthedocs.org/>

²⁸⁵³ <https://github.com/sphinx-doc/sphinx/issues/2857>

²⁸⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/3770>

²⁸⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/3774>

²⁸⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/3763>

- [#3779](#)²⁸⁵⁷: ‘ImportError’ in sphinx.ext.autodoc due to broken ‘sys.meta_path’. Thanks to Tatiana Tereshchenko.
- [#3796](#)²⁸⁵⁸: env.resolve_references() crashes when non-document node given
- [#3803](#)²⁸⁵⁹: Sphinx crashes with invalid PO files
- [#3791](#)²⁸⁶⁰: PDF “continued on next page” for long tables isn’t internationalized
- [#3788](#)²⁸⁶¹: smartquotes emits warnings for unsupported languages
- [#3807](#)²⁸⁶²: latex Makefile for make `latexpdf` is only for unixen
- [#3781](#)²⁸⁶³: double hyphens in option directive are compiled as endashes
- [#3817](#)²⁸⁶⁴: latex builder raises AttributeError

14.115 Release 1.6.1 (released May 16, 2017)

Dependencies

1.6b1

- (updated) latex output is tested with Ubuntu trusty’s texlive packages (Feb. 2014) and earlier tex installations may not be fully compliant, particularly regarding Unicode engines xelatex and lualatex
- (added) latexmk is required for make `latexpdf` on GNU/Linux and Mac OS X (refs: [#3082](#)²⁸⁶⁵)

Incompatible changes

1.6b1

- [#1061](#)²⁸⁶⁶, [#2336](#)²⁸⁶⁷, [#3235](#)²⁸⁶⁸: Now generation of autosummary doesn’t contain imported members by default. Thanks to Luc Saffre.
- LaTeX `\includegraphics` command isn’t overloaded: only `\sphinxincludegraphics` has the custom code to fit image to available width if oversized.
- The subclasses of `sphinx.domains.Index` should override `generate()` method. The default implementation raises `NotImplementedError`
- LaTeX positioned long tables horizontally centered, and short ones flushed left (no text flow around table.) The position now defaults to center in both cases, and it will obey Docutils 0.13 `:align:` option (refs [#3415](#)²⁸⁶⁹, [#3377](#)²⁸⁷⁰)
- option directive also allows all punctuations for the option name (refs: [#3366](#)²⁸⁷¹)

²⁸⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/3779>

²⁸⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/3796>

²⁸⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/3803>

²⁸⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/3791>

²⁸⁶¹ <https://github.com/sphinx-doc/sphinx/issues/3788>

²⁸⁶² <https://github.com/sphinx-doc/sphinx/issues/3807>

²⁸⁶³ <https://github.com/sphinx-doc/sphinx/issues/3781>

²⁸⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/3817>

²⁸⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/3082>

²⁸⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/1061>

²⁸⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/2336>

²⁸⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/3235>

²⁸⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/3415>

²⁸⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/3377>

²⁸⁷¹ <https://github.com/sphinx-doc/sphinx/issues/3366>

- [#3413](#)²⁸⁷²: if `literalinclude`'s `:start-after:` is used, make `:lines:` relative (refs [#3412](#)²⁸⁷³)
- `literalinclude` directive does not allow the combination of `:diff:` option and other options (refs: [#3416](#)²⁸⁷⁴)
- LuaLaTeX engine uses `fontspec` like XeLaTeX. It is advised `latex_engine = 'lualatex'` be used only on up-to-date TeX installs (refs [#3070](#)²⁸⁷⁵, [#3466](#)²⁸⁷⁶)
- `latex_keep_old_macro_names` default value has been changed from `True` to `False`. This means that some LaTeX macros for styling are by default defined only with `\sphinx..` prefixed names. (refs: [#3429](#)²⁸⁷⁷)
- Footer “Continued on next page” of LaTeX `longtable`'s now not framed (refs: [#3497](#)²⁸⁷⁸)
- [#3529](#)²⁸⁷⁹: The arguments of `BuildEnvironment.__init__` is changed
- [#3082](#)²⁸⁸⁰: Use `latexmk` for pdf (and dvi) targets (Unix-like platforms only)
- [#3558](#)²⁸⁸¹: Emit warnings if footnotes and citations are not referenced. The warnings can be suppressed by `suppress_warnings`.
- `latex` made available (non documented) colour macros from a file distributed with `pdftex` engine for Plain TeX. This is removed in order to provide better support for multiple TeX engines. Only interface from `color` or `xcolor` packages should be used by extensions of Sphinx latex writer. (refs [#3550](#)²⁸⁸²)
- `Builder.env` is not filled at instantiation
- [#3594](#)²⁸⁸³: LaTeX: single raw directive has been considered as block level element
- [#3639](#)²⁸⁸⁴: If `html_experimental_html5_writer` is available, epub builder use it by default.
- `Sphinx.add_source_parser()` raises an error if duplicated

1.6b2

- [#3345](#)²⁸⁸⁵: Replace the custom `smartyants` code with Docutils' `smart_quotes`. Thanks to Dmitry Shachnev, and to Günter Milde at Docutils.

1.6b3

- LaTeX package `eqparbox` is not used and not loaded by Sphinx anymore
- LaTeX package `multirow` is not used and not loaded by Sphinx anymore
- Add line numbers to citation data in std domain

1.6 final

- LaTeX package `threeparttable` is not used and not loaded by Sphinx anymore (refs [#3686](#)²⁸⁸⁶, [#3532](#)²⁸⁸⁷, [#3377](#)²⁸⁸⁸)

²⁸⁷² <https://github.com/sphinx-doc/sphinx/issues/3413>

²⁸⁷³ <https://github.com/sphinx-doc/sphinx/issues/3412>

²⁸⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/3416>

²⁸⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/3070>

²⁸⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/3466>

²⁸⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/3429>

²⁸⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/3497>

²⁸⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/3529>

²⁸⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/3082>

²⁸⁸¹ <https://github.com/sphinx-doc/sphinx/issues/3558>

²⁸⁸² <https://github.com/sphinx-doc/sphinx/issues/3550>

²⁸⁸³ <https://github.com/sphinx-doc/sphinx/issues/3594>

²⁸⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/3639>

²⁸⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/3345>

²⁸⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/3686>

²⁸⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/3532>

²⁸⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/3377>

Features removed

- Configuration variables
 - `epub3_contributor`
 - `epub3_description`
 - `epub3_page_progression_direction`
 - `html_translator_class`
 - `html_use_modindex`
 - `latex_font_size`
 - `latex_paper_size`
 - `latex_preamble`
 - `latex_use_modindex`
 - `latex_use_parts`
- `termsep` node
- `defindex.html` template
- LDML format support in `today`, `today_fmt` and `html_last_updated_fmt`
- `:inline:` option for the directives of `sphinx.ext.graphviz` extension
- `sphinx.ext.pngmath` extension
- `sphinx.util.compat.make_admonition()`

Features added

1.6b1

- [#3136](https://github.com/sphinx-doc/sphinx/issues/3136)²⁸⁸⁹: Add `:name:` option to the directives in `sphinx.ext.graphviz`
- [#2336](https://github.com/sphinx-doc/sphinx/issues/2336)²⁸⁹⁰: Add `imported_members` option to `sphinx-autogen` command to document imported members.
- C++, add `:tparam-line-spec:` option to templated declarations. When specified, each template parameter will be rendered on a separate line.
- [#3359](https://github.com/sphinx-doc/sphinx/issues/3359)²⁸⁹¹: Allow `sphinx.js` in a user locale dir to override `sphinx.js` from Sphinx
- [#3303](https://github.com/sphinx-doc/sphinx/issues/3303)²⁸⁹²: Add `:pyversion:` option to the `doctest` directive.
- [#3378](https://github.com/sphinx-doc/sphinx/issues/3378)²⁸⁹³: (latex) support for `:widths:` option of table directives (refs: [#3379](https://github.com/sphinx-doc/sphinx/issues/3379)²⁸⁹⁴, [#3381](https://github.com/sphinx-doc/sphinx/issues/3381)²⁸⁹⁵)
- [#3402](https://github.com/sphinx-doc/sphinx/issues/3402)²⁸⁹⁶: Allow to suppress “download file not readable” warnings using `suppress_warnings`.
- [#3377](https://github.com/sphinx-doc/sphinx/issues/3377)²⁸⁹⁷: latex: Add support for Docutils 0.13 `:align:` option for tables (but does not implement text flow around table).

²⁸⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/3136>

²⁸⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/2336>

²⁸⁹¹ <https://github.com/sphinx-doc/sphinx/issues/3359>

²⁸⁹² <https://github.com/sphinx-doc/sphinx/issues/3303>

²⁸⁹³ <https://github.com/sphinx-doc/sphinx/issues/3378>

²⁸⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/3379>

²⁸⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/3381>

²⁸⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/3402>

²⁸⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/3377>

- latex: footnotes from inside tables are hyperlinked (except from captions or headers) (refs: #3422²⁸⁹⁸)
- Emit warning if over dedent has detected on `literalinclude` directive (refs: #3416²⁸⁹⁹)
- Use for LuaLaTeX same default settings as for XeLaTeX (i.e. `fontspec` and `polyglossia`). (refs: #3070²⁹⁰⁰, #3466²⁹⁰¹)
- Make 'extraclassoptions' key of `latex_elements` public (refs #3480²⁹⁰²)
- #3463²⁹⁰³: Add warning messages for required EPUB3 metadata. Add default value to `epub_description` to avoid warning like other settings.
- #3476²⁹⁰⁴: `setuptools`: Support multiple builders
- latex: merged cells in LaTeX tables allow code-blocks, lists, blockquotes... as do normal cells (refs: #3435²⁹⁰⁵)
- HTML builder uses experimental HTML5 writer if `html_experimental_html5_writer` is True and Docutils 0.13 or later is installed.
- LaTeX macros to customize space before and after tables in PDF output (refs #3504²⁹⁰⁶)
- #3348²⁹⁰⁷: Show decorators in `literalinclude` and `viewcode` directives
- #3108²⁹⁰⁸: Show warning if `:start-at:` and other `literalinclude` options does not match to the text
- #3609²⁹⁰⁹: Allow to suppress “duplicate citation” warnings using `suppress_warnings`
- #2803²⁹¹⁰: Discovery of builders by entry point
- #1764²⁹¹¹, #1676²⁹¹²: Allow setting 'rel' and 'title' attributes for stylesheets
- #3589²⁹¹³: Support remote images on non-HTML builders
- #3589²⁹¹⁴: Support images in Data URI on non-HTML builders
- #2961²⁹¹⁵: improve `autodoc_mock_imports`. Now the config value only requires to declare the top-level modules that should be mocked. Thanks to Robin Jarry.
- #3449²⁹¹⁶: On py3, `autodoc` use `inspect.signature` for more accurate signature calculation. Thanks to Nathaniel J. Smith.
- #3641²⁹¹⁷: Epub theme supports HTML structures that are generated by HTML5 writer.
- #3644²⁹¹⁸ `autodoc` uses `inspect` instead of checking types. Thanks to Jeroen Demeyer.

²⁸⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/3422>

²⁸⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/3416>

²⁹⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/3070>

²⁹⁰¹ <https://github.com/sphinx-doc/sphinx/issues/3466>

²⁹⁰² <https://github.com/sphinx-doc/sphinx/issues/3480>

²⁹⁰³ <https://github.com/sphinx-doc/sphinx/issues/3463>

²⁹⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/3476>

²⁹⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/3435>

²⁹⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/3504>

²⁹⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/3348>

²⁹⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/3108>

²⁹⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/3609>

²⁹¹⁰ <https://github.com/sphinx-doc/sphinx/issues/2803>

²⁹¹¹ <https://github.com/sphinx-doc/sphinx/issues/1764>

²⁹¹² <https://github.com/sphinx-doc/sphinx/issues/1676>

²⁹¹³ <https://github.com/sphinx-doc/sphinx/issues/3589>

²⁹¹⁴ <https://github.com/sphinx-doc/sphinx/issues/3589>

²⁹¹⁵ <https://github.com/sphinx-doc/sphinx/issues/2961>

²⁹¹⁶ <https://github.com/sphinx-doc/sphinx/issues/3449>

²⁹¹⁷ <https://github.com/sphinx-doc/sphinx/issues/3641>

²⁹¹⁸ <https://github.com/sphinx-doc/sphinx/issues/3644>

- Add a new extension; `sphinx.ext.imgconverter`. It converts images in the document to appropriate format for builders
- latex: Use templates to render tables (refs [#3389](#)²⁹¹⁹, [2a37b0e](#))

1.6b2

- LATEXMKOPTS variable for the Makefile in `$BUILDDIR/latex` to pass options to `latexmk` when executing `make latexpdf` (refs [#3695](#)²⁹²⁰, [#3720](#)²⁹²¹)
- Add a new event `env-check-consistency` to check consistency to extensions
- Add `Domain.check_consistency()` to check consistency

Bugs fixed

1.6b1

- `literalinclude` directive expands tabs after dedent-ing (refs: [#3416](#)²⁹²²)
- [#1574](#)²⁹²³: Paragraphs in table cell doesn't work in Latex output
- [#3288](#)²⁹²⁴: Table with merged headers not wrapping text
- [#3491](#)²⁹²⁵: Inconsistent vertical space around table and longtable in PDF
- [#3506](#)²⁹²⁶: Depart functions for all admonitions in HTML writer now properly pass `node` to `depart_admonition`.
- [#2693](#)²⁹²⁷: Sphinx latex style file wrongly inhibits colours for section headings for latex+dvi(ps,pdf,pdfmx)
- C++, properly look up any references.
- [#3624](#)²⁹²⁸: `sphinx.ext.intersphinx` couldn't load inventories compressed with gzip
- [#3551](#)²⁹²⁹: PDF information dictionary is lacking author and title data
- [#3351](#)²⁹³⁰: `intersphinx` does not refers context like `py:module`, `py:class` and so on.
- Fail to load template file if the parent template is archived

1.6b2

- [#3661](#)²⁹³¹: `sphinx-build` crashes on parallel build
- [#3669](#)²⁹³²: `gettext` builder fails with "ValueError: substring not found"
- [#3660](#)²⁹³³: Sphinx always depends on `sphinxcontrib-websupport` and its dependencies

²⁹¹⁹ <https://github.com/sphinx-doc/sphinx/issues/3389>²⁹²⁰ <https://github.com/sphinx-doc/sphinx/issues/3695>²⁹²¹ <https://github.com/sphinx-doc/sphinx/issues/3720>²⁹²² <https://github.com/sphinx-doc/sphinx/issues/3416>²⁹²³ <https://github.com/sphinx-doc/sphinx/issues/1574>²⁹²⁴ <https://github.com/sphinx-doc/sphinx/issues/3288>²⁹²⁵ <https://github.com/sphinx-doc/sphinx/issues/3491>²⁹²⁶ <https://github.com/sphinx-doc/sphinx/issues/3506>²⁹²⁷ <https://github.com/sphinx-doc/sphinx/issues/2693>²⁹²⁸ <https://github.com/sphinx-doc/sphinx/issues/3624>²⁹²⁹ <https://github.com/sphinx-doc/sphinx/issues/3551>²⁹³⁰ <https://github.com/sphinx-doc/sphinx/issues/3351>²⁹³¹ <https://github.com/sphinx-doc/sphinx/issues/3661>²⁹³² <https://github.com/sphinx-doc/sphinx/issues/3669>²⁹³³ <https://github.com/sphinx-doc/sphinx/issues/3660>

- [#3472](#)²⁹³⁴: smart quotes getting wrong in latex (at least with list of strings via autoattribute) (refs: [#3345](#)²⁹³⁵, [#3666](#)²⁹³⁶)

1.6b3

- [#3588](#)²⁹³⁷: No compact (p tag) html output in the i18n document build even when `html_compact_lists` is `True`.
- The `make latexpdf` from 1.6b1 (for GNU/Linux and Mac OS, using `latexmk`) aborted earlier in case of LaTeX errors than was the case with 1.5 series, due to hard-coded usage of `--halt-on-error` option (refs [#3695](#)²⁹³⁸)
- [#3683](#)²⁹³⁹: `sphinx.websupport` module is not provided by default
- [#3683](#)²⁹⁴⁰: Failed to build document if `builder.css_file.insert()` is called
- [#3714](#)²⁹⁴¹: `viewcode` extension not taking `highlight_code='none'` in account
- [#3698](#)²⁹⁴²: Moving `:doc:` to std domain broke backwards compatibility
- [#3633](#)²⁹⁴³: misdetect unreferenced citations

1.6 final

- LaTeX tables do not allow multiple paragraphs in a header cell
- `LATEXOPTS` is not passed over correctly to `pdflatex` since 1.6b3
- [#3532](#)²⁹⁴⁴: Figure or literal block captions in cells of short tables cause havoc in PDF output
- Fix: in PDF captions of tables are rendered differently whether table is of `longtable` class or not (refs [#3686](#)²⁹⁴⁵)
- [#3725](#)²⁹⁴⁶: `Todo` looks different from note in LaTeX output
- [#3479](#)²⁹⁴⁷: `stub-columns` have no effect in LaTeX output
- [#3738](#)²⁹⁴⁸: Nonsensical code in `theming.py`
- [#3746](#)²⁹⁴⁹: PDF builds fail with `latexmk` 4.48 or earlier due to undefined options `-pdfxe` and `-pdflua`

²⁹³⁴ <https://github.com/sphinx-doc/sphinx/issues/3472>

²⁹³⁵ <https://github.com/sphinx-doc/sphinx/issues/3345>

²⁹³⁶ <https://github.com/sphinx-doc/sphinx/issues/3666>

²⁹³⁷ <https://github.com/sphinx-doc/sphinx/issues/3588>

²⁹³⁸ <https://github.com/sphinx-doc/sphinx/issues/3695>

²⁹³⁹ <https://github.com/sphinx-doc/sphinx/issues/3683>

²⁹⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/3683>

²⁹⁴¹ <https://github.com/sphinx-doc/sphinx/issues/3714>

²⁹⁴² <https://github.com/sphinx-doc/sphinx/issues/3698>

²⁹⁴³ <https://github.com/sphinx-doc/sphinx/issues/3633>

²⁹⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/3532>

²⁹⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/3686>

²⁹⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/3725>

²⁹⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/3479>

²⁹⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/3738>

²⁹⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/3746>

Deprecated

1.6b1

- `sphinx.util.compat.Directive` class is now deprecated. Please use instead `docutils.parsers.rst.Directive`
- `sphinx.util.compat.docutils_version` is now deprecated
- [#2367](https://github.com/sphinx-doc/sphinx/issues/2367)²⁹⁵⁰: `Sphinx.warn()`, `Sphinx.info()` and other logging methods are now deprecated. Please use `sphinx.util.logging` (*Logging API*) instead.
- [#3318](https://github.com/sphinx-doc/sphinx/issues/3318)²⁹⁵¹: `notice` is now deprecated as LaTeX environment name and will be removed at Sphinx 1.7. Extension authors please use `sphinxadmonition` instead (as Sphinx does since 1.5.)
- `Sphinx.status_iterator()` and `Sphinx.old_status_iterator()` is now deprecated. Please use `sphinx.util:status_iterator()` instead.
- `Sphinx._directive_helper()` is deprecated. Please use `sphinx.util.docutils.directive_helper()` instead.
- `BuildEnvironment.set_warnfunc()` is now deprecated
- Following methods of `BuildEnvironment` is now deprecated.
 - `BuildEnvironment.note_toctree()`
 - `BuildEnvironment.get_toc_for()`
 - `BuildEnvironment.get_toctree_for()`
 - `BuildEnvironment.create_index()`

Please use `sphinx.environment.adapters` modules instead.

- latex package `footnote` is not loaded anymore by its bundled replacement `footnotehyper-sphinx`. The redefined macros keep the same names as in the original package.
- [#3429](https://github.com/sphinx-doc/sphinx/issues/3429)²⁹⁵²: deprecate config setting `latex_keep_old_macro_names`. It will be removed at 1.7, and already its default value has changed from `True` to `False`.
- [#3221](https://github.com/sphinx-doc/sphinx/issues/3221)²⁹⁵³: `epub2` builder is deprecated
- [#3254](https://github.com/sphinx-doc/sphinx/issues/3254)²⁹⁵⁴: `sphinx.websupport` is now separated into independent package; `sphinxcontrib-websupport`. `sphinx.websupport` will be removed in Sphinx 2.0.
- [#3628](https://github.com/sphinx-doc/sphinx/issues/3628)²⁹⁵⁵: `sphinx_themes` entry_point is deprecated. Please use `sphinx.html_themes` instead.

1.6b2

- [#3662](https://github.com/sphinx-doc/sphinx/issues/3662)²⁹⁵⁶: `builder.css_files` is deprecated. Please use `add_stylesheet()` API instead.

1.6 final

- LaTeX `\sphinxstylethead` is deprecated at 1.6 and will be removed at 1.7. Please move customization into new macro `\sphinxstyletheadfamily`.

²⁹⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/2367>

²⁹⁵¹ <https://github.com/sphinx-doc/sphinx/issues/3318>

²⁹⁵² <https://github.com/sphinx-doc/sphinx/issues/3429>

²⁹⁵³ <https://github.com/sphinx-doc/sphinx/issues/3221>

²⁹⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/3254>

²⁹⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/3628>

²⁹⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/3662>

Testing

1.6 final

- [#3458](#)²⁹⁵⁷: Add `sphinx.testing` (experimental)

14.116 Release 1.6 (unreleased)

- not released (because of package script error)

14.117 Release 1.5.6 (released May 15, 2017)

Bugs fixed

- [#3614](#)²⁹⁵⁸: Sphinx crashes with requests-2.5.0
- [#3618](#)²⁹⁵⁹: autodoc crashes with tupled arguments
- [#3664](#)²⁹⁶⁰: No space after the bullet in items of a latex list produced by Sphinx
- [#3657](#)²⁹⁶¹: EPUB builder crashes if a document starting with genindex exists
- [#3588](#)²⁹⁶²: No compact (p tag) html output in the i18n document build even when `html_compact_lists` is `True`.
- [#3685](#)²⁹⁶³: `AttributeError` when using 3rd party domains
- [#3702](#)²⁹⁶⁴: LaTeX writer styles figure legends with a hard-coded `\small`
- [#3708](#)²⁹⁶⁵: LaTeX writer allows irc scheme
- [#3717](#)²⁹⁶⁶: Stop enforcing that favicon's must be .ico
- [#3731](#)²⁹⁶⁷, [#3732](#)²⁹⁶⁸: Protect `isenumclass` predicate against non-class arguments
- [#3320](#)²⁹⁶⁹: Warning about reference target not being found for container types
- Misspelled `ARCHIVEPREFIX` in Makefile for latex build repertory

²⁹⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/3458>

²⁹⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/3614>

²⁹⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/3618>

²⁹⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/3664>

²⁹⁶¹ <https://github.com/sphinx-doc/sphinx/issues/3657>

²⁹⁶² <https://github.com/sphinx-doc/sphinx/issues/3588>

²⁹⁶³ <https://github.com/sphinx-doc/sphinx/issues/3685>

²⁹⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/3702>

²⁹⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/3708>

²⁹⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/3717>

²⁹⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/3731>

²⁹⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/3732>

²⁹⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/3320>

14.118 Release 1.5.5 (released Apr 03, 2017)

Bugs fixed

- [#3597²⁹⁷⁰](#): python domain raises UnboundLocalError if invalid name given
- [#3599²⁹⁷¹](#): Move to new MathJax CDN

14.119 Release 1.5.4 (released Apr 02, 2017)

Features added

- [#3470²⁹⁷²](#): Make genindex support all kinds of letters, not only Latin ones

Bugs fixed

- [#3445²⁹⁷³](#): setting 'inputenc' key to `\\usepackage[utf8x]{inputenc}` leads to failed PDF build
- EPUB file has duplicated `nav.xhtml` link in `content.opf` except first time build
- [#3488²⁹⁷⁴](#): `objects.inv` has broken when `release` or `version` contain return code
- [#2073²⁹⁷⁵](#), [#3443²⁹⁷⁶](#), [#3490²⁹⁷⁷](#): gettext builder that writes pot files unless the content are same without creation date. Thanks to Yoshiki Shibukawa.
- [#3487²⁹⁷⁸](#): intersphinx: failed to refer options
- [#3496²⁹⁷⁹](#): latex longtable's last column may be much wider than its contents
- [#3507²⁹⁸⁰](#): wrong quotes in latex output for `productionlist` directive
- [#3533²⁹⁸¹](#): Moving from Sphinx 1.3.1 to 1.5.3 breaks LaTeX compilation of links rendered as code
- [#2665²⁹⁸²](#), [#2607²⁹⁸³](#): Link names in C++ docfields, and make it possible for other domains.
- [#3542²⁹⁸⁴](#): C++, fix parsing error of non-type template argument with `template`.
- [#3065²⁹⁸⁵](#), [#3520²⁹⁸⁶](#): python domain fails to recognize nested class

²⁹⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/3597>

²⁹⁷¹ <https://github.com/sphinx-doc/sphinx/issues/3599>

²⁹⁷² <https://github.com/sphinx-doc/sphinx/issues/3470>

²⁹⁷³ <https://github.com/sphinx-doc/sphinx/issues/3445>

²⁹⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/3488>

²⁹⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/2073>

²⁹⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/3443>

²⁹⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/3490>

²⁹⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/3487>

²⁹⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/3496>

²⁹⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/3507>

²⁹⁸¹ <https://github.com/sphinx-doc/sphinx/issues/3533>

²⁹⁸² <https://github.com/sphinx-doc/sphinx/issues/2665>

²⁹⁸³ <https://github.com/sphinx-doc/sphinx/issues/2607>

²⁹⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/3542>

²⁹⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/3065>

²⁹⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/3520>

- [#3575²⁹⁸⁷](#): Problems with pdflatex in a Turkish document built with Sphinx has reappeared (refs [#2997²⁹⁸⁸](#), [#2397²⁹⁸⁹](#))
- [#3577²⁹⁹⁰](#): Fix intersphinx debug tool
- A LaTeX command such as `\large` inserted in the title items of `latex_documents` causes failed PDF build (refs [#3551²⁹⁹¹](#), [#3567²⁹⁹²](#))

14.120 Release 1.5.3 (released Feb 26, 2017)

Features added

- Support requests-2.0.0 (experimental) (refs: [#3367²⁹⁹³](#))
- (latex) PDF page margin dimensions may be customized (refs: [#3387²⁹⁹⁴](#))
- `literalinclude` directive allows combination of `:pyobject:` and `:lines:` options (refs: [#3416²⁹⁹⁵](#))
- [#3400²⁹⁹⁶](#): make-mode doesn't use subprocess on building docs

Bugs fixed

- [#3370²⁹⁹⁷](#): the caption of code-block is not picked up for translation
- LaTeX: `release` is not escaped (refs: [#3362²⁹⁹⁸](#))
- [#3364²⁹⁹⁹](#): sphinx-quickstart prompts overflow on Console with 80 chars width
- since 1.5, PDF's TOC and bookmarks lack an entry for general Index (refs: [#3383³⁰⁰⁰](#))
- [#3392³⁰⁰¹](#): 'releasename' in `latex_elements` is not working
- [#3356³⁰⁰²](#): Page layout for Japanese 'manual' docclass has a shorter text area
- [#3394³⁰⁰³](#): When 'pointsize' is not 10pt, Japanese 'manual' document gets wrong PDF page dimensions
- [#3399³⁰⁰⁴](#): quickstart: conf.py was not overwritten by template
- [#3366³⁰⁰⁵](#): option directive does not allow punctuations
- [#3410³⁰⁰⁶](#): return code in `release` breaks html search

²⁹⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/3575>

²⁹⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/2997>

²⁹⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/2397>

²⁹⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/3577>

²⁹⁹¹ <https://github.com/sphinx-doc/sphinx/issues/3551>

²⁹⁹² <https://github.com/sphinx-doc/sphinx/issues/3567>

²⁹⁹³ <https://github.com/sphinx-doc/sphinx/issues/3367>

²⁹⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/3387>

²⁹⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/3416>

²⁹⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/3400>

²⁹⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/3370>

²⁹⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/3362>

²⁹⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/3364>

³⁰⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/3383>

³⁰⁰¹ <https://github.com/sphinx-doc/sphinx/issues/3392>

³⁰⁰² <https://github.com/sphinx-doc/sphinx/issues/3356>

³⁰⁰³ <https://github.com/sphinx-doc/sphinx/issues/3394>

³⁰⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/3399>

³⁰⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/3366>

³⁰⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/3410>

- [#3427](#)³⁰⁰⁷: autodoc: memory addresses are not stripped on Windows
- [#3428](#)³⁰⁰⁸: xetex build tests fail due to fontspec v2.6 defining `\strong`
- [#3349](#)³⁰⁰⁹: Result of `IndexBuilder.load()` is broken
- [#3450](#)³⁰¹⁰: ` ` is appeared in EPUB docs
- [#3418](#)³⁰¹¹: Search button is misaligned in nature and pyramid theme
- [#3421](#)³⁰¹²: Could not translate a caption of tables
- [#3552](#)³⁰¹³: linkcheck raises `UnboundLocalError`

14.121 Release 1.5.2 (released Jan 22, 2017)

Incompatible changes

- Dependency requirement updates: requests 2.4.0 or above (refs: [#3268](#)³⁰¹⁴, [#3310](#)³⁰¹⁵)

Features added

- [#3241](#)³⁰¹⁶: emit latex warning if buggy titlesec (ref [#3210](#)³⁰¹⁷)
- [#3194](#)³⁰¹⁸: Refer the `$MAKE` environment variable to determine make command
- Emit warning for nested numbered toctrees (refs: [#3142](#)³⁰¹⁹)
- [#978](#)³⁰²⁰: `intersphinx_mapping` also allows a list as a parameter
- [#3340](#)³⁰²¹: (LaTeX) long lines in `parsed-literal`³⁰²² are wrapped like in `code-block`, inline math and footnotes are fully functional.

³⁰⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/3427>

³⁰⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/3428>

³⁰⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/3349>

³⁰¹⁰ <https://github.com/sphinx-doc/sphinx/issues/3450>

³⁰¹¹ <https://github.com/sphinx-doc/sphinx/issues/3418>

³⁰¹² <https://github.com/sphinx-doc/sphinx/issues/3421>

³⁰¹³ <https://github.com/sphinx-doc/sphinx/issues/3552>

³⁰¹⁴ <https://github.com/sphinx-doc/sphinx/issues/3268>

³⁰¹⁵ <https://github.com/sphinx-doc/sphinx/issues/3310>

³⁰¹⁶ <https://github.com/sphinx-doc/sphinx/issues/3241>

³⁰¹⁷ <https://github.com/sphinx-doc/sphinx/issues/3210>

³⁰¹⁸ <https://github.com/sphinx-doc/sphinx/issues/3194>

³⁰¹⁹ <https://github.com/sphinx-doc/sphinx/issues/3142>

³⁰²⁰ <https://github.com/sphinx-doc/sphinx/issues/978>

³⁰²¹ <https://github.com/sphinx-doc/sphinx/issues/3340>

³⁰²² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#parsed-literal>

Bugs fixed

- [#3246](#)³⁰²³: xapian search adapter crashes
- [#3253](#)³⁰²⁴: In Py2 environment, building another locale with a non-captioned toctree produces None captions
- [#185](#)³⁰²⁵: References to section title including raw node has broken
- [#3255](#)³⁰²⁶: In Py3.4 environment, autodoc doesn't support documentation for attributes of Enum class correctly.
- [#3261](#)³⁰²⁷: latex_use_parts makes Sphinx crash
- The warning type `misc.highlighting_failure` does not work
- [#3294](#)³⁰²⁸: `add_latex_package()` make crashes non-LaTeX builders
- The caption of table are rendered as invalid HTML (refs: [#3287](#)³⁰²⁹)
- [#3268](#)³⁰³⁰: Sphinx crashes with requests package from Debian jessie
- [#3284](#)³⁰³¹: Sphinx crashes on parallel build with an extension which raises unserializable exception
- [#3315](#)³⁰³²: Bibliography crashes on latex build with docclass 'memoir'
- [#3328](#)³⁰³³: Could not refer rubric implicitly
- [#3329](#)³⁰³⁴: emit warnings if po file is invalid and can't read it. Also writing mo
- [#3337](#)³⁰³⁵: Ugly rendering of definition list term's classifier
- [#3335](#)³⁰³⁶: gettext does not extract field_name of a field in a field_list
- [#2952](#)³⁰³⁷: C++, fix refs to operator() functions.
- Fix Unicode super- and subscript digits in `code-block` and parsed-literal LaTeX output (ref [#3342](#)³⁰³⁸)
- LaTeX writer: leave " character inside parsed-literal as is (ref [#3341](#)³⁰³⁹)
- [#3234](#)³⁰⁴⁰: intersphinx failed for encoded inventories
- [#3158](#)³⁰⁴¹: too much space after captions in PDF output
- [#3317](#)³⁰⁴²: An URL in parsed-literal contents gets wrongly rendered in PDF if with hyphen
- LaTeX crash if the filename of an image inserted in parsed-literal via a substitution contains an hyphen (ref [#3340](#)³⁰⁴³)

³⁰²³ <https://github.com/sphinx-doc/sphinx/issues/3246>

³⁰²⁴ <https://github.com/sphinx-doc/sphinx/issues/3253>

³⁰²⁵ <https://github.com/sphinx-doc/sphinx/issues/185>

³⁰²⁶ <https://github.com/sphinx-doc/sphinx/issues/3255>

³⁰²⁷ <https://github.com/sphinx-doc/sphinx/issues/3261>

³⁰²⁸ <https://github.com/sphinx-doc/sphinx/issues/3294>

³⁰²⁹ <https://github.com/sphinx-doc/sphinx/issues/3287>

³⁰³⁰ <https://github.com/sphinx-doc/sphinx/issues/3268>

³⁰³¹ <https://github.com/sphinx-doc/sphinx/issues/3284>

³⁰³² <https://github.com/sphinx-doc/sphinx/issues/3315>

³⁰³³ <https://github.com/sphinx-doc/sphinx/issues/3328>

³⁰³⁴ <https://github.com/sphinx-doc/sphinx/issues/3329>

³⁰³⁵ <https://github.com/sphinx-doc/sphinx/issues/3337>

³⁰³⁶ <https://github.com/sphinx-doc/sphinx/issues/3335>

³⁰³⁷ <https://github.com/sphinx-doc/sphinx/issues/2952>

³⁰³⁸ <https://github.com/sphinx-doc/sphinx/issues/3342>

³⁰³⁹ <https://github.com/sphinx-doc/sphinx/issues/3341>

³⁰⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/3234>

³⁰⁴¹ <https://github.com/sphinx-doc/sphinx/issues/3158>

³⁰⁴² <https://github.com/sphinx-doc/sphinx/issues/3317>

³⁰⁴³ <https://github.com/sphinx-doc/sphinx/issues/3340>

- LaTeX rendering of inserted footnotes in parsed-literal is wrong (ref #3340³⁰⁴⁴)
- Inline math in parsed-literal is not rendered well by LaTeX (ref #3340³⁰⁴⁵)
- #3308³⁰⁴⁶: Parsed-literals don't wrap very long lines with pdf builder (ref #3340³⁰⁴⁷)
- #3295³⁰⁴⁸: Could not import extension sphinx.builders.linkcheck
- #3285³⁰⁴⁹: autosummary: asterisks are escaped twice
- LaTeX, pass dvipdfm option to geometry package for Japanese documents (ref #3363³⁰⁵⁰)
- Fix parselinenos() could not parse left half open range (cf. “-4”)

14.122 Release 1.5.1 (released Dec 13, 2016)

Features added

- #3214³⁰⁵¹: Allow to suppress “unknown mimetype” warnings from epub builder using `suppress_warnings`.

Bugs fixed

- #3195³⁰⁵²: Can not build in parallel
- #3198³⁰⁵³: AttributeError is raised when toctree has ‘self’
- #3211³⁰⁵⁴: Remove untranslated Sphinx locale catalogs (it was covered by untranslated it_IT)
- #3212³⁰⁵⁵: HTML Builders crashes with Docutils 0.13
- #3207³⁰⁵⁶: more latex problems with references inside parsed-literal directive (`\DUrole`)
- #3205³⁰⁵⁷: sphinx.util.requests crashes with old pyOpenSSL (< 0.14)
- #3220³⁰⁵⁸: KeyError when having a duplicate citation
- #3200³⁰⁵⁹: LaTeX: xref inside desc_name not allowed
- #3228³⁰⁶⁰: `build_sphinx` command crashes when missing dependency
- #2469³⁰⁶¹: Ignore updates of catalog files for gettext builder. Thanks to Hiroshi Ohkubo.
- #3183³⁰⁶²: Randomized jump box order in generated index page.

³⁰⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/3340>

³⁰⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/3340>

³⁰⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/3308>

³⁰⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/3340>

³⁰⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/3295>

³⁰⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/3285>

³⁰⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/3363>

³⁰⁵¹ <https://github.com/sphinx-doc/sphinx/issues/3214>

³⁰⁵² <https://github.com/sphinx-doc/sphinx/issues/3195>

³⁰⁵³ <https://github.com/sphinx-doc/sphinx/issues/3198>

³⁰⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/3211>

³⁰⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/3212>

³⁰⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/3207>

³⁰⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/3205>

³⁰⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/3220>

³⁰⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/3200>

³⁰⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/3228>

³⁰⁶¹ <https://github.com/sphinx-doc/sphinx/issues/2469>

³⁰⁶² <https://github.com/sphinx-doc/sphinx/issues/3183>

14.123 Release 1.5 (released Dec 5, 2016)

Incompatible changes

1.5a1

- latex, package fancybox is not any longer a dependency of sphinx.sty
- Use 'locales' as a default value of locale_dirs
- latex, package ifthen is not any longer a dependency of sphinx.sty
- latex, style file does not modify fancyvrb's Verbatim (also available as OriginalVerbatim) but uses sphinxVerbatim for name of custom wrapper.
- latex, package newfloat is not used (and not included) anymore (ref #2660³⁰⁶³; it was used since 1.3.4 and shipped with Sphinx since 1.4).
- latex, literal blocks in tables do not use OriginalVerbatim but sphinxVerbatimintable which handles captions and wraps lines (ref #2704³⁰⁶⁴).
- latex, replace pt by TeX equivalent bp if found in width or height attribute of an image.
- latex, if width or height attribute of an image is given with no unit, use px rather than ignore it.
- latex: Separate stylesheets of pygments to independent .sty file
- #2454³⁰⁶⁵: The filename of sourcelink is now changed. The value of html_sourcelink_suffix will be appended to the original filename (like index.rst.txt).
- sphinx.util.copy_static_entry() is now deprecated. Use sphinx.util.fileutil.copy_asset() instead.
- sphinx.util.osutil.filecopy() skips copying if the file has not been changed (ref: #2510³⁰⁶⁶, #2753³⁰⁶⁷)
- Internet Explorer 6-8, Opera 12.1x or Safari 5.1+ support is dropped because jQuery version is updated from 1.11.0 to 3.1.0 (ref: #2634³⁰⁶⁸, #2773³⁰⁶⁹)
- QtHelpBuilder doesn't generate search page (ref: #2352³⁰⁷⁰)
- QtHelpBuilder uses nonav theme instead of default one to improve readability.
- latex: To provide good default settings to Japanese documents, Sphinx uses jreport and jsbook as docclass if language is ja.
- sphinx-quickstart now allows a project version is empty
- Fix :download: role on epub/qthelp builder. They ignore the role because they don't support it.
- sphinx.ext.viewcode doesn't work on epub building by default. viewcode_enable_epub option
- sphinx.ext.viewcode disabled on singlehtml builder.
- Use make-mode of sphinx-quickstart by default. To disable this, use -M option
- Fix genindex.html, Sphinx's document template, link address to itself to satisfy xhtml standard.

³⁰⁶³ <https://github.com/sphinx-doc/sphinx/issues/2660>

³⁰⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/2704>

³⁰⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/2454>

³⁰⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/2510>

³⁰⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/2753>

³⁰⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/2634>

³⁰⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/2773>

³⁰⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/2352>

- Use epub3 builder by default. And the old epub builder is renamed to epub2.
- Fix epub and epub3 builders that contained links to `genindex` even if `epub_use_index = False`.
- `html_translator_class` is now deprecated. Use `set_translator()` API instead.
- Drop python 2.6 and 3.3 support
- Drop epub3 builder's `epub3_page_progression_direction` option (use `epub3_writing_mode`).
- [#2877](#)³⁰⁷¹: Rename `latex_elements['footer']` to `latex_elements['atendofbody']`

1.5a2

- [#2983](#)³⁰⁷²: Rename `epub3_description` and `epub3_contributor` to `epub_description` and `epub_contributor`.
- Remove `themes/basic/defindex.html`; no longer used
- Sphinx does not ship anymore (but still uses) LaTeX style file `fncychap`
- [#2435](#)³⁰⁷³: Slim down `quickstarted.conf.py`
- The `sphinx.sty` latex package does not load itself “hyperref”, as this is done later in the preamble of the latex output via `'hyperref'` key.
- Sphinx does not ship anymore a custom modified LaTeX style file `tabularray`. The non-modified package is used.
- [#3057](#)³⁰⁷⁴: By default, footnote marks in latex PDF output are not preceded by a space anymore, `\sphinxBeforeFootnote` allows user customization if needed.
- LaTeX target requires that option `hyperfootnotes` of package `hyperref` be left unchanged to its default (i.e. `true`) (refs: [#3022](#)³⁰⁷⁵)

1.5 final

- [#2986](#)³⁰⁷⁶: `themes/basic/defindex.html` is now deprecated
- Emit warnings that will be deprecated in Sphinx 1.6 by default. Users can change the behavior by setting the environment variable `PYTHONWARNINGS`. Please refer [Deprecation Warnings](#).
- [#2454](#)³⁰⁷⁷: new JavaScript variable `SOURCELINK_SUFFIX` is added

Deprecated

These features are removed in Sphinx 1.6:

- LDML format support in `i18n` feature
- `sphinx.addnodes.termsep`
- Some functions and classes in `sphinx.util.pycompat`: `zip_longest`, `product`, `all`, `any`, `next`, `open`, `class_types`, `base_exception`, `relpath`, `StringIO`, `BytesIO`. Please use the standard library version instead;

If any deprecation warning like `RemovedInSphinxXXXWarning` are displayed, please refer [Deprecation Warnings](#).

³⁰⁷¹ <https://github.com/sphinx-doc/sphinx/issues/2877>

³⁰⁷² <https://github.com/sphinx-doc/sphinx/issues/2983>

³⁰⁷³ <https://github.com/sphinx-doc/sphinx/issues/2435>

³⁰⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/3057>

³⁰⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/3022>

³⁰⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/2986>

³⁰⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/2454>

Features added

1.5a1

- [#2951³⁰⁷⁸](https://github.com/sphinx-doc/sphinx/issues/2951): Add `--implicit-namespaces` PEP-0420 support to apidoc.
- Add `:caption:` option for `sphinx.ext.inheritance_diagram`.
- [#2471³⁰⁷⁹](https://github.com/sphinx-doc/sphinx/issues/2471): Add config variable for default doctest flags.
- Convert linkcheck builder to requests for better encoding handling
- [#2463³⁰⁸⁰](https://github.com/sphinx-doc/sphinx/issues/2463), [#2516³⁰⁸¹](https://github.com/sphinx-doc/sphinx/issues/2516): Add keywords of “meta” directive to search index
- `:maxdepth:` option of toctree affects `secnumdepth` (ref: [#2547³⁰⁸²](https://github.com/sphinx-doc/sphinx/issues/2547))
- [#2575³⁰⁸³](https://github.com/sphinx-doc/sphinx/issues/2575): Now `sphinx.ext.graphviz` allows `:align:` option
- Show warnings if unknown key is specified to `latex_elements`
- Show warnings if no domains match with `primary_domain` (ref: [#2001³⁰⁸⁴](https://github.com/sphinx-doc/sphinx/issues/2001))
- C++, show warnings when the kind of role is misleading for the kind of target it refers to (e.g., using the `class` role for a function).
- latex, writer abstracts more of text styling into customizable macros, e.g. the `visit_emphasis` will output `\sphinxstyleemphasis` rather than `\emph` (which may be in use elsewhere or in an added LaTeX package). See list at end of `sphinx.sty` (ref: [#2686³⁰⁸⁵](https://github.com/sphinx-doc/sphinx/issues/2686))
- latex, public names for environments and parameters used by note, warning, and other admonition types, allowing full customizability from the 'preamble' key or an input file (ref: feature request [#2674³⁰⁸⁶](https://github.com/sphinx-doc/sphinx/issues/2674), [#2685³⁰⁸⁷](https://github.com/sphinx-doc/sphinx/issues/2685))
- latex, better computes column widths of some tables (as a result, there will be slight changes as tables now correctly fill the line width; ref: [#2708³⁰⁸⁸](https://github.com/sphinx-doc/sphinx/issues/2708))
- latex, `sphinxVerbatim` environment is more easily customizable (ref: [#2704³⁰⁸⁹](https://github.com/sphinx-doc/sphinx/issues/2704)). In addition to already existing `VerbatimColor` and `VerbatimBorderColor`:
 - two lengths `\sphinxverbatimsep` and `\sphinxverbatimborder`,
 - booleans `\ifsphinxverbatimwithframe` and `\ifsphinxverbatimwraplines`.
- latex, captions for literal blocks inside tables are handled, and long code lines wrapped to fit table cell (ref: [#2704³⁰⁹⁰](https://github.com/sphinx-doc/sphinx/issues/2704))
- [#2597³⁰⁹¹](https://github.com/sphinx-doc/sphinx/issues/2597): Show warning messages as darkred
- latex, allow image dimensions using px unit (default is 96px=1in)
- Show warnings if invalid dimension units found
- [#2650³⁰⁹²](https://github.com/sphinx-doc/sphinx/issues/2650): Add `--pdb` option to `setup.py` command

³⁰⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/2951>

³⁰⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/2471>

³⁰⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/2463>

³⁰⁸¹ <https://github.com/sphinx-doc/sphinx/issues/2516>

³⁰⁸² <https://github.com/sphinx-doc/sphinx/issues/2547>

³⁰⁸³ <https://github.com/sphinx-doc/sphinx/issues/2575>

³⁰⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/2001>

³⁰⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/2686>

³⁰⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/2674>

³⁰⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/2685>

³⁰⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/2708>

³⁰⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/2704>

³⁰⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/2704>

³⁰⁹¹ <https://github.com/sphinx-doc/sphinx/issues/2597>

³⁰⁹² <https://github.com/sphinx-doc/sphinx/issues/2650>

- latex, make the use of `\small` for code listings customizable (ref #2721³⁰⁹³)
- #2663³⁰⁹⁴: Add `--warning-is-error` option to `setup.py` command
- Show warnings if deprecated latex options are used
- Add `sphinx.config.ENUM` to check the config values is in candidates
- math: Add hyperlink marker to each equations in HTML output
- Add new theme `nonav` that doesn't include any navigation links. This is for any help generator like `qthelp`.
- #2680³⁰⁹⁵: `sphinx.ext.todo` now emits warnings if `todo_emit_warnings` enabled. Also, it emits an additional event named `todo-defined` to handle the TODO entries in 3rd party extensions.
- Python domain signature parser now uses the `xref` mixin for 'exceptions', allowing exception classes to be autolinked.
- #2513³⁰⁹⁶: Add `latex_engine` to switch the LaTeX engine by `conf.py`
- #2682³⁰⁹⁷: C++, basic support for attributes (C++11 style and GNU style). The new configuration variables `'cpp_id_attributes'` and `'cpp_paren_attributes'` can be used to introduce custom attributes.
- #1958³⁰⁹⁸: C++, add configuration variable `'cpp_index_common_prefix'` for removing prefixes from the index text of C++ objects.
- C++, added concept directive. Thanks to mickk-on-cpp.
- C++, added support for template introduction syntax. Thanks to mickk-on-cpp.
- #2725³⁰⁹⁹: latex builder: allow to use user-defined template file (experimental)
- apidoc now avoids invalidating cached files by not writing to files whose content doesn't change. This can lead to significant performance wins if apidoc is run frequently.
- #2851³¹⁰⁰: `sphinx.ext.math` emits missing-reference event if equation not found
- #1210³¹⁰¹: `eqref` role now supports cross reference
- #2892³¹⁰²: Added `-a` (`--append-syspath`) option to `sphinx-apidoc`
- #1604³¹⁰³: epub3 builder: Obey font-related CSS when viewing in iBooks.
- #646³¹⁰⁴: `option` directive support `'.'` character as a part of options
- Add document about kindlegen and fix document structure for it.
- #2474³¹⁰⁵: Add `intersphinx_timeout` option to `sphinx.ext.intersphinx`
- #2926³¹⁰⁶: EPUB3 builder supports vertical mode (`epub3_writing_mode` option)
- #2695³¹⁰⁷: `build_sphinx` subcommand for `setuptools` handles exceptions as same as `sphinx-build` does

³⁰⁹³ <https://github.com/sphinx-doc/sphinx/issues/2721>

³⁰⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/2663>

³⁰⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/2680>

³⁰⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/2513>

³⁰⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/2682>

³⁰⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/1958>

³⁰⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/2725>

³¹⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/2851>

³¹⁰¹ <https://github.com/sphinx-doc/sphinx/issues/1210>

³¹⁰² <https://github.com/sphinx-doc/sphinx/issues/2892>

³¹⁰³ <https://github.com/sphinx-doc/sphinx/issues/1604>

³¹⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/646>

³¹⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/2474>

³¹⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/2926>

³¹⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/2695>

- [#326](#)³¹⁰⁸: `numref` role can also refer sections
- [#2916](#)³¹⁰⁹: `numref` role can also refer caption as an its linktext

1.5a2

- [#3008](#)³¹¹⁰: linkcheck builder ignores self-signed certificate URL
- [#3020](#)³¹¹¹: new `'geometry'` key to `latex_elements` whose default uses LaTeX style file `geometry.sty` to set page layout
- [#2843](#)³¹¹²: Add `:start-at:` and `:end-at:` options to `literalinclude` directive
- [#2527](#)³¹¹³: Add `:reversed:` option to `toctree` directive
- Add `-t` and `-d` option to `sphinx-quickstart` to support templating generated Sphinx project.
- [#3028](#)³¹¹⁴: Add `{path}` and `{basename}` to the format of `figure_language_filename`
- new `'hyperref'` key in the `latex_elements` dictionary (ref [#3030](#)³¹¹⁵)
- [#3022](#)³¹¹⁶: Allow code-blocks in footnotes for LaTeX PDF output

1.5b1

- [#2513](#)³¹¹⁷: A better default settings for XeLaTeX
- [#3096](#)³¹¹⁸: `'maxlistdepth'` key to work around LaTeX list limitations
- [#3060](#)³¹¹⁹: autodoc supports documentation for attributes of Enum class. Now autodoc render just the value of Enum attributes instead of Enum attribute representation.
- Add `--extensions` to `sphinx-quickstart` to support enable arbitrary extensions from command line (ref: [#2904](#)³¹²⁰)
- [#3104](#)³¹²¹, [#3122](#)³¹²²: `'sphinxsetup'` for key=value styling of Sphinx LaTeX
- [#3071](#)³¹²³: Autodoc: Allow mocked module decorators to pass-through functions unchanged
- [#2495](#)³¹²⁴: linkcheck: Allow skipping anchor checking using `linkcheck_anchors_ignore`
- [#3083](#)³¹²⁵: let Unicode no-break space act like LaTeX `~` (fixed [#3019](#)³¹²⁶)
- [#3116](#)³¹²⁷: allow word wrap in PDF output for inline literals (ref [#3110](#)³¹²⁸)
- [#930](#)³¹²⁹: sphinx-apidoc allow wildcards for excluding paths. Thanks to Nick Coghlan.

³¹⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/326>

³¹⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/2916>

³¹¹⁰ <https://github.com/sphinx-doc/sphinx/issues/3008>

³¹¹¹ <https://github.com/sphinx-doc/sphinx/issues/3020>

³¹¹² <https://github.com/sphinx-doc/sphinx/issues/2843>

³¹¹³ <https://github.com/sphinx-doc/sphinx/issues/2527>

³¹¹⁴ <https://github.com/sphinx-doc/sphinx/issues/3028>

³¹¹⁵ <https://github.com/sphinx-doc/sphinx/issues/3030>

³¹¹⁶ <https://github.com/sphinx-doc/sphinx/issues/3022>

³¹¹⁷ <https://github.com/sphinx-doc/sphinx/issues/2513>

³¹¹⁸ <https://github.com/sphinx-doc/sphinx/issues/3096>

³¹¹⁹ <https://github.com/sphinx-doc/sphinx/issues/3060>

³¹²⁰ <https://github.com/sphinx-doc/sphinx/issues/2904>

³¹²¹ <https://github.com/sphinx-doc/sphinx/issues/3104>

³¹²² <https://github.com/sphinx-doc/sphinx/issues/3122>

³¹²³ <https://github.com/sphinx-doc/sphinx/issues/3071>

³¹²⁴ <https://github.com/sphinx-doc/sphinx/issues/2495>

³¹²⁵ <https://github.com/sphinx-doc/sphinx/issues/3083>

³¹²⁶ <https://github.com/sphinx-doc/sphinx/issues/3019>

³¹²⁷ <https://github.com/sphinx-doc/sphinx/issues/3116>

³¹²⁸ <https://github.com/sphinx-doc/sphinx/issues/3110>

³¹²⁹ <https://github.com/sphinx-doc/sphinx/issues/930>

- [#3121](#)³¹³⁰: add `inlineliteralwraps` option to control if inline literal word-wraps in latex

1.5 final

- [#3095](#)³¹³¹: Add `tls_verify` and `tls_cacerts` to support self-signed HTTPS servers in linkcheck and inter-sphinx
- [#2215](#)³¹³²: `make.bat` generated by `sphinx-quickstart` can be called from another dir. Thanks to Timotheus Kampik.
- [#3185](#)³¹³³: Add new warning type `misc.highlighting_failure`

Bugs fixed

1.5a1

- [#2707](#)³¹³⁴: (latex) the column width is badly computed for tabular
- [#2799](#)³¹³⁵: Sphinx installs roles and directives automatically on importing sphinx module. Now Sphinx installs them on running application.
- `sphinx.ext.autodoc` crashes if target code imports `*` from mock modules by `autodoc_mock_imports`.
- [#1953](#)³¹³⁶: `Sphinx.add_node` does not add handlers the translator installed by `html_translator_class`
- [#1797](#)³¹³⁷: text builder inserts blank line on top
- [#2894](#)³¹³⁸: `quickstart main()` doesn't use `argv` argument
- [#2874](#)³¹³⁹: `gettext` builder could not extract all text under the `only` directives
- [#2485](#)³¹⁴⁰: `autosummary` crashes with multiple `source_suffix` values
- [#1734](#)³¹⁴¹: Could not translate the caption of `toctree` directive
- Could not translate the content of meta directive (ref: [#1734](#)³¹⁴²)
- [#2550](#)³¹⁴³: external links are opened in help viewer
- [#2687](#)³¹⁴⁴: Running Sphinx multiple times produces 'already registered' warnings

1.5a2

- [#2810](#)³¹⁴⁵: Problems with `pdflatex` in an Italian document
- Use `latex_elements.papersize` to specify papersize of LaTeX in Makefile
- [#2988](#)³¹⁴⁶: linkcheck: retry with GET request if denied HEAD request

³¹³⁰ <https://github.com/sphinx-doc/sphinx/issues/3121>

³¹³¹ <https://github.com/sphinx-doc/sphinx/issues/3095>

³¹³² <https://github.com/sphinx-doc/sphinx/issues/2215>

³¹³³ <https://github.com/sphinx-doc/sphinx/issues/3185>

³¹³⁴ <https://github.com/sphinx-doc/sphinx/issues/2707>

³¹³⁵ <https://github.com/sphinx-doc/sphinx/issues/2799>

³¹³⁶ <https://github.com/sphinx-doc/sphinx/issues/1953>

³¹³⁷ <https://github.com/sphinx-doc/sphinx/issues/1797>

³¹³⁸ <https://github.com/sphinx-doc/sphinx/issues/2894>

³¹³⁹ <https://github.com/sphinx-doc/sphinx/issues/2874>

³¹⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/2485>

³¹⁴¹ <https://github.com/sphinx-doc/sphinx/issues/1734>

³¹⁴² <https://github.com/sphinx-doc/sphinx/issues/1734>

³¹⁴³ <https://github.com/sphinx-doc/sphinx/issues/2550>

³¹⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/2687>

³¹⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/2810>

³¹⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/2988>

- [#2990](#)³¹⁴⁷: linkcheck raises “Can’t convert ‘bytes’ object to str implicitly” error if linkcheck_anchors enabled
- [#3004](#)³¹⁴⁸: Invalid link types “top” and “up” are used
- [#3009](#)³¹⁴⁹: Bad rendering of parsed-literals in LaTeX since Sphinx 1.4.4
- [#3000](#)³¹⁵⁰: option directive generates invalid HTML anchors
- [#2984](#)³¹⁵¹: Invalid HTML has been generated if html_split_index enabled
- [#2986](#)³¹⁵²: themes/basic/defindex.html should be changed for html5 friendly
- [#2987](#)³¹⁵³: Invalid HTML has been generated if multiple IDs are assigned to a list
- [#2891](#)³¹⁵⁴: HTML search does not provide all the results
- [#1986](#)³¹⁵⁵: Title in PDF Output
- [#147](#)³¹⁵⁶: Problem with latex chapter style
- [#3018](#)³¹⁵⁷: LaTeX problem with page layout dimensions and chapter titles
- Fix an issue with \pysigline in LaTeX style file (ref [#3023](#)³¹⁵⁸)
- [#3038](#)³¹⁵⁹: sphinx.ext.math* raises TypeError if labels are duplicated
- [#3031](#)³¹⁶⁰: incompatibility with LaTeX package tocloft
- [#3003](#)³¹⁶¹: literal blocks in footnotes are not supported by Latex
- [#3047](#)³¹⁶²: spacing before footnote in pdf output is not coherent and allows breaks
- [#3045](#)³¹⁶³: HTML search index creator should ignore “raw” content if now html
- [#3039](#)³¹⁶⁴: English stemmer returns wrong word if the word is capitalized
- Fix make-mode Makefile template (ref [#3056](#)³¹⁶⁵, [#2936](#)³¹⁶⁶)

1.5b1

- [#2432](#)³¹⁶⁷: Fix unwanted * between varargs and keyword only args. Thanks to Alex Grönholm.
- [#3062](#)³¹⁶⁸: Failed to build PDF using 1.5a2 (undefined \hypersetup for Japanese documents since [PR#3030](#)³¹⁶⁹)
- Better rendering of multiline signatures in html.

³¹⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/2990>

³¹⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/3004>

³¹⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/3009>

³¹⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/3000>

³¹⁵¹ <https://github.com/sphinx-doc/sphinx/issues/2984>

³¹⁵² <https://github.com/sphinx-doc/sphinx/issues/2986>

³¹⁵³ <https://github.com/sphinx-doc/sphinx/issues/2987>

³¹⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/2891>

³¹⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/1986>

³¹⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/147>

³¹⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/3018>

³¹⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/3023>

³¹⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/3038>

³¹⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/3031>

³¹⁶¹ <https://github.com/sphinx-doc/sphinx/issues/3003>

³¹⁶² <https://github.com/sphinx-doc/sphinx/issues/3047>

³¹⁶³ <https://github.com/sphinx-doc/sphinx/issues/3045>

³¹⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/3039>

³¹⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/3056>

³¹⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/2936>

³¹⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/2432>

³¹⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/3062>

³¹⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/3030>

- #777³¹⁷⁰: LaTeX output “too deeply nested” (ref #3096³¹⁷¹)
- Let LaTeX image inclusion obey scale before textwidth fit (ref #2865³¹⁷², #3059³¹⁷³)
- #3019³¹⁷⁴: LaTeX fails on description of C function with arguments (ref #3083³¹⁷⁵)
- fix latex inline literals where < > - gobbled a space

1.5 final

- #3069³¹⁷⁶: Even if 'babel' key is set to empty string, LaTeX output contains one \addto\captions...
- #3123³¹⁷⁷: user 'babel' key setting is not obeyed anymore
- #3155³¹⁷⁸: Fix JavaScript for html_sourcelink_suffix fails with IE and Opera
- #3085³¹⁷⁹: keep current directory after breaking build documentation. Thanks to Timotheus Kampik.
- #3181³¹⁸⁰: pLaTeX crashes with a section contains endash
- #3180³¹⁸¹: latex: add stretch/shrink between successive singleline or multipleline cpp signatures (ref #3072³¹⁸²)
- #3128³¹⁸³: globing images does not support .svgz file
- #3015³¹⁸⁴: fix a broken test on Windows.
- #1843³¹⁸⁵: Fix documentation of descriptor classes that have a custom metaclass. Thanks to Erik Bray.
- #3190³¹⁸⁶: util.split_docinfo fails to parse multi-line field bodies
- #3024³¹⁸⁷, #3037³¹⁸⁸: In Python3, application.Sphinx._log crushed when the log message cannot be encoded into console encoding.

Testing

- To simplify, Sphinx uses external mock package even if unittest.mock exists.

³¹⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/777>
³¹⁷¹ <https://github.com/sphinx-doc/sphinx/issues/3096>
³¹⁷² <https://github.com/sphinx-doc/sphinx/issues/2865>
³¹⁷³ <https://github.com/sphinx-doc/sphinx/issues/3059>
³¹⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/3019>
³¹⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/3083>
³¹⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/3069>
³¹⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/3123>
³¹⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/3155>
³¹⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/3085>
³¹⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/3181>
³¹⁸¹ <https://github.com/sphinx-doc/sphinx/issues/3180>
³¹⁸² <https://github.com/sphinx-doc/sphinx/issues/3072>
³¹⁸³ <https://github.com/sphinx-doc/sphinx/issues/3128>
³¹⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/3015>
³¹⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/1843>
³¹⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/3190>
³¹⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/3024>
³¹⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/3037>

14.124 Release 1.4.9 (released Nov 23, 2016)

Bugs fixed

- #2936³¹⁸⁹: Fix doc/Makefile that can't build man because doc/man exists
- #3058³¹⁹⁰: Using the same 'caption' attribute in multiple 'toctree' directives results in warning / error
- #3068³¹⁹¹: Allow the '=' character in the -D option of sphinx-build.py
- #3074³¹⁹²: add_source_parser() crashes in debug mode
- #3135³¹⁹³: sphinx.ext.autodoc crashes with plain Callable
- #3150³¹⁹⁴: Fix query word splitter in JavaScript. It behaves as same as Python's regular expression.
- #3093³¹⁹⁵: gettext build broken on substituted images.
- #3093³¹⁹⁶: gettext build broken on image node under note directive.
- imgmath: crashes on showing error messages if image generation failed
- #3117³¹⁹⁷: LaTeX writer crashes if admonition is placed before first section title
- #3164³¹⁹⁸: Change search order of sphinx.ext.inheritance_diagram

14.125 Release 1.4.8 (released Oct 1, 2016)

Bugs fixed

- #2996³¹⁹⁹: The wheel package of Sphinx got crash with ImportError

14.126 Release 1.4.7 (released Oct 1, 2016)

Bugs fixed

- #2890³²⁰⁰: Quickstart should return an error consistently on all error conditions
- #2870³²⁰¹: flatten genindex columns' heights.
- #2856³²⁰²: Search on generated HTML site doesn't find some symbols
- #2882³²⁰³: Fall back to a GET request on 403 status in linkcheck

³¹⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/2936>

³¹⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/3058>

³¹⁹¹ <https://github.com/sphinx-doc/sphinx/issues/3068>

³¹⁹² <https://github.com/sphinx-doc/sphinx/issues/3074>

³¹⁹³ <https://github.com/sphinx-doc/sphinx/issues/3135>

³¹⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/3150>

³¹⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/3093>

³¹⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/3093>

³¹⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/3117>

³¹⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/3164>

³¹⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/2996>

³²⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/2890>

³²⁰¹ <https://github.com/sphinx-doc/sphinx/issues/2870>

³²⁰² <https://github.com/sphinx-doc/sphinx/issues/2856>

³²⁰³ <https://github.com/sphinx-doc/sphinx/issues/2882>

- [#2902](#)³²⁰⁴: jsdump.loads fails to load search index if keywords starts with underscore
- [#2900](#)³²⁰⁵: Fix epub content.opf: add auto generated orphan files to spine.
- [#2899](#)³²⁰⁶: Fix hasdoc() function in Jinja2 template. It will detect genindex, search also.
- [#2901](#)³²⁰⁷: Fix epub result: skip creating links from image tags to original image files.
- [#2917](#)³²⁰⁸: inline code is hyphenated on HTML
- [#1462](#)³²⁰⁹: autosummary warns for namedtuple with attribute with trailing underscore
- Could not reference equations if `:nowrap:` option specified
- [#2873](#)³²¹⁰: code-block overflow in latex (due to commas)
- [#1060](#)³²¹¹, [#2056](#)³²¹²: sphinx.ext.intersphinx: broken links are generated if relative paths are used in `intersphinx_mapping`
- [#2931](#)³²¹³: code-block directive with same `:caption:` causes warning of duplicate target. Now `code-block` and `literalinclude` does not define hyperlink target using its caption automatically.
- [#2962](#)³²¹⁴: latex: missing label of longtable
- [#2968](#)³²¹⁵: autodoc: show-inheritance option breaks docstrings

14.127 Release 1.4.6 (released Aug 20, 2016)

Incompatible changes

- [#2867](#)³²¹⁶: linkcheck builder crashes with six-1.4. Now Sphinx depends on six-1.5 or later

Bugs fixed

- applehelp: Sphinx crashes if hiutil or codesign commands not found
- Fix `make clean` abort issue when build dir contains regular files like `DS_Store`.
- Reduce epubcheck warnings/errors:
 - Fix DOCTYPE to html5
 - Change extension from `.html` to `.xhtml`.
 - Disable search page on epub results
- [#2778](#)³²¹⁷: Fix autodoc crashes if `obj.__dict__` is a property method and raises exception

³²⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/2902>

³²⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/2900>

³²⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/2899>

³²⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/2901>

³²⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/2917>

³²⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/1462>

³²¹⁰ <https://github.com/sphinx-doc/sphinx/issues/2873>

³²¹¹ <https://github.com/sphinx-doc/sphinx/issues/1060>

³²¹² <https://github.com/sphinx-doc/sphinx/issues/2056>

³²¹³ <https://github.com/sphinx-doc/sphinx/issues/2931>

³²¹⁴ <https://github.com/sphinx-doc/sphinx/issues/2962>

³²¹⁵ <https://github.com/sphinx-doc/sphinx/issues/2968>

³²¹⁶ <https://github.com/sphinx-doc/sphinx/issues/2867>

³²¹⁷ <https://github.com/sphinx-doc/sphinx/issues/2778>

- Fix duplicated toc in epub3 output.
- [#2775](#)³²¹⁸: Fix failing linkcheck with servers not supporting identity encoding
- [#2833](#)³²¹⁹: Fix formatting instance annotations in ext.autodoc.
- [#1911](#)³²²⁰: -D option of sphinx-build does not override the extensions variable
- [#2789](#)³²²¹: sphinx.ext.intersphinx generates wrong hyperlinks if the inventory is given
- parsing errors for caption of code-blocks are displayed in document (ref: [#2845](#)³²²²)
- [#2846](#)³²²³: singlehtml builder does not include figure numbers
- [#2816](#)³²²⁴: Fix data from builds cluttering the Domain.initial_data class attributes

14.128 Release 1.4.5 (released Jul 13, 2016)

Incompatible changes

- latex, inclusion of non-inline images from image directive resulted in non-coherent whitespaces depending on original image width; new behaviour by necessity differs from earlier one in some cases. (ref: [#2672](#)³²²⁵)
- latex, use of \includegraphics to refer to Sphinx custom variant is deprecated; in future it will revert to original LaTeX macro, custom one already has alternative name \sphinxincludegraphics.

Features added

- new config option latex_keep_old_macro_names, defaults to True. If False, lets macros (for text styling) be defined only with \sphinx-prefixed names
- latex writer allows user customization of “shadowed” boxes (topics), via three length variables.
- woff-format web font files now supported by the epub builder.

Bugs fixed

- jsdump fix for python 3: fixes the HTML search on python > 3
- [#2676](#)³²²⁶: (latex) Error with verbatim text in captions since Sphinx 1.4.4
- [#2629](#)³²²⁷: memoir class crashes LaTeX. Fixed by latex_keep_old_macro_names=False (ref 2675)
- [#2684](#)³²²⁸: sphinx.ext.intersphinx crashes with six-1.4.1
- [#2679](#)³²²⁹: float package needed for 'figure_align': 'H' latex option

³²¹⁸ <https://github.com/sphinx-doc/sphinx/issues/2775>

³²¹⁹ <https://github.com/sphinx-doc/sphinx/issues/2833>

³²²⁰ <https://github.com/sphinx-doc/sphinx/issues/1911>

³²²¹ <https://github.com/sphinx-doc/sphinx/issues/2789>

³²²² <https://github.com/sphinx-doc/sphinx/issues/2845>

³²²³ <https://github.com/sphinx-doc/sphinx/issues/2846>

³²²⁴ <https://github.com/sphinx-doc/sphinx/issues/2816>

³²²⁵ <https://github.com/sphinx-doc/sphinx/issues/2672>

³²²⁶ <https://github.com/sphinx-doc/sphinx/issues/2676>

³²²⁷ <https://github.com/sphinx-doc/sphinx/issues/2629>

³²²⁸ <https://github.com/sphinx-doc/sphinx/issues/2684>

³²²⁹ <https://github.com/sphinx-doc/sphinx/issues/2679>

- [#2671](#)³²³⁰: image directive may lead to inconsistent spacing in pdf
- [#2705](#)³²³¹: toctree generates empty bullet_list if :titlesonly: specified
- [#2479](#)³²³²: sphinx.ext.viewcode uses python2 highlighter by default
- [#2700](#)³²³³: HtmlHelp builder has hard coded index.html
- latex, since 1.4.4 inline literal text is followed by spurious space
- [#2722](#)³²³⁴: C++, fix id generation for var/member declarations to include namespaces.
- latex, images (from image directive) in lists or quoted blocks did not obey indentation (fixed together with [#2671](#)³²³⁵)
- [#2733](#)³²³⁶: since Sphinx 1.4.4 make latexpdf generates lots of hyperref warnings
- [#2731](#)³²³⁷: sphinx.ext.autodoc does not access property methods which raises any exceptions
- [#2666](#)³²³⁸: C++, properly look up nested names involving constructors.
- [#2579](#)³²³⁹: Could not refer a label including both spaces and colons via sphinx.ext.intersphinx
- [#2718](#)³²⁴⁰: Sphinx crashes if the document file is not readable
- [#2699](#)³²⁴¹: hyperlinks in help HTMLs are broken if html_file_suffix is set
- [#2723](#)³²⁴²: extra spaces in latex pdf output from multirow cell
- [#2735](#)³²⁴³: latexpdf Underfull \hbox (badness 10000) warnings from title page
- [#2667](#)³²⁴⁴: latex crashes if resized images appeared in section title
- [#2763](#)³²⁴⁵: (html) Provide default value for required alt attribute for image tags of SVG source, required to validate and now consistent w/ other formats.

14.129 Release 1.4.4 (released Jun 12, 2016)

Bugs fixed

- [#2630](#)³²⁴⁶: latex: sphinx.sty notice environment formatting problem
- [#2632](#)³²⁴⁷: Warning directives fail in quote environment latex build
- [#2633](#)³²⁴⁸: Sphinx crashes with old styled indices

³²³⁰ <https://github.com/sphinx-doc/sphinx/issues/2671>

³²³¹ <https://github.com/sphinx-doc/sphinx/issues/2705>

³²³² <https://github.com/sphinx-doc/sphinx/issues/2479>

³²³³ <https://github.com/sphinx-doc/sphinx/issues/2700>

³²³⁴ <https://github.com/sphinx-doc/sphinx/issues/2722>

³²³⁵ <https://github.com/sphinx-doc/sphinx/issues/2671>

³²³⁶ <https://github.com/sphinx-doc/sphinx/issues/2733>

³²³⁷ <https://github.com/sphinx-doc/sphinx/issues/2731>

³²³⁸ <https://github.com/sphinx-doc/sphinx/issues/2666>

³²³⁹ <https://github.com/sphinx-doc/sphinx/issues/2579>

³²⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/2718>

³²⁴¹ <https://github.com/sphinx-doc/sphinx/issues/2699>

³²⁴² <https://github.com/sphinx-doc/sphinx/issues/2723>

³²⁴³ <https://github.com/sphinx-doc/sphinx/issues/2735>

³²⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/2667>

³²⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/2763>

³²⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/2630>

³²⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/2632>

³²⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/2633>

- Fix a `\begin{\minipage}` typo in `sphinx.sty` from 1.4.2 (ref: 68becb1)
- #2622³²⁴⁹: Latex produces empty pages after title and table of contents
- #2640³²⁵⁰: 1.4.2 LaTeX crashes if code-block inside warning directive
- Let LaTeX use straight quotes also in inline code (ref #2627³²⁵¹)
- #2351³²⁵²: latex crashes if enumerated lists are placed on footnotes
- #2646³²⁵³: latex crashes if math contains twice empty lines
- #2480³²⁵⁴: `sphinx.ext.autodoc`: memory addresses were shown
- latex: allow code-blocks appearing inside lists and quotes at maximal nesting depth (ref #777³²⁵⁵, #2624³²⁵⁶, #2651³²⁵⁷)
- #2635³²⁵⁸: Latex code directives produce inconsistent frames based on viewing resolution
- #2639³²⁵⁹: Sphinx now bundles `iftex.sty`
- Failed to build PDF with `framed.sty` 0.95
- Sphinx now bundles `needspace.sty`

14.130 Release 1.4.3 (released Jun 5, 2016)

Bugs fixed

- #2530³²⁶⁰: got “Counter too large” error on building PDF if large numbered footnotes existed in admonitions
- `width` option of figure directive does not work if `align` option specified at same time (ref: #2595³²⁶¹)
- #2590³²⁶²: The `inputenc` package breaks compiling under `lualatex` and `xelatex`
- #2540³²⁶³: date on latex front page use different font
- Suppress “document isn’t included in any toctree” warning if the document is included (ref: #2603³²⁶⁴)
- #2614³²⁶⁵: Some tables in PDF output will end up shifted if user sets non zero `parindent` in preamble
- #2602³²⁶⁶: URL redirection breaks the hyperlinks generated by `sphinx.ext.intersphinx`
- #2613³²⁶⁷: Show warnings if merged extensions are loaded

³²⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/2622>

³²⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/2640>

³²⁵¹ <https://github.com/sphinx-doc/sphinx/issues/2627>

³²⁵² <https://github.com/sphinx-doc/sphinx/issues/2351>

³²⁵³ <https://github.com/sphinx-doc/sphinx/issues/2646>

³²⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/2480>

³²⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/777>

³²⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/2624>

³²⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/2651>

³²⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/2635>

³²⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/2639>

³²⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/2530>

³²⁶¹ <https://github.com/sphinx-doc/sphinx/issues/2595>

³²⁶² <https://github.com/sphinx-doc/sphinx/issues/2590>

³²⁶³ <https://github.com/sphinx-doc/sphinx/issues/2540>

³²⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/2603>

³²⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/2614>

³²⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/2602>

³²⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/2613>

- [#2619](#)³²⁶⁸: make sure amstext LaTeX package always loaded (ref: d657225, 488ee52, 9d82cad and [#2615](#)³²⁶⁹)
- [#2593](#)³²⁷⁰: latex crashes if any figures in the table

14.131 Release 1.4.2 (released May 29, 2016)

Features added

- Now `suppress_warnings` accepts following configurations (ref: [#2451](#)³²⁷¹, [#2466](#)³²⁷²):
 - `app.add_node`
 - `app.add_directive`
 - `app.add_role`
 - `app.add_generic_role`
 - `app.add_source_parser`
 - `image.data_uri`
 - `image.nonlocal_uri`
- [#2453](#)³²⁷³: LaTeX writer allows page breaks in topic contents; and their horizontal extent now fits in the line width (with shadow in margin). Also warning-type admonitions allow page breaks and their vertical spacing has been made more coherent with the one for hint-type notices (ref [#2446](#)³²⁷⁴).
- [#2459](#)³²⁷⁵: the framing of literal code-blocks in LaTeX output (and not only the code lines themselves) obey the indentation in lists or quoted blocks.
- [#2343](#)³²⁷⁶: the long source lines in code-blocks are wrapped (without modifying the line numbering) in LaTeX output (ref [#1534](#)³²⁷⁷, [#2304](#)³²⁷⁸).

Bugs fixed

- [#2370](#)³²⁷⁹: the equations are slightly misaligned in LaTeX writer
- [#1817](#)³²⁸⁰, [#2077](#)³²⁸¹: suppress pep8 warnings on `conf.py` generated by `sphinx-quickstart`
- [#2407](#)³²⁸²: building docs crash if document includes large data image URIs
- [#2436](#)³²⁸³: Sphinx does not check version by `needs_sphinx` if loading extensions failed

³²⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/2619>

³²⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/2615>

³²⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/2593>

³²⁷¹ <https://github.com/sphinx-doc/sphinx/issues/2451>

³²⁷² <https://github.com/sphinx-doc/sphinx/issues/2466>

³²⁷³ <https://github.com/sphinx-doc/sphinx/issues/2453>

³²⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/2446>

³²⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/2459>

³²⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/2343>

³²⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/1534>

³²⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/2304>

³²⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/2370>

³²⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/1817>

³²⁸¹ <https://github.com/sphinx-doc/sphinx/issues/2077>

³²⁸² <https://github.com/sphinx-doc/sphinx/issues/2407>

³²⁸³ <https://github.com/sphinx-doc/sphinx/issues/2436>

- [#2397](#)³²⁸⁴: Setup shorthandoff for Turkish documents
- [#2447](#)³²⁸⁵: VerbatimBorderColor wrongly used also for captions of PDF
- [#2456](#)³²⁸⁶: C++, fix crash related to document merging (e.g., singlehtml and Latex builders).
- [#2446](#)³²⁸⁷: latex(pdf) sets local tables of contents (or more generally topic nodes) in unbreakable boxes, causes overflow at bottom
- [#2476](#)³²⁸⁸: Omit MathJax markers if :nowrap: is given
- [#2465](#)³²⁸⁹: latex builder fails in case no caption option is provided to toctree directive
- Sphinx crashes if self referenced toctree found
- [#2481](#)³²⁹⁰: spelling mistake for mecab search splitter. Thanks to Naoki Sato.
- [#2309](#)³²⁹¹: Fix could not refer “indirect hyperlink targets” by ref-role
- intersphinx fails if mapping URL contains any port
- [#2088](#)³²⁹²: intersphinx crashes if the mapping URL requires basic auth
- [#2304](#)³²⁹³: auto line breaks in latexpdf codeblocks
- [#1534](#)³²⁹⁴: Word wrap long lines in Latex verbatim blocks
- [#2460](#)³²⁹⁵: too much white space on top of captioned literal blocks in PDF output
- Show error reason when multiple math extensions are loaded (ref: [#2499](#)³²⁹⁶)
- [#2483](#)³²⁹⁷: any figure number was not assigned if figure title contains only non text objects
- [#2501](#)³²⁹⁸: Unicode subscript numbers are normalized in LaTeX
- [#2492](#)³²⁹⁹: Figure directive with :figwidth: generates incorrect Latex-code
- The caption of figure is always put on center even if :align: was specified
- [#2526](#)³³⁰⁰: LaTeX writer crashes if the section having only images
- [#2522](#)³³⁰¹: Sphinx touches mo files under installed directory that caused permission error.
- [#2536](#)³³⁰²: C++, fix crash when an immediately nested scope has the same name as the current scope.
- [#2555](#)³³⁰³: Fix crash on any-references with unicode.
- [#2517](#)³³⁰⁴: wrong bookmark encoding in PDF if using LuaLaTeX

³²⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/2397>

³²⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/2447>

³²⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/2456>

³²⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/2446>

³²⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/2476>

³²⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/2465>

³²⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/2481>

³²⁹¹ <https://github.com/sphinx-doc/sphinx/issues/2309>

³²⁹² <https://github.com/sphinx-doc/sphinx/issues/2088>

³²⁹³ <https://github.com/sphinx-doc/sphinx/issues/2304>

³²⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/1534>

³²⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/2460>

³²⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/2499>

³²⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/2483>

³²⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/2501>

³²⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/2492>

³³⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/2526>

³³⁰¹ <https://github.com/sphinx-doc/sphinx/issues/2522>

³³⁰² <https://github.com/sphinx-doc/sphinx/issues/2536>

³³⁰³ <https://github.com/sphinx-doc/sphinx/issues/2555>

³³⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/2517>

- [#2521](#)³³⁰⁵: generated Makefile causes BSD make crashed if sphinx-build not found
- [#2470](#)³³⁰⁶: `typing` backport package causes autodoc errors with python 2.7
- `sphinx.ext.intersphinx` crashes if non-string value is used for key of `intersphinx_mapping`
- [#2518](#)³³⁰⁷: `intersphinx_mapping` disallows non alphanumeric keys
- [#2558](#)³³⁰⁸: unpack error on devhelp builder
- [#2561](#)³³⁰⁹: Info builder crashes when a footnote contains a link
- [#2565](#)³³¹⁰: The descriptions of objects generated by `sphinx.ext.autosummary` overflow lines at LaTeX writer
- Extend `pdflatex` config in `sphinx.sty` to subparagraphs (ref: [#2551](#)³³¹¹)
- [#2445](#)³³¹²: `rst_prolog` and `rst_epilog` affect to non reST sources
- [#2576](#)³³¹³: `sphinx.ext.imgmath` crashes if subprocess raises error
- [#2577](#)³³¹⁴: `sphinx.ext.imgmath`: Invalid argument are passed to `dvisvgm`
- [#2556](#)³³¹⁵: Xapian search does not work with Python 3
- [#2581](#)³³¹⁶: The search doesn't work if `language='es'` (Spanish)
- [#2382](#)³³¹⁷: Adjust spacing after abbreviations on figure numbers in LaTeX writer
- [#2383](#)³³¹⁸: The generated footnote by `latex_show_urls` overflows lines
- [#2497](#)³³¹⁹, [#2552](#)³³²⁰: The label of search button does not fit for the button itself

14.132 Release 1.4.1 (released Apr 12, 2016)

Incompatible changes

- The default format of `today_fmt` and `html_last_updated_fmt` is back to `strftime` format again. Locale Date Markup Language is also supported for backward compatibility until Sphinx 1.5.

³³⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/2521>

³³⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/2470>

³³⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/2518>

³³⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/2558>

³³⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/2561>

³³¹⁰ <https://github.com/sphinx-doc/sphinx/issues/2565>

³³¹¹ <https://github.com/sphinx-doc/sphinx/issues/2551>

³³¹² <https://github.com/sphinx-doc/sphinx/issues/2445>

³³¹³ <https://github.com/sphinx-doc/sphinx/issues/2576>

³³¹⁴ <https://github.com/sphinx-doc/sphinx/issues/2577>

³³¹⁵ <https://github.com/sphinx-doc/sphinx/issues/2556>

³³¹⁶ <https://github.com/sphinx-doc/sphinx/issues/2581>

³³¹⁷ <https://github.com/sphinx-doc/sphinx/issues/2382>

³³¹⁸ <https://github.com/sphinx-doc/sphinx/issues/2383>

³³¹⁹ <https://github.com/sphinx-doc/sphinx/issues/2497>

³³²⁰ <https://github.com/sphinx-doc/sphinx/issues/2552>

Translations

- Added Welsh translation, thanks to Geraint Palmer.
- Added Greek translation, thanks to Stelios Vitalis.
- Added Esperanto translation, thanks to Dinu Gherman.
- Added Hindi translation, thanks to Purnank H. Ghumalia.
- Added Romanian translation, thanks to Razvan Stefanescu.

Bugs fixed

- C++, added support for `extern` and `thread_local`.
- C++, type declarations are now using the prefixes `typedef`, `using`, and `type`, depending on the style of declaration.
- #2413³³²¹: C++, fix crash on duplicate declarations
- #2394³³²²: Sphinx crashes when `html_last_updated_fmt` is invalid
- #2408³³²³: dummy builder not available in Makefile and make.bat
- #2412³³²⁴: hyperlink targets are broken in LaTeX builder
- figure directive crashes if non paragraph item is given as caption
- #2418³³²⁵: time formats no longer allowed in `today_fmt`
- #2395³³²⁶: Sphinx crashes if unicode character in image filename
- #2396³³²⁷: “too many values to unpack” in `genindex-single`
- #2405³³²⁸: `numref` link in PDF jumps to the wrong location
- #2414³³²⁹: missing number in PDF hyperlinks to code listings
- #2440³³³⁰: wrong import for `gmtime`. Thanks to Uwe L. Korn.

14.133 Release 1.4 (released Mar 28, 2016)

Incompatible changes

- Drop `PorterStemmer` package support. Use `PyStemmer` instead of `PorterStemmer` to accelerate stemming.

³³²¹ <https://github.com/sphinx-doc/sphinx/issues/2413>

³³²² <https://github.com/sphinx-doc/sphinx/issues/2394>

³³²³ <https://github.com/sphinx-doc/sphinx/issues/2408>

³³²⁴ <https://github.com/sphinx-doc/sphinx/issues/2412>

³³²⁵ <https://github.com/sphinx-doc/sphinx/issues/2418>

³³²⁶ <https://github.com/sphinx-doc/sphinx/issues/2395>

³³²⁷ <https://github.com/sphinx-doc/sphinx/issues/2396>

³³²⁸ <https://github.com/sphinx-doc/sphinx/issues/2405>

³³²⁹ <https://github.com/sphinx-doc/sphinx/issues/2414>

³³³⁰ <https://github.com/sphinx-doc/sphinx/issues/2440>

- `sphinx_rtd_theme` has become optional. Please install it manually. Refs [#2087](#)³³³¹, [#2086](#)³³³², [#1845](#)³³³³ and [#2097](#)³³³⁴. Thanks to Victor Zverovich.
- [#2231](#)³³³⁵: Use `DUrole` instead of `DUsan` for custom roles in LaTeX writer. It enables to take title of roles as an argument of custom macros.
- [#2022](#)³³³⁶: ‘Thumbs.db’ and ‘.DS_Store’ are added to `exclude_patterns` default values in `conf.py` that will be provided on `sphinx-quickstart`.
- [#2027](#)³³³⁷, [#2208](#)³³³⁸: The `html_title` accepts string values only. And the `None` value cannot be accepted.
- `sphinx.ext.graphviz`: show graph image in inline by default
- [#2060](#)³³³⁹, [#2224](#)³³⁴⁰: The `manpage` role now generate `sphinx.addnodes.manpage` node instead of `sphinx.addnodes.literal_emphasis` node.
- [#2022](#)³³⁴¹: `html_extra_path` also copies dotfiles in the extra directory, and refers to `exclude_patterns` to exclude extra files and directories.
- [#2300](#)³³⁴²: enhance `autoclass::` to use the docstring of `__new__` if `__init__` method’s is missing of empty
- [#2251](#)³³⁴³: Previously, under glossary directives, multiple terms for one definition are converted into single `term` node and the each terms in the term node are separated by `termsep` node. In new implementation, each terms are converted into individual `term` nodes and `termsep` node is removed. By this change, output layout of every builders are changed a bit.
- The default highlight language is now Python 3. This means that source code is highlighted as Python 3 (which is mostly a superset of Python 2), and no parsing is attempted to distinguish valid code. To get the old behavior back, add `highlight_language = "python"` to `conf.py`.
- `Locale Date Markup Language`³³⁴⁴ like "MMMM dd, YYYY" is default format for `today_fmt` and `html_last_updated_fmt`. However strftime format like "%B %d, %Y" is also supported for backward compatibility until Sphinx 1.5. Later format will be disabled from Sphinx 1.5.
- [#2327](#)³³⁴⁵: `latex_use_parts` is deprecated now. Use `latex_toplevel_sectioning` instead.
- [#2337](#)³³⁴⁶: Use `\url{URL}` macro instead of `\href{URL}{URL}` in LaTeX writer.
- [#1498](#)³³⁴⁷: manpage writer: don’t make whole of item in definition list bold if it includes strong node.
- [#582](#)³³⁴⁸: Remove hint message from quick search box for html output.
- [#2378](#)³³⁴⁹: Sphinx now bundles `newfloat.sty`

³³³¹ <https://github.com/sphinx-doc/sphinx/issues/2087>
³³³² <https://github.com/sphinx-doc/sphinx/issues/2086>
³³³³ <https://github.com/sphinx-doc/sphinx/issues/1845>
³³³⁴ <https://github.com/sphinx-doc/sphinx/issues/2097>
³³³⁵ <https://github.com/sphinx-doc/sphinx/issues/2231>
³³³⁶ <https://github.com/sphinx-doc/sphinx/issues/2022>
³³³⁷ <https://github.com/sphinx-doc/sphinx/issues/2027>
³³³⁸ <https://github.com/sphinx-doc/sphinx/issues/2208>
³³³⁹ <https://github.com/sphinx-doc/sphinx/issues/2060>
³³⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/2224>
³³⁴¹ <https://github.com/sphinx-doc/sphinx/issues/2022>
³³⁴² <https://github.com/sphinx-doc/sphinx/issues/2300>
³³⁴³ <https://github.com/sphinx-doc/sphinx/issues/2251>
³³⁴⁴ https://unicode.org/reports/tr35/tr35-dates.html#Date_Format_Patterns
³³⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/2327>
³³⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/2337>
³³⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/1498>
³³⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/582>
³³⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/2378>

Features added

- [#2092](https://github.com/sphinx-doc/sphinx/issues/2092)³³⁵⁰: add todo directive support in napoleon package.
- [#1962](https://github.com/sphinx-doc/sphinx/issues/1962)³³⁵¹: when adding directives, roles or nodes from an extension, warn if such an element is already present (built-in or added by another extension).
- [#1909](https://github.com/sphinx-doc/sphinx/issues/1909)³³⁵²: Add “doc” references to Intersphinx inventories.
- C++ type alias support (e.g., `.. type:: T = int`).
- C++ template support for classes, functions, type aliases, and variables ([#1729](https://github.com/sphinx-doc/sphinx/issues/1729)³³⁵³, [#1314](https://github.com/sphinx-doc/sphinx/issues/1314)³³⁵⁴).
- C++, added new scope management directives `namespace-push` and `namespace-pop`.
- [#1970](https://github.com/sphinx-doc/sphinx/issues/1970)³³⁵⁵: Keyboard shortcuts to navigate Next and Previous topics
- Intersphinx: Added support for fetching Intersphinx inventories with URLs using HTTP basic auth.
- C++, added support for template parameter in function info field lists.
- C++, added support for pointers to member (function).
- [#2113](https://github.com/sphinx-doc/sphinx/issues/2113)³³⁵⁶: Allow `:class:` option to code-block directive.
- [#2192](https://github.com/sphinx-doc/sphinx/issues/2192)³³⁵⁷: `Imgmath` (pngmath with svg support).
- [#2200](https://github.com/sphinx-doc/sphinx/issues/2200)³³⁵⁸: Support XeTeX and LuaTeX for the LaTeX builder.
- [#1906](https://github.com/sphinx-doc/sphinx/issues/1906)³³⁵⁹: Use `xcolor` over `color` for `fcolorbox` where available for LaTeX output.
- [#2216](https://github.com/sphinx-doc/sphinx/issues/2216)³³⁶⁰: Texinputs makefile improvements.
- [#2170](https://github.com/sphinx-doc/sphinx/issues/2170)³³⁶¹: Support for Chinese language search index.
- [#2214](https://github.com/sphinx-doc/sphinx/issues/2214)³³⁶²: Add `sphinx.ext.githubpages` to publish the docs on GitHub Pages
- [#1030](https://github.com/sphinx-doc/sphinx/issues/1030)³³⁶³: Make page reference names for `latex_show_pagerefs` translatable
- [#2162](https://github.com/sphinx-doc/sphinx/issues/2162)³³⁶⁴: Add `Sphinx.add_source_parser()` to add `source_suffix` and `source_parsers` from extension
- [#2207](https://github.com/sphinx-doc/sphinx/issues/2207)³³⁶⁵: Add `sphinx.parsers.Parser` class; a base class for new parsers
- [#656](https://github.com/sphinx-doc/sphinx/issues/656)³³⁶⁶: Add `graphviz_dot` option to `graphviz` directives to switch the `dot` command
- [#1939](https://github.com/sphinx-doc/sphinx/issues/1939)³³⁶⁷: Added the `dummy` builder: syntax check without output.
- [#2230](https://github.com/sphinx-doc/sphinx/issues/2230)³³⁶⁸: Add `math_number_all` option to number all displayed math in math extensions

³³⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/2092>

³³⁵¹ <https://github.com/sphinx-doc/sphinx/issues/1962>

³³⁵² <https://github.com/sphinx-doc/sphinx/issues/1909>

³³⁵³ <https://github.com/sphinx-doc/sphinx/issues/1729>

³³⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/1314>

³³⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/1970>

³³⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/2113>

³³⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/2192>

³³⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/2200>

³³⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/1906>

³³⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/2216>

³³⁶¹ <https://github.com/sphinx-doc/sphinx/issues/2170>

³³⁶² <https://github.com/sphinx-doc/sphinx/issues/2214>

³³⁶³ <https://github.com/sphinx-doc/sphinx/issues/1030>

³³⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/2162>

³³⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/2207>

³³⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/656>

³³⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/1939>

³³⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/2230>

- [#2235](#)³³⁶⁹: `needs_sphinx` supports micro version comparison
- [#2282](#)³³⁷⁰: Add “language” attribute to html tag in the “basic” theme
- [#1779](#)³³⁷¹: Add EPUB 3 builder
- [#1751](#)³³⁷²: Add `todo_link_only` to avoid file path and line indication on `todolist`. Thanks to Francesco Montesano.
- [#2199](#)³³⁷³: Use `image_size` package to obtain size of images.
- [#1099](#)³³⁷⁴: Add configurable retries to the linkcheck builder. Thanks to Alex Gaynor. Also don’t check anchors starting with !.
- [#2300](#)³³⁷⁵: enhance `autoclass::` to use the docstring of `__new__` if `__init__` method’s is missing of empty
- [#1858](#)³³⁷⁶: Add `Sphinx.add_enumerable_node()` to add enumerable nodes for numfig feature
- [#1286](#)³³⁷⁷, [#2099](#)³³⁷⁸: Add `sphinx.ext.autosectionlabel` extension to allow reference sections using its title. Thanks to Tadhg O’Higgins.
- [#1854](#)³³⁷⁹: Allow to choose Janome for Japanese splitter.
- [#1853](#)³³⁸⁰: support custom text splitter on html search with `language='ja'`.
- [#2320](#)³³⁸¹: classifier of glossary terms can be used for index entries grouping key The classifier also be used for translation. See also *Glossary*.
- [#2308](#)³³⁸²: Define `\tablecontinued` macro to redefine the style of continued label for longtables.
- Select an image by similarity if multiple images are globbed by `.. image:: filename.*`
- [#1921](#)³³⁸³: Support figure substitutions by `language` and `figure_language_filename`
- [#2245](#)³³⁸⁴: Add `latex_elements["passoptionstopackages"]` option to call `PassOptionsToPackages` in early stage of preambles.
- [#2340](#)³³⁸⁵: Math extension: support alignment of multiple equations for MathJax.
- [#2338](#)³³⁸⁶: Define `\titleref` macro to redefine the style of title-reference roles.
- Define `\menuselection` and `\accelerator` macros to redefine the style of menuselection roles.
- Define `\crossref` macro to redefine the style of references
- [#2301](#)³³⁸⁷: Texts in the classic html theme should be hyphenated.
- [#2355](#)³³⁸⁸: Define `\termref` macro to redefine the style of term roles.

³³⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/2235>

³³⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/2282>

³³⁷¹ <https://github.com/sphinx-doc/sphinx/issues/1779>

³³⁷² <https://github.com/sphinx-doc/sphinx/issues/1751>

³³⁷³ <https://github.com/sphinx-doc/sphinx/issues/2199>

³³⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/1099>

³³⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/2300>

³³⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/1858>

³³⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/1286>

³³⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/2099>

³³⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/1854>

³³⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/1853>

³³⁸¹ <https://github.com/sphinx-doc/sphinx/issues/2320>

³³⁸² <https://github.com/sphinx-doc/sphinx/issues/2308>

³³⁸³ <https://github.com/sphinx-doc/sphinx/issues/1921>

³³⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/2245>

³³⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/2340>

³³⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/2338>

³³⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/2301>

³³⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/2355>

- Add `suppress_warnings` to suppress arbitrary warning message (experimental)
- #2229³³⁸⁹: Fix no warning is given for unknown options
- #2327³³⁹⁰: Add `latex_toplevel_sectioning` to switch the top level sectioning of LaTeX document.

Bugs fixed

- #1913³³⁹¹: C++, fix assert bug for enumerators in next-to-global and global scope.
- C++, fix parsing of ‘signed char’ and ‘unsigned char’ as types.
- C++, add missing support for ‘friend’ functions.
- C++, add missing support for virtual base classes (thanks to Rapptz).
- C++, add support for final classes.
- C++, fix parsing of types prefixed with ‘enum’.
- #2023³³⁹²: Dutch search support uses Danish stemming info.
- C++, add support for user-defined literals.
- #1804³³⁹³: Now html output wraps overflowed long-line-text in the sidebar. Thanks to Hassen ben tanfous.
- #2183³³⁹⁴: Fix porterstemmer causes `make json` to fail.
- #1899³³⁹⁵: Ensure list is sent to `OptParse`.
- #2164³³⁹⁶: Fix wrong check for `pdftex` inside `sphinx.sty` (for `graphicx` package option).
- #2165³³⁹⁷, #2218³³⁹⁸: Remove faulty and non-need conditional from `sphinx.sty`.
- Fix broken LaTeX code is generated if unknown language is given
- #1944³³⁹⁹: Fix `rst_prolog` breaks file-wide metadata
- #2074³⁴⁰⁰: `gettext` should use canonical relative paths for `.pot`. Thanks to anatoly techtonik.
- #2311³⁴⁰¹: Fix `sphinx.ext.inheritance_diagram` raises `AttributeError`
- #2251³⁴⁰²: Line breaks in `.rst` files are transferred to `.pot` files in a wrong way.
- #794³⁴⁰³: Fix date formatting in latex output is not localized
- Remove `image/gif` from `supported_image_types` of LaTeX writer (#2272³⁴⁰⁴)
- Fix `ValueError` is raised if `LANGUAGE` is empty string
- Fix unpack warning is shown when the directives generated from `Sphinx.add_crossref_type` is used

³³⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/2229>

³³⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/2327>

³³⁹¹ <https://github.com/sphinx-doc/sphinx/issues/1913>

³³⁹² <https://github.com/sphinx-doc/sphinx/issues/2023>

³³⁹³ <https://github.com/sphinx-doc/sphinx/issues/1804>

³³⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/2183>

³³⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/1899>

³³⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/2164>

³³⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/2165>

³³⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/2218>

³³⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/1944>

³⁴⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/2074>

³⁴⁰¹ <https://github.com/sphinx-doc/sphinx/issues/2311>

³⁴⁰² <https://github.com/sphinx-doc/sphinx/issues/2251>

³⁴⁰³ <https://github.com/sphinx-doc/sphinx/issues/794>

³⁴⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/2272>

- The default highlight language is now `default`. This means that source code is highlighted as Python 3 (which is mostly a superset of Python 2) if possible. To get the old behavior back, add `highlight_language = "python"` to `conf.py`.
- [#2329](https://github.com/sphinx-doc/sphinx/issues/2329)³⁴⁰⁵: Refresh environment forcibly if source directory has changed.
- [#2331](https://github.com/sphinx-doc/sphinx/issues/2331)³⁴⁰⁶: Fix code-blocks are filled by block in dvi; remove `xcdraw` option from `xcolor` package
- Fix the `confval` type checker emits warnings if unicode is given to `confvals` which expects string value
- [#2360](https://github.com/sphinx-doc/sphinx/issues/2360)³⁴⁰⁷: Fix `numref` in LaTeX output is broken
- [#2361](https://github.com/sphinx-doc/sphinx/issues/2361)³⁴⁰⁸: Fix additional paragraphs inside the “compound” directive are indented
- [#2364](https://github.com/sphinx-doc/sphinx/issues/2364)³⁴⁰⁹: Fix `KeyError` ‘rootSymbol’ on Sphinx upgrade from older version.
- [#2348](https://github.com/sphinx-doc/sphinx/issues/2348)³⁴¹⁰: Move `amsmath` and `amssymb` to before `fontpkg` on LaTeX writer.
- [#2368](https://github.com/sphinx-doc/sphinx/issues/2368)³⁴¹¹: Ignore emacs lock files like `.#foo.rst` by default.
- [#2262](https://github.com/sphinx-doc/sphinx/issues/2262)³⁴¹²: `literal_block` and its caption has been separated by pagebreak in LaTeX output.
- [#2319](https://github.com/sphinx-doc/sphinx/issues/2319)³⁴¹³: Fix table counter is overridden by code-block’s in LaTeX. Thanks to jfbu.
- Fix unpack warning if combined with 3rd party domain extensions.
- [#1153](https://github.com/sphinx-doc/sphinx/issues/1153)³⁴¹⁴: Fix figures in sidebar causes latex build error.
- [#2358](https://github.com/sphinx-doc/sphinx/issues/2358)³⁴¹⁵: Fix user-preamble could not override the `tocdepth` definition.
- [#2358](https://github.com/sphinx-doc/sphinx/issues/2358)³⁴¹⁶: Reduce `tocdepth` if `part` or `chapter` is used for `top_sectionlevel`
- [#2351](https://github.com/sphinx-doc/sphinx/issues/2351)³⁴¹⁷: Fix footnote spacing
- [#2363](https://github.com/sphinx-doc/sphinx/issues/2363)³⁴¹⁸: Fix `toctree()` in templates generates broken links in `SingleHTMLBuilder`.
- [#2366](https://github.com/sphinx-doc/sphinx/issues/2366)³⁴¹⁹: Fix empty `hyperref` is generated on `toctree` in HTML builder.

Documentation

- [#1757](https://github.com/sphinx-doc/sphinx/issues/1757)³⁴²⁰: Fix for usage of `html_last_updated_fmt`. Thanks to Ralf Hemmecke.

³⁴⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/2329>

³⁴⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/2331>

³⁴⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/2360>

³⁴⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/2361>

³⁴⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/2364>

³⁴¹⁰ <https://github.com/sphinx-doc/sphinx/issues/2348>

³⁴¹¹ <https://github.com/sphinx-doc/sphinx/issues/2368>

³⁴¹² <https://github.com/sphinx-doc/sphinx/issues/2262>

³⁴¹³ <https://github.com/sphinx-doc/sphinx/issues/2319>

³⁴¹⁴ <https://github.com/sphinx-doc/sphinx/issues/1153>

³⁴¹⁵ <https://github.com/sphinx-doc/sphinx/issues/2358>

³⁴¹⁶ <https://github.com/sphinx-doc/sphinx/issues/2358>

³⁴¹⁷ <https://github.com/sphinx-doc/sphinx/issues/2351>

³⁴¹⁸ <https://github.com/sphinx-doc/sphinx/issues/2363>

³⁴¹⁹ <https://github.com/sphinx-doc/sphinx/issues/2366>

³⁴²⁰ <https://github.com/sphinx-doc/sphinx/issues/1757>

14.134 Release 1.3.6 (released Feb 29, 2016)

Features added

- [#1873](#)³⁴²¹, [#1876](#)³⁴²², [#2278](#)³⁴²³: Add `page_source_suffix` html context variable. This should be introduced with `source_parsers` feature. Thanks for Eric Holscher.

Bugs fixed

- [#2265](#)³⁴²⁴: Fix `babel` is used in spite of disabling it on `latex_elements`
- [#2295](#)³⁴²⁵: Avoid mutating dictionary errors while enumerating members in autodoc with Python 3
- [#2291](#)³⁴²⁶: Fix `pdflatex` “Counter too large” error from footnotes inside tables of contents
- [#2292](#)³⁴²⁷: Fix some footnotes disappear from LaTeX output
- [#2287](#)³⁴²⁸: `sphinx.transforms.Locale` always uses `rst` parser. Sphinx i18n feature should support parsers that specified `source_parsers`.
- [#2290](#)³⁴²⁹: Fix `sphinx.ext.mathbase` use of `amsfonts` may break user choice of math fonts
- [#2324](#)³⁴³⁰: Print a hint how to increase the recursion limit when it is hit.
- [#1565](#)³⁴³¹, [#2229](#)³⁴³²: Revert new warning; the new warning will be triggered from version 1.4 on.
- [#2329](#)³⁴³³: Refresh environment forcibly if source directory has changed.
- [#2019](#)³⁴³⁴: Fix the domain objects in search result are not escaped

14.135 Release 1.3.5 (released Jan 24, 2016)

Bugs fixed

- Fix line numbers was not shown on warnings in LaTeX and texinfo builders
- Fix filenames were not shown on warnings of citations
- Fix line numbers was not shown on warnings in LaTeX and texinfo builders
- Fix line numbers was not shown on warnings of indices
- [#2026](#)³⁴³⁵: Fix LaTeX builder raises error if parsed-literal includes links

³⁴²¹ <https://github.com/sphinx-doc/sphinx/issues/1873>

³⁴²² <https://github.com/sphinx-doc/sphinx/issues/1876>

³⁴²³ <https://github.com/sphinx-doc/sphinx/issues/2278>

³⁴²⁴ <https://github.com/sphinx-doc/sphinx/issues/2265>

³⁴²⁵ <https://github.com/sphinx-doc/sphinx/issues/2295>

³⁴²⁶ <https://github.com/sphinx-doc/sphinx/issues/2291>

³⁴²⁷ <https://github.com/sphinx-doc/sphinx/issues/2292>

³⁴²⁸ <https://github.com/sphinx-doc/sphinx/issues/2287>

³⁴²⁹ <https://github.com/sphinx-doc/sphinx/issues/2290>

³⁴³⁰ <https://github.com/sphinx-doc/sphinx/issues/2324>

³⁴³¹ <https://github.com/sphinx-doc/sphinx/issues/1565>

³⁴³² <https://github.com/sphinx-doc/sphinx/issues/2229>

³⁴³³ <https://github.com/sphinx-doc/sphinx/issues/2329>

³⁴³⁴ <https://github.com/sphinx-doc/sphinx/issues/2019>

³⁴³⁵ <https://github.com/sphinx-doc/sphinx/issues/2026>

- [#2243](#)³⁴³⁶: Ignore strange docstring types for classes, do not crash
- [#2247](#)³⁴³⁷: Fix [#2205](#)³⁴³⁸ breaks make html for definition list with classifiers that contains regular-expression like string
- [#1565](#)³⁴³⁹: Sphinx will now emit a warning that highlighting was skipped if the syntax is incorrect for `code-block`, `literalinclude` and so on.
- [#2211](#)³⁴⁴⁰: Fix paragraphs in table cell doesn't work in Latex output
- [#2253](#)³⁴⁴¹: `:pyobject:` option of `literalinclude` directive can't detect indented body block when the block starts with blank or comment lines.
- Fix TOC is not shown when no `:maxdepth:` for toctrees (ref: [#771](#)³⁴⁴²)
- Fix warning message for `:numref:` if target is in orphaned doc (ref: [#2244](#)³⁴⁴³)

14.136 Release 1.3.4 (released Jan 12, 2016)

Bugs fixed

- [#2134](#)³⁴⁴⁴: Fix figure caption with reference causes latex build error
- [#2094](#)³⁴⁴⁵: Fix rubric with reference not working in Latex
- [#2147](#)³⁴⁴⁶: Fix `literalinclude` code in latex does not break in pages
- [#1833](#)³⁴⁴⁷: Fix email addresses is showed again if `latex_show_urls` is not `None`
- [#2176](#)³⁴⁴⁸: `sphinx.ext.graphviz`: use `<object>` instead of `` to embed svg
- [#967](#)³⁴⁴⁹: Fix SVG inheritance diagram is not hyperlinked (clickable)
- [#1237](#)³⁴⁵⁰: Fix footnotes not working in definition list in LaTeX
- [#2168](#)³⁴⁵¹: Fix `raw` directive does not work for text writer
- [#2171](#)³⁴⁵²: Fix cannot linkcheck url with unicode
- [#2182](#)³⁴⁵³: LaTeX: support image file names with more than 1 dots
- [#2189](#)³⁴⁵⁴: Fix previous sibling link for first file in subdirectory uses last file, not intended previous from root toctree

³⁴³⁶ <https://github.com/sphinx-doc/sphinx/issues/2243>

³⁴³⁷ <https://github.com/sphinx-doc/sphinx/issues/2247>

³⁴³⁸ <https://github.com/sphinx-doc/sphinx/issues/2205>

³⁴³⁹ <https://github.com/sphinx-doc/sphinx/issues/1565>

³⁴⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/2211>

³⁴⁴¹ <https://github.com/sphinx-doc/sphinx/issues/2253>

³⁴⁴² <https://github.com/sphinx-doc/sphinx/issues/771>

³⁴⁴³ <https://github.com/sphinx-doc/sphinx/issues/2244>

³⁴⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/2134>

³⁴⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/2094>

³⁴⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/2147>

³⁴⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/1833>

³⁴⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/2176>

³⁴⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/967>

³⁴⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/1237>

³⁴⁵¹ <https://github.com/sphinx-doc/sphinx/issues/2168>

³⁴⁵² <https://github.com/sphinx-doc/sphinx/issues/2171>

³⁴⁵³ <https://github.com/sphinx-doc/sphinx/issues/2182>

³⁴⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/2189>

- [#2003³⁴⁵⁵](#): Fix decode error under python2 (only) when make linkcheck is run
- [#2186³⁴⁵⁶](#): Fix LaTeX output of mathbb in math
- [#1480³⁴⁵⁷](#), [#2188³⁴⁵⁸](#): LaTeX: Support math in section titles
- [#2071³⁴⁵⁹](#): Fix same footnote in more than two section titles => LaTeX/PDF Bug
- [#2040³⁴⁶⁰](#): Fix UnicodeDecodeError in sphinx-apidoc when author contains non-ascii characters
- [#2193³⁴⁶¹](#): Fix shutil.SameFileError if source directory and destination directory are same
- [#2178³⁴⁶²](#): Fix unparsable C++ cross-reference when referencing a function with :cpp:any:
- [#2206³⁴⁶³](#): Fix Sphinx latex doc build failed due to a footnotes
- [#2201³⁴⁶⁴](#): Fix wrong table caption for tables with over 30 rows
- [#2213³⁴⁶⁵](#): Set <blockquote> in the classic theme to fit with <p>
- [#1815³⁴⁶⁶](#): Fix linkcheck does not raise an exception if warniserror set to true and link is broken
- [#2197³⁴⁶⁷](#): Fix slightly cryptic error message for missing index.rst file
- [#1894³⁴⁶⁸](#): Unlisted phony targets in quickstart Makefile
- [#2125³⁴⁶⁹](#): Fix unifies behavior of collapsed fields (GroupedField and TypedField)
- [#1408³⁴⁷⁰](#): Check latex_logo validity before copying
- [#771³⁴⁷¹](#): Fix latex output doesn't set tocdepth
- [#1820³⁴⁷²](#): On Windows, console coloring is broken with colorama version 0.3.3. Now Sphinx use colorama>=0.3.5 to avoid this problem.
- [#2072³⁴⁷³](#): Fix footnotes in chapter-titles do not appear in PDF output
- [#1580³⁴⁷⁴](#): Fix paragraphs in longtable don't work in Latex output
- [#1366³⁴⁷⁵](#): Fix centered image not centered in latex
- [#1860³⁴⁷⁶](#): Fix man page using :samp: with braces - font doesn't reset
- [#1610³⁴⁷⁷](#): Sphinx crashes in Japanese indexing in some systems
- Fix Sphinx crashes if mecab initialization failed

³⁴⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/2003>

³⁴⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/2186>

³⁴⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/1480>

³⁴⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/2188>

³⁴⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/2071>

³⁴⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/2040>

³⁴⁶¹ <https://github.com/sphinx-doc/sphinx/issues/2193>

³⁴⁶² <https://github.com/sphinx-doc/sphinx/issues/2178>

³⁴⁶³ <https://github.com/sphinx-doc/sphinx/issues/2206>

³⁴⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/2201>

³⁴⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/2213>

³⁴⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/1815>

³⁴⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/2197>

³⁴⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/1894>

³⁴⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/2125>

³⁴⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/1408>

³⁴⁷¹ <https://github.com/sphinx-doc/sphinx/issues/771>

³⁴⁷² <https://github.com/sphinx-doc/sphinx/issues/1820>

³⁴⁷³ <https://github.com/sphinx-doc/sphinx/issues/2072>

³⁴⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/1580>

³⁴⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/1366>

³⁴⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/1860>

³⁴⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/1610>

- [#2160](#)³⁴⁷⁸: Fix broken TOC of PDFs if section includes an image
- [#2172](#)³⁴⁷⁹: Fix dysfunctional admonition `\py@lightbox` in `sphinx.sty`. Thanks to jfbu.
- [#2198](#)³⁴⁸⁰, [#2205](#) <<https://github.com/sphinx-doc/sphinx/issues/2205>>`_`: `make gettext` generate broken `ms-gid` for definition lists.
- [#2062](#)³⁴⁸¹: Escape characters in doctests are treated incorrectly with Python 2.
- [#2225](#)³⁴⁸²: Fix if the option does not begin with dash, linking is not performed
- [#2226](#)³⁴⁸³: Fix math is not HTML-encoded when `:nowrap:` is given (`jsmath`, `mathjax`)
- [#1601](#)³⁴⁸⁴, [#2220](#)³⁴⁸⁵: ‘any’ role breaks extended domains behavior. Affected extensions doesn’t support `resolve_any_xref` and `resolve_xref` returns problematic node instead of `None`. `sphinxcontrib-httpdomain` is one of them.
- [#2229](#)³⁴⁸⁶: Fix no warning is given for unknown options

14.137 Release 1.3.3 (released Dec 2, 2015)

Bugs fixed

- [#2177](#)³⁴⁸⁷: Fix parallel hangs
- [#2012](#)³⁴⁸⁸: Fix exception occurred if `numfig_format` is invalid
- [#2142](#)³⁴⁸⁹: Provide non-minified JS code in `sphinx/search/non-minified-js/*.js` for source distribution on PyPI.
- [#2148](#)³⁴⁹⁰: Error while building devhelp target with non-ASCII document.

14.138 Release 1.3.2 (released Nov 29, 2015)

Features added

- [#1935](#)³⁴⁹¹: Make “`numfig_format`” overridable in `latex_elements`.

³⁴⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/2160>

³⁴⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/2172>

³⁴⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/2198>

³⁴⁸¹ <https://github.com/sphinx-doc/sphinx/issues/2062>

³⁴⁸² <https://github.com/sphinx-doc/sphinx/issues/2225>

³⁴⁸³ <https://github.com/sphinx-doc/sphinx/issues/2226>

³⁴⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/1601>

³⁴⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/2220>

³⁴⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/2229>

³⁴⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/2177>

³⁴⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/2012>

³⁴⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/2142>

³⁴⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/2148>

³⁴⁹¹ <https://github.com/sphinx-doc/sphinx/issues/1935>

Bugs fixed

- [#1976](#)³⁴⁹²: Avoid “2.0” version of Babel because it doesn’t work with Windows environment.
- Add a “default.css” stylesheet (which imports “classic.css”) for compatibility
- [#1788](#)³⁴⁹³: graphviz extension raises exception when caption option is present.
- [#1789](#)³⁴⁹⁴: `:pyobject:` option of `literalinclude` directive includes following lines after class definitions
- [#1790](#)³⁴⁹⁵: `literalinclude` strips empty lines at the head and tail
- [#1802](#)³⁴⁹⁶: load plugin themes automatically when `theme.conf` use it as ‘inherit’. Thanks to Takayuki Hirai.
- [#1794](#)³⁴⁹⁷: custom theme extended from `alabaster` or `sphinx_rtd_theme` can’t find base theme.
- [#1834](#)³⁴⁹⁸: compatibility for Docutils 0.13: `handle_io_errors` keyword argument for `docutils.io.FileInput` cause `TypeError`.
- [#1823](#)³⁴⁹⁹: `‘.’` as `<module_path>` for `sphinx-apidoc` cause an unfriendly error. Now `‘.’` is converted to absolute path automatically.
- Fix a crash when setting up extensions which do not support metadata.
- [#1784](#)³⁵⁰⁰: Provide non-minified JS code in `sphinx/search/non-minified-js/*.js`
- [#1822](#)³⁵⁰¹, [#1892](#)³⁵⁰²: Fix regression for [#1061](#)³⁵⁰³. `autosummary` can’t generate doc for imported members since Sphinx 1.3b3. Thanks to Eric Larson.
- [#1793](#)³⁵⁰⁴, [#1819](#)³⁵⁰⁵: “see also” misses a linebreak in text output. Thanks to Takayuki Hirai.
- [#1780](#)³⁵⁰⁶, [#1866](#)³⁵⁰⁷: “make text” shows “class” keyword twice. Thanks to Takayuki Hirai.
- [#1871](#)³⁵⁰⁸: Fix for LaTeX output of tables with one column and multirows.
- Work around the lack of the `HTMLParserError` exception in Python 3.5.
- [#1949](#)³⁵⁰⁹: Use `safe_getattr` in the coverage builder to avoid aborting with descriptors that have custom behavior.
- [#1915](#)³⁵¹⁰: Do not generate smart quotes in doc field type annotations.
- [#1796](#)³⁵¹¹: On py3, automated `.mo` building caused `UnicodeDecodeError`.
- [#1923](#)³⁵¹²: Use babel features only if the babel latex element is nonempty.

³⁴⁹² <https://github.com/sphinx-doc/sphinx/issues/1976>

³⁴⁹³ <https://github.com/sphinx-doc/sphinx/issues/1788>

³⁴⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/1789>

³⁴⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/1790>

³⁴⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/1802>

³⁴⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/1794>

³⁴⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/1834>

³⁴⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/1823>

³⁵⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/1784>

³⁵⁰¹ <https://github.com/sphinx-doc/sphinx/issues/1822>

³⁵⁰² <https://github.com/sphinx-doc/sphinx/issues/1892>

³⁵⁰³ <https://github.com/sphinx-doc/sphinx/issues/1061>

³⁵⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/1793>

³⁵⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/1819>

³⁵⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/1780>

³⁵⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/1866>

³⁵⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/1871>

³⁵⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/1949>

³⁵¹⁰ <https://github.com/sphinx-doc/sphinx/issues/1915>

³⁵¹¹ <https://github.com/sphinx-doc/sphinx/issues/1796>

³⁵¹² <https://github.com/sphinx-doc/sphinx/issues/1923>

- [#1942³⁵¹³](#): Fix a KeyError in websupport.
- [#1903³⁵¹⁴](#): Fix strange id generation for glossary terms.
- `make text` will crush if a definition list item has more than 1 classifiers as: `term : classifier1 : classifier2`.
- [#1855³⁵¹⁵](#): `make gettext` generates broken po file for definition lists with classifier.
- [#1869³⁵¹⁶](#): Fix problems when dealing with files containing non-ASCII characters. Thanks to Marvin Schmidt.
- [#1798³⁵¹⁷](#): Fix building LaTeX with references in titles.
- [#1725³⁵¹⁸](#): On py2 environment, doctest with using non-ASCII characters causes 'ascii' codec can't decode byte exception.
- [#1540³⁵¹⁹](#): Fix RuntimeError with circular referenced toctree
- [#1983³⁵²⁰](#): i18n translation feature breaks references which uses section name.
- [#1990³⁵²¹](#): Use caption of toctree to title of tableofcontents in LaTeX
- [#1987³⁵²²](#): Fix ampersand is ignored in `:menuselection:` and `:guilabel:` on LaTeX builder
- [#1994³⁵²³](#): More supporting non-standard parser (like recomcommonmark parser) for Translation and WebSupport feature. Now `node.rawsource` is fall backed to `node.astext()` during Docutils transforming.
- [#1989³⁵²⁴](#): “make blahblah” on Windows indicate help messages for sphinx-build every time. It was caused by wrong `make.bat` that generated by Sphinx 1.3.0/1.3.1.
- On Py2 environment, `conf.py` that is generated by sphinx-quickstart should have `u` prefixed config value for ‘version’ and ‘release’.
- [#2102³⁵²⁵](#): On Windows + Py3, using `| today |` and non-ASCII date format will raise UnicodeEncodeError.
- [#1974³⁵²⁶](#): UnboundLocalError: local variable ‘domain’ referenced before assignment when using any role and `sphinx.ext.intersphinx` in same time.
- [#2121³⁵²⁷](#): multiple words search doesn’t find pages when words across on the page title and the page content.
- [#1884³⁵²⁸](#), [#1885³⁵²⁹](#): plug-in html themes cannot inherit another plug-in theme. Thanks to Suzumizaki.
- [#1818³⁵³⁰](#): `sphinx.ext.todo` directive generates broken html class attribute as ‘admonition-’ when *language* is specified with non-ASCII linguistic area like ‘ru’ or ‘ja’. To fix this, now `todo` directive can use `:class:` option.
- [#2140³⁵³¹](#): Fix footnotes in table has broken in LaTeX

³⁵¹³ <https://github.com/sphinx-doc/sphinx/issues/1942>

³⁵¹⁴ <https://github.com/sphinx-doc/sphinx/issues/1903>

³⁵¹⁵ <https://github.com/sphinx-doc/sphinx/issues/1855>

³⁵¹⁶ <https://github.com/sphinx-doc/sphinx/issues/1869>

³⁵¹⁷ <https://github.com/sphinx-doc/sphinx/issues/1798>

³⁵¹⁸ <https://github.com/sphinx-doc/sphinx/issues/1725>

³⁵¹⁹ <https://github.com/sphinx-doc/sphinx/issues/1540>

³⁵²⁰ <https://github.com/sphinx-doc/sphinx/issues/1983>

³⁵²¹ <https://github.com/sphinx-doc/sphinx/issues/1990>

³⁵²² <https://github.com/sphinx-doc/sphinx/issues/1987>

³⁵²³ <https://github.com/sphinx-doc/sphinx/issues/1994>

³⁵²⁴ <https://github.com/sphinx-doc/sphinx/issues/1989>

³⁵²⁵ <https://github.com/sphinx-doc/sphinx/issues/2102>

³⁵²⁶ <https://github.com/sphinx-doc/sphinx/issues/1974>

³⁵²⁷ <https://github.com/sphinx-doc/sphinx/issues/2121>

³⁵²⁸ <https://github.com/sphinx-doc/sphinx/issues/1884>

³⁵²⁹ <https://github.com/sphinx-doc/sphinx/issues/1885>

³⁵³⁰ <https://github.com/sphinx-doc/sphinx/issues/1818>

³⁵³¹ <https://github.com/sphinx-doc/sphinx/issues/2140>

- [#2127](#)³⁵³²: MecabBinder for html searching feature doesn't work with Python 3. Thanks to Tomoko Uchida.

14.139 Release 1.3.1 (released Mar 17, 2015)

Bugs fixed

- [#1769](#)³⁵³³: allows generating quickstart files/dirs for destination dir that doesn't overwrite existent files/dirs. Thanks to WAKAYAMA shirou.
- [#1773](#)³⁵³⁴: sphinx-quickstart doesn't accept non-ASCII character as a option argument.
- [#1766](#)³⁵³⁵: the message "least Python 2.6 to run" is at best misleading.
- [#1772](#)³⁵³⁶: cross reference in docstrings like `:param .write:` breaks building.
- [#1770](#)³⁵³⁷, [#1774](#)³⁵³⁸: `literalinclude` with empty file occurs exception. Thanks to Takayuki Hirai.
- [#1777](#)³⁵³⁹: Sphinx 1.3 can't load extra theme. Thanks to tell-k.
- [#1776](#)³⁵⁴⁰: `source_suffix = ['.rst']` cause unfriendly error on prior version.
- [#1771](#)³⁵⁴¹: automated `.mo` building doesn't work properly.
- [#1783](#)³⁵⁴²: Autodoc: Python2 Allow unicode string in `__all__`. Thanks to Jens Hedegaard Nielsen.
- [#1781](#)³⁵⁴³: Setting `html_domain_indices` to a list raises a type check warnings.

14.140 Release 1.3 (released Mar 10, 2015)

Incompatible changes

- Roles `ref`, `term` and `menuse1` now don't generate `emphasis`³⁵⁴⁴ nodes anymore. If you want to keep italic style, adapt your stylesheet.
- Role `numref` uses `%s` as special character to indicate position of figure numbers instead `#` symbol.

³⁵³² <https://github.com/sphinx-doc/sphinx/issues/2127>
³⁵³³ <https://github.com/sphinx-doc/sphinx/issues/1769>
³⁵³⁴ <https://github.com/sphinx-doc/sphinx/issues/1773>
³⁵³⁵ <https://github.com/sphinx-doc/sphinx/issues/1766>
³⁵³⁶ <https://github.com/sphinx-doc/sphinx/issues/1772>
³⁵³⁷ <https://github.com/sphinx-doc/sphinx/issues/1770>
³⁵³⁸ <https://github.com/sphinx-doc/sphinx/issues/1774>
³⁵³⁹ <https://github.com/sphinx-doc/sphinx/issues/1777>
³⁵⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/1776>
³⁵⁴¹ <https://github.com/sphinx-doc/sphinx/issues/1771>
³⁵⁴² <https://github.com/sphinx-doc/sphinx/issues/1783>
³⁵⁴³ <https://github.com/sphinx-doc/sphinx/issues/1781>
³⁵⁴⁴ <https://docutils.sourceforge.io/docs/ref/rst/roles.html#emphasis>

Features added

- Add convenience directives and roles to the C++ domain: directive `cpp:var` as alias for `cpp:member`, role `:cpp:var` as alias for `:cpp:member`, and role `any` for cross-reference to any C++ declaration. ^{#1577³⁵⁴⁵}, ^{#1744³⁵⁴⁶}
- The `source_suffix` config value can now be a list of multiple suffixes.
- Add the ability to specify source parsers by source suffix with the `source_parsers` config value.
- ^{#1675³⁵⁴⁷}: A new builder, AppleHelpBuilder, has been added that builds Apple Help Books.

Bugs fixed

- 1.3b3 change breaks a previous gettext output that contains duplicated msgid such as “foo bar” and “version changes in 1.3: foo bar”.
- ^{#1745³⁵⁴⁸}: latex builder cause maximum recursion depth exceeded when a footnote has a footnote mark itself.
- ^{#1748³⁵⁴⁹}: SyntaxError in sphinx/ext/ifconfig.py with Python 2.6.
- ^{#1658³⁵⁵⁰}, ^{#1750³⁵⁵¹}: No link created (and warning given) if option does not begin with -, / or +. Thanks to Takayuki Hirai.
- ^{#1753³⁵⁵²}: C++, added missing support for more complex declarations.
- ^{#1700³⁵⁵³}: Add `:caption:` option for `toctree`.
- ^{#1742³⁵⁵⁴}: `:name:` option is provided for `toctree`, `code-block` and `literalinclude` directives.
- ^{#1756³⁵⁵⁵}: Incorrect section titles in search that was introduced from 1.3b3.
- ^{#1746³⁵⁵⁶}: C++, fixed name lookup procedure, and added missing lookups in declarations.
- ^{#1765³⁵⁵⁷}: C++, fix old id generation to use fully qualified names.

Documentation

- ^{#1651³⁵⁵⁸}: Add `vartype` field description for python domain.

³⁵⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/1577>

³⁵⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/1744>

³⁵⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/1675>

³⁵⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/1745>

³⁵⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/1748>

³⁵⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/1658>

³⁵⁵¹ <https://github.com/sphinx-doc/sphinx/issues/1750>

³⁵⁵² <https://github.com/sphinx-doc/sphinx/issues/1753>

³⁵⁵³ <https://github.com/sphinx-doc/sphinx/issues/1700>

³⁵⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/1742>

³⁵⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/1756>

³⁵⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/1746>

³⁵⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/1765>

³⁵⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/1651>

14.141 Release 1.3b3 (released Feb 24, 2015)

Incompatible changes

- Dependency requirement updates: Docutils 0.11, Pygments 2.0
- The `gettext_enables` config value has been renamed to `gettext_additional_targets`.
- [#1735](https://github.com/sphinx-doc/sphinx/issues/1735)³⁵⁵⁹: Use <https://docs.python.org/> instead of `http` protocol. It was used for `sphinx.ext.intersphinx` and some documentation.

Features added

- [#1346](https://github.com/sphinx-doc/sphinx/issues/1346)³⁵⁶⁰: Add new default theme;
 - Add ‘alabaster’ theme.
 - Add ‘sphinx_rtd_theme’ theme.
 - The ‘default’ html theme has been renamed to ‘classic’. ‘default’ is still available, however it will emit notice a recommendation that using new ‘alabaster’ theme.
- Added `highlight_options` configuration value.
- The `language` config value is now available in the HTML templates.
- The `env-updated` event can now return a value, which is interpreted as an iterable of additional docnames that need to be rewritten.
- [#772](https://github.com/sphinx-doc/sphinx/issues/772)³⁵⁶¹: Support for scoped and unscoped enums in C++. Enumerators in unscoped enums are injected into the parent scope in addition to the enum scope.
- Add `todo_include_todos` config option to quickstart conf file, handled as described in documentation.
- HTML breadcrumb items tag has class “nav-item” and “nav-item-N” (like nav-item-0, 1, 2...).
- New option `sphinx-quickstart --use-make-mode` for generating Makefile that use `sphinx-build` make-mode.
- [#1235](https://github.com/sphinx-doc/sphinx/issues/1235)³⁵⁶²: `i18n`: several node can be translated if it is set to `gettext_additional_targets` in `conf.py`. Supported nodes are:
 - ‘literal-block’
 - ‘doctest-block’
 - ‘raw’
 - ‘image’
- [#1227](https://github.com/sphinx-doc/sphinx/issues/1227)³⁵⁶³: Add `html_scaled_image_link` config option to `conf.py`, to control scaled image link.

³⁵⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/1735>

³⁵⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/1346>

³⁵⁶¹ <https://github.com/sphinx-doc/sphinx/issues/772>

³⁵⁶² <https://github.com/sphinx-doc/sphinx/issues/1235>

³⁵⁶³ <https://github.com/sphinx-doc/sphinx/issues/1227>

Bugs fixed

- LaTeX writer now generates correct markup for cells spanning multiple rows.
- [#1674](https://github.com/sphinx-doc/sphinx/issues/1674)³⁵⁶⁴: Do not crash if a module's `__all__` is not a list of strings.
- [#1629](https://github.com/sphinx-doc/sphinx/issues/1629)³⁵⁶⁵: Use `VerbatimBorderColor` to add frame to code-block in LaTeX
- On windows, make-mode didn't work on Win32 platform if Sphinx was invoked as `python sphinx-build.py`.
- [#1687](https://github.com/sphinx-doc/sphinx/issues/1687)³⁵⁶⁶: linkcheck now treats 401 Unauthorized responses as “working”.
- [#1690](https://github.com/sphinx-doc/sphinx/issues/1690)³⁵⁶⁷: toctrees with `glob` option now can also contain entries for single documents with explicit title.
- [#1591](https://github.com/sphinx-doc/sphinx/issues/1591)³⁵⁶⁸: html search results for C++ elements now has correct interpage links.
- bizstyle theme: nested long title pages make long breadcrumb that breaks page layout.
- bizstyle theme: all breadcrumb items become ‘Top’ on some mobile browser (iPhone5s safari).
- [#1722](https://github.com/sphinx-doc/sphinx/issues/1722)³⁵⁶⁹: restore `toctree()` template function behavior that was changed at 1.3b1.
- [#1732](https://github.com/sphinx-doc/sphinx/issues/1732)³⁵⁷⁰: i18n: localized table caption raises exception.
- [#1718](https://github.com/sphinx-doc/sphinx/issues/1718)³⁵⁷¹: `:numref:` does not work with capital letters in the label
- [#1630](https://github.com/sphinx-doc/sphinx/issues/1630)³⁵⁷²: resolve CSS conflicts, `div.container` css target for literal block wrapper now renamed to `div.literal-block-wrapper`.
- `sphinx.util.pycompat` has been restored in its backwards-compatibility; slated for removal in Sphinx 1.4.
- [#1719](https://github.com/sphinx-doc/sphinx/issues/1719)³⁵⁷³: LaTeX writer does not respect `numref_format` option in captions

14.142 Release 1.3b2 (released Dec 5, 2014)

Incompatible changes

- update bundled `ez_setup.py` for `setuptools-7.0` that requires Python 2.6 or later.

Features added

- [#1597](https://github.com/sphinx-doc/sphinx/issues/1597)³⁵⁷⁴: Added possibility to return a new template name from `html-page-context`.
- [PR#314](https://github.com/sphinx-doc/sphinx/issues/314)³⁵⁷⁵, [#1150](https://github.com/sphinx-doc/sphinx/issues/1150)³⁵⁷⁶: Configuration values are now checked for their type. A warning is raised if the configured and the default value do not have the same type and do not share a common non-trivial base class.

³⁵⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/1674>

³⁵⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/1629>

³⁵⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/1687>

³⁵⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/1690>

³⁵⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/1591>

³⁵⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/1722>

³⁵⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/1732>

³⁵⁷¹ <https://github.com/sphinx-doc/sphinx/issues/1718>

³⁵⁷² <https://github.com/sphinx-doc/sphinx/issues/1630>

³⁵⁷³ <https://github.com/sphinx-doc/sphinx/issues/1719>

³⁵⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/1597>

³⁵⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/314>

³⁵⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/1150>

Bugs fixed

- [PR#311](#)³⁵⁷⁷: sphinx-quickstart does not work on python 3.4.
- Fix `autodoc_docstring_signature` not working with signatures in class docstrings.
- Rebuilding cause crash unexpectedly when source files were added.
- [#1607](#)³⁵⁷⁸: Fix a crash when building latexpdf with “howto” class
- [#1251](#)³⁵⁷⁹: Fix again. Sections which depth are lower than :tocdepth: should not be shown on localtoc sidebar.
- make-mode didn’t work on Win32 platform if Sphinx was installed by wheel package.

14.143 Release 1.3b1 (released Oct 10, 2014)

Incompatible changes

- Dropped support for Python 2.5, 3.1 and 3.2.
- Dropped support for Docutils versions up to 0.9.
- Removed the `sphinx.ext.oldcmakup` extension.
- The deprecated config values `exclude_trees`, `exclude_dirnames` and `unused_docs` have been removed.
- A new node, `sphinx.addnodes.literal_strong`, has been added, for text that should appear literally (i.e. no smart quotes) in strong font. Custom writers will have to be adapted to handle this node.
- [PR#269](#)³⁵⁸⁰, [#1476](#)³⁵⁸¹: replace `<tt>` tag by `<code>`. User customized stylesheets should be updated If the css contain some styles for `tt` tag. Thanks to Takeshi Komiya.
- [#1543](#)³⁵⁸²: `templates_path` is automatically added to `exclude_patterns` to avoid reading autosummary rst templates in the templates directory.
- Custom domains should implement the new `Domain.resolve_any_xref` method to make the `any` role work properly.
- gettext builder: gettext doesn’t emit uuid information to generated pot files by default. Please set `True` to `gettext_uuid` to emit uuid information. Additionally, if the `python-levenshtein` 3rd-party package is installed, it will improve the calculation time.
- gettext builder: disable extracting/apply ‘index’ node by default. Please set ‘index’ to `gettext_enables` to enable extracting index entries.
- [PR#307](#)³⁵⁸³: Add frame to code-block in LaTeX. Thanks to Takeshi Komiya.

³⁵⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/311>

³⁵⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/1607>

³⁵⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/1251>

³⁵⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/269>

³⁵⁸¹ <https://github.com/sphinx-doc/sphinx/issues/1476>

³⁵⁸² <https://github.com/sphinx-doc/sphinx/issues/1543>

³⁵⁸³ <https://github.com/sphinx-doc/sphinx/issues/307>

Features added

- Add support for Python 3.4.
- Add support for Docutils 0.12
- Added `sphinx.ext.napoleon` extension for NumPy and Google style docstring support.
- Added support for parallel reading (parsing) of source files with the `sphinx-build -j` option. Third-party extensions will need to be checked for compatibility and may need to be adapted if they store information in the build environment object. See `env-merge-info`.
- Added the `any` role that can be used to find a cross-reference of *any* type in *any* domain. Custom domains should implement the new `Domain.resolve_any_xref` method to make this work properly.
- Exception logs now contain the last 10 messages emitted by Sphinx.
- Added support for extension versions (a string returned by `setup()`, these can be shown in the traceback log files). Version requirements for extensions can be specified in projects using the new `needs_extensions` config value.
- Changing the default role within a document with the `default-role`³⁵⁸⁴ directive is now supported.
- [PR#214](https://github.com/sphinx-doc/sphinx/issues/214)³⁵⁸⁵: Added stemming support for 14 languages, so that the built-in document search can now handle these. Thanks to Shibukawa Yoshiki.
- [PR#296](https://github.com/sphinx-doc/sphinx/issues/296)³⁵⁸⁶, [PR#303](https://github.com/sphinx-doc/sphinx/issues/303)³⁵⁸⁷, [#76](https://github.com/sphinx-doc/sphinx/issues/76)³⁵⁸⁸: numfig feature: Assign numbers to figures, tables and code-blocks. This feature is configured with `numfig`, `numfig_secnum_depth` and `numfig_format`. Also `numref` role is available. Thanks to Takeshi Komiya.
- [PR#202](https://github.com/sphinx-doc/sphinx/issues/202)³⁵⁸⁹: Allow “.” and “~” prefixed references in `:param:` doc fields for Python.
- [PR#184](https://github.com/sphinx-doc/sphinx/issues/184)³⁵⁹⁰: Add `autodoc_mock_imports`, allowing to mock imports of external modules that need not be present when autodocumenting.
- [#925](https://github.com/sphinx-doc/sphinx/issues/925)³⁵⁹¹: Allow list-typed config values to be provided on the command line, like `-D key=val1,val2`.
- [#668](https://github.com/sphinx-doc/sphinx/issues/668)³⁵⁹²: Allow line numbering of `code-block` and `literalinclude` directives to start at an arbitrary line number, with a new `lineno-start` option.
- [PR#172](https://github.com/sphinx-doc/sphinx/issues/172)³⁵⁹³, [PR#266](https://github.com/sphinx-doc/sphinx/issues/266)³⁵⁹⁴: The `code-block` and `literalinclude` directives now can have a `caption` option that shows a filename before the code in the output. Thanks to Nasimul Haque, Takeshi Komiya.
- Prompt for the document language in `sphinx-quickstart`.
- [PR#217](https://github.com/sphinx-doc/sphinx/issues/217)³⁵⁹⁵: Added config values to suppress UUID and location information in generated gettext catalogs.
- [PR#236](https://github.com/sphinx-doc/sphinx/issues/236)³⁵⁹⁶, [#1456](https://github.com/sphinx-doc/sphinx/issues/1456)³⁵⁹⁷: apidoc: Add a `-M` option to put module documentation before submodule documentation. Thanks to Wes Turner and Luc Saffre.

³⁵⁸⁴ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#default-role>

³⁵⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/214>

³⁵⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/296>

³⁵⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/303>

³⁵⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/76>

³⁵⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/202>

³⁵⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/184>

³⁵⁹¹ <https://github.com/sphinx-doc/sphinx/issues/925>

³⁵⁹² <https://github.com/sphinx-doc/sphinx/issues/668>

³⁵⁹³ <https://github.com/sphinx-doc/sphinx/issues/172>

³⁵⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/266>

³⁵⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/217>

³⁵⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/236>

³⁵⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/1456>

- [#1434³⁵⁹⁸](#): Provide non-minified JS files for jquery.js and underscore.js to clarify the source of the minified files.
- [PR#252³⁵⁹⁹](#), [#1291³⁶⁰⁰](#): Windows color console support. Thanks to meu31.
- [PR#255³⁶⁰¹](#): When generating latex references, also insert latex target/anchor for the ids defined on the node. Thanks to Olivier Heurtier.
- [PR#229³⁶⁰²](#): Allow registration of other translators. Thanks to Russell Sim.
- Add `app.set_translator()` API to register or override a Docutils translator class like `html_translator_class`.
- [PR#267³⁶⁰³](#), [#1134³⁶⁰⁴](#): add ‘diff’ parameter to `literalinclude`. Thanks to Richard Wall and WAKAYAMA shirou.
- [PR#272³⁶⁰⁵](#): Added ‘bizstyle’ theme. Thanks to Shoji KUMAGAI.
- Automatically compile *.mo files from *.po files when `gettext_auto_build` is True (default) and *.po is newer than *.mo file.
- [#623³⁶⁰⁶](#): `sphinx.ext.viewcode` supports imported function/class aliases.
- [PR#275³⁶⁰⁷](#): `sphinx.ext.intersphinx` supports multiple target for the inventory. Thanks to Brigitta Sipocz.
- [PR#261³⁶⁰⁸](#): Added the `env-before-read-docs` event that can be connected to modify the order of documents before they are read by the environment.
- [#1284³⁶⁰⁹](#): Program options documented with *option* can now start with +.
- [PR#291³⁶¹⁰](#): The caption of *code-block* is recognized as a title of ref target. Thanks to Takeshi Komiya.
- [PR#298³⁶¹¹](#): Add new API: `add_latex_package()`. Thanks to Takeshi Komiya.
- [#1344³⁶¹²](#): add `gettext_enables` to enable extracting ‘index’ to gettext catalog output / applying translation catalog to generated documentation.
- [PR#301³⁶¹³](#), [#1583³⁶¹⁴](#): Allow the line numbering of the directive `literalinclude` to match that of the included file, using a new `lineno-match` option. Thanks to Jeppe Pihl.
- [PR#299³⁶¹⁵](#): add various options to sphinx-quickstart. Quiet mode option `--quiet` will skips wizard mode. Thanks to WAKAYAMA shirou.
- [#1623³⁶¹⁶](#): Return types specified with `:rtype:` are now turned into links if possible.

³⁵⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/1434>

³⁵⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/252>

³⁶⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/1291>

³⁶⁰¹ <https://github.com/sphinx-doc/sphinx/issues/255>

³⁶⁰² <https://github.com/sphinx-doc/sphinx/issues/229>

³⁶⁰³ <https://github.com/sphinx-doc/sphinx/issues/267>

³⁶⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/1134>

³⁶⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/272>

³⁶⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/623>

³⁶⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/275>

³⁶⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/261>

³⁶⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/1284>

³⁶¹⁰ <https://github.com/sphinx-doc/sphinx/issues/291>

³⁶¹¹ <https://github.com/sphinx-doc/sphinx/issues/298>

³⁶¹² <https://github.com/sphinx-doc/sphinx/issues/1344>

³⁶¹³ <https://github.com/sphinx-doc/sphinx/issues/301>

³⁶¹⁴ <https://github.com/sphinx-doc/sphinx/issues/1583>

³⁶¹⁵ <https://github.com/sphinx-doc/sphinx/issues/299>

³⁶¹⁶ <https://github.com/sphinx-doc/sphinx/issues/1623>

Bugs fixed

- #1438³⁶¹⁷: Updated jQuery version from 1.8.3 to 1.11.1.
- #1568³⁶¹⁸: Fix a crash when a “centered” directive contains a reference.
- Now sphinx.ext.autodoc works with python-2.5 again.
- #1563³⁶¹⁹: `add_search_language()` raises AssertionError for correct type of argument. Thanks to rikoman.
- #1174³⁶²⁰: Fix smart quotes being applied inside roles like `program` or `makevar`.
- PR#235³⁶²¹: comment db schema of websupport lacked a length of the `node_id` field. Thanks to solos.
- #1466³⁶²², PR#241 <<https://github.com/sphinx-doc/sphinx/issues/241>>_: Fix failure of the cpp domain parser to parse C++ “variadic templates” declarations. Thanks to Victor Zverovich.
- #1459³⁶²³, PR#244 <<https://github.com/sphinx-doc/sphinx/issues/244>>_: Fix default mathjax js path point to `http://` that cause mixed-content error on HTTPS server. Thanks to sbrandtb and robo9k.
- PR#157³⁶²⁴: autodoc remove spurious signatures from @property decorated attributes. Thanks to David Ham.
- PR#159³⁶²⁵: Add coverage targets to quickstart generated Makefile and make.bat. Thanks to Matthias Troffaes.
- #1251³⁶²⁶: When specifying `toctree :numbered:` option and `:tocdepth:` metadata, sub section number that is larger depth than `:tocdepth:` is shrunk.
- PR#260³⁶²⁷: Encode underscore in citation labels for latex export. Thanks to Lennart Fricke.
- PR#264³⁶²⁸: Fix could not resolve xref for figure node with `:name:` option. Thanks to Takeshi Komiya.
- PR#265³⁶²⁹: Fix could not capture caption of graphviz node by xref. Thanks to Takeshi Komiya.
- PR#263³⁶³⁰, #1013³⁶³¹, #1103³⁶³²: Rewrite of C++ domain. Thanks to Jakob Lykke Andersen.
 - Hyperlinks to all found nested names and template arguments (#1103³⁶³³).
 - Support for function types everywhere, e.g., in `std::function<bool(int, int)>` (#1013³⁶³⁴).
 - Support for virtual functions.
 - Changed interpretation of function arguments to following standard prototype declarations, i.e., `void f(arg)` means that `arg` is the type of the argument, instead of it being the name.
 - Updated tests.
 - Updated documentation with elaborate description of what declarations are supported and how the namespace declarations influence declaration and cross-reference lookup.

³⁶¹⁷ <https://github.com/sphinx-doc/sphinx/issues/1438>

³⁶¹⁸ <https://github.com/sphinx-doc/sphinx/issues/1568>

³⁶¹⁹ <https://github.com/sphinx-doc/sphinx/issues/1563>

³⁶²⁰ <https://github.com/sphinx-doc/sphinx/issues/1174>

³⁶²¹ <https://github.com/sphinx-doc/sphinx/issues/235>

³⁶²² <https://github.com/sphinx-doc/sphinx/issues/1466>

³⁶²³ <https://github.com/sphinx-doc/sphinx/issues/1459>

³⁶²⁴ <https://github.com/sphinx-doc/sphinx/issues/157>

³⁶²⁵ <https://github.com/sphinx-doc/sphinx/issues/159>

³⁶²⁶ <https://github.com/sphinx-doc/sphinx/issues/1251>

³⁶²⁷ <https://github.com/sphinx-doc/sphinx/issues/260>

³⁶²⁸ <https://github.com/sphinx-doc/sphinx/issues/264>

³⁶²⁹ <https://github.com/sphinx-doc/sphinx/issues/265>

³⁶³⁰ <https://github.com/sphinx-doc/sphinx/issues/263>

³⁶³¹ <https://github.com/sphinx-doc/sphinx/issues/1013>

³⁶³² <https://github.com/sphinx-doc/sphinx/issues/1103>

³⁶³³ <https://github.com/sphinx-doc/sphinx/issues/1103>

³⁶³⁴ <https://github.com/sphinx-doc/sphinx/issues/1013>

- Index names may be different now. Elements are indexed by their fully qualified name. It should be rather easy to change this behaviour and potentially index by namespaces/classes as well.
- [PR#258](#)³⁶³⁵, [#939](#)³⁶³⁶: Add `dedent` option for `code-block` and `literalinclude`. Thanks to Zafar Siddiqui.
- [PR#268](#)³⁶³⁷: Fix numbering section does not work at `singlehtml` mode. It still ad-hoc fix because there is a issue that section IDs are conflicted. Thanks to Takeshi Komiya.
- [PR#273](#)³⁶³⁸, [#1536](#)³⁶³⁹: Fix `RuntimeError` with numbered circular `toctree`. Thanks to Takeshi Komiya.
- [PR#274](#)³⁶⁴⁰: Set its URL as a default title value if URL appears in `toctree`. Thanks to Takeshi Komiya.
- [PR#276](#)³⁶⁴¹, [#1381](#)³⁶⁴²: `rftc` and `pep` roles support custom link text. Thanks to Takeshi Komiya.
- [PR#277](#)³⁶⁴³, [#1513](#)³⁶⁴⁴: highlights for function pointers in argument list of `c:function`. Thanks to Takeshi Komiya.
- [PR#278](#)³⁶⁴⁵: Fix section entries were shown twice if `toctree` has been put under only directive. Thanks to Takeshi Komiya.
- [#1547](#)³⁶⁴⁶: `pgen2` tokenizer doesn't recognize `... literal` (Ellipsis for `py3`).
- [PR#294](#)³⁶⁴⁷: On LaTeX builder, wrap float environment on writing `literal_block` to avoid separation of caption and body. Thanks to Takeshi Komiya.
- [PR#295](#)³⁶⁴⁸, [#1520](#)³⁶⁴⁹: `make.bat latexpdf` mechanism to `cd` back to the current directory. Thanks to Peter Suter.
- [PR#297](#)³⁶⁵⁰, [#1571](#)³⁶⁵¹: Add `imgpath` property to all builders. It make easier to develop builder extensions. Thanks to Takeshi Komiya.
- [#1584](#)³⁶⁵²: Point to master doc in HTML “top” link.
- [#1585](#)³⁶⁵³: Autosummary of modules broken in Sphinx 1.2.3.
- [#1610](#)³⁶⁵⁴: Sphinx cause `AttributeError` when `MeCab` search option is enabled and `python-mecab` is not installed.
- [#1674](#)³⁶⁵⁵: Do not crash if a module's `__all__` is not a list of strings.
- [#1673](#)³⁶⁵⁶: Fix crashes with `nitpick_ignore` and `:doc:` references.
- [#1686](#)³⁶⁵⁷: `ifconfig` directive doesn't care about default config values.

³⁶³⁵ <https://github.com/sphinx-doc/sphinx/issues/258>

³⁶³⁶ <https://github.com/sphinx-doc/sphinx/issues/939>

³⁶³⁷ <https://github.com/sphinx-doc/sphinx/issues/268>

³⁶³⁸ <https://github.com/sphinx-doc/sphinx/issues/273>

³⁶³⁹ <https://github.com/sphinx-doc/sphinx/issues/1536>

³⁶⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/274>

³⁶⁴¹ <https://github.com/sphinx-doc/sphinx/issues/276>

³⁶⁴² <https://github.com/sphinx-doc/sphinx/issues/1381>

³⁶⁴³ <https://github.com/sphinx-doc/sphinx/issues/277>

³⁶⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/1513>

³⁶⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/278>

³⁶⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/1547>

³⁶⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/294>

³⁶⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/295>

³⁶⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/1520>

³⁶⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/297>

³⁶⁵¹ <https://github.com/sphinx-doc/sphinx/issues/1571>

³⁶⁵² <https://github.com/sphinx-doc/sphinx/issues/1584>

³⁶⁵³ <https://github.com/sphinx-doc/sphinx/issues/1585>

³⁶⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/1610>

³⁶⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/1674>

³⁶⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/1673>

³⁶⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/1686>

- [#1642³⁶⁵⁸](#): Fix only one search result appearing in Chrome.

Documentation

- Add clarification about the syntax of tags. (`doc/markup/misc.rst`)

14.144 Release 1.2.3 (released Sep 1, 2014)

Features added

- [#1518³⁶⁵⁹](#): `sphinx-apidoc` command now has a `--version` option to show version information and exit
- New locales: Hebrew, European Portuguese, Vietnamese.

Bugs fixed

- [#636³⁶⁶⁰](#): Keep straight single quotes in literal blocks in the LaTeX build.
- [#1419³⁶⁶¹](#): Generated `i18n sphinx.js` files are missing message catalog entries from `'js_t'` and `'html'`. The issue was introduced from Sphinx 1.1
- [#1363³⁶⁶²](#): Fix `i18n`: missing python domain's cross-references with `currentmodule` directive or `currentclass` directive.
- [#1444³⁶⁶³](#): `autosummary` does not create the description from attributes `docstring`.
- [#1457³⁶⁶⁴](#): In python3 environment, make `linkcheck` cause "Can't convert 'bytes' object to str implicitly" error when link target url has a hash part. Thanks to Jorge_C.
- [#1467³⁶⁶⁵](#): Exception on Python3 if nonexistent method is specified by `automethod`
- [#1441³⁶⁶⁶](#): `autosummary` can't handle nested classes correctly.
- [#1499³⁶⁶⁷](#): With non-callable `setup` in a `conf.py`, now `sphinx-build` emits a user-friendly error message.
- [#1502³⁶⁶⁸](#): In `autodoc`, fix display of parameter defaults containing backslashes.
- [#1226³⁶⁶⁹](#): `autodoc`, `autosummary`: importing `setup.py` by `automodule` will invoke `setup` process and execute `sys.exit()`. Now Sphinx avoids `SystemExit` exception and emits warnings without unexpected termination.
- [#1503³⁶⁷⁰](#): `py:function` directive generate incorrectly signature when specifying a default parameter with an empty list `[]`. Thanks to Geert Jansen.
- [#1508³⁶⁷¹](#): Non-ASCII filename raise exception on `make singlehtml`, `latex`, `man`, `texinfo` and `changes`.

³⁶⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/1642>

³⁶⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/1518>

³⁶⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/636>

³⁶⁶¹ <https://github.com/sphinx-doc/sphinx/issues/1419>

³⁶⁶² <https://github.com/sphinx-doc/sphinx/issues/1363>

³⁶⁶³ <https://github.com/sphinx-doc/sphinx/issues/1444>

³⁶⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/1457>

³⁶⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/1467>

³⁶⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/1441>

³⁶⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/1499>

³⁶⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/1502>

³⁶⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/1226>

³⁶⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/1503>

³⁶⁷¹ <https://github.com/sphinx-doc/sphinx/issues/1508>

- [#1531³⁶⁷²](#): On Python3 environment, docutils.conf with ‘source_link=true’ in the general section cause type error.
- [PR#270³⁶⁷³](#), [#1533³⁶⁷⁴](#): Non-ASCII docstring cause UnicodeDecodeError when uses with inheritance-diagram directive. Thanks to WAKAYAMA shirou.
- [PR#281³⁶⁷⁵](#), [PR#282³⁶⁷⁶](#), [#1509³⁶⁷⁷](#): TODO extension not compatible with websupport. Thanks to Takeshi Komiya.
- [#1477³⁶⁷⁸](#): gettext does not extract nodes.line in a table or list.
- [#1544³⁶⁷⁹](#): `make text` generates wrong table when it has empty table cells.
- [#1522³⁶⁸⁰](#): Footnotes from table get displayed twice in LaTeX. This problem has been appeared from Sphinx 1.2.1 by [#949³⁶⁸¹](#).
- [#508³⁶⁸²](#): Sphinx every time exit with zero when is invoked from setup.py command. ex. `python setup.py build_sphinx -b doctest` return zero even if doctest failed.

14.145 Release 1.2.2 (released Mar 2, 2014)

Bugs fixed

- [PR#211³⁶⁸³](#): When checking for existence of the `html_logo` file, check the full relative path and not the base-name.
- [PR#212³⁶⁸⁴](#): Fix traceback with autodoc and `__init__` methods without docstring.
- [PR#213³⁶⁸⁵](#): Fix a missing import in the setup command.
- [#1357³⁶⁸⁶](#): Option names documented by *option* are now again allowed to not start with a dash or slash, and referencing them will work correctly.
- [#1358³⁶⁸⁷](#): Fix handling of image paths outside of the source directory when using the “wildcard” style reference.
- [#1374³⁶⁸⁸](#): Fix for autosummary generating overly-long summaries if first line doesn’t end with a period.
- [#1383³⁶⁸⁹](#): Fix Python 2.5 compatibility of sphinx-apidoc.
- [#1391³⁶⁹⁰](#): Actually prevent using “pngmath” and “mathjax” extensions at the same time in sphinx-quickstart.
- [#1386³⁶⁹¹](#): Fix bug preventing more than one theme being added by the entry point mechanism.

³⁶⁷² <https://github.com/sphinx-doc/sphinx/issues/1531>

³⁶⁷³ <https://github.com/sphinx-doc/sphinx/issues/270>

³⁶⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/1533>

³⁶⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/281>

³⁶⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/282>

³⁶⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/1509>

³⁶⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/1477>

³⁶⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/1544>

³⁶⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/1522>

³⁶⁸¹ <https://github.com/sphinx-doc/sphinx/issues/949>

³⁶⁸² <https://github.com/sphinx-doc/sphinx/issues/508>

³⁶⁸³ <https://github.com/sphinx-doc/sphinx/issues/211>

³⁶⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/212>

³⁶⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/213>

³⁶⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/1357>

³⁶⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/1358>

³⁶⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/1374>

³⁶⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/1383>

³⁶⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/1391>

³⁶⁹¹ <https://github.com/sphinx-doc/sphinx/issues/1386>

- [#1370](#)³⁶⁹²: Ignore “toctree” nodes in text writer, instead of raising.
- [#1364](#)³⁶⁹³: Fix ‘make gettext’ fails when the ‘.. todoclist::’ directive is present.
- [#1367](#)³⁶⁹⁴: Fix a change of [PR#96](#)³⁶⁹⁵ that break sphinx.util.docfields.Field.make_field interface/behavior for item argument usage.

Documentation

- Extended the *documentation about building extensions*.

14.146 Release 1.2.1 (released Jan 19, 2014)

Bugs fixed

- [#1335](#)³⁶⁹⁶: Fix autosummary template overloading with exclamation prefix like `{% extends "!autosummary/class.rst" %}` cause infinite recursive function call. This was caused by [PR#181](#)³⁶⁹⁷.
- [#1337](#)³⁶⁹⁸: Fix autodoc with `autoclass_content="both"` uses useless `object.__init__` docstring when class does not have `__init__`. This was caused by a change for [#1138](#)³⁶⁹⁹.
- [#1340](#)³⁷⁰⁰: Can’t search alphabetical words on the HTML quick search generated with `language='ja'`.
- [#1319](#)³⁷⁰¹: Do not crash if the `html_logo` file does not exist.
- [#603](#)³⁷⁰²: Do not use the HTML-ized title for building the search index (that resulted in “literal” being found on every page with a literal in the title).
- [#751](#)³⁷⁰³: Allow production lists longer than a page in LaTeX by using `longtable`.
- [#764](#)³⁷⁰⁴: Always look for stopwords lowercased in JS search.
- [#814](#)³⁷⁰⁵: autodoc: Guard against strange type objects that don’t have `__bases__`.
- [#932](#)³⁷⁰⁶: autodoc: Do not crash if `__doc__` is not a string.
- [#933](#)³⁷⁰⁷: Do not crash if an *option* value is malformed (contains spaces but no option name).
- [#908](#)³⁷⁰⁸: On Python 3, handle error messages from LaTeX correctly in the `pngmath` extension.
- [#943](#)³⁷⁰⁹: In autosummary, recognize “first sentences” to pull from the docstring if they contain uppercase letters.

³⁶⁹² <https://github.com/sphinx-doc/sphinx/issues/1370>

³⁶⁹³ <https://github.com/sphinx-doc/sphinx/issues/1364>

³⁶⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/1367>

³⁶⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/96>

³⁶⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/1335>

³⁶⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/181>

³⁶⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/1337>

³⁶⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/1138>

³⁷⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/1340>

³⁷⁰¹ <https://github.com/sphinx-doc/sphinx/issues/1319>

³⁷⁰² <https://github.com/sphinx-doc/sphinx/issues/603>

³⁷⁰³ <https://github.com/sphinx-doc/sphinx/issues/751>

³⁷⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/764>

³⁷⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/814>

³⁷⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/932>

³⁷⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/933>

³⁷⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/908>

³⁷⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/943>

- [#923](#)³⁷¹⁰: Take the entire LaTeX document into account when caching pngmath-generated images. This rebuilds them correctly when `pngmath_latex_preamble` changes.
- [#901](#)³⁷¹¹: Emit a warning when using Docutils’ new “math” markup without a Sphinx math extension active.
- [#845](#)³⁷¹²: In code blocks, when the selected lexer fails, display line numbers nevertheless if configured.
- [#929](#)³⁷¹³: Support parsed-literal blocks in LaTeX output correctly.
- [#949](#)³⁷¹⁴: Update the `tabulary.sty` packed with Sphinx.
- [#1050](#)³⁷¹⁵: Add anonymous labels into `objects.inv` to be referenced via `intersphinx`.
- [#1095](#)³⁷¹⁶: Fix print-media stylesheet being included always in the “scrolls” theme.
- [#1085](#)³⁷¹⁷: Fix current classname not getting set if class description has `:noindex:` set.
- [#1181](#)³⁷¹⁸: Report option errors in autodoc directives more gracefully.
- [#1155](#)³⁷¹⁹: Fix aut documenting C-defined methods as attributes in Python 3.
- [#1233](#)³⁷²⁰: Allow finding both Python classes and exceptions with the “class” and “exc” roles in `intersphinx`.
- [#1198](#)³⁷²¹: Allow “image” for the “figwidth” option of the `figure`³⁷²² directive as documented by docutils.
- [#1152](#)³⁷²³: Fix pycode parsing errors of Python 3 code by including two grammar versions for Python 2 and 3, and loading the appropriate version for the running Python version.
- [#1017](#)³⁷²⁴: Be helpful and tell the user when the argument to `option` does not match the required format.
- [#1345](#)³⁷²⁵: Fix two bugs with `nitpick_ignore`; now you don’t have to remove the store environment for changes to have effect.
- [#1072](#)³⁷²⁶: In the JS search, fix issues searching for upper-cased words by lowercasing words before stemming.
- [#1299](#)³⁷²⁷: Make behavior of the `math` directive more consistent and avoid producing empty environments in LaTeX output.
- [#1308](#)³⁷²⁸: Strip HTML tags from the content of “raw” nodes before feeding it to the search indexer.
- [#1249](#)³⁷²⁹: Fix duplicate LaTeX page numbering for manual documents.
- [#1292](#)³⁷³⁰: In the linkchecker, retry HEAD requests when denied by HTTP 405. Also make the redirect code apparent and tweak the output a bit to be more obvious.

³⁷¹⁰ <https://github.com/sphinx-doc/sphinx/issues/923>

³⁷¹¹ <https://github.com/sphinx-doc/sphinx/issues/901>

³⁷¹² <https://github.com/sphinx-doc/sphinx/issues/845>

³⁷¹³ <https://github.com/sphinx-doc/sphinx/issues/929>

³⁷¹⁴ <https://github.com/sphinx-doc/sphinx/issues/949>

³⁷¹⁵ <https://github.com/sphinx-doc/sphinx/issues/1050>

³⁷¹⁶ <https://github.com/sphinx-doc/sphinx/issues/1095>

³⁷¹⁷ <https://github.com/sphinx-doc/sphinx/issues/1085>

³⁷¹⁸ <https://github.com/sphinx-doc/sphinx/issues/1181>

³⁷¹⁹ <https://github.com/sphinx-doc/sphinx/issues/1155>

³⁷²⁰ <https://github.com/sphinx-doc/sphinx/issues/1233>

³⁷²¹ <https://github.com/sphinx-doc/sphinx/issues/1198>

³⁷²² <https://docutils.sourceforge.io/docs/ref/rst/directives.html#figure>

³⁷²³ <https://github.com/sphinx-doc/sphinx/issues/1152>

³⁷²⁴ <https://github.com/sphinx-doc/sphinx/issues/1017>

³⁷²⁵ <https://github.com/sphinx-doc/sphinx/issues/1345>

³⁷²⁶ <https://github.com/sphinx-doc/sphinx/issues/1072>

³⁷²⁷ <https://github.com/sphinx-doc/sphinx/issues/1299>

³⁷²⁸ <https://github.com/sphinx-doc/sphinx/issues/1308>

³⁷²⁹ <https://github.com/sphinx-doc/sphinx/issues/1249>

³⁷³⁰ <https://github.com/sphinx-doc/sphinx/issues/1292>

- [#1285](#)³⁷³¹: Avoid name clashes between C domain objects and section titles.
- [#848](#)³⁷³²: Always take the newest code in incremental rebuilds with the `sphinx.ext.viewcode` extension.
- [#979](#)³⁷³³, [#1266](#)³⁷³⁴: Fix exclude handling in `sphinx-apidoc`.
- [#1302](#)³⁷³⁵: Fix regression in `sphinx.ext.inheritance_diagram` when documenting classes that can't be pickled.
- [#1316](#)³⁷³⁶: Remove hard-coded font-face resources from epub theme.
- [#1329](#)³⁷³⁷: Fix traceback with empty translation msgstr in .po files.
- [#1300](#)³⁷³⁸: Fix references not working in translated documents in some instances.
- [#1283](#)³⁷³⁹: Fix a bug in the detection of changed files that would try to access doctrees of deleted documents.
- [#1330](#)³⁷⁴⁰: Fix `exclude_patterns` behavior with subdirectories in the `html_static_path`.
- [#1323](#)³⁷⁴¹: Fix emitting empty `` tags in the HTML writer, which is not valid HTML.
- [#1147](#)³⁷⁴²: Don't emit a sidebar search box in the “singlehtml” builder.

Documentation

- [#1325](#)³⁷⁴³: Added a “Intersphinx” tutorial section. (`doc/tutorial.rst`)

14.147 Release 1.2 (released Dec 10, 2013)

Features added

- Added `sphinx.version_info` tuple for programmatic checking of the Sphinx version.

Incompatible changes

- Removed the `sphinx.ext.refcounting` extension – it is very specific to CPython and has no place in the main distribution.

³⁷³¹ <https://github.com/sphinx-doc/sphinx/issues/1285>

³⁷³² <https://github.com/sphinx-doc/sphinx/issues/848>

³⁷³³ <https://github.com/sphinx-doc/sphinx/issues/979>

³⁷³⁴ <https://github.com/sphinx-doc/sphinx/issues/1266>

³⁷³⁵ <https://github.com/sphinx-doc/sphinx/issues/1302>

³⁷³⁶ <https://github.com/sphinx-doc/sphinx/issues/1316>

³⁷³⁷ <https://github.com/sphinx-doc/sphinx/issues/1329>

³⁷³⁸ <https://github.com/sphinx-doc/sphinx/issues/1300>

³⁷³⁹ <https://github.com/sphinx-doc/sphinx/issues/1283>

³⁷⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/1330>

³⁷⁴¹ <https://github.com/sphinx-doc/sphinx/issues/1323>

³⁷⁴² <https://github.com/sphinx-doc/sphinx/issues/1147>

³⁷⁴³ <https://github.com/sphinx-doc/sphinx/issues/1325>

Bugs fixed

- Restore `versionmodified` CSS class for `versionadded/changed` and `deprecated` directives.
- [PR#181³⁷⁴⁴](https://github.com/sphinx-doc/sphinx/issues/181): Fix `html_theme_path = ['.']` is a trigger of rebuild all documents always (This change keeps the current “theme changes cause a rebuild” feature).
- [#1296³⁷⁴⁵](https://github.com/sphinx-doc/sphinx/issues/1296): Fix invalid charset in HTML help generated HTML files for default locale.
- [PR#190³⁷⁴⁶](https://github.com/sphinx-doc/sphinx/issues/190): Fix `gettext` does not extract figure caption and rubric title inside other blocks. Thanks to Michael Schlenker.
- [PR#176³⁷⁴⁷](https://github.com/sphinx-doc/sphinx/issues/176): Make sure `setup_command` test can always import Sphinx. Thanks to Dmitry Shachnev.
- [#1311³⁷⁴⁸](https://github.com/sphinx-doc/sphinx/issues/1311): Fix `test_linkcode.test_html` fails with C locale and Python 3.
- [#1269³⁷⁴⁹](https://github.com/sphinx-doc/sphinx/issues/1269): Fix `ResourceWarnings` with Python 3.2 or later.
- [#1138³⁷⁵⁰](https://github.com/sphinx-doc/sphinx/issues/1138): Fix: When `autodoc_docstring_signature = True` and `autoclass_content = 'init'` or `'both'`, `__init__` line should be removed from class documentation.

14.148 Release 1.2 beta3 (released Oct 3, 2013)

Features added

- The Sphinx error log files will now include a list of the loaded extensions for help in debugging.

Incompatible changes

- [PR#154³⁷⁵¹](https://github.com/sphinx-doc/sphinx/issues/154): Remove “sphinx” prefix from LaTeX class name except ‘sphinxmanual’ and ‘sphinxhowto’. Now you can use your custom document class without ‘sphinx’ prefix. Thanks to Erik B.

Bugs fixed

- [#1265³⁷⁵²](https://github.com/sphinx-doc/sphinx/issues/1265): Fix `i18n`: crash when translating a section name that is pointed to from a named target.
- A wrong condition broke the search feature on first page that is usually `index.rst`. This issue was introduced in 1.2b1.
- [#703³⁷⁵³](https://github.com/sphinx-doc/sphinx/issues/703): When Sphinx can’t decode filenames with non-ASCII characters, Sphinx now catches `UnicodeError` and will continue if possible instead of raising the exception.

³⁷⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/181>

³⁷⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/1296>

³⁷⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/190>

³⁷⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/176>

³⁷⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/1311>

³⁷⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/1269>

³⁷⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/1138>

³⁷⁵¹ <https://github.com/sphinx-doc/sphinx/issues/154>

³⁷⁵² <https://github.com/sphinx-doc/sphinx/issues/1265>

³⁷⁵³ <https://github.com/sphinx-doc/sphinx/issues/703>

14.149 Release 1.2 beta2 (released Sep 17, 2013)

Features added

- apidoc now ignores “_private” modules by default, and has an option `-P` to include them.
- apidoc now has an option to not generate headings for packages and modules, for the case that the module docstring already includes a reST heading.
- [PR#161](#)³⁷⁵⁴: apidoc can now write each module to a standalone page instead of combining all modules in a package on one page.
- Builders: rebuild i18n target document when catalog updated.
- Support docutils.conf ‘writers’ and ‘html4css1 writer’ section in the HTML writer. The latex, manpage and texinfo writers also support their respective ‘writers’ sections.
- The new `html_extra_path` config value allows to specify directories with files that should be copied directly to the HTML output directory.
- Autodoc directives for module data and attributes now support an `annotation` option, so that the default display of the data/attribute value can be overridden.
- [PR#136](#)³⁷⁵⁵: Autodoc directives now support an `imported-members` option to include members imported from different modules.
- New locales: Macedonian, Sinhala, Indonesian.
- Theme package collection by using setuptools plugin mechanism.

Incompatible changes

- [PR#144](#)³⁷⁵⁶, [#1182](#)³⁷⁵⁷: Force timezone offset to LocalTimeZone on POT-Creation-Date that was generated by gettext builder. Thanks to masklinn and Jakub Wilk.

Bugs fixed

- [PR#132](#)³⁷⁵⁸: Updated jQuery version to 1.8.3.
- [PR#141](#)³⁷⁵⁹, [#982](#)³⁷⁶⁰: Avoid crash when writing PNG file using Python 3. Thanks to Marcin Wojdyr.
- [PR#145](#)³⁷⁶¹: In parallel builds, Sphinx drops second document file to write. Thanks to tychoish.
- [PR#151](#)³⁷⁶²: Some styling updates to tables in LaTeX.
- [PR#153](#)³⁷⁶³: The “extensions” config value can now be overridden.
- [PR#155](#)³⁷⁶⁴: Added support for some C++11 function qualifiers.

³⁷⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/161>

³⁷⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/136>

³⁷⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/144>

³⁷⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/1182>

³⁷⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/132>

³⁷⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/141>

³⁷⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/982>

³⁷⁶¹ <https://github.com/sphinx-doc/sphinx/issues/145>

³⁷⁶² <https://github.com/sphinx-doc/sphinx/issues/151>

³⁷⁶³ <https://github.com/sphinx-doc/sphinx/issues/153>

³⁷⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/155>

- Fix: ‘make gettext’ caused UnicodeDecodeError when templates contain utf-8 encoded strings.
- [#828](#)³⁷⁶⁵: use `inspect.getfullargspec()` to be able to document functions with keyword-only arguments on Python 3.
- [#1090](#)³⁷⁶⁶: Fix i18n: multiple cross references (term, ref, doc) in the same line return the same link.
- [#1157](#)³⁷⁶⁷: Combination of ‘globaltoc.html’ and hidden toctree caused exception.
- [#1159](#)³⁷⁶⁸: fix wrong generation of objects inventory for Python modules, and add a workaround in intersphinx to fix handling of affected inventories.
- [#1160](#)³⁷⁶⁹: Citation target missing caused an AssertionError.
- [#1162](#)³⁷⁷⁰, [PR#139](#)³⁷⁷¹: singlehtml builder didn’t copy images to `_images/`.
- [#1173](#)³⁷⁷²: Adjust `setup.py` dependencies because Jinja2 2.7 discontinued compatibility with Python < 3.3 and Python < 2.6. Thanks to Alexander Dupuy.
- [#1185](#)³⁷⁷³: Don’t crash when a Python module has a wrong or no encoding declared, and non-ASCII characters are included.
- [#1188](#)³⁷⁷⁴: sphinx-quickstart raises UnicodeEncodeError if “Project version” includes non-ASCII characters.
- [#1189](#)³⁷⁷⁵: “Title underline is too short” WARNING is given when using fullwidth characters to “Project name” on quickstart.
- [#1190](#)³⁷⁷⁶: Output TeX/texinfo/man filename has no basename (only extension) when using non-ASCII characters in the “Project name” on quickstart.
- [#1192](#)³⁷⁷⁷: Fix escaping problem for hyperlinks in the manpage writer.
- [#1193](#)³⁷⁷⁸: Fix i18n: multiple link references in the same line return the same link.
- [#1176](#)³⁷⁷⁹: Fix i18n: footnote reference number missing for auto numbered named footnote and auto symbol footnote.
- [PR#146](#)³⁷⁸⁰, [#1172](#) <<https://github.com/sphinx-doc/sphinx/issues/1172>>`_: Fix ZeroDivisionError in parallel builds. Thanks to tychoish.
- [#1204](#)³⁷⁸¹: Fix wrong generation of links to local intersphinx targets.
- [#1206](#)³⁷⁸²: Fix i18n: gettext did not translate admonition directive’s title.
- [#1232](#)³⁷⁸³: Sphinx generated broken ePub files on Windows.
- [#1259](#)³⁷⁸⁴: Guard the debug output call when emitting events; to prevent the `repr()` implementation of arbitrary

³⁷⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/828>

³⁷⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/1090>

³⁷⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/1157>

³⁷⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/1159>

³⁷⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/1160>

³⁷⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/1162>

³⁷⁷¹ <https://github.com/sphinx-doc/sphinx/issues/139>

³⁷⁷² <https://github.com/sphinx-doc/sphinx/issues/1173>

³⁷⁷³ <https://github.com/sphinx-doc/sphinx/issues/1185>

³⁷⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/1188>

³⁷⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/1189>

³⁷⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/1190>

³⁷⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/1192>

³⁷⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/1193>

³⁷⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/1176>

³⁷⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/146>

³⁷⁸¹ <https://github.com/sphinx-doc/sphinx/issues/1204>

³⁷⁸² <https://github.com/sphinx-doc/sphinx/issues/1206>

³⁷⁸³ <https://github.com/sphinx-doc/sphinx/issues/1232>

³⁷⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/1259>

objects causing build failures.

- [#1142](#)³⁷⁸⁵: Fix NFC/NFD normalizing problem of rst filename on Mac OS X.
- [#1234](#)³⁷⁸⁶: Ignoring the string consists only of white-space characters.

14.150 Release 1.2 beta1 (released Mar 31, 2013)

Incompatible changes

- Removed `sphinx.util.compat.directive_dwim()` and `sphinx.roles.xfileref_role()` which were deprecated since version 1.0.
- [PR#122](#)³⁷⁸⁷: the files given in `latex_additional_files` now override TeX files included by Sphinx, such as `sphinx.sty`.
- [PR#124](#)³⁷⁸⁸: the node generated by `versionadded`, `versionchanged` and `deprecated` directives now includes all added markup (such as “New in version X”) as child nodes, and no additional text must be generated by writers.
- [PR#99](#)³⁷⁸⁹: the `seealso` directive now generates admonition nodes instead of the custom `seealso` node.

Features added

- Markup
 - The `toctree` directive and the `toctree()` template function now have an `includehidden` option that includes hidden toctree entries (bugs [#790](#)³⁷⁹⁰ and [#1047](#)³⁷⁹¹). A bug in the `maxdepth` option for the `toctree()` template function has been fixed (bug [#1046](#)³⁷⁹²).
 - [PR#99](#)³⁷⁹³: Strip down `seealso` directives to normal admonitions. This removes their unusual CSS classes (admonition-see-also), inconsistent LaTeX admonition title (“See Also” instead of “See also”), and spurious indentation in the text builder.
- HTML builder
 - [#783](#)³⁷⁹⁴: Create a link to full size image if it is scaled with width or height.
 - [#1067](#)³⁷⁹⁵: Improve the ordering of the JavaScript search results: matches in titles come before matches in full text, and object results are better categorized. Also implement a pluggable search scorer.
 - [#1053](#)³⁷⁹⁶: The “rightsidebar” and “collapsiblesidebar” HTML theme options now work together.
 - Update to jQuery 1.7.1 and Underscore.js 1.3.1.
- Texinfo builder
 - An “Index” node is no longer added when there are no entries.

³⁷⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/1142>

³⁷⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/1234>

³⁷⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/122>

³⁷⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/124>

³⁷⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/99>

³⁷⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/790>

³⁷⁹¹ <https://github.com/sphinx-doc/sphinx/issues/1047>

³⁷⁹² <https://github.com/sphinx-doc/sphinx/issues/1046>

³⁷⁹³ <https://github.com/sphinx-doc/sphinx/issues/99>

³⁷⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/783>

³⁷⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/1067>

³⁷⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/1053>

- “deffn” categories are no longer capitalized if they contain capital letters.
 - `desc_annotation` nodes are now rendered.
 - `strong` and `emphasis` nodes are now formatted like `literals`. The reason for this is because the standard Texinfo markup (`*strong*` and `_emphasis_`) resulted in confusing output due to the common usage of using these constructs for documenting parameter names.
 - Field lists formatting has been tweaked to better display “Info field lists”.
 - `system_message` and `problematic` nodes are now formatted in a similar fashion as done by the text builder.
 - “en-dash” and “em-dash” conversion of hyphens is no longer performed in option directive signatures.
 - `@ref` is now used instead of `@pxref` for cross-references which prevents the word “see” from being added before the link (does not affect the Info output).
 - The `@finalout` command has been added for better TeX output.
 - `transition` nodes are now formatted using underscores (“_”) instead of asterisks (“*”).
 - The default value for the `paragraphindent` has been changed from 2 to 0 meaning that paragraphs are no longer indented by default.
 - [PR#1110](https://github.com/sphinx-doc/sphinx/issues/1110)³⁷⁹⁷: A new configuration value `texinfo_no_detailmenu` has been added for controlling whether a `@detailmenu` is added in the “Top” node’s menu.
 - Detailed menus are no longer created except for the “Top” node.
 - Fixed an issue where duplicate domain indices would result in invalid output.
- LaTeX builder:
 - [PR#115](https://github.com/sphinx-doc/sphinx/issues/115)³⁷⁹⁸: Add 'transition' item in `latex_elements` for customizing how transitions are displayed. Thanks to Jeff Klukas.
 - [PR#114](https://github.com/sphinx-doc/sphinx/issues/114)³⁷⁹⁹: The LaTeX writer now includes the “cmap” package by default. The 'cmappkg' item in `latex_elements` can be used to control this. Thanks to Dmitry Shachnev.
 - The 'fontpkg' item in `latex_elements` now defaults to ' ' when the *language* uses the Cyrillic script. Suggested by Dmitry Shachnev.
 - The `latex_documents`, `texinfo_documents`, and `man_pages` configuration values will be set to default values based on the *master_doc* if not explicitly set in `conf.py`. Previously, if these values were not set, no output would be generated by their respective builders.
 - Internationalization:
 - Add i18n capabilities for custom templates. For example: The Sphinx reference documentation in `doc` directory provides a `sphinx.pot` file with message strings from `doc/_templates/*.html` when using `make gettext`.
 - [PR#61](https://github.com/sphinx-doc/sphinx/issues/703)³⁸⁰⁰, [#703](https://github.com/sphinx-doc/sphinx/issues/703) <<https://github.com/sphinx-doc/sphinx/issues/703>>`_: Add support for non-ASCII file-name handling.
 - Other builders:
 - Added the Docutils-native XML and pseudo-XML builders. See *XMLBuilder* and *PseudoXMLBuilder*.
 - [PR#45](https://github.com/sphinx-doc/sphinx/issues/45)³⁸⁰¹: The linkcheck builder now checks `#anchors` for existence.

³⁷⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/1110>

³⁷⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/115>

³⁷⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/114>

³⁸⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/61>

³⁸⁰¹ <https://github.com/sphinx-doc/sphinx/issues/45>

- [PR#123](https://github.com/sphinx-doc/sphinx/issues/123)³⁸⁰², [#1106](https://github.com/sphinx-doc/sphinx/issues/1106)³⁸⁰³: Add `epub_use_index` configuration value. If provided, it will be used instead of `html_use_index` for epub builder.
- [PR#126](https://github.com/sphinx-doc/sphinx/issues/126)³⁸⁰⁴: Add `epub_tocscope` configuration value. The setting controls the generation of the epub toc. The user can now also include hidden toc entries.
- [PR#112](https://github.com/sphinx-doc/sphinx/issues/112)³⁸⁰⁵: Add `epub_show_urls` configuration value.
- Extensions:
 - [PR#52](https://github.com/sphinx-doc/sphinx/issues/52)³⁸⁰⁶: `special_members` flag to autodoc now behaves like `members`.
 - [PR#47](https://github.com/sphinx-doc/sphinx/issues/47)³⁸⁰⁷: Added `sphinx.ext.linkcode` extension.
 - [PR#25](https://github.com/sphinx-doc/sphinx/issues/25)³⁸⁰⁸: In inheritance diagrams, the first line of the class docstring is now the tooltip for the class.
- Command-line interfaces:
 - [PR#75](https://github.com/sphinx-doc/sphinx/issues/75)³⁸⁰⁹: Added `--follow-links` option to `sphinx-apidoc`.
 - [#869](https://github.com/sphinx-doc/sphinx/issues/869)³⁸¹⁰: `sphinx-build` now has the option `-T` for printing the full traceback after an unhandled exception.
 - `sphinx-build` now supports the standard `--help` and `--version` options.
 - `sphinx-build` now provides more specific error messages when called with invalid options or arguments.
 - `sphinx-build` now has a verbose option `-v` which can be repeated for greater effect. A single occurrence provides a slightly more verbose output than normal. Two or more occurrences of this option provides more detailed output which may be useful for debugging.
- Locales:
 - [PR#74](https://github.com/sphinx-doc/sphinx/issues/74)³⁸¹¹: Fix some Russian translation.
 - [PR#54](https://github.com/sphinx-doc/sphinx/issues/54)³⁸¹²: Added Norwegian bokmaal translation.
 - [PR#35](https://github.com/sphinx-doc/sphinx/issues/35)³⁸¹³: Added Slovak translation.
 - [PR#28](https://github.com/sphinx-doc/sphinx/issues/28)³⁸¹⁴: Added Hungarian translation.
 - [#1113](https://github.com/sphinx-doc/sphinx/issues/1113)³⁸¹⁵: Add Hebrew locale.
 - [#1097](https://github.com/sphinx-doc/sphinx/issues/1097)³⁸¹⁶: Add Basque locale.
 - [#1037](https://github.com/sphinx-doc/sphinx/issues/1037)³⁸¹⁷: Fix typos in Polish translation. Thanks to Jakub Wilk.
 - [#1012](https://github.com/sphinx-doc/sphinx/issues/1012)³⁸¹⁸: Update Estonian translation.
- Optimizations:

³⁸⁰² <https://github.com/sphinx-doc/sphinx/issues/123>³⁸⁰³ <https://github.com/sphinx-doc/sphinx/issues/1106>³⁸⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/126>³⁸⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/112>³⁸⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/52>³⁸⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/47>³⁸⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/25>³⁸⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/75>³⁸¹⁰ <https://github.com/sphinx-doc/sphinx/issues/869>³⁸¹¹ <https://github.com/sphinx-doc/sphinx/issues/74>³⁸¹² <https://github.com/sphinx-doc/sphinx/issues/54>³⁸¹³ <https://github.com/sphinx-doc/sphinx/issues/35>³⁸¹⁴ <https://github.com/sphinx-doc/sphinx/issues/28>³⁸¹⁵ <https://github.com/sphinx-doc/sphinx/issues/1113>³⁸¹⁶ <https://github.com/sphinx-doc/sphinx/issues/1097>³⁸¹⁷ <https://github.com/sphinx-doc/sphinx/issues/1037>³⁸¹⁸ <https://github.com/sphinx-doc/sphinx/issues/1012>

- Speed up building the search index by caching the results of the word stemming routines. Saves about 20 seconds when building the Python documentation.
- [PR#108](#)³⁸¹⁹: Add experimental support for parallel building with a new `sphinx-build -j` option.

Documentation

- [PR#88](#)³⁸²⁰: Added the “Sphinx Developer’s Guide” (`doc/devguide.rst`) which outlines the basic development process of the Sphinx project.
- Added a detailed “Installing Sphinx” document (`doc/install.rst`).

Bugs fixed

- [PR#124](#)³⁸²¹: Fix paragraphs in versionmodified are ignored when it has no dangling paragraphs. Fix wrong html output (nested `<p>` tag). Fix versionmodified is not translatable. Thanks to Nozomu Kaneko.
- [PR#111](#)³⁸²²: Respect `add_autodoc_attrgetter()` even when `inherited-members` is set. Thanks to A. Jesse Jiryu Davis.
- [PR#97](#)³⁸²³: Fix footnote handling in translated documents.
- Fix text writer not handling `visit_legend` for figure directive contents.
- Fix text builder not respecting wide/fullwidth characters: title underline width, table layout width and text wrap width.
- Fix leading space in LaTeX table header cells.
- [#1132](#)³⁸²⁴: Fix LaTeX table output for multi-row cells in the first column.
- [#1128](#)³⁸²⁵: Fix Unicode errors when trying to format time strings with a non-standard locale.
- [#1127](#)³⁸²⁶: Fix traceback when autodoc tries to tokenize a non-Python file.
- [#1126](#)³⁸²⁷: Fix double-hyphen to en-dash conversion in wrong places such as command-line option names in LaTeX.
- [#1123](#)³⁸²⁸: Allow whitespaces in filenames given to `literalinclude`.
- [#1120](#)³⁸²⁹: Added improvements about `i18n` for themes “basic”, “haiku” and “scrolls” that Sphinx built-in. Thanks to Leonardo J. Caballero G.
- [#1118](#)³⁸³⁰: Updated Spanish translation. Thanks to Leonardo J. Caballero G.
- [#1117](#)³⁸³¹: Handle `.pyx` files in `sphinx-apidoc`.
- [#1112](#)³⁸³²: Avoid duplicate download files when referenced from documents in different ways (absolute/relative).

³⁸¹⁹ <https://github.com/sphinx-doc/sphinx/issues/108>

³⁸²⁰ <https://github.com/sphinx-doc/sphinx/issues/88>

³⁸²¹ <https://github.com/sphinx-doc/sphinx/issues/124>

³⁸²² <https://github.com/sphinx-doc/sphinx/issues/111>

³⁸²³ <https://github.com/sphinx-doc/sphinx/issues/97>

³⁸²⁴ <https://github.com/sphinx-doc/sphinx/issues/1132>

³⁸²⁵ <https://github.com/sphinx-doc/sphinx/issues/1128>

³⁸²⁶ <https://github.com/sphinx-doc/sphinx/issues/1127>

³⁸²⁷ <https://github.com/sphinx-doc/sphinx/issues/1126>

³⁸²⁸ <https://github.com/sphinx-doc/sphinx/issues/1123>

³⁸²⁹ <https://github.com/sphinx-doc/sphinx/issues/1120>

³⁸³⁰ <https://github.com/sphinx-doc/sphinx/issues/1118>

³⁸³¹ <https://github.com/sphinx-doc/sphinx/issues/1117>

³⁸³² <https://github.com/sphinx-doc/sphinx/issues/1112>

- [#1111](#)³⁸³³: Fix failure to find uppercase words in search when `html_search_language` is ‘ja’. Thanks to Tomo Saito.
- [#1108](#)³⁸³⁴: The text writer now correctly numbers enumerated lists with non-default start values (based on patch by Ewan Edwards).
- [#1102](#)³⁸³⁵: Support multi-context “with” statements in autodoc.
- [#1090](#)³⁸³⁶: Fix `gettext` not extracting glossary terms.
- [#1074](#)³⁸³⁷: Add environment version info to the generated search index to avoid compatibility issues with old builds.
- [#1070](#)³⁸³⁸: Avoid un-pickling issues when running Python 3 and the saved environment was created under Python 2.
- [#1069](#)³⁸³⁹: Fixed error caused when autodoc would try to format signatures of “partial” functions without keyword arguments (patch by Artur Gaspar).
- [#1062](#)³⁸⁴⁰: `sphinx.ext.autodoc` use `__init__` method signature for class signature.
- [#1055](#)³⁸⁴¹: Fix web support with relative path to source directory.
- [#1043](#)³⁸⁴²: Fix `sphinx-quickstart` asking again for yes/no questions because `input()` returns values with an extra ‘r’ on Python 3.2.0 + Windows. Thanks to Régis Décamps.
- [#1041](#)³⁸⁴³: Fix failure of the `cpp` domain parser to parse a `const` type with a modifier.
- [#1038](#)³⁸⁴⁴: Fix failure of the `cpp` domain parser to parse C++11 “static constexpr” declarations. Thanks to Jakub Wilk.
- [#1029](#)³⁸⁴⁵: Fix `intersphinx_mapping` values not being stable if the mapping has plural key/value set with Python 3.3.
- [#1028](#)³⁸⁴⁶: Fix line block output in the text builder.
- [#1024](#)³⁸⁴⁷: Improve `Makefile/make.bat` error message if Sphinx is not found. Thanks to Anatoly Techtonik.
- [#1018](#)³⁸⁴⁸: Fix “container” directive handling in the text builder.
- [#1015](#)³⁸⁴⁹: Stop overriding `jQuery.contains()` in the JavaScript.
- [#1010](#)³⁸⁵⁰: Make `pngmath` images transparent by default; IE7+ should handle it.
- [#1008](#)³⁸⁵¹: Fix test failures with Python 3.3.
- [#995](#)³⁸⁵²: Fix table-of-contents and page numbering for the LaTeX “howto” class.

³⁸³³ <https://github.com/sphinx-doc/sphinx/issues/1111>

³⁸³⁴ <https://github.com/sphinx-doc/sphinx/issues/1108>

³⁸³⁵ <https://github.com/sphinx-doc/sphinx/issues/1102>

³⁸³⁶ <https://github.com/sphinx-doc/sphinx/issues/1090>

³⁸³⁷ <https://github.com/sphinx-doc/sphinx/issues/1074>

³⁸³⁸ <https://github.com/sphinx-doc/sphinx/issues/1070>

³⁸³⁹ <https://github.com/sphinx-doc/sphinx/issues/1069>

³⁸⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/1062>

³⁸⁴¹ <https://github.com/sphinx-doc/sphinx/issues/1055>

³⁸⁴² <https://github.com/sphinx-doc/sphinx/issues/1043>

³⁸⁴³ <https://github.com/sphinx-doc/sphinx/issues/1041>

³⁸⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/1038>

³⁸⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/1029>

³⁸⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/1028>

³⁸⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/1024>

³⁸⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/1018>

³⁸⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/1015>

³⁸⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/1010>

³⁸⁵¹ <https://github.com/sphinx-doc/sphinx/issues/1008>

³⁸⁵² <https://github.com/sphinx-doc/sphinx/issues/995>

- [#976](#)³⁸⁵³: Fix `gettext` does not extract index entries.
- [PR#72](#)³⁸⁵⁴: [#975](#)³⁸⁵⁵: Fix `gettext` not extracting definition terms before Docutils 0.10.
- [#961](#)³⁸⁵⁶: Fix LaTeX output for triple quotes in code snippets.
- [#958](#)³⁸⁵⁷: Do not preserve `environment.pickle` after a failed build.
- [#955](#)³⁸⁵⁸: Fix `i18n` transformation.
- [#940](#)³⁸⁵⁹: Fix `gettext` does not extract figure caption.
- [#920](#)³⁸⁶⁰: Fix PIL packaging issue that allowed to import `Image` without PIL namespace. Thanks to Marc Schlaich.
- [#723](#)³⁸⁶¹: Fix the search function on local files in WebKit based browsers.
- [#440](#)³⁸⁶²: Fix coarse timestamp resolution in some filesystem generating a wrong list of outdated files.

14.151 Release 1.1.3 (Mar 10, 2012)

- [PR#40](#)³⁸⁶³: Fix `safe_repr` function to decode bytestrings with non-ASCII characters correctly.
- [PR#37](#)³⁸⁶⁴: Allow configuring sphinx-apidoc via `SPHINX_APIDOC_OPTIONS`.
- [PR#34](#)³⁸⁶⁵: Restore Python 2.4 compatibility.
- [PR#36](#)³⁸⁶⁶: Make the “bibliography to TOC” fix in LaTeX output specific to the document class.
- [#695](#)³⁸⁶⁷: When the highlight language “python” is specified explicitly, do not try to parse the code to recognize non-Python snippets.
- [#859](#)³⁸⁶⁸: Fix exception under certain circumstances when not finding appropriate objects to link to.
- [#860](#)³⁸⁶⁹: Do not crash when encountering invalid doctest examples, just emit a warning.
- [#864](#)³⁸⁷⁰: Fix crash with some settings of `modindex_common_prefix`.
- [#862](#)³⁸⁷¹: Fix handling of `-D` and `-A` options on Python 3.
- [#851](#)³⁸⁷²: Recognize and warn about circular toctrees, instead of running into recursion errors.
- [#853](#)³⁸⁷³: Restore compatibility with Docutils trunk.

³⁸⁵³ <https://github.com/sphinx-doc/sphinx/issues/976>

³⁸⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/72>

³⁸⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/975>

³⁸⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/961>

³⁸⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/958>

³⁸⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/955>

³⁸⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/940>

³⁸⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/920>

³⁸⁶¹ <https://github.com/sphinx-doc/sphinx/issues/723>

³⁸⁶² <https://github.com/sphinx-doc/sphinx/issues/440>

³⁸⁶³ <https://github.com/sphinx-doc/sphinx/issues/40>

³⁸⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/37>

³⁸⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/34>

³⁸⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/36>

³⁸⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/695>

³⁸⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/859>

³⁸⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/860>

³⁸⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/864>

³⁸⁷¹ <https://github.com/sphinx-doc/sphinx/issues/862>

³⁸⁷² <https://github.com/sphinx-doc/sphinx/issues/851>

³⁸⁷³ <https://github.com/sphinx-doc/sphinx/issues/853>

- [#852³⁸⁷⁴](#): Fix HtmlHelp index entry links again.
- [#854³⁸⁷⁵](#): Fix inheritance_diagram raising attribute errors on builtins.
- [#832³⁸⁷⁶](#): Fix crashes when putting comments or lone terms in a glossary.
- [#834³⁸⁷⁷](#), [#818³⁸⁷⁸](#): Fix HTML help language/encoding mapping for all Sphinx supported languages.
- [#844³⁸⁷⁹](#): Fix crashes when dealing with Unicode output in doctest extension.
- [#831³⁸⁸⁰](#): Provide --project flag in setup_command as advertised.
- [#875³⁸⁸¹](#): Fix reading config files under Python 3.
- [#876³⁸⁸²](#): Fix quickstart test under Python 3.
- [#870³⁸⁸³](#): Fix spurious KeyErrors when removing documents.
- [#892³⁸⁸⁴](#): Fix single-HTML builder misbehaving with the master document in a subdirectory.
- [#873³⁸⁸⁵](#): Fix assertion errors with empty only directives.
- [#816³⁸⁸⁶](#): Fix encoding issues in the Qt help builder.

14.152 Release 1.1.2 (Nov 1, 2011) – 1.1.1 is a silly version number anyway!

- [#809³⁸⁸⁷](#): Include custom fixers in the source distribution.

14.153 Release 1.1.1 (Nov 1, 2011)

- [#791³⁸⁸⁸](#): Fix QtHelp, DevHelp and HtmlHelp index entry links.
- [#792³⁸⁸⁹](#): Include “sphinx-apidoc” in the source distribution.
- [#797³⁸⁹⁰](#): Don’t crash on a misformatted glossary.
- [#801³⁸⁹¹](#): Make intersphinx work properly without SSL support.
- [#805³⁸⁹²](#): Make the Sphinx.add_index_to_domain method work correctly.

³⁸⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/852>

³⁸⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/854>

³⁸⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/832>

³⁸⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/834>

³⁸⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/818>

³⁸⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/844>

³⁸⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/831>

³⁸⁸¹ <https://github.com/sphinx-doc/sphinx/issues/875>

³⁸⁸² <https://github.com/sphinx-doc/sphinx/issues/876>

³⁸⁸³ <https://github.com/sphinx-doc/sphinx/issues/870>

³⁸⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/892>

³⁸⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/873>

³⁸⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/816>

³⁸⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/809>

³⁸⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/791>

³⁸⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/792>

³⁸⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/797>

³⁸⁹¹ <https://github.com/sphinx-doc/sphinx/issues/801>

³⁸⁹² <https://github.com/sphinx-doc/sphinx/issues/805>

- [#780](#)³⁸⁹³: Fix Python 2.5 compatibility.

14.154 Release 1.1 (Oct 9, 2011)

Incompatible changes

- The `py:module` directive doesn't output its `platform` option value anymore. (It was the only thing that the directive did output, and therefore quite inconsistent.)
- Removed support for old dependency versions; requirements are now:
 - Pygments `>= 1.2`
 - Docutils `>= 0.7`
 - Jinja2 `>= 2.3`

Features added

- Added Python 3.x support.
- New builders and subsystems:
 - Added a Texinfo builder.
 - Added i18n support for content, a `gettext` builder and related utilities.
 - Added the `websupport` library and builder.
 - [#98](#)³⁸⁹⁴: Added a `sphinx-apidoc` script that autogenerates a hierarchy of source files containing autodoc directives to document modules and packages.
 - [#273](#)³⁸⁹⁵: Add an API for adding full-text search support for languages other than English. Add support for Japanese.
- Markup:
 - [#138](#)³⁸⁹⁶: Added an `index` role, to make inline index entries.
 - [#454](#)³⁸⁹⁷: Added more index markup capabilities: marking see/seealso entries, and main entries for a given key.
 - [#460](#)³⁸⁹⁸: Allowed limiting the depth of section numbers for HTML using the `toctree`'s `numbered` option.
 - [#586](#)³⁸⁹⁹: Implemented improved `glossary` markup which allows multiple terms per definition.
 - [#478](#)³⁹⁰⁰: Added `py:decorator` directive to describe decorators.
 - C++ domain now supports array definitions.
 - C++ domain now supports doc fields (`:param x:` inside directives).
 - Section headings in `only` directives are now correctly handled.

³⁸⁹³ <https://github.com/sphinx-doc/sphinx/issues/780>

³⁸⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/98>

³⁸⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/273>

³⁸⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/138>

³⁸⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/454>

³⁸⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/460>

³⁸⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/586>

³⁹⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/478>

- Added `emphasize-lines` option to source code directives.
- #678³⁹⁰¹: C++ domain now supports superclasses.
- HTML builder:
 - Added `pyramid` theme.
 - #559³⁹⁰²: `html_add_permalink` is now a string giving the text to display in permalinks.
 - #259³⁹⁰³: HTML table rows now have even/odd CSS classes to enable “Zebra styling”.
 - #554³⁹⁰⁴: Add theme option `sidebarwidth` to the basic theme.
- Other builders:
 - #516³⁹⁰⁵: Added new value of the `latex_show_urls` option to show the URLs in footnotes.
 - #209³⁹⁰⁶: Added `text_newlines` and `text_sectionchars` config values.
 - Added `man_show_urls` config value.
 - #472³⁹⁰⁷: linkcheck builder: Check links in parallel, use HTTP HEAD requests and allow configuring the timeout. New config values: `linkcheck_timeout` and `linkcheck_workers`.
 - #521³⁹⁰⁸: Added `linkcheck_ignore` config value.
 - #28³⁹⁰⁹: Support row/colspans in tables in the LaTeX builder.
- Configuration and extensibility:
 - #537³⁹¹⁰: Added `nitpick_ignore`.
 - #306³⁹¹¹: Added `env-get-outdated` event.
 - `Application.add_stylesheet()` now accepts full URIs.
- Autodoc:
 - #564³⁹¹²: Add `autodoc_docstring_signature`. When enabled (the default), autodoc retrieves the signature from the first line of the docstring, if it is found there.
 - #176³⁹¹³: Provide `private-members` option for autodoc directives.
 - #520³⁹¹⁴: Provide `special-members` option for autodoc directives.
 - #431³⁹¹⁵: Doc comments for attributes can now be given on the same line as the assignment.
 - #437³⁹¹⁶: autodoc now shows values of class data attributes.
 - autodoc now supports documenting the signatures of `functools.partial` objects.
- Other extensions:

³⁹⁰¹ <https://github.com/sphinx-doc/sphinx/issues/678>

³⁹⁰² <https://github.com/sphinx-doc/sphinx/issues/559>

³⁹⁰³ <https://github.com/sphinx-doc/sphinx/issues/259>

³⁹⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/554>

³⁹⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/516>

³⁹⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/209>

³⁹⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/472>

³⁹⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/521>

³⁹⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/28>

³⁹¹⁰ <https://github.com/sphinx-doc/sphinx/issues/537>

³⁹¹¹ <https://github.com/sphinx-doc/sphinx/issues/306>

³⁹¹² <https://github.com/sphinx-doc/sphinx/issues/564>

³⁹¹³ <https://github.com/sphinx-doc/sphinx/issues/176>

³⁹¹⁴ <https://github.com/sphinx-doc/sphinx/issues/520>

³⁹¹⁵ <https://github.com/sphinx-doc/sphinx/issues/431>

³⁹¹⁶ <https://github.com/sphinx-doc/sphinx/issues/437>

- Added the `sphinx.ext.mathjax` extension.
- #443³⁹¹⁷: Allow referencing external graphviz files.
- Added `inline` option to graphviz directives, and fixed the default (block-style) in LaTeX output.
- #590³⁹¹⁸: Added `caption` option to graphviz directives.
- #553³⁹¹⁹: Added `testcleanup` blocks in the doctest extension.
- #594³⁹²⁰: `trim_doctest_flags` now also removes `<BLANKLINE>` indicators.
- #367³⁹²¹: Added automatic exclusion of hidden members in inheritance diagrams, and an option to selectively enable it.
- Added `pngmath_add_tooltips`.
- The math extension `displaymath` directives now support `name` in addition to `label` for giving the equation label, for compatibility with Docutils.
- New locales:
 - #221³⁹²²: Added Swedish locale.
 - #526³⁹²³: Added Iranian locale.
 - #694³⁹²⁴: Added Latvian locale.
 - Added Nepali locale.
 - #714³⁹²⁵: Added Korean locale.
 - #766³⁹²⁶: Added Estonian locale.
- Bugs fixed:
 - #778³⁹²⁷: Fix “hide search matches” link on pages linked by search.
 - Fix the source positions referenced by the “viewcode” extension.

14.155 Release 1.0.8 (Sep 23, 2011)

- #627³⁹²⁸: Fix tracebacks for `AttributeErrors` in autosummary generation.
- Fix the `abbr` role when the abbreviation has newlines in it.
- #727³⁹²⁹: Fix the links to search results with custom object types.
- #648³⁹³⁰: Fix line numbers reported in warnings about undefined references.

³⁹¹⁷ <https://github.com/sphinx-doc/sphinx/issues/443>

³⁹¹⁸ <https://github.com/sphinx-doc/sphinx/issues/590>

³⁹¹⁹ <https://github.com/sphinx-doc/sphinx/issues/553>

³⁹²⁰ <https://github.com/sphinx-doc/sphinx/issues/594>

³⁹²¹ <https://github.com/sphinx-doc/sphinx/issues/367>

³⁹²² <https://github.com/sphinx-doc/sphinx/issues/221>

³⁹²³ <https://github.com/sphinx-doc/sphinx/issues/526>

³⁹²⁴ <https://github.com/sphinx-doc/sphinx/issues/694>

³⁹²⁵ <https://github.com/sphinx-doc/sphinx/issues/714>

³⁹²⁶ <https://github.com/sphinx-doc/sphinx/issues/766>

³⁹²⁷ <https://github.com/sphinx-doc/sphinx/issues/778>

³⁹²⁸ <https://github.com/sphinx-doc/sphinx/issues/627>

³⁹²⁹ <https://github.com/sphinx-doc/sphinx/issues/727>

³⁹³⁰ <https://github.com/sphinx-doc/sphinx/issues/648>

- #696³⁹³¹, #666³⁹³²: Fix C++ array definitions and template arguments that are not type names.
- #633³⁹³³: Allow footnotes in section headers in LaTeX output.
- #616³⁹³⁴: Allow keywords to be linked via intersphinx.
- #613³⁹³⁵: Allow Unicode characters in production list token names.
- #720³⁹³⁶: Add dummy visitors for graphviz nodes for text and man.
- #704³⁹³⁷: Fix image file duplication bug.
- #677³⁹³⁸: Fix parsing of multiple signatures in C++ domain.
- #637³⁹³⁹: Ignore Emacs lock files when looking for source files.
- #544³⁹⁴⁰: Allow .pyw extension for importable modules in autodoc.
- #700³⁹⁴¹: Use \$(MAKE) in quickstart-generated Makefiles.
- #734³⁹⁴²: Make sidebar search box width consistent in browsers.
- #644³⁹⁴³: Fix spacing of centered figures in HTML output.
- #767³⁹⁴⁴: Safely encode SphinxError messages when printing them to sys.stderr.
- #611³⁹⁴⁵: Fix LaTeX output error with a document with no sections but a link target.
- Correctly treat built-in method descriptors as methods in autodoc.
- #706³⁹⁴⁶: Stop monkeypatching the Python textwrap module.
- #657³⁹⁴⁷: viewcode now works correctly with source files that have non-ASCII encoding.
- #669³⁹⁴⁸: Respect the noindex flag option in py:module directives.
- #675³⁹⁴⁹: Fix IndexError when including nonexistent lines with literalinclude.
- #676³⁹⁵⁰: Respect custom function/method parameter separator strings.
- #682³⁹⁵¹: Fix JS incompatibility with jQuery >= 1.5.
- #693³⁹⁵²: Fix double encoding done when writing HTMLHelp .hhk files.
- #647³⁹⁵³: Do not apply SmartyPants in parsed-literal blocks.

³⁹³¹ <https://github.com/sphinx-doc/sphinx/issues/696>

³⁹³² <https://github.com/sphinx-doc/sphinx/issues/666>

³⁹³³ <https://github.com/sphinx-doc/sphinx/issues/633>

³⁹³⁴ <https://github.com/sphinx-doc/sphinx/issues/616>

³⁹³⁵ <https://github.com/sphinx-doc/sphinx/issues/613>

³⁹³⁶ <https://github.com/sphinx-doc/sphinx/issues/720>

³⁹³⁷ <https://github.com/sphinx-doc/sphinx/issues/704>

³⁹³⁸ <https://github.com/sphinx-doc/sphinx/issues/677>

³⁹³⁹ <https://github.com/sphinx-doc/sphinx/issues/637>

³⁹⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/544>

³⁹⁴¹ <https://github.com/sphinx-doc/sphinx/issues/700>

³⁹⁴² <https://github.com/sphinx-doc/sphinx/issues/734>

³⁹⁴³ <https://github.com/sphinx-doc/sphinx/issues/644>

³⁹⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/767>

³⁹⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/611>

³⁹⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/706>

³⁹⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/657>

³⁹⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/669>

³⁹⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/675>

³⁹⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/676>

³⁹⁵¹ <https://github.com/sphinx-doc/sphinx/issues/682>

³⁹⁵² <https://github.com/sphinx-doc/sphinx/issues/693>

³⁹⁵³ <https://github.com/sphinx-doc/sphinx/issues/647>

- C++ domain now supports array definitions.

14.156 Release 1.0.7 (Jan 15, 2011)

- #347³⁹⁵⁴: Fix wrong generation of directives of static methods in autosummary.
- #599³⁹⁵⁵: Import PIL as `from PIL import Image`.
- #558³⁹⁵⁶: Fix longtables with captions in LaTeX output.
- Make token references work as hyperlinks again in LaTeX output.
- #572³⁹⁵⁷: Show warnings by default when reference labels cannot be found.
- #536³⁹⁵⁸: Include line number when complaining about missing reference targets in nitpicky mode.
- #590³⁹⁵⁹: Fix inline display of graphviz diagrams in LaTeX output.
- #589³⁹⁶⁰: Build using `app.build()` in setup command.
- Fix a bug in the inheritance diagram exception that caused base classes to be skipped if one of them is a builtin.
- Fix general index links for C++ domain objects.
- #332³⁹⁶¹: Make admonition boundaries in LaTeX output visible.
- #573³⁹⁶²: Fix KeyErrors occurring on rebuild after removing a file.
- Fix a traceback when removing files with globbed toctrees.
- If an autodoc object cannot be imported, always re-read the document containing the directive on next build.
- If an autodoc object cannot be imported, show the full traceback of the import error.
- Fix a bug where the removal of download files and images wasn't noticed.
- #571³⁹⁶³: Implement `~` cross-reference prefix for the C domain.
- Fix regression of LaTeX output with the fix of #556³⁹⁶⁴.
- #568³⁹⁶⁵: Fix lookup of class attribute documentation on descriptors so that comment documentation now works.
- Fix traceback with `only` directives preceded by targets.
- Fix tracebacks occurring for duplicate C++ domain objects.
- Fix JavaScript domain links to objects with `$` in their name.

³⁹⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/347>

³⁹⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/599>

³⁹⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/558>

³⁹⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/572>

³⁹⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/536>

³⁹⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/590>

³⁹⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/589>

³⁹⁶¹ <https://github.com/sphinx-doc/sphinx/issues/332>

³⁹⁶² <https://github.com/sphinx-doc/sphinx/issues/573>

³⁹⁶³ <https://github.com/sphinx-doc/sphinx/issues/571>

³⁹⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/556>

³⁹⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/568>

14.157 Release 1.0.6 (Jan 04, 2011)

- #581³⁹⁶⁶: Fix traceback in Python domain for empty cross-reference targets.
- #283³⁹⁶⁷: Fix literal block display issues on Chrome browsers.
- #383³⁹⁶⁸, #148³⁹⁶⁹: Support sorting a limited range of accented characters in the general index and the glossary.
- #570³⁹⁷⁰: Try decoding `-D` and `-A` command-line arguments with the locale's preferred encoding.
- #528³⁹⁷¹: Observe `locale_dirs` when looking for the JS translations file.
- #574³⁹⁷²: Add special code for better support of Japanese documents in the LaTeX builder.
- Regression of #77³⁹⁷³: If there is only one parameter given with `:param:` markup, the bullet list is now suppressed again.
- #556³⁹⁷⁴: Fix missing paragraph breaks in LaTeX output in certain situations.
- #567³⁹⁷⁵: Emit the `autodoc-process-docstring` event even for objects without a docstring so that it can add content.
- #565³⁹⁷⁶: In the LaTeX builder, not only literal blocks require different table handling, but also quite a few other list-like block elements.
- #515³⁹⁷⁷: Fix tracebacks in the viewcode extension for Python objects that do not have a valid signature.
- Fix strange reports of line numbers for warnings generated from autodoc-included docstrings, due to different behavior depending on Docutils version.
- Several fixes to the C++ domain.

14.158 Release 1.0.5 (Nov 12, 2010)

- #557³⁹⁷⁸: Add CSS styles required by Docutils 0.7 for aligned images and figures.
- In the Makefile generated by LaTeX output, do not delete pdf files on clean; they might be required images.
- #535³⁹⁷⁹: Fix LaTeX output generated for line blocks.
- #544³⁹⁸⁰: Allow `.pyw` as a source file extension.

³⁹⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/581>

³⁹⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/283>

³⁹⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/383>

³⁹⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/148>

³⁹⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/570>

³⁹⁷¹ <https://github.com/sphinx-doc/sphinx/issues/528>

³⁹⁷² <https://github.com/sphinx-doc/sphinx/issues/574>

³⁹⁷³ <https://github.com/sphinx-doc/sphinx/issues/77>

³⁹⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/556>

³⁹⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/567>

³⁹⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/565>

³⁹⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/515>

³⁹⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/557>

³⁹⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/535>

³⁹⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/544>

14.159 Release 1.0.4 (Sep 17, 2010)

- [#524](#)³⁹⁸¹: Open intersphinx inventories in binary mode on Windows, since version 2 contains zlib-compressed data.
- [#513](#)³⁹⁸²: Allow giving non-local URIs for JavaScript files, e.g. in the JSMath extension.
- [#512](#)³⁹⁸³: Fix traceback when `intersphinx_mapping` is empty.

14.160 Release 1.0.3 (Aug 23, 2010)

- [#495](#)³⁹⁸⁴: Fix internal vs. external link distinction for links coming from a Docutils table-of-contents.
- [#494](#)³⁹⁸⁵: Fix the `maxdepth` option for the `toctree()` template callable when used with `collapse=True`.
- [#507](#)³⁹⁸⁶: Fix crash parsing Python argument lists containing brackets in string literals.
- [#501](#)³⁹⁸⁷: Fix regression when building LaTeX docs with figures that don't have captions.
- [#510](#)³⁹⁸⁸: Fix inheritance diagrams for classes that are not picklable.
- [#497](#)³⁹⁸⁹: Introduce separate background color for the sidebar collapse button, making it easier to see.
- [#502](#)³⁹⁹⁰, [#503](#)³⁹⁹¹, [#496](#)³⁹⁹²: Fix small layout bugs in several builtin themes.

14.161 Release 1.0.2 (Aug 14, 2010)

- [#490](#)³⁹⁹³: Fix cross-references to objects of types added by the `add_object_type()` API function.
- Fix handling of doc field types for different directive types.
- Allow breaking long signatures, continuing with backlash-escaped newlines.
- Fix unwanted styling of C domain references (because of a namespace clash with Pygments styles).
- Allow references to PEPs and RFCs with explicit anchors.
- [#471](#)³⁹⁹⁴: Fix LaTeX references to figures.
- [#482](#)³⁹⁹⁵: When doing a non-exact search, match only the given type of object.
- [#481](#)³⁹⁹⁶: Apply non-exact search for Python reference targets with `.name` for modules too.

³⁹⁸¹ <https://github.com/sphinx-doc/sphinx/issues/524>

³⁹⁸² <https://github.com/sphinx-doc/sphinx/issues/513>

³⁹⁸³ <https://github.com/sphinx-doc/sphinx/issues/512>

³⁹⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/495>

³⁹⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/494>

³⁹⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/507>

³⁹⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/501>

³⁹⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/510>

³⁹⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/497>

³⁹⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/502>

³⁹⁹¹ <https://github.com/sphinx-doc/sphinx/issues/503>

³⁹⁹² <https://github.com/sphinx-doc/sphinx/issues/496>

³⁹⁹³ <https://github.com/sphinx-doc/sphinx/issues/490>

³⁹⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/471>

³⁹⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/482>

³⁹⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/481>

- [#484³⁹⁹⁷](#): Fix crash when duplicating a parameter in an info field list.
- [#487³⁹⁹⁸](#): Fix setting the default role to one provided by the oldcmakup extension.
- [#488³⁹⁹⁹](#): Fix crash when json-py is installed, which provides a json module but is incompatible to simplejson.
- [#480⁴⁰⁰⁰](#): Fix handling of target naming in intersphinx.
- [#486⁴⁰⁰¹](#): Fix removal of ! for all cross-reference roles.

14.162 Release 1.0.1 (Jul 27, 2010)

- [#470⁴⁰⁰²](#): Fix generated target names for reST domain objects; they are not in the same namespace.
- [#266⁴⁰⁰³](#): Add Bengali language.
- [#473⁴⁰⁰⁴](#): Fix a bug in parsing JavaScript object names.
- [#474⁴⁰⁰⁵](#): Fix building with SingleHTMLBuilder when there is no toctree.
- Fix display names for objects linked to by intersphinx with explicit targets.
- Fix building with the JSON builder.
- Fix hyperrefs in object descriptions for LaTeX.

14.163 Release 1.0 (Jul 23, 2010)

Incompatible changes

- Support for domains has been added. A domain is a collection of directives and roles that all describe objects belonging together, e.g. elements of a programming language. A few builtin domains are provided:
 - Python
 - C
 - C++
 - JavaScript
 - reStructuredText
- The old markup for defining and linking to C directives is now deprecated. It will not work anymore in future versions without activating the oldcmakup extension; in Sphinx 1.0, it is activated by default.
- Removed support for old dependency versions; requirements are now:
 - Docutils >= 0.5
 - Jinja2 >= 2.2

³⁹⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/484>

³⁹⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/487>

³⁹⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/488>

⁴⁰⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/480>

⁴⁰⁰¹ <https://github.com/sphinx-doc/sphinx/issues/486>

⁴⁰⁰² <https://github.com/sphinx-doc/sphinx/issues/470>

⁴⁰⁰³ <https://github.com/sphinx-doc/sphinx/issues/266>

⁴⁰⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/473>

⁴⁰⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/474>

- Removed deprecated elements:
 - `exclude_dirs` config value
 - `sphinx.builder` module

Features added

- General:
 - Added a “nitpicky” mode that emits warnings for all missing references. It is activated by the `sphinx-build -n` command-line switch or the `nitpicky` config value.
 - Added `latexpdf` target in quickstart Makefile.
- Markup:
 - The `menuselection` and `guilabel` roles now support ampersand accelerators.
 - New more compact doc field syntax is now recognized: `:param type name: description`.
 - Added `tab-width` option to `literalinclude` directive.
 - Added `titlesonly` option to `toctree` directive.
 - Added the `prepend` and `append` options to the `literalinclude` directive.
 - [#284](https://github.com/sphinx-doc/sphinx/issues/284)⁴⁰⁰⁶: All docinfo metadata is now put into the document metadata, not just the author.
 - The `ref` role can now also reference tables by caption.
 - The `include`⁴⁰⁰⁷ directive now supports absolute paths, which are interpreted as relative to the source directory.
 - In the Python domain, references like `:func: ` .name `` now look for matching names with any prefix if no direct match is found.
- Configuration:
 - Added `rst_prolog` config value.
 - Added `html_secnumber_suffix` config value to control section numbering format.
 - Added `html_compact_lists` config value to control Docutils’ compact lists feature.
 - The `html_sidebars` config value can now contain patterns as keys, and the values can be lists that explicitly select which sidebar templates should be rendered. That means that the builtin sidebar contents can be included only selectively.
 - `html_static_path` can now contain single file entries.
 - The new universal config value `exclude_patterns` makes the old `unused_docs`, `exclude_trees` and `exclude_dirnames` obsolete.
 - Added `html_output_encoding` config value.
 - Added the `latex_docclass` config value and made the “twoside” documentclass option overridable by “oneside”.
 - Added the `trim_doctest_flags` config value, which is true by default.
 - Added `html_show_copyright` config value.
 - Added `latex_show_pagerefs` and `latex_show_urls` config values.

⁴⁰⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/284>

⁴⁰⁰⁷ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#include>

- The behavior of `html_file_suffix`` changed slightly: the empty string now means “no suffix” instead of “default suffix”, use `None` for “default suffix”.
- New builders:
 - Added a builder for the Epub format.
 - Added a builder for manual pages.
 - Added a single-file HTML builder.
- HTML output:
 - Inline roles now get a CSS class with their name, allowing styles to customize their appearance. Domain-specific roles get two classes, `domain` and `domain-rolename`.
 - References now get the class `internal` if they are internal to the whole project, as opposed to `internal` to the current page.
 - External references can be styled differently with the new `externalrefs` theme option for the default theme.
 - In the default theme, the sidebar can experimentally now be made collapsible using the new `collapsiblesidebar` theme option.
 - [#129](https://github.com/sphinx-doc/sphinx/issues/129)⁴⁰⁰⁸: Toc trees are now wrapped in a `div` tag with class `toctree-wrapper` in HTML output.
 - The `toctree` callable in templates now has a `maxdepth` keyword argument to control the depth of the generated tree.
 - The `toctree` callable in templates now accepts a `titles_only` keyword argument.
 - Added `htmltitle` block in layout template.
 - In the JavaScript search, allow searching for object names including the module name, like `sys.argv`.
 - Added new theme `haiku`, inspired by the Haiku OS user guide.
 - Added new theme `nature`.
 - Added new theme `agogo`, created by Andi Albrecht.
 - Added new theme `scrolls`, created by Armin Ronacher.
 - [#193](https://github.com/sphinx-doc/sphinx/issues/193)⁴⁰⁰⁹: Added a `visitedlinkcolor` theme option to the default theme.
 - [#322](https://github.com/sphinx-doc/sphinx/issues/322)⁴⁰¹⁰: Improved responsiveness of the search page by loading the search index asynchronously.
- Extension API:
 - Added `html-collect-pages`.
 - Added `needs_sphinx` config value and `require_sphinx()` application API method.
 - [#200](https://github.com/sphinx-doc/sphinx/issues/200)⁴⁰¹¹: Added `add_stylesheet()` application API method.
- Extensions:
 - Added the `viewcode` extension.
 - Added the `extlinks` extension.
 - Added support for source ordering of members in autodoc, with `autodoc_member_order = 'bysource'`.

⁴⁰⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/129>

⁴⁰⁰⁹ <https://github.com/sphinx-doc/sphinx/issues/193>

⁴⁰¹⁰ <https://github.com/sphinx-doc/sphinx/issues/322>

⁴⁰¹¹ <https://github.com/sphinx-doc/sphinx/issues/200>

- Added `autodoc_default_flags` config value, which can be used to select default flags for all autodoc directives.
- Added a way for intersphinx to refer to named labels in other projects, and to specify the project you want to link to.
- #280⁴⁰¹²: Autodoc can now document instance attributes assigned in `__init__` methods.
- Many improvements and fixes to the `autosummary` extension, thanks to Pauli Virtanen.
- #309⁴⁰¹³: The `graphviz` extension can now output SVG instead of PNG images, controlled by the `graphviz_output_format` config value.
- Added `alt` option to `graphviz` extension directives.
- Added `exclude` argument to `autodoc.between()`.
- Translations:
 - Added Croatian translation, thanks to Bojan Mihelač.
 - Added Turkish translation, thanks to Firat Ozgul.
 - Added Catalan translation, thanks to Pau Fernández.
 - Added simplified Chinese translation.
 - Added Danish translation, thanks to Hjorth Larsen.
 - Added Lithuanian translation, thanks to Dalius Dobravolskas.
- Bugs fixed:
 - #445⁴⁰¹⁴: Fix links to result pages when using the search function of HTML built with the `dirhtml` builder.
 - #444⁴⁰¹⁵: In templates, properly re-escape values treated with the “striptags” Jinja filter.

14.164 Release 0.6.7 (Jun 05, 2010)

- #440⁴⁰¹⁶: Remove usage of a Python `>= 2.5` API in the `literalinclude` directive.
- Fix a bug that prevented some references being generated in the LaTeX builder.
- #428⁴⁰¹⁷: Add some missing CSS styles for standard Docutils classes.
- #432⁴⁰¹⁸: Fix UnicodeErrors while building LaTeX in translated locale.

⁴⁰¹² <https://github.com/sphinx-doc/sphinx/issues/280>

⁴⁰¹³ <https://github.com/sphinx-doc/sphinx/issues/309>

⁴⁰¹⁴ <https://github.com/sphinx-doc/sphinx/issues/445>

⁴⁰¹⁵ <https://github.com/sphinx-doc/sphinx/issues/444>

⁴⁰¹⁶ <https://github.com/sphinx-doc/sphinx/issues/440>

⁴⁰¹⁷ <https://github.com/sphinx-doc/sphinx/issues/428>

⁴⁰¹⁸ <https://github.com/sphinx-doc/sphinx/issues/432>

14.165 Release 0.6.6 (May 25, 2010)

- Handle raw nodes in the `text` writer.
- Fix a problem the Qt help project generated by the `qthelp` builder that would lead to no content being displayed in the Qt Assistant.
- #393⁴⁰¹⁹: Fix the usage of Unicode characters in mathematic formulas when using the `pngmath` extension.
- #404⁴⁰²⁰: Make `\and` work properly in the `author` field of the `latex_documents` setting.
- #409⁴⁰²¹: Make the `highlight_language` config value work properly in the LaTeX builder.
- #418⁴⁰²²: Allow relocation of the translation JavaScript files to the system directory on Unix systems.
- #414⁴⁰²³: Fix handling of Windows newlines in files included with the `literalinclude` directive.
- #377⁴⁰²⁴: Fix crash in linkcheck builder.
- #387⁴⁰²⁵: Fix the display of search results in `dirhtml` output.
- #376⁴⁰²⁶: In autodoc, fix display of parameter defaults containing backslashes.
- #370⁴⁰²⁷: Fix handling of complex list item labels in LaTeX output.
- #374⁴⁰²⁸: Make the `doctest_path` config value of the `doctest` extension actually work.
- Fix the handling of multiple toctrees when creating the global TOC for the `toctree()` template function.
- Fix the handling of hidden toctrees when creating the global TOC for the `toctree()` template function.
- Fix the handling of nested lists in the text writer.
- #362⁴⁰²⁹: In autodoc, check for the existence of `__self__` on function objects before accessing it.
- #353⁴⁰³⁰: Strip leading and trailing whitespace when extracting search words in the search function.

14.166 Release 0.6.5 (Mar 01, 2010)

- In autodoc, fix the omission of some module members explicitly documented using documentation comments.
- #345⁴⁰³¹: Fix cropping of sidebar scroll bar with `stickysidebar` option of the default theme.
- #341⁴⁰³²: Always generate UNIX newlines in the quickstart Makefile.
- #338⁴⁰³³: Fix running with `-C` under Windows.
- In autodoc, allow customizing the signature of an object where the built-in mechanism fails.

⁴⁰¹⁹ <https://github.com/sphinx-doc/sphinx/issues/393>

⁴⁰²⁰ <https://github.com/sphinx-doc/sphinx/issues/404>

⁴⁰²¹ <https://github.com/sphinx-doc/sphinx/issues/409>

⁴⁰²² <https://github.com/sphinx-doc/sphinx/issues/418>

⁴⁰²³ <https://github.com/sphinx-doc/sphinx/issues/414>

⁴⁰²⁴ <https://github.com/sphinx-doc/sphinx/issues/377>

⁴⁰²⁵ <https://github.com/sphinx-doc/sphinx/issues/387>

⁴⁰²⁶ <https://github.com/sphinx-doc/sphinx/issues/376>

⁴⁰²⁷ <https://github.com/sphinx-doc/sphinx/issues/370>

⁴⁰²⁸ <https://github.com/sphinx-doc/sphinx/issues/374>

⁴⁰²⁹ <https://github.com/sphinx-doc/sphinx/issues/362>

⁴⁰³⁰ <https://github.com/sphinx-doc/sphinx/issues/353>

⁴⁰³¹ <https://github.com/sphinx-doc/sphinx/issues/345>

⁴⁰³² <https://github.com/sphinx-doc/sphinx/issues/341>

⁴⁰³³ <https://github.com/sphinx-doc/sphinx/issues/338>

- [#331](#)⁴⁰³⁴: Fix output for enumerated lists with start values in LaTeX.
- Make the `start-after` and `end-before` options to the `literalinclude` directive work correctly if not used together.
- [#321](#)⁴⁰³⁵: Fix link generation in the LaTeX builder.

14.167 Release 0.6.4 (Jan 12, 2010)

- Improve the handling of non-Unicode strings in the configuration.
- [#316](#)⁴⁰³⁶: Catch `OSErrors` occurring when calling `graphviz` with arguments it doesn't understand.
- Restore compatibility with `Pygments` `>= 1.2`.
- [#295](#)⁴⁰³⁷: Fix escaping of `hyperref` targets in LaTeX output.
- [#302](#)⁴⁰³⁸: Fix links generated by the `:doc:` role for LaTeX output.
- [#286](#)⁴⁰³⁹: collect `todo` nodes after the whole document has been read; this allows placing substitution references in `todo` items.
- [#294](#)⁴⁰⁴⁰: do not ignore an explicit `today` config value in a LaTeX build.
- The `alt` text of inheritance diagrams is now much cleaner.
- Ignore images in section titles when generating link captions.
- [#310](#)⁴⁰⁴¹: support exception messages in the `testoutput` blocks of the `doctest` extension.
- [#293](#)⁴⁰⁴²: line blocks are styled properly in HTML output.
- [#285](#)⁴⁰⁴³: make the `locale_dirs` config value work again.
- [#303](#)⁴⁰⁴⁴: `html_context` values given on the command line via `-A` should not override other values given in `conf.py`.
- Fix a bug preventing incremental rebuilds for the `dirhtml` builder.
- [#299](#)⁴⁰⁴⁵: Fix the mangling of quotes in some literal blocks.
- [#292](#)⁴⁰⁴⁶: Fix path to the search index for the `dirhtml` builder.
- Fix a Jython compatibility issue: make the dependence on the `parser` module optional.
- [#238](#)⁴⁰⁴⁷: In `autodoc`, catch all errors that occur on module import, not just `ImportError`.
- Fix the handling of non-data, but non-method descriptors in `autodoc`.
- When copying file times, ignore `OSErrors` raised by `os.utime()`.

⁴⁰³⁴ <https://github.com/sphinx-doc/sphinx/issues/331>

⁴⁰³⁵ <https://github.com/sphinx-doc/sphinx/issues/321>

⁴⁰³⁶ <https://github.com/sphinx-doc/sphinx/issues/316>

⁴⁰³⁷ <https://github.com/sphinx-doc/sphinx/issues/295>

⁴⁰³⁸ <https://github.com/sphinx-doc/sphinx/issues/302>

⁴⁰³⁹ <https://github.com/sphinx-doc/sphinx/issues/286>

⁴⁰⁴⁰ <https://github.com/sphinx-doc/sphinx/issues/294>

⁴⁰⁴¹ <https://github.com/sphinx-doc/sphinx/issues/310>

⁴⁰⁴² <https://github.com/sphinx-doc/sphinx/issues/293>

⁴⁰⁴³ <https://github.com/sphinx-doc/sphinx/issues/285>

⁴⁰⁴⁴ <https://github.com/sphinx-doc/sphinx/issues/303>

⁴⁰⁴⁵ <https://github.com/sphinx-doc/sphinx/issues/299>

⁴⁰⁴⁶ <https://github.com/sphinx-doc/sphinx/issues/292>

⁴⁰⁴⁷ <https://github.com/sphinx-doc/sphinx/issues/238>

14.168 Release 0.6.3 (Sep 03, 2009)

- Properly add C module filenames as dependencies in autodoc.
- #253⁴⁰⁴⁸: Ignore graphviz directives without content instead of raising an unhandled exception.
- #241⁴⁰⁴⁹: Fix a crash building LaTeX output for documents that contain a todolist directive.
- #252⁴⁰⁵⁰: Make it easier to change the build dir in the Makefiles generated by quickstart.
- #220⁴⁰⁵¹: Fix CSS so that displaymath really is centered.
- #222⁴⁰⁵²: Allow the “Footnotes” header to be translated.
- #225⁴⁰⁵³: Don’t add whitespace in generated HTML after inline tags.
- #227⁴⁰⁵⁴: Make `literalinclude` work when the document’s path name contains non-ASCII characters.
- #229⁴⁰⁵⁵: Fix autodoc failures with members that raise errors on `getattr()`.
- #205⁴⁰⁵⁶: When copying files, don’t copy full stat info, only modification times.
- #232⁴⁰⁵⁷: Support non-ASCII metadata in Qt help builder.
- Properly format bullet lists nested in definition lists for LaTeX.
- Section titles are now allowed inside `only` directives.
- #201⁴⁰⁵⁸: Make `centered` directive work in LaTeX output.
- #206⁴⁰⁵⁹: Refuse to overwrite an existing master document in sphinx-quickstart.
- #208⁴⁰⁶⁰: Use MS-sanctioned locale settings, determined by the `language` config option, in the HTML help builder.
- #210⁴⁰⁶¹: Fix nesting of HTML tags for displayed math from `pngmath` extension.
- #213⁴⁰⁶²: Fix centering of images in LaTeX output.
- #211⁴⁰⁶³: Fix compatibility with Docutils 0.5.

⁴⁰⁴⁸ <https://github.com/sphinx-doc/sphinx/issues/253>

⁴⁰⁴⁹ <https://github.com/sphinx-doc/sphinx/issues/241>

⁴⁰⁵⁰ <https://github.com/sphinx-doc/sphinx/issues/252>

⁴⁰⁵¹ <https://github.com/sphinx-doc/sphinx/issues/220>

⁴⁰⁵² <https://github.com/sphinx-doc/sphinx/issues/222>

⁴⁰⁵³ <https://github.com/sphinx-doc/sphinx/issues/225>

⁴⁰⁵⁴ <https://github.com/sphinx-doc/sphinx/issues/227>

⁴⁰⁵⁵ <https://github.com/sphinx-doc/sphinx/issues/229>

⁴⁰⁵⁶ <https://github.com/sphinx-doc/sphinx/issues/205>

⁴⁰⁵⁷ <https://github.com/sphinx-doc/sphinx/issues/232>

⁴⁰⁵⁸ <https://github.com/sphinx-doc/sphinx/issues/201>

⁴⁰⁵⁹ <https://github.com/sphinx-doc/sphinx/issues/206>

⁴⁰⁶⁰ <https://github.com/sphinx-doc/sphinx/issues/208>

⁴⁰⁶¹ <https://github.com/sphinx-doc/sphinx/issues/210>

⁴⁰⁶² <https://github.com/sphinx-doc/sphinx/issues/213>

⁴⁰⁶³ <https://github.com/sphinx-doc/sphinx/issues/211>

14.169 Release 0.6.2 (Jun 16, 2009)

- #130⁴⁰⁶⁴: Fix obscure `IndexError` in doctest extension.
- #167⁴⁰⁶⁵: Make glossary sorting case-independent.
- #196⁴⁰⁶⁶: Add a warning if an extension module doesn't have a `setup()` function.
- #158⁴⁰⁶⁷: Allow `'..'` in template names, and absolute template paths; Jinja 2 by default disables both.
- When highlighting Python code, ignore extra indentation before trying to parse it as Python.
- #191⁴⁰⁶⁸: Don't escape the tilde in URIs in LaTeX.
- Don't consider contents of source comments for the search index.
- Set the default encoding to `utf-8-sig` to handle files with a UTF-8 BOM correctly.
- #178⁴⁰⁶⁹: apply `add_function_parentheses` config value to C functions as promised.
- #173⁴⁰⁷⁰: Respect the Docutils `title` directive.
- #172⁴⁰⁷¹: The `obj` role now links to modules as promised.
- #19⁴⁰⁷²: Tables now can have a "longtable" class, in order to get correctly broken into pages in LaTeX output.
- Look for Sphinx message catalogs in the system default path before trying `sphinx/locale`.
- Fix the search for methods via "classname.methodname".
- #155⁴⁰⁷³: Fix Python 2.4 compatibility: exceptions are old-style classes there.
- #150⁴⁰⁷⁴: Fix display of the "sphinxdoc" theme on Internet Explorer versions 6 and 7.
- #146⁴⁰⁷⁵: Don't fail to generate LaTeX when the user has an active `.docutils` configuration.
- #29⁴⁰⁷⁶: Don't generate visible "`-{-}`" in option lists in LaTeX.
- Fix cross-reference roles when put into substitutions.
- Don't put image "alt" text into table-of-contents entries.
- In the LaTeX writer, do not raise an exception on too many section levels, just use the "subparagraph" level for all of them.
- #145⁴⁰⁷⁷: Fix autodoc problem with automatic members that refuse to be `getattr()`'d from their parent.
- If specific filenames to build are given on the command line, check that they are within the source directory.
- Fix autodoc crash for objects without a `__name__`.
- Fix intersphinx for installations without `urllib2.HTTPSHandler`.

⁴⁰⁶⁴ <https://github.com/sphinx-doc/sphinx/issues/130>

⁴⁰⁶⁵ <https://github.com/sphinx-doc/sphinx/issues/167>

⁴⁰⁶⁶ <https://github.com/sphinx-doc/sphinx/issues/196>

⁴⁰⁶⁷ <https://github.com/sphinx-doc/sphinx/issues/158>

⁴⁰⁶⁸ <https://github.com/sphinx-doc/sphinx/issues/191>

⁴⁰⁶⁹ <https://github.com/sphinx-doc/sphinx/issues/178>

⁴⁰⁷⁰ <https://github.com/sphinx-doc/sphinx/issues/173>

⁴⁰⁷¹ <https://github.com/sphinx-doc/sphinx/issues/172>

⁴⁰⁷² <https://github.com/sphinx-doc/sphinx/issues/19>

⁴⁰⁷³ <https://github.com/sphinx-doc/sphinx/issues/155>

⁴⁰⁷⁴ <https://github.com/sphinx-doc/sphinx/issues/150>

⁴⁰⁷⁵ <https://github.com/sphinx-doc/sphinx/issues/146>

⁴⁰⁷⁶ <https://github.com/sphinx-doc/sphinx/issues/29>

⁴⁰⁷⁷ <https://github.com/sphinx-doc/sphinx/issues/145>

- [#134](#)⁴⁰⁷⁸: Fix pending_xref leftover nodes when using the todoclist directive from the todo extension.

14.170 Release 0.6.1 (Mar 26, 2009)

- [#135](#)⁴⁰⁷⁹: Fix problems with LaTeX output and the graphviz extension.
- [#132](#)⁴⁰⁸⁰: Include the autosummary “module” template in the distribution.

14.171 Release 0.6 (Mar 24, 2009)

New features added

- Incompatible changes:
 - Templating now requires the Jinja2 library, which is an enhanced version of the old Jinja1 engine. Since the syntax and semantic is largely the same, very few fixes should be necessary in custom templates.
 - The “document” div tag has been moved out of the layout.html template’s “document” block, because the closing tag was already outside. If you overwrite this block, you need to remove your “document” div tag as well.
 - The autodoc_skip_member event now also gets to decide whether to skip members whose name starts with underscores. Previously, these members were always automatically skipped. Therefore, if you handle this event, add something like this to your event handler to restore the old behavior:

```
if name.startswith('_'):
    return True
```

- Theming support, see the new section in the documentation.
- Markup:
 - Due to popular demand, added a :doc: role which directly links to another document without the need of creating a label to which a :ref: could link to.
 - [#4](#)⁴⁰⁸¹: Added a :download: role that marks a non-document file for inclusion into the HTML output and links to it.
 - Added an only directive that can selectively include text based on enabled “tags”. Tags can be given on the command line. Also, the current builder output format (e.g. “html” or “latex”) is always a defined tag.
 - [#10](#)⁴⁰⁸²: Added HTML section numbers, enabled by giving a :numbered: flag to the toctree directive.
 - [#114](#)⁴⁰⁸³: Added an abbr role to markup abbreviations and acronyms.
 - The literalinclude directive now supports several more options, to include only parts of a file.
 - The toctree directive now supports a :hidden: flag, which will prevent links from being generated in place of the directive – this allows you to define your document structure, but place the links yourself.
 - [#123](#)⁴⁰⁸⁴: The glossary directive now supports a :sorted: flag that sorts glossary entries alphabetically.

⁴⁰⁷⁸ <https://github.com/sphinx-doc/sphinx/issues/134>

⁴⁰⁷⁹ <https://github.com/sphinx-doc/sphinx/issues/135>

⁴⁰⁸⁰ <https://github.com/sphinx-doc/sphinx/issues/132>

⁴⁰⁸¹ <https://github.com/sphinx-doc/sphinx/issues/4>

⁴⁰⁸² <https://github.com/sphinx-doc/sphinx/issues/10>

⁴⁰⁸³ <https://github.com/sphinx-doc/sphinx/issues/114>

⁴⁰⁸⁴ <https://github.com/sphinx-doc/sphinx/issues/123>

- Paths to images, literal include files and download files can now be absolute (like `/images/foo.png`). They are treated as relative to the top source directory.
- #52⁴⁰⁸⁵: There is now a `hlist` directive, creating a compact list by placing distributing items into multiple columns.
- #77⁴⁰⁸⁶: If a description environment with info field list only contains one `:param:` entry, no bullet list is generated.
- #6⁴⁰⁸⁷: Don't generate redundant `` for top-level TOC tree items, which leads to a visual separation of TOC entries.
- #23⁴⁰⁸⁸: Added a `classmethod` directive along with `method` and `staticmethod`.
- Scaled images now get a link to the unscaled version.
- SVG images are now supported in HTML (via `<object>` and `<embed>` tags).
- Added a `toctree` callable to the templates, and the ability to include external links in toctrees. The 'collapse' keyword argument indicates whether or not to only display subitems of the current page. (Defaults to `True`.)
- Configuration:
 - The new config value `rst_epilog` can contain reST that is appended to each source file that is read. This is the right place for global substitutions.
 - The new `html_add_permalink` config value can be used to switch off the generated “paragraph sign” permalinks for each heading and definition environment.
 - The new `html_show_sourcelink` config value can be used to switch off the links to the reST sources in the sidebar.
 - The default value for `htmlhelp_basename` is now the project title, cleaned up as a filename.
 - The new `modindex_common_prefix` config value can be used to ignore certain package names for module index sorting.
 - The new `trim_footnote_reference_space` config value mirrors the Docutils config value of the same name and removes the space before a footnote reference that is necessary for reST to recognize the reference.
 - The new `latex_additional_files` config value can be used to copy files (that Sphinx doesn't copy automatically, e.g. if they are referenced in custom LaTeX added in `latex_elements`) to the build directory.
- Builders:
 - The HTML builder now stores a small file named `.buildinfo` in its output directory. It stores a hash of config values that can be used to determine if a full rebuild needs to be done (e.g. after changing `html_theme`).
 - New builder for Qt help collections, by Antonio Valentino.
 - The new `DirectoryHTMLBuilder` (short name `dirhtml`) creates a separate directory for every page, and places the page there in a file called `index.html`. Therefore, page URLs and links don't need to contain `.html`.
 - The new `html_link_suffix` config value can be used to select the suffix of generated links between HTML files.
 - #96⁴⁰⁸⁹: The LaTeX builder now supports figures wrapped by text, when using the `figwidth` option and `right/left` alignment.

⁴⁰⁸⁵ <https://github.com/sphinx-doc/sphinx/issues/52>

⁴⁰⁸⁶ <https://github.com/sphinx-doc/sphinx/issues/77>

⁴⁰⁸⁷ <https://github.com/sphinx-doc/sphinx/issues/6>

⁴⁰⁸⁸ <https://github.com/sphinx-doc/sphinx/issues/23>

⁴⁰⁸⁹ <https://github.com/sphinx-doc/sphinx/issues/96>

- New translations:
 - Italian by Sandro Dentella.
 - Ukrainian by Petro Sasnyk.
 - Finnish by Jukka Inkeri.
 - Russian by Alexander Smishlajev.
- Extensions and API:
 - New `graphviz` extension to embed graphviz graphs.
 - New `inheritance_diagram` extension to embed... inheritance diagrams!
 - New `autosummary` extension that generates summaries of modules and automatic documentation of modules.
 - Autodoc now has a reusable Python API, which can be used to create custom types of objects to auto-document (e.g. Zope interfaces). See also `Sphinx.add_autodocumenter()`.
 - Autodoc now handles documented attributes.
 - Autodoc now handles inner classes and their methods.
 - Autodoc can document classes as functions now if explicitly marked with `autofunction`.
 - Autodoc can now exclude single members from documentation via the `exclude-members` option.
 - Autodoc can now order members either alphabetically (like previously) or by member type; configurable either with the config value `autodoc_member_order` or a `member-order` option per directive.
 - The function `Sphinx.add_directive()` now also supports Docutils 0.5-style directive classes. If they inherit from `sphinx.util.compat.Directive`, they also work with Docutils 0.4.
 - There is now a `Sphinx.add_lexer()` method to be able to use custom Pygments lexers easily.
 - There is now `Sphinx.add_generic_role()` to mirror the Docutils' own function.
- Other changes:
 - Config overrides for single dict keys can now be given on the command line.
 - There is now a `doctest_global_setup` config value that can be used to give setup code for all doctests in the documentation.
 - Source links in HTML are now generated with `rel="nofollow"`.
 - Quickstart can now generate a Windows `make.bat` file.
 - [#62](https://github.com/sphinx-doc/sphinx/issues/62)⁴⁰⁹⁰: There is now a `-w` option for `sphinx-build` that writes warnings to a file, in addition to `stderr`.
 - There is now a `-W` option for `sphinx-build` that turns warnings into errors.

⁴⁰⁹⁰ <https://github.com/sphinx-doc/sphinx/issues/62>

14.172 Release 0.5.2 (Mar 24, 2009)

- Properly escape `|` in LaTeX output.
- [#71⁴⁰⁹¹](https://github.com/sphinx-doc/sphinx/issues/71): If a decoding error occurs in source files, print a warning and replace the characters by “?”.
- Fix a problem in the HTML search if the index takes too long to load.
- Don’t output system messages while resolving, because they would stay in the doctrees even if `keep_warnings` is false.
- [#82⁴⁰⁹²](https://github.com/sphinx-doc/sphinx/issues/82): Determine the correct path for dependencies noted by docutils. This fixes behavior where a source with dependent files was always reported as changed.
- Recognize toctree directives that are not on section toplevel, but within block items, such as tables.
- Use a new RFC base URL, since `rfc.org` seems down.
- Fix a crash in the todoclist directive when no todo items are defined.
- Don’t call LaTeX or dvipng over and over again if it was not found once, and use text-only latex as a substitute in that case.
- Fix problems with footnotes in the LaTeX output.
- Prevent double hyphens becoming en-dashes in literal code in the LaTeX output.
- Open literalinclude files in universal newline mode to allow arbitrary newline conventions.
- Actually make the `-Q` option work.
- [#86⁴⁰⁹³](https://github.com/sphinx-doc/sphinx/issues/86): Fix explicit document titles in toctrees.
- [#81⁴⁰⁹⁴](https://github.com/sphinx-doc/sphinx/issues/81): Write environment and search index in a manner that is safe from exceptions that occur during dumping.
- [#80⁴⁰⁹⁵](https://github.com/sphinx-doc/sphinx/issues/80): Fix UnicodeErrors when a locale is set with `setlocale()`.

14.173 Release 0.5.1 (Dec 15, 2008)

- [#67⁴⁰⁹⁶](https://github.com/sphinx-doc/sphinx/issues/67): Output warnings about failed doctests in the doctest extension even when running in quiet mode.
- [#72⁴⁰⁹⁷](https://github.com/sphinx-doc/sphinx/issues/72): In `pngmath`, make it possible to give a full path to LaTeX and dvipng on Windows. For that to work, the `pngmath_latex` and `pngmath_dvipng` options are no longer split into command and additional arguments; use `pngmath_latex_args` and `pngmath_dvipng_args` to give additional arguments.
- Don’t crash on failing doctests with non-ASCII characters.
- Don’t crash on writing status messages and warnings containing unencodable characters.
- Warn if a doctest extension block doesn’t contain any code.
- Fix the handling of `:param:` and `:type:` doc fields when they contain markup (especially cross-referencing roles).
- [#65⁴⁰⁹⁸](https://github.com/sphinx-doc/sphinx/issues/65): Fix storage of depth information for PNGs generated by the `pngmath` extension.

⁴⁰⁹¹ <https://github.com/sphinx-doc/sphinx/issues/71>

⁴⁰⁹² <https://github.com/sphinx-doc/sphinx/issues/82>

⁴⁰⁹³ <https://github.com/sphinx-doc/sphinx/issues/86>

⁴⁰⁹⁴ <https://github.com/sphinx-doc/sphinx/issues/81>

⁴⁰⁹⁵ <https://github.com/sphinx-doc/sphinx/issues/80>

⁴⁰⁹⁶ <https://github.com/sphinx-doc/sphinx/issues/67>

⁴⁰⁹⁷ <https://github.com/sphinx-doc/sphinx/issues/72>

⁴⁰⁹⁸ <https://github.com/sphinx-doc/sphinx/issues/65>

- Fix autodoc crash when automethod is used outside a class context.
- [#68](https://github.com/sphinx-doc/sphinx/issues/68)⁴⁰⁹⁹: Fix LaTeX writer output for images with specified height.
- [#60](https://github.com/sphinx-doc/sphinx/issues/60)⁴¹⁰⁰: Fix wrong generated image path when including images in sources in subdirectories.
- Fix the JavaScript search when `html_copy_source` is off.
- Fix an indentation problem in autodoc when documenting classes with the option `autoclass_content = "both"` set.
- Don't crash on empty index entries, only emit a warning.
- Fix a typo in the search JavaScript code, leading to unusable search function in some setups.

14.174 Release 0.5 (Nov 23, 2008) – Birthday release!

New features added

- Markup features:
 - Citations are now global: all citation defined in any file can be referenced from any file. Citations are collected in a bibliography for LaTeX output.
 - Footnotes are now properly handled in the LaTeX builder: they appear at the location of the footnote reference in text, not at the end of a section. Thanks to Andrew McNamara for the initial patch.
 - “System Message” warnings are now automatically removed from the built documentation, and only written to stderr. If you want the old behavior, set the new config value `keep_warnings` to `True`.
 - Glossary entries are now automatically added to the index.
 - Figures with captions can now be referred to like section titles, using the `:ref:` role without an explicit link text.
 - Added `cmember` role for consistency.
 - Lists enumerated by letters or roman numerals are now handled like in standard reST.
 - The `seealso` directive can now also be given arguments, as a short form.
 - You can now document several programs and their options with the new `program` directive.
- HTML output and templates:
 - Incompatible change: The “root” relation link (top left in the relbar) now points to the `master_doc` by default, no longer to a document called “index”. The old behavior, while useful in some situations, was somewhat unexpected. Override the “rootrellink” block in the template to customize where it refers to.
 - The JavaScript search now searches for objects before searching in the full text.
 - TOC tree entries now have CSS classes that make it possible to style them depending on their depth.
 - Highlighted code blocks now have CSS classes that make it possible to style them depending on their language.
 - HTML `<meta>` tags via the Docutils `meta`⁴¹⁰¹ directive are now supported.

⁴⁰⁹⁹ <https://github.com/sphinx-doc/sphinx/issues/68>

⁴¹⁰⁰ <https://github.com/sphinx-doc/sphinx/issues/60>

⁴¹⁰¹ <https://docutils.sourceforge.io/docs/ref/rst/directives.html#meta>

- `SerializingHTMLBuilder` was added as new abstract builder that can be subclassed to serialize build HTML in a specific format. The `PickleHTMLBuilder` is a concrete subclass of it that uses pickle as serialization implementation.
- `JSONHTMLBuilder` was added as another `SerializingHTMLBuilder` subclass that dumps the generated HTML into JSON files for further processing.
- The `rellinks` block in the layout template is now called `linktags` to avoid confusion with the `relbar` links.
- The HTML builders have two additional attributes now that can be used to disable the anchor-link creation after headlines and definition links.
- Only generate a module index if there are some modules in the documentation.
- New and changed config values:
 - Added support for internationalization in generated text with the `language` and `locale_dirs` config values. Many thanks to language contributors:
 - * Horst Gutmann – German
 - * Pavel Kosina – Czech
 - * David Larlet – French
 - * Michał Kandulski – Polish
 - * Yasushi Masuda – Japanese
 - * Guillem Borrell – Spanish
 - * Luc Saffre and Peter Bertels – Dutch
 - * Fred Lin – Traditional Chinese
 - * Roger Demetrescu – Brazilian Portuguese
 - * Rok Garbas – Slovenian
 - The new config value `highlight_language` set a global default for highlighting. When `'python3'` is selected, console output blocks are recognized like for `'python'`.
 - Exposed Pygments’ lexer guessing as a highlight “language” guess.
 - The new config value `latex_elements` allows to override all LaTeX snippets that Sphinx puts into the generated `.tex` file by default.
 - Added `exclude_dirnames` config value that can be used to exclude e.g. CVS directories from source file search.
 - Added `source_encoding` config value to select input encoding.
- Extensions:
 - The new extensions `sphinx.ext.jsmath` and `sphinx.ext.pngmath` provide math support for both HTML and LaTeX builders.
 - The new extension `sphinx.ext.intersphinx` half-automatically creates links to Sphinx documentation of Python objects in other projects.
 - The new extension `sphinx.ext.todo` allows the insertion of “To do” directives whose visibility in the output can be toggled. It also adds a directive to compile a list of all todo items.
 - `sphinx.ext.autodoc` has a new event `autodoc-process-signature` that allows tuning function signature introspection.

- sphinx.ext.autodoc has a new event `autodoc-skip-member` that allows tuning which members are included in the generated content.
- Respect `__all__` when aut documenting module members.
- The `automodule` directive now supports the `synopsis`, `deprecated` and `platform` options.
- Extension API:
 - `Sphinx.add_node()` now takes optional visitor methods for the HTML, LaTeX and text translators; this prevents having to manually patch the classes.
 - Added `Sphinx.add_javascript()` that adds scripts to load in the default HTML template.
 - Added new events: `source-read`, `env-updated`, `env-purge-doc`, `missing-reference`, `build-finished`.
- Other changes:
 - Added a command-line switch `-Q`: it will suppress warnings.
 - Added a command-line switch `-A`: it can be used to supply additional values into the HTML templates.
 - Added a command-line switch `-C`: if it is given, no configuration file `conf.py` is required.
 - Added a distutils command `build_sphinx`: When Sphinx is installed, you can call `python setup.py build_sphinx` for projects that have Sphinx documentation, which will build the docs and place them in the standard distutils build directory.
 - In quickstart, if the selected root path already contains a Sphinx project, complain and abort.

Bugs fixed

- [#51](https://github.com/sphinx-doc/sphinx/issues/51)⁴¹⁰²: Escape configuration values placed in HTML templates.
- [#44](https://github.com/sphinx-doc/sphinx/issues/44)⁴¹⁰³: Fix small problems in HTML help index generation.
- Fix LaTeX output for line blocks in tables.
- [#38](https://github.com/sphinx-doc/sphinx/issues/38)⁴¹⁰⁴: Fix “illegal unit” error when using pixel image widths/heights.
- Support table captions in LaTeX output.
- [#39](https://github.com/sphinx-doc/sphinx/issues/39)⁴¹⁰⁵: Work around a bug in Jinja that caused “<generator ...>” to be emitted in HTML output.
- Fix a problem with module links not being generated in LaTeX output.
- Fix the handling of images in different directories.
- [#29](https://github.com/sphinx-doc/sphinx/issues/29)⁴¹⁰⁶: Support option lists in the text writer. Make sure that dashes introducing long option names are not contracted to en-dashes.
- Support the “scale” option for images in HTML output.
- [#25](https://github.com/sphinx-doc/sphinx/issues/25)⁴¹⁰⁷: Properly escape quotes in HTML help attribute values.
- Fix LaTeX build for some description environments with `:noindex:`.
- [#24](https://github.com/sphinx-doc/sphinx/issues/24)⁴¹⁰⁸: Don’t crash on uncommon casing of role names (like `:Class:`).

⁴¹⁰² <https://github.com/sphinx-doc/sphinx/issues/51>

⁴¹⁰³ <https://github.com/sphinx-doc/sphinx/issues/44>

⁴¹⁰⁴ <https://github.com/sphinx-doc/sphinx/issues/38>

⁴¹⁰⁵ <https://github.com/sphinx-doc/sphinx/issues/39>

⁴¹⁰⁶ <https://github.com/sphinx-doc/sphinx/issues/29>

⁴¹⁰⁷ <https://github.com/sphinx-doc/sphinx/issues/25>

⁴¹⁰⁸ <https://github.com/sphinx-doc/sphinx/issues/24>

- Only output ANSI colors on color terminals.
- Update to newest fncychap.sty, to fix problems with non-ASCII characters at the start of chapter titles.
- Fix a problem with index generation in LaTeX output, caused by hyperref not being included last.
- Don't disregard return annotations for functions without any parameters.
- Don't throw away labels for code blocks.

14.175 Release 0.4.3 (Oct 8, 2008)

- Fix a bug in autodoc with directly given autodoc members.
- Fix a bug in autodoc that would import a module twice, once as “module”, once as “module.”.
- Fix a bug in the HTML writer that created duplicate id attributes for section titles with Docutils 0.5.
- Properly call `super()` in overridden blocks in templates.
- Add a fix when using XeTeX.
- Unify handling of LaTeX escaping.
- Rebuild everything when the `extensions` config value changes.
- Don't try to remove a nonexistent static directory.
- Fix an indentation problem in production lists.
- Fix encoding handling for literal include files: `literalinclude` now has an `encoding` option that defaults to UTF-8.
- Fix the handling of non-ASCII characters entered in quickstart.
- Fix a crash with nonexistent image URIs.

14.176 Release 0.4.2 (Jul 29, 2008)

- Fix rendering of the `samp` role in HTML.
- Fix a bug with LaTeX links to headings leading to a wrong page.
- Reread documents with globbed toctrees when source files are added or removed.
- Add a missing parameter to `PickleHTMLBuilder.handle_page()`.
- Put inheritance info always on its own line.
- Don't automatically enclose code with whitespace in it in quotes; only do this for the `samp` role.
- autodoc now emits a more precise error message when a module can't be imported or an attribute can't be found.
- The JavaScript search now uses the correct file name suffix when referring to found items.
- The automodule directive now accepts the `inherited-members` and `show-inheritance` options again.
- You can now rebuild the docs normally after relocating the source and/or doctree directory.

14.177 Release 0.4.1 (Jul 5, 2008)

- Added sub-/superscript node handling to TextBuilder.
- Label names in references are now case-insensitive, since reST label names are always lowercased.
- Fix linkcheck builder crash for malformed URLs.
- Add compatibility for admonitions and Docutils 0.5.
- Remove the silly restriction on “rubric” in the LaTeX writer: you can now write arbitrary “rubric” directives, and only those with a title of “Footnotes” will be ignored.
- Copy the HTML logo to the output `_static` directory.
- Fix LaTeX code for modules with underscores in names and platforms.
- Fix a crash with nonlocal image URIs.
- Allow the usage of `:noindex:` in `automodule` directives, as documented.
- Fix the `delete()` docstring processor function in `autodoc`.
- Fix warning message for nonexistent images.
- Fix JavaScript search in Internet Explorer.

14.178 Release 0.4 (Jun 23, 2008)

New features added

- `tocdepth` can be given as a file-wide metadata entry, and specifies the maximum depth of a TOC of this file.
- The new config value `default_role` can be used to select the default role for all documents.
- Sphinx now interprets field lists with fields like `:param foo:` in description units.
- The new `staticmethod` directive can be used to mark methods as static methods.
- HTML output:
 - The “previous” and “next” links have a more logical structure, so that by following “next” links you can traverse the entire TOC tree.
 - The new event `html-page-context` can be used to include custom values into the context used when rendering an HTML template.
 - Document metadata is now in the default template context, under the name `metadata`.
 - The new config value `html_favicon` can be used to set a favicon for the HTML output. Thanks to Sebastian Wiesner.
 - The new config value `html_use_index` can be used to switch index generation in HTML documents off.
 - The new config value `html_split_index` can be used to create separate index pages for each letter, to be used when the complete index is too large for one page.
 - The new config value `html_short_title` can be used to set a shorter title for the documentation which is then used in the navigation bar.
 - The new config value `html_show_sphinx` can be used to control whether a link to Sphinx is added to the HTML footer.

- The new config value `html_file_suffix` can be used to set the HTML file suffix to e.g. `.xhtml`.
- The directories in the `html_static_path` can now contain subdirectories.
- The module index now isn't collapsed if the number of submodules is larger than the number of toplevel modules.
- The image directive now supports specifying the extension as `.*`, which makes the builder select the one that matches best. Thanks to Sebastian Wiesner.
- The new config value `exclude_trees` can be used to exclude whole subtrees from the search for source files.
- Defaults for configuration values can now be callables, which allows dynamic defaults.
- The new TextBuilder creates plain-text output.
- Python 3-style signatures, giving a return annotation via `->`, are now supported.
- Extensions:
 - The autodoc extension now offers a much more flexible way to manipulate docstrings before including them into the output, via the new `autodoc-process-docstring` event.
 - The autodoc extension accepts signatures for functions, methods and classes now that override the signature got via introspection from Python code.
 - The autodoc extension now offers a `show-inheritance` option for autoclass that inserts a list of bases after the signature.
 - The autodoc directives now support the `noindex` flag option.

Bugs fixed

- Correctly report the source location for docstrings included with autodoc.
- Fix the LaTeX output of description units with multiple signatures.
- Handle the figure directive in LaTeX output.
- Handle raw admonitions in LaTeX output.
- Fix determination of the title in HTML help output.
- Handle project names containing spaces.
- Don't write SSI-like comments in HTML output.
- Rename the “sidebar” class to “sphinxsidebar” in order to stay different from reST sidebars.
- Use a binary TOC in HTML help generation to fix issues links without explicit anchors.
- Fix behavior of references to functions/methods with an explicit title.
- Support citation, subscript and superscript nodes in LaTeX writer.
- Provide the standard “class” directive as “cssclass”; else it is shadowed by the Sphinx-defined directive.
- Fix the handling of explicit module names given to autoclass directives. They now show up with the correct module name in the generated docs.
- Enable autodoc to process Unicode docstrings.
- The LaTeX writer now translates line blocks with `\raggedright`, which plays nicer with tables.
- Fix bug with directories in the HTML builder static path.

14.179 Release 0.3 (May 6, 2008)

New features added

- The `toctree` directive now supports a `glob` option that allows glob-style entries in the content.
- If the `pygments_style` config value contains a dot it's treated as the import path of a custom Pygments style class.
- A new config value, `exclude_dirs`, can be used to exclude whole directories from the search for source files.
- The configuration directory (containing `conf.py`) can now be set independently from the source directory. For that, a new command-line option `-c` has been added.
- A new directive `tabularcolumns` can be used to give a tabular column specification for LaTeX output. Tables now use the `tabulary` package. Literal blocks can now be placed in tables, with several caveats.
- A new config value, `latex_use_parts`, can be used to enable parts in LaTeX documents.
- Autodoc now skips inherited members for classes, unless you give the new `inherited-members` option.
- A new config value, `autoclass_content`, selects if the docstring of the class' `__init__` method is added to the directive's body.
- Support for C++ class names (in the style `Class::Function`) in C function descriptions.
- Support for a `toctree_only` item in items for the `latex_documents` config value. This only includes the documents referenced by TOC trees in the output, not the rest of the file containing the directive.

Bugs fixed

- `sphinx.htmlwriter`: Correctly write the TOC file for any structure of the master document. Also encode non-ASCII characters as entities in TOC and index file. Remove two remaining instances of hard-coded "documentation".
- `sphinx.ext.autodoc`: descriptors are detected properly now.
- `sphinx.latexwriter`: implement all reST admonitions, not just `note` and `warning`.
- Lots of little fixes to the LaTeX output and style.
- Fix OpenSearch template and make template URL absolute. The `html_use_opensearch` config value now must give the base URL.
- Some unused files are now stripped from the HTML help file build.

14.180 Release 0.2 (Apr 27, 2008)

Incompatible changes

- Jinja, the template engine used for the default HTML templates, is now no longer shipped with Sphinx. If it is not installed automatically for you (it is now listed as a dependency in `setup.py`), install it manually from PyPI. This will also be needed if you're using Sphinx from a SVN checkout; in that case please also remove the `sphinx/jinja` directory that may be left over from old revisions.

- The clumsy handling of the `index.html` template was removed. The config value `html_index` is gone, and `html_additional_pages` should be used instead. If you need it, the old `index.html` template is still there, called `defindex.html`, and you can port your `html_index` template, using Jinja inheritance, by changing your template:

```
{% extends "defindex.html" %}
{% block tables %}
... old html_index template content ...
{% endblock %}
```

and putting `'index':` name of your template in `html_additional_pages`.

- In the layout template, redundant blocks were removed; you should use Jinja’s standard `{{ super() }}` mechanism instead, as explained in the (newly written) templating docs.

New features added

- Extension API (Application object):
 - Support a new method, `add_crossref_type`. It works like `add_description_unit` but the directive will only create a target and no output.
 - Support a new method, `add_transform`. It takes a standard Docutils Transform subclass which is then applied by Sphinx’s reader on parsing reST document trees.
 - Add support for other template engines than Jinja, by adding an abstraction called a “template bridge”. This class handles rendering of templates and can be changed using the new configuration value “`template_bridge`”.
 - The config file itself can be an extension (if it provides a `setup()` function).
- Markup:
 - New directive, `currentmodule`. It can be used to indicate the module name of the following documented things without creating index entries.
 - Allow giving a different title to documents in the toctree.
 - Allow giving multiple options in a `cmdoption` directive.
 - Fix display of class members without explicit class name given.
- Templates (HTML output):
 - `index.html` renamed to `defindex.html`, see above.
 - There’s a new config value, `html_title`, that controls the overall “title” of the set of Sphinx docs. It is used instead everywhere instead of “Projectname vX.Y documentation” now.
 - All references to “documentation” in the templates have been removed, so that it is now easier to use Sphinx for non-documentation documents with the default templates.
 - Templates now have an XHTML doctype, to be consistent with Docutils’ HTML output.
 - You can now create an OpenSearch description file with the `html_use_opensearch` config value.
 - You can now quickly include a logo in the sidebar, using the `html_logo` config value.
 - There are new blocks in the sidebar, so that you can easily insert content into the sidebar.
- LaTeX output:
 - The `sphinx.sty` package was cleaned of unused stuff.

- You can include a logo in the title page with the `latex_logo` config value.
- You can define the link colors and a border and background color for verbatim environments.

Thanks to Jacob Kaplan-Moss, Talin, Jeroen Ruigrok van der Werven and Sebastian Wiesner for suggestions.

Bugs fixed

- `sphinx.ext.autodoc`: Don't check `__module__` for explicitly given members. Remove "self" in class constructor argument list.
- `sphinx.htmlwriter`: Don't use `os.path` for joining image HREFs.
- `sphinx.htmlwriter`: Don't use `SmartyPants` for HTML attribute values.
- `sphinx.latexwriter`: Implement option lists. Also, some other changes were made to `sphinx.sty` in order to enhance compatibility and remove old unused stuff. Thanks to Gael Varoquaux for that!
- `sphinx.roles`: Fix referencing glossary terms with explicit targets.
- `sphinx.environment`: Don't swallow TOC entries when resolving subtrees.
- `sphinx.quickstart`: Create a sensible default `latex_documents` setting.
- `sphinx.builder`, `sphinx.environment`: Gracefully handle some user error cases.
- `sphinx.util`: Follow symbolic links when searching for documents.

14.181 Release 0.1.61950 (Mar 26, 2008)

- `sphinx.quickstart`: Fix format string for Makefile.

14.182 Release 0.1.61945 (Mar 26, 2008)

- `sphinx.htmlwriter`, `sphinx.latexwriter`: Support the `.. image::` directive by copying image files to the output directory.
- `sphinx.builder`: Consistently name "special" HTML output directories with a leading underscore; this means `_sources` and `_static`.
- `sphinx.environment`: Take dependent files into account when collecting the set of outdated sources.
- `sphinx.directives`: Record files included with `.. literalinclude::` as dependencies.
- `sphinx.ext.autodoc`: Record files from which docstrings are included as dependencies.
- `sphinx.builder`: Rebuild all HTML files in case of a template change.
- `sphinx.builder`: Handle unavailability of TOC relations (previous/ next chapter) more gracefully in the HTML builder.
- `sphinx.latexwriter`: Include `fncychap.sty` which doesn't seem to be very common in TeX distributions. Add a `clean` target in the latex Makefile. Really pass the correct paper and size options to the LaTeX document class.
- `setup`: On Python 2.4, don't egg-depend on Docutils if a Docutils is already installed – else it will be overwritten.

14.183 Release 0.1.61843 (Mar 24, 2008)

- sphinx.quickstart: Really don't create a makefile if the user doesn't want one.
- setup: Don't install scripts twice, via setuptools entry points and distutils scripts. Only install via entry points.
- sphinx.builder: Don't recognize the HTML builder's copied source files (under `_sources`) as input files if the source suffix is `.txt`.
- sphinx.highlighting: Generate correct markup for LaTeX Verbatim environment escapes even if Pygments is not installed.
- sphinx.builder: The WebHTMLBuilder is now called PickleHTMLBuilder.
- sphinx.htmlwriter: Make parsed-literal blocks work as expected, not highlighting them via Pygments.
- sphinx.environment: Don't error out on reading an empty source file.

14.184 Release 0.1.61798 (Mar 23, 2008)

- sphinx: Work with Docutils SVN snapshots as well as 0.4.
- sphinx.ext.doctest: Make the group in which doctest blocks are placed selectable, and default to `'default'`.
- sphinx.ext.doctest: Replace `<BLANKLINE>` in doctest blocks by real blank lines for presentation output, and remove doctest options given inline.
- sphinx.environment: Move `doctest_blocks` out of `block_quotes` to support indented doctest blocks.
- sphinx.ext.autodoc: Render `.. automodule:: docstrings` in a section node, so that module docstrings can contain proper sectioning.
- sphinx.ext.autodoc: Use the module's encoding for decoding docstrings, rather than requiring ASCII.

14.185 Release 0.1.61611 (Mar 21, 2008)

- First public release.

PROJECTS USING SPHINX

This is an (incomplete) alphabetic list of projects that use Sphinx or are experimenting with using it for their documentation. If you like to be included, please mail to [the Google group](#)⁴¹⁰⁹.

I've grouped the list into sections to make it easier to find interesting examples.

15.1 Documentation using the alabaster theme

- [Alabaster](#)⁴¹¹⁰
- [Blinker](#)⁴¹¹¹
- [Calibre](#)⁴¹¹²
- [CherryPy](#)⁴¹¹³
- [Click](#)⁴¹¹⁴ (customized)
- [coala](#)⁴¹¹⁵ (customized)
- [CodePy](#)⁴¹¹⁶
- [Django Q](#)⁴¹¹⁷
- [Eve](#)⁴¹¹⁸ (Python REST API framework)
- [Fabric](#)⁴¹¹⁹
- [Fityk](#)⁴¹²⁰
- [Flask](#)⁴¹²¹
- [Flask-OpenID](#)⁴¹²²

⁴¹⁰⁹ <https://groups.google.com/forum/#!forum/sphinx-users>

⁴¹¹⁰ <https://alabaster.readthedocs.io/>

⁴¹¹¹ <https://blinker.readthedocs.io/>

⁴¹¹² <https://manual.calibre-ebook.com/>

⁴¹¹³ <https://cherrypy.readthedocs.io/>

⁴¹¹⁴ <https://click.palletsprojects.com/>

⁴¹¹⁵ <https://docs.coala.io/>

⁴¹¹⁶ <https://document.tician.de/codepy/>

⁴¹¹⁷ <https://django-q.readthedocs.io/>

⁴¹¹⁸ <https://docs.python-eve.org/>

⁴¹¹⁹ <https://docs.fabfile.org/>

⁴¹²⁰ <https://fityk.nieto.pl/>

⁴¹²¹ <https://flask.palletsprojects.com/>

⁴¹²² <https://pythonhosted.org/Flask-OpenID/>

- [Invoke](#)⁴¹²³
- [Jinja](#)⁴¹²⁴
- [Lino](#)⁴¹²⁵ (customized)
- [Linux kernel](#)⁴¹²⁶ (customized)
- [marbl](#)⁴¹²⁷
- [MeshPy](#)⁴¹²⁸
- [Molecule](#)⁴¹²⁹
- [Momotor LTI](#)⁴¹³⁰
- [Podman](#)⁴¹³¹
- [PyCUDA](#)⁴¹³²
- [PyOpenCL](#)⁴¹³³
- [PyLangAcq](#)⁴¹³⁴
- [pytest](#)⁴¹³⁵ (customized)
- [python-apt](#)⁴¹³⁶
- [PyVisfile](#)⁴¹³⁷
- [Requests](#)⁴¹³⁸
- [searx](#)⁴¹³⁹
- [Spyder](#)⁴¹⁴⁰ (customized)
- [Tablib](#)⁴¹⁴¹
- [urllib3](#)⁴¹⁴² (customized)
- [Werkzeug](#)⁴¹⁴³
- [Write the Docs](#)⁴¹⁴⁴

⁴¹²³ <https://docs.pyinvoke.org/>

⁴¹²⁴ <https://jinja.palletsprojects.com/>

⁴¹²⁵ <https://www.lino-framework.org/>

⁴¹²⁶ <https://www.kernel.org/doc/html/latest/index.html>

⁴¹²⁷ <https://getmarbl.readthedocs.io/>

⁴¹²⁸ <https://documen.tician.de/meshpy/>

⁴¹²⁹ <https://molecule.readthedocs.io/>

⁴¹³⁰ <https://momotor.org/doc/lti/canvas/>

⁴¹³¹ <https://docs.podman.io/>

⁴¹³² <https://documen.tician.de/pycuda/>

⁴¹³³ <https://documen.tician.de/pyopencl/>

⁴¹³⁴ <https://pylangacq.org/>

⁴¹³⁵ <https://docs.pytest.org/>

⁴¹³⁶ <https://apt-team.pages.debian.net/python-apt/>

⁴¹³⁷ <https://documen.tician.de/pyvisfile/>

⁴¹³⁸ <https://requests.readthedocs.io/>

⁴¹³⁹ <https://asciimoo.github.io/searx/>

⁴¹⁴⁰ <https://docs.spyder-ide.org/>

⁴¹⁴¹ <http://docs.python-tablib.org/>

⁴¹⁴² <https://urllib3.readthedocs.io/>

⁴¹⁴³ <https://werkzeug.palletsprojects.com/>

⁴¹⁴⁴ <https://www.writethedocs.org/>

15.2 Documentation using the classic theme

- Advanced Generic Widgets⁴¹⁴⁵ (customized)
- Apache CouchDB⁴¹⁴⁶ (customized)
- APSW⁴¹⁴⁷
- Arb⁴¹⁴⁸
- Beautiful Soup⁴¹⁴⁹
- Blender API⁴¹⁵⁰
- Bugzilla⁴¹⁵¹
- Buildbot⁴¹⁵²
- CMake⁴¹⁵³ (customized)
- Chaco⁴¹⁵⁴ (customized)
- DEAP⁴¹⁵⁵ (customized)
- Director⁴¹⁵⁶
- EZ-Draw⁴¹⁵⁷ (customized)
- Generic Mapping Tools (GMT)⁴¹⁵⁸ (customized)
- Genomedata⁴¹⁵⁹
- GetFEM⁴¹⁶⁰ (customized)
- Glasgow Haskell Compiler⁴¹⁶¹ (customized)
- Grok⁴¹⁶² (customized)
- GROMACS⁴¹⁶³
- GSL Shell⁴¹⁶⁴
- Hands-on Python Tutorial⁴¹⁶⁵
- Kaa⁴¹⁶⁶ (customized)

⁴¹⁴⁵ https://xoomer.virgilio.it/infinity77/AGW_Docs/

⁴¹⁴⁶ <https://docs.couchdb.org/>

⁴¹⁴⁷ <https://rogerbinns.github.io/apsw/>

⁴¹⁴⁸ <https://arblib.org/>

⁴¹⁴⁹ <https://www.crummy.com/software/BeautifulSoup/bs4/doc/>

⁴¹⁵⁰ <https://docs.blender.org/api/current/>

⁴¹⁵¹ <https://bugzilla.readthedocs.io/>

⁴¹⁵² <https://docs.buildbot.net/latest/>

⁴¹⁵³ <https://cmake.org/documentation/>

⁴¹⁵⁴ <https://docs.enthought.com/chaco/>

⁴¹⁵⁵ <https://deap.readthedocs.io/>

⁴¹⁵⁶ <https://pythonhosted.org/director/>

⁴¹⁵⁷ <https://pageperso.lis-lab.fr/~edouard.thiel/ez-draw/doc/en/html/ez-manual.html>

⁴¹⁵⁸ <https://gmt.soest.hawaii.edu/doc/latest/>

⁴¹⁵⁹ <https://noble.gs.washington.edu/proj/genomedata/doc/1.3.3/>

⁴¹⁶⁰ <https://getfem.org/>

⁴¹⁶¹ https://downloads.haskell.org/~ghc/latest/docs/html/users_guide/

⁴¹⁶² <https://web.archive.org/web/20230708190705/http://grok.zope.org/doc/current/>

⁴¹⁶³ <https://manual.gromacs.org/documentation/>

⁴¹⁶⁴ <https://www.nongnu.org/gsl-shell/>

⁴¹⁶⁵ <http://anh.cs.luc.edu:80/python/hands-on/3.1/handsonHtml/>

⁴¹⁶⁶ <https://freevo.github.io/kaa-base/>

- [Leo](#)⁴¹⁶⁷ (customized)
- [Mayavi](#)⁴¹⁶⁸ (customized)
- [MediaGoblin](#)⁴¹⁶⁹ (customized)
- [mpmath](#)⁴¹⁷⁰
- [OpenCV](#)⁴¹⁷¹ (customized)
- [OpenEXR](#)⁴¹⁷²
- [OpenGDA](#)⁴¹⁷³
- [phpDocumentor](#)⁴¹⁷⁴ (customized)
- [Plone](#)⁴¹⁷⁵ (customized)
- [PyEMD](#)⁴¹⁷⁶
- [Pyevolve](#)⁴¹⁷⁷
- [Pygame](#)⁴¹⁷⁸ (customized)
- [PyMQI](#)⁴¹⁷⁹
- [PyQt4](#)⁴¹⁸⁰ (customized)
- [PyQt5](#)⁴¹⁸¹ (customized)
- [Python 2](#)⁴¹⁸²
- [Python 3](#)⁴¹⁸³ (customized)
- [Python Packaging Authority](#)⁴¹⁸⁴ (customized)
- [Ring programming language](#)⁴¹⁸⁵ (customized)
- [SageMath](#)⁴¹⁸⁶ (customized)
- [Segway](#)⁴¹⁸⁷
- [simuPOP](#)⁴¹⁸⁸ (customized)
- [SymPy](#)⁴¹⁸⁹

⁴¹⁶⁷ <https://leoeditor.com/>

⁴¹⁶⁸ <https://docs.entthought.com/mayavi/mayavi/>

⁴¹⁶⁹ <https://mediagoblin.readthedocs.io/>

⁴¹⁷⁰ <https://mpmath.org/doc/current/>

⁴¹⁷¹ <https://docs.opencv.org/>

⁴¹⁷² <https://excamera.com/articles/26/doc/index.html>

⁴¹⁷³ <https://alfred.diamond.ac.uk/documentation/>

⁴¹⁷⁴ <https://docs.phpdoc.org/>

⁴¹⁷⁵ <https://docs.plone.org/>

⁴¹⁷⁶ <https://pyemd.readthedocs.io/>

⁴¹⁷⁷ <https://pyevolve.sourceforge.net/>

⁴¹⁷⁸ <https://www.pygame.org/docs/>

⁴¹⁷⁹ <https://dsuch.github.io/pymqi/>

⁴¹⁸⁰ <https://pyqt.sourceforge.net/Docs/PyQt4/>

⁴¹⁸¹ <https://pyqt.sourceforge.net/Docs/PyQt5/>

⁴¹⁸² <https://docs.python.org/2/>

⁴¹⁸³ <https://docs.python.org/3/>

⁴¹⁸⁴ <https://www.pypa.io/>

⁴¹⁸⁵ <https://ring-lang.sourceforge.net/doc/>

⁴¹⁸⁶ <https://doc.sagemath.org/>

⁴¹⁸⁷ <https://noble.gs.washington.edu/proj/segway/doc/1.1.0/segway.html>

⁴¹⁸⁸ https://simupop.sourceforge.net/manual_release/build/userGuide.html

⁴¹⁸⁹ <https://docs.sympy.org/>

- TurboGears⁴¹⁹⁰ (customized)
- tvtk⁴¹⁹¹
- Varnish⁴¹⁹² (customized, alabaster for index)
- Waf⁴¹⁹³
- wxPython Phoenix⁴¹⁹⁴ (customized)
- z3c⁴¹⁹⁵
- zc.async⁴¹⁹⁶ (customized)
- Zope⁴¹⁹⁷ (customized)

15.3 Documentation using the sphinxdoc theme

- ABRT⁴¹⁹⁸
- cartopy⁴¹⁹⁹
- Jython⁴²⁰⁰
- LLVM⁴²⁰¹
- PyCantonese⁴²⁰²
- Pyre⁴²⁰³
- pySPACE⁴²⁰⁴
- Pysparse⁴²⁰⁵
- PyTango⁴²⁰⁶
- Python Wild Magic⁴²⁰⁷ (customized)
- RDKit⁴²⁰⁸
- Reteisi⁴²⁰⁹ (customized)
- Sqlkit⁴²¹⁰ (customized)

⁴¹⁹⁰ <https://turbogears.readthedocs.io/>

⁴¹⁹¹ <https://docs.enthought.com/mayavi/tvtk/>

⁴¹⁹² <https://www.varnish-cache.org/docs/>

⁴¹⁹³ <https://waf.io/apidocs/>

⁴¹⁹⁴ <https://wxpython.org/Phoenix/docs/html/main.html>

⁴¹⁹⁵ <https://www.ibiblio.org/paulcarduner/z3ctutorial/>

⁴¹⁹⁶ <https://pythonhosted.org/zc.async/>

⁴¹⁹⁷ <https://www.zope.dev/>

⁴¹⁹⁸ <https://abrt.readthedocs.io/>

⁴¹⁹⁹ <https://scitools.org.uk/cartopy/docs/latest/>

⁴²⁰⁰ <https://jython.readthedocs.io/>

⁴²⁰¹ <https://llvm.org/docs/>

⁴²⁰² <https://pycantonese.org/>

⁴²⁰³ <https://pyre.readthedocs.io/>

⁴²⁰⁴ <https://pyspace.github.io/pyspace/>

⁴²⁰⁵ <https://pysparse.sourceforge.net/>

⁴²⁰⁶ <https://pytango.readthedocs.io>

⁴²⁰⁷ <https://vmlaker.github.io/pythonwildmagic/>

⁴²⁰⁸ <https://www.rdkit.org/docs/>

⁴²⁰⁹ <https://www.reteisi.org/contents.html>

⁴²¹⁰ <https://sqlkit.argolinux.org/>

- Turbulenz⁴²¹¹

15.4 Documentation using the nature theme

- Alembic⁴²¹²
- Cython⁴²¹³
- easybuild⁴²¹⁴
- libLAS⁴²¹⁵ (customized)
- Lmod⁴²¹⁶
- MapServer⁴²¹⁷ (customized)
- PyWavelets⁴²¹⁸
- Setuptools⁴²¹⁹
- Spring Python⁴²²⁰
- StatsModels⁴²²¹ (customized)
- Sylli⁴²²²

15.5 Documentation using another builtin theme

- Breathe⁴²²³ (haiku)
- Breezy (fork of Bazaar)⁴²²⁴ (agogo)
- MPipe⁴²²⁵ (sphinx13)
- NLTK⁴²²⁶ (agogo)
- PyPubSub⁴²²⁷ (bizstyle)
- Pylons⁴²²⁸ (pyramid)
- Pyramid web framework⁴²²⁹ (pyramid)

⁴²¹¹ <http://docs.turbulenz.com/>

⁴²¹² <https://alembic.sqlalchemy.org/>

⁴²¹³ <https://docs.cython.org/>

⁴²¹⁴ <https://easybuild.readthedocs.io/>

⁴²¹⁵ <https://liblas.org/>

⁴²¹⁶ <https://lmod.readthedocs.io/>

⁴²¹⁷ <https://mapserver.org/>

⁴²¹⁸ <https://pywavelets.readthedocs.io/>

⁴²¹⁹ <https://setuptools.readthedocs.io/>

⁴²²⁰ <https://docs.spring.io/spring-python/1.2.x/sphinx/html/>

⁴²²¹ <https://www.statsmodels.org/>

⁴²²² <https://sylli.sourceforge.net/>

⁴²²³ <https://breathe.readthedocs.io/>

⁴²²⁴ <https://www.breezy-vcs.org/doc/en/>

⁴²²⁵ <https://vmlaker.github.io/mpipe/>

⁴²²⁶ <https://www.nltk.org/>

⁴²²⁷ <https://pypubsub.readthedocs.io/>

⁴²²⁸ <https://docs.pylonsproject.org/projects/pylons-webframework/>

⁴²²⁹ <https://docs.pylonsproject.org/projects/pyramid/>

- RxDock⁴²³⁰ (bizstyle)
- Sphinx⁴²³¹ (sphinx13) :-)
- Valence⁴²³² (haiku, customized)

15.6 Documentation using sphinx_rtd_theme

- Aesara (fork of Theano)⁴²³³
- Annotator⁴²³⁴
- Ansible⁴²³⁵ (customized)
- Arcade⁴²³⁶
- aria2⁴²³⁷
- ASE⁴²³⁸
- asvin⁴²³⁹
- Autofac⁴²⁴⁰
- BigchainDB⁴²⁴¹
- Blender Reference Manual⁴²⁴²
- Blocks⁴²⁴³
- bootstrap-datepicker⁴²⁴⁴
- Certbot⁴²⁴⁵
- CKAN⁴²⁴⁶
- Copr Buildsystem⁴²⁴⁷ (customized)
- Coreboot⁴²⁴⁸
- Chainer⁴²⁴⁹ (customized)
- citeproc-js⁴²⁵⁰

⁴²³⁰ <https://rxdock.gitlab.io/documentation/devel/html/>

⁴²³¹ <https://www.sphinx-doc.org/>

⁴²³² <https://docs.valence.desire2learn.com/>

⁴²³³ <https://aesara.readthedocs.io/>

⁴²³⁴ <https://docs.annotatorjs.org/>

⁴²³⁵ <https://docs.ansible.com/>

⁴²³⁶ <https://arcade.academy/>

⁴²³⁷ <https://aria2.github.io/manual/en/html/>

⁴²³⁸ <https://wiki.fysik.dtu.dk/ase/>

⁴²³⁹ <https://asvin.readthedocs.io/>

⁴²⁴⁰ <https://docs.autofac.org/>

⁴²⁴¹ <https://docs.bigchaindb.com/>

⁴²⁴² <https://docs.blender.org/manual/>

⁴²⁴³ <https://blocks.readthedocs.io/>

⁴²⁴⁴ <https://bootstrap-datepicker.readthedocs.io/>

⁴²⁴⁵ <https://certbot.eff.org/docs/>

⁴²⁴⁶ <https://docs.ckan.org/>

⁴²⁴⁷ <https://docs.pagure.org/copr.copr/>

⁴²⁴⁸ <https://doc.coreboot.org/>

⁴²⁴⁹ <https://docs.chainer.org/>

⁴²⁵⁰ <https://citeproc-js.readthedocs.io/>

- [cloud-init](#)⁴²⁵¹
- [CodeIgniter](#)⁴²⁵²
- [Conda](#)⁴²⁵³
- [Corda](#)⁴²⁵⁴
- [Dask](#)⁴²⁵⁵
- [Databricks](#)⁴²⁵⁶ (customized)
- [Dataiku DSS](#)⁴²⁵⁷
- [DNF](#)⁴²⁵⁸
- [Distro Tracker](#)⁴²⁵⁹
- [Django-cas-ng](#)⁴²⁶⁰
- [dj-stripe](#)⁴²⁶¹
- [edX](#)⁴²⁶²
- [Electrum](#)⁴²⁶³
- [ESWP3](#)⁴²⁶⁴
- [Ethereum Homestead](#)⁴²⁶⁵
- [Exhale](#)⁴²⁶⁶
- [Faker](#)⁴²⁶⁷
- [Fidimag](#)⁴²⁶⁸
- [Flake8](#)⁴²⁶⁹
- [Flatpak](#)⁴²⁷⁰
- [FluidDyn](#)⁴²⁷¹
- [Fluidsim](#)⁴²⁷²
- [Gallium](#)⁴²⁷³

⁴²⁵¹ <https://cloudinit.readthedocs.io/>

⁴²⁵² https://www.codeigniter.com/user_guide/

⁴²⁵³ <https://conda.io/docs/>

⁴²⁵⁴ <https://docs.corda.net/>

⁴²⁵⁵ <https://dask.pydata.org/>

⁴²⁵⁶ <https://docs.databricks.com/>

⁴²⁵⁷ <https://doc.dataiku.com/>

⁴²⁵⁸ <https://dnf.readthedocs.io/>

⁴²⁵⁹ <https://qa.pages.debian.net/distro-tracker/>

⁴²⁶⁰ <https://djangocas.dev/docs/>

⁴²⁶¹ <https://dj-stripe.readthedocs.io/>

⁴²⁶² <https://docs.edx.org/>

⁴²⁶³ <https://docs.electrum.org/>

⁴²⁶⁴ <https://eswp3.readthedocs.io/>

⁴²⁶⁵ <https://www.ethdocs.org/>

⁴²⁶⁶ <https://exhale.readthedocs.io/>

⁴²⁶⁷ <https://faker.readthedocs.io/>

⁴²⁶⁸ <https://fidimag.readthedocs.io/>

⁴²⁶⁹ <https://flake8.pycqa.org/>

⁴²⁷⁰ <https://docs.flatpak.org/>

⁴²⁷¹ <https://fluiddyn.readthedocs.io/>

⁴²⁷² <https://fluidsim.readthedocs.io/>

⁴²⁷³ <https://gallium.readthedocs.io/>

- [GeoNode](#)⁴²⁷⁴
- [Glances](#)⁴²⁷⁵
- [Godot](#)⁴²⁷⁶
- [Graylog](#)⁴²⁷⁷
- [GPAW](#)⁴²⁷⁸ (customized)
- [HDF5 for Python \(h5py\)](#)⁴²⁷⁹
- [HyperKitty](#)⁴²⁸⁰
- [Hyperledger Fabric](#)⁴²⁸¹
- [IdentityServer](#)⁴²⁸²
- [Idris](#)⁴²⁸³
- [Inkscape](#)⁴²⁸⁴ (customized)
- [jvasphinx](#)⁴²⁸⁵
- [Jupyter Notebook](#)⁴²⁸⁶
- [Kanboard](#)⁴²⁸⁷
- [Lasagne](#)⁴²⁸⁸
- [latexindent.pl](#)⁴²⁸⁹
- [Learning Apache Spark with Python](#)⁴²⁹⁰
- [LibCEED](#)⁴²⁹¹
- [Linguistica](#)⁴²⁹²
- [Mailman](#)⁴²⁹³
- [MathJax](#)⁴²⁹⁴
- [MDTraj](#)⁴²⁹⁵ (customized)
- [Mesa 3D](#)⁴²⁹⁶

⁴²⁷⁴ <https://docs.geonode.org/>

⁴²⁷⁵ <https://glances.readthedocs.io/>

⁴²⁷⁶ <https://godot.readthedocs.io/>

⁴²⁷⁷ <https://docs.graylog.org/>

⁴²⁷⁸ <https://wiki.fysik.dtu.dk/gpaw/>

⁴²⁷⁹ <https://docs.h5py.org/>

⁴²⁸⁰ <https://hyperkitty.readthedocs.io/>

⁴²⁸¹ <https://hyperledger-fabric.readthedocs.io/>

⁴²⁸² <https://docs.identityserver.io/>

⁴²⁸³ <https://docs.idris-lang.org/>

⁴²⁸⁴ <https://inkscape-manuals.readthedocs.io/>

⁴²⁸⁵ <https://bronto-jvasphinx.readthedocs.io/>

⁴²⁸⁶ <https://jupyter-notebook.readthedocs.io/>

⁴²⁸⁷ <https://docs.kanboard.org/>

⁴²⁸⁸ <https://lasagne.readthedocs.io/>

⁴²⁸⁹ <https://latexindentpl.readthedocs.io/>

⁴²⁹⁰ <https://runawayhorse001.github.io/LearningApacheSpark>

⁴²⁹¹ <https://libceed.readthedocs.io/>

⁴²⁹² <https://linguistica-uchicago.github.io/lxa5/>

⁴²⁹³ <https://docs.list.org/>

⁴²⁹⁴ <https://docs.mathjax.org/>

⁴²⁹⁵ <https://mdtraj.org/>

⁴²⁹⁶ <https://docs.mesa3d.org/>

- [micca - MICrobial Community Analysis](#)⁴²⁹⁷
- [MicroPython](#)⁴²⁹⁸
- [Mink](#)⁴²⁹⁹
- [Mockery](#)⁴³⁰⁰
- [mod_wsgi](#)⁴³⁰¹
- [MoinMoin](#)⁴³⁰²
- [Mopidy](#)⁴³⁰³
- [mpi4py](#)⁴³⁰⁴
- [MyHDL](#)⁴³⁰⁵
- [Mypy](#)⁴³⁰⁶
- [Netgate Docs](#)⁴³⁰⁷
- [Nextcloud Server](#)⁴³⁰⁸
- [Nextflow](#)⁴³⁰⁹
- [nghttp2](#)⁴³¹⁰
- [NICOS](#)⁴³¹¹ (customized)
- [OpenFAST](#)⁴³¹²
- [Panda3D](#)⁴³¹³ (customized)
- [Pelican](#)⁴³¹⁴
- [picamera](#)⁴³¹⁵
- [Pillow](#)⁴³¹⁶
- [pip](#)⁴³¹⁷
- [Paver](#)⁴³¹⁸
- [peewee](#)⁴³¹⁹

⁴²⁹⁷ <https://micca.readthedocs.io/>

⁴²⁹⁸ <https://docs.micropython.org/>

⁴²⁹⁹ <https://mink.behat.org/>

⁴³⁰⁰ <https://docs.mockery.io/>

⁴³⁰¹ <https://modwsgi.readthedocs.io/>

⁴³⁰² <https://moin-20.readthedocs.io/>

⁴³⁰³ <https://docs.mopidy.com/>

⁴³⁰⁴ <https://mpi4py.readthedocs.io/>

⁴³⁰⁵ <https://docs.myhdl.org/>

⁴³⁰⁶ <https://mypy.readthedocs.io/>

⁴³⁰⁷ <https://docs.netgate.com/>

⁴³⁰⁸ <https://docs.nextcloud.com/#server>

⁴³⁰⁹ <https://www.nextflow.io/docs/latest/index.html>

⁴³¹⁰ <https://nghttp2.org/documentation/>

⁴³¹¹ <https://forge.frm2.tum.de/nicos/doc/nicos-master/>

⁴³¹² <https://openfast.readthedocs.io/>

⁴³¹³ <https://docs.panda3d.org/>

⁴³¹⁴ <https://docs.getpelican.com/>

⁴³¹⁵ <https://picamera.readthedocs.io/>

⁴³¹⁶ <https://pillow.readthedocs.io/>

⁴³¹⁷ <https://pip.pypa.io/>

⁴³¹⁸ <https://paver.readthedocs.io/>

⁴³¹⁹ <https://docs.peewee-orm.com/>

- Phinx⁴³²⁰
- phpMyAdmin⁴³²¹
- PHPUnit⁴³²²
- PHPWord⁴³²³
- PROS⁴³²⁴ (customized)
- Pweave⁴³²⁵
- pyca/cryptography⁴³²⁶
- pyglet⁴³²⁷
- PyNaCl⁴³²⁸
- pyOpenSSL⁴³²⁹
- PyPy⁴³³⁰
- python-sqlparse⁴³³¹
- PyVISA⁴³³²
- Read The Docs⁴³³³
- RenderDoc⁴³³⁴
- ROCm Platform⁴³³⁵
- Free your information from their silos (French)⁴³³⁶ (customized)
- Releases Sphinx extension⁴³³⁷
- Qtile⁴³³⁸
- Quex⁴³³⁹
- QuTiP⁴³⁴⁰
- Sawtooth⁴³⁴¹
- Scapy⁴³⁴²

⁴³²⁰ <https://docs.phinx.org/>

⁴³²¹ <https://docs.phpmyadmin.net/>

⁴³²² <https://phpunit.readthedocs.io/>

⁴³²³ <https://phpword.readthedocs.io/>

⁴³²⁴ <https://pros.cs.purdue.edu/v5/>

⁴³²⁵ <https://mpastell.com/pweave/>

⁴³²⁶ <https://cryptography.io/>

⁴³²⁷ <https://pyglet.readthedocs.io/>

⁴³²⁸ <https://pynacl.readthedocs.io/>

⁴³²⁹ <https://www.pyopenssl.org/>

⁴³³⁰ <https://doc.pypy.org/>

⁴³³¹ <https://sqlparse.readthedocs.io/>

⁴³³² <https://pyvisa.readthedocs.io/>

⁴³³³ <https://docs.readthedocs.io/>

⁴³³⁴ <https://renderdoc.org/docs/>

⁴³³⁵ <https://rocmdocs.amd.com/>

⁴³³⁶ <https://redaction-technique.org/>

⁴³³⁷ <https://releases.readthedocs.io/>

⁴³³⁸ <https://docs.qtile.org/>

⁴³³⁹ <https://quex.sourceforge.net/doc/html/main.html>

⁴³⁴⁰ <https://qutip.org/docs/latest/>

⁴³⁴¹ <https://sawtooth.splinter.dev/docs>

⁴³⁴² <https://scapy.readthedocs.io/>

- [SimGrid](#)⁴³⁴³
- [SimPy](#)⁴³⁴⁴
- [six](#)⁴³⁴⁵
- [Solidity](#)⁴³⁴⁶
- [Sonos Controller \(SoCo\)](#)⁴³⁴⁷
- [Sphinx AutoAPI](#)⁴³⁴⁸
- [sphinx-argparse](#)⁴³⁴⁹
- [sphinx-tabs](#)⁴³⁵⁰
- [Sphinx-Gallery](#)⁴³⁵¹ (customized)
- [Sphinx with Github Webpages](#)⁴³⁵²
- [SpotBugs](#)⁴³⁵³
- [StarUML](#)⁴³⁵⁴
- [Sublime Text Unofficial Documentation](#)⁴³⁵⁵
- [SunPy](#)⁴³⁵⁶
- [Sylus](#)⁴³⁵⁷
- [Syncthing](#)⁴³⁵⁸
- [Tango Controls](#)⁴³⁵⁹ (customized)
- [ThreatConnect](#)⁴³⁶⁰
- [TrueNAS](#)⁴³⁶¹ (customized)
- [Tuleap](#)⁴³⁶²
- [TYPO3](#)⁴³⁶³ (customized)
- [Veyon](#)⁴³⁶⁴
- [Ubiquity](#)⁴³⁶⁵

⁴³⁴³ <https://simgrid.org/doc/latest/>

⁴³⁴⁴ <https://simpy.readthedocs.io/>

⁴³⁴⁵ <https://six.readthedocs.io/>

⁴³⁴⁶ <https://solidity.readthedocs.io/>

⁴³⁴⁷ <https://docs.python-soco.com/>

⁴³⁴⁸ <https://sphinx-autoapi.readthedocs.io/>

⁴³⁴⁹ <https://sphinx-argparse.readthedocs.io/>

⁴³⁵⁰ <https://sphinx-tabs.readthedocs.io/>

⁴³⁵¹ <https://sphinx-gallery.readthedocs.io/>

⁴³⁵² <https://runawayhorse001.github.io/SphinxGithub>

⁴³⁵³ <https://spotbugs.readthedocs.io/>

⁴³⁵⁴ <https://docs.staruml.io/>

⁴³⁵⁵ <https://docs.sublimetext.info/>

⁴³⁵⁶ <https://docs.sunpy.org/>

⁴³⁵⁷ <https://docs.sylus.com/>

⁴³⁵⁸ <https://docs.syncthing.net/>

⁴³⁵⁹ <https://tango-controls.readthedocs.io/>

⁴³⁶⁰ <https://docs.threatconnect.com/>

⁴³⁶¹ <https://www.ixsystems.com/documentation/truenas/>

⁴³⁶² <https://tuleap.net/doc/en/>

⁴³⁶³ <https://docs.typo3.org/>

⁴³⁶⁴ <https://docs.veyon.io/>

⁴³⁶⁵ <https://micro-framework.readthedocs.io/>

- [uWSGI](#)⁴³⁶⁶
- [virtualenv](#)⁴³⁶⁷
- [Wagtail](#)⁴³⁶⁸
- [Web Application Attack and Audit Framework \(w3af\)](#)⁴³⁶⁹
- [Weblate](#)⁴³⁷⁰
- [x265](#)⁴³⁷¹
- [Zeek](#)⁴³⁷²
- [Zulip](#)⁴³⁷³

15.7 Documentation using sphinx_bootstrap_theme

- [Bootstrap Theme](#)⁴³⁷⁴
- [C/C++ Software Development with Eclipse](#)⁴³⁷⁵
- [Dataverse](#)⁴³⁷⁶
- [e-cidadania](#)⁴³⁷⁷
- [Hangfire](#)⁴³⁷⁸
- [Hedge](#)⁴³⁷⁹
- [ObsPy](#)⁴³⁸⁰
- [OPNFV](#)⁴³⁸¹
- [Pootle](#)⁴³⁸²
- [PyUblas](#)⁴³⁸³
- [seaborn](#)⁴³⁸⁴

⁴³⁶⁶ <https://uwsgi-docs.readthedocs.io/>

⁴³⁶⁷ <https://virtualenv.readthedocs.io/>

⁴³⁶⁸ <https://docs.wagtail.io/>

⁴³⁶⁹ <https://docs.w3af.org/>

⁴³⁷⁰ <https://docs.weblate.org/>

⁴³⁷¹ <https://x265.readthedocs.io/>

⁴³⁷² <https://docs.zeek.org/>

⁴³⁷³ <https://zulip.readthedocs.io/>

⁴³⁷⁴ <https://ryan-roemer.github.io/sphinx-bootstrap-theme/>

⁴³⁷⁵ <https://eclipsebook.in/>

⁴³⁷⁶ <https://guides.dataverse.org/>

⁴³⁷⁷ <https://e-cidadania.readthedocs.io/>

⁴³⁷⁸ <https://docs.hangfire.io/>

⁴³⁷⁹ <https://document.tician.de/hedge/>

⁴³⁸⁰ <https://docs.obspy.org/>

⁴³⁸¹ <https://docs.opnfv.org/>

⁴³⁸² <https://docs.translatehouse.org/projects/pootle/>

⁴³⁸³ <https://document.tician.de/pyublas/>

⁴³⁸⁴ <https://seaborn.pydata.org/>

15.8 Documentation using pydata_sphinx_theme

- Arviz⁴³⁸⁵
- Binder⁴³⁸⁶
- Bokeh⁴³⁸⁷
- CuPy⁴³⁸⁸
- EnOSlib⁴³⁸⁹
- Fairlearn⁴³⁹⁰
- Feature-engine⁴³⁹¹
- Jupyter⁴³⁹²
- Jupyter Book⁴³⁹³
- Matplotlib⁴³⁹⁴
- MegEngine⁴³⁹⁵
- MNE-Python⁴³⁹⁶
- NetworkX⁴³⁹⁷
- Numpy⁴³⁹⁸
- Pandas⁴³⁹⁹
- Pystra (continuation of PyRe)⁴⁴⁰⁰
- PyVista⁴⁴⁰¹
- SciPy⁴⁴⁰²
- SEPAL⁴⁴⁰³

⁴³⁸⁵ <https://python.arviz.org/en/stable/>

⁴³⁸⁶ <https://mybinder.readthedocs.io/en/latest/>

⁴³⁸⁷ <https://docs.bokeh.org/en/latest/>

⁴³⁸⁸ <https://docs.cupy.dev/en/stable/>

⁴³⁸⁹ <https://discovery.gitlabpages.inria.fr/enoslib/>

⁴³⁹⁰ <https://fairlearn.org/main/>

⁴³⁹¹ <https://feature-engine.readthedocs.io/en/latest/>

⁴³⁹² <https://docs.jupyter.org/en/latest/>

⁴³⁹³ <https://jupyterbook.org/en/stable/intro.html>

⁴³⁹⁴ <https://matplotlib.org/stable/index.html>

⁴³⁹⁵ <https://megengine.org.cn/doc/stable/en/>

⁴³⁹⁶ <https://mne.tools/stable/>

⁴³⁹⁷ <https://networkx.org/documentation/stable/>

⁴³⁹⁸ <https://numpy.org/doc/stable/>

⁴³⁹⁹ <https://pandas.pydata.org/docs/>

⁴⁴⁰⁰ <https://pystra.github.io/pystra/>

⁴⁴⁰¹ <https://docs.pyvista.org/>

⁴⁴⁰² <https://docs.scipy.org/doc/scipy/>

⁴⁴⁰³ <https://docs.sepal.io/en/latest/index.html>

15.9 Documentation using a custom theme or integrated in a website

- AIOHTTP⁴⁴⁰⁴
- Apache Cassandra⁴⁴⁰⁵
- Astropy⁴⁴⁰⁶
- Boto 3⁴⁴⁰⁷
- CakePHP⁴⁴⁰⁸
- Ceph⁴⁴⁰⁹
- Chef⁴⁴¹⁰
- CKAN⁴⁴¹¹
- Confluent Platform⁴⁴¹²
- Django⁴⁴¹³
- django CMS⁴⁴¹⁴
- Doctrine⁴⁴¹⁵
- Enterprise Toolkit for Acrobat products⁴⁴¹⁶
- FreeFEM⁴⁴¹⁷
- fmt⁴⁴¹⁸
- Gameduino⁴⁴¹⁹
- gensim⁴⁴²⁰
- GeoServer⁴⁴²¹
- gevent⁴⁴²²
- GHC - Glasgow Haskell Compiler⁴⁴²³
- Guzzle⁴⁴²⁴
- H2O.ai⁴⁴²⁵

⁴⁴⁰⁴ <https://docs.aiohttp.org/>

⁴⁴⁰⁵ <https://cassandra.apache.org/doc/>

⁴⁴⁰⁶ <https://docs.astropy.org/>

⁴⁴⁰⁷ <https://boto3.readthedocs.io/>

⁴⁴⁰⁸ <https://book.cakephp.org/>

⁴⁴⁰⁹ <https://docs.ceph.com/docs/master/>

⁴⁴¹⁰ <https://docs.chef.io/>

⁴⁴¹¹ <https://docs.ckan.org/>

⁴⁴¹² <https://docs.confluent.io/>

⁴⁴¹³ <https://docs.djangoproject.com/>

⁴⁴¹⁴ <https://docs.django-cms.org/>

⁴⁴¹⁵ <https://www.doctrine-project.org/>

⁴⁴¹⁶ <https://www.adobe.com/devnet-docs/acrobatetk/>

⁴⁴¹⁷ <https://doc.freefem.org/introduction/>

⁴⁴¹⁸ <https://fmt.dev/>

⁴⁴¹⁹ <https://excamera.com/sphinx/gameduino/>

⁴⁴²⁰ <https://radimrehurek.com/gensim/>

⁴⁴²¹ <https://docs.geoserver.org/>

⁴⁴²² <https://www.gevent.org/>

⁴⁴²³ <https://downloads.haskell.org/~ghc/master/users-guide/>

⁴⁴²⁴ <https://docs.guzzlephp.org/>

⁴⁴²⁵ <https://docs.h2o.ai/>

- Heka⁴⁴²⁶
- Istihza (Turkish Python documentation project)⁴⁴²⁷
- JupyterHub⁴⁴²⁸
- Kombu⁴⁴²⁹
- Lasso⁴⁴³⁰
- Mako⁴⁴³¹
- MirrorBrain⁴⁴³²
- Mitiq⁴⁴³³
- MongoDB⁴⁴³⁴
- Music21⁴⁴³⁵
- MyHDL⁴⁴³⁶
- ndnSIM⁴⁴³⁷
- nose⁴⁴³⁸
- ns-3⁴⁴³⁹
- ObjectListView⁴⁴⁴⁰
- OpenERP⁴⁴⁴¹
- OpenCV⁴⁴⁴²
- Open Dylan⁴⁴⁴³
- OpenTURNS⁴⁴⁴⁴
- Open vSwitch⁴⁴⁴⁵
- PlatformIO⁴⁴⁴⁶
- Psycopg⁴⁴⁴⁷
- PyEphem⁴⁴⁴⁸

⁴⁴²⁶ <https://hekad.readthedocs.io/>

⁴⁴²⁷ <https://python-istihza.yazbel.com/>

⁴⁴²⁸ <https://jupyterhub.readthedocs.io/>

⁴⁴²⁹ <https://kombu.readthedocs.io/>

⁴⁴³⁰ <http://www.lassoguide.com/>

⁴⁴³¹ <https://docs.makotemplates.org/>

⁴⁴³² <https://mirrorbrain-docs.readthedocs.io/>

⁴⁴³³ <https://mitiq.readthedocs.io/>

⁴⁴³⁴ <https://docs.mongodb.com/>

⁴⁴³⁵ <https://web.mit.edu/music21/doc/>

⁴⁴³⁶ <https://docs.myhdl.org/>

⁴⁴³⁷ <https://ndnsim.net/current/>

⁴⁴³⁸ <https://nose.readthedocs.io/>

⁴⁴³⁹ <https://www.nsnam.org/documentation/>

⁴⁴⁴⁰ <https://objectlistview.sourceforge.net/python/>

⁴⁴⁴¹ <https://doc.odoo.com/>

⁴⁴⁴² <https://docs.opencv.org/>

⁴⁴⁴³ <https://opendylan.org/>

⁴⁴⁴⁴ <https://openturns.github.io/openturns/latest/>

⁴⁴⁴⁵ <https://docs.openvswitch.org/>

⁴⁴⁴⁶ <https://docs.platformio.org/>

⁴⁴⁴⁷ <https://www.psycopg.org/docs/>

⁴⁴⁴⁸ <https://rhodesmill.org/pyephem/>

- [Pygments](#)⁴⁴⁴⁹
- [Plone User Manual \(German\)](#)⁴⁴⁵⁰
- [PSI4](#)⁴⁴⁵¹
- [PyMOTW](#)⁴⁴⁵²
- [python-aspectlib](#)⁴⁴⁵³ ([sphinx_py3doc_enhanced_theme](#)⁴⁴⁵⁴)
- [QGIS](#)⁴⁴⁵⁵
- [Roundup](#)⁴⁴⁵⁶
- [SaltStack](#)⁴⁴⁵⁷
- [scikit-learn](#)⁴⁴⁵⁸
- [Scrapy](#)⁴⁴⁵⁹
- [Seaborn](#)⁴⁴⁶⁰
- [Selenium](#)⁴⁴⁶¹
- [Self](#)⁴⁴⁶²
- [Substance D](#)⁴⁴⁶³
- [Sulu](#)⁴⁴⁶⁴
- [SQLAlchemy](#)⁴⁴⁶⁵
- [tinyTiM](#)⁴⁴⁶⁶
- [Twisted](#)⁴⁴⁶⁷
- [Ubuntu Packaging Guide](#)⁴⁴⁶⁸
- [WTForms](#)⁴⁴⁶⁹

⁴⁴⁴⁹ <https://pygments.org/docs/>

⁴⁴⁵⁰ <https://www.hasecke.com/plone-benutzerhandbuch/4.0/>

⁴⁴⁵¹ <https://www.psicode.org/psi4manual/master/index.html>

⁴⁴⁵² <https://pymotw.com/2/>

⁴⁴⁵³ <https://python-aspectlib.readthedocs.io/>

⁴⁴⁵⁴ https://pypi.org/project/sphinx_py3doc_enhanced_theme/

⁴⁴⁵⁵ <https://qgis.org/en/docs/index.html>

⁴⁴⁵⁶ <https://www.roundup-tracker.org/>

⁴⁴⁵⁷ <https://docs.saltstack.com/>

⁴⁴⁵⁸ <https://scikit-learn.org/stable/>

⁴⁴⁵⁹ <https://doc.scrapy.org/>

⁴⁴⁶⁰ <https://seaborn.pydata.org/>

⁴⁴⁶¹ <https://docs.seleniumhq.org/docs/>

⁴⁴⁶² <https://www.selflanguage.org/>

⁴⁴⁶³ <https://docs.pylonsproject.org/projects/substanced/>

⁴⁴⁶⁴ <https://docs.sulu.io/>

⁴⁴⁶⁵ <https://docs.sqlalchemy.org/>

⁴⁴⁶⁶ <https://tinytim.sourceforge.net/docs/2.0/>

⁴⁴⁶⁷ <https://twistedmatrix.com/documents/current/>

⁴⁴⁶⁸ <https://packaging.ubuntu.com/html/>

⁴⁴⁶⁹ <https://wtforms.readthedocs.io/>

15.10 Homepages and other non-documentation sites

- Alan Crosswell’s Using the Django REST Framework and DRF-JSONAPI⁴⁴⁷⁰
- Arizona State University PHY494/PHY598/CHM598 Simulation approaches to Bio-and Nanophysics⁴⁴⁷¹ (classic)
- Benoit Boissinot⁴⁴⁷² (classic, customized)
- EBI Cloud Consultancy Team⁴⁴⁷³ (sphinx_rtd_theme)
- Eric Holscher⁴⁴⁷⁴ (alabaster)
- Florian Diesch⁴⁴⁷⁵
- Institute for the Design of Advanced Energy Systems (IDAES)⁴⁴⁷⁶ (sphinx_rtd_theme)
- IDAES Examples⁴⁴⁷⁷ (sphinx_rtd_theme)
- Lei Ma’s Statistical Mechanics lecture notes⁴⁴⁷⁸ (sphinx_bootstrap_theme)
- PyXLL⁴⁴⁷⁹ (sphinx_bootstrap_theme, customized)
- SciPy Cookbook⁴⁴⁸⁰ (sphinx_rtd_theme)
- Tech writer at work blog⁴⁴⁸¹ (custom theme)
- UC Berkeley ME233 Advanced Control Systems II course⁴⁴⁸² (sphinxdoc)
- Željko Svedružić’s Biomolecular Structure and Function Laboratory (BioSFLab)⁴⁴⁸³ (sphinx_bootstrap_theme)

15.11 Books produced using Sphinx

- “The Art of Community” (Japanese translation)⁴⁴⁸⁴
- “Die Wahrheit des Sehens. Der DEKALOG von Krzysztof Kieślowski”⁴⁴⁸⁵
- “Expert Python Programming”⁴⁴⁸⁶
- “Expert Python Programming” (Japanese translation)⁴⁴⁸⁷
- “Expert Python Programming 2nd Edition” (Japanese translation)⁴⁴⁸⁸
- “The Hitchhiker’s Guide to Python”⁴⁴⁸⁹

⁴⁴⁷⁰ <https://www.columbia.edu/~alan/django-jsonapi-training/>

⁴⁴⁷¹ <https://becksteinlab.physics.asu.edu/pages/courses/2013/SimBioNano/>

⁴⁴⁷² <https://bboissin.appspot.com/>

⁴⁴⁷³ <https://tsi-cdoc.readthedocs.io/>

⁴⁴⁷⁴ <https://ericholscher.com/>

⁴⁴⁷⁵ <https://www.florian-diesch.de/>

⁴⁴⁷⁶ <https://idaes-pse.readthedocs.io/>

⁴⁴⁷⁷ <https://idaes.github.io/examples-pse/>

⁴⁴⁷⁸ <https://statisticalphysics.leima.is/>

⁴⁴⁷⁹ <https://www.pyxll.com/>

⁴⁴⁸⁰ <https://scipy-cookbook.readthedocs.io/>

⁴⁴⁸¹ <https://documatt.com/blog/>

⁴⁴⁸² <https://berkeley-me233.github.io/>

⁴⁴⁸³ <https://svedruziclab.github.io/>

⁴⁴⁸⁴ <https://www.oreilly.co.jp/books/9784873114958/>

⁴⁴⁸⁵ <https://literatur.hasecke.com/post/die-wahrheit-des-sehens-dekalog-kieslowski/>

⁴⁴⁸⁶ <https://www.packtpub.com/application-development/expert-python-programming>

⁴⁴⁸⁷ <https://www.amazon.co.jp/dp/4048686291/>

⁴⁴⁸⁸ <https://www.amazon.co.jp/dp/4048930613/>

⁴⁴⁸⁹ <https://docs.python-guide.org/>

- “LassoGuide”⁴⁴⁹⁰
- “Learning Sphinx” (in Japanese)⁴⁴⁹¹
- “Learning System Programming with Go (Japanese)”⁴⁴⁹²
- “Mercurial: the definitive guide (Second edition)”⁴⁴⁹³
- “Mithril – The fastest clientside MVC (Japanese)”⁴⁴⁹⁴
- “Pioneers and Prominent Men of Utah”
- “Pomodoro Technique Illustrated” (Japanese translation)⁴⁴⁹⁵
- “Professional Software Development”⁴⁴⁹⁶
- “Python Professional Programming” (in Japanese)⁴⁴⁹⁷
- “Python Professional Programming 2nd Edition” (in Japanese)⁴⁴⁹⁸
- “Python Professional Programming 3rd Edition” (in Japanese)⁴⁴⁹⁹
- Python Course by Yuri Petrov (Russian)⁴⁵⁰⁰
- “Real World HTTP – Learning The Internet and Web Technology via its history and code (Japanese)”⁴⁵⁰¹
- “Redmine Primer 5th Edition (in Japanese)”⁴⁵⁰²
- “The repoze.bfg Web Application Framework”⁴⁵⁰³
- “The Self-Taught Programmer” (Japanese translation)⁴⁵⁰⁴
- “Simple and Steady Way of Learning for Software Engineering” (in Japanese)⁴⁵⁰⁵
- “Software-Dokumentation mit Sphinx”⁴⁵⁰⁶
- “Theoretical Physics Reference”⁴⁵⁰⁷
- “The Varnish Book”⁴⁵⁰⁸

⁴⁴⁹⁰ <http://www.lassoguide.com/>

⁴⁴⁹¹ <https://www.oreilly.co.jp/books/9784873116488/>

⁴⁴⁹² <https://www.lambdanote.com/products/go>

⁴⁴⁹³ <https://book.mercurial-scm.org/>

⁴⁴⁹⁴ <https://www.oreilly.co.jp/books/9784873117447/>

⁴⁴⁹⁵ <https://www.amazon.co.jp/dp/4048689525/>

⁴⁴⁹⁶ https://mixmastamyk.bitbucket.io/pro_soft_dev/

⁴⁴⁹⁷ <https://www.amazon.co.jp/dp/4798032948/>

⁴⁴⁹⁸ <https://www.amazon.co.jp/dp/479804315X/>

⁴⁴⁹⁹ <https://www.amazon.co.jp/dp/4798053821/>

⁴⁵⁰⁰ <https://www.yuripetrov.ru/edu/python>

⁴⁵⁰¹ <https://www.oreilly.co.jp/books/9784873118048/>

⁴⁵⁰² <https://www.shuwasystem.co.jp/products/7980html/4825.html>

⁴⁵⁰³ <https://www.amazon.com/repoze-bfg-Web-Application-Framework-Version/dp/0615345379>

⁴⁵⁰⁴ <https://www.amazon.co.jp/dp/4822292274/>

⁴⁵⁰⁵ <https://www.amazon.co.jp/dp/477414259X/>

⁴⁵⁰⁶ <https://www.amazon.de/dp/1497448689/>

⁴⁵⁰⁷ <https://www.theoretical-physics.net/>

⁴⁵⁰⁸ <https://info.varnish-software.com/the-varnish-book>

15.12 Theses produced using Sphinx

- “Content Conditioning and Distribution for Dynamic Virtual Worlds”⁴⁵⁰⁹
- “The Sphinx Thesis Resource”⁴⁵¹⁰

15.13 Projects integrating Sphinx functionality

- [Read the Docs](#)⁴⁵¹¹, a software-as-a-service documentation hosting platform, uses Sphinx to automatically build documentation updates that are pushed to GitHub.
- [Spyder](#)⁴⁵¹², the Scientific Python Development Environment, uses Sphinx in its help pane to render rich documentation for functions, classes and methods automatically or on-demand.

⁴⁵⁰⁹ <https://www.cs.princeton.edu/research/techreps/TR-941-12>

⁴⁵¹⁰ <https://jterrace.github.io/sphinxtr/>

⁴⁵¹¹ <https://readthedocs.org/>

⁴⁵¹² <https://docs.spyder-ide.org/current/panes/help.html>

PYTHON MODULE INDEX

a

sphinx.addnodes, 351
sphinx.application, 314

b

sphinx.builders, 122
sphinx.builders.changes, 129
sphinx.builders.dirhtml, 123
sphinx.builders.dummy, 130
sphinx.builders.epub3, 125
sphinx.builders.gettext, 129
sphinx.builders.html, 123
sphinx.builders.latex, 125
sphinx.builders.linkcheck, 130
sphinx.builders.manpage, 127
sphinx.builders.singlehtml, 123
sphinx.builders.texinfo, 127
sphinx.builders.text, 127
sphinx.builders.xml, 130

c

conf, 73

d

docutils.parsers.rst, 340
sphinx.directives, 348
sphinx.domains, 342
sphinx.domains.python, 350

e

sphinx.environment, 335
sphinx.environment.collectors, 339
sphinx.errors, 334
sphinx.ext.autodoc, 166
sphinx.ext.autosectionlabel, 179
sphinx.ext.autosummary, 180
sphinx.ext.coverage, 184
sphinx.ext.doctest, 186
sphinx.ext.duration, 191
sphinx.ext.extlinks, 192
sphinx.ext.githubpages, 193
sphinx.ext.graphviz, 193

sphinx.ext.ifconfig, 196
sphinx.ext.imgconverter, 196
sphinx.ext.imgmath, 204
sphinx.ext.inheritance_diagram, 197
sphinx.ext.intersphinx, 200
sphinx.ext.jsmath, 207
sphinx.ext.linkcode, 203
sphinx.ext.mathbase, 204
sphinx.ext.mathjax, 206
sphinx.ext.napoleon, 208
sphinx.ext.todo, 218
sphinx.ext.viewcode, 218

l

latex, 285

p

sphinx.parsers, 351

s

sphinxcontrib.applehelp, 124
sphinxcontrib.devhelp, 125
sphinxcontrib.htmlhelp, 124
sphinxcontrib.qthelp, 124

Symbols

- `:abstractmethod:` (*directive option*)
 - `py:method` (*directive*), 159
 - `py:property` (*directive*), 158
- `:align:` (*directive option*)
 - `digraph` (*directive*), 195
 - `graph` (*directive*), 194
 - `graphviz` (*directive*), 193
- `:alt:` (*directive option*)
 - `digraph` (*directive*), 195
 - `graph` (*directive*), 194
 - `graphviz` (*directive*), 193
- `:async:` (*directive option*)
 - `py:function` (*directive*), 156
 - `py:method` (*directive*), 159
- `:canonical:` (*directive option*)
 - `py:attribute` (*directive*), 158
 - `py:class` (*directive*), 157
 - `py:data` (*directive*), 156
 - `py:function` (*directive*), 156
 - `py:method` (*directive*), 159
- `:caption:` (*directive option*)
 - `code-block` (*directive*), 56
 - `digraph` (*directive*), 195
 - `graph` (*directive*), 194
 - `graphviz` (*directive*), 193
- `:class:` (*directive option*)
 - `code-block` (*directive*), 57
 - `digraph` (*directive*), 195
 - `graph` (*directive*), 194
 - `graphviz` (*directive*), 194
- `:classmethod:` (*directive option*)
 - `py:method` (*directive*), 159
 - `py:property` (*directive*), 158
- `:dedent:` (*directive option*)
 - `code-block` (*directive*), 57
- `:deprecated:` (*directive option*)
 - `py:module` (*directive*), 155
- `:emphasize-lines:` (*directive option*)
 - `code-block` (*directive*), 56
- `:final:` (*directive option*)
 - `py:class` (*directive*), 157
 - `py:exception` (*directive*), 157
 - `py:method` (*directive*), 159
- `:force:` (*directive option*)
 - `code-block` (*directive*), 57
 - `highlight` (*directive*), 55
- `:layout:` (*directive option*)
 - `digraph` (*directive*), 195
 - `graph` (*directive*), 194
 - `graphviz` (*directive*), 193
- `:lineno-start:` (*directive option*)
 - `code-block` (*directive*), 56
- `:linenos:` (*directive option*)
 - `code-block` (*directive*), 56
- `:linenothreshold:` (*directive option*)
 - `highlight` (*directive*), 55
- `:maxdepth:` (*directive option*)
 - `c:alias` (*directive*), 139
 - `cpp:alias` (*directive*), 147
- `:members:` (*directive option*)
 - `automodule` (*directive*), 168
- `:name:` (*directive option*)
 - `code-block` (*directive*), 56
 - `digraph` (*directive*), 195
 - `graph` (*directive*), 194
 - `graphviz` (*directive*), 194
 - `index` (*directive*), 62
- `:noroot:` (*directive option*)
 - `c:alias` (*directive*), 139
 - `cpp:alias` (*directive*), 147
- `:platform:` (*directive option*)
 - `py:module` (*directive*), 155
- `:private-members:` (*directive option*)
 - `automodule` (*directive*), 168
- `:single-line-parameter-list:` (*directive option*)
 - `c:function` (*directive*), 137
 - `c:macro` (*directive*), 137
 - `cpp:function` (*directive*), 142
 - `js:class` (*directive*), 154
 - `js:function` (*directive*), 153
 - `js:method` (*directive*), 154
 - `py:class` (*directive*), 157
 - `py:decorator` (*directive*), 160
 - `py:exception` (*directive*), 157
 - `py:function` (*directive*), 156
 - `py:method` (*directive*), 159
- `:single-line-type-parameter-list:` (*directive option*)
 - `py:class` (*directive*), 158
 - `py:decorator` (*directive*), 160
 - `py:exception` (*directive*), 157
 - `py:function` (*directive*), 156
 - `py:method` (*directive*), 159
- `:special-members:` (*directive option*)
 - `automodule` (*directive*), 168
- `:staticmethod:` (*directive option*)
 - `py:method` (*directive*), 159
- `:synopsis:` (*directive option*)
 - `py:module` (*directive*), 155
- `:type:` (*directive option*)
 - `py:attribute` (*directive*), 158
 - `py:data` (*directive*), 156
 - `py:property` (*directive*), 158
 - `rst:directive:option` (*directive*), 165
- `:undoc-members:` (*directive option*)
 - `automodule` (*directive*), 168

`:value:` (*directive option*)
 `py:attribute` (*directive*), 158
 `py:data` (*directive*), 156
`_C()` (*in module sphinx.locale*), 359
`__C()` (*in module sphinx.locale*), 359
`_object_hierarchy_parts()` (*sphinx.directives.ObjectDescription method*), 348
`_toc_entry_name()` (*sphinx.directives.ObjectDescription method*), 348

`-A`
 `sphinx-apidoc` command line option, 412
 `sphinx-build` command line option, 408

`-C`
 `sphinx-build` command line option, 407

`-D`
 `sphinx-build` command line option, 407

`-E`
 `sphinx-apidoc` command line option, 411
 `sphinx-build` command line option, 407

`-F`
 `sphinx-apidoc` command line option, 411

`-H`
 `sphinx-apidoc` command line option, 412

`-M`
 `sphinx-apidoc` command line option, 412
 `sphinx-build` command line option, 406

`-N`
 `sphinx-build` command line option, 408

`-P`
 `sphinx-apidoc` command line option, 412
 `sphinx-build` command line option, 409

`-Q`
 `sphinx-build` command line option, 408

`-R`
 `sphinx-apidoc` command line option, 412

`-T`
 `sphinx-apidoc` command line option, 411
 `sphinx-build` command line option, 409

`-V`
 `sphinx-apidoc` command line option, 412

`-W`
 `sphinx-build` command line option, 408

`--author`
 `sphinx-quickstart` command line option, 404

`--batchfile`
 `sphinx-quickstart` command line option, 405

`--builder`
 `sphinx-build` command line option, 406

`--color`
 `sphinx-build` command line option, 408

`--config-dir`
 `sphinx-build` command line option, 407

`--define`
 `sphinx-build` command line option, 407

`--doctree-dir`
 `sphinx-build` command line option, 407

`--dot`
 `sphinx-quickstart` command line option, 403

`--dry-run`
 `sphinx-apidoc` command line option, 411

`--ext-autodoc`
 `sphinx-quickstart` command line option, 404

`--ext-coverage`
 `sphinx-quickstart` command line option, 404

`--ext-doctest`
 `sphinx-quickstart` command line option, 404

`--ext-githubpages`
 `sphinx-quickstart` command line option, 404

`--ext-ifconfig`
 `sphinx-quickstart` command line option, 404

`--ext-imgmath`
 `sphinx-quickstart` command line option, 404

`--ext-intersphinx`
 `sphinx-quickstart` command line option, 404

`--ext-mathjax`
 `sphinx-quickstart` command line option, 404

`--ext-todo`
 `sphinx-quickstart` command line option, 404

`--ext-viewcode`
 `sphinx-quickstart` command line option, 404

`--extensions`
 `sphinx-quickstart` command line option, 404

`--fail-on-warning`
 `sphinx-build` command line option, 408

`--follow-links`
 `sphinx-apidoc` command line option, 411

`--force`
 `sphinx-apidoc` command line option, 411

`--fresh-env`
 `sphinx-build` command line option, 407

`--full`
 `sphinx-apidoc` command line option, 411

`--help`
 `sphinx-build` command line option, 409
 `sphinx-quickstart` command line option, 403

`--html-define`
 `sphinx-build` command line option, 408

`--implicit-namespaces`
 `sphinx-apidoc` command line option, 412

`--imported-members`
 `sphinx-autogen` command line option, 413

`--isolated`
 `sphinx-build` command line option, 407

`--jobs`
 `sphinx-build` command line option, 407

`--keep-going`
 `sphinx-build` command line option, 408

`--language`
 `sphinx-quickstart` command line option, 404

`--makefile`
 `sphinx-quickstart` command line option, 405

`--master`
 `sphinx-quickstart` command line option, 404

`--module-first`
 `sphinx-apidoc` command line option, 412

`--nitpicky`
 `sphinx-build` command line option, 408

`--no-batchfile`
 `sphinx-quickstart` command line option, 405

`--no-color`
 `sphinx-build` command line option, 408

`--no-headings`
 `sphinx-apidoc` command line option, 411

`--no-makefile`
 `sphinx-quickstart` command line option, 405

`--no-sep`
 `sphinx-quickstart` command line option, 403

`--no-toc`
 `sphinx-apidoc` command line option, 411

`--no-use-make-mode`
 `sphinx-quickstart` command line option, 405

`--pdb`
 `sphinx-build` command line option, 409

`--private`
 `sphinx-apidoc` command line option, 412

`--project`

- sphinx-quickstart command line option, 404
- quiet
 - sphinx-build command line option, 408
 - sphinx-quickstart command line option, 403
- release
 - sphinx-quickstart command line option, 404
- respect-module-all
 - sphinx-autogen command line option, 413
- sep
 - sphinx-quickstart command line option, 403
- separate
 - sphinx-apidoc command line option, 411
- show-traceback
 - sphinx-build command line option, 409
- silent
 - sphinx-build command line option, 408
- suffix
 - sphinx-autogen command line option, 413
 - sphinx-quickstart command line option, 404
- tag
 - sphinx-build command line option, 407
- templatedir
 - sphinx-apidoc command line option, 412
 - sphinx-quickstart command line option, 405
- templates
 - sphinx-autogen command line option, 413
- tocfile
 - sphinx-apidoc command line option, 411
- use-make-mode
 - sphinx-quickstart command line option, 405
- verbose
 - sphinx-build command line option, 408
- version
 - sphinx-build command line option, 409
 - sphinx-quickstart command line option, 403
- warning-file
 - sphinx-build command line option, 408
- write-all
 - sphinx-build command line option, 406
- a
 - sphinx-apidoc command line option, 412
 - sphinx-autogen command line option, 413
 - sphinx-build command line option, 406
 - sphinx-quickstart command line option, 404
- b
 - sphinx-build command line option, 406
- c
 - sphinx-build command line option, 407
- d
 - sphinx-apidoc command line option, 411
 - sphinx-build command line option, 407
 - sphinx-quickstart command line option, 405
- e
 - sphinx-apidoc command line option, 411
- f
 - sphinx-apidoc command line option, 411
- h
 - sphinx-build command line option, 409
 - sphinx-quickstart command line option, 403
- i
 - sphinx-autogen command line option, 413
- j
 - sphinx-build command line option, 407
- l
 - sphinx-apidoc command line option, 411
 - sphinx-quickstart command line option, 404
- n
 - sphinx-apidoc command line option, 411

- sphinx-build command line option, 408
- o
 - sphinx-apidoc command line option, 411
 - sphinx-autogen command line option, 413
- p
 - sphinx-quickstart command line option, 404
- q
 - sphinx-apidoc command line option, 411
 - sphinx-build command line option, 408
 - sphinx-quickstart command line option, 403
- r
 - sphinx-quickstart command line option, 404
- s
 - sphinx-apidoc command line option, 411
 - sphinx-autogen command line option, 413
- t
 - sphinx-apidoc command line option, 412
 - sphinx-autogen command line option, 413
 - sphinx-build command line option, 407
 - sphinx-quickstart command line option, 405
- v
 - sphinx-build command line option, 408
 - sphinx-quickstart command line option, 404
- w
 - sphinx-build command line option, 408

A

- abbr (*role*), 45
- accept_comment()
 - (*sphinxcontrib.websupport.storage.StorageBackend* method), 244
- add() (*sphinx.events.EventManager* method), 364
- add_autodoc_attrgetter() (*sphinx.application.Sphinx* method), 325
- add_autodocumenter() (*sphinx.application.Sphinx* method), 325
- add_builder() (*sphinx.application.Sphinx* method), 315
- add_comment() (*sphinxcontrib.websupport.storage.StorageBackend* method), 243
- add_comment() (*sphinxcontrib.websupport.WebSupport* method), 239
- add_config_value() (*sphinx.application.Sphinx* method), 315
- add_crossref_type() (*sphinx.application.Sphinx* method), 321
- add_css_file() (*sphinx.application.Sphinx* method), 323
- add_directive() (*sphinx.application.Sphinx* method), 317
- add_directive_to_domain() (*sphinx.application.Sphinx* method), 319
- add_document() (*sphinxcontrib.websupport.search.BaseSearch* method), 241
- add_domain() (*sphinx.application.Sphinx* method), 319
- add_enumerable_node() (*sphinx.application.Sphinx* method), 317
- add_env_collector() (*sphinx.application.Sphinx* method), 326
- add_event() (*sphinx.application.Sphinx* method), 315
- add_function_parentheses
 - configuration value, 82
- add_generic_role() (*sphinx.application.Sphinx* method), 318
- add_html_math_renderer() (*sphinx.application.Sphinx* method), 327
- add_html_theme() (*sphinx.application.Sphinx* method), 326
- add_index_to_domain() (*sphinx.application.Sphinx* method), 320
- add_js_file() (*sphinx.application.Sphinx* method), 322
- add_latex_package() (*sphinx.application.Sphinx* method), 324
- add_lexer() (*sphinx.application.Sphinx* method), 325
- add_message_catalog() (*sphinx.application.Sphinx* method), 327
- add_module_names
 - configuration value, 82
- add_node() (*sphinx.application.Sphinx* method), 316
- add_node() (*sphinxcontrib.websupport.storage.StorageBackend* method), 243

- `add_object_type()` (*sphinx.application.Sphinx method*), 320
- `add_object_type()` (*sphinx.domains.Domain method*), 342
- `add_post_transform()` (*sphinx.application.Sphinx method*), 322
- `add_role()` (*sphinx.application.Sphinx method*), 318
- `add_role_to_domain()` (*sphinx.application.Sphinx method*), 319
- `add_search_language()` (*sphinx.application.Sphinx method*), 326
- `add_source_parser()` (*sphinx.application.Sphinx method*), 326
- `add_source_suffix()` (*sphinx.application.Sphinx method*), 326
- `add_target_and_index()` (*sphinx.directives.ObjectDescription method*), 348
- `add_transform()` (*sphinx.application.Sphinx method*), 322
- `after_content()` (*sphinx.directives.ObjectDescription method*), 348
- `allow_parallel` (*sphinx.builders.Builder attribute*), 337
- `any` (*role*), 70
- `app` (*sphinx.environment.BuildEnvironment attribute*), 335
- `app` (*sphinx.transforms.SphinxTransform property*), 360
- `applehelp_bundle_id`
 - configuration value, 97
- `applehelp_bundle_name`
 - configuration value, 97
- `applehelp_bundle_version`
 - configuration value, 97
- `applehelp_codesign_flags`
 - configuration value, 98
- `applehelp_codesign_identity`
 - configuration value, 98
- `applehelp_codesign_path`
 - configuration value, 99
- `applehelp_dev_region`
 - configuration value, 97
- `applehelp_disable_external_tools`
 - configuration value, 99
- `applehelp_icon`
 - configuration value, 97
- `applehelp_index_anchors`
 - configuration value, 98
- `applehelp_indexer_path`
 - configuration value, 98
- `applehelp_kb_product`
 - configuration value, 97
- `applehelp_kb_url`
 - configuration value, 97
- `applehelp_locale`
 - configuration value, 98
- `applehelp_min_term_length`
 - configuration value, 98
- `applehelp_remote_url`
 - configuration value, 98
- `applehelp_stopwords`
 - configuration value, 98
- `applehelp_title`
 - configuration value, 98
- `AppleHelpBuilder` (*class in sphinxcontrib.applehelp*), 124
- `apply()` (*sphinx.transforms.post_transforms.SphinxPostTransform method*), 361
- `arguments` (*docutils.parsers.rst.Directive attribute*), 341
- `attributes` (*built-in variable*), 184
- `author`
 - configuration value, 74
- `autoattribute` (*directive*), 171
- `autoclass` (*directive*), 167
- `autoclass_content`
 - configuration value, 173
- `autodata` (*directive*), 171
- `autodecorator` (*directive*), 171
- `autodoc_class_signature`
 - configuration value, 173
- `autodoc_default_flags`
 - configuration value, 173
- `autodoc_default_options`
 - configuration value, 173
- `autodoc_docstring_signature`
 - configuration value, 174
- `autodoc_inherit_docstrings`
 - configuration value, 176
- `autodoc_member_order`
 - configuration value, 173
- `autodoc_mock_imports`
 - configuration value, 174
- `autodoc_preserve_defaults`
 - configuration value, 176
- `autodoc_type_aliases`
 - configuration value, 175
- `autodoc_typehints`
 - configuration value, 174
- `autodoc_typehints_description_target`
 - configuration value, 175
- `autodoc_typehints_format`
 - configuration value, 176
- `autodoc_warningiserror`
 - configuration value, 176
- `autodoc-before-process-signature`
 - event, 177
- `autodoc-process-bases`
 - event, 178
- `autodoc-process-docstring`
 - event, 176
- `autodoc-process-signature`
 - event, 177
- `autodoc-skip-member`
 - event, 178
- `autoexception` (*directive*), 167
- `autofunction` (*directive*), 171
- `automatic`
 - documentation, 166
 - linking, 200
 - testing, 186
- `automethod` (*directive*), 171
- `automodule` (*directive*), 167
 - `:members:` (*directive option*), 168
 - `:private-members:` (*directive option*), 168
 - `:special-members:` (*directive option*), 168
 - `:undoc-members:` (*directive option*), 168
- `autoproperty` (*directive*), 171
- `autosectionlabel_maxdepth`
 - configuration value, 179
- `autosectionlabel_prefix_document`
 - configuration value, 179
- `autosummary` (*directive*), 180
- `autosummary_context`
 - configuration value, 182
- `autosummary_filename_map`
 - configuration value, 182
- `autosummary_generate`
 - configuration value, 182
- `autosummary_generate_overwrite`
 - configuration value, 182
- `autosummary_ignore_module_all`
 - configuration value, 182
- `autosummary_imported_members`
 - configuration value, 182
- `autosummary_mock_imports`
 - configuration value, 182
- `available`
 - (*sphinx.transforms.post_transforms.images.ImageConverter attribute*), 363

B

BaseSearch (class in *sphinxcontrib.websupport.search*), 241
 before_content() (*sphinx.directives.ObjectDescription* method), 349
 between() (in module *sphinx.ext.autodoc*), 178
 block_text (*docutils.parsers.rst.Directive* attribute), 341
 body (built-in variable), 276
 build() (*sphinx.builders.Builder* method), 338
 build() (*sphinxcontrib.websupport.WebSupport* method), 238
 build_all() (*sphinx.builders.Builder* method), 337
 build_specific() (*sphinx.builders.Builder* method), 337
 build_update() (*sphinx.builders.Builder* method), 338
 build-finished
 event, 332
 BuildEnvironment (class in *sphinx.environment*), 335
 builder, **415**
 builder (built-in variable), 275
 Builder (class in *sphinx.builders*), 337
 builder-initiated
 event, 330
 built-in function
 enumerate(), 3
 escape(), 184
 hasdoc(), 274
 pathto(), 274
 relbar(), 274
 sidebar(), 274
 warning(), 274

C

c:alias (directive), 139
 :maxdepth: (directive option), 139
 :noroot: (directive option), 139
 c:data (role), 138
 c:enum (directive), 138
 c:enum (role), 138
 c:enumerator (directive), 138
 c:enumerator (role), 138
 c:expr (role), 140
 c:func (role), 138
 c:function (directive), 136
 :single-line-parameter-list: (directive option), 137
 c:macro (directive), 137
 :single-line-parameter-list: (directive option), 137
 c:macro (role), 138
 c:member (directive), 136
 c:member (role), 138
 c:namespace (directive), 140
 c:namespace-pop (directive), 141
 c:namespace-push (directive), 140
 c:struct (directive), 137
 c:struct (role), 138
 c:texpr (role), 140
 c:type (directive), 138
 c:type (role), 138
 c:union (directive), 137
 c:union (role), 138
 c:var (directive), 136
 c:var (role), 138
 c_extra_keywords
 configuration value, 113
 c_id_attributes
 configuration value, 113
 c_maximum_signature_line_length
 configuration value, 113
 c_paren_attributes
 configuration value, 113

category (*sphinx.errors.SphinxError* attribute), 334
 centered (directive), 53
 changes
 in version, 52
 ChangesBuilder (class in *sphinx.builders.changes*), 129
 check_consistency() (*sphinx.domains.Domain* method), 343
 CheckExternalLinksBuilder (class in *sphinx.builders.linkcheck*), 130
 class (built-in variable), 183
 classes (built-in variable), 183
 clear_doc() (*sphinx.domains.Domain* method), 343
 clear_doc() (*sphinx.environment.collectors.EnvironmentCollector* method), 339
 code
 examples, 54
 code (role), 45
 code-block (directive), 55
 :caption: (directive option), 56
 :class: (directive option), 57
 :dedent: (directive option), 57
 :emphasize-lines: (directive option), 56
 :force: (directive option), 57
 :lineno-start: (directive option), 56
 :linenos: (directive option), 56
 :name: (directive option), 56
 codeauthor (directive), 60
 command (role), 45
 compact_paragraph (class in *sphinx.addnodes*), 355
 conf
 module, 73
 confdir (*sphinx.application.Sphinx* attribute), 328
 Config (class in *sphinx.config*), 333
 config (*sphinx.environment.BuildEnvironment* attribute), 335
 config (*sphinx.parsers.Parser* attribute), 351
 config (*sphinx.transforms.SphinxTransform* property), 361
 config (*sphinx.util.docutils.SphinxDirective* property), 361
 config (*sphinx.util.docutils.SphinxRole* property), 362
 config-initiated
 event, 330
 ConfigError, 334
 configuration directory, **415**
 configuration value
 add_function_parentheses, 82
 add_module_names, 82
 applehelp_bundle_id, 97
 applehelp_bundle_name, 97
 applehelp_bundle_version, 97
 applehelp_codesign_flags, 98
 applehelp_codesign_identity, 98
 applehelp_codesign_path, 99
 applehelp_dev_region, 97
 applehelp_disable_external_tools, 99
 applehelp_icon, 97
 applehelp_index_anchors, 98
 applehelp_indexer_path, 98
 applehelp_kb_product, 97
 applehelp_kb_url, 97
 applehelp_locale, 98
 applehelp_min_term_length, 98
 applehelp_remote_url, 98
 applehelp_stopwords, 98
 applehelp_title, 98
 author, 74
 autoclass_content, 173
 autodoc_class_signature, 173
 autodoc_default_flags, 173
 autodoc_default_options, 173
 autodoc_docstring_signature, 174

autodoc_inherit_docstrings, 176
autodoc_member_order, 173
autodoc_mock_imports, 174
autodoc_preserve_defaults, 176
autodoc_type_aliases, 175
autodoc_typehints, 174
autodoc_typehints_description_target, 175
autodoc_typehints_format, 176
autodoc_warningiserror, 176
autosectionlabel_maxdepth, 179
autosectionlabel_prefix_document, 179
autosummary_context, 182
autosummary_filename_map, 182
autosummary_generate, 182
autosummary_generate_overwrite, 182
autosummary_ignore_module_all, 182
autosummary_imported_members, 182
autosummary_mock_imports, 182
c_extra_keywords, 113
c_id_attributes, 113
c_maximum_signature_line_length, 113
c_paren_attributes, 113
copyright, 74
coverage_c_path, 185
coverage_c_regexes, 185
coverage_ignore_c_items, 185
coverage_ignore_classes, 184
coverage_ignore_functions, 184
coverage_ignore_modules, 184
coverage_ignore_pyobjects, 184
coverage_show_missing_items, 185
coverage_skip_undoc_in_source, 185
coverage_statistics_to_report, 185
coverage_statistics_to_stdout, 185
coverage_write_headline, 185
cpp_id_attributes, 114
cpp_index_common_prefix, 114
cpp_maximum_signature_line_length, 114
cpp_paren_attributes, 114
default_role, 77
doctest_default_flags, 190
doctest_global_cleanup, 190
doctest_global_setup, 190
doctest_path, 190
doctest_show_successes, 190
doctest_test_doctest_blocks, 191
epub_author, 99
epub_basename, 99
epub_contributor, 99
epub_copyright, 100
epub_cover, 100
epub_css_files, 100
epub_description, 99
epub_exclude_files, 101
epub_fix_images, 101
epub_guide, 100
epub_identifier, 100
epub_language, 99
epub_max_image_width, 101
epub_post_files, 101
epub_pre_files, 100
epub_publisher, 100
epub_scheme, 100
epub_show_urls, 101
epub_theme, 99
epub_theme_options, 99
epub_title, 99
epub_tocdepth, 101
epub_tocdup, 101
epub_tocscope, 101
epub_uid, 100
epub_use_index, 102
epub_writing_mode, 102
exclude_patterns, 75
extensions, 74
extlinks, 192
extlinks_detect_hardcoded_links, 192
figure_language_filename, 87
gettext_additional_targets, 86
gettext_allow_fuzzy_translations, 86
gettext_auto_build, 86
gettext_compact, 86
gettext_location, 86
gettext_uuid, 86
graphviz_dot, 195
graphviz_dot_args, 195
graphviz_output_format, 195
highlight_language, 82
highlight_options, 82
html4_writer, 96
html_additional_pages, 91
html_baseurl, 88
html_codeblock_linenos_style, 89
html_compact_lists, 93
html_context, 89
html_copy_source, 92
html_css_files, 89
html_domain_indices, 92
html_experimental_html5_writer, 96
html_extra_path, 90
html_favicon, 89
html_file_suffix, 92
html_js_files, 90
html_last_updated_fmt, 90
html_link_suffix, 92
html_logo, 89
html_math_renderer, 96
html_output_encoding, 93
html_permalinks, 91
html_permalinks_icon, 91
html_scaled_image_link, 96
html_search_language, 93
html_search_options, 94
html_search_scorer, 95
html_secnumber_suffix, 93
html_short_title, 88
html_show_copyright, 93
html_show_search_summary, 93
html_show_sourcelink, 92
html_show_sphinx, 93
html_sidebars, 91
html_sourcelink_suffix, 92
html_split_index, 92
html_static_path, 90
html_style, 88
html_theme, 88
html_theme_options, 88
html_theme_path, 88
html_title, 88
html_use_index, 92
html_use_opensearch, 92
html_use_smartypants, 90
htmlhelp_basename, 97
htmlhelp_file_suffix, 97
htmlhelp_link_suffix, 97
image_converter, 197

image_converter_args, 197
 imgmath_add_tooltips, 204
 imgmath_dvipng, 205
 imgmath_dvipng_args, 205
 imgmath_dvisvgm, 205
 imgmath_dvisvgm_args, 205
 imgmath_embed, 205
 imgmath_font_size, 204
 imgmath_image_format, 204
 imgmath_latex, 204
 imgmath_latex_args, 205
 imgmath_latex_preamble, 205
 imgmath_use_preview, 204
 include_patterns, 76
 inheritance_alias, 199
 inheritance_edge_attrs, 199
 inheritance_graph_attrs, 199
 inheritance_node_attrs, 199
 intersphinx_cache_limit, 201
 intersphinx_disabled_reftypes, 202
 intersphinx_mapping, 200
 intersphinx_timeout, 202
 javascript_maximum_signature_line_length, 115
 jsmath_path, 207
 keep_warnings, 77
 language, 84
 latex_additional_files, 106
 latex_appendices, 103
 latex_docclass, 106
 latex_documents, 103
 latex_domain_indices, 103
 latex_elements, 106
 latex_engine, 102
 latex_logo, 103
 latex_show_pagerefs, 103
 latex_show_urls, 104
 latex_table_style, 104
 latex_theme, 106
 latex_theme_options, 106
 latex_theme_path, 106
 latex_toplevel_sectioning, 103
 latex_use_latex_multicolumn, 104
 latex_use_xindy, 105
 linkcheck_allow_unauthorized, 113
 linkcheck_allowed_redirects, 110
 linkcheck_anchors, 111
 linkcheck_anchors_ignore, 111
 linkcheck_anchors_ignore_for_url, 112
 linkcheck_auth, 112
 linkcheck_exclude_documents, 112
 linkcheck_ignore, 110
 linkcheck_rate_limit_timeout, 112
 linkcheck_report_timeouts_as_broken, 113
 linkcheck_request_headers, 110
 linkcheck_retries, 111
 linkcheck_timeout, 111
 linkcheck_workers, 111
 linkcode_resolve, 203
 locale_dirs, 85
 man_make_section_directory, 108
 man_pages, 107
 man_show_urls, 108
 manpages_url, 79
 master_doc, 75
 math_eqref_format, 88
 math_number_all, 88
 math_numfig, 88
 mathjax2_config, 207
 mathjax3_config, 206
 mathjax_config, 207
 mathjax_options, 206
 mathjax_path, 206
 maximum_signature_line_length, 82
 modindex_common_prefix, 83
 napoleon_attr_annotations, 217
 napoleon_custom_sections, 217
 napoleon_google_docstring, 213
 napoleon_include_init_with_doc, 213
 napoleon_include_private_with_doc, 213
 napoleon_include_special_with_doc, 214
 napoleon_numpy_docstring, 213
 napoleon_preprocess_types, 216
 napoleon_type_aliases, 216
 napoleon_use_admonition_for_examples, 214
 napoleon_use_admonition_for_notes, 214
 napoleon_use_admonition_for_references, 215
 napoleon_use_ivar, 215
 napoleon_use_keyword, 216
 napoleon_use_param, 215
 napoleon_use_rtype, 216
 needs_extensions, 79
 needs_sphinx, 79
 nitpick_ignore, 79
 nitpick_ignore_regex, 79
 nitpicky, 79
 numfig, 80
 numfig_format, 80
 numfig_secnum_depth, 80
 option_emphasise_placeholders, 83
 primary_domain, 77
 project, 74
 project_copyright, 74
 pygments_style, 82
 python_display_short_literal_types, 114
 python_maximum_signature_line_length, 115
 python_use_unqualified_type_names, 114
 qthelp_basename, 110
 qthelp_namespace, 110
 qthelp_theme, 110
 qthelp_theme_options, 110
 release, 74
 root_doc, 75
 rst_epilog, 76
 rst_prolog, 76
 show_authors, 83
 show_warning_types, 77
 singlehtml_sidebars, 96
 smartquotes, 80
 smartquotes_action, 80
 smartquotes_excludes, 80
 source_encoding, 75
 source_parsers, 75
 source_suffix, 74
 strip_signature_backslash, 83
 suppress_warnings, 77
 template_bridge, 76
 templates_path, 76
 texinfo_appendices, 109
 texinfo_cross_references, 109
 texinfo_documents, 108
 texinfo_domain_indices, 109
 texinfo_elements, 109
 texinfo_no_detailmenu, 109
 texinfo_show_urls, 109
 text_add_secnumbers, 107
 text_newlines, 107

text_secnumber_suffix, 107
 text_sectionchars, 107
 tls_cacerts, 81
 tls_verify, 81
 toc_object_entries, 83
 toc_object_entries_show_parents, 83
 today, 81
 today_fmt, 81
 todo_emit_warnings, 218
 todo_include_todos, 218
 todo_link_only, 218
 translation_progress_classes, 87
 trim_doctest_flags, 83
 trim_footnote_reference_space, 83
 user_agent, 81
 version, 74
 viewcode_enable_epub, 219
 viewcode_follow_imported_members, 219
 viewcode_line_numbers, 219
 xml_pretty, 113
 connect() (*sphinx.application.Sphinx* method), 314
 connect() (*sphinx.events.EventManager* method), 364
 content (*docutils.parsers.rst.Directive* attribute), 341
 content (*sphinx.util.docutils.SphinxRole* attribute), 362
 content_offset (*docutils.parsers.rst.Directive* attribute), 341
 contents
 table of, 48
 conversion_rules
 (*sphinx.transforms.post_transforms.images.ImageConverter*
 attribute), 363
 convert()
 (*sphinx.transforms.post_transforms.images.ImageConverter*
 method), 363
 copyright
 configuration value, 74
 copyright (built-in variable), 275
 coverage_c_path
 configuration value, 185
 coverage_c_regexes
 configuration value, 185
 coverage_ignore_c_items
 configuration value, 185
 coverage_ignore_classes
 configuration value, 184
 coverage_ignore_functions
 configuration value, 184
 coverage_ignore_modules
 configuration value, 184
 coverage_ignore_pyobjects
 configuration value, 184
 coverage_show_missing_items
 configuration value, 185
 coverage_skip_undoc_in_source
 configuration value, 185
 coverage_statistics_to_report
 configuration value, 185
 coverage_statistics_to_stdout
 configuration value, 185
 coverage_write_headline
 configuration value, 185
 CoverageBuilder (class in *sphinx.ext.coverage*), 184
 cpp:alias (directive), 146
 :maxlength: (directive option), 147
 :noroot: (directive option), 147
 cpp:any (role), 150
 cpp:class (directive), 141
 cpp:class (role), 150
 cpp:concept (directive), 144
 cpp:concept (role), 150
 cpp:enum (directive), 144
 cpp:enum (role), 150
 cpp:enum-class (directive), 144
 cpp:enum-struct (directive), 144
 cpp:enumerator (directive), 144
 cpp:enumerator (role), 150
 cpp:expr (role), 148
 cpp:func (role), 150
 cpp:function (directive), 142
 :single-line-parameter-list: (directive option), 142
 cpp:member (directive), 143
 cpp:member (role), 150
 cpp:namespace (directive), 149
 cpp:namespace-pop (directive), 149
 cpp:namespace-push (directive), 149
 cpp:struct (directive), 141
 cpp:struct (role), 150
 cpp:texpr (role), 148
 cpp:type (directive), 143
 cpp:type (role), 150
 cpp:union (directive), 144
 cpp:var (directive), 143
 cpp:var (role), 150
 cpp_id_attributes
 configuration value, 114
 cpp_index_common_prefix
 configuration value, 114
 cpp_maximum_signature_line_length
 configuration value, 114
 cpp_paren_attributes
 configuration value, 114
 critical() (*sphinx.util.logging.SphinxLoggerAdapter* method), 357
 CustomList (C++ type), 24
 cut_lines() (in module *sphinx.ext.autodoc*), 177

D

dangling_warnings (*sphinx.domains.Domain* attribute), 344
 data (*sphinx.domains.Domain* attribute), 344
 data_version (*sphinx.domains.Domain* attribute), 344
 debug() (*sphinx.util.logging.SphinxLoggerAdapter* method), 357
 default
 domain, 77
 role, 77
 default_priority
 (*sphinx.transforms.post_transforms.images.ImageConverter*
 attribute), 363
 default_role
 configuration value, 77
 default_translator_class (*sphinx.builders.Builder* attribute), 337
 default-domain (directive), 134
 delete_comment()
 (*sphinxcontrib.websupport.storage.StorageBackend*
 method), 243
 deprecated (directive), 52
 desc (class in *sphinx.addnodes*), 351
 desc_addname (class in *sphinx.addnodes*), 352
 desc_annotation (class in *sphinx.addnodes*), 353
 desc_content (class in *sphinx.addnodes*), 352
 desc_inline (class in *sphinx.addnodes*), 352
 desc_name (class in *sphinx.addnodes*), 352
 desc_optional (class in *sphinx.addnodes*), 353
 desc_parameter (class in *sphinx.addnodes*), 353
 desc_parameterlist (class in *sphinx.addnodes*), 353
 desc_returns (class in *sphinx.addnodes*), 352
 desc_sig_element (class in *sphinx.addnodes*), 353
 desc_sig_keyword (class in *sphinx.addnodes*), 354

desc_sig_keyword_type (class in sphinx.addnodes), 354
 desc_sig_literal_char (class in sphinx.addnodes), 354
 desc_sig_literal_number (class in sphinx.addnodes), 354
 desc_sig_literal_string (class in sphinx.addnodes), 354
 desc_sig_name (class in sphinx.addnodes), 353
 desc_sig_operator (class in sphinx.addnodes), 354
 desc_sig_punctuation (class in sphinx.addnodes), 354
 desc_sig_space (class in sphinx.addnodes), 353
 desc_signature (class in sphinx.addnodes), 352
 desc_signature_line (class in sphinx.addnodes), 352
 desc_type (class in sphinx.addnodes), 352
 describe (directive), 136
 DevhelpBuilder (class in sphinxcontrib.devhelp), 125
 dfn (role), 45
 digraph (directive), 194

- :align: (directive option), 195
- :alt: (directive option), 195
- :caption: (directive option), 195
- :class: (directive option), 195
- :layout: (directive option), 195
- :name: (directive option), 195

 directive, 415
 Directive (class in docutils.parsers.rst), 340
 directive() (sphinx.domains.Domain method), 343
 directives (sphinx.domains.Domain attribute), 344
 DirectoryHTMLBuilder (class in sphinx.builders.dirhtml), 123
 disabled (sphinx.util.docutils.ReferenceRole attribute), 362
 disconnect() (sphinx.application.Sphinx method), 314
 disconnect() (sphinx.events.EventManager method), 364
 discover() (sphinx.project.Project method), 335
 display_toc (built-in variable), 276
 doc (role), 71
 doc2path() (sphinx.environment.BuildEnvironment method), 336
 doc2path() (sphinx.project.Project method), 335
 docname (sphinx.environment.BuildEnvironment attribute), 336
 docnames (sphinx.project.Project attribute), 335
 docstitle (built-in variable), 275
 docstring, 166
 doctest, 186
 doctest (directive), 186
 doctest_default_flags

- configuration value, 190

 doctest_global_cleanup

- configuration value, 190

 doctest_global_setup

- configuration value, 190

 doctest_path

- configuration value, 190

 doctest_show_successes

- configuration value, 190

 doctest_test_doctest_blocks

- configuration value, 191

 doctree-read

- event, 331

 doctree-resolved

- event, 331

 doctreedir (sphinx.application.Sphinx attribute), 328
 doctreedir (sphinx.environment.BuildEnvironment attribute), 336
 document name, 415
 documentation

- automatic, 166

 docutils.parsers.rst

- module, 340

 docutils_version_info (built-in variable), 276
 domain, 415
 Domain (class in sphinx.domains), 342
 download (role), 72
 download_reference (class in sphinx.addnodes), 356

DummyBuilder (class in sphinx.builders.dummy), 130

E

embedded (built-in variable), 275
 emit() (sphinx.application.Sphinx method), 328
 emit() (sphinx.events.EventManager method), 364
 emit_firstresult() (sphinx.application.Sphinx method), 328
 emit_firstresult() (sphinx.events.EventManager method), 364
 ENUM (class in sphinx.config), 333
 enumerable_nodes (sphinx.domains.Domain attribute), 344
 enumerate()

- built-in function, 3

 env (sphinx.parsers.Parser attribute), 351
 env (sphinx.transforms.SphinxTransform property), 361
 env (sphinx.util.docutils.SphinxDirective property), 361
 env (sphinx.util.docutils.SphinxRole property), 362
 env_version (sphinx.util.typing.ExtensionMetadata attribute), 365
 env-before-read-docs

- event, 330

 env-check-consistency

- event, 332

 env-get-outdated

- event, 330

 env-merge-info

- event, 331

 env-purge-doc

- event, 330

 env-updated

- event, 332

 environment, 415
 environment variable

- python:PYTHONWARNINGS, 389
- SPHINX_APIDOC_OPTIONS, 413

 EnvironmentCollector (class in sphinx.environment.collectors), 339
 envvar (directive), 135
 envvar (role), 72
 epilog (sphinx.builders.Builder attribute), 337
 Epub3Builder (class in sphinx.builders.epub3), 125
 epub_author

- configuration value, 99

 epub_basename

- configuration value, 99

 epub_contributor

- configuration value, 99

 epub_copyright

- configuration value, 100

 epub_cover

- configuration value, 100

 epub_css_files

- configuration value, 100

 epub_description

- configuration value, 99

 epub_exclude_files

- configuration value, 101

 epub_fix_images

- configuration value, 101

 epub_guide

- configuration value, 100

 epub_identifier

- configuration value, 100

 epub_language

- configuration value, 99

 epub_max_image_width

- configuration value, 101

 epub_post_files

- configuration value, 101

 epub_pre_files

- configuration value, 100
- epub_publisher
 - configuration value, 100
- epub_scheme
 - configuration value, 100
- epub_show_urls
 - configuration value, 101
- epub_theme
 - configuration value, 99
- epub_theme_options
 - configuration value, 99
- epub_title
 - configuration value, 99
- epub_tocdepth
 - configuration value, 101
- epub_tocdup
 - configuration value, 101
- epub_tocscope
 - configuration value, 101
- epub_uid
 - configuration value, 100
- epub_use_index
 - configuration value, 102
- epub_writing_mode
 - configuration value, 102
- eq (*role*), 45
- error() (*sphinx.util.logging.SphinxLoggerAdapter method*), 356
- escape()
 - built-in function, 184
- event
 - autodoc-before-process-signature, 177
 - autodoc-process-bases, 178
 - autodoc-process-docstring, 176
 - autodoc-process-signature, 177
 - autodoc-skip-member, 178
 - build-finished, 332
 - builder-inited, 330
 - config-inited, 330
 - doctree-read, 331
 - doctree-resolved, 331
 - env-before-read-docs, 330
 - env-check-consistency, 332
 - env-get-outdated, 330
 - env-merge-info, 331
 - env-purge-doc, 330
 - env-updated, 332
 - html-collect-pages, 332
 - html-page-context, 332
 - include-read, 330
 - linkcheck-process-uri, 332
 - missing-reference, 331
 - object-description-transform, 331
 - source-read, 330
 - todo-defined, 218
 - viewcode-find-source, 219
 - viewcode-follow-imported, 220
 - warn-missing-reference, 331
- EventManager (*class in sphinx.events*), 364
- events (*sphinx.builders.Builder attribute*), 338
- events (*sphinx.environment.BuildEnvironment attribute*), 336
- examples
 - code, 54
- exceptions (*built-in variable*), 184
- exclude_patterns
 - configuration value, 75
- extension, 416
- ExtensionError, 327, 334
- ExtensionMetadata (*class in sphinx.util.typing*), 365

- extensions
 - configuration value, 74
- external (*role*), 202
- extlinks
 - configuration value, 192
- extlinks_detect_hardcoded_links
 - configuration value, 192
- extract_context() (*sphinxcontrib.websupport.search.BaseSearch method*), 242

F

- favicon_url (*built-in variable*), 275
- feed() (*sphinxcontrib.websupport.search.BaseSearch method*), 241
- figure_language_filename
 - configuration value, 87
- file (*role*), 46
- file_suffix (*built-in variable*), 275
- final_argument_whitespace (*docutils.parsers.rst.Directive attribute*), 340
- final_argument_whitespace (*sphinx.directives.ObjectDescription attribute*), 349
- finish() (*sphinx.builders.Builder method*), 338
- finish_indexing() (*sphinxcontrib.websupport.search.BaseSearch method*), 241
- format (*sphinx.builders.Builder attribute*), 337
- format (*sphinx.builders.changes.ChangesBuilder attribute*), 130
- format (*sphinx.builders.dirhtml.DirectoryHTMLBuilder attribute*), 123
- format (*sphinx.builders.epub3.Epub3Builder attribute*), 125
- format (*sphinx.builders.gettext.MessageCatalogBuilder attribute*), 129
- format (*sphinx.builders.html.StandaloneHTMLBuilder attribute*), 123
- format (*sphinx.builders.latex.LaTeXBuilder attribute*), 126
- format (*sphinx.builders.linkcheck.CheckExternalLinksBuilder attribute*), 130
- format (*sphinx.builders.manpage.ManualPageBuilder attribute*), 127
- format (*sphinx.builders.singlehtml.SingleFileHTMLBuilder attribute*), 124
- format (*sphinx.builders.texinfo.TexinfoBuilder attribute*), 127
- format (*sphinx.builders.text.TextBuilder attribute*), 127
- format (*sphinx.builders.xml.PseudoXMLBuilder attribute*), 131
- format (*sphinx.builders.xml.XMLBuilder attribute*), 130
- format (*sphinxcontrib.applehelp.AppleHelpBuilder attribute*), 125
- format (*sphinxcontrib.devhelp.DevhelpBuilder attribute*), 125
- format (*sphinxcontrib.htmlhelp.HTMLHelpBuilder attribute*), 124
- format (*sphinxcontrib.qthelp.QtHelpBuilder attribute*), 124
- format (*sphinxcontrib.serializinghtml.JSONHTMLBuilder attribute*), 129
- format (*sphinxcontrib.serializinghtml.PickleHTMLBuilder attribute*), 128
- found_docs (*sphinx.environment.BuildEnvironment attribute*), 336
- fullname (*built-in variable*), 183
- functions (*built-in variable*), 183

G

- generate() (*sphinx.domains.Index method*), 347
- get_data() (*sphinxcontrib.websupport.storage.StorageBackend method*), 243
- get_data() (*sphinxcontrib.websupport.WebSupport method*), 239
- get_document() (*sphinxcontrib.websupport.WebSupport method*), 238
- get_enumerable_node_type() (*sphinx.domains.Domain method*), 343
- get_full_qualified_name() (*sphinx.domains.Domain method*), 343
- get_location() (*sphinx.util.docutils.SphinxDirective method*), 361
- get_location() (*sphinx.util.docutils.SphinxRole method*), 362
- get_objects() (*sphinx.domains.Domain method*), 343

get_outdated_docs() (*sphinx.builders.Builder method*), 338
 get_outdated_docs() (*sphinx.environment.collectors.EnvironmentCollector method*), 339
 get_relative_uri() (*sphinx.builders.Builder method*), 337
 get_search_results() (*sphinxcontrib.websupport.WebSupport method*), 240
 get_signatures() (*sphinx.directives.ObjectDescription method*), 349
 get_source_info() (*sphinx.util.docutils.SphinxDirective method*), 361
 get_target_uri() (*sphinx.builders.Builder method*), 338
 get_translation() (*in module sphinx.locale*), 358
 get_type_name() (*sphinx.domains.Domain method*), 343
 get_updated_docs() (*sphinx.environment.collectors.EnvironmentCollector method*), 339
 getLogger() (*in module sphinx.util.logging*), 356
 gettext_additional_targets configuration value, 86
 gettext_allow_fuzzy_translations configuration value, 86
 gettext_auto_build configuration value, 86
 gettext_compact configuration value, 86
 gettext_location configuration value, 86
 gettext_uuid configuration value, 86
 global substitutions, 42, 76, 77
 globalcontext_filename (*sphinxcontrib.serializinghtml.SerializingHTMLBuilder attribute*), 128
 glossary (*class in sphinx.addnodes*), 356
 glossary (*directive*), 59
 graph (*directive*), 194
 :align: (*directive option*), 194
 :alt: (*directive option*), 194
 :caption: (*directive option*), 194
 :class: (*directive option*), 194
 :layout: (*directive option*), 194
 :name: (*directive option*), 194
 graphviz (*directive*), 193
 :align: (*directive option*), 193
 :alt: (*directive option*), 193
 :caption: (*directive option*), 193
 :class: (*directive option*), 194
 :layout: (*directive option*), 193
 :name: (*directive option*), 194
 graphviz_dot configuration value, 195
 graphviz_dot_args configuration value, 195
 graphviz_output_format configuration value, 195
 guilabel (*role*), 46

H

handle_query() (*sphinxcontrib.websupport.search.BaseSearch method*), 242
 handle_signature() (*sphinx.directives.ObjectDescription method*), 349
 has_content (*docutils.parsers.rst.Directive attribute*), 340
 has_content (*sphinx.directives.ObjectDescription attribute*), 349
 has_explicit_title (*sphinx.util.docutils.ReferenceRole attribute*), 363
 has_source (*built-in variable*), 275
 hasdoc() built-in function, 274
 highlight (*directive*), 55
 :force: (*directive option*), 55
 :linenothreshold: (*directive option*), 55
 highlight_language configuration value, 82
 highlight_options configuration value, 82
 highlightlang (*class in sphinx.addnodes*), 356
 hlist (*directive*), 53
 html4_writer configuration value, 96
 html_additional_pages configuration value, 91
 html_baseurl configuration value, 88
 html_codeblock_lineno_style configuration value, 89
 html_compact_lists configuration value, 93
 html_context configuration value, 89
 html_copy_source configuration value, 92
 html_css_files configuration value, 89
 html_domain_indices configuration value, 92
 html_experimental_html5_writer configuration value, 96
 html_extra_path configuration value, 90
 html_favicon configuration value, 89
 html_file_suffix configuration value, 92
 html_js_files configuration value, 90
 html_last_updated_fmt configuration value, 90
 html_link_suffix configuration value, 92
 html_logo configuration value, 89
 html_math_renderer configuration value, 96
 html_output_encoding configuration value, 93
 html_permalinks configuration value, 91
 html_permalinks_icon configuration value, 91
 html_scaled_image_link configuration value, 96
 html_search_language configuration value, 93
 html_search_options configuration value, 94
 html_search_scorer configuration value, 95
 html_secnumber_suffix configuration value, 93
 html_short_title configuration value, 88

html_show_copyright
 configuration value, 93
 html_show_search_summary
 configuration value, 93
 html_show_sourcelink
 configuration value, 92
 html_show_sphinx
 configuration value, 93
 html_sidebars
 configuration value, 91
 html_sourcelink_suffix
 configuration value, 92
 html_split_index
 configuration value, 92
 html_static_path
 configuration value, 90
 html_style
 configuration value, 88
 html_theme
 configuration value, 88
 html_theme_options
 configuration value, 88
 html_theme_path
 configuration value, 88
 html_title
 configuration value, 88
 html_use_index
 configuration value, 92
 html_use_opensearch
 configuration value, 92
 html_use_smartypants
 configuration value, 90
 html-collect-pages
 event, 332
 html-page-context
 event, 332
 htmlhelp_basename
 configuration value, 97
 htmlhelp_file_suffix
 configuration value, 97
 htmlhelp_link_suffix
 configuration value, 97
 HTMLHelpBuilder (class in *sphinxcontrib.htmlhelp*), 124

I

ifconfig (directive), 196
 image_converter
 configuration value, 197
 image_converter_args
 configuration value, 197
 ImageConverter (class in *sphinx.transforms.post_transforms.images*), 363
 imgmath_add_tooltips
 configuration value, 204
 imgmath_dvipng
 configuration value, 205
 imgmath_dvipng_args
 configuration value, 205
 imgmath_dvisvgm
 configuration value, 205
 imgmath_dvisvgm_args
 configuration value, 205
 imgmath_embed
 configuration value, 205
 imgmath_font_size
 configuration value, 204
 imgmath_image_format

 configuration value, 204
 imgmath_latex
 configuration value, 204
 imgmath_latex_args
 configuration value, 205
 imgmath_latex_preamble
 configuration value, 205
 imgmath_use_preview
 configuration value, 204
 implementation
 (*sphinxcontrib.serializinghtml.SerializingHTMLBuilder* attribute), 128
 in version
 changes, 52
 include_patterns
 configuration value, 76
 include-read
 event, 330
 index (class in *sphinx.addnodes*), 355
 Index (class in *sphinx.domains*), 347
 index (directive), 61
 :name: (directive option), 62
 index (role), 62
 indices (*sphinx.domains.Domain* attribute), 344
 info() (*sphinx.util.logging.SphinxLoggerAdapter* method), 357
 inheritance_alias
 configuration value, 199
 inheritance_edge_attrs
 configuration value, 199
 inheritance_graph_attrs
 configuration value, 199
 inheritance_node_attrs
 configuration value, 199
 inheritance-diagram (directive), 197
 inherited_members (built-in variable), 183
 init() (in module *sphinx.locale*), 358
 init() (*sphinx.application.TemplateBridge* method), 333
 init() (*sphinx.builders.Builder* method), 338
 init_console() (in module *sphinx.locale*), 358
 init_indexing() (*sphinxcontrib.websupport.search.BaseSearch* method), 241
 initial_data (*sphinx.domains.Domain* attribute), 344
 inliner (*sphinx.util.docutils.SphinxRole* attribute), 362
 intersphinx_cache_limit
 configuration value, 201
 intersphinx_disabled_reftypes
 configuration value, 202
 intersphinx_mapping
 configuration value, 200
 intersphinx_timeout
 configuration value, 202
 is_available()
 (*sphinx.transforms.post_transforms.images.ImageConverter* method), 363
 is_parallel_allowed() (*sphinx.application.Sphinx* method), 327
 is_supported()
 (*sphinx.transforms.post_transforms.SphinxPostTransform* method), 361

J

javascript_maximum_signature_line_length
 configuration value, 115
 js:attr (role), 154
 js:attribute (directive), 154
 js:class (directive), 154
 :single-line-parameter-list: (directive option), 154
 js:class (role), 154

js:data (directive), 154
 js:data (role), 154
 js:func (role), 154
 js:function (directive), 153
 : single-line-parameter-list: (directive option), 153
 js:meth (role), 154
 js:method (directive), 154
 : single-line-parameter-list: (directive option), 154
 js:mod (role), 154
 js:module (directive), 153
 jsmath_path
 configuration value, 207
 JSONHTMLBuilder (class in sphinxcontrib.serializinghtml), 129

K

kbd (role), 46
 keep_warnings
 configuration value, 77
 keyword (role), 72

L

label (sphinx.domains.Domain attribute), 344
 language
 configuration value, 84
 language (built-in variable), 275
 last_updated (built-in variable), 275
 latex
 module, 285
 latex_additional_files
 configuration value, 106
 latex_appendices
 configuration value, 103
 latex_docclass
 configuration value, 106
 latex_documents
 configuration value, 103
 latex_domain_indices
 configuration value, 103
 latex_elements
 configuration value, 106
 latex_engine
 configuration value, 102
 latex_logo
 configuration value, 103
 latex_show_pagerefs
 configuration value, 103
 latex_show_urls
 configuration value, 104
 latex_table_style
 configuration value, 104
 latex_theme
 configuration value, 106
 latex_theme_options
 configuration value, 106
 latex_theme_path
 configuration value, 106
 latex_toplevel_sectioning
 configuration value, 103
 latex_use_latex_multicolumn
 configuration value, 104
 latex_use_xindy
 configuration value, 105
 LaTeXBuilder (class in sphinx.builders.latex), 125
 lineno (docutils.parsers.rst.Directive attribute), 341
 lineno (sphinx.util.docutils.SphinxRole attribute), 362
 linkcheck_allow_unauthorized
 configuration value, 113

linkcheck_allowed_redirects
 configuration value, 110
 linkcheck_anchors
 configuration value, 111
 linkcheck_anchors_ignore
 configuration value, 111
 linkcheck_anchors_ignore_for_url
 configuration value, 112
 linkcheck_auth
 configuration value, 112
 linkcheck_exclude_documents
 configuration value, 112
 linkcheck_ignore
 configuration value, 110
 linkcheck_rate_limit_timeout
 configuration value, 112
 linkcheck_report_timeouts_as_broken
 configuration value, 113
 linkcheck_request_headers
 configuration value, 110
 linkcheck_retries
 configuration value, 111
 linkcheck_timeout
 configuration value, 111
 linkcheck_workers
 configuration value, 111
 linkcheck-process-uri
 event, 332
 linkcode_resolve
 configuration value, 203
 linking
 automatic, 200
 literal_emphasis (class in sphinx.addnodes), 356
 literalinclude (directive), 57
 locale_dirs
 configuration value, 85
 log() (sphinx.util.logging.SphinxLoggerAdapter method), 357
 logo_url (built-in variable), 275

M

mailheader (role), 46
 makevar (role), 46
 man_make_section_directory
 configuration value, 108
 man_pages
 configuration value, 107
 man_show_urls
 configuration value, 108
 manpage (role), 46
 manpages_url
 configuration value, 79
 ManualPageBuilder (class in sphinx.builders.manpage), 127
 master_document, 416
 master_doc
 configuration value, 75
 master_doc (built-in variable), 275
 math (directive), 65
 math (role), 45
 math:numref (role), 155
 math_eqref_format
 configuration value, 88
 math_number_all
 configuration value, 88
 math_numfig
 configuration value, 88
 mathjax2_config
 configuration value, 207

mathjax3_config
 configuration value, 206
mathjax_config
 configuration value, 207
mathjax_options
 configuration value, 206
mathjax_path
 configuration value, 206
maximum_signature_line_length
 configuration value, 82
members (built-in variable), 183
menuselection (role), 46
merge_domaindata() (sphinx.domains.Domain method), 343
merge_other() (sphinx.environment.collectors.EnvironmentCollector method), 339
MessageCatalogBuilder (class in sphinx.builders.gettext), 129
meta (built-in variable), 276
metadata (sphinx.environment.BuildEnvironment attribute), 336
metatags (built-in variable), 277
methods (built-in variable), 184
mimetype (role), 47
missing-reference
 event, 331
modindex_common_prefix
 configuration value, 83
module
 conf, 73
 docutils.parsers.rst, 340
 latex, 285
 sphinx.addnodes, 351
 sphinx.application, 314
 sphinx.builders, 122
 sphinx.builders.changes, 129
 sphinx.builders.dirhtml, 123
 sphinx.builders.dummy, 130
 sphinx.builders.epub3, 125
 sphinx.builders.gettext, 129
 sphinx.builders.html, 123
 sphinx.builders.latex, 125
 sphinx.builders.linkcheck, 130
 sphinx.builders.manpage, 127
 sphinx.builders.singlehtml, 123
 sphinx.builders.texinfo, 127
 sphinx.builders.text, 127
 sphinx.builders.xml, 130
 sphinx.directives, 348
 sphinx.domains, 342
 sphinx.domains.python, 350
 sphinx.environment, 335
 sphinx.environment.collectors, 339
 sphinx.errors, 334
 sphinx.ext.autodoc, 166
 sphinx.ext.autosectionlabel, 179
 sphinx.ext.autosummary, 180
 sphinx.ext.coverage, 184
 sphinx.ext.doctest, 186
 sphinx.ext.duration, 191
 sphinx.ext.extlinks, 192
 sphinx.ext.githubpages, 193
 sphinx.ext.graphviz, 193
 sphinx.ext.ifconfig, 196
 sphinx.ext.imgconverter, 196
 sphinx.ext.imgmath, 204
 sphinx.ext.inheritance_diagram, 197
 sphinx.ext.intersphinx, 200
 sphinx.ext.jsmath, 207
 sphinx.ext.linkcode, 203
 sphinx.ext.mathbase, 204

 sphinx.ext.mathjax, 206
 sphinx.ext.napoleon, 208
 sphinx.ext.todo, 218
 sphinx.ext.viewcode, 218
 sphinx.parsers, 351
 sphinxcontrib.applehelp, 124
 sphinxcontrib.devhelp, 125
 sphinxcontrib.htmlhelp, 124
 sphinxcontrib.qthelp, 124
module (built-in variable), 183
modules (built-in variable), 184
modules (sphinx.domains.python.PythonDomain attribute), 350

N

name (built-in variable), 183
name (docutils.parsers.rst.Directive attribute), 341
name (sphinx.builders.Builder attribute), 337
name (sphinx.builders.changes.ChangesBuilder attribute), 130
name (sphinx.builders.dirhtml.DirectoryHTMLBuilder attribute), 123
name (sphinx.builders.dummy.DummyBuilder attribute), 130
name (sphinx.builders.epub3.Epub3Builder attribute), 125
name (sphinx.builders.gettext.MessageCatalogBuilder attribute), 129
name (sphinx.builders.html.StandaloneHTMLBuilder attribute), 123
name (sphinx.builders.latex.LaTeXBuilder attribute), 126
name (sphinx.builders.linkcheck.CheckExternalLinksBuilder attribute), 130
name (sphinx.builders.manpage.ManualPageBuilder attribute), 127
name (sphinx.builders.singlehtml.SingleFileHTMLBuilder attribute), 123
name (sphinx.builders.texinfo.TexinfoBuilder attribute), 127
name (sphinx.builders.text.TextBuilder attribute), 127
name (sphinx.builders.xml.PseudoXMLBuilder attribute), 131
name (sphinx.builders.xml.XMLBuilder attribute), 130
name (sphinx.domains.Domain attribute), 345
name (sphinx.util.docutils.SphinxRole attribute), 362
name (sphinxcontrib.applehelp.AppleHelpBuilder attribute), 125
name (sphinxcontrib.devhelp.DevhelpBuilder attribute), 125
name (sphinxcontrib.htmlhelp.HTMLHelpBuilder attribute), 124
name (sphinxcontrib.qthelp.QtHelpBuilder attribute), 124
name (sphinxcontrib.serializinghtml.JSONHTMLBuilder attribute), 129
name (sphinxcontrib.serializinghtml.PickleHTMLBuilder attribute), 128
napoleon_attr_annotations
 configuration value, 217
napoleon_custom_sections
 configuration value, 217
napoleon_google_docstring
 configuration value, 213
napoleon_include_init_with_doc
 configuration value, 213
napoleon_include_private_with_doc
 configuration value, 213
napoleon_include_special_with_doc
 configuration value, 214
napoleon_numpy_docstring
 configuration value, 213
napoleon_preprocess_types
 configuration value, 216
napoleon_type_aliases
 configuration value, 216
napoleon_use_admonition_for_examples
 configuration value, 214
napoleon_use_admonition_for_notes
 configuration value, 214
napoleon_use_admonition_for_references
 configuration value, 215
napoleon_use_ivar

- configuration value, 215
- napoleon_use_keyword
 - configuration value, 216
- napoleon_use_param
 - configuration value, 215
- napoleon_use_rtype
 - configuration value, 216
- needs_extensions
 - configuration value, 79
- needs_sphinx
 - configuration value, 79
- new_serialno() (*sphinx.environment.BuildEnvironment* method), 336
- newest_template_mtime() (*sphinx.application.TemplateBridge* method), 333
- newsgroup (role), 47
- next (built-in variable), 277
- nitpick_ignore
 - configuration value, 79
- nitpick_ignore_regx
 - configuration value, 79
- nitpicky
 - configuration value, 79
- note, 52
- note (directive), 52
- note_dependency() (*sphinx.environment.BuildEnvironment* method), 336
- note_module() (*sphinx.domains.python.PythonDomain* method), 350
- note_object() (*sphinx.domains.python.PythonDomain* method), 350
- note_reread() (*sphinx.environment.BuildEnvironment* method), 336
- numfig
 - configuration value, 80
- numfig_format
 - configuration value, 80
- numfig_secnum_depth
 - configuration value, 80
- numref (role), 72

O

- object, 416
- object (directive), 136
- object_types (*sphinx.domains.Domain* attribute), 345
- object-description-transform
 - event, 331
- ObjectDescription (class in *sphinx.directives*), 348
- objects (*sphinx.domains.python.PythonDomain* attribute), 350
- objname (built-in variable), 183
- objtype (built-in variable), 183
- ObjType (class in *sphinx.domains*), 346
- only (class in *sphinx.addnodes*), 356
- only (directive), 63
- option (directive), 135
- option (role), 73
- option_emphasise_placeholders
 - configuration value, 83
- option_spec (*docutils.parsers.rst.Directive* attribute), 340
- option_spec (*sphinx.directives.ObjectDescription* attribute), 349
- optional_arguments (*docutils.parsers.rst.Directive* attribute), 340
- optional_arguments (*sphinx.directives.ObjectDescription* attribute), 349
- options (*docutils.parsers.rst.Directive* attribute), 341
- options (*sphinx.util.docutils.SphinxRole* attribute), 362
- out_suffix (*sphinxcontrib.serializinghtml.SerializingHTMLBuilder* attribute), 128
- outdir (*sphinx.application.Sphinx* attribute), 329

P

- page_source_suffix (built-in variable), 277
- pagename (built-in variable), 275
- parallel_read_safe (*sphinx.util.typing.ExtensionMetadata* attribute), 365
- parallel_write_safe (*sphinx.util.typing.ExtensionMetadata* attribute), 365
- parents (built-in variable), 277
- Parser (class in *sphinx.parsers*), 351
- path2doc() (*sphinx.project.Project* method), 335
- pathto()
 - built-in function, 274
- pending_logging() (in module *sphinx.util.logging*), 357
- pending_warnings() (in module *sphinx.util.logging*), 357
- pending_xref (class in *sphinx.addnodes*), 355
- pending_xref_condition (class in *sphinx.addnodes*), 355
- pep (role), 47
- PickleHTMLBuilder (class in *sphinxcontrib.serializinghtml*), 128
- post_build() (*sphinxcontrib.websupport.storage.StorageBackend* method), 243
- pre_build() (*sphinxcontrib.websupport.storage.StorageBackend* method), 243
- prefixed_warnings() (in module *sphinx.util.logging*), 358
- prepare_writing() (*sphinx.builders.Builder* method), 338
- prev (built-in variable), 277
- primary
 - domain, 77
- primary_domain
 - configuration value, 77
- process_doc() (*sphinx.domains.Domain* method), 343
- process_doc() (*sphinx.environment.collectors.EnvironmentCollector* method), 339
- process_field_xref() (*sphinx.domains.Domain* method), 344
- process_vote() (*sphinxcontrib.websupport.storage.StorageBackend* method), 243
- process_vote() (*sphinxcontrib.websupport.WebSupport* method), 240
- production (class in *sphinx.addnodes*), 356
- productionlist (class in *sphinx.addnodes*), 356
- productionlist (directive), 66
- program (directive), 135
- program (role), 47
- project
 - configuration value, 74
- project (built-in variable), 275
- Project (class in *sphinx.project*), 335
- project (*sphinx.application.Sphinx* attribute), 328
- project (*sphinx.environment.BuildEnvironment* attribute), 336
- project_copyright
 - configuration value, 74
- PseudoXMLBuilder (class in *sphinx.builders.xml*), 131
- py:attr (role), 163
- py:attribute (directive), 158
 - :canonical: (directive option), 158
 - :type: (directive option), 158
 - :value: (directive option), 158
- py:class (directive), 157
 - :canonical: (directive option), 157
 - :final: (directive option), 157
 - :single-line-parameter-list: (directive option), 157
 - :single-line-type-parameter-list: (directive option), 158
- py:class (role), 163
- py:classmethod (directive), 159
- py:const (role), 163
- py:currentmodule (directive), 155
- py:data (directive), 156
 - :canonical: (directive option), 156

- `:type:` (directive option), 156
- `:value:` (directive option), 156
- `py:data` (role), 163
- `py:decorator` (directive), 159
 - `:single-line-parameter-list:` (directive option), 160
 - `:single-line-type-parameter-list:` (directive option), 160
- `py:decoratormethod` (directive), 160
- `py:exc` (role), 163
- `py:exception` (directive), 156
 - `:final:` (directive option), 157
 - `:single-line-parameter-list:` (directive option), 157
 - `:single-line-type-parameter-list:` (directive option), 157
- `py:func` (role), 163
- `py:function` (directive), 155
 - `:async:` (directive option), 156
 - `:canonical:` (directive option), 156
 - `:single-line-parameter-list:` (directive option), 156
 - `:single-line-type-parameter-list:` (directive option), 156
- `py:meth` (role), 163
- `py:method` (directive), 158
 - `:abstractmethod:` (directive option), 159
 - `:async:` (directive option), 159
 - `:canonical:` (directive option), 159
 - `:classmethod:` (directive option), 159
 - `:final:` (directive option), 159
 - `:single-line-parameter-list:` (directive option), 159
 - `:single-line-type-parameter-list:` (directive option), 159
 - `:staticmethod:` (directive option), 159
- `py:mod` (role), 163
- `py:module` (directive), 155
 - `:deprecated:` (directive option), 155
 - `:platform:` (directive option), 155
 - `:synopsis:` (directive option), 155
- `py:obj` (role), 163
- `py:property` (directive), 158
 - `:abstractmethod:` (directive option), 158
 - `:classmethod:` (directive option), 158
 - `:type:` (directive option), 158
- `py:staticmethod` (directive), 159
- `pygments_style`
 - configuration value, 82
- Python Enhancement Proposals
 - PEP 257#what-is-a-docstring, 24
 - PEP 287, 208
 - PEP 420, 412
 - PEP 440, 388
 - PEP 440#version-specifiers, 187
 - PEP 484, 211
 - PEP 526, 211, 217
 - PEP 563, 175
 - PEP 585, 426
 - PEP 604, 114
 - PEP 695, 157, 161, 305
 - PEP 696, 161
 - PEP 8, 47
- `python:PYTHONWARNINGS`, 389
- `python_display_short_literal_types`
 - configuration value, 114
- `python_maximum_signature_line_length`
 - configuration value, 115
- `python_use_unqualified_type_names`
 - configuration value, 114
- `PythonDomain` (class in `sphinx.domains.python`), 350
- `PyType_GenericAlloc` (C function), 137

Q

- `qthelp_basename`
 - configuration value, 110
- `qthelp_namespace`
 - configuration value, 110
- `qthelp_theme`
 - configuration value, 110
- `qthelp_theme_options`
 - configuration value, 110
- `QtHelpBuilder` (class in `sphinxcontrib.qthelp`), 124
- `query()` (`sphinxcontrib.websupport.search.BaseSearch` method), 241

R

- `rawtext` (`sphinx.util.docutils.SphinxRole` attribute), 362
- `ref` (role), 70
- `ReferenceRole` (class in `sphinx.util.docutils`), 362
- `regexp` (role), 47
- `relbar()`
 - built-in function, 274
- `reldelim1` (built-in variable), 274
- `reldelim2` (built-in variable), 274
- `release`
 - configuration value, 74
- `release` (built-in variable), 275
- `relfn2path()` (`sphinx.environment.BuildEnvironment` method), 336
- `rellinks` (built-in variable), 276
- `RemoveInSphinxXXXWarning`, 416
- `render()` (`sphinx.application.TemplateBridge` method), 333
- `render_string()` (`sphinx.application.TemplateBridge` method), 333
- `require_sphinx()` (`sphinx.application.Sphinx` static method), 314
- `required_arguments` (`docutils.parsers.rst.Directive` attribute), 340
- `required_arguments` (`sphinx.directives.ObjectDescription` attribute), 349
- `resolve_any_xref()` (`sphinx.domains.Domain` method), 344
- `resolve_xref()` (`sphinx.domains.Domain` method), 344
- `restore()` (`sphinx.project.Project` method), 335
- `reStructuredText`, 416
- RFC
 - RFC 2324, 48
 - RFC 3986#section-4.4, 423
 - RFC 8081, 430
- `rft` (role), 47
- `role`, 416
- `role()` (`sphinx.domains.Domain` method), 344
- `roles` (`sphinx.domains.Domain` attribute), 345
- `root` document, 416
- `root_doc`
 - configuration value, 75
- `root_doc` (built-in variable), 275
- `rst:dir` (role), 165
- `rst:directive` (directive), 164
- `rst:directive:option` (directive), 164
 - `:type:` (directive option), 165
- `rst:role` (directive), 165
- `rst:role` (role), 165
- `rst_epilog`
 - configuration value, 76
- `rst_prolog`
 - configuration value, 76
- `rubric` (directive), 53
- `run()` (`docutils.parsers.rst.Directive` method), 340
- `run()` (`sphinx.directives.ObjectDescription` method), 349
- `run()` (`sphinx.transforms.post_transforms.SphinxPostTransform` method), 361

S

- `samp` (role), 47

script_files (built-in variable), 274
 searchindex_filename
 (sphinxcontrib.serializinghtml.SerializingHTMLBuilder
 attribute), 128
 sectionauthor (directive), 60
 seealso (class in sphinx.addnodes), 354
 seealso (directive), 53
 SerializingHTMLBuilder (class in sphinxcontrib.serializinghtml),
 128
 set_application() (sphinx.parsers.Parser method), 351
 set_source_info() (sphinx.util.docutils.SphinxDirective method),
 361
 set_translator() (sphinx.application.Sphinx method), 316
 setup() (sphinx.domains.Domain method), 344
 setup_extension() (sphinx.application.Sphinx method), 314
 shorttitle (built-in variable), 276
 show_authors
 configuration value, 83
 show_source (built-in variable), 276
 show_warning_types
 configuration value, 77
 sidebar()
 built-in function, 274
 SIG_ELEMENTS (in module sphinx.addnodes), 353
 SingleFileHTMLBuilder (class in sphinx.builders.singlehtml), 123
 singlehtml_sidebars
 configuration value, 96
 smartquotes
 configuration value, 80
 smartquotes_action
 configuration value, 80
 smartquotes_excludes
 configuration value, 80
 snippets
 testing, 186
 source_directory, 416
 source_encoding
 configuration value, 75
 source_parsers
 configuration value, 75
 source_suffix
 configuration value, 74
 source_suffix (sphinx.project.Project attribute), 335
 source-read
 event, 330
 sourcecode, 54
 sourcecode (directive), 55
 sourcename (built-in variable), 277
 Sphinx (class in sphinx.application), 314
 sphinx.addnodes
 module, 351
 sphinx.application
 module, 314
 sphinx.builders
 module, 122
 sphinx.builders.changes
 module, 129
 sphinx.builders.dirhtml
 module, 123
 sphinx.builders.dummy
 module, 130
 sphinx.builders.epub3
 module, 125
 sphinx.builders.gettext
 module, 129
 sphinx.builders.html
 module, 123
 sphinx.builders.latex
 module, 125
 sphinx.builders.linkcheck
 module, 130
 sphinx.builders.manpage
 module, 127
 sphinx.builders.singlehtml
 module, 123
 sphinx.builders.texinfo
 module, 127
 sphinx.builders.text
 module, 127
 sphinx.builders.xml
 module, 130
 sphinx.directives
 module, 348
 sphinx.domains
 module, 342
 sphinx.domains.python
 module, 350
 sphinx.environment
 module, 335
 sphinx.environment.collectors
 module, 339
 sphinx.errors
 module, 334
 sphinx.ext.autodoc
 module, 166
 sphinx.ext.autosectionlabel
 module, 179
 sphinx.ext.autosummary
 module, 180
 sphinx.ext.coverage
 module, 184
 sphinx.ext.doctest
 module, 186
 sphinx.ext.duration
 module, 191
 sphinx.ext.extlinks
 module, 192
 sphinx.ext.githubpages
 module, 193
 sphinx.ext.graphviz
 module, 193
 sphinx.ext.ifconfig
 module, 196
 sphinx.ext.imgconverter
 module, 196
 sphinx.ext.imgmath
 module, 204
 sphinx.ext.inheritance_diagram
 module, 197
 sphinx.ext.intersphinx
 module, 200
 sphinx.ext.jsmath
 module, 207
 sphinx.ext.linkcode
 module, 203
 sphinx.ext.mathbase
 module, 204
 sphinx.ext.mathjax
 module, 206
 sphinx.ext.napoleon
 module, 208
 sphinx.ext.todo
 module, 218
 sphinx.ext.viewcode
 module, 218
 sphinx.parsers

- module, 351
- sphinx_version (*built-in variable*), 276
- sphinx_version_tuple (*built-in variable*), 276
- sphinx-apidoc command line option
 - A, 412
 - E, 411
 - F, 411
 - H, 412
 - M, 412
 - P, 412
 - R, 412
 - T, 411
 - V, 412
 - dry-run, 411
 - follow-links, 411
 - force, 411
 - full, 411
 - implicit-namespaces, 412
 - module-first, 412
 - no-headings, 411
 - no-toc, 411
 - private, 412
 - separate, 411
 - templatedir, 412
 - tocfile, 411
 - a, 412
 - d, 411
 - e, 411
 - f, 411
 - l, 411
 - n, 411
 - o, 411
 - q, 411
 - s, 411
 - t, 412
- sphinx-autogen command line option
 - imported-members, 413
 - respect-module-all, 413
 - suffix, 413
 - templates, 413
 - a, 413
 - i, 413
 - o, 413
 - s, 413
 - t, 413
- sphinx-build command line option
 - A, 408
 - C, 407
 - D, 407
 - E, 407
 - M, 406
 - N, 408
 - P, 409
 - Q, 408
 - T, 409
 - W, 408
 - builder, 406
 - color, 408
 - config-dir, 407
 - define, 407
 - doctree-dir, 407
 - fail-on-warning, 408
 - fresh-env, 407
 - help, 409
 - html-define, 408
 - isolated, 407
 - jobs, 407
 - keep-going, 408
 - nitpicky, 408
 - no-color, 408
 - pdb, 409
 - quiet, 408
 - show-traceback, 409
 - silent, 408
 - tag, 407
 - verbose, 408
 - version, 409
 - warning-file, 408
 - write-all, 406
 - a, 406
 - b, 406
 - c, 407
 - d, 407
 - h, 409
 - j, 407
 - n, 408
 - q, 408
 - t, 407
 - v, 408
 - w, 408
- sphinx-quickstart command line option
 - author, 404
 - batchfile, 405
 - dot, 403
 - ext-autodoc, 404
 - ext-coverage, 404
 - ext-doctest, 404
 - ext-githubpages, 404
 - ext-ifconfig, 404
 - ext-imgmath, 404
 - ext-intersphinx, 404
 - ext-mathjax, 404
 - ext-todo, 404
 - ext-viewcode, 404
 - extensions, 404
 - help, 403
 - language, 404
 - makefile, 405
 - master, 404
 - no-batchfile, 405
 - no-makefile, 405
 - no-sep, 403
 - no-use-make-mode, 405
 - project, 404
 - quiet, 403
 - release, 404
 - sep, 403
 - suffix, 404
 - templatedir, 405
 - use-make-mode, 405
 - version, 403
 - a, 404
 - d, 405
 - h, 403
 - l, 404
 - p, 404
 - q, 403
 - r, 404
 - t, 405
 - v, 404
- sphinxcontrib.applehelp
 - module, 124
- sphinxcontrib.devhelp
 - module, 125
- sphinxcontrib.htmlhelp
 - module, 124

sphinxcontrib.qthelp
 module, 124

SphinxDirective (class in sphinx.util.docutils), 361

SphinxError, 334

SphinxLoggerAdapter (class in sphinx.util.logging), 356

SphinxPostTransform (class in sphinx.transforms.post_transforms), 361

SphinxRole (class in sphinx.util.docutils), 362

SphinxTransform (class in sphinx.transforms), 360

srcdir (sphinx.application.Sphinx attribute), 328

srcdir (sphinx.environment.BuildEnvironment attribute), 336

srcdir (sphinx.project.Project attribute), 335

StandaloneHTMLBuilder (class in sphinx.builders.html), 123

start_of_file (class in sphinx.addnodes), 356

state (docutils.parsers.rst.Directive attribute), 341

state_machine (docutils.parsers.rst.Directive attribute), 341

StorageBackend (class in sphinxcontrib.websupport.storage), 242

strip_signature_backslash
 configuration value, 83

styles (built-in variable), 276

substitutions
 global, 42, 76, 77

supported_data_uri_images (sphinx.builders.Builder attribute), 337

supported_image_types (sphinx.builders.Builder attribute), 337

supported_image_types (sphinx.builders.changes.ChangesBuilder attribute), 130

supported_image_types
 (sphinx.builders.dirhtml.DirectoryHTMLBuilder attribute), 123

supported_image_types (sphinx.builders.dummy.DummyBuilder attribute), 130

supported_image_types (sphinx.builders.epub3.Epub3Builder attribute), 125

supported_image_types
 (sphinx.builders.gettext.MessageCatalogBuilder attribute), 129

supported_image_types
 (sphinx.builders.html.StandaloneHTMLBuilder attribute), 123

supported_image_types (sphinx.builders.latex.LaTeXBuilder attribute), 126

supported_image_types
 (sphinx.builders.linkcheck.CheckExternalLinksBuilder attribute), 130

supported_image_types
 (sphinx.builders.manpage.ManualPageBuilder attribute), 127

supported_image_types
 (sphinx.builders.singlehtml.SingleFileHTMLBuilder attribute), 124

supported_image_types (sphinx.builders.texinfo.TexinfoBuilder attribute), 128

supported_image_types (sphinx.builders.text.TextBuilder attribute), 127

supported_image_types (sphinx.builders.xml.PseudoXMLBuilder attribute), 131

supported_image_types (sphinx.builders.xml.XMLBuilder attribute), 131

supported_image_types
 (sphinxcontrib.applehelp.AppleHelpBuilder attribute), 125

supported_image_types (sphinxcontrib.devhelp.DevhelpBuilder attribute), 125

supported_image_types (sphinxcontrib.htmlhelp.HTMLHelpBuilder attribute), 124

supported_image_types (sphinxcontrib.qthelp.QtHelpBuilder attribute), 124

supported_image_types
 (sphinxcontrib.serializinghtml.JSONHTMLBuilder attribute), 129

supported_image_types
 (sphinxcontrib.serializinghtml.PickleHTMLBuilder attribute), 129

supported_remote_images (sphinx.builders.Builder attribute), 337

suppress_warnings
 configuration value, 77

T

table of
 contents, 48

tabularcolumns (directive), 63

target (sphinx.util.docutils.ReferenceRole attribute), 363

template_bridge
 configuration value, 76

TemplateBridge (class in sphinx.application), 333

templates_path
 configuration value, 76

term (role), 73

testcleanup (directive), 186

testcode (directive), 187

testing
 automatic, 186

 snippets, 186

testoutput (directive), 188

testsetup (directive), 186

texinfo_appendices
 configuration value, 109

texinfo_cross_references
 configuration value, 109

texinfo_documents
 configuration value, 108

texinfo_domain_indices
 configuration value, 109

texinfo_elements
 configuration value, 109

texinfo_no_detailmenu
 configuration value, 109

texinfo_show_urls
 configuration value, 109

TexinfoBuilder (class in sphinx.builders.texinfo), 127

text (sphinx.util.docutils.SphinxRole attribute), 362

text_add_secnumbers
 configuration value, 107

text_newlines
 configuration value, 107

text_secnumber_suffix
 configuration value, 107

text_sectionchars
 configuration value, 107

TextBuilder (class in sphinx.builders.text), 127

ThemeError, 334

title (built-in variable), 276

title (sphinx.util.docutils.ReferenceRole attribute), 363

titles (sphinx.environment.BuildEnvironment attribute), 336

tls_cacerts
 configuration value, 81

tls_verify
 configuration value, 81

toc (built-in variable), 277

toc_object_entries
 configuration value, 83

toc_object_entries_show_parents
 configuration value, 83

toctree (built-in variable), 277

toctree (*class in sphinx.addnodes*), 356
toctree (*directive*), 49
today
 configuration value, 81
today_fmt
 configuration value, 81
todo (*directive*), 218
todo_emit_warnings
 configuration value, 218
todo_include_todos
 configuration value, 218
todo_link_only
 configuration value, 218
todo-defined
 event, 218
todolist (*directive*), 218
token (*role*), 72
transform_content() (*sphinx.directives.ObjectDescription method*), 349
translation_progress_classes
 configuration value, 87
trim_doctest_flags
 configuration value, 83
trim_footnote_reference_space
 configuration value, 83

U

underline (*built-in variable*), 183
update_username()
 (*sphinxcontrib.websupport.storage.StorageBackend method*), 244
use_opensearch (*built-in variable*), 276
user_agent
 configuration value, 81

V

verbose() (*sphinx.util.logging.SphinxLoggerAdapter method*), 357
version
 configuration value, 74
version (*built-in variable*), 276
version (*sphinx.util.typing.ExtensionMetadata attribute*), 365
version_info (*in module sphinx*), 333
versionadded (*directive*), 52
versionchanged (*directive*), 52
versionmodified (*class in sphinx.addnodes*), 354
versionremoved (*directive*), 53
VersionRequirementError, 334
viewcode_enable_epub
 configuration value, 219
viewcode_follow_imported_members
 configuration value, 219
viewcode_line_numbers
 configuration value, 219
viewcode-find-source
 event, 219
viewcode-follow-imported
 event, 220

W

warn-missing-reference
 event, 331
warning, 52
warning (*directive*), 52
warning()
 built-in function, 274
warning() (*sphinx.util.logging.SphinxLoggerAdapter method*), 357

WebSupport (*class in sphinxcontrib.websupport*), 237
write_doc() (*sphinx.builders.Builder method*), 338

X

xml_pretty
 configuration value, 113
XMLBuilder (*class in sphinx.builders.xml*), 130