

---

# **Androguard Documentation**

***Release 3.3.5***

**Anthony Desnos**

**Feb 18, 2019**



---

## Contents

---

<b>1 Documentation</b>	<b>3</b>
1.1 Introduction . . . . .	3
1.2 Tools . . . . .	18
<b>2 Commonly used APIs</b>	<b>31</b>
<b>3 Complete Python API</b>	<b>33</b>
3.1 androguard package . . . . .	33
<b>4 Indices and tables</b>	<b>165</b>
<b>Python Module Index</b>	<b>167</b>



Androguard is a full python tool to play with Android files.

- DEX, ODEX
- APK
- Android's binary xml
- Android resources
- Disassemble DEX/ODEX bytecodes
- Decompiler for DEX/ODEX files

You can either use the cli or graphical frontend for androguard, or use androguard purely as a library for your own tools and scripts.



# CHAPTER 1

---

## Documentation

---

### 1.1 Introduction

#### 1.1.1 Installation

There are several ways how to install androguard.

Before you start, make sure you are using a supported python version! Although androguard should run with python 2.7.x, we highly recommend a newer version like python 3.6! The python 2.x support might be dropped in the future. For Windows, we recommend using the Anaconda python 3.6.x package.

Note that there is no PyQt5 for python 2.x! If you like to use the GUI, please use a newer version of python!

**Warning:** The magic library might not work out of the box. If your magic library does not work, please refer to the installation instructions of [python-magic](#).

#### PIP

The usual way to install a python packages is by using pypi.python.org and it's package installer *pip*. Just use

```
$ pip install -U androguard[magic,GUI]
```

to install androguard including the GUI and magic file type detection. In order to use features which use `dot`, you need [Graphviz](#) installed. This is not a python dependency but a binary package! Please follow the installation instructions for [GraphvizInstall](#).

You can also make use of an *virtualenv*, to separate the installation from your system wide packages:

```
$ virtualenv venv-androguard
$ source venv-androguard/bin/activate
$ pip install -U androguard[magic,GUI]
```

pip should install all required packages too.

### Debian / Ubuntu

Debian has androguard in its repository. You can just install it using `apt install androguard`. All required dependencies are automatically installed.

### Install from Source

Use git to fetch the sources, then install it. Please install git and python on your own. Beware, that androguard requires python 2.7 or at least 3.4 to work. Pypy >= 5.9.0 should work as well but is not tested.

```
$ git clone --recursive https://github.com/androguard/androguard.git
$ cd androguard
$ virtualenv -p python3 venv-androguard
$ source venv-androguard/bin/activate
$ pip install .[magic,GUI]
```

The dependencies, defined in `setup.py` will be automatically installed.

For development purposes, you might want to install the extra dependencies for *docs* and *tests* as well:

```
$ git clone --recursive https://github.com/androguard/androguard.git
$ cd androguard
$ virtualenv -p python3 venv-androguard
$ source venv-androguard/bin/activate
$ pip install -e .[magic,GUI,tests,docs]
```

You can then create a local copy of the documentation:

```
$ python3 setup.py build_sphinx
```

Which is generated in `build/sphinx/html`.

### 1.1.2 Getting Started

#### Using Androguard tools

There are already some tools for specific purposes.

To just decode the `AndroidManifest.xml` or `resources.arsc`, there are `androaxml.py` and `androarsc.py`. To get information about the certificates use `androsign.py`.

If you want to create call graphs, use `androcg.py`, or if you want control flow graphs, you can use `androdd.py`.

#### Using Androlyze and the python API

The easiest way to analyze APK files, is by using `androlyze.py`. It will start a iPython shell and has all modules loaded to get into action.

For analyzing and loading APK or DEX files, some wrapper functions exists. Use `AnalyzeAPK(filename)` or `AnalyzeDEX(filename)` to load a file and start analyzing. There are already plenty of APKs in the androguard repo, you can either use one of those, or start your own analysis.

```
$ androlyze.py
Androguard version 3.1.1 started
In [1]: a, d, dx = AnalyzeAPK("examples/android/abcore/app-prod-debug.apk")
# Depending on the size of the APK, this might take a while...

In [2]:
```

The three objects you get are `a` an *APK* object, `d` an array of *DalvikVMFormat* object and `dx` an *Analysis* object.

Inside the *APK* object, you can find all information about the APK, like package name, permissions, the *AndroidManifest.xml* or its resources.

The *DalvikVMFormat* corresponds to the DEX file found inside the APK file. You can get classes, methods or strings from the DEX file. But when using multi-DEX APK's it might be a better idea to get those from another place. The *Analysis* object should be used instead, as it contains special classes, which link information about the `classes.dex` and can even handle many DEX files at once.

## Getting Information about an APK

If you have sucessfully loaded your APK using `AnalyzeAPK`, you can now start getting information about the APK.

For example, getting the permissions of the APK:

```
In [2]: a.get_permissions()
Out[2]:
['android.permission.INTERNET',
 'android.permission.WRITE_EXTERNAL_STORAGE',
 'android.permission.ACCESS_WIFI_STATE',
 'android.permission.ACCESS_NETWORK_STATE']
```

or getting a list of all activites, which are defined in the *AndroidManifest.xml*:

```
In [3]: a.get_activities()
Out[3]:
['com.greenaddress.abcore.MainActivity',
 'com.greenaddress.abcore.BitcoinConfEditActivity',
 'com.greenaddress.abcore.AboutActivity',
 'com.greenaddress.abcore.SettingsActivity',
 'com.greenaddress.abcore.DownloadSettingsActivity',
 'com.greenaddress.abcore.PeerActivity',
 'com.greenaddress.abcore.ProgressActivity',
 'com.greenaddress.abcore.LogActivity',
 'com.greenaddress.abcore.ConsoleActivity',
 'com.greenaddress.abcore.DownloadActivity']
```

Get the package name, app name and path of the icon:

```
In [4]: a.get_package()
Out[4]: 'com.greenaddress.abcore'

In [5]: a.get_app_name()
Out[5]: u'ABCore'

In [6]: a.get_app_icon()
Out[6]: u'res/mipmap-xxxhdpi-v4/ic_launcher.png'
```

Get the numeric version and the version string, and the minimal, maximal, target and effective SDK version:

```
In [7]: a.get_androidversion_code()
Out[7]: '2162'

In [8]: a.get_androidversion_name()
Out[8]: '0.62'

In [9]: a.get_min_sdk_version()
Out[9]: '21'

In [10]: a.get_max_sdk_version()

In [11]: a.get_target_sdk_version()
Out[11]: '27'

In [12]: a.get_effective_target_sdk_version()
Out[12]: 27
```

You can even get the decoded XML for the AndroidManifest.xml:

```
In [15]: a.get_android_manifest_axml().get_xml()
Out[15]: '<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    android:versionCode="2162" android:versionName="0.62" package="com.greenaddress.
    abcore">\n        <uses-sdk android:minSdkVersion="21" android:targetSdkVersion="27">\n            <uses-
            permission android:name="android.permission.INTERNET">\n        </uses-
            permission>\n            <uses-permission android:name="android.permission.WRITE_EXTERNAL_
            STORAGE">\n            <uses-permission>\n                <uses-permission android:name="android.permission.
                ACCESS_WIFI_STATE">\n                <uses-permission>\n                    <uses-permission android:name="android.
                        permission.ACCESS_NETWORK_STATE">\n                    <uses-permission>\n                        <application android:theme=
                            "@7F0F0006" android:label="@7F0E001D" android:icon="@7F0D0000" android:debuggable=
                            "true" android:allowBackup="false" android:supportsRtl="true">\n                            <activity_
                                android:name="com.greenaddress.abcore.MainActivity">\n                                <intent-filter>\n                                    <action_
                                        android:name="android.intent.action.MAIN">\n                                    </action>\n                                    <category android:name=
                                        "android.intent.category.LAUNCHER">\n                                    </category>\n                            </intent-filter>\n                            <activity android:name="com.greenaddress.abcore.DownloadInstallCoreIntentService">
                                <service android:exported="false">\n                            </service>\n                            <service android:name="com.greenaddress.
                                abcore.RPCIntentService" android:exported="false">\n                            </service>\n                            <service_
                                android:name="com.greenaddress.abcore.ABCoreService" android:exported="false">\n                            </service>\n                            <activity android:name="com.greenaddress.abcore.BitcoinConfEditActivity">
                                <intent-filter>\n                                    <category android:name="android.intent.category.DEFAULT">\n                                    </category>\n                                    <action android:name="com.greenaddress.abcore.BitcoinConfEditActivity">\n                                    </action>\n                                </intent-filter>\n                            <activity android:name="com.greenaddress.
                                abcore.AboutActivity">\n                            <activity android:label="@7F0E0038">
                                <activity android:name="com.greenaddress.abcore.SettingsActivity" android:noHistory="true">\n                                </activity>\n                                <activity android:label="@7F0E0035" android:name="com.greenaddress.
                                    abcore.DownloadSettingsActivity" android:noHistory="true">\n                                </activity>\n                                <activity android:theme="@7F0F0006" android:label="@7F0E0036" android:name="com.greenaddress.
                                    abcore.PeerActivity">\n                            <activity android:theme="@7F0F0006">
                                <activity android:label="@7F0E0037" android:name="com.greenaddress.abcore.ProgressActivity">\n                                </activity>\n                                <activity android:name="com.greenaddress.abcore.LogActivity">\n                                </activity>\n                                <activity android:name="com.greenaddress.abcore.ConsoleActivity">\n                                </activity>\n                                <activity android:name="com.greenaddress.abcore.DownloadActivity">\n                                <receiver android:name="com.greenaddress.abcore.PowerBroadcastReceiver">
                                    <intent-filter>\n                                        <action android:name="android.intent.action.ACTION_POWER_
                                            CONNECTED">\n                                        <action android:name="android.intent.action.ACTION_POWER_
                                            DISCONNECTED">\n                                        <action android:name="android.intent.action.ACTION_
                                            SHUTDOWN">\n                                        <action android:name="android.intent.action.ACTION_BATTERY_
                                            LOW">\n                                    </action>\n                                    <action android:name="android.net.wifi.STATE_CHANGE">\n                                </action>\n                            </receiver>\n                            <receiver android:name="com.greenaddress.abcore.WiFiStateChangeReceiver">
                                <intent-filter>\n                                    <action android:name="android.net.wifi.STATE_CHANGE">\n                                </action>\n                            </receiver>\n                        </application>\n                    </manifest>\n'
```

Or if you like to use the `AndroidManifest.xml` as an `ElementTree` object, use the following method:

```
In [13]: a.get_android_manifest_xml()
Out[13]: <Element manifest at 0x7f9d01587b00>
```

There are many more methods to explore, just take a look at the API for [APK](#).

## Using the Analysis object

The `~androguard.core.analysis.analysis.Analysis` object has all information about the classes, methods, fields and strings inside one or multiple DEX files.

Additionally it enables you to get call graphs and crossreferences (XREFs) for each method, class, field and string.

This means you can investigate the application for certain API calls or create graphs to see the dependencies of different classes.

As a first example, we will get all classes from the Analysis:

```
In [2]: dx.get_classes()
Out[2]:
[<analysis.ClassAnalysis Ljava/io/FileNotFoundException; EXTERNAL>,
 <analysis.ClassAnalysis Landroid/content/SharedPreferences; EXTERNAL>,
 <analysis.ClassAnalysis Landroid/support/v4/widget/FocusStrategy$BoundsAdapter;>,
 <analysis.ClassAnalysis Landroid/support/v4/media/MediaBrowserCompat
 ↵$MediaBrowserServiceCallbackImpl;>,
 <analysis.ClassAnalysis Landroid/support/transition/WindowIdImpl;>,
 <analysis.ClassAnalysis Landroid/media/MediaMetadataEditor; EXTERNAL>,
 <analysis.ClassAnalysis Landroid/support/v4/app/BundleCompat$BundleCompatBaseImpl;>,
 <analysis.ClassAnalysis Landroid/support/transition/MatrixUtils$1;>,
 <analysis.ClassAnalysis Landroid/support/v7/widget/ShareActionProvider;>,
 ...]
```

As you can see, `get_classes()` returns a list of `ClassAnalysis` objects. Some of them are marked as *EXTERNAL*, which means that the source code of this class is not defined within the DEX files that are loaded inside the Analysis. For example the first class `java.io.FileNotFoundException` is an API class.

A `ClassAnalysis` does not contain the actual code but the `ClassDefItem` can be loaded using the `get_vm_class()`:

```
In [5]: dx.get_classes()[2].get_vm_class()
Out[5]: <dvm.ClassDefItem Ljava/lang/Object;->Landroid/support/v4/widget/FocusStrategy
 ↵$BoundsAdapter;>
```

If the class is *EXTERNAL*, a `ExternalClass` is returned instead.

The `ClassAnalysis` also contains all the information about XREFs, which are explained in more detail in the next section.

## XREFs

Consider the following Java source code:

```
class Foobar {
    public int afield = 23;

    public void somemethod() {
```

(continues on next page)

(continued from previous page)

```
        String astrng = "hello world";
    }
}

class Barfoo {
    public void othermethod() {
        Foobar x = new Foobar();

        x.somemethod();

        System.out.println(x.afield);
    }
}
```

There are two classes and the class Barfoo instantiates the other class Foobar as well as calling methods and reading fields.

XREFs are generated for four things:

- Classes
- Methods
- Fields
- Strings

XREFs work in two directions: xref\_from and xref\_to. *To* means, that the current object is calling another object. *From* means, that the current object is called by another object.

All XREFs can be visualized as an directed graph and if some object A is contained in the xref\_to, the called object will contain A in their xref\_from.

In the case of our Java example, the string astrng is called in Foobar.somemethod, therefore it will be contained in the xref\_to of Foobar.somemethod.

The Field afield will be contained in the xref\_to of Barfoo.othermethod as well as the call to Foobar.somemethod.

### 1.1.3 Working with Sessions

If you are working on a larger APK, you might want to save your current work and come back later. Thats the reason for sessions: They allow you to save your work on disk and resume it at any point. Sessions could also be used to store the analysis on disk, for example if you do automated analysis and want to analyse certain files later.

There are several ways to work with sessions. The easiest way is to use `AnalyzeAPK()` with a session:

```
from androguard import misc
from androguard import session

# get a default session
sess = misc.get_default_session()

# Use the session
a, d, dx = misc.AnalyzeAPK("examples/android/abcore/app-prod-debug.apk", session=sess)

# Show the current Session information
sess.show()
```

(continues on next page)

(continued from previous page)

```
# Do stuff...

# Save the session to disk
session.Save(sess, "androguard_session.ag")

# Load it again
sess = session.Load("androguard_session.ag")
```

The session information will look like this:

```
APKs in Session: 1
    d5e26acca809e9cdfaece18af8e63c60a26d7b6d566d70bd9f44d6934d5c433: [<androguard.
    ↪core.bytecodes.apk.APK object at 0x7fcecf4f3f10>]
DEXs in Session: 2
    8bd7e9f48a6ed29e4c678633364e8bfd4e6ae76ef3e50c43a5ec3c00eb10a5bc: <analysis.
    ↪Analysis VMs: 2, Classes: 3092, Strings: 3293>
    e2a1e46ecd03b701ce72c31057581e0104279d142fca06cdcd000dd94a459e0: <analysis.
    ↪Analysis VMs: 2, Classes: 3092, Strings: 3293>
Analysis in Session: 1
    d5e26acca809e9cdfaece18af8e63c60a26d7b6d566d70bd9f44d6934d5c433: <analysis.
    ↪Analysis VMs: 2, Classes: 3092, Strings: 3293>
```

Similar functionality is available from the Session directly, but needs a second function to retrieve the analyzed objects from the Session:

```
from androguard.session import Session

s = Session()
sha256 = s.add("examples/android/abcore/app-prod-debug.apk")

a, d, dx = s.get_objects_apk(digest=sha256)

s.show()

# When no filename is given, the Session will be saved at the current directory
saved_file = s.save()
# ... and return the filename of the Session file
print(saved_file)
```

---

**Note:** Session objects store a lot of data and can get very big!

---

It is recommended not to use sessions in automated environments, where hundreds or thousands of APKs are loaded.

If you want to use sessions but keep the session alive only for one or multiple APKs, you can call the `reset()` method on a session, to remove all stored analysis data.

```
from androguard import misc
from androguard import session
import os

# get a default session
sess = misc.get_default_session()

for root, dirs, files in os.walk("examples")
```

(continues on next page)

(continued from previous page)

```
for f in files:
    if f.endswith(".apk"):
        # Use the session
        a, d, dx = misc.AnalyzeAPK(os.path.join(root, f), session=sess)

        # Do your stuff

        # Maybe save the session to disk...

        # But now reset the session for the next analysis
        sess.reset()
```

### 1.1.4 Use JADX as a Decompiler

Instead of using the internal decompiler DAD, you can also use [JADX](#).

Install JADX as described at it's website. Make sure that the `jadx` executable is in `$PATH`. Otherwise you might set the argument when calling `DecompilerJADX()`.

Here is a short demo code, how JADX can be used:

```
from androguard.core.bytecodes.apk import APK
from androguard.core.bytecodes.dvm import DalvikVMFormat
from androguard.core.analysis.analysis import Analysis
from androguard.decompiler.decompiler import DecompilerJADX
from androguard.core.androconf import show_logging
import logging

# Enable log output
show_logging(level=logging.DEBUG)

# Load our example APK
a = APK("examples/android/TestsAndroguard/bin/TestActivity.apk")

# Create DalvikVMFormat Object
d = DalvikVMFormat(a)
# Create Analysis Object
dx = Analysis(d)

# Load the decompiler
# Make sure that the jadx executable is found in $PATH
# or use the argument jadx="/path/to/jadx" to point to the executable
decompiler = DecompilerJADX(d, dx)

# propagate decompiler and analysis back to DalvikVMFormat
d.set_decompiler(decompiler)
d.set_vmanalysis(dx)

# Now you can do stuff like:
for m in d.get_methods()[:10]:
    print(m)
    print(decompiler.get_source_method(m))
```

## 1.1.5 Android Signing Certificates

Androguard has the ability to get information about the signing certificate found in APKs. Over the last versions of Androguard, different parsers have been used to get certificate information. The first parser was [Chilkat](#), then a mixture of [pyasn1](#) and [cryptography](#) was used, while the latest parser uses the [asn1crypto](#) library. Not all x509 parsers work with all certificates as there are plenty of examples where the certificate creator does not follow the RFCs for creating certificates. Some parsers do not accept such broken certificates and will fail to parse them.

The purpose of Android's signing process is not to provide verified information about the author, like with JAR signing, but only provide a way to check the integrity of the APK as well as check if an APK can be upgraded by comparing the certificate fingerprints. In some sense, the certificate information can be used to find other APKs from the same author - as long as the signing key was kept secret! There are also public available signing keys, like the ones from AOSP, thus the same fingerprint of two APKs does not always tell you it was signed by the same person.

If you like to know more about the APK signing process, please read the official documentation about [Signing](#). There is also an official tool to verify and sign APKs called [apksigner](#).

### Working with certificates

Inside the APK, there are two places for certificates:

- v1 aka JAR signing: PKCS#7 files in the META-INF folder
- v2 aka APK signing: a special section in the ZIP containing DER coded certificates

The easiest way to get to the certificate information is [androguard sign - Print Certificate Fingerprints](#). It gives similar output to [apksigner](#), but uses only androguard. It can not verify the integrity of the file though.

```
$ androsign.py --all --show examples/signing/apksig/golden-aligned-v1v2-out.apk
golden-aligned-v1v2-out.apk, package: 'android.appsecurity.cts.tinyapp'
Is signed v1: True
Is signed v2: True
Found 1 unique certificates
Issuer: CN=rsa-2048
Subject: CN=rsa-2048
Serial Number: 0x8e35306cdd0115f71
Hash Algorithm: sha256
Signature Algorithm: rsassa_pkcs1v15
Valid not before: 2016-03-31 14:57:49+00:00
Valid not after: 2043-08-17 14:57:49+00:00
sha1 0aa07c0f297b4ae834dc85a17eea8c2cf9380ff7
sha256 fb5dbd3c669af9fc236c6991e6387b7f11ff0590997f22d0f5c74ff40e04fca8
sha512 ↵4da6e6744a4dabef192b198be13b4492b0ce97469f3ce223dd9b7e8df2ee952328e06651e5e65dd3b60ac5e3946e16cf709
md5 e995a5ed7137307661f854e66901ee9e
```

As a comparison, here is the output of [apksigner](#):

```
$ apksigner verify -verbose --print-certs examples/signing/apksig/golden-aligned-v1v2-
→out.apk
Verifies
Verified using v1 scheme (JAR signing): true
Verified using v2 scheme (APK Signature Scheme v2): true
Number of signers: 1
Signer #1 certificate DN: CN=rsa-2048
Signer #1 certificate SHA-256 digest: ↵
→fb5dbd3c669af9fc236c6991e6387b7f11ff0590997f22d0f5c74ff40e04fca8
Signer #1 certificate SHA-1 digest: 0aa07c0f297b4ae834dc85a17eea8c2cf9380ff7
```

(continues on next page)

(continued from previous page)

```
Signer #1 certificate MD5 digest: e995a5ed7137307661f854e66901ee9e
Signer #1 key algorithm: RSA
Signer #1 key size (bits): 2048
Signer #1 public key SHA-256 digest: ↵
    ↵8cabaedf32f1052f6bc5edbeb84d1c500f8c1aa15f8944bf22c46e44c5c4f7e8
Signer #1 public key SHA-1 digest: a708f9a777bac814e6634b02521224537ec3e019
Signer #1 public key MD5 digest: c0c8801fabf2ad970282be1c41584003
```

The most interesting part is probably the fingerprint of the certificate (not of the public key!). You can use it to search for similar APKs. Sometimes there is a confusion about this fingerprint: The fingerprint is not the checksum of the whole PKCS#7 file, but only of a certain part of it! Calculating the hash of a PKCS#7 file from two different, but equally signed APKs will result in a different hash. The fingerprint will stay the same though.

Androguard offers methods in the `androguard.core.bytecodes.apk.APK` class to iterate over the certificates found there.

```
from androguard.core.bytecodes.apk import APK

a = APK('examples/signing/apksig/golden-aligned-v1v2-out.apk')

# first check if this APK is signed
print("APK is signed: {}".format(a.is_signed()))

if a.is_signed():
    # Test if signed v1 or v2 or both
    print("APK is signed with: {}".format("both" if a.is_signed_v1() and
        a.is_signed_v2() else "v1" if a.is_signed_v1() else "v2"))

# Iterate over all certificates
for cert in a.get_certificates():
    # Each cert is now a asn1crypt.x509.Certificate object
    # From the Certificate object, we can query stuff like:
    cert.sha1 # the sha1 fingerprint
    cert.sha256 # the sha256 fingerprint
    cert.issuer.human_friendly # issuer
    cert.subject.human_friendly # subject, usually the same
    cert.hash_algo # hash algorithm
    cert.signature_algo # Signature algorithm
    cert.serial_number # Serial number
    cert.contents # The DER coded bytes of the certificate itself
    # ...
```

Please refer to the `asn1crypto` documentation for more information on the features of the `Certificate` class!

### 1.1.6 Android Binary XML Format

Android uses a special format to save XML and resource files. Also resource files are XML files in the source folder, but all resources are packed into a single resource file called `resources.arsc`. The underlying format is chunk based and is capable for storing several different information.

The most common AXML file is the `AndroidManifest.xml`. This file must be part of every APK, and contains the meta-information about the package.

Androguard is capable of decoding such files and two different tools exists for decoding:

- 1) `androguard arsc` for decoding `resources.arsc`.

2) androguard axml for decoding AndroidManifest.xml and all other XML files

### Decode the AndroidManifest.xml

Let's use one of the example files provided by androguard. To decode the AndroidManifest.xml of an APK file, simply give androguard axml the APK file as an argument:

```
$ androguard axml examples/android/TestsAndroguard/bin/TestActivity.apk
```

The output will look like this:

```
<manifest xmlns:android="http://schemas.android.com/apk/res/android">
<uses-sdk android:minSdkVersion="9" android:targetSdkVersion="16"/>
<application android:label="@7F040001" android:icon="@7F020000" android:debuggable="true" android:allowBackup="false">
    <activity android:label="@7F040001" android:name="TestActivity">
        <intent-filter>
            <action android:name="android.intent.action.MAIN"/>
            <category android:name="android.intent.category.LAUNCHER"/>
        </intent-filter>
    </activity>
</application>
</manifest>
```

You can check with the original, uncompiled, XML file, which can be found here:

```
$ cat examples/android/TestsAndroguard/AndroidManifest.xml
```

The original file will print:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="tests.androguard"
    android:versionCode="1"
    android:versionName="1.0" >

    <uses-sdk
        android:minSdkVersion="9"
        android:targetSdkVersion="16" />

    <application
        android:allowBackup="false"
        android:icon="@drawable/icon"
        android:label="@string/app_name" >
        <activity
            android:name="TestActivity"
            android:label="@string/app_name" >
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />

                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>
        </activity>
    </application>
```

Note, that the overall structure is equal but there are certain differences.

- 1) Resource labels are hex numbers in the decompiled version but strings in the original one
- 2) Newlines and whitespaces are different.

Due to the compilation, this information is lost. But it does not matter, as the structure of the Manifest does not matter. To get some information about the resource IDs, we need information from the `resources.arsc`.

To retrieve information about a single ID, simply run the following:

```
$ androguard arsc examples/android/TestsAndroguard/bin/TestActivity.apk --id 7F040001  
@7f040001 resolves to '@tests.androguard:string/app_name'  
  
<default> = 'TestsAndroguardApplication'
```

You can see, that the ID `7F040001` was successfully resolved to the same string from the source file. To understand how Android handles resource configurations, you should read [HandlingResources](#).

### Decode any other XML file

Also layout files or other XML files provided with the APK are compiled. To decompile them, just give the path inside the APK as an argument, or specify the binary XML file directly:

```
$ androguard axml examples/android/TestsAndroguard/bin/TestActivity.apk -r res/layout/  
↳main.xml  
$ androguard axml examples/axml/test.xml
```

### Decode information from the resources.arsc

To get XML resource files out of the binary `resources.arsc`, use `androguard arsc`.

For example, get all string resources of an APK:

```
$ androguard arsc examples/android/TestsAndroguard/bin/TestActivity.apk --type string
```

will give the following output:

```
<resources>  
<string name="hello">Hello World, TestActivity! kikoololmodif</string>  
<string name="app_name">TestsAndroguardApplication</string>  
</resources>
```

You can also list all resource types:

```
$ androguard arsc examples/android/TestsAndroguard/bin/TestActivity.apk --list-types  
In Package: tests.androguard  
In Locale: \x00\x00  
    drawable  
    layout  
    public  
    string
```

### Working with AXML and Resource files from python

To load an AXML file, for example the `AndroidManifest.xml`, use the `AxmlPrinter`:

```
from androguard.core.bytecodes.axyml import AXMLPrinter
with open("AndroidManifest.xml", "rb") as fp:
    a = AXMLPrinter(fp.read())

# Get the lxml.etree.Element from the AXMLPrinter:
xml = a.get_xml_obj()

# For example, get all uses-permission:
xml.findall("uses-permission")
```

In order to use resources, you need the [ARSCParser](#):

```
from androguard.core.bytecodes.axyml import ARSCParser

with open("resouces.arsc", "rb") as fp:
    res = ARSCParser(fp.read())

# Now you can resolve IDs:
name = res.get_resource_xml_name(0x7F040001)
if name:
    print(name)

# To get the content of an ID, you need to iterate over configurations
# You need to decide which configuration to use...
for config, entry in res.get_res_configs(0x7F040001):
    # You can query `config` for specific configuration
    # or check with `is_default()` if this is a default configuration.
    print("{} = '{}'".format(config.get_qualifier() if not config.is_default() else ""
                           + <default>, entry.get_key_data()))
```

## 1.1.7 Bulk Analysis

Androguard is capable of analysing probably thousand to millions of APKs. It is also possible to use tools like *multiprocessing* for this job and analyse APKs in parallel. Usually you want to put the results of your analysis somewhere, for example a database or some log file. It is also possible to use [Session](#) objects for this job, but you should be aware of some caveats!

- 1) Sessions take up a lot of space per APK. The resulting Session object can be more than 30 times larger than the original APK
- 2) Sessions should not be used to add unrelated APKs, again the size will blow up and you need to figure out which APK belongs to where

So the rule of thumb would be to not use Sessions for bulk analysis, only if you know what you are doing. Another way is to pickle the resulting objects. As the [DalvikVMFormat](#) are already stored in the [Analysis](#) object, there is no need to pickle them separately. Thus, it is only required to save the [APK](#) and [Analysis](#) object.

This is an example how to obtain the two objects and saving them to disk:

```
import sys
from pickle import dump
from hashlib import sha512
from androguard.misc import AnalyzeAPK

a, _, dx = AnalyzeAPK('examples/tests/a2dp.Vol_137.apk')

sha = sha512()
```

(continues on next page)

(continued from previous page)

```
sha.update(a.get_raw())

with open("{}_apk.p".format(sha.hexdigest()), "wb") as fp:
    dump(a, fp)

with open("{}_analysis.p".format(sha.hexdigest()), "wb") as fp:
    # It looks like here is the recursion problem...
    sys.setrecursionlimit(50000)
    dump(dx, fp)
```

But the resulting files are very large, especially the Analysis package:

```
$ du -sh examples/tests/a2dp.Vol_137.apk
808K examples/tests/a2dp.Vol_137.apk

$ du -sh *.p
31M
↳ 24a62690a770891a8f43d71e8f7beb24821d46a75e017ef4f4e6a04624105466621c96305d8e86f9900042e3ef1d5806a50
↳ analysis.p
852K
↳ 24a62690a770891a8f43d71e8f7beb24821d46a75e017ef4f4e6a04624105466621c96305d8e86f9900042e3ef1d5806a50
↳ apk.p
```

But it is possible to compress both files to save disk space:

```
import sys
import lzma
from pickle import dump
from hashlib import sha512
from androguard.misc import AnalyzeAPK

a, _, dx = AnalyzeAPK('examples/tests/a2dp.Vol_137.apk')

sha = sha512()

sha.update(a.get_raw())

with lzma.open("{}_apk.p.lzma".format(sha.hexdigest()), "wb") as fp:
    dump(a, fp)

with lzma.open("{}_analysis.p.lzma".format(sha.hexdigest()), "wb") as fp:
    # It looks like here is the recursion problem...
    sys.setrecursionlimit(50000)
    dump(dx, fp)
```

which results in much smaller files:

```
$ du -sh *.lzma
4,5M
↳ 24a62690a770891a8f43d71e8f7beb24821d46a75e017ef4f4e6a04624105466621c96305d8e86f9900042e3ef1d5806a50
↳ analysis.p.lzma
748K
↳ 24a62690a770891a8f43d71e8f7beb24821d46a75e017ef4f4e6a04624105466621c96305d8e86f9900042e3ef1d5806a50
↳ apk.p.lzma
```

Obviously, as the APK is already packed, there is not much to compress anymore.

## Using AndroAuto

Another method is to use the framework *AndroAuto*. AndroAuto allows you to write small python classes which implement some method, which are then called by AndroAuto at certain points in time. AndroAuto is capable of analysing thousands of apps, and uses threading to distribute the load to multiple CPUs. The results of your analysis can then be dumped to disk, or you could write your own method of saving them - for example, in a database.

The two key components are a Logger, for example *DefaultAndroLog* and an Analysis Runner, for example *DefaultAndroAnalysis*. Both are passed via a settings dictionary into *AndroAuto*.

Next, a minimal working example is given:

```
from androguard.core.analysis import auto
import sys

class AndroTest(auto.DirectoryAndroAnalysis):
    def __init__(self, path):
        super(AndroTest, self).__init__(path)
        self.has_crashed = False

    def analysis_app(self, log, apkobj, dexobj, analysisobj):
        # Just print all objects to stdout
        print(log.id_file, log.filename, apkobj, dexobj, analysisobj)

    def finish(self, log):
        # This method can be used to save information in `log`
        # finish is called regardless of a crash, so maybe store the
        # information somewhere
        if self.has_crashed:
            print("Analysis of {} has finished with Errors".format(log))
        else:
            print("Analysis of {} has finished!".format(log))

    def crash(self, log, why):
        # If some error happens during the analysis, this method will be
        # called
        self.has_crashed = True
        print("Error during analysis of {}: {}".format(log, why), file=sys.stderr)

settings = {
    # The directory `some/directory` should contain some APK files
    "my": AndroTest('some/directory'),
    # Use the default Logger
    "log": auto.DefaultAndroLog,
    # Use maximum of 2 threads
    "max_fetcher": 2,
}

aa = auto.AndroAuto(settings)
aa.go()
```

In this example, the *analysis\_app()* function is used to get all created objects of the analysis and just print them to stdout.

More information can be found in the documentation of *AndroAuto*.

## 1.1.8 Debugging Broken APKs

Sometimes you will have troubles to get something done with androguard. This is usually the case if an APK uses some edge cases or deliberately tries to break parsers - which is not uncommon for malware.

Please feel free to open a bug report in such cases, so this error can be fixed. But before you do, try to gather some more information about the APK. Sometimes not only androguard fails to decode the file, but the official tools do as well!

It is also always interesting to know, if such a broken file can still be installed on an Android system. If you like to test this, fire up an [emulator](#) and try to run the APK there.

### AXML Parser / `AndroidManifest.xml`

Many errors happen in the parsing of the *AndroidManifest.xml*.

There are two official tools you can use to decode the *AndroidManifest.xml*:

1. [aapt2](#)
2. [apkanalyzer](#)

Both are available in the AndroidSDK. While aapt2 can only decode the structure of the file, apkanalyzer can give an actual XML:

Both outputs are actually useful, as aapt2 can provide much more detailed information about the format than apkanalyzer does.

### Broken ZIP files

As you might know, APK files are actually just ZIP files. You can test the zip file integrity using the ZIP command itself:

If there are any errors, like wrong CRC32, these get reported here. Other ZIP implementations have similar tools to check ZIP files.

### Verifying the APK Signature

You can check the signature of the file using [apksigner](#) from the AndroidSDK:

## 1.2 Tools

The only tool you need is [\*androguard - The swiss army knife\*](#). It combines all old tools into a single command line interface.

You can still use the other tools as well, but note that they might get removed some day.

### 1.2.1 `androguard - The swiss army knife`

*androguard* is the new tool, which combines all the other tools into a single command line interface application.

```
Usage: androguard [OPTIONS] COMMAND [ARGS]...

Androguard is a full Python tool to play with Android files.

Options:
--version           Show the version and exit.
--verbose, --debug Print more
--quiet             Print less (only warnings and above)
--silent            Print no log messages
--help              Show this message and exit.

Commands:
analyze            Open a IPython Shell and start reverse engineering.
apkid              Return the packageName/versionCode/versionName per APK as...
arsc               Decode resources.arsc either directly from a given file or...
axml               Parse the AndroidManifest.xml.
cg                 Create a call graph and export it into a graph format.
decompile          Depcompile an APK and create Control Flow Graphs.
disassemble        Disassemble Dalvik Code with size SIZE starting from an...
gui                Androguard GUI
sign               Return the fingerprint(s) of all certificates inside an APK.
```

Take a look at the detailed description of each tool in the next sections.

## 1.2.2 androguard analyze - Androguard Shell

androlyze is a tool that spawns an IPython shell.

```
Usage: androguard analyze [OPTIONS] [APK]

Open a IPython Shell and start reverse engineering.

Options:
--session PATH    Previously saved session to load instead of a file
--help            Show this message and exit.
```

## 1.2.3 androguard cg - Create Call Graph from APK

androcg can create files that can be read using graph visualization software, for example gephi.

### Synopsis

```
Usage: androguard cg [OPTIONS] [APK]

Create a call graph and export it into a graph format.

Example:
$ androguard cg APK

Options:
-o, --output TEXT      Filename of the output file, the extension is
                       used to decide which format to use (default
```

(continues on next page)


(continued from previous page)

-s, --show TEXT	callgraph.gml) [default: callgraph.gml] instead of saving the graph, print it with matplotlib (you might not see anything!)
-v, --verbose	Print more output
--classname TEXT	Regex to filter by classname [default: .*]
--methodname TEXT	Regex to filter by methodname [default: .*]
--descriptor TEXT	Regex to filter by descriptor [default: .*]
--accessflag TEXT	Regex to filter by accessflags [default: .*]
--no-isolated / --isolated	Do not store methods which has no xrefs
--help	Show this message and exit.

## Examples

The call graph is constructed from the `Analysis` object and then converted into a networkx `DiGraph`. Note that calls between methods are only added once. Thus, if a method calls some other method multiple times, this is not saved.

The methods to construct the callgraph from can be filtered. It is highly suggested to do that, as call graphs can get very large:

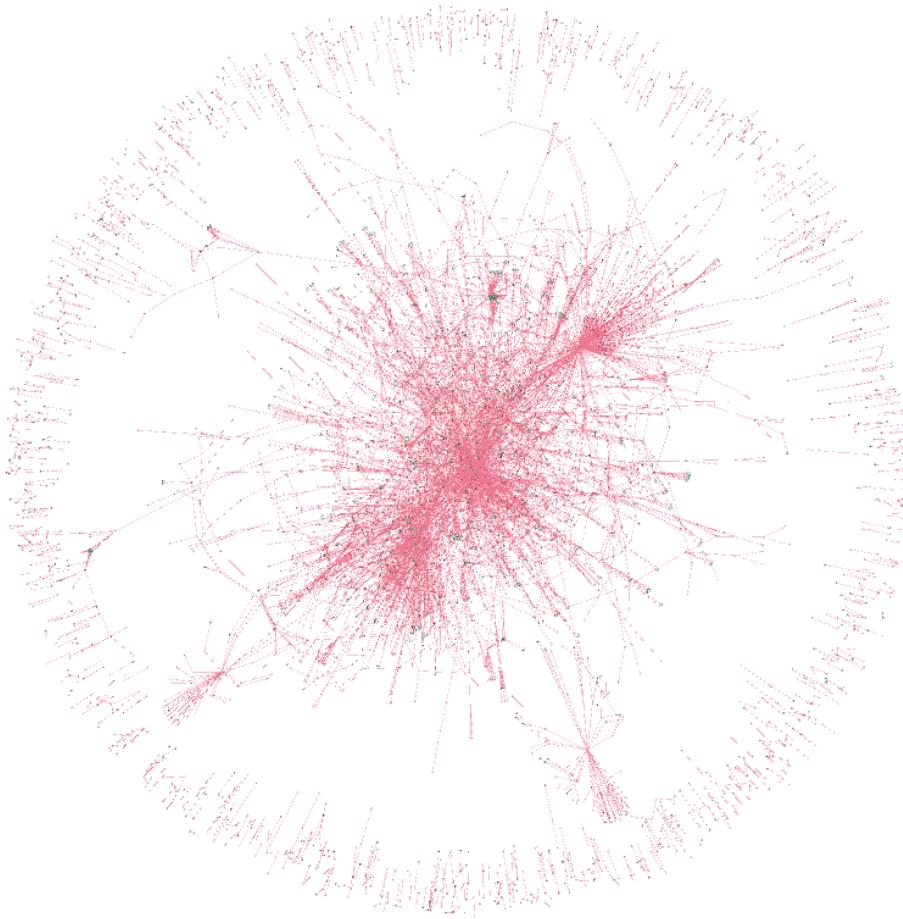

Of course, you can export the call graph with androguard and filter it later.

Here is an example of an already filtered graph, visualized in `gephi`. Each node has an attribute to indicate if it is an internal (defined somewhere in the DEXs) or external (might be an API, but definitely not defined in the DEXs)

method. In this case all green nodes are internal and all red ones are external. You can see the calls of some SMS Trojan to the API methods to write SMS.



## 1.2.4 androguard gui - Androguard GUI

**Warning:** The androgui is experimental and might not fully work!

```

Usage: androguard gui [OPTIONS]

Androguard GUI

Options:
  -i, --input_file PATH
  -p, --input_plugin PATH
  --help                         Show this message and exit.

```

### Examples


The androguard gui currently has functions to show disassembled dalvik code, print all strings, methods, API usage and resources.

It uses Session in order to resume the work later.

First, open up an APK using File, Open. If everything has worked, you will see all classes found inside the APK in the left tree view:



If you double click on one of the classes, you will get the disassembler view:

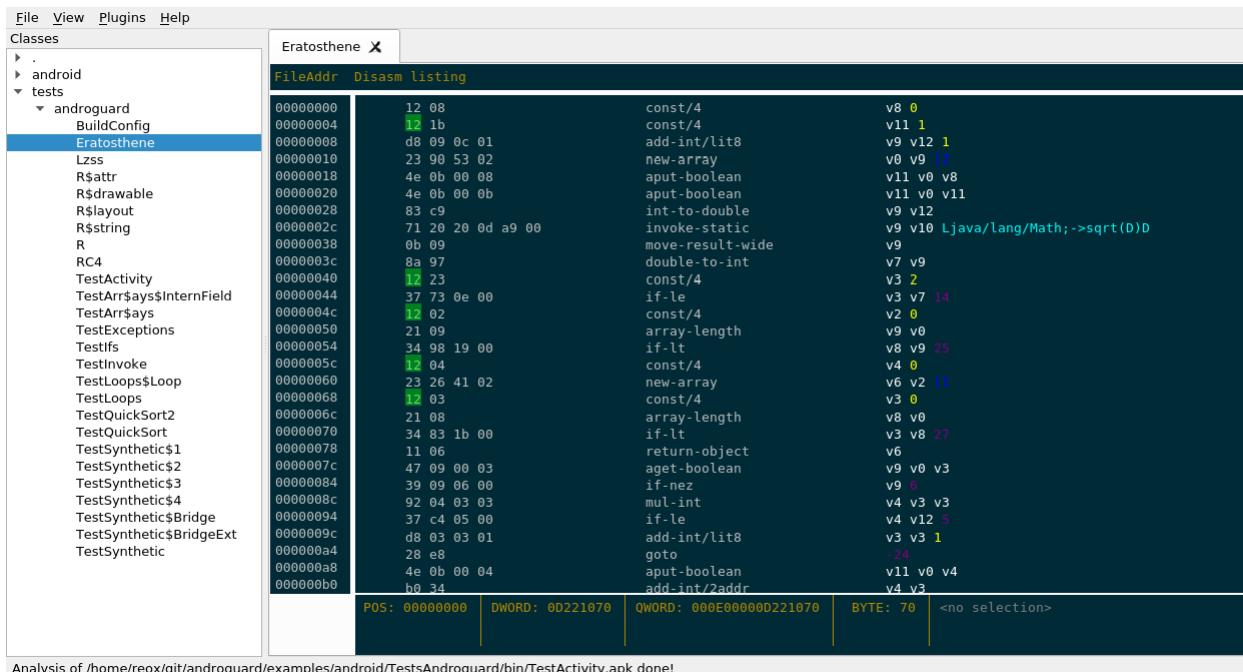

Analysis of /home/reox/git/androguard/examples/android/TestsAndroguard/bin/TestActivity.apk done!

Under View, Strings you will find a list of all Strings inside the DEX file(s):

String	Usage	Filename	Digest
'}'}	3	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'}'	7	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'woo'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'unknown rea...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'type'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'toto'	2	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'this should o...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'this is a test ...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'test2'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'test2 '	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'test'	3	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'test :'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
't.a = '	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'states'	2	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'show:'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'setChildrenD...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'saveAllState: ...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'saveAllState: ...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'saveAllState: ...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'runtime '	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'retainNonCon...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'restoreAllStat...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'restoreAllStat...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'restoreAllStat...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'restoreAllStat...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'restoreAllStat...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'restartLoader...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'remove: '	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb
'remove from ...'	1	/home/reox/gi...	3bb32dd50129690bce850124ea120aa334e708eaa7987cf2329fd1ea0467a0eb

Filter string pattern:

View, Methods shows all methods found in the DEX files(s):

File View Plugins Help

Classes Eratosthene Strings Methods

Name	Class Name	Prototype	Address	Digest
testBreakbis	Ltests/androguard/TestLoops;	(Z)I	0x30458	3bb32dd50129690bce8501...
testBreakMid	Ltests/androguard/TestLoops;	(Z)I	0x303fc	3bb32dd50129690bce8501...
testBreakDo...	Ltests/androguard/TestLoops;	(Z)I	0x303c0	3bb32dd50129690bce8501...
testBreak4	Ltests/androguard/TestLoops;	(Z)IV	0x30388	3bb32dd50129690bce8501...
testBreak3	Ltests/androguard/TestLoops;	(Z)I	0x30350	3bb32dd50129690bce8501...
testBreak2	Ltests/androguard/TestLoops;	(Z)I	0x30314	3bb32dd50129690bce8501...
testBreak	Ltests/androguard/TestLoops;	(Z)I	0x302d8	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestLoops;	(IV)	0x302c0	3bb32dd50129690bce8501...
quicksort	Ltests/androguard/TestQuickSort2;	((I I)IV)	0x30824	3bb32dd50129690bce8501...
Main	Ltests/androguard/TestQuickSort2;	((Ljava/lang/String;)V)	0x3079c	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestQuickSort2;	(IV)	0x3077c	3bb32dd50129690bce8501...
Swap	Ltests/androguard/TestQuickSort;	((I I)IV)	0x309c0	3bb32dd50129690bce8501...
QuickSort	Ltests/androguard/TestQuickSort;	((I I I)V)	0x30984	3bb32dd50129690bce8501...
Partition	Ltests/androguard/TestQuickSort;	((I I)I)	0x30940	3bb32dd50129690bce8501...
Main	Ltests/androguard/TestQuickSort;	((Ljava/lang/String;)V)	0x308b8	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestQuickSort;	(IV)	0x30898	3bb32dd50129690bce8501...
run	Ltests/androguard/TestSynthetic\$1;	(IV)	0x30a00	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestSynthetic\$1;	((Ljava/lang/Object;)V)	0x309e4	3bb32dd50129690bce8501...
toto	Ltests/androguard/TestSynthetic\$2;	((C)I)	0x30a60	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestSynthetic\$2;	(IV)	0x30a48	3bb32dd50129690bce8501...
run	Ltests/androguard/TestSynthetic\$3;	(IV)	0x30ab4	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestSynthetic\$3;	(IV)	0x30a94	3bb32dd50129690bce8501...
run	Ltests/androguard/TestSynthetic\$4;	(IV)	0x30b1c	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestSynthetic\$4;	((Ljava/lang/Object;)IV)	0x30afc	3bb32dd50129690bce8501...
getT	Ltests/androguard/TestSynthetic\$Bridge;	((Ljava/lang/Object;)Ljava/lang/Object...)	0x30b7c	3bb32dd50129690bce8501...
getT	Ltests/androguard/TestSynthetic\$Bridge;	((Ltests/androguard/TestSynthetic...))Ljava/lang/Object...)	0x30b60	3bb32dd50129690bce8501...
getT	Ltests/androguard/TestSynthetic\$Bridge;	((Ljava/lang/Object;)Ljava/lang/Object...)	0x3c930	3bb32dd50129690bce8501...
getT	Ltests/androguard/TestSynthetic\$Bridge;	((Ljava/lang/String;)Ljava/lang/String...)	0x3c950	3bb32dd50129690bce8501...
<init>	Ltests/androguard/TestSynthetic\$Bridge;	((Ltests/androguard/TestSynthetic...))Ljava/lang/String...)	0x3c914	3bb32dd50129690bce8501...

Filter method name pattern:

Using View, API you will get a list of all API methods (or basically all external Methods) which are used inside the APK:


File View Plugins Help

Classes Eratosthene Strings Methods API

Name	Class Name	Prototype	Digest	5
entrySet	Ljava/util/LinkedHashMap;	((Ljava/util/Set;)	3bb32dd5012...	
<init>	Ljava/util/LinkedHashMap;	((I F Z)V)	3bb32dd5012...	
<init>	Ljava/util/LinkedHashMap;	((Ljava/util/Map;)V)	3bb32dd5012...	
size	Ljava/util/List;	((I)I)	3bb32dd5012...	
get	Ljava/util/List;	((I)Ljava/lang/Object;)	3bb32dd5012...	
add	Ljava/util/List;	((Ljava/lang/Object;)Z)	3bb32dd5012...	
getValue	Ljava/util/Map\$Entry;	((I)Ljava/lang/Object;)	3bb32dd5012...	
getKey	Ljava/util/Map\$Entry;	((I)Ljava/lang/Object;)	3bb32dd5012...	
iterator	Ljava/util/Set;	((ILjava/util/Iterator;)	3bb32dd5012...	
countDown	Ljava/util/concurrent/CountDownLatch;	((I)V)	3bb32dd5012...	
await	Ljava/util/concurrent/CountDownLatch;	((I)V)	3bb32dd5012...	
<init>	Ljava/util/concurrent/CountDownLatch;	((I)V)	3bb32dd5012...	
getCause	Ljava/util/concurrent/ExecutionException;	((ILjava/lang/Throwable;)	3bb32dd5012...	
execute	Ljava/util/concurrent/Executor;	((Ljava/lang/Runnable;)V)	3bb32dd5012...	
isCancelled	Ljava/util/concurrent/FutureTask;	((IZ)	3bb32dd5012...	
get	Ljava/util/concurrent/FutureTask;	((I)Ljava/lang/Object;)	3bb32dd5012...	
get	Ljava/util/concurrent/FutureTask;	((I)Ljava/util/concurrent/TimeUnit;)Ljava/l...	3bb32dd5012...	
cancel	Ljava/util/concurrent/FutureTask;	((Z)Z)	3bb32dd5012...	
<init>	Ljava/util/concurrent/FutureTask;	((Ljava/util/concurrent/Callable;)V)	3bb32dd5012...	
<init>	Ljava/util/concurrent/LinkedBlockingQueue;	((I)V)	3bb32dd5012...	
<init>	Ljava/util/concurrent/ThreadPoolExecutor;	((I I)I) Ljava/util/concurrent/TimeUnit; Ljav...	3bb32dd5012...	
set	Ljava/util/concurrent/atomic/AtomicBoole...	((Z)V)	3bb32dd5012...	
get	Ljava/util/concurrent/atomic/AtomicBoole...	((I)Z)	3bb32dd5012...	
<init>	Ljava/util/concurrent/atomic/AtomicBoole...	((I)V)	3bb32dd5012...	
getAndIncr...	Ljava/util/concurrent/atomic/AtomicInteger;	((I)I)	3bb32dd5012...	
<init>	Ljava/util/concurrent/atomic/AtomicInteger;	((I)V)	3bb32dd5012...	
clone	I	((I)Ljava/lang/Object;)	3bb32dd5012...	
clone	[Landroid/support/v4/content/ModernAsy...	((I)Ljava/lang/Object;)	3bb32dd5012...	
clone	[Ljava/lang/Object;	((I)Ljava/lang/Object;)	3bb32dd5012...	

Filter method name pattern:

At last, you can get a list of all string resources from the *resources.arsc* file using View, Resources:

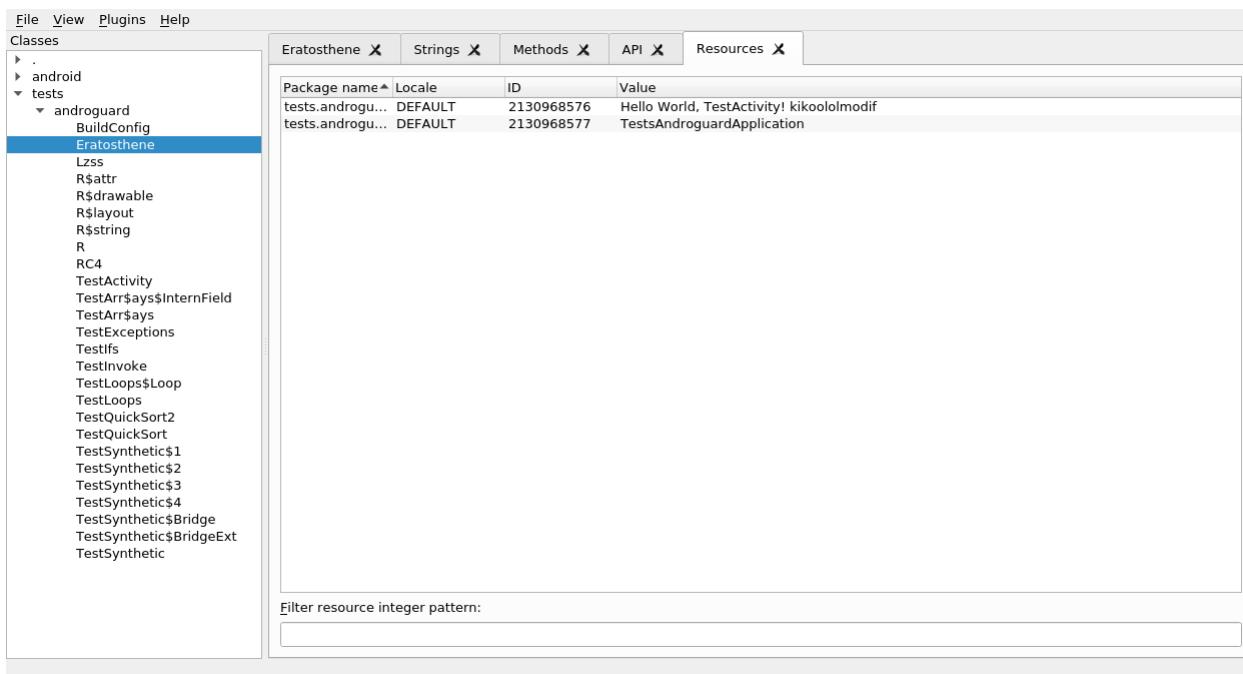

It is possible to add other APK or DEX files at any point using File, Add. In order to save the current state of the GUI and resume later, just go to File, Save and save the file as an *.ag* file. To resume later, just open the file with File, Open again.

## Plugin System

**Warning:** Plugins are not tested and there are no examples right now!

The androguard gui supports plugins to be loaded.

A plugin is a python file which implements the following class:

```
class PluginEntry:
    def __init__(self, session):
        """
        Session is a :class:`~androguard.session.Session` object.
        """
        self.session = session
```

## 1.2.5 androguard sign - Print Certificate Fingerprints

Get the fingerprints of the signing certificates inside an APK.

Usage: androguard sign [OPTIONS] [APK]...

Return the fingerprint(s) of all certificates inside an APK.

Options:  
--hash [md5|sha1|sha256|sha512]

(continues on next page)

(continued from previous page)

-a, --all	Fingerprint Hash algorithm [default: sha1]
-s, --show	Print all supported hashes [default: False] Additionally of printing the fingerprints, show more certificate information [default: False]
--help	Show this message and exit.

## Examples

```
$ androguard sign --all files/golden-aligned-v1v2-out.apk
golden-aligned-v1v2-out.apk, package: 'android.appsecurity.cts.tinyapp'
Is signed v1: True
Is signed v2: True
Found 1 unique certificates
md5 e995a5ed7137307661f854e66901ee9e
sha1 0aa07c0f297b4ae834dc85a17eea8c2cf9380ff7
sha512 ↴
sha256 fb5dbd3c669af9fc236c6991e6387b7f11ff0590997f22d0f5c74ff40e04fca8
```

## 1.2.6 androguard axml - AndroidManifest.xml parser

Parse the AndroidManifest.xml from an APK and show/save the XML file.

```
Usage: androguard axml [OPTIONS] [FILE_]

Parse the AndroidManifest.xml.

Parsing is either direct or from a given APK and prints in XML format or
saves to file.

This tool can also be used to process any AXML encoded file, for example
from the layout directory.

Example:

$ androguard axml AndroidManifest.xml

Options:
-i, --input PATH      AndroidManifest.xml or APK to parse (legacy option)
-o, --output TEXT    filename to save the decoded AndroidManifest.xml to,
                     default stdout
-r, --resource TEXT  Resource inside the APK to parse instead of
                     AndroidManifest.xml
--help                Show this message and exit.
```

## 1.2.7 androguard arsc - resources.arsc parser

Parse the resources.arsc file from an APK and print human readable XML.

```
Usage: androguard arsc [OPTIONS] [FILE_]
```

Decode resources.arsc either directly from a given file or from an APK.

Example:

```
$ androguard arsc app.apk
```

Options:

-i, --input PATH	resources.arsc or APK to parse (legacy option)
-o, --output TEXT	filename to save the decoded resources to
-p, --package TEXT	Show only resources for the given package name (default: the first package name found)
-l, --locale TEXT	Show only resources for the given locale (default: '\x00\x00')
-t, --type TEXT	Show only resources of the given type (default: public)
--id TEXT	Resolve the given ID for the given locale and package. Provide the hex ID!
-t, --list-packages	List all package names and exit
-t, --list-locales	List all package names and exit
-t, --list-types	List all types and exit
--help	Show this message and exit.

## 1.2.8 androguard decompile - Decompile APKs and create CFG

androdd is a tool to create a decompiled version of an APK using the available decompilers.

### Synopsis

```
Usage: androguard decompile [OPTIONS] [FILE_]
```

Decompile an APK and create Control Flow Graphs.

Example:

```
$ androguard resources.arsc
```

Options:

-i, --input PATH	APK to parse (legacy option)
-o, --output TEXT	output directory. If the output folder already exist, it will be overwritten! [required]
-f, --format TEXT	Additionally write control flow graphs for each method, specify the format for example png, jpg, raw (write dot file), ...
-j, --jar	Use DEX2JAR to create a JAR file
-l, --limit TEXT	Limit to certain methods only by regex (default: '.*')
-d, --decompiler TEXT	Use a different decompiler (default: DAD)
--help	Show this message and exit.

It also can generate control flow graphs (CFG) for each method using the graphviz format. The CFGs can be exported as image file directly.

Additionally to the decompiled classes in .java format, each method is given in a SMALI like format (.ag files)

All filenames are sanitized, so they should work on most operating systems and filesystems.


## Examples

To get all CFG in png format and limit the processing only to a certain namespace, the following command can be used:

```
androguard decompile -o outputfolder -f png -i someapp.apk --limit "^\com/elite/.*"
```

This will decompile the app *someapp.apk* into the folder *outputfolder* and limit the processing to all methods, where the classname starts with *com.elite..*.

A CFG might look like this:

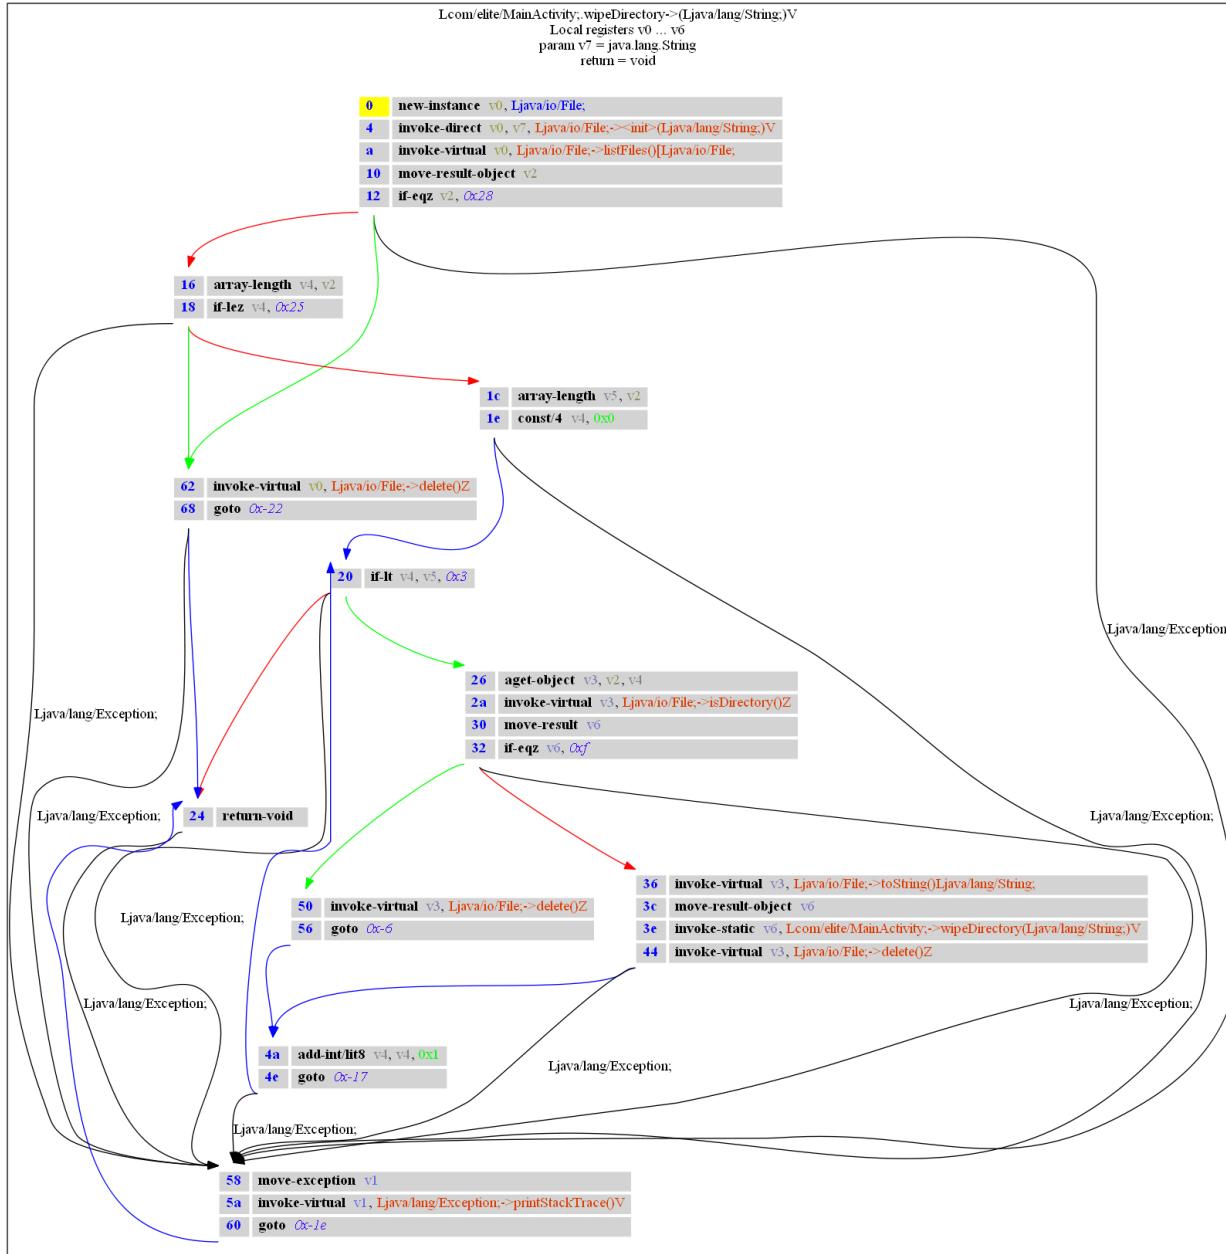

while the *.ag* file has this content:

```

# Lcom/elite/MainActivity;=>wipeDirectory(Ljava/lang/String;)V [access_flags=private_
↳ static]
#
# Parameters:
# - local registers: v0...v6
# - v7:java.lang.String
#
# - return:void

wipeDirectory-BB@0x0 : [ wipeDirectory-BB@0x16 wipeDirectory-BB@0x62 ]
    0      (00000000) new-instance        v0, Ljava/io/File;
    1      (00000004) invoke-direct      v0, v7, Ljava/io/File;=><init>(Ljava/lang/
↳ String;)V
    2      (0000000a) invoke-virtual     v0, Ljava/io/File;=>listFiles() [Ljava/io/
↳ File;
    3      (00000010) move-result-object   v2
    4      (00000012) if-eqz            v2, +28
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x16 : [ wipeDirectory-BB@0x1c wipeDirectory-BB@0x62 ]
    5      (00000016) array-length       v4, v2
    6      (00000018) if-lez            v4, +25
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x1c : [ wipeDirectory-BB@0x20 ]
    7      (0000001c) array-length       v5, v2
    8      (0000001e) const/4           v4, 0
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x20 : [ wipeDirectory-BB@0x24 wipeDirectory-BB@0x26 ]
    9      (00000020) if-lt             v4, v5, +3
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x24 :
    10     (00000024) return-void
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x26 : [ wipeDirectory-BB@0x36 wipeDirectory-BB@0x50 ]
    11     (00000026) aget-object        v3, v2, v4
    12     (0000002a) invoke-virtual     v3, Ljava/io/File;=>isDirectory()Z
    13     (00000030) move-result         v6
    14     (00000032) if-eqz            v6, +f
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x36 : [ wipeDirectory-BB@0x4a ]
    15     (00000036) invoke-virtual     v3, Ljava/io/File;=>toString()Ljava/lang/
↳ String;
    16     (0000003c) move-result-object   v6
    17     (0000003e) invoke-static        v6, Lcom/elite/MainActivity;=>
↳ wipeDirectory(Ljava/lang/String;)V
    18     (00000044) invoke-virtual     v3, Ljava/io/File;=>delete()Z

```

(continues on next page)

(continued from previous page)

```
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x4a : [ wipeDirectory-BB@0x20 ]
  19      (0000004a) add-int/lit8          v4, v4, 1
  20      (0000004e) goto               -17
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x50 : [ wipeDirectory-BB@0x4a ]
  21      (00000050) invoke-virtual       v3, Ljava/io/File;-->delete()Z
  22      (00000056) goto               -6

wipeDirectory-BB@0x58 : [ wipeDirectory-BB@0x24 ]
  23      (00000058) move-exception       v1
  24      (0000005a) invoke-virtual       v1, Ljava/lang/Exception;-->
->printStackTrace()V
  25      (00000060) goto               -1e

wipeDirectory-BB@0x62 : [ wipeDirectory-BB@0x24 ]
  26      (00000062) invoke-virtual       v0, Ljava/io/File;-->delete()Z
  27      (00000068) goto               -22
62:67
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)
```

## 1.2.9 androguard disassemble - Disassembler for DEX

androdis is a disassembler for DEX files.

```
Usage: androguard disassemble [OPTIONS] DEX

Disassemble Dalvik Code with size SIZE starting from an offset

Options:
  -o, --offset INTEGER  Offset to start disassembly inside the file
  -s, --size INTEGER    Number of bytes from offset to disassemble, 0 for
                        whole file
  --help                Show this message and exit.
```

# CHAPTER 2

---

## Commonly used APIs

---

**APK parser** `androguard.core.bytecodes.apk.APK`

**DEX parser** `androguard.core.bytecodes.dvm.DalvikVMFormat`

**AXML parser** `androguard.core.bytecodes.axml.AXMLPrinter`

**ARSC parser** `androguard.core.bytecodes.axml.ARSCParser`

**Analysis** `androguard.core.analysis.analysis.Analysis`

**Session** `androguard.session.Session`

**Automated Analysis** `androguard.core.analysis.auto.AndroAuto`

**Decompilers** `androguard.decompiler.decompiler`



# CHAPTER 3

---

## Complete Python API

---

### 3.1 androguard package

#### 3.1.1 Subpackages

`androguard.core` package

Subpackages

`androguard.core.analysis` package

The analysis module implements an abstraction layer for `androguard.core.bytecodes.dvm.DalvikVMFormat` objects. With the help of the `androguard.core.analysis.Analysis` object, you can bundle several DEX files together. This is not only useful for multidex files, but also for a single dex, as Analysis offers many features to investigate DEX files. One of these features is crossreferencing (XREF). It allows you to build a graph of the methods inside the DEX files. You can then create callgraphs or find methods which use a specific API method.

Submodules

`androguard.core.analysis.analysis` module

**class** `androguard.core.analysis.analysis.Analysis` (`vm=None`)

Bases: `object`

**add** (`vm`)

Add a `DalvikVMFormat` to this `Analysis`

**Parameters** `vm` – `dvm.DalvikVMFormat` to add to this `Analysis`

**create\_ipython\_exports()**

**Warning:** this feature is experimental and is currently not enabled by default! Use with caution!

Creates attributes for all classes, methods and fields on the Analysis object itself. This makes it easier to work with Analysis module in an iPython shell.

Classes can be search by typing `dx.CLASS_<tab>`, as each class is added via this attribute name. Each class will have all methods attached to it via `dx.CLASS_Foobar.METHOD_<tab>`. Fields have a similar syntax: `dx.CLASS_Foobar.FIELD_<tab>`.

As Strings can contain nearly anything, use `find_strings()` instead.

- Each `CLASS_` item will return a `ClassAnalysis`
- Each `METHOD_` item will return a `MethodClassAnalysis`
- Each `FIELD_` item will return a `FieldClassAnalysis`

**create\_xref()**

Create Class, Method, String and Field crossreferences for all classes in the Analysis.

If you are using multiple DEX files, this function must be called when all DEX files are added. If you call the function after every DEX file, the crossreferences might be wrong!

**find\_classes(name='.\*', no\_external=False)**

Find classes by name, using regular expression This method will return all ClassAnalysis Object that match the name of the class.

**Parameters**

- **name** – regular expression for class name (default “.”\*)
- **no\_external** – Remove external classes from the output (default False)

**Return type** generator of `ClassAnalysis`**find\_fields(classname='.\*', fieldname='.\*', fieldtype='.\*', accessflags='.\*')**  
find fields by regex**Parameters**

- **classname** – regular expression of the classname
- **fieldname** – regular expression of the fieldname
- **fieldtype** – regular expression of the fieldtype
- **accessflags** – regular expression of the access flags

**Return type** generator of `FieldClassAnalysis`**find\_methods(classname='.\*', methodname='.\*', descriptor='.\*', accessflags='.\*', no\_external=False)**

Find a method by name using regular expression. This method will return all MethodClassAnalysis objects, which match the classname, methodname, descriptor and accessflags of the method.

**Parameters**

- **classname** – regular expression for the classname
- **methodname** – regular expression for the method name
- **descriptor** – regular expression for the descriptor

- **accessflags** – regular expression for the accessflags
- **no\_external** – Remove external method from the output (default False)

**Return type** generator of *MethodClassAnalysis*

**find\_strings** (*string*=‘.\*’)

Find strings by regex

**Parameters** **string** – regular expression for the string to search for

**Return type** generator of *StringAnalysis*

**get\_call\_graph** (*classname*=‘.\*’, *methodname*=‘.\*’, *descriptor*=‘.\*’, *accessflags*=‘.\*’,  
*no\_isolated*=False, *entry\_points*=[])

Generate a directed graph based on the methods found by the filters applied. The filters are the same as in *find\_methods()*

A networkx.DiGraph is returned, containing all edges only once! that means, if a method calls some method twice or more often, there will only be a single connection.

**Parameters**

- **classname** – regular expression of the classname (default: “.\*”)
- **fieldname** – regular expression of the fieldname (default: “.\*”)
- **fieldtype** – regular expression of the fieldtype (default: “.\*”)
- **accessflags** – regular expression of the access flags (default: “.\*”)
- **no\_isolated** – remove isolated nodes from the graph, e.g. methods which do not call anything (default: False)
- **entry\_points** – A list of classes that are marked as entry point

**Return type** DiGraph

**get\_class\_analysis** (*class\_name*)

Returns the *ClassAnalysis* object for a given classname.

**Parameters** **class\_name** – classname like ‘Ljava/lang/Object;’ (including L and ;)

**Returns** *ClassAnalysis*

**get\_classes** ()

Returns a list of *ClassAnalysis* objects

Returns both internal and external classes (if any)

**Return type** list of *ClassAnalysis*

**get\_external\_classes** ()

Returns all external classes, that means all classes that are not defined in the given set of *DalvikVMObjects*.

**Return type** generator of *ClassAnalysis*

**get\_field\_analysis** (*field*)

Get the FieldAnalysis for a given fieldname

**Parameters** **field** – TODO

**Returns** *FieldClassAnalysis*

**get\_fields** ()

Returns a list of *FieldClassAnalysis* objects

**get\_internal\_classes()**

Returns all external classes, that means all classes that are defined in the given set of DalvikVMFormat.

**Return type** generator of *ClassAnalysis*

**get\_method(method)**

Get the *MethodAnalysis* object for a given EncodedMethod. This Analysis object is used to enhance EncodedMethods.

**Parameters** **method** – EncodedMethod to search for

**Returns** *MethodAnalysis* object for the given method, or None if method was not found

**get\_method\_analysis(method)**

Returns the crossreferencing object for a given Method.

Beware: the similar named function `get_method()` will return a *MethodAnalysis* object, while this function returns a *MethodClassAnalysis* object!

This Method will only work after a run of `create_xref()`

**Parameters** **method** – EncodedMethod

**Returns** *MethodClassAnalysis* for the given method or None, if method was not found

**get\_method\_analysis\_by\_name(class\_name, method\_name, method\_descriptor)**

Returns the crossreferencing object for a given method.

This function is similar to `get_method_analysis()`, with the difference that you can look up the Method by name

**Parameters**

- **class\_name** – name of the class, for example ‘Ljava/lang/Object;’
- **method\_name** – name of the method, for example ‘onCreate’
- **method\_descriptor** – method descriptor, for example ‘(I)V’

**Returns** *MethodClassAnalysis*

**get\_method\_by\_name(class\_name, method\_name, method\_descriptor)**

Search for a EncodedMethod in all classes in this analysis

**Parameters**

- **class\_name** – name of the class, for example ‘Ljava/lang/Object;’
- **method\_name** – name of the method, for example ‘onCreate’
- **method\_descriptor** – descriptor, for example ‘(I I Ljava/lang/String)V’

**Returns** EncodedMethod or None if method was not found

**get\_methods()**

Returns a list of *MethodClassAnalysis* objects

**get\_strings()**

Returns a list of *StringAnalysis* objects

**Return type** list of *StringAnalysis*

**get\_strings\_analysis()**

Returns a dictionary of strings and their corresponding *StringAnalysis*

**Returns** a dictionary

**is\_class\_present (class\_name)**

Checks if a given class name is part of this Analysis.

**Parameters** `class_name` – classname like ‘Ljava/lang/Object;’ (including L and ;)

**Returns** True if class was found, False otherwise

**class androguard.core.analysis.analysis.BasicBlocks (\_vm)**

Bases: object

This class represents all basic blocks of a method

**get ()**

**Return type** return each basic block (`DVMBasicBlock` object)

**get\_basic\_block (idx)****get\_basic\_block\_pos (idx)****gets ()**

**Return type** a list of basic blocks (`DVMBasicBlock` objects)

**pop (idx)****push (bb)****class androguard.core.analysis.analysis.ClassAnalysis (classobj)**

Bases: object

**AddFXrefRead (method, classobj, field)**

Add a Field Read to this class

**Parameters**

- `method` –
- `classobj` –
- `field` –

**Returns****AddFXrefWrite (method, classobj, field)**

Add a Field Write to this class

**Parameters**

- `method` –
- `classobj` –
- `field` –

**Returns****AddMXrefFrom (method1, classobj, method2, offset)****AddMXrefTo (method1, classobj, method2, offset)****AddXrefFrom (ref\_kind, classobj, methodobj, offset)**

Creates a crossreference from this class. XrefFrom means, that the current class is called by another class.

**Parameters**

- `ref_kind` –
- `classobj` – `ClassAnalysis` object to link

- **methodobj** –
- **offset** – Offset in the methods bytecode, where the call happens

**Returns**

**AddXrefTo** (*ref\_kind*, *classobj*, *methodobj*, *offset*)

Creates a crossreference to another class. XrefTo means, that the current class calls another class. The current class should also be contained in the another class' XrefFrom list.

**Parameters**

- **ref\_kind** –
- **classobj** – *ClassAnalysis* object to link
- **methodobj** –
- **offset** – Offset in the Methods Bytecode, where the call happens

**Returns**

**extends**

Return the parent class

For external classes, this is not sure, thus we return always Object (which is the parent of all classes)

**Returns** a string of the parent class name

**get\_fake\_method** (*name*, *descriptor*)

Search for the given method name and descriptor and return a fake (ExternalMethod) if required.

**Parameters**

- **name** – name of the method
- **descriptor** – descriptor of the method, for example '*III*V'

**Returns** *ExternalMethod*

**get\_field\_analysis** (*field*)

**get\_fields** ()

Return all *FieldClassAnalysis* objects of this class

**get\_method\_analysis** (*method*)

Return the *MethodClassAnalysis* object for a given EncodedMethod

**Parameters** **method** – EncodedMethod

**Returns** *MethodClassAnalysis*

**get\_methods** ()

Return all *MethodClassAnalysis* objects of this class

**get\_nb\_methods** ()

Get the number of methods in this class

**get\_vm\_class** ()

**get\_xref\_from** ()

**get\_xref\_to** ()

**implements**

Get a list of interfaces which are implemented by this class

**Returns** a list of Interface names

**is\_android\_api()**

Tries to guess if the current class is an Android API class.

This might be not very precise unless an apilist is given, with classes that are in fact known APIs. Such a list might be generated by using the android.jar files.

**Returns** boolean

**is\_external()**

Tests whether this class is an external class

**Returns** True if the Class is external, False otherwise

**name**

Return the class name

**Returns**

**class androguard.core.analysis.analysis.DVMBasicBlock (start, vm, method, context)**

Bases: object

A simple basic block of a dalvik method

**add\_note (note)****clear\_notes()****get\_end()****get\_exception\_analysis()****get\_instructions()**

Get all instructions from a basic block.

**Return type** Return all instructions in the current basic block

**get\_last()****get\_last\_length()****get\_method()****get\_name()****get\_nb\_instructions()****get\_next()**

Get next basic blocks

**Return type** a list of the next basic blocks

**get\_notes()****get\_prev()**

Get previous basic blocks

**Return type** a list of the previous basic blocks

**get\_special\_ins (idx)**

Return the associated instruction to a specific instruction (for example a packed/sparse switch)

**Parameters** **idx** – the index of the instruction

**Return type** None or an Instruction

**get\_start()****push (i)**

```
set_childs (values)
set_exception_analysis (exception_analysis)
set_fathers (f)
set_notes (value)
show ()

class androguard.core.analysis.analysis.ExceptionAnalysis (exception, bb)
Bases: object

get ()
show_buff ()

class androguard.core.analysis.analysis.Exceptions (_vm)
Bases: object

add (exceptions, basic_blocks)
get ()
get_exception (addr_start, addr_end)
gets ()

class androguard.core.analysis.analysis.ExternalClass (name)
Bases: object

GetMethod (name, descriptor)
    Deprecated since version 3.1.0: Use get\_method \(\) instead.
get_method (name, descriptor)
    Get the method by name and descriptor, or create a new one if the requested method does not exists.

    Parameters
        • name – method name
        • descriptor – method descriptor, for example '(I)V'

    Returns ExternalMethod

get_methods ()
    Return the stored methods for this external class :return:

get_name ()
    Returns the name of the ExternalClass object

class androguard.core.analysis.analysis.ExternalMethod (class_name, name, descriptor)
Bases: object

get_access_flags_string ()
get_class_name ()
get_descriptor ()
get_name ()

class androguard.core.analysis.analysis.FieldClassAnalysis (field)
Bases: object

AddXrefRead (classobj, methodobj)
AddXrefWrite (classobj, methodobj)
```

```
get_field()
get_xref_read()
get_xref_write()
name

class androguard.core.analysis.analysis.MethodAnalysis (vm, method)
Bases: object

get_basic_blocks()
    Return type a BasicBlocks object

get_length()
    Return type an integer which is the length of the code

get_method()

get_vm()

show()
    Prints the content of this method to stdout.
    This will print the method signature and the decompiled code.

class androguard.core.analysis.analysis.MethodClassAnalysis (method)
Bases: object

AddXrefFrom (classobj, methodobj, offset)
    Add a crossreference from another method (this method is called by another method)

    Parameters
        • classobj – ClassAnalysis
        • methodobj – EncodedMethod
        • offset – integer where in the method the call happens

AddXrefTo (classobj, methodobj, offset)
    Add a crossreference to another method (this method calls another method)

    Parameters
        • classobj – ClassAnalysis
        • methodobj – EncodedMethod
        • offset – integer where in the method the call happens

access
    Returns the access flags to the method as a string

descriptor
    Returns the type descriptor for this method

get_method()
    Return the EncodedMethod object that relates to this object :return: dvm.EncodedMethod

get_xref_from()
    Returns a list of three tuples containing the class, method and offset of the call, from where this object was
    called.

    The list of tuples has the form: (ClassAnalysis, EncodedMethod or ExternalMethod, int)
```

### `get_xref_to()`

Returns a list of three tuples cotaining the class, method and offset of the call, which are called by this method.

The list of tuples has the form: (*ClassAnalysis*, *EncodedMethod* or *ExternalMethod*, int)

### `is_android_api()`

Returns True if the method seems to be an Android API method.

This method might be not very precise unless an list of known API methods is given.

**Returns** boolean

### `is_external()`

Return True if the underlying methd is external

**Returns type** boolean

### `name`

Returns the name of this method

## `class androguard.core.analysis.analysis.StringAnalysis(value)`

Bases: object

### `AddXrefFrom(classobj, methodobj)`

### `get_orig_value()`

### `get_value()`

### `get_xref_from()`

### `set_value(value)`

## `androguard.core.analysis.analysis.is_ascii_obfuscation(vm)`

Tests if any class inside a DalvikVMObject uses ASCII Obfuscation (e.g. UTF-8 Chars in Classnames)

**Parameters** `vm` – *DalvikVMObject*

**Returns** True if ascii obfuscation otherwise False

## `androguard.core.analysis.auto module`

## `class androguard.core.analysis.auto.AndroAuto(settings)`

Bases: object

The main class which analyse automatically android apps by calling methods from a specific object

Automatic analysis requires two objects to be created:

- 1) a Logger, found at key `log` in the settings
- 2) an Analysis runner, found at key `my` in the settings

Both are passed to `AndroAuto` via a dictionary. The setting dict understands the following keys:

- `my`: The Analysis runner (required)
- `log`: The Logger
- `max_fetcher`: Maximum number of concurrent threads

`DefaultAndroLog` can be used as a baseclass for the Logger, while `DefaultAndroAnalysis` can be used a baseclass for the Analysis. There is also `DirectoryAndroAnalysis` which implements a `fetcher` which recursively reads a directory for files and can be used a baseclass as well.

example:

```
from androguard.core.analysis import auto

class AndroTest(auto.DirectoryAndroAnalysis):
    # This is the Test Runner
    def analysis_app(self, log, apkobj, dexobj, analysisobj):
        # Just print all objects to stdout
        print(log.id_file, log.filename, apkobj, dexobj, analysisobj)

    settings = {
        # The directory `some/directory` should contain some APK files
        "my": AndroTest('some/directory'),
        # Use the default Logger
        "log": auto.DefaultAndroLog,
        # Use maximum of 2 threads
        "max_fetcher": 2,
    }

    aa = auto.AndroAuto(settings)
    aa.go()
```

**Parameters** `settings` (`dict`) – the settings of the analysis

#### `dump()`

Dump the analysis

Calls `dump()` on the Analysis object

#### `dump_file(filename)`

Dump the analysis into a file

Calls `dump_file(filename)` on the Analysis object

#### `go()`

Launch the analysis.

this will start a total of `max_fetcher` threads.

**class** androguard.core.analysis.auto.**DefaultAndroAnalysis**  
Bases: `object`

This class can be used as a template in order to analyse apps

The order of methods called in this class is the following:

- `fetcher()` is called to get files
- `filter_file()` is called to get the filetype
- `create_apk()` or `create_axml()` or `create_arsc()` and `create_dex()` or `create_dey()` depending on the filetype
- `analysis_apk()` or `analysis_axml()` or `analysis_arsc()` and `analysis_dex()` or `analysis_dey()` depending on the filetype
- `create_adex()` if at least one dex was found
- `analysis_app()` with all the gathered objects so far
- `finish()` is called in any case after the analysis

`crash()` can be called during analysis if any Exception happens.

**analysis\_adex** (*log, adexobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **adexobj** (`androguard.core.analysis.analysis.Analysis`) – a Analysis object

**Returns** a boolean

**analysis\_apk** (*log, apkobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **apkobj** (`androguard.core.bytecodes.apk.APK`) – a APK object

**Returns** True if a DEX file should be analyzed as well

**Return type** bool

**analysis\_app** (*log, apkobj, dexobj, adexobj*)

This method is called if you wish to analyse the final app

**Parameters**

- **log** – an object which corresponds to a unique app
- **apkobj** (`androguard.core.bytecodes.apk.APK`) – a APK object
- **dexobj** (`androguard.core.bytecodes.dvm.DalvikVMFormat`) – a DalvikVMFormat object
- **adexobj** (`androguard.core.analysis.analysis.Analysis`) – a Analysis object

**analysis\_arsc** (*log, arscobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **arscobj** (`androguard.core.bytecodes.axml.ARSCParser`) – a ARSCParser object

**Returns** True if the analysis should continue afterwards

**Return type** bool

**analysis\_axml** (*log, axmlobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **axmlobj** (`androguard.core.bytecodes.axml.AXMLPrinter`) – a AXMLPrinter object

**Returns** True if the analysis should continue afterwards

**Return type** bool

**analysis\_dex**(*log, dexobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexobj** (`androguard.core.bytecodes.dvm.DalvikVMFormat`) – a `DalvikVMFormat` object

**Returns** True if the analysis should continue with an `Analysis.Analysis`

**Return type** bool

**analysis\_dey**(*log, deyobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **deyobj** (`androguard.core.bytecodes.dvm.DalvikOdexVMFormat`) – a `DalvikOdexVMFormat` object

**Returns** True if the analysis should continue with an `Analysis.Analysis`

**Return type** bool

**crash**(*log, why*)

This method is called if a crash happens

**Parameters**

- **log** – an object which corresponds to a unique app
- **why** – the exception

**create\_adex**(*log, dexobj*)

This method is called in order to create an `Analysis` object

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexobj** (`androguard.core.bytecodes.dvm.DalvikVMFormat`) – a `DalvikVMFormat` object

**Rtype** a `Analysis` object

**create\_apk**(*log, fileraw*)

This method is called in order to create a new APK object

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw** – the raw apk (a string)

**Return type** an `APK` object

**create\_arsc**(*log, fileraw*)

This method is called in order to create a new ARSC object

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw** – the raw arsc (a string)

**Return type** an [ARSCParser](#) object

**create\_axml** (*log, fileraw*)

This method is called in order to create a new AXML object

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw** – the raw axml (a string)

**Return type** an [AXMLPrinter](#) object

**create\_dex** (*log, dexraw*)

This method is called in order to create a DalvikVMFormat object

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexraw** – the raw classes.dex (a string)

**Return type** a [DalvikVMFormat](#) object

**create\_dexy** (*log, dexraw*)

This method is called in order to create a DalvikOdexVMFormat object

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexraw** – the raw odex file (a string)

**Return type** a [DalvikOdexVMFormat](#) object

**dump** ()

This method is called to dump the result

**dump\_file** (*filename*)

This method is called to dump the result in a file

**Parameters** **filename** – the filename to dump the result

**fetcher** (*q*)

This method is called to fetch a new app in order to analyse it. The queue must be fill with the following format: (filename, raw)

must return False if the queue is filled, thus all files are read.

**Parameters** **q** – the Queue to put new app

**filter\_file** (*log, fileraw*)

This method is called in order to filer a specific app

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw (bytes)** – the raw file as bytes

**Return type** a tuple with 2 elements, the return value (boolean) if it is necessary to continue the analysis and the file type

**finish** (*log*)

This method is called before the end of the analysis

**Parameters** **log** – an object which corresponds to an unique app

```
class androguard.core.analysis.auto.DefaultAndroLog(id_file,filename)
Bases: object
```

A base class for the Androguard Auto Logger.

The Logger contains two attributes of the analyzed File: `filename` and `id_file`, which is the Adler32 Checksum of the file.

The Logger can be extended to contain more attributes.

```
class androguard.core.analysis.auto.DirectoryAndroAnalysis(directory)
Bases: androguard.core.analysis.auto.DefaultAndroAnalysis
```

A simple class example to analyse a whole directory with many APKs in it

```
fetcher(q)
```

This method is called to fetch a new app in order to analyse it. The queue must be fill with the following format: (filename, raw)

must return False if the queue is filled, thus all files are read.

**Parameters** `q` – the Queue to put new app

## Module contents

### androguard.core.api\_specific\_resources package

#### Module contents

```
exception androguard.core.api_specific_resources.APILevelNotFoundError
Bases: Exception
```

```
androguard.core.api_specific_resources.load_permission_mappings(apilevel)
```

Load the API/Permission mapping for the requested API level. If the requested level was not found, None is returned.

**Parameters** `apilevel` – integer value of the API level, i.e. 24 for Android 7.0

**Returns** a dictionary of {MethodSignature: [List of Permissions]}

```
androguard.core.api_specific_resources.load_permissions(apilevel,
permtype='permissions')
```

Load the Permissions for the given apilevel.

The permissions lists are generated using this tool: [https://github.com/U039b/aosp\\_permissions\\_extraction](https://github.com/U039b/aosp_permissions_extraction)

Has a fallback to select the maximum or minimal available API level. For example, if 28 is requested but only 26 is available, 26 is returned. If 5 is requested but 16 is available, 16 is returned.

If an API level is requested which is in between of two API levels we got, the lower level is returned. For example, if 5,6,7,10 is available and 8 is requested, 7 is returned instead.

**Parameters**

- `apilevel` – integer value of the API level
- `permtype` – either load permissions ('permissions') or

permission groups ('groups') :return: a dictionary of {Permission Name: {Permission info}}

## androguard.core.bytecodes package

The bytecodes modules are one very important core feature of Androguard. They contain parsers for APK, AXML, DEX, ODEX and DEY files as well for formats used inside these formats. These might be MUTF-8 for string encoding in DEX files as well as the widely used LEB128 encoding for numbers.

The most important modules might be `androguard.core.bytecodes.apk.APK` and `androguard.core.bytecodes.dvm.DalvikVMFormat`.

### Submodules

#### androguard.core.bytecodes.apk module

**class** `androguard.core.bytecodes.apk.APK (filename, raw=False, magic_file=None, skip_analysis=False, testzip=False)`

Bases: `object`

##### **files**

Returns a dictionary of filenames and detected magic type

**Returns** dictionary of files and their mime type

##### **find\_tags (tag\_name, \*\*attribute\_filter)**

Return a list of all the matched tags in all available xml

**Parameters** `tag (str)` – specify the tag name

##### **find\_tags\_from\_xml (xml\_name, tag\_name, \*\*attribute\_filter)**

Return a list of all the matched tags in a specific xml w :param str xml\_name: specify from which xml to pick the tag from :param str tag\_name: specify the tag name

##### **get\_activities ()**

Return the android:name attribute of all activities

**Return type** a list of str

##### **get\_all\_attribute\_value (tag\_name, attribute, format\_value=True, \*\*attribute\_filter)**

Yields all the attribute values in xml files which match with the tag name and the specific attribute

##### **Parameters**

- `tag_name (str)` – specify the tag name
- `attribute (str)` – specify the attribute
- `format_value (bool)` – specify if the value needs to be formatted with packagename

##### **get\_all\_dex ()**

Return the raw data of all classes dex files

**Return type** a generator of bytes

##### **get\_android\_manifest\_axml ()**

Return the AXMLPrinter object which corresponds to the AndroidManifest.xml file

**Return type** `AXMLPrinter`

##### **get\_android\_manifest\_xml ()**

Return the parsed xml object which corresponds to the AndroidManifest.xml file

**Return type** Element

**get\_android\_resources()**

Return the `ARSCParser` object which corresponds to the resources.arsc file

**Return type** `ARSCParser`

**get\_androidversion\_code()**

Return the android version code

This information is read from the AndroidManifest.xml

**Return type** `str`

**get\_androidversion\_name()**

Return the android version name

This information is read from the AndroidManifest.xml

**Return type** `str`

**get\_app\_icon(max\_dpi=65536)**

Return the first icon file name, which density is not greater than max\_dpi, unless exact icon resolution is set in the manifest, in which case return the exact file.

This information is read from the AndroidManifest.xml

From [https://developer.android.com/guide/practices/screens\\_support.html](https://developer.android.com/guide/practices/screens_support.html) and [https://developer.android.com/ndk/reference/group\\_\\_configuration.html](https://developer.android.com/ndk/reference/group__configuration.html)

- DEFAULT 0dpi
- ldpi (low) 120dpi
- mdpi (medium) 160dpi
- TV 213dpi
- hdpi (high) 240dpi
- xhdpi (extra-high) 320dpi
- xxhdpi (extra-extra-high) 480dpi
- xxxhdpi (extra-extra-extra-high) 640dpi
- anydpi 65534dpi (0xFFFFE)
- nodpi 65535dpi (0xFFFF)

There is a difference between nodpi and anydpi: nodpi will be used if no other density is specified. Or the density does not match. nodpi is the fallback for everything else. If there is a resource that matches the DPI, this is used. anydpi is also valid for all densities but in this case, anydpi will overrule all other files! Therefore anydpi is usually used with vector graphics and with constraints on the API level. For example adaptive icons are usually marked as anydpi.

When it comes now to selecting an icon, there is the following flow:

1. is there an anydpi icon?
2. is there an icon for the dpi of the device?
3. is there a nodpi icon?
4. (only on very old devices) is there a icon with dpi 0 (the default)

For more information read here: <https://stackoverflow.com/a/34370735/446140>

**Return type** `str`

**get\_app\_name()**

Return the appname of the APK

This name is read from the AndroidManifest.xml using the application android:label. If no label exists, the android:label of the main activity is used.

If there is also no main activity label, an empty string is returned.

**Return type** str

**get\_attribute\_value(tag\_name, attribute, format\_value=False, \*\*attribute\_filter)**

Return the attribute value in xml files which matches the tag name and the specific attribute

**Parameters**

- **tag\_name** (str) – specify the tag name
- **attribute** (str) – specify the attribute
- **format\_value** (bool) – specify if the value needs to be formatted with packagename

**get\_certificate(filename)**

Return a X.509 certificate object by giving the name in the apk file

**Parameters** **filename** – filename of the signature file in the APK

**Returns** a Certificate certificate

**get\_certificate\_der(filename)**

Return the DER coded X.509 certificate from the signature file.

**Parameters** **filename** – Signature filename in APK

**Returns** DER coded X.509 certificate as binary

**get\_certificates()**

Return a list of unique asn1crypto.x509.Certificate which are found in v1, v2 and v3 signing. Note that we simply extract all certificates regardless of the signer. Therefore this is just a list of all certificates found in all signers.

**get\_certificates\_der\_v2()**

Return a list of DER coded X.509 certificates from the v3 signature block

**get\_certificates\_der\_v3()**

Return a list of DER coded X.509 certificates from the v3 signature block

**get\_certificates\_v1()**

Return a list of asn1crypto.x509.Certificate which are found in the META-INF folder (v1 signing). Note that we simply extract all certificates regardless of the signer. Therefore this is just a list of all certificates found in all signers.

**get\_certificates\_v2()**

Return a list of asn1crypto.x509.Certificate which are found in the v2 signing block. Note that we simply extract all certificates regardless of the signer. Therefore this is just a list of all certificates found in all signers.

**get\_certificates\_v3()**

Return a list of asn1crypto.x509.Certificate which are found in the v3 signing block. Note that we simply extract all certificates regardless of the signer. Therefore this is just a list of all certificates found in all signers.

**get\_declared\_permissions()**

Returns list of the declared permissions.

**Return type** list of strings

**get\_declared\_permissions\_details()**  
Returns declared permissions with the details.

**Return type** dict

**get\_details\_permissions()**  
Return permissions with details.

This can only return details about the permission, if the permission is defined in the AOSP.

**Return type** dict of {permission: [protectionLevel, label, description]}

**get\_dex()**  
Return the raw data of the classes dex file

This will give you the data of the file called *classes.dex* inside the APK. If the APK has multiple DEX files, you need to use [\*get\\_all\\_dex\(\)\*](#).

**Return type** bytes

**get\_dex\_names()**  
Return the names of all DEX files found in the APK. This method only accounts for “offical” dex files, i.e. all files in the root directory of the APK named classes.dex or classes[0-9]+.dex

**Return type** a list of str

**get\_effective\_target\_sdk\_version()**  
Return the effective targetSdkVersion, always returns int > 0.

If the targetSdkVersion is not set, it defaults to 1. This is set based on defaults as defined in: <https://developer.android.com/guide/topics/manifest/uses-sdk-element.html>

**Return type** int

**get\_element(tag\_name, attribute, \*\*attribute\_filter)**  
Deprecated since version 3.3.5: use [\*get\\_attribute\\_value\(\)\*](#) instead

Return element in xml files which match with the tag name and the specific attribute

**Parameters**

- **tag\_name** (str) – specify the tag name
- **attribute** (str) – specify the attribute

**Return type** str

**get\_elements(tag\_name, attribute, with\_namespace=True)**  
Deprecated since version 3.3.5: use [\*get\\_all\\_attribute\\_value\(\)\*](#) instead

Return elements in xml files which match with the tag name and the specific attribute

**Parameters**

- **tag\_name** (str) – a string which specify the tag name
- **attribute** (str) – a string which specify the attribute

**get\_features()**

Return a list of all android:names found for the tag uses-feature in the AndroidManifest.xml

**Returns** list

**get\_file(filename)**  
Return the raw data of the specified filename inside the APK

**Return type** bytes

**get\_filename()**

Return the filename of the APK

**Return type** str

**get\_files()**

Return the file names inside the APK.

**Return type** a list of str

**get\_files\_crc32()**

Calculates and returns a dictionary of filenames and CRC32

**Returns** dict of filename: CRC32

**get\_files\_information()**

Return the files inside the APK with their associated types and crc32

**Return type** str, str, int

**get\_files\_types()**

Return the files inside the APK with their associated types (by using python-magic)

At the same time, the CRC32 are calculated for the files.

**Return type** a dictionnary

**get\_intent\_filters(itemtype, name)**

Find intent filters for a given item and name.

Intent filter are attached to activities, services or receivers. You can search for the intent filters of such items and get a dictionary of all attached actions and intent categories.

**Parameters**

- **itemtype** – the type of parent item to look for, e.g. *activity*, *service* or *receiver*
- **name** – the *android:name* of the parent item, e.g. activity name

**Returns** a dictionary with the keys *action* and *category* containing the *android:name* of those items

**get\_libraries()**

Return the android:name attributes for libraries

**Return type** list

**get\_main\_activities()**

Return names of the main activities

These values are read from the AndroidManifest.xml

**Return type** a set of str

**get\_main\_activity()**

Return the name of the main activity

This value is read from the AndroidManifest.xml

**Return type** str

**get\_max\_sdk\_version()**

Return the android:maxSdkVersion attribute

**Return type** string

**get\_min\_sdk\_version()**

Return the android:minSdkVersion attribute

**Return type** string

**get\_package()**

Return the name of the package

This information is read from the AndroidManifest.xml

**Return type** str

**get\_permissions()**

Return permissions names declared in the AndroidManifest.xml.

It is possible that permissions are returned multiple times, as this function does not filter the permissions, i.e. it shows you exactly what was defined in the AndroidManifest.xml.

Implied permissions, which are granted automatically, are not returned here. Use [`get\_uses\_implied\_permission\_list\(\)`](#) if you need a list of implied permissions.

**Returns** A list of permissions

**Return type** list

**get\_providers()**

Return the android:name attribute of all providers

**Return type** a list of string

**get\_public\_keys\_der\_v2()**

Return a list of DER coded X.509 public keys from the v3 signature block

**get\_public\_keys\_der\_v3()**

Return a list of DER coded X.509 public keys from the v3 signature block

**get\_public\_keys\_v2()**

Return a list of `asn1crypto.keys.PublicKeyInfo` which are found in the v2 signing block.

**get\_public\_keys\_v3()**

Return a list of `asn1crypto.keys.PublicKeyInfo` which are found in the v3 signing block.

**get\_raw()**

Return raw bytes of the APK

**Return type** bytes

**get\_receivers()**

Return the android:name attribute of all receivers

**Return type** a list of string

**get\_requested\_aosp\_permissions()**

Returns requested permissions declared within AOSP project.

This includes several other permissions as well, which are in the platform apps.

**Return type** list of str

**get\_requested\_aosp\_permissions\_details()**

Returns requested aosp permissions with details.

**Return type** dictionary

**get\_requested\_permissions()**

Deprecated since version 3.1.0: use `get_permissions()` instead.

Returns all requested permissions.

It has the same result as `get_permissions()` and might be removed in the future

**Return type** list of str

**get\_requested\_third\_party\_permissions()**

Returns list of requested permissions not declared within AOSP project.

**Return type** list of strings

**get\_services()**

Return the android:name attribute of all services

**Return type** a list of str

**get\_signature()**

Return the data of the first signature file found (v1 Signature / JAR Signature)

**Return type** First signature name or None if not signed

**get\_signature\_name()**

Return the name of the first signature file found.

**get\_signature\_names()**

Return a list of the signature file names (v1 Signature / JAR Signature)

**Return type** List of filenames matching a Signature

**get\_signatures()**

Return a list of the data of the signature files. Only v1 / JAR Signing.

**Return type** list of bytes

**get\_target\_sdk\_version()**

Return the android:targetSdkVersion attribute

**Return type** string

**get\_uses\_implied\_permission\_list()**

Return all permissions implied by the target SDK or other permissions.

**Return type** list of string

**get\_value\_from\_tag(tag, attribute)**

Return the value of the android prefixed attribute in a specific tag.

This function will always try to get the attribute with a android: prefix first, and will try to return the attribute without the prefix, if the attribute could not be found. This is useful for some broken AndroidManifest.xml, where no android namespace is set, but could also indicate malicious activity (i.e. wrongly repackaged files). A warning is printed if the attribute is found without a namespace prefix.

If you require to get the exact result you need to query the tag directly:

**example::**

```
>>> from lxml.etree import Element
>>> tag = Element('bar', nsmap={'android': 'http://schemas.android.com/
    ↪apk/res/android'})
>>> tag.set('{http://schemas.android.com/apk/res/android}foobar', 'barfoo
    ↪')
>>> tag.set('name', 'baz')
```

(continues on next page)

(continued from previous page)

```
# Assume that `a` is some APK object
>>> a.get_value_from_tag(tag, 'name')
'baz'
>>> tag.get('name')
'baz'
>>> tag.get('foobar')
None
>>> a.get_value_from_tag(tag, 'foobar')
'barfoo'
```

### Parameters

- **tag** (`lxml.etree.Element`) – specify the tag element
- **attribute** (`str`) – specify the attribute name

**Returns** the attribute's value, or None if the attribute is not present

#### `is_androidtv()`

Checks if this application does not require a touchscreen, as this is the rule to get into the TV section of the Play Store See: <https://developer.android.com/training/tv/start/start.html> for more information.

**Returns** True if ‘android.hardware.touchscreen’ is not required, False otherwise

#### `is_leanback()`

Checks if this application is build for TV (Leanback support) by checkin if it uses the feature ‘android.software.leanback’

**Returns** True if leanback feature is used, false otherwise

#### `is_multidex()`

Test if the APK has multiple DEX files

**Returns** True if multiple dex found, otherwise False

#### `is_signed()`

Returns true if either a v1 or v2 (or both) signature was found.

#### `is_signed_v1()`

Returns true if a v1 / JAR signature was found.

Returning *True* does not mean that the file is properly signed! It just says that there is a signature file which needs to be validated.

#### `is_signed_v2()`

Returns true of a v2 / APK signature was found.

Returning *True* does not mean that the file is properly signed! It just says that there is a signature file which needs to be validated.

#### `is_signed_v3()`

Returns true of a v3 / APK signature was found.

Returning *True* does not mean that the file is properly signed! It just says that there is a signature file which needs to be validated.

#### `is_tag_matched(tag, **attribute_filter)`

Return true if the attributes matches in attribute filter.

An attribute filter is a dictionary containing: {attribute\_name: value}. This function will return True if and only if all attributes have the same value. This function allows to set the dictionary via kwargs, thus you can filter like this:

**example::** a.is\_tag\_matched(tag, name="foobar", other="barfoo")

This function uses a fallback for attribute searching. It will by default use the namespace variant but fall back to the non-namespace variant. Thus specifying {"name": "foobar"} will match on <bla name="foobar" \> as well as on <bla android:name="foobar" \>.

### Parameters

- **tag** (`lxml.etree.Element`) – specify the tag element
- **attribute\_filter** – specify the attribute filter as dictionary

### `is_valid_APK()`

Return true if the APK is valid, false otherwise. An APK is seen as valid, if the AndroidManifest.xml could be successful parsed. This does not mean that the APK has a valid signature nor that the APK can be installed on an Android system.

**Returns** boolean

### `is_wearable()`

Checks if this application is build for wearables by checking if it uses the feature ‘android.hardware.type.watch’ See: <https://developer.android.com/training/wearables/apps/creating.html> for more information.

Not every app is setting this feature (not even the example Google provides), so it might be wise to not 100% rely on this feature.

**Returns** True if wearable, False otherwise

### `new_zip(filename, deleted_files=None, new_files={})`

Create a new zip file

### Parameters

- **filename** (`string`) – the output filename of the zip
- **deleted\_files** (`None` or a `string`) – a regex pattern to remove specific file
- **new\_files** (a `dict` (`key:filename, value:content of the file`)) – a dictionary of new files

### `parse_signatures_or_digests(digest_bytes)`

Parse digests

### `parse_v2_signing_block()`

Parse the V2 signing block and extract all features

### `parse_v2_v3_signature()`

### `parse_v3_signing_block()`

Parse the V2 signing block and extract all features

### `read_uint32_le(io_stream)`

### `show()`

## `class androguard.core.bytecodes.apk.APKV2SignedData`

Bases: object

This class holds all data associated with an APK V3 SigningBlock signed data. source : <https://source.android.com/security/apksigning/v2.html>

**class** androguard.core.bytecodes.apk.**APKV2Signer**

Bases: object

This class holds all data associated with an APK V2 SigningBlock signer. source : <https://source.android.com/security/apksigning/v2.html>

**class** androguard.core.bytecodes.apk.**APKV3SignedData**

Bases: *androguard.core.bytecodes.apk(APKV2SignedData)*

This class holds all data associated with an APK V3 SigningBlock signed data. source : <https://source.android.com/security/apksigning/v3.html>

**class** androguard.core.bytecodes.apk.**APKV3Signer**

Bases: *androguard.core.bytecodes.apk(APKV2Signer)*

This class holds all data associated with an APK V3 SigningBlock signer. source : <https://source.android.com/security/apksigning/v3.html>

**exception** androguard.core.bytecodes.apk.**BrokenAPKError**

Bases: *androguard.core.bytecodes.apk.Error*

**exception** androguard.core.bytecodes.apk.**Error**

Bases: Exception

Base class for exceptions in this module.

**exception** androguard.core.bytecodes.apk.**FileNotFoundException**

Bases: *androguard.core.bytecodes.apk.Error*

*androguard.core.bytecodes.apk.ensure\_final\_value(packageName, arsc, value)*

Ensure incoming value is always the value, not the resid

androguard will sometimes return the Android “resId” aka Resource ID instead of the actual value. This checks whether the value is actually a resId, then performs the Android Resource lookup as needed.

*androguard.core.bytecodes.apk.get\_apkid(apkfile)*

Read (appid, versionCode, versionName) from an APK

This first tries to do quick binary XML parsing to just get the values that are needed. It will fallback to full androguard parsing, which is slow, if it can’t find the versionName value or versionName is set to a Android String Resource (e.g. an integer hex value that starts with @).

*androguard.core.bytecodes.apk.parse\_lxml\_dom(tree)*

*androguard.core.bytecodes.apk.show\_Certificate(cert, short=False)*

Print Fingerprints, Issuer and Subject of an X509 Certificate.

#### Parameters

- **cert** (`asn1crypto.x509.Certificate`) – X509 Certificate to print
- **short** (`Boolean`) – Print in shortform for DN (Default: False)

## androguard.core.bytecodes.dvm module

**class** androguard.core.bytecodes.dvm.**AnnotationElement** (*buff, cm*)

Bases: object

This class can parse an annotation\_element of a dex file

#### Parameters

- **buff** (`Buff object`) – a string which represents a Buff object of the annotation\_element

- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_name\_idx()**

Return the element name, represented as an index into the string\_ids section

**Return type** int

**get\_obj()**

**get\_raw()**

**get\_value()**

Return the element value (EncodedValue)

**Return type** a *EncodedValue* object

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationItem(*buff, cm*)

Bases: object

This class can parse an annotation\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotation()**

Return the encoded annotation contents

**Return type** a *EncodedAnnotation* object

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

**get\_visibility()**

Return the intended visibility of this annotation

**Return type** int

**reload()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationOffItem(*buff, cm*)

Bases: object

This class can parse an annotation\_off\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_off\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotation\_off()**

```
get_length()
get_obj()
get_raw()
show()

class androguard.core.bytecodes.dvm.AnnotationSetItem(buff, cm)
Bases: object
```

This class can parse an annotation\_set\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_set\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotation\_off\_item()**

Return the offset from the start of the file to an annotation

**Return type** a list of *AnnotationOffItem*

```
get_length()
get_obj()
get_off()
get_raw()
reload()
set_off(off)
show()
```

```
class androguard.core.bytecodes.dvm.AnnotationSetRefItem(buff, cm)
Bases: object
```

This class can parse an annotation\_set\_ref\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_set\_ref\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotations\_off()**

Return the offset from the start of the file to the referenced annotation set or 0 if there are no annotations for this element.

**Return type** int

```
get_obj()
get_raw()
show()
```

```
class androguard.core.bytecodes.dvm.AnnotationSetRefList(buff, cm)
Bases: object
```

This class can parse an annotation\_set\_ref\_list\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_set\_ref\_list\_item

- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_list()**

Return elements of the list

**Return type** *AnnotationSetRefItem*

**get\_obj()**

**get\_off()**

**get\_raw()**

**reload()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationsDirectoryItem(*buff, cm*)

Bases: object

This class can parse an annotations\_directory\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotations\_directory\_item

- **cm** (*ClassManager*) – a ClassManager object

**get.annotated\_fields\_size()**

Return the count of fields annotated by this item

**Return type** int

**get.annotated\_methods\_size()**

Return the count of methods annotated by this item

**Return type** int

**get.annotated\_parameters\_size()**

Return the count of method parameter lists annotated by this item

**Return type** int

**get.class\_annotations\_off()**

Return the offset from the start of the file to the annotations made directly on the class, or 0 if the class has no direct annotations

**Return type** int

**get.field\_annotations()**

Return the list of associated field annotations

**Return type** a list of *FieldAnnotation*

**get.length()**

**get.method\_annotations()**

Return the list of associated method annotations

**Return type** a list of *MethodAnnotation*

```
get_obj()
get_off()
get_parameter_annotations()
    Return the list of associated method parameter annotations

    Return type a list of ParameterAnnotation

get_raw()
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.ClassDataItem(buff, cm)
Bases: object

This class can parse a class_data_item of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the class_data_item
- cm (ClassManager) – a ClassManager object

get_direct_methods()
    Return the defined direct (any of static, private, or constructor) methods, represented as a sequence of encoded elements

    Return type a list of EncodedMethod objects

get_direct_methods_size()
    Return the number of direct methods defined in this item

    Return type int

get_fields()
    Return static and instance fields

    Return type a list of EncodedField objects

get_instance_fields()
    Return the defined instance fields, represented as a sequence of encoded elements

    Return type a list of EncodedField objects

get_instance_fields_size()
    Return the number of instance fields defined in this item

    Return type int

get_length()

get_methods()
    Return direct and virtual methods

    Return type a list of EncodedMethod objects

get_obj()
get_off()
get_raw()
```

```
get_static_fields()
    Return the defined static fields, represented as a sequence of encoded elements

    Return type a list of EncodedField objects

get_static_fields_size()
    Return the number of static fields defined in this item

    Return type int

get_virtual_methods()
    Return the defined virtual (none of static, private, or constructor) methods, represented as a sequence of
    encoded elements

    Return type a list of EncodedMethod objects

get_virtual_methods_size()
    Return the number of virtual methods defined in this item

    Return type int

reload()
set_off(off)
set_static_fields(value)
show()

class androguard.core.bytecodes.dvm.ClassDefItem(buff, cm)
Bases: object

This class can parse a class_def_item of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the class_def_item
- cm (ClassManager) – a ClassManager object

get_access_flags()
    Return the access flags for the class (public, final, etc.)

    Return type int

get_access_flags_string()
    Return the access flags string of the class

    Return type str

get_annotations_off()
    Return the offset from the start of the file to the annotations structure for this class, or 0 if there are no
    annotations on this class.

    Return type int

get_ast()

get_class_data()
    Return the associated class_data_item

    Return type a ClassDataItem object

get_class_data_off()
    Return the offset from the start of the file to the associated class data for this item, or 0 if there is no class
    data for this class
```

**Return type** int

**get\_class\_idx()**  
Return the index into the type\_ids list for this class

**Return type** int

**get\_fields()**  
Return all fields of this class

**Return type** a list of *EncodedField* objects

**get\_interfaces()**  
Return the name of the interface

**Return type** str

**get\_interfaces\_off()**  
Return the offset from the start of the file to the list of interfaces, or 0 if there are none

**Return type** int

**get\_length()**

**get\_methods()**  
Return all methods of this class

**Return type** a list of *EncodedMethod* objects

**get\_name()**  
Return the name of this class

**Return type** str

**get\_obj()**

**get\_raw()**

**get\_source()**

**get\_source\_ext()**

**get\_source\_file\_idx()**  
Return the index into the string\_ids list for the name of the file containing the original source for (at least most of) this class, or the special value NO\_INDEX to represent a lack of this information

**Return type** int

**get\_static\_values\_off()**  
Return the offset from the start of the file to the list of initial values for static fields, or 0 if there are none (and all static fields are to be initialized with 0 or null)

**Return type** int

**get\_superclass\_idx()**  
Return the index into the type\_ids list for the superclass

**Return type** int

**get\_superclassname()**  
Return the name of the super class

**Return type** str

**reload()**

**set\_name** (*value*)

```
show()
source()
    Return the source code of the entire class

Return type string

class androguard.core.bytecodes.dvm.ClassHDefItem(size, buff, cm)
Bases: object

This class can parse a list of class_def_item of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the list of class_def_item
- cm (ClassManager) – a ClassManager object

get_class_idx(idx)
get_length()
get_method(name_class, name_method)
get_names()
get_obj()
get_off()
get_raw()
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.ClassManager(vm, config)
Bases: object

This class is used to access to all elements (strings, type, proto ...) of the dex format based on their offset or index.

add_type_item(type_item, c_item, item)
get_all_engine()
    Deprecated since version 3.3.5: do not use this function anymore!
get_ascii_string(s)
get_class_data_item(off)
get_code(idx)
get_debug_off(off)
get_encoded_array_item(off)
get_engineget_field(idx)
get_field_ref(idx)
get_item_by_offset(offset)
```

```
get_lazy_analysis()
    Deprecated since version 3.3.5: do not use this function anymore!

get_method(idx)
get_method_ref(idx)
get_next_offset_item(idx)
get_obj_by_offset(offset)
    Returns a object from as given offset inside the DEX file

get_odex_format()
    Returns True if the underlying VM is ODEX

get_proto(idx)
get_raw_string(idx)
    Return the (unprocessed) string from the string table at index idx.
    Parameters idx (int) – the index in the string section

get_string(idx)
    Return a string from the string table at index idx.
    Parameters idx (int) – index in the string section

get_string_by_offset(offset)
get_type(idx)
    Return the resolved type name based on the index
    Parameters idx (int) –
    Returns the type name
    Return type str

get_type_list(off)
get_type_ref(idx)
set_decompiler(decompiler)
set_hook_class_name(class_def, value)
set_hook_field_name(encoded_field, value)
set_hook_method_name(encoded_method, value)
set_hook_string(idx, value)

class androguard.core.bytecodes.dvm.CodeItem(size, buff, cm)
Bases: object
    get_code(off)
    get_length()
    get_obj()
    get_off()
    get_raw()
    reload()
    set_off(off)
```

```
show()

class androguard.core.bytecodes.dvm.ConstString(orig_ins, value)
    Bases: androguard.core.bytecodes.dvm.Instruction2lc

    Simulate a const-string instruction.

get_operands(idx=-1)
    Return all operands

        Return type list

get_raw_string()

class androguard.core.bytecodes.dvm.DBGBytecode(cm, op_value)
    Bases: object

    add(value, ttype)

    get_obj()

    get_op_value()

    get_raw()

    get_value()

    show()

class androguard.core.bytecodes.dvm.DCode(class_manager, offset, size, buff)
    Bases: object
```

This class represents the instructions of a method

#### Parameters

- **class\_manager** (*ClassManager* object) – the ClassManager
- **offset** (*int*) – the offset of the buffer
- **size** (*int*) – the total size of the buffer
- **buff** (*string*) – a raw buffer where are the instructions

**add\_inote**(msg, idx, off=None)

Add a message to a specific instruction by using (default) the index of the address if specified

#### Parameters

- **msg** (*string*) – the message
- **idx** (*int*) – index of the instruction (the position in the list of the instruction)
- **off** (*int*) – address of the instruction

**get\_insn\_off**(off)

Get a particular instruction by using the address

**Parameters** **off** (*int*) – address of the instruction

**Return type** an *Instruction* object

**get\_insn()**

Get the insn buffer

**Return type** string

**get\_instruction**(idx, off=None)

Get a particular instruction by using (default) the index of the address if specified

**Parameters**

- **idx** (*int*) – index of the instruction (the position in the list of the instruction)
- **off** (*int*) – address of the instruction

**Return type** an *Instruction* object

**get\_instructions()**

Get the instructions

**Return type** a generator of each *Instruction* (or a cached list of instructions if you have setup instructions)

**get\_length()**

Return the length of this object

**Return type** int

**get\_raw()**

Return the raw buffer of this object

**Return type** bytearray

**is\_cached\_instructions()**

**off\_to\_pos** (*off*)

Get the position of an instruction by using the address

**Parameters** **off** (*int*) – address of the instruction

**Return type** int

**reload()**

**set\_idx** (*idx*)

Set the start address of the buffer

**Parameters** **idx** (*int*) – the index

**setInsn** (*insn*)

Set a new raw buffer to disassemble

**Parameters** **insn** (*string*) – the buffer

**set\_instructions** (*instructions*)

Set the instructions

**Parameters** **instructions** (a list of *Instruction*) – the list of instructions

**show()**

Display (with a pretty print) this object

**class** androguard.core.bytecodes.dvm.**DalvikCode** (*buff*, *cm*)

Bases: object

This class represents the instructions of a method

**Parameters**

- **buff** (*string*) – a raw buffer where are the instructions
- **cm** (*ClassManager* object) – the ClassManager

**add\_inote** (*msg*, *idx*, *off=None*)

Add a message to a specific instruction by using (default) the index of the address if specified

**Parameters**

- **msg** (*string*) – the message
- **idx** (*int*) – index of the instruction (the position in the list of the instruction)
- **off** (*int*) – address of the instruction

**get\_bc()**

Return the associated code object

**Return type** *DCode*

**get\_debug()**

Return the associated debug object

**Return type** *DebugInfoItem*

**get\_debug\_info\_off()**

Get the offset from the start of the file to the debug info (line numbers + local variable info) sequence for this code, or 0 if there simply is no information

**Return type** int

**get\_handlers()**

Get the bytes representing a list of lists of catch types and associated handler addresses.

**Return type** *EncodedCatchHandlerList*

**get\_ins\_size()**

Get the number of words of incoming arguments to the method that this code is for

**Return type** int

**get\_insn\_size()**

Get the size of the instructions list, in 16-bit code units

**Return type** int

**get\_instruction(idx, off=None)**

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_outs\_size()**

Get the number of words of outgoing argument space required by this code for method invocation

**Return type** int

**get\_raw()**

Get the reconstructed code as bytearray

**Return type** bytearray

**get\_registers\_size()**

Get the number of registers used by this code

**Return type** int

**get\_size()**

**get\_tries()**

Get the array indicating where in the code exceptions are caught and how to handle them

**Return type** a list of *TryItem* objects

```
get_tries_size()
    Get the number of TryItem for this instance

    Return type int

reload()

set_idx(idx)

set_off(off)

show()

class androguard.core.bytecodes.dvm.DalvikOdexVMFormat(buff, decompiler=None,
                                                       config=None, us-
                                                       ing_api=None)
Bases: androguard.core.bytecodes.dvm.DalvikVMFormat
```

This class can parse an odex file

#### Parameters

- **buff** (*string*) – a string which represents the odex file
- **decompiler** (*object*) – associate a decompiler object to display the java source code

**Example** `DalvikOdexVMFormat( read("classes.odex") )`

**get\_buff()**

Return the whole buffer

**Return type** bytearray

**get\_dependencies()**

Return the odex dependencies object

**Return type** an OdexDependencies object

**get\_format\_type()**

Return the type

**Return type** a string

**save()**

Do not use !

```
class androguard.core.bytecodes.dvm.DalvikVMFormat(buff, decompiler=None, con-
                                                       fig=None, using_api=None)
Bases: androguard.core.bytecode.BuffHandle
```

This class can parse a classes.dex file of an Android application (APK).

#### Parameters

- **buff** (*string*) – a string which represents the classes.dex file
- **decompiler** (*object*) – associate a decompiler object to display the java source code

example:

```
d = DalvikVMFormat( read("classes.dex") )
```

**colorize\_operands(operands, colors)**

**create\_python\_export()**

Export classes/methods/fields' names in the python namespace

**disassemble** (*offset*, *size*)

Disassembles a given offset in the DEX file

**Parameters**

- **offset** (*int*) – offset to disassemble in the file (from the beginning of the file)
- **size** –

**fix\_checksums** (*buff*)

Fix a dex format buffer by setting all checksums

**Return type** string

**get\_BRANCH\_DVM\_OPCODES** ()

**get\_all\_fields** ()

Return a list of field items

**Return type** a list of *FieldDefItem* objects

**get\_api\_version** ()

This method returns api version that should be used for loading api specific resources.

**Return type** int

**get\_class** (*name*)

Return a specific class

**Parameters** **name** – the name of the class

**Return type** a *ClassDefItem* object

**get\_class\_manager** ()

This function returns a ClassManager object which allow you to get access to all index references (strings, methods, fields, ....)

**Return type** *ClassManager* object

**get\_classes** ()

Return all classes

**Return type** a list of *ClassDefItem* objects

**get\_classes\_def\_item** ()

This function returns the class def item

**Return type** *ClassHDefItem* object

**get\_classes\_names** (*update=False*)

Return the names of classes

**Parameters** **update** – True indicates to recompute the list. Maybe needed after using a My-Class.set\_name().

**Return type** a list of string

**get\_cm\_field** (*idx*)

Get a specific field by using an index

**Parameters** **idx** (*int*) – index of the field

**get\_cm\_method** (*idx*)

Get a specific method by using an index

**Parameters** **idx** (*int*) – index of the method

**get\_cm\_string**(*idx*)

Get a specific string by using an index

**Parameters** **idx** (*int*) – index of the string

**get\_cm\_type**(*idx*)

Get a specific type by using an index

**Parameters** **idx** (*int*) – index of the type

**get\_codes\_item**()

This function returns the code item

**Return type** *CodeItem* object

**get\_debug\_info\_item**()

This function returns the debug info item

**Return type** *DebugInfoItem* object

**get\_determineException**()**get\_determineNext**()**get\_field**(*name*)

Return a list all fields which corresponds to the regexp

**Parameters** **name** – the name of the field (a python regexp)

**Return type** a list with all *EncodedField* objects

**get\_field\_descriptor**(*class\_name*, *field\_name*, *descriptor*)

Return the specific field

**Parameters**

- **class\_name** (*string*) – the class name of the field
- **field\_name** (*string*) – the name of the field
- **descriptor** (*string*) – the descriptor of the field

**Return type** None or a *EncodedField* object

**get\_fields**()

Return all field objects

**Return type** a list of *EncodedField* objects

**get\_fields\_class**(*class\_name*)

Return all fields of a specific class

**Parameters** **class\_name** (*string*) – the class name

**Return type** a list with *EncodedField* objects

**get\_fields\_id\_item**()

This function returns the field id item

**Return type** *FieldHIDItem* object

**get\_format**()**get\_format\_type**()

Return the type

**Return type** a string

**get\_header\_item()**

This function returns the header item

**Return type** *HeaderItem* object

**get\_len\_methods()**

Return the number of methods

**Return type** int

**get\_method(name)**

Return a list all methods which corresponds to the regexp

**Parameters** **name** – the name of the method (a python regexp)

**Return type** a list with all *EncodedMethod* objects

**get\_method\_by\_idx(idx)**

Return a specific method by using an index :param idx: the index of the method :type idx: int

**Return type** None or an *EncodedMethod* object

**get\_method\_descriptor(class\_name, method\_name, descriptor)**

Return the specific method

**Parameters**

- **class\_name** (string) – the class name of the method
- **method\_name** (string) – the name of the method
- **descriptor** (string) – the descriptor of the method

**Return type** None or a *EncodedMethod* object

**get\_methods()**

Return all method objects

**Return type** a list of *EncodedMethod* objects

**get\_methods\_class(class\_name)**

Return all methods of a specific class

**Parameters** **class\_name** (string) – the class name

**Return type** a list with *EncodedMethod* objects

**get\_methods\_descriptor(class\_name, method\_name)**

Return the specific methods of the class

**Parameters**

- **class\_name** (string) – the class name of the method
- **method\_name** (string) – the name of the method

**Return type** None or a *EncodedMethod* object

**get\_methods\_id\_item()**

This function returns the method id item

**Return type** *MethodHIDItem* object

**get\_operand\_html(operand, registers\_colors, colors, escape\_fct, wrap\_fct)**

**get\_regex\_strings(regular\_expressions)**

Return all target strings matched the regex

**Parameters** `regular_expressions` (*string*) – the python regex

**Return type** a list of strings matching the regex expression

**get\_string\_data\_item()**

This function returns the string data item

**Return type** `StringDataItem` object

**get\_strings()**

Return all strings

The strings will have escaped surrogates, if only a single high or low surrogate is found. Complete surrogates are put together into the representing 32bit character.

**Return type** a list with all strings used in the format (types, names ...)

**get\_strings\_unicode()**

Return all strings

This method will return pure UTF-16 strings. This is the “exact” same string as used in Java. Those strings can be problematic for python, as they can contain surrogates as well as “broken” surrogate pairs, ie single high or low surrogates. Such a string can for example not be printed. To avoid such problems, there is an escape mechanism to detect such lonely surrogates and escape them in the string. Of course, this results in a different string than in the Java Source!

Use `get_strings()` as a general purpose and `get_strings_unicode()` if you require the exact string from the Java Source. You can always escape the string from `get_strings_unicode()` using the function `androguard.core.bytecodes.mutf8.patch_string()`

**Return type** a list with all strings used in the format (types, names ...)

**get\_vmanalysis()**

Deprecated since version 3.1.0: The `Analysis` is not loaded anymore into `DalvikVMFormat` in order to avoid cyclic dependencies. `Analysis` extends now `DalvikVMFormat`. This Method does nothing anymore!

The Analysis Object should contain all the information required, including the DalvikVMFormats.

**list\_classes\_hierarchy()**

**print\_classes\_hierarchy()**

**save()**

Return the dex (with the modifications) into raw format (fix checksums) (beta: do not use !)

**Return type** string

**set\_decompiler(decompiler)**

**set\_vmanalysis(analysis)**

Deprecated since version 3.1.0: The `Analysis` is not loaded anymore into `DalvikVMFormat` in order to avoid cyclic dependencies. `Analysis` extends now `DalvikVMFormat`. This Method does nothing anymore!

The Analysis Object should contain all the information required, including the DalvikVMFormats.

**show()**

Show the all information in the object

**class** `androguard.core.bytecodes.dvm.DebugInfoItem(buff, cm)`

Bases: object

**get\_bytecodes()**

```
get_line_start()
get_off()
get_parameter_names()
get_parameters_size()
get_raw()
get_translated_parameter_names()
reload()
show()

class androguard.core.bytecodes.dvm.DebugInfoItemEmpty(buff, cm)
Bases: object

get_length()
get_obj()
get_off()
get_raw()
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.EncodedAnnotation(buff, cm)
Bases: object
```

This class can parse an encoded\_annotation of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_annotation
- **cm** (*ClassManager*) – a ClassManager object

**get\_elements()**

Return the elements of the annotation, represented directly in-line (not as offsets)

**Return type** a list of *AnnotationElement* objects

**get\_length()**

**get\_obj()**

**get\_raw()**

**get\_size()**

Return the number of name-value mappings in this annotation

:rtype:int

**get\_type\_idx()**

Return the type of the annotation. This must be a class (not array or primitive) type

**Return type** int

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedArray** (*buff, cm*)

Bases: object

This class can parse an encoded\_array of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_array
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_obj()**

**get\_raw()**

**get\_size()**

Return the number of elements in the array

**Return type** int

**get\_values()**

Return a series of size encoded\_value byte sequences in the format specified by this section, concatenated sequentially

**Return type** a list of *EncodedValue* objects

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedArrayItem** (*buff, cm*)

Bases: object

This class can parse an encoded\_array\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_array\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

**get\_value()**

Return the bytes representing the encoded array value

**Return type** a *EncodedArray* object

**reload()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedCatchHandler** (*buff, cm*)

Bases: object

This class can parse an encodedCatch\_handler of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the encodedCatchHandler

- **cm** (*ClassManager*) – a ClassManager object

**getCatchAllAddr()**

Return the bytecode address of the catch-all handler. This element is only present if size is non-positive.

**Return type** int

**getHandlers()**

Return the stream of abs(size) encoded items, one for each caught type, in the order that the types should be tested.

**Return type** a list of *EncodedTypeAddrPair* objects

**getLength()**

**getOff()**

**getRaw()**

**Return type** bytearray

**getSize()**

Return the number of catch types in this list

**Return type** int

**setOff(off)**

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedCatchHandlerList** (*buff, cm*)

Bases: object

This class can parse an encodedCatchHandlerList of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encodedCatchHandlerList
- **cm** (*ClassManager*) – a ClassManager object

**getLength()**

**getList()**

Return the actual list of handler lists, represented directly (not as offsets), and concatenated sequentially

**Return type** a list of *EncodedCatchHandler* objects

**getObj()**

**getOff()**

**getRaw()**

**Return type** bytearray

**getSize()**

Return the size of this list, in entries

**Return type** int

**setOff(off)**

**show()**

```
class androguard.core.bytecodes.dvm.EncodedField(buff, cm)
```

Bases: object

This class can parse an encoded\_field of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded field
- **cm** (*ClassManager*) – a ClassManager object

**adjust\_idx** (val)

**get\_access\_flags** ()

Return the access flags of the field

**Return type** int

**get\_access\_flags\_string** ()

Return the access flags string of the field

**Return type** string

**get\_class\_name** ()

Return the class name of the field

**Return type** string

**get\_descriptor** ()

Return the descriptor of the field

The descriptor of a field is the type of the field.

**Return type** string

**get\_field\_idx** ()

Return the real index of the method

**Return type** int

**get\_field\_idx\_diff** ()

Return the index into the field\_ids list for the identity of this field (includes the name and descriptor), represented as a difference from the index of previous element in the list

**Return type** int

**get\_init\_value** ()

Return the init value object of the field

**Return type** EncodedValue

**get\_name** ()

Return the name of the field

**Return type** string

**get\_obj** ()

**get\_raw** ()

**get\_size** ()

**load** ()

**reload** ()

**set\_init\_value** (value)

Setup the init value object of the field

**Parameters** `value` (*EncodedValue*) – the init value

**set\_name** (*value*)

**show** ()

Display the information (with a pretty print) about the field

**class** androguard.core.bytecodes.dvm.**EncodedMethod** (*buff, cm*)

Bases: object

This class can parse an encoded\_method of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_method
- **cm** (*ClassManager*) – a ClassManager object

**access\_flags = None**

access flags of the method

**add\_inote** (*msg, idx, off=None*)

Add a message to a specific instruction by using (default) the index of the address if specified

#### Parameters

- **msg** (*string*) – the message
- **idx** (*int*) – index of the instruction (the position in the list of the instruction)
- **off** (*int*) – address of the instruction

**add\_note** (*msg*)

Add a message to this method

#### Parameters **msg** (*string*) – the message

**adjust\_idx** (*val*)

**code\_off = None**

offset of the code section

**each\_params\_by\_register** (*nb, proto*)

From the Dalvik Bytecode documentation:

- > The N arguments to a method land in the last N registers > of the method's invocation frame, in order.
- > Wide arguments consume two registers. > Instance methods are passed a this reference as their first argument.

This method will print a description of the register usage to stdout.

#### Parameters

- **nb** – number of registers
- **proto** – descriptor of method

**get\_access\_flags** ()

Return the access flags of the method

**Return type** int

**get\_access\_flags\_string** ()

Return the access flags string of the method

A description of all access flags can be found here: <https://source.android.com/devices/tech/dalvik/dex-format#access-flags>

**Return type** string

**get\_address()**  
Return the offset from the start of the file to the code structure for this method, or 0 if this method is either abstract or native

**Return type** int

**get\_class\_name()**  
Return the class name of the method

**Return type** string

**get\_code()**  
Return the code object associated to the method

**Return type** `DalvikCode` object or None if no Code

**get\_code\_off()**  
Return the offset from the start of the file to the code structure for this method, or 0 if this method is either abstract or native

**Return type** int

**get\_debug()**  
Return the debug object associated to this method

**Return type** `DebugInfoItem`

**get\_descriptor()**  
Return the descriptor of the method A method descriptor will have the form (A A A ...)R Where A are the arguments to the method and R is the return type. Basic types will have the short form, i.e. I for integer, V for void and class types will be named like a classname, e.g. Ljava/lang/String;.

Typical descriptors will look like this: ` (I)I // one integer argument, integer  
return (C)Z // one char argument, boolean as return (Ljava/lang/CharSequence; I)I // CharSequence and integer as argument, integer as return (C)Ljava/lang/String; // char as argument, String as return.  
`

More information about type descriptors are found here: <https://source.android.com/devices/tech/dalvik/dex-format#typedescriptor>

**Return type** string

**get\_information()**

**get\_instruction(idx, off=None)**  
Get a particular instruction by using (default) the index of the address if specified

**Parameters**

- **idx (int)** – index of the instruction (the position in the list of the instruction)
- **off (int)** – address of the instruction

**Return type** an `Instruction` object

**get\_instructions()**  
Get the instructions

**Return type** a generator of each `Instruction` (or a cached list of instructions if you have setup instructions)

```
get_length()
    Return the length of the associated code of the method

    Return type int

get_locals()
get_method_idx()
    Return the real index of the method

    Return type int

get_method_idx_diff()
    Return index into the method_ids list for the identity of this method (includes the name and descriptor),
    represented as a difference from the index of previous element in the lis

    Return type int

get_name()
    Return the name of the method

    Return type string

get_raw()
get_short_string()
    Return a shorter formatted String which encodes this method. The returned name has the form: <classname> <methodname> ([arguments ...])<returntype>
        • All Class names are condensed to the actual name (no package).
        • Access flags are not returned.
        • <init> and <clinit> are NOT replaced by the classname!
    This name might not be unique!

    Returns str

get_size()
get_source()
get_triple()
is_cached_instructions()
load()
method_idx_diff = None
    method index diff in the corresponding section

reload()
set_code_idx(idx)
    Set the start address of the buffer to disassemble

    Parameters idx (int) – the index

set_instructions(instructions)
    Set the instructions

    Parameters instructions (a list of Instruction) – the list of instructions

set_name(value)
show()
    Display the information (with a pretty print) about the method
```

```
show_info()
    Display the basic information about the method

show_notes()
    Display the notes about the method

source()
    Return the source code of this method

    Return type string

class androguard.core.bytecodes.dvm.EncodedTypeAddrPair(buff)
Bases: object

This class can parse an encoded_type_addr_pair of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the encoded_type_addr_pair
- cm (ClassManager) – a ClassManager object

get_addr()
    Return the bytecode address of the associated exception handler

    Return type int

get_length()
get_obj()
get_raw()
get_type_idx()
    Return the index into the type_ids list for the type of the exception to catch

    Return type int

show()

class androguard.core.bytecodes.dvm.EncodedValue(buff, cm)
Bases: object

This class can parse an encoded_value of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the encoded_value
- cm (ClassManager) – a ClassManager object

get_length()
get_obj()
get_raw()
get_value()
    Return the bytes representing the value, variable in length and interpreted differently for different value_type bytes, though always little-endian

    Return type an object representing the value

get_value_arg()
get_value_type()
```

```
show()

exception androguard.core.bytecodes.dvm.Error
Bases: Exception

Base class for exceptions in this module.

class androguard.core.bytecodes.dvm.ExportObject
Bases: object

Wrapper object for ipython exports

class androguard.core.bytecodes.dvm.FakeNop(length)
Bases: androguard.core.bytecodes.dvm.Instruction10x

Simulate a nop instruction.

get_length()
Return the length of the instruction

    Return type int

class androguard.core.bytecodes.dvm.FieldAnnotation(buff, cm)
Bases: object

This class can parse a field_annotation of a dex file

Parameters
• buff (Buff object) – a string which represents a Buff object of the field_annotation
• cm (ClassManager) – a ClassManager object

get_annotations_off()
Return the offset from the start of the file to the list of annotations for the field

    Return type int

get_field_idx()
Return the index into the field_ids list for the identity of the field being annotated

    Return type int

get_length()
get_obj()
get_off()
get_raw()
set_off(off)
show()

class androguard.core.bytecodes.dvm.FieldHIdItem(size, buff, cm)
Bases: object

This class can parse a list of field_id_item of a dex file

Parameters
• buff (Buff object) – a string which represents a Buff object of the list of field_id_item
• cm (ClassManager) – a ClassManager object

get(idx)
get_length()
```

```
get_obj()
get_off()
get_raw()
gets()
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.FieldIdItem(buff, cm)
Bases: object
```

This class can parse a field\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the field\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_class\_idx()**

Return the index into the type\_ids list for the definer of this field

**Return type** int

**get\_class\_name()**

Return the class name of the field

**Return type** string

**get\_descriptor()**

Return the descriptor of the field

**Return type** string

**get\_length()**

**get\_list()**

**get\_name()**

Return the name of the field

**Return type** string

**get\_name\_idx()**

Return the index into the string\_ids list for the name of this field

**Return type** int

**get\_obj()**

**get\_raw()**

**get\_type()**

Return the type of the field

**Return type** string

**get\_type\_idx()**

Return the index into the type\_ids list for the type of this field

**Return type** int

**reload()**

```
show()

class androguard.core.bytecodes.dvm.FieldIdItemInvalid
Bases: object

get_class_name()
get_descriptor()
get_list()
get_name()
get_type()
show()

class androguard.core.bytecodes.dvm.FillArrayData(buff)
Bases: object
```

This class can parse a FillArrayData instruction

**Parameters** `buff` – a Buff object which represents a buffer where the instruction is stored

`add_note(msg)`  
Add a note to this instruction

**Parameters** `msg(objects (string))` – the message

`get_data()`  
Return the data of this instruction (the payload)

**Return type** string

`get_formatted_operands()`

`get_hex()`  
Returns a HEX String, separated by spaces every byte

`get_length()`  
Return the length of the instruction

**Return type** int

`get_name()`  
Return the name of the instruction

**Return type** string

`get_notes()`  
Get all notes from this instruction

**Return type** a list of objects

`get_op_value()`  
Get the value of the opcode

**Return type** int

`get_operands(idx=-1)`

`get_output(idx=-1)`  
Return an additional output of the instruction

**Return type** string

`get_raw()`

**show**(pos)  
Print the instruction

**show\_buff**(pos)  
Return the display of the instruction

**Return type** string

**class** androguard.core.bytecodes.dvm.HeaderItem(size, buff, cm)  
Bases: object

This class can parse an header\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the header\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_length**()

**get\_obj**()

**get\_off**()

**get\_raw**()

**reload**()

**set\_off**(off)

**show**()

**class** androguard.core.bytecodes.dvm.Instruction  
Bases: object

This class represents a dalvik instruction

**get\_formatted\_operands**()

**get\_hex**()

Returns a HEX String, separated by spaces every byte

**get\_kind**()

Return the ‘kind’ argument of the instruction

**Return type** int

**get\_length**()

Return the length of the instruction

**Return type** int

**get\_literals**()

Return the associated literals

**Return type** list of int

**get\_name**()

Return the name of the instruction

**Return type** string

**get\_op\_value**()

Return the value of the opcode

**Return type** int

```
get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string

get_ref_kind ()
    Return the value of the ‘kind’ argument

    Return type value

get_translated_kind ()
    Return the translated value of the ‘kind’ argument

    Return type string

show (idx)
    Print the instruction

show_buff (idx)
    Return the display of the instruction

    Return type string

class androguard.core.bytecodes.dvm.Instruction10t (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 10t format

get_length ()
    Return the length of the instruction

    Return type int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string

get_ref_off ()

class androguard.core.bytecodes.dvm.Instruction10x (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 10x format

get_length ()
    Return the length of the instruction
```

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**class androguard.core.bytecodes.dvm.Instruction11n (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 11n format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_literals ()**  
Return the associated literals

**Return type** list of int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**class androguard.core.bytecodes.dvm.Instruction11x (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 11x format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction12x**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 12x format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction20bc**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 20bc format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction20t**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 20t format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output** (*idx=-1*)  
Return an additional output of the instruction

**Return type** string

**get\_raw** ()  
Return the object in a raw format

**Return type** string

**get\_ref\_off** ()

**class** androguard.core.bytecodes.dvm.**Instruction21c** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 21c format

**get\_length** ()  
Return the length of the instruction

**Return type** int

**get\_operands** (*idx=-1*)  
Return all operands

**Return type** list

**get\_output** (*idx=-1*)  
Return an additional output of the instruction

**Return type** string

**get\_raw** ()  
Return the object in a raw format

**Return type** string

**get\_raw\_string** ()

**get\_ref\_kind** ()  
Return the value of the ‘kind’ argument

**Return type** value

**get\_string** ()

**class** androguard.core.bytecodes.dvm.**Instruction21h** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 21h format

**get\_formatted\_operands** ()

**get\_length** ()  
Return the length of the instruction

**Return type** int

**get\_literals** ()  
Return the associated literals

**Return type** list of int

**get\_operands** (*idx=-1*)  
Return all operands

**Return type** list

**get\_output** (*idx=-1*)

Return an additional output of the instruction

**Return type** string

**get\_raw** ()

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction21s** (*cm, buff*)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 21s format

**get\_formatted\_operands** ()

**get\_length** ()

Return the length of the instruction

**Return type** int

**get\_literals** ()

Return the associated literals

**Return type** list of int

**get\_operands** (*idx=-1*)

Return all operands

**Return type** list

**get\_output** (*idx=-1*)

Return an additional output of the instruction

**Return type** string

**get\_raw** ()

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction21t** (*cm, buff*)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 21t format

**get\_length** ()

Return the length of the instruction

**Return type** int

**get\_operands** (*idx=-1*)

Return all operands

**Return type** list

**get\_output** (*idx=-1*)

Return an additional output of the instruction

**Return type** string

**get\_raw** ()

Return the object in a raw format

**Return type** string

**get\_ref\_off()**

**class** androguard.core.bytecodes.dvm.**Instruction22b** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22b format

**get\_length()**

    Return the length of the instruction

**Return type** int

**get\_literals()**

    Return the associated literals

**Return type** list of int

**get\_operands** (*idx=-1*)

    Return all operands

**Return type** list

**get\_output** (*idx=-1*)

    Return an additional output of the instruction

**Return type** string

**get\_raw()**

    Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction22c** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22c format

**get\_length()**

    Return the length of the instruction

**Return type** int

**get\_operands** (*idx=-1*)

    Return all operands

**Return type** list

**get\_output** (*idx=-1*)

    Return an additional output of the instruction

**Return type** string

**get\_raw()**

    Return the object in a raw format

**Return type** string

**get\_ref\_kind()**

    Return the value of the ‘kind’ argument

**Return type** value

**class** androguard.core.bytecodes.dvm.**Instruction22cs** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22cs format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**get\_ref\_kind()**

Return the value of the ‘kind’ argument

**Return type** value

**class** androguard.core.bytecodes.dvm.**Instruction22s**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22s format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_literals()**

Return the associated literals

**Return type** list of int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction22t**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22t format

**get\_length()**

Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

get_ref_off()

class androguard.core.bytecodes.dvm.Instruction22x(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 22x format

get_length()
    Return the length of the instruction

    Return type int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

class androguard.core.bytecodes.dvm.Instruction23x(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 23x format

get_length()
    Return the length of the instruction

    Return type int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string
```

```
class androguard.core.bytecodes.dvm.Instruction30t(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 30t format

```
get_length()
```

Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
```

Return all operands

**Return type** list

```
get_output(idx=-1)
```

Return an additional output of the instruction

**Return type** string

```
get_raw()
```

Return the object in a raw format

**Return type** string

```
get_ref_off()
```

```
class androguard.core.bytecodes.dvm.Instruction31c(cm, buff)
```

```
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 31c format

```
get_length()
```

Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
```

Return all operands

**Return type** list

```
get_output(idx=-1)
```

Return an additional output of the instruction

**Return type** string

```
get_raw()
```

Return the object in a raw format

**Return type** string

```
get_raw_string()
```

```
get_ref_kind()
```

Return the value of the ‘kind’ argument

**Return type** value

```
get_string()
```

Return the string associated to the ‘kind’ argument

**Return type** string

```
class androguard.core.bytecodes.dvm.Instruction31i(cm, buff)
```

```
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 3li format

**get\_formatted\_operands()**

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_literals()**

Return the associated literals

**Return type** list of int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**class androguard.core.bytecodes.dvm.Instruction31t(cm, buff)**

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 31t format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**get\_ref\_off()**

**class androguard.core.bytecodes.dvm.Instruction32x(cm, buff)**

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 32x format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**

Return all operands

**Return type** list

**get\_output (idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw ()**

Return the object in a raw format

**Return type** string

**class androguard.core.bytecodes.dvm.Instruction35c (cm, buff)**

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 35c format

**get\_length ()**

Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**

Return all operands

**Return type** list

**get\_output (idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw ()**

Return the object in a raw format

**Return type** string

**get\_ref\_kind ()**

Return the value of the ‘kind’ argument

**Return type** value

**class androguard.core.bytecodes.dvm.Instruction35mi (cm, buff)**

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 35mi format

**get\_length ()**

Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**

Return all operands

**Return type** list

**get\_output (idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw ()**

Return the object in a raw format

**Return type** string

**get\_ref\_kind()**  
Return the value of the ‘kind’ argument

**Return type** value

**class** androguard.core.bytecodes.dvm.**Instruction35ms** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 35ms format

**get\_length()**  
Return the length of the instruction

**Return type** int

**get\_operands** (*idx=-1*)  
Return all operands

**Return type** list

**get\_output** (*idx=-1*)  
Return an additional output of the instruction

**Return type** string

**get\_raw()**  
Return the object in a raw format

**Return type** string

**get\_ref\_kind()**  
Return the value of the ‘kind’ argument

**Return type** value

**class** androguard.core.bytecodes.dvm.**Instruction3rc** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 3rc format

**get\_length()**  
Return the length of the instruction

**Return type** int

**get\_operands** (*idx=-1*)  
Return all operands

**Return type** list

**get\_output** (*idx=-1*)  
Return an additional output of the instruction

**Return type** string

**get\_raw()**  
Return the object in a raw format

**Return type** string

**get\_ref\_kind()**  
Return the value of the ‘kind’ argument

**Return type** value

```
class androguard.core.bytecodes.dvm.Instruction3rmi(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 3rmi format

```
get_length()
```

Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
```

Return all operands

**Return type** list

```
get_output(idx=-1)
```

Return an additional output of the instruction

**Return type** string

```
get_raw()
```

Return the object in a raw format

**Return type** string

```
get_ref_kind()
```

Return the value of the ‘kind’ argument

**Return type** value

```
class androguard.core.bytecodes.dvm.Instruction3rms(cm, buff)
```

Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 3rms format

```
get_length()
```

Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
```

Return all operands

**Return type** list

```
get_output(idx=-1)
```

Return an additional output of the instruction

**Return type** string

```
get_raw()
```

Return the object in a raw format

**Return type** string

```
get_ref_kind()
```

Return the value of the ‘kind’ argument

**Return type** value

```
class androguard.core.bytecodes.dvm.Instruction40sc(cm, buff)
```

Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 40sc format

```
get_length()
```

Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**get\_ref\_kind ()**  
Return the value of the ‘kind’ argument

**Return type** value

**class androguard.core.bytecodes.dvm.Instruction41c (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 41c format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**get\_ref\_kind ()**  
Return the value of the ‘kind’ argument

**Return type** value

**class androguard.core.bytecodes.dvm.Instruction511 (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 511 format

**get\_formatted\_operands ()**

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_literals ()**  
Return the associated literals

**Return type** list of int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**class androguard.core.bytecodes.dvm.Instruction52c (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 52c format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**get\_ref\_kind ()**  
Return the value of the ‘kind’ argument

**Return type** value

**class androguard.core.bytecodes.dvm.Instruction5rc (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 5rc format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

```
get_raw()
    Return the object in a raw format

    Return type string

get_ref_kind()
    Return the value of the ‘kind’ argument

    Return type value

class androguard.core.bytecodes.dvm.InstructionInvalid(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents an invalid instruction

get_length()
    Return the length of the instruction

    Return type int

get_name()
    Return the name of the instruction

    Return type string

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

exception androguard.core.bytecodes.dvm.InvalidInstruction
Bases: androguard.core.bytecodes.dvm.Error

class androguard.core.bytecodes.dvm.LinearSweepAlgorithm
Bases: object

This class is used to disassemble a method. The algorithm used by this class is linear sweep.

get_instructions(cm, size, insn, idx)

    Parameters
        • cm (ClassManager object) – a ClassManager object
        • size (int) – the total size of the buffer
        • insn (string) – a raw buffer where are the instructions
        • idx (int) – a start address in the buffer

    Return type a generator of Instruction objects

class androguard.core.bytecodes.dvm.MapItem(buff, cm)
Bases: object

get_item()
get_length()
```

```
get_obj()
get_off()
    Gets the offset of the map item itself inside the DEX file
get_offset()
    Gets the offset of the item of the map item
get_raw()
get_size()
get_type()
parse()
reload()
set_item(item)
show()
```

**class** androguard.core.bytecodes.dvm.MapList(*cm, off, buff*)  
Bases: object

This class can parse the “map\_list” of the dex format

<https://source.android.com/devices/tech/dalvik/dex-format#map-list>

```
get_class_manager()
get_item_type(ttype)
    Get a particular item type
```

**Parameters** *ttype* – a string which represents the desired type

**Return type** None or the item object

```
get_length()
get_obj()
get_off()
get_raw()
reload()
set_off(off)
show()
```

Print with a pretty display the MapList object

**class** androguard.core.bytecodes.dvm.MethodAnnotation(*buff, cm*)  
Bases: object

This class can parse a method\_annotation of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the method\_annotation
- **cm** (*ClassManager*) – a ClassManager object

```
get_annotations_off()
```

Return the offset from the start of the file to the list of annotations for the method

**Return type** int

```
get_length()
get_method_idx()
    Return the index into the method_ids list for the identity of the method being annotated

    Return type int

get_obj()
get_off()
get_raw()
set_off(off)
show()

class androguard.core.bytecodes.dvm.MethodHIdItem(size, buff, cm)
Bases: object
```

This class can parse a list of method\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the list of method\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get(idx)
get_length()
get_obj()
get_off()
get_raw()
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.MethodIdItem(buff, cm)
Bases: object
```

This class can parse a method\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the method\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get_class_idx()
    Return the index into the type_ids list for the definer of this method
```

#### Return type

```
get_class_name()
    Return the class name of the method
```

#### Return type

```
get_descriptor()
    Return the descriptor
```

**Return type** string

**get\_length()**

**get\_list()**

**get\_name()**  
Return the name of the method

**Return type** string

**get\_name\_idx()**  
Return the index into the string\_ids list for the name of this method

**Return type** int

**get\_obj()**

**get\_proto()**  
Return the prototype of the method

**Return type** string

**get\_proto\_idx()**  
Return the index into the proto\_ids list for the prototype of this method

**Return type** int

**get\_raw()**

**get\_real\_descriptor()**  
Return the real descriptor (i.e. without extra spaces)

**Return type** string

**get\_triple()**

**reload()**

**show()**

**class** androguard.core.bytecodes.dvm.MethodIdItemInvalid  
Bases: object

**get\_class\_name()**

**get\_descriptor()**

**get\_list()**

**get\_name()**

**get\_proto()**

**show()**

**class** androguard.core.bytecodes.dvm.OdexDependencies(*buff*)  
Bases: object

This class can parse the odex dependencies

**Parameters** **buff** – a Buff object string which represents the odex dependencies

**get\_dependencies()**  
Return the list of dependencies

**Return type** a list of strings

**get\_raw()**

```
class androguard.core.bytecodes.dvm.OdexHeaderItem(buff)
```

Bases: object

This class can parse the odex header

**Parameters** **buff** – a Buff object string which represents the odex dependencies

```
get_raw()
```

```
show()
```

```
class androguard.core.bytecodes.dvm.OffObj(o)
```

Bases: object

```
class androguard.core.bytecodes.dvm.PackedSwitch(buff)
```

Bases: object

This class can parse a PackedSwitch instruction

**Parameters** **buff** – a Buff object which represents a buffer where the instruction is stored

```
add_note(msg)
```

Add a note to this instruction

**Parameters** **msg**(objects (string)) – the message

```
get_formatted_operands()
```

```
get_hex()
```

Returns a HEX String, separated by spaces every byte

```
get_keys()
```

Return the keys of the instruction

**Return type** a list of long

```
get_length()
```

```
get_name()
```

Return the name of the instruction

**Return type** string

```
get_notes()
```

Get all notes from this instruction

**Return type** a list of objects

```
get_op_value()
```

Get the value of the opcode

**Return type** int

```
get_operands(idx=-1)
```

Return an additional output of the instruction

**Return type** string

```
get_output(idx=-1)
```

Return an additional output of the instruction

**rtype** string

```
get_raw()
```

```
get_targets()
```

Return the targets (address) of the instruction

**Return type** a list of long

**get\_values()**

**show(pos)**

Print the instruction

**show\_buff(pos)**

Return the display of the instruction

**Return type** string

**class** androguard.core.bytecodes.dvm.**ParameterAnnotation**(*buff, cm*)

Bases: object

This class can parse a parameter\_annotation of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the parameter\_annotation
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotations\_off()**

Return the offset from the start of the file to the list of annotations for the method parameters

**Return type** int

**get\_length()**

**get\_method\_idx()**

Return the index into the method\_ids list for the identity of the method whose parameters are being annotated

**Return type** int

**get\_obj()**

**get\_off()**

**get\_raw()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.**ProtoHIdItem**(*size, buff, cm*)

Bases: object

This class can parse a list of proto\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the list of proto\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get(*idx*)**

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

```
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.ProtoIdItem(buff, cm)
Bases: object
```

This class can parse a proto\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the proto\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_obj()**

**get\_parameters\_off()**

Return the offset from the start of the file to the list of parameter types for this prototype, or 0 if this prototype has no parameters

**Return type** int

**get\_parameters\_off\_value()**

Return the string associated to the parameters\_off

**Return type** string

**get\_raw()**

**get\_return\_type\_idx()**

Return the index into the type\_ids list for the return type of this prototype

**Return type** int

**get\_return\_type\_idx\_value()**

Return the string associated to the return\_type\_idx

**Return type** string

**get\_shorty\_idx()**

Return the index into the string\_ids list for the short-form descriptor string of this prototype

**Return type** int

**get\_shorty\_idx\_value()**

Return the string associated to the shorty\_idx

**Return type** string

**reload()**

**show()**

```
class androguard.core.bytecodes.dvm.ProtoIdItemInvalid
```

Bases: object

**get\_params()**

**get\_return\_type()**

**get\_shorty()**

**show()**

```
class androguard.core.bytecodes.dvm.SparseSwitch(buff)
Bases: object

This class can parse a SparseSwitch instruction

Parameters buff – a Buff object which represents a buffer where the instruction is stored

add_note (msg)
Add a note to this instruction

Parameters msg (objects (string)) – the message

get_formatted_operands ()

get_hex ()
Returns a HEX String, separated by spaces every byte

get_keys ()
Return the keys of the instruction

Return type a list of long

get_length ()

get_name ()
Return the name of the instruction

Return type string

get_notes ()
Get all notes from this instruction

Return type a list of objects

get_op_value ()
Get the value of the opcode

Return type int

get_operands (idx=-1)
Return an additional output of the instruction

Return type string

get_output (idx=-1)
Return an additional output of the instruction

Return type string

get_raw ()

get_targets ()
Return the targets (address) of the instruction

Return type a list of long

get_values ()

show (pos)
Print the instruction

show_buff (pos)
Return the display of the instruction

Return type string
```

---

```
class androguard.core.bytecodes.dvm.StringDataItem(buff, cm)
```

Bases: object

This class can parse a string\_data\_item of a dex file

Strings in Dalvik files might not be representable in python! This is due to the fact, that you can store any UTF-16 character inside a Dalvik file, but this string might not be decodeable in python as it can contain invalid surrogate-pairs.

To circumvent this issue, this class has different methods how to access the string. There are also some fallbacks implemented to make a “invalid” string printable in python. Dalvik uses MUTF-8 as encoding for the strings. This encoding has the advantage to allow for null terminated strings in UTF-8 encoding, as the null character maps to something else. Therefore you can use `get_data()` to retrieve the actual data of the string and can handle encoding yourself. Or you use `get_unicode()` to return a decoded UTF-16 string, which might cause problems during printing or saving. If you want a representation of the string, which should be printable in python you can use `get()` which escapes invalid characters.

#### Parameters

- `buff (BuffHandle)` – a string which represents a Buff object of the string\_data\_item
- `cm (ClassManager)` – a ClassManager object

`get()`

Returns a printable string. In this case, all lonely surrogates are escaped, thus are represented in the string as 6 characters: ud853 Valid surrogates are encoded as 32bit values, ie. .

`get_data()`

Return a series of MUTF-8 code units (a.k.a. octets, a.k.a. bytes) followed by a byte of value 0

**Return type** string

`get_length()`

Get the length of the raw string including the ULEB128 coded length and the null byte terminator

**Returns** int

`get_obj()`

`get_off()`

`get_raw()`

Returns the raw string including the ULEB128 coded length and null byte string terminator

**Returns** bytes

`get_unicode()`

Returns an Unicode String This is the actual string. Beware that some strings might be not decodeable with usual UTF-16 decoder, as they use surrogates that are not supported by python.

`get_utf16_size()`

Return the size of this string, in UTF-16 code units

:rtype:int

`reload()`

`set_off(off)`

`show()`

---

```
class androguard.core.bytecodes.dvm.StringIdItem(buff, cm)
```

Bases: object

This class can parse a string\_id\_item of a dex file

### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the string\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

**get\_string\_data\_off()**

Return the offset from the start of the file to the string data for this item

**Return type** int

**reload()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.TryItem(*buff, cm*)

Bases: object

This class represents the try\_item format

### Parameters

- **buff** (*string*) – a raw buffer where are the try\_item format
- **cm** (*ClassManager* object) – the ClassManager

**get\_handler\_off()**

Get the offset in bytes from the start of the associated *EncodedCatchHandlerList* to the *EncodedCatchHandler* for this entry.

**Return type** int

**get\_insn\_count()**

Get the number of 16-bit code units covered by this entry

**Return type** int

**get\_length()**

**get\_off()**

**get\_raw()**

**get\_start\_addr()**

Get the start address of the block of code covered by this entry. The address is a count of 16-bit code units to the start of the first covered instruction.

**Return type** int

**set\_off(*off*)**

**class** androguard.core.bytecodes.dvm.TypeHIdItem(*size, buff, cm*)

Bases: object

This class can parse a list of type\_id\_item of a dex file

### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the list of type\_id\_item

- **cm** (*ClassManager*) – a ClassManager object

```
get(idx)
get_length()
get_obj()
get_off()
get_raw()
get_type()
Return type a list of TypeIdItem objects
```

```
reload()
set_off(off)
show()
```

**class** androguard.core.bytecodes.dvm.TypeIdItem(*buff, cm*)  
Bases: object

This class can parse a type\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the type\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get_descriptor_idx()
Return the index into the string_ids list for the descriptor string of this type
```

**Return type** int

```
get_descriptor_idx_value()
Return the string associated to the descriptor
```

**Return type** string

```
get_length()
get_obj()
get_raw()
reload()
show()
```

**class** androguard.core.bytecodes.dvm.TypeItem(*buff, cm*)  
Bases: object

This class can parse a type\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the type\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get_length()
get_obj()
get_raw()
```

```
get_string()
    Return the type string

    Return type string

get_type_idx()
    Return the index into the type_ids list

    Return type int

show()
class androguard.core.bytecodes.dvm.TypeList (buff, cm)
Bases: object

This class can parse a type_list of a dex file

Parameters
    • buff (Buff object) – a string which represents a Buff object of the type_list
    • cm (ClassManager) – a ClassManager object

get_length()

get_list()
    Return the list of TypeItem

    Return type a list of TypeItem objects

get_obj()

get_off()

get_pad()
    Return the alignment string

    Return type string

get_raw()

get_size()
    Return the size of the list, in entries

    Return type int

get_string()
    Return the concatenation of all strings

    Return type string

get_type_list_off()
    Return the offset of the item

    Return type int

reload()

set_off(off)
show()

class androguard.core.bytecodes.dvm.Unresolved (cm, data)
Bases: androguard.core.bytecodes.dvm.Instruction

get_length()
    Return the length of the instruction
```

**Return type** int

**get\_name()**

Return the name of the instruction

**Return type** string

**get\_op\_value()**

Return the value of the opcode

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

androguard.core.bytecodes.dvm.**clean\_name\_instruction(instruction)**

androguard.core.bytecodes.dvm.**determineException(vm, m)**

Returns try-catch handler inside the method.

#### Parameters

- **vm** – a *DalvikVMFormat*
- **m** – a *EncodedMethod*

#### Returns

androguard.core.bytecodes.dvm.**determineNext(i, end, m)**

androguard.core.bytecodes.dvm.**get\_access\_flags\_string(value)**

Transform an access flag field to the corresponding string

**Parameters** **value** (*int*) – the value of the access flags

**Return type** string

androguard.core.bytecodes.dvm.**get\_byte(buff)**

androguard.core.bytecodes.dvm.**get\_bytecodes\_method(dex\_object, ana\_object, method)**

androguard.core.bytecodes.dvm.**get\_bytecodes\_methodx(method, mx)**

androguard.core.bytecodes.dvm.**get\_extented\_instruction(cm, op\_value, buff)**

androguard.core.bytecodes.dvm.**get\_instruction(cm, op\_value, buff, odex=False)**

androguard.core.bytecodes.dvm.**get\_instruction\_payload(op\_value, buff)**

androguard.core.bytecodes.dvm.**get\_kind(cm, kind, value)**

Return the value of the ‘kind’ argument

#### Parameters

- **cm** (*ClassManager*) – a ClassManager object
- **kind** (*int*) – the type of the ‘kind’ argument

- **value** (*int*) – the value of the ‘kind’ argument

**Return type** string

`androguard.core.bytecodes.dvm.get_optimized_instruction(cm, op_value, buff)`

`androguard.core.bytecodes.dvm.get_params_info(nb, proto)`

`androguard.core.bytecodes.dvm.get_sbyte(buff)`

`androguard.core.bytecodes.dvm.get_type(atype, size=None)`

Retrieve the type of a descriptor (e.g : I)

`androguard.core.bytecodes.dvm.read_null_terminated_string(f)`

Read a null terminated string from a file-like object.

**Parameters** **f** – file-like object

**Return type** bytearray

`androguard.core.bytecodes.dvm.readsleb128(buff)`

Read a signed LEB128 at the current position of the buffer.

**Parameters** **buff** – a file like object

**Returns** decoded sLEB128

`androguard.core.bytecodes.dvm.readuleb128(buff)`

Read an unsigned LEB128 at the current position of the buffer

**Parameters** **buff** – a file like object

**Returns** decoded unsigned LEB128

`androguard.core.bytecodes.dvm.readuleb128p1(buff)`

Read an unsigned LEB128p1 at the current position of the buffer. This format is the same as uLEB128 but has the ability to store the value -1.

**Parameters** **buff** – a file like object

**Returns** decoded uLEB128p1

`androguard.core.bytecodes.dvm.static_operand_instruction(instruction)`

`androguard.core.bytecodes.dvm.writesleb128(value)`

Convert an integer value to the corresponding signed LEB128

**Parameters** **value** – integer value

**Returns** bytes

`androguard.core.bytecodes.dvm.writeuleb128(value)`

Convert an integer value to the corresponding unsigned LEB128.

Raises a value error, if the given value is negative.

**Parameters** **value** – non-negative integer

**Returns** bytes

## androguard.core.bytecodes.axml module

**class** `androguard.core.bytecodes.axml.ARSCComplex(buff, parent=None)`

Bases: object

This is actually a *ResTable\_map\_entry*

It contains a set of {name: value} mappings, which are of type *ResTable\_map*. A *ResTable\_map* contains two items: *ResTable\_ref* and *Res\_value*.

See [http://androidxref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1485](http://androidxref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1485) for *ResTable\_map\_entry* and [http://androidxref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1498](http://androidxref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1498) for *ResTable\_map*

**class** androguard.core.bytecodes.axml.ARSCHeader (*buff*, *expected\_type=None*)

Bases: object

Object which contains a Resource Chunk. This is an implementation of the *ResChunk\_header*.

It will throw an *ResParserError* if the header could not be read successfully.

It is not checked if the data is outside the buffer size nor if the current chunk fits into the parent chunk (if any)!

The parameter *expected\_type* can be used to immediately check the header for the type or raise a *ResParserError*. This is useful if you know what type of chunk must follow.

See [http://androidxref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#196](http://androidxref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#196) :raises: ResParserError

**SIZE = 8**

**end**

Get the absolute offset inside the file, where the chunk ends. This is equal to *ARSCHeader.start + ARSCHeader.size*.

**header\_size**

Size of the chunk header (in bytes). Adding this value to the address of the chunk allows you to find its associated data (if any).

**size**

Total size of this chunk (in bytes). This is the chunkSize plus the size of any data associated with the chunk. Adding this value to the chunk allows you to completely skip its contents (including any child chunks). If this value is the same as chunkSize, there is no data associated with the chunk.

**type**

Type identifier for this chunk

**class** androguard.core.bytecodes.axml.ARSCPParser (*raw\_buff*)

Bases: object

Parser for resource.arsc files

The ARSC File is, like the binary XML format, a chunk based format. Both formats are actually identical but use different chunks in order to store the data.

The most outer chunk in the ARSC file is a chunk of type RES\_TABLE\_TYPE. Inside this chunk is a StringPool and at least one package.

Each package is a chunk of type RES\_TABLE\_PACKAGE\_TYPE. It contains again many more chunks.

**class** ResourceResolver (*android\_resources*, *config=None*)

Bases: object

Resolves resources by ID and configuration. This resolver deals with complex resources as well as with references.

**put\_ate\_value** (*result*, *ate*, *config*)

Put a ResTableEntry into the list of results :param list result: results array :param ARSCResTableEntry ate: :param ARSCResTableConfig config: :return:

**put\_item\_value**(*result, item, config, parent, complex\_*)

Put the tuple (ARSCResTableConfig, resolved string) into the result set

**Parameters**

- **result** (*list*) – the result set
- **item** (*ARSCResStringPoolRef*) –
- **config** (*ARSCResTableConfig*) –
- **parent** (*ARSCResTableEntry*) – the originating entry
- **complex** (*bool*) – True if the originating *ARSCResTableEntry* was complex

**Returns**

**resolve**(*res\_id*)

the given ID into the Resource and returns a list of matching resources.

**Parameters** **res\_id** (*int*) – numerical ID of the resource

**Returns** a list of tuples of (ARSCResTableConfig, str)

**get\_bool\_resources**(*package\_name, locale='x00\x00'*)

Get the XML (as string) of all resources of type ‘bool’.

Read more about bool resources: <https://developer.android.com/guide/topics/resources/more-resources.html#Bool>

**Parameters**

- **package\_name** – the package name to get the resources for
- **locale** – the locale to get the resources for (default: “”)

**get\_color\_resources**(*package\_name, locale='x00\x00'*)

Get the XML (as string) of all resources of type ‘color’.

Read more about color resources: <https://developer.android.com/guide/topics/resources/more-resources.html#Color>

**Parameters**

- **package\_name** – the package name to get the resources for
- **locale** – the locale to get the resources for (default: “”)

**get\_dimen\_resources**(*package\_name, locale='x00\x00'*)

Get the XML (as string) of all resources of type ‘dimen’.

Read more about Dimension resources: <https://developer.android.com/guide/topics/resources/more-resources.html#Dimension>

**Parameters**

- **package\_name** – the package name to get the resources for
- **locale** – the locale to get the resources for (default: “”)

**get\_id**(*package\_name, rid, locale='x00\x00'*)

Returns the tuple (resource\_type, resource\_name, resource\_id) for the given resource\_id.

**Parameters**

- **package\_name** – package name to query
- **rid** – the resource\_id
- **locale** – specific locale

**Returns** tuple of (resource\_type, resource\_name, resource\_id)

**get\_id\_resources** (*package\_name*, *locale*=‘\x00\x00’)

Get the XML (as string) of all resources of type ‘id’.

Read more about ID resources: <https://developer.android.com/guide/topics/resources/more-resources.html#Id>

#### Parameters

- **package\_name** – the package name to get the resources for
- **locale** – the locale to get the resources for (default: “”)

**get\_integer\_resources** (*package\_name*, *locale*=‘\x00\x00’)

Get the XML (as string) of all resources of type ‘integer’.

Read more about integer resources: <https://developer.android.com/guide/topics/resources/more-resources.html#Integer>

#### Parameters

- **package\_name** – the package name to get the resources for
- **locale** – the locale to get the resources for (default: “”)

**get\_items** (*package\_name*)

**get\_locales** (*package\_name*)

Retrieve a list of all available locales in a given packagename.

Parameters **package\_name** – the package name to get locales of

**get\_packages\_names** ()

Retrieve a list of all package names, which are available in the given resources.arsc.

**get\_public\_resources** (*package\_name*, *locale*=‘\x00\x00’)

Get the XML (as string) of all resources of type ‘public’.

The public resources table contains the IDs for each item.

#### Parameters

- **package\_name** – the package name to get the resources for
- **locale** – the locale to get the resources for (default: “”)

**get\_res\_configs** (*rid*, *config*=*None*, *fallback*=*True*)

Return the resources found with the ID *rid* and select the right one based on the configuration, or return all if no configuration was set.

But we try to be generous here and at least try to resolve something: This method uses a fallback to return at least one resource (the first one in the list) if more than one items are found and the default config is used and no default entry could be found.

This is usually a bad sign (i.e. the developer did not follow the android documentation: <https://developer.android.com/guide/topics/resources/localization.html#failing2>) In practise an app might just be designed to run on a single locale and thus only has those locales set.

You can disable this fallback behaviour, to just return exactly the given result.

#### Parameters

- **rid** – resource id as int
- **config** – a config to resolve from, or None to get all results
- **fallback** – Enable the fallback for resolving default configuration (default: True)

**Returns** a list of ARSCResTableConfig: ARSCResTableEntry

**get\_res\_id\_by\_key** (package\_name, resource\_type, key)

**get\_resolved\_res\_configs** (rid, config=None)

Return a list of resolved resource IDs with their corresponding configuration. It has a similar return type as `get_res_configs()` but also handles complex entries and references. Also instead of returning `ARSCResTableEntry` in the tuple, the actual values are resolved.

This is the preferred way of resolving resource IDs to their resources.

#### Parameters

- **rid** (*int*) – the numerical ID of the resource
- **config** (*ARSCTableResConfig*) – the desired configuration or None to retrieve all

**Returns** A list of tuples of (ARSCResTableConfig, str)

**get\_resolved\_strings()**

**get\_resource\_bool** (ate)

**get\_resource\_color** (ate)

**get\_resource\_dimen** (ate)

**get\_resource\_id** (ate)

**get\_resource\_integer** (ate)

**get\_resource\_string** (ate)

**get\_resource\_style** (ate)

**get\_resource\_xml\_name** (r\_id, package=None)

Returns the XML name for a resource, including the package name if package is None. A full name might look like `@com.example:string/foobar` Otherwise the name is only looked up in the specified package and is returned without the package name. The same example from about without the package name will read as `@string/foobar`.

If the ID could not be found, *None* is returned.

A description of the XML name can be found here: <https://developer.android.com/guide/topics/resources/providing-resources#ResourcesFromXml>

#### Parameters

- **r\_id** – numerical ID if the resource
- **package** – package name

**Returns** XML name identifier

**get\_string** (package\_name, name, locale='x00\x00')

**get\_string\_resources** (package\_name, locale='x00\x00')

Get the XML (as string) of all resources of type ‘string’.

Read more about string resources: <https://developer.android.com/guide/topics/resources/string-resource.html>

#### Parameters

- **package\_name** – the package name to get the resources for
- **locale** – the locale to get the resources for (default: '')

**get\_strings\_resources()**  
Get the XML (as string) of all resources of type ‘string’. This is a combined variant, which has all locales and all package names stored.

**get\_type\_configs(package\_name, type\_name=None)**

**get\_types(package\_name, locale='\\x00\\x00')**

Retrieve a list of all types which are available in the given package and locale.

#### Parameters

- **package\_name** – the package name to get types of
- **locale** – the locale to get types of (default: '')

**static parse\_id(name)**

Resolves an id from a binary XML file in the form “@[package:]DEADBEEF” and returns a tuple of package name and resource id. If no package name was given, i.e. the ID has the form “@DEADBEEF”, the package name is set to None.

Raises a ValueError if the id is malformed.

**Parameters name** – the string of the resource, as in the binary XML file

**Returns** a tuple of (resource\_id, package\_name).

**class androguard.core.bytecodes.axml.ARSCResStringPoolRef(buff, parent=None)**

Bases: object

This is actually a *Res\_value* It holds information about the stored resource value

See: [http://androidxref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#262](http://androidxref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#262)

**format\_value()**

Return the formatted (interpreted) data according to *data\_type*.

**get\_data()**

**get\_data\_type()**

**get\_data\_type\_string()**

**get\_data\_value()**

**is\_reference()**

Returns True if the Res\_value is actually a reference to another resource

**class androguard.core.bytecodes.axml.ARSCResTableConfig(buff=None, \*\*kwargs)**

Bases: object

ARSCResTableConfig contains the configuration for specific resource selection. This is used on the device to determine which resources should be loaded based on different properties of the device like locale or displaysize.

See the definition of *ResTable\_config* in [http://androidxref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#911](http://androidxref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#911)

**classmethod default\_config()**

**get\_config\_name\_friendly()**

Here for legacy reasons.

use *get\_qualifier()* instead.

**get\_country()**

**get\_density()**

```
get_language()
get_language_and_region()
    Returns the combined language+region string or for the default locale :return:

get_qualifier()
    Return resource name qualifier for the current configuration. for example * ldpi-v4 * hdpi-v4
    All possible qualifiers are listed in table 2 of https://developer.android.com/guide/topics/resources/providing-resources
    ..todo:: This name might not have all properties set! Therefore returned values might not reflect the true
    qualifier name! :return: str

is_default()
    Test if this is a default resource, which matches all
    This is indicated that all fields are zero. :return: True if default, False otherwise

class androguard.core.bytecodes.axml.ARSCResTableEntry(buff, mResId, parent=None)
Bases: object
A ResTable_entry.

See http://androidxref.com/9.0.0\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1458

FLAG_COMPLEX = 1
FLAG_PUBLIC = 2
FLAG_WEAK = 4
get_index()
get_key_data()
get_value()
is_complex()
is_public()
is_weak()

class androguard.core.bytecodes.axml.ARSCResTablePackage(buff, header)
Bases: object
A ResTable_package

See http://androidxref.com/9.0.0\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#861

get_name()

class androguard.core.bytecodes.axml.ARSCResType(buff, parent=None)
Bases: object
This is a ResTable_type without it's ResChunk_header. It contains a ResTable_config
See http://androidxref.com/9.0.0\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1364

get_package_name()
get_type()
```

**class** androguard.core.bytecodes.axml.**ARSCResTypeSpec** (*buff*, *parent=None*)  
Bases: object

See [http://androidxref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1327](http://androidxref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#1327)

**class** androguard.core.bytecodes.axml.**AXMLParser** (*raw\_buff*)  
Bases: object

AXMLParser reads through all chunks in the AXML file and implements a state machine to return information about the current chunk, which can then be read by [AXMLPrinter](#).

An AXML file is a file which contains multiple chunks of data, defined by the *ResChunk\_header*. There is no real file magic but as the size of the first header is fixed and the *type* of the *ResChunk\_header* is set to *RES\_XML\_TYPE*, a file will usually start with *0x03000800*. But there are several examples where the *type* is set to something else, probably in order to fool parsers.

Typically the AXMLParser is used in a loop which terminates if *m\_event* is set to *END\_DOCUMENT*. You can use the *next()* function to get the next chunk. Note that not all chunk types are yielded from the iterator! Some chunks are processed in the AXMLParser only. The parser will set *is\_valid()* to False if it parses something not valid. Messages what is wrong are logged.

See [http://androidxref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#563](http://androidxref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#563)

#### **comment**

Return the comment at the current position or None if no comment is given

This works only for Tags, as the comments of Namespaces are silently dropped. Currently, there is no way of retrieving comments of namespaces.

#### **getAttributeCount()**

Return the number of Attributes for a Tag or -1 if not in a tag

#### **getAttributeName(index)**

Returns the String which represents the attribute name

#### **getAttributeNamespace(index)**

Return the Namespace URI (if any) for the attribute

#### **getAttributeUri(index)**

Returns the numeric ID for the namespace URI of an attribute

#### **getAttributeValue(index)**

This function is only used to look up strings All other work is done by [format\\_value\(\) # FIXME](#)  
should unite those functions :param index: index of the attribute :return:

#### **getAttributeValueData(index)**

Return the data of the attribute at the given index

**Parameters** **index** – index of the attribute

#### **getAttributeValueType(index)**

Return the type of the attribute at the given index

**Parameters** **index** – index of the attribute

#### **getName()**

Legacy only! use name instead

#### **getPrefix()**

Legacy only! use namespace instead

```
getText()
    Legacy only! use text instead

isValid()
    Get the state of the AXMLPrinter. if an error happened somewhere in the process of parsing the file, this flag is set to False.

name
    Return the String associated with the tag name

namespace
    Return the Namespace URI (if any) as a String for the current tag

nsmap
    Returns the current namespace mapping as a dictionary
    there are several problems with the map and we try to guess a few things here:
        1) a URI can be mapped by many prefixes, so it is to decide which one to take
        2) a prefix might map to an empty string (some packers)
        3) uri+prefix mappings might be included several times
        4) prefix might be empty

text
    Return the String associated with the current text

class androguard.core.bytecodes.axml.AXMLPrinter(raw_buff)
    Bases: object

    Converter for AXML Files into a lxml ElementTree, which can easily be converted into XML.

    A Reference Implementation can be found at http://androidxref.com/9.0.0\_r3/xref/frameworks/base/tools/aapt/XMLNode.cpp

get_buff()
    Returns the raw XML file without prettification applied.

    Returns bytes, encoded as UTF-8

get_xml(pretty=True)
    Get the XML as an UTF-8 string

    Returns bytes encoded as UTF-8

get_xml_obj()
    Get the XML as an ElementTree object

    Returns lxml.etree.Element

is_packed()
    Returns True if the AXML is likely to be packed

    Packers do some weird stuff and we try to detect it. Sometimes the files are not packed but simply broken or compiled with some broken version of a tool. Some file corruption might also appear to be a packed file.

    Returns True if packer detected, False otherwise

isValid()
    Return the state of the AXMLParser. If this flag is set to False, the parsing has failed, thus the resulting XML will not work or will even be empty.
```

```
class androguard.core.bytecodes.axml.PackageContext (current_package, string-
pool_main, mTableStrings, mKeyStrings)
```

Bases: object

```
get_mResId()
```

```
get_package_name()
```

```
set_mResId(mResId)
```

```
exception androguard.core.bytecodes.axml.ResParserError
```

Bases: Exception

Exception for the parsers

```
class androguard.core.bytecodes.axml.StringBlock (buff, header)
```

Bases: object

*StringBlock* is a CHUNK inside an AXML File: *ResStringPool\_header* It contains all strings, which are used by referencing to ID's

See [http://AndroidXref.com/9.0.0\\_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#436](http://AndroidXref.com/9.0.0_r3/xref/frameworks/base/libs/androidfw/include/androidfw/ResourceTypes.h#436)

```
getString(idx)
```

Return the string at the index in the string table

**Parameters** *idx* – index in the string table

**Returns** str

```
getStyle(idx)
```

Return the style associated with the index

**Parameters** *idx* – index of the style

**Returns**

```
show()
```

Print some information on stdout about the string table

```
androguard.core.bytecodes.axml.complexToFloat (xcomplex)
```

Convert a complex unit into float

```
androguard.core.bytecodes.axml.format_value (_type, _data, lookup_string=<function
<lambda>>)
```

Format a value based on type and data. By default, no strings are looked up and “<string>” is returned. You need to define *lookup\_string* in order to actually lookup strings from the string table.

**Parameters**

- **\_type** – The numeric type of the value
- **\_data** – The numeric data of the value
- **lookup\_string** – A function how to resolve strings from integer IDs

```
androguard.core.bytecodes.axml.get_arsc_info (arscobj)
```

Return a string containing all resources packages ordered by packagename, locale and type.

**Parameters** *arscobj* – *ARSCParser*

**Returns** a string

## androguard.core.bytecodes.mutf8 module

```
class androguard.core.bytecodes.mutf8.PeekIterator(s)
Bases: object
```

A quick'n'dirty variant of an Iterator that has a special function peek, which will return the next object but not consume it.

```
idx = 0
next()
peek()
```

```
androguard.core.bytecodes.mutf8.chr(val)
```

Patched Version of builtins.chr, to work with narrow python builds In those versions, the function unichr does not work with inputs >0x10000

This seems to be a problem usually on older windows builds.

**Parameters** `val` – integer value of character

**Returns** character

```
androguard.core.bytecodes.mutf8.decode(b)
```

Decode bytes as MUTF-8 See <https://docs.oracle.com/javase/6/docs/api/java/io/DataInput.html#modified-utf-8> for more information

Surrogates will be returned as two 16 bit characters.

**Parameters** `b` – bytes to decode

**Return type** unicode (py2), str (py3) of 16bit chars

**Raises** UnicodeDecodeError if string is not decodable

```
androguard.core.bytecodes.mutf8.patch_string(s)
```

Reorganize a String in such a way that surrogates are printable and lonely surrogates are escaped.

**Parameters** `s` – input string

**Returns** string with escaped lonely surrogates and 32bit surrogates

## Module contents

### androguard.core.resources package

#### Submodules

##### androguard.core.resources.public module

#### Module contents

#### Submodules

##### androguard.core.androconf module

```
class androguard.core.androconf.Color
```

Bases: object

```

Black = '\x1b[30m'
Blue = '\x1b[34m'
Bold = '\x1b[1m'
Cyan = '\x1b[36m'
Green = '\x1b[32m'
Grey = '\x1b[37m'
Normal = '\x1b[0m'
Purple = '\x1b[35m'
Red = '\x1b[31m'
Yellow = '\x1b[33m'

class androguard.core.androconf.Configuration
    Bases: object

    instance = {'BIN_DED': 'ded.sh', 'BIN_DEX2JAR': 'dex2jar.sh', 'BIN_FERNFLOWER': 'fernflowe...'}

exception androguard.core.androconf.InvalidResourceError
    Bases: Exception

    Invalid Resource Err or is thrown by load_api_specific_resource_module

androguard.core.androconf.color_range(startcolor, goalcolor, steps)
    wrapper for interpolate_tuple that accepts colors as html ("#CCCCC" and such)

androguard.core.androconf.default_colors(obj)
androguard.core.androconf.disable_colors()
    Disable colors from the output (color = normal)

androguard.core.androconf.enable_colors(colors)
androguard.core.androconf.interpolate_tuple(startcolor, goalcolor, steps)
    Take two RGB color sets and mix them over a specified number of steps. Return the list

androguard.core.androconf.is_android(filename)
    Return the type of the file

    :param filename : the filename :returns: "APK", "DEX", None

androguard.core.androconf.is_android_raw(raw)
    Returns a string that describes the type of file, for common Android specific formats

androguard.core.androconf.is_ascii_problem(s)
    Test if a string contains other chars than ASCII

    Parameters s – a string to test

    Returns True if string contains other chars than ASCII, False otherwise

androguard.core.androconf.load_api_specific_resource_module(resource_name,
    api=None)
    Load the module from the JSON files and return a dict, which might be empty if the resource could not be loaded.

    If no api version is given, the default one from the CONF dict is used.

    Parameters

        • resource_name – Name of the resource to load

```

- **api** – API version

**Returns** dict

```
androguard.core.androconf.make_color_tuple(color)
    turn something like "#000000" into 0,0,0 or "#FFFFFF into "255,255,255"
androguard.core.androconf.remove_colors()
    Remove colors from the output (no escape sequences)
androguard.core.androconf.rmdir(directory)
    Recursively delete a directory

    Parameters directory – directory to remove

androguard.core.androconf.save_colors()

androguard.core.androconf.set_options(key, value)
    Deprecated since version 3.3.5: Use CONF[key] = value instead

androguard.core.androconf.show_logging(level=20)
    enable log messages on stdout

    We will catch all messages here! From all loggers...
```

## androguard.core.bytecode module

```
class androguard.core.bytecode.Buff(offset, buff)
    Bases: object

class androguard.core.bytecode.BuffHandle(buff)
    Bases: object

    BuffHandle is a wrapper around bytes. It gives the ability to jump in the byte stream, just like with BytesIO.

    add_idx(idx)
        Advance the current offset by idx

        Parameters idx (int) – number of bytes to advance

    end()
        Test if the current offset is at the end or over the buffer boundary

        Return type bool

    get_buff()
        Return the whole buffer

        Return type bytearray

    get_idx()
        Get the current offset in the buffer

        Return type int

    length_buff()
        Alias for size()

    peek(size)
        Alias for read_b()

    read(size)
        Read from the current offset a total number of size bytes and increment the offset by size
```

**Parameters** `size` (`int`) – length of bytes to read

**Return type** bytarray

**readNullString** (`size`)

Read a String with length `size` at the current offset

**Parameters** `size` (`int`) – length of the string

**Return type** bytarray

**read\_at** (`offset, size`)

Read bytes from the given offset with length `size` without incrementing the current offset

**Parameters**

- `offset` (`int`) – offset to start reading

- `size` (`int`) – length of bytes to read

**Return type** bytarray

**read\_b** (`size`)

Read bytes with length `size` without incrementing the current offset

**Parameters** `size` (`int`) – length to read in bytes

**Return type** bytarray

**readat** (`off`)

Read all bytes from the start of `off` until the end of the buffer

**Parameters** `off` (`int`) – starting offset

**Return type** bytarray

**save** (`filename`)

Save the current buffer to `filename`

Existing files with the same name will be overwritten.

**Parameters** `filename` (`str`) – the name of the file to save to

**set\_buff** (`buff`)

Overwrite the current buffer with the content of `buff`

**Parameters** `buff` (bytarray) – the new buffer

**set\_idx** (`idx`)

Set the current offset in the buffer

**Parameters** `idx` (`int`) – offset to set

**size** ()

Get the total size of the buffer

**Return type** int

**tell** ()

Alias for `get_idx()`.

**Return type** int

`androguard.core.bytecode.Exit` (`msg`)

`androguard.core.bytecode.FormatClassToJava` (`i`)

Transform a java class name into the typed variant found in DEX files.

example:

```
>>> FormatClassToJava('java.lang.Object')
'Ljava/lang/Object;'
```

**Parameters** `i` – the input class name

**Return type** str

`androguard.core.bytecode.FormatClassToPython(i)`

Transform a typed class name into a form which can be used as a python attribute

example:

```
>>> FormatClassToPython('Lfoo/bar/foo/Barfoo$InnerClass;')
'Lfoo_bar_foo_Barfoo_InnerClass'
```

**Parameters** `i` – classname to transform

**Return type** str

`androguard.core.bytecode.FormatDescriptorToPython(i)`

Format a descriptor into a form which can be used as a python attribute

example:

```
>>> FormatDescriptorToPython('(Ljava/lang/Long; Ljava/lang/Long; Z Z)V')
'Ljava_lang_LongLjava_lang_LongZZV'
```

**Parameters** `i` – name to transform

**Return type** str

`androguard.core.bytecode.FormatNameToPython(i)`

Transform a (method) name into a form which can be used as a python attribute

example:

```
>>> FormatNameToPython('<clinit>')
'clinit'
```

**Parameters** `i` – name to transform

**Return type** str

**class** `androguard.core.bytecode.MethodBC`

Bases: object

**show**(`value`)

**class** `androguard.core.bytecode.Node(n, s)`

Bases: object

`androguard.core.bytecode.PrettyShow(m_a, basic_blocks, notes={})`

`androguard.core.bytecode.PrettyShowEx(exceptions)`

**class** `androguard.core.bytecode.SV(size, buff)`

Bases: object

```

get_value()
get_value_buff()
set_value(attr)

class androguard.core.bytecode.SVs (size, ntuple, buff)
Bases: object

get_value()
get_value_buff()
set_value(attr)

class androguard.core.bytecode.TmpBlock (name)
Bases: object

get_name()

androguard.core.bytecode.disable_print_colors()
androguard.core.bytecode.enable_print_colors(colors)

androguard.core.bytecode.get_package_class_name(name)
Return package and class name in a java variant from a typed variant name.

If no package could be found, the package is an empty string.

example:

```

```
>>> get_package_class_name('Ljava/lang/Object;')
('java.lang', 'Object')
```

**Parameters** `name` – the name

**Return type** tuple

**Returns**

```
androguard.core.bytecode.method2dot(mx, colors=None)
Export analysis method to dot format
```

**Parameters**

- `mx` – *MethodAnalysis*
- `colors` – dict of colors to use, if colors is None the default colors are used

**Returns** a string which contains the dot graph

```
androguard.core.bytecode.method2format(output, _format='png', mx=None, raw=None)
Export method to a specific file format
```

@param output : output filename @param \_format : format type (png, jpg ...) (default : png) @param mx : specify the MethodAnalysis object @param raw : use directly a dot raw buffer if None

```
androguard.core.bytecode.method2jpg(output, mx, raw=False)
Export method to a jpg file format
```

**Parameters**

- `output` (*string*) – output filename
- `mx` (MethodAnalysis object) – specify the MethodAnalysis object
- `raw` (*string*) – use directly a dot raw buffer (optional)

`androguard.core.bytecode.method2json(mx, directed_graph=False)`

Create directed or undirected graph in the json format.

### Parameters

- `mx` – *MethodAnalysis*
- `directed_graph` – True if a directed graph should be created (default: False)

### Returns

`androguard.core.bytecode.method2json_direct(mx)`

### Parameters `mx` – *MethodAnalysis*

### Returns

`androguard.core.bytecode.method2json_undirect(mx)`

### Parameters `mx` – *MethodAnalysis*

### Returns

`androguard.core.bytecode.method2png(output, mx, raw=False)`

Export method to a png file format

### Parameters

- `output` (*string*) – output filename
- `mx` (*MethodAnalysis* object) – specify the MethodAnalysis object
- `raw` (*string*) – use directly a dot raw buffer

`androguard.core.bytecode.object_to_bytes(obj)`

Convert a object to a bytearray or call get\_raw() of the object if no useful type was found.

`androguard.core.bytecode.vm2json(vm)`

Get a JSON representation of a DEX file

### Parameters `vm` – *DalvikVMFormat*

### Returns

## Module contents

`androguard.decompiler package`

`Subpackages`

`androguard.decompiler.dad package`

`Submodules`

`androguard.decompiler.dad.dast module`

This file is a simplified version of writer.py that outputs an AST instead of source code.

`class androguard.decompiler.dad.dast.JSONWriter(graph, method)`

Bases: `object`

`add(val)`

```
get_ast()
get_cond(node)
visit_cond_node(cond)
visit_ins(op)
visit_loop_node(loop)
visit_node(node)
visit_return_node(ret)
visit_statement_node(stmt)
visit_switch_node(switch)
visit_throw_node(throw)
visit_try_node(try_node)

androguard.decompiler.dad.dast.array_access(arr, ind)
androguard.decompiler.dad.dast.array_creation(tn, params, dim)
androguard.decompiler.dad.dast.array_initializer(params, tn=None)
androguard.decompiler.dad.dast.assignment(lhs, rhs, op="")
androguard.decompiler.dad.dast.binary_infix(op, left, right)
androguard.decompiler.dad.dast.cast(tn, arg)
androguard.decompiler.dad.dast.dummy(*args)
androguard.decompiler.dad.dast.expression_stmt(expr)
androguard.decompiler.dad.dast.field_access(triple, left)
androguard.decompiler.dad.dast.if_stmt(cond_expr, scopes)
androguard.decompiler.dad.dast.jump_stmt(keyword)
androguard.decompiler.dad.dast.literal(result, tt)
androguard.decompiler.dad.dast.literal_bool(b)
androguard.decompiler.dad.dast.literal_class(desc)
androguard.decompiler.dad.dast.literal_double(f)
androguard.decompiler.dad.dast.literal_float(f)
androguard.decompiler.dad.dast.literal_hex_int(b)
androguard.decompiler.dad.dast.literal_int(b)
androguard.decompiler.dad.dast.literal_long(b)
androguard.decompiler.dad.dast.literal_null()
androguard.decompiler.dad.dast.literal_string(s)
androguard.decompiler.dad.dast.local(name)
androguard.decompiler.dad.dast.local_decl_stmt(expr, decl)
androguard.decompiler.dad.dast.loop_stmt(isdo, cond_expr, body)
androguard.decompiler.dad.dast.method_invocation(triple, name, base, params)
```

```
androguard.decompiler.dad.dast.parenthesis(expr)
androguard.decompiler.dad.dast.parse_descriptor(desc)
androguard.decompiler.dad.dast.return_stmt(expr)
androguard.decompiler.dad.dast.statement_block()
androguard.decompiler.dad.dast.switch_stmt(cond_expr, ksv_pairs)
androguard.decompiler.dad.dast.throw_stmt(expr)
androguard.decompiler.dad.dast.try_stmt(tryb, pairs)
androguard.decompiler.dad.dast.typen(baset, dim)
androguard.decompiler.dad.dast.unary_postfix(left, op)
androguard.decompiler.dad.dast.unary_prefix(op, left)
androguard.decompiler.dad.dast.var_decl(typen, var)
androguard.decompiler.dad.dast.visit_arr_data(value)
androguard.decompiler.dad.dast.visit_decl(var, init_expr=None)
androguard.decompiler.dad.dast.visit_expr(op)
androguard.decompiler.dad.dast.visit_ins(op, isCtor=False)
androguard.decompiler.dad.dast.write_inplace_if_possible(lhs, rhs)
```

## androguard.decompiler.dad.basic\_blocks module

```
class androguard.decompiler.dad.basic_blocks.BasicBlock(name, block_ins)
    Bases: androguard.decompiler.dad.node.Node
        add_ins(new_ins_list)
        add_variable_declaration(variable)
        get_ins()
        get_loc_with_ins()
        number_ins(num)
        remove_ins(loc, ins)
        set_catch_type(_type)

class androguard.decompiler.dad.basic_blocks.CatchBlock(node)
    Bases: androguard.decompiler.dad.basic_blocks.BasicBlock
        visit(visitor)
        visit_exception(visitor)

class androguard.decompiler.dad.basic_blocks.CondBlock(name, block_ins)
    Bases: androguard.decompiler.dad.basic_blocks.BasicBlock
        neg()
        update_attribute_with(n_map)
        visit(visitor)
        visit_cond(visitor)
```

```

class androguard.decompiler.dad.basic_blocks.Condition (cond1, cond2, isand, isnot)
Bases: object

    get_ins ()
    get_loc_with_ins ()
    neg ()
    visit (visitor)

class androguard.decompiler.dad.basic_blocks.LoopBlock (name, cond)
Bases: androguard.decompiler.dad.basic_blocks.CondBlock

    get_ins ()
    get_loc_with_ins ()
    neg ()
    update_attribute_with (n_map)
    visit (visitor)
    visit_cond (visitor)

class androguard.decompiler.dad.basic_blocks.ReturnBlock (name, block_ins)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    visit (visitor)

class androguard.decompiler.dad.basic_blocks.ShortCircuitBlock (name, cond)
Bases: androguard.decompiler.dad.basic_blocks.CondBlock

    get_ins ()
    get_loc_with_ins ()
    neg ()
    visit_cond (visitor)

class androguard.decompiler.dad.basic_blocks.StatementBlock (name, block_ins)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    visit (visitor)

class androguard.decompiler.dad.basic_blocks.SwitchBlock (name, switch, block_ins)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    add_case (case)
    copy_from (node)
    order_cases ()
    update_attribute_with (n_map)
    visit (visitor)

class androguard.decompiler.dad.basic_blocks.ThrowBlock (name, block_ins)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    visit (visitor)

class androguard.decompiler.dad.basic_blocks.TryBlock (node)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    add_catch_node (node)

```

```
num  
visit (visitor)  
androguard.decompiler.dad.basic_blocks.build_node_from_block (block, vmap,  
gen_ret, exception_type=None)
```

## androguard.decompiler.dad.control\_flow module

```
androguard.decompiler.dad.control_flow.catch_struct (graph, idoms)
```

```
androguard.decompiler.dad.control_flow.derived_sequence (graph)
```

Compute the derived sequence of the graph G The intervals of G are collapsed into nodes, intervals of these nodes are built, and the process is repeated iteratively until we obtain a single node (if the graph is not irreducible)

```
androguard.decompiler.dad.control_flow.identify_structures (graph, idoms)
```

```
androguard.decompiler.dad.control_flow.if_struct (graph, idoms)
```

```
androguard.decompiler.dad.control_flow.intervals (graph)
```

Compute the intervals of the graph Returns interval\_graph: a graph of the intervals of G interv\_heads: a dict of (header node, interval)

```
androguard.decompiler.dad.control_flow.loop_follow (start, end, nodes_in_loop)
```

```
androguard.decompiler.dad.control_flow.loop_struct (graphs_list, intervals_list)
```

```
androguard.decompiler.dad.control_flow.loop_type (start, end, nodes_in_loop)
```

```
androguard.decompiler.dad.control_flow.mark_loop (graph, start, end, interval)
```

```
androguard.decompiler.dad.control_flow.mark_loop_rec (graph, node, s_num, e_num, interval, nodes_in_loop)
```

```
androguard.decompiler.dad.control_flow.short_circuit_struct (graph, idom, node_map)
```

```
androguard.decompiler.dad.control_flow.switch_struct (graph, idoms)
```

```
androguard.decompiler.dad.control_flow.update_dom (idoms, node_map)
```

```
androguard.decompiler.dad.control_flow.while_block_struct (graph, node_map)
```

## androguard.decompiler.dad.dataflow module

```
class androguard.decompiler.dad.dataflow.BasicReachDef (graph, params)  
Bases: object
```

```
run ()
```

```
class androguard.decompiler.dad.dataflow.DummyNode (name)  
Bases: androguard.decompiler.dad.node.Node
```

```
get_loc_with_ins ()
```

```
androguard.decompiler.dad.dataflow.build_def_use (graph, lparams)  
Builds the Def-Use and Use-Def (DU/UD) chains of the variables of the method.
```

```
androguard.decompiler.dad.dataflow.clear_path(graph, reg, loc1, loc2)
```

Check that the path from loc1 to loc2 is clear. We have to check that there is no side effect between the two location points. We also have to check that the variable *reg* is not redefined along one of the possible paths from loc1 to loc2.

```
androguard.decompiler.dad.dataflow.clear_path_node(graph, reg, loc1, loc2)
```

```
androguard.decompiler.dad.dataflow.dead_code_elimination(graph, du, ud)
```

Run a dead code elimination pass. Instructions are checked to be dead. If it is the case, we remove them and we update the DU & UD chains of its variables to check for further dead instructions.

```
androguard.decompiler.dad.dataflow.group_variables(lvars, DU, UD)
```

```
androguard.decompiler.dad.dataflow.place_declarations(graph, dvars, du, ud)
```

```
androguard.decompiler.dad.dataflow.reach_def_analysis(graph, lparams)
```

```
androguard.decompiler.dad.dataflow.register_propagation(graph, du, ud)
```

Propagate the temporary registers between instructions and remove them if necessary. We process the nodes of the graph in reverse post order. For each instruction in the node, we look at the variables that it uses. For each of these variables we look where it is defined and if we can replace it with its definition. We have to be careful to the side effects some instructions may have. To do the propagation, we use the computed DU and UD chains.

```
androguard.decompiler.dad.dataflow.split_variables(graph, lvars, DU, UD)
```

```
androguard.decompiler.dad.dataflow.update_chain(graph, loc, du, ud)
```

Updates the DU chain of the instruction located at loc such that there is no more reference to it so that we can remove it. When an instruction is found to be dead (i.e it has no side effect, and the register defined is not used) we have to update the DU chain of all the variables that may be used by the dead instruction.

## androguard.decompiler.dad.decompile module

```
class androguard.decompiler.dad.decompile.DvClass (dvclass, vma)
```

Bases: object

This is a wrapper for *ClassDefItem* inside the decompiler.

At first, methods contains a list of EncodedMethods, which are successively replaced by *DvMethod* in the process of decompilation.

```
get_ast()
```

```
get_methods()
```

```
get_source()
```

```
get_source_ext()
```

```
process (doAST=False)
```

```
process_method (num, doAST=False)
```

```
show_source()
```

```
class androguard.decompiler.dad.decompile.DvMachine (name)
```

Bases: object

Wrapper class for a Dalvik Object, like a DEX or ODEX file.

The wrapper allows to take a Dalvik file and get a list of Classes out of it. The *DvMachine* can take either an APK file directly, where all DEX files from the multidex are used, or a single DEX or ODEX file as an argument.

At first, `classes` contains only `ClassDefItem` as values. Then these objects are replaced by `DvClass` items successively.

### `get_ast()`

Processes each class with AST enabled and returns a dictionary with all single ASTs Classnames as keys.

**Returns** an dictionary for all classes

**Return type** dict

### `get_class(class_name)`

Return the `DvClass` with the given name

The name is partially matched against the known class names and the first result is returned. For example, the input `foobar` will match on Lfoobar/bla/foo;

**Parameters** `class_name` (str) –

**Returns** the class matching on the name

**Return type** `DvClass`

### `get_classes()`

Return a list of classnames contained in this machine. The format of each name is Lxxx;

**Returns** list of class names

### `process()`

Process all classes inside the machine.

This calls `process()` on each `DvClass`.

### `process_and_show()`

Run `process()` and `show_source()` after each other.

### `show_source()`

Calls `show_source` on all classes inside the machine. This prints the source to stdout.

This calls `show_source()` on each `DvClass`.

## `class androguard.decompiler.dad.decompile.DvMethod(methanalysis)`

Bases: object

This is a wrapper around `MethodAnalysis` and `EncodedMethod` inside the decompiler.

### `get_ast()`

### `get_source()`

### `get_source_ext()`

### `process(doAST=False)`

### `show_source()`

`androguard.decompiler.dad.decompile.get_field_ast(field)`

`androguard.decompiler.dad.decompile.main()`

## `androguard.decompiler.dad.graph module`

### `class androguard.decompiler.dad.graph.GenInvokeRetName`

Bases: object

### `last()`

```
new()
set_to(ret)

class androguard.decompiler.dad.graph.Graph
Bases: object

Stores a CFG (Control Flow Graph), which is a directed graph.

The CFG defines an entry node entry, a single exit node exit, a list of nodes nodes and a list of edges
edges.

add_catch_edge(e1, e2)
add_edge(e1, e2)
add_node(node)
    Adds the given node to the graph, without connecting it to anything else.

    Parameters node (androguard.decompiler.dad.node.Node) – node to add

all_preds(node)
all_sucs(node)
compute_rpo()
    Number the nodes in reverse post order. An RPO traversal visit as many predecessors of a node as possible
    before visiting the node itself.

draw(name, dname, draw_branches=True)
    Writes the current graph as a PNG file

    Parameters
        • name (str) – filename (without .png)
        • dname (str) – directory of the output png
        • draw_branches –

    Returns

get_ins_from_loc(loc)
get_node_from_loc(loc)
immediate_dominators()
number_ins()
post_order()
    Yields the :class:`~androguard.decompiler.dad.node.Node`s of the graph in post-order i.e we visit all the
    children of a node before visiting the node itself.

preds(node)
remove_ins(loc)
remove_node(node)
    Remove the node from the graph, removes also all connections.

    Parameters node (androguard.decompiler.dad.node.Node) – the node to remove

sucs(node)
androguard.decompiler.dad.graph.bfs(start)
Breadth first search
```

Yields all nodes found from the starting point

**Parameters** `start` – start node

`androguard.decompiler.dad.graph.construct (start_block, vmap, exceptions)`

Constructs a CFG

**Parameters**

- `start_block` (`androguard.core.analysis.analysis.DVMBasicBlock`) – The startpoint
- `vmap` – variable mapping
- `exceptions` – list of `androguard.core.analysis.analysis.ExceptionAnalysis`

**Return type** `Graph`

`androguard.decompiler.dad.graph.dom_lt (graph)`

Dominator algorithm from Lengauer-Tarjan

`androguard.decompiler.dad.graph.make_node (graph, block, block_to_node, vmap, gen_ret)`

`androguard.decompiler.dad.graph.simplify (graph)`

Simplify the CFG by merging/deleting statement nodes when possible: If statement B follows statement A and if B has no other predecessor besides A, then we can merge A and B into a new statement node. We also remove nodes which do nothing except redirecting the control flow (nodes which only contains a goto).

`androguard.decompiler.dad.graph.split_if_nodes (graph)`

Split IfNodes in two nodes, the first node is the header node, the second one is only composed of the jump condition.

## androguard.decompiler.dad.instruction module

```
class androguard.decompiler.dad.instruction.ArrayExpression
    Bases: androguard.decompiler.dad.instruction.IRForm

class androguard.decompiler.dad.instruction.ArrayLengthExpression (array)
    Bases: androguard.decompiler.dad.instruction.ArrayExpression

        get_type()
        get_used_vars()
        replace (old, new)
        replace_var (old, new)
        visit (visitor)

class androguard.decompiler.dad.instruction.ArrayLoadExpression (arg,      index,
                                                                _type)
    Bases: androguard.decompiler.dad.instruction.ArrayExpression

        get_type()
        get_used_vars()
        replace (old, new)
        replace_var (old, new)
        visit (visitor)
```

```
class androguard.decompiler.dad.instruction.ArrayStoreInstruction(rhs,      ar-
                                                 ray,   index,
                                                 _type)

Bases: androguard.decompiler.dad.instruction.IRForm

get_used_vars()
has_side_effect()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.AssignExpression(lhs, rhs)
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs()
get_rhs()
get_used_vars()
has_side_effect()
is_call()
is_propagable()
remove_defined_var()
replace(old, new)
replace_lhs(new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.BaseClass(name, descriptor=None)
Bases: androguard.decompiler.dad.instruction.IRForm

is_const()
visit(visitor)

class androguard.decompiler.dad.instruction.BinaryCompExpression(op,      arg1,
                                                               arg2, _type)
Bases: androguard.decompiler.dad.instruction.BinaryExpression

visit(visitor)

class androguard.decompiler.dad.instruction.BinaryExpression(op,    arg1,   arg2,
                                                               _type)
Bases: androguard.decompiler.dad.instruction.IRForm

get_used_vars()
has_side_effect()
replace(old, new)
replace_var(old, new)
visit(visitor)
```

```
class androguard.decompiler.dad.instruction.BinaryExpression2Addr (op,      dest,
                                                               arg, _type)
    Bases: androguard.decompiler.dad.instruction.BinaryExpression

class androguard.decompiler.dad.instruction.BinaryExpressionLit (op,      arg1,
                                                               arg2)
    Bases: androguard.decompiler.dad.instruction.BinaryExpression

class androguard.decompiler.dad.instruction.CastExpression (op, atype, arg)
    Bases: androguard.decompiler.dad.instruction.UnaryExpression

    get_type()
    get_used_vars()
    is_const()
    visit(visitor)

class androguard.decompiler.dad.instruction.CheckCastExpression (arg,      _type,
                                                               descrip-
                                                               tor=None)
    Bases: androguard.decompiler.dad.instruction.IRForm

    get_used_vars()
    is_const()
    replace(old, new)
    replace_var(old, new)
    visit(visitor)

class androguard.decompiler.dad.instruction.ConditionalExpression (op,      arg1,
                                                               arg2)
    Bases: androguard.decompiler.dad.instruction.IRForm

    get_lhs()
    get_used_vars()
    is_cond()
    neg()
    replace(old, new)
    replace_var(old, new)
    visit(visitor)

class androguard.decompiler.dad.instruction.ConditionalZExpression (op, arg)
    Bases: androguard.decompiler.dad.instruction.IRForm

    get_lhs()
    get_used_vars()
    is_cond()
    neg()
    replace(old, new)
    replace_var(old, new)
    visit(visitor)
```

```
class androguard.decompiler.dad.instruction.Constant (value, atype, int_value=None,
                                                       descriptor=None)
Bases: androguard.decompiler.dad.instruction.IRForm

    get_int_value()
    get_type()
    get_used_vars()
    is_const()
    visit(visitor)

class androguard.decompiler.dad.instruction.FillArrayExpression (reg, value)
Bases: androguard.decompiler.dad.instruction.ArrayExpression

    get_rhs()
    get_used_vars()
    is_propagable()
    replace(old, new)
    replace_var(old, new)
    visit(visitor)

class androguard.decompiler.dad.instruction.FilledArrayExpression (asize, atype,
                                                                    args)
Bases: androguard.decompiler.dad.instruction.ArrayExpression

    get_used_vars()
    replace(old, new)
    replace_var(old, new)
    visit(visitor)

class androguard.decompiler.dad.instruction.IRForm
Bases: object

    get_lhs()
    get_rhs()
    get_type()
    get_used_vars()
    has_side_effect()
    is_call()
    is_cond()
    is_const()
    is_ident()
    is_propagable()
    remove_defined_var()
    replace(old, new)
    replace_lhs(new)
```

```
replace_var (old, new)
set_type (_type)
visit (visitor)

class androguard.decompiler.dad.instruction.InstanceExpression (arg, klass, ftype,
name)
Bases: androguard.decompiler.dad.instruction.IRForm
get_type ()
get_used_vars ()
replace (old, new)
replace_var (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.InstanceInstruction (rhs, lhs, klass,
atype, name)
Bases: androguard.decompiler.dad.instruction.IRForm
get_lhs ()
get_used_vars ()
has_side_effect ()
replace (old, new)
replace_var (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.InvokeDirectInstruction (classname,
name,
base,
rtype,
ptype,
args,
triple)
Bases: androguard.decompiler.dad.instruction.InvokeInstruction

class androguard.decompiler.dad.instruction.InvokeInstruction (classname, name,
base, rtype, ptype,
args, triple)
Bases: androguard.decompiler.dad.instruction.IRForm
get_type ()
get_used_vars ()
has_side_effect ()
is_call ()
replace (old, new)
replace_var (old, new)
visit (visitor)
```

```
class androguard.decompiler.dad.instruction.InvokeRangeInstruction(clsname,  
                           name,  
                           rtype,  
                           ptype,  
                           args,  
                           triple)  
Bases: androguard.decompiler.dad.instruction.InvokeInstruction  
class androguard.decompiler.dad.instruction.InvokeStaticInstruction(clsname,  
                           name,  
                           base,  
                           rtype,  
                           ptype,  
                           args,  
                           triple)  
Bases: androguard.decompiler.dad.instruction.InvokeInstruction  
get_used_vars()  
class androguard.decompiler.dad.instruction.MonitorEnterExpression(ref)  
Bases: androguard.decompiler.dad.instruction.RefExpression  
visit(visitor)  
class androguard.decompiler.dad.instruction.MonitorExitExpression(ref)  
Bases: androguard.decompiler.dad.instruction.RefExpression  
visit(visitor)  
class androguard.decompiler.dad.instruction.MoveExceptionExpression(ref,  
                           _type)  
Bases: androguard.decompiler.dad.instruction.RefExpression  
get_lhs()  
get_used_vars()  
has_side_effect()  
replace_lhs(new)  
visit(visitor)  
class androguard.decompiler.dad.instruction.MoveExpression(lhs, rhs)  
Bases: androguard.decompiler.dad.instruction.IRForm  
get_lhs()  
get_rhs()  
get_used_vars()  
has_side_effect()  
is_call()  
replace(old, new)  
replace_lhs(new)  
replace_var(old, new)  
visit(visitor)  
class androguard.decompiler.dad.instruction.MoveResultExpression(lhs, rhs)  
Bases: androguard.decompiler.dad.instruction.MoveExpression
```

```
has_side_effect()
is_propagable()
visit(visitor)

class androguard.decompiler.dad.instruction.NewArrayExpression(asize, atype)
Bases: androguard.decompiler.dad.instruction.ArrayExpression

get_used_vars()
is_propagable()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.NewInstance(ins_type)
Bases: androguard.decompiler.dad.instruction.IRForm

get_type()
get_used_vars()
replace(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.NopExpression
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs()
get_used_vars()
visit(visitor)

class androguard.decompiler.dad.instruction.Param(value, atype)
Bases: androguard.decompiler.dad.instruction.Variable

is_const()
visit(visitor)

class androguard.decompiler.dad.instruction.RefExpression(ref)
Bases: androguard.decompiler.dad.instruction.IRForm

get_used_vars()
is_propagable()
replace(old, new)
replace_var(old, new)

class androguard.decompiler.dad.instruction.ReturnInstruction(arg)
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs()
get_used_vars()
replace(old, new)
replace_var(old, new)
visit(visitor)
```

```
class androguard.decompiler.dad.instruction.StaticExpression (cls_name,  
                                         field_type,  
                                         field_name)  
Bases: androguard.decompiler.dad.instruction.IRForm  
get_type ()  
replace (old, new)  
visit (visitor)  
  
class androguard.decompiler.dad.instruction.StaticInstruction (rhs, klass, ftype,  
                                         name)  
Bases: androguard.decompiler.dad.instruction.IRForm  
get_lhs ()  
get_used_vars ()  
has_side_effect ()  
replace (old, new)  
replace_var (old, new)  
visit (visitor)  
  
class androguard.decompiler.dad.instruction.SwitchExpression (src, branch)  
Bases: androguard.decompiler.dad.instruction.IRForm  
get_used_vars ()  
replace (old, new)  
replace_var (old, new)  
visit (visitor)  
  
class androguard.decompiler.dad.instruction.ThisParam (value, atype)  
Bases: androguard.decompiler.dad.instruction.Param  
visit (visitor)  
  
class androguard.decompiler.dad.instruction.ThrowExpression (ref)  
Bases: androguard.decompiler.dad.instruction.RefExpression  
visit (visitor)  
  
class androguard.decompiler.dad.instruction.UnaryExpression (op, arg, _type)  
Bases: androguard.decompiler.dad.instruction.IRForm  
get_type ()  
get_used_vars ()  
replace (old, new)  
replace_var (old, new)  
visit (visitor)  
  
class androguard.decompiler.dad.instruction.Variable (value)  
Bases: androguard.decompiler.dad.instruction.IRForm  
get_used_vars ()  
is_ident ()  
value ()
```

```
visit (visitor)
visit_decl (visitor)
```

## androguard.decompiler.dad.node module

```
class androguard.decompiler.dad.node.Interval (head)
Bases: object
    add_node (node)
    compute_end (graph)
    get_end ()
    get_head ()

class androguard.decompiler.dad.node.LoopType
Bases: object
    copy ()
    is_endless
    is_posttest
    is_pretest

class androguard.decompiler.dad.node.MakeProperties (name, bases, dct)
Bases: type

class androguard.decompiler.dad.node.Node (name)
Bases: object
    copy_from (node)
    get_end ()
    get_head ()
    update_attribute_with (n_map)

class androguard.decompiler.dad.node.NodeType
Bases: object
    copy ()
    is_cond
    is_return
    is_stmt
    is_switch
    is_throw
```

## androguard.decompiler.dad.opcode\_ins module

```
class androguard.decompiler.dad.opcode_ins.Op
Bases: object
    ADD = '+'
```

```
AND = '&'  
CMP = 'cmp'  
DIV = '/'  
EQUAL = '=='  
GEQUAL = '>='  
GREATER = '>'  
INTSHL = '<<'  
INTSHR = '>>'  
LEQUAL = '<='  
LONGSHL = '<<'  
LONGSHR = '>>'  
LOWER = '<'  
MOD = '%'  
MUL = '*'  
NEG = '-'  
NEQUAL = '!='  
NOT = '~'  
OR = '|'  
SUB = '-'  
XOR = '^'  
  
androguard.decompiler.dad.opcode_ins.addirdouble(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirdouble2addr(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirfloat(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirfloat2addr(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirint(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirint2addr(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirlit16(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirlit8(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirlong(ins, vmap)  
androguard.decompiler.dad.opcode_ins.addirlong2addr(ins, vmap)  
androguard.decompiler.dad.opcode_ins.aget(ins, vmap)  
androguard.decompiler.dad.opcode_ins.agetboolean(ins, vmap)  
androguard.decompiler.dad.opcode_ins.agetbyte(ins, vmap)  
androguard.decompiler.dad.opcode_ins.agetchar(ins, vmap)  
androguard.decompiler.dad.opcode_ins.aGetObject(ins, vmap)  
androguard.decompiler.dad.opcode_ins.aGetShort(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.agetwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.andint (ins, vmap)
androguard.decompiler.dad.opcode_ins.andint2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.andintlit16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.andintlit8 (ins, vmap)
androguard.decompiler.dad.opcode_ins.andlong (ins, vmap)
androguard.decompiler.dad.opcode_ins.andlong2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.aput (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputboolean (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputbyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputchar (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.arraylength (ins, vmap)
androguard.decompiler.dad.opcode_ins.assign_binary_2addr_exp (ins, val_op,
op_type, vmap)
androguard.decompiler.dad.opcode_ins.assign_binary_exp (ins, val_op, op_type, vmap)
androguard.decompiler.dad.opcode_ins.assign_cast_exp (val_a, val_b, val_op, op_type,
vmap)
androguard.decompiler.dad.opcode_ins.assign_cmp (val_a, val_b, val_c, cmp_type, vmap)
androguard.decompiler.dad.opcode_ins.assign_const (dest_reg, cst, vmap)
androguard.decompiler.dad.opcode_ins.assign_lit (op_type, val_cst, val_a, val_b, vmap)
androguard.decompiler.dad.opcode_ins.checkcast (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmpgdouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmpgfloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmpldouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmplfloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmplong (ins, vmap)
androguard.decompiler.dad.opcode_ins.const (ins, vmap)
androguard.decompiler.dad.opcode_ins.const16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.const4 (ins, vmap)
androguard.decompiler.dad.opcode_ins.constclass (ins, vmap)
androguard.decompiler.dad.opcode_ins.consthigh16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.conststring (ins, vmap)
androguard.decompiler.dad.opcode_ins.conststringjumbo (ins, vmap)
androguard.decompiler.dad.opcode_ins.constwide (ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.constwide16(ins, vmap)
androguard.decompiler.dad.opcode_ins.constwide32(ins, vmap)
androguard.decompiler.dad.opcode_ins.constwidehigh16(ins, vmap)
androguard.decompiler.dad.opcode_ins.divdouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.divdouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.divfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.divfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.divint(ins, vmap)
androguard.decompiler.dad.opcode_ins.divint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.divintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.divintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.divlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.divlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.doubletofloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.doubletoint(ins, vmap)
androguard.decompiler.dad.opcode_ins.doubletolong(ins, vmap)
androguard.decompiler.dad.opcode_ins.fillarraydata(ins, vmap, value)
androguard.decompiler.dad.opcode_ins.fillarraydatapayload(ins, vmap)
androguard.decompiler.dad.opcode_ins.fillednewarray(ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.fillednewarrayrange(ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.floattodouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.floattoint(ins, vmap)
androguard.decompiler.dad.opcode_ins.floattolong(ins, vmap)
androguard.decompiler.dad.opcode_ins.get_args(vmap, param_type, largs)
androguard.decompiler.dad.opcode_ins.get_variables(vmap, *variables)
androguard.decompiler.dad.opcode_ins.goto(ins, vmap)
androguard.decompiler.dad.opcode_ins.goto16(ins, vmap)
androguard.decompiler.dad.opcode_ins.goto32(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifeq(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifeqz(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifge(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifgez(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifgt(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifgtz(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifle(ins, vmap)
androguard.decompiler.dad.opcode_ins.iflez(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.iflt (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifltz (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifne (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifnez (ins, vmap)
androguard.decompiler.dad.opcode_ins.iget (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetboolean (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetbyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetchar (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.instanceof (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttobyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttochar (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttodouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttofloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttolong (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttoshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.invokedirect (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokedirectrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokeinterface (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokeinterfacerange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokestatic (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokestaticrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokesuper (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokesuperrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokevirtual (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokevirtualrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.iput (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputboolean (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputbyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputchar (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.load_array_exp (val_a, val_b, val_c, ar_type,
vmap)
```

```
androguard.decompiler.dad.opcode_ins.longtodouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.longtofloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.longtoint(ins, vmap)
androguard.decompiler.dad.opcode_ins.monitorenter(ins, vmap)
androguard.decompiler.dad.opcode_ins.monitorexit(ins, vmap)
androguard.decompiler.dad.opcode_ins.move(ins, vmap)
androguard.decompiler.dad.opcode_ins.move16(ins, vmap)
androguard.decompiler.dad.opcode_ins.moveexception(ins, vmap, _type)
androguard.decompiler.dad.opcode_ins.movefrom16(ins, vmap)
androguard.decompiler.dad.opcode_ins.moveobject(ins, vmap)
androguard.decompiler.dad.opcode_ins.moveobject16(ins, vmap)
androguard.decompiler.dad.opcode_ins.moveobjectfrom16(ins, vmap)
androguard.decompiler.dad.opcode_ins.moveresult(ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.moveresultobject(ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.moveresultwide(ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.movewide(ins, vmap)
androguard.decompiler.dad.opcode_ins.movewide16(ins, vmap)
androguard.decompiler.dad.opcode_ins.movewidefrom16(ins, vmap)
androguard.decompiler.dad.opcode_ins.muldouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.muldouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.mulfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.mulfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.mulint(ins, vmap)
androguard.decompiler.dad.opcode_ins.mulint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.mulintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.mulintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.mullong(ins, vmap)
androguard.decompiler.dad.opcode_ins.mullong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.negdouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.negfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.negint(ins, vmap)
androguard.decompiler.dad.opcode_ins.neglong(ins, vmap)
androguard.decompiler.dad.opcode_ins.newarray(ins, vmap)
androguard.decompiler.dad.opcode_ins.newinstance(ins, vmap)
androguard.decompiler.dad.opcode_ins.nop(ins, vmap)
androguard.decompiler.dad.opcode_ins.notint(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.notlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.orint(ins, vmap)
androguard.decompiler.dad.opcode_ins.orint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.orintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.orintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.orlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.orlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.packedswitch(ins, vmap)
androguard.decompiler.dad.opcode_ins.remdouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.remdouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.remfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.remfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.remint(ins, vmap)
androguard.decompiler.dad.opcode_ins.remint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.remintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.remintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.remlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.remlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.return_reg(ins, vmap)
androguard.decompiler.dad.opcode_ins.returnobject(ins, vmap)
androguard.decompiler.dad.opcode_ins.returnvoid(ins, vmap)
androguard.decompiler.dad.opcode_ins.returnwide(ins, vmap)
androguard.decompiler.dad.opcode_ins.rsubint(ins, vmap)
androguard.decompiler.dad.opcode_ins.rsubintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.sget(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetboolean(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetbyte(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetchar(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetobject(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetshort(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetwide(ins, vmap)
androguard.decompiler.dad.opcode_ins.shlint(ins, vmap)
androguard.decompiler.dad.opcode_ins.shlint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.shlintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.shllong(ins, vmap)
androguard.decompiler.dad.opcode_ins.shllong2addr(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.shrint(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.sparseswitch(ins, vmap)
androguard.decompiler.dad.opcode_ins.sput(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputboolean(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputbyte(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputchar(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputobject(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputshort(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputwide(ins, vmap)
androguard.decompiler.dad.opcode_ins.store_array_inst(val_a, val_b, val_c, ar_type,
vmap)
androguard.decompiler.dad.opcode_ins.subdouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.subdouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.subfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.subfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.subint(ins, vmap)
androguard.decompiler.dad.opcode_ins.subint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.sublong(ins, vmap)
androguard.decompiler.dad.opcode_ins.sublong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.throw(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrint(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorint(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorlong2addr(ins, vmap)
```

## androguard.decompiler.dad.util module

`androguard.decompiler.dad.util.build_path(graph, node1, node2, path=None)`

Build the path from node1 to node2. The path is composed of all the nodes between node1 and node2, node1 excluded. Although if there is a loop starting from node1, it will be included in the path.

`androguard.decompiler.dad.util.common_dom(idom, cur, pred)`

`androguard.decompiler.dad.util.create_png(cls_name, meth_name, graph, dir_name='graphs2')`

Creates a PNG from a given `Graph`.

### Parameters

- `cls_name` (`str`) – name of the class
- `meth_name` (`str`) – name of the method
- `graph` (`androguard.decompiler.dad.graph.Graph`) –
- `dir_name` (`str`) – output directory

`androguard.decompiler.dad.util.get_access_class(access)`

`androguard.decompiler.dad.util.get_access_field(access)`

`androguard.decompiler.dad.util.get_access_method(access)`

`androguard.decompiler.dad.util.get_params_type(descriptor)`

Return the parameters type of a descriptor (e.g (IC)V)

`androguard.decompiler.dad.util.get_type(atype, size=None)`

Retrieve the java type of a descriptor (e.g : I)

`androguard.decompiler.dad.util.get_type_size(param)`

Return the number of register needed by the type @param

`androguard.decompiler.dad.util.merge_inner(clsdic)`

Merge the inner class(es) of a class: e.g class A { ... } class A\$foo{ ... } class A\$bar{ ... } ==> class A { class foo{...} class bar{...} ... }

## androguard.decompiler.dad.writer module

`class androguard.decompiler.dad.writer.Writer(graph, method)`

Bases: object

Transforms a method into Java code.

`dec_ind(i=1)`

`end_ins()`

`inc_ind(i=1)`

`space()`

`str_ext()`

`visit_alength(array)`

`visit_aload(array, index)`

`visit_assign(lhs, rhs)`

`visit astore(array, index, rhs, data=None)`

```
visit_base_class (cls, data=None)
visit_binary_expression (op, arg1, arg2)
visit_cast (op, arg)
visit_catch_node (catch_node)
visit_check_cast (arg, atype)
visit_cond_expression (op, arg1, arg2)
visit_cond_node (cond)
visit_condz_expression (op, arg)
visit_constant (cst)
visit_decl (var)
visit_fill_array (array, value)
visit_filled_new_array (atype, size, args)
visit_get_instance (arg, name, data=None)
visit_get_static (cls, name)
visit_ins (ins)
visit_invoke (name, base, ptype, rtype, args, invokeInstr)
visit_loop_node (loop)
visit_monitor_enter (ref)
visit_monitor_exit (ref)
visit_move (lhs, rhs)
visit_move_exception (var, data=None)
visit_move_result (lhs, rhs)
visit_new (atype, data=None)
visit_new_array (atype, size)
visit_node (node)
visit_nop ()
visit_param (param, data=None)
visit_put_instance (lhs, name, rhs, data=None)
visit_put_static (cls, name, rhs)
visit_return (arg)
visit_return_node (ret)
visit_return_void()
visit_short_circuit_condition (nnot, aand, cond1, cond2)
visit_statement_node (stmt)
visit_super ()
visit_switch (arg)
```

```
visit_switch_node(switch)
visit_this()
visit_throw(ref)
visit_throw_node(throw)
visit_try_node(try_node)
visit_unary_expression(op, arg)
visit_variable(var)
write(s, data=None)
write_ext(t)
write_ind()
write_ind_visit_end(lhs, s, rhs=None, data=None)
write_ind_visit_end_ext(lhs, before, s, after, rhs=None, data=None, subsec-
tion='UNKNOWN_SUBSECTION')
write_inplace_if_possible(lhs, rhs)
write_method()

androguard.decompiler.dad.writer.string(s)
Convert a string to a escaped ASCII representation including quotation marks :param s: a string :return: ASCII
escaped string
```

## Module contents

### Submodules

#### androguard.decompiler.decompiler module

```
class androguard.decompiler.decompiler.DecompilerDAD(vm, vmx)
Bases: object

display_all(_class)
display_source(m)
get_all(class_name)
get_ast_class(_class)
get_ast_method(m)
get_source_class(_class)
get_source_class_ext(_class)
get_source_method(m)

class androguard.decompiler.decompiler.DecompilerDed(vm, bin_ded='ded.sh',
tmp_dir='/tmp/')
Bases: object

display_all(_class)
display_source(method)
```

```
get_all(class_name)
get_source_class(_class)
get_source_method(method)

class androguard.decompiler.decompiler.DecompilerDex2Fernflower(vm,
                                                               bin_dex2jar='dex2jar.sh',
                                                               bin_fernflower='fernflower.jar',
                                                               op-
                                                               tions_fernflower={'asc':
                                                               '1',      'dgs':
                                                               '1'},
                                                               tmp_dir='/tmp/')

Bases: object

display_all(_class)
display_source(method)
get_all(class_name)
get_source_class(_class)
get_source_method(method)

class androguard.decompiler.decompiler.DecompilerDex2Jad(vm,
                                                               bin_dex2jar='dex2jar.sh',
                                                               bin_jad='jad',
                                                               tmp_dir='/tmp/')

Bases: object

display_all(_class)
display_source(method)
get_all(class_name)
get_source_class(_class)
get_source_method(method)

class androguard.decompiler.decompiler.DecompilerDex2WineJad(vm,
                                                               bin_dex2jar='dex2jar.sh',
                                                               bin_jad='jad',
                                                               tmp_dir='/tmp/')

Bases: object

display_all(_class)
display_source(method)
get_all(class_name)
get_source_class(_class)
get_source_method(method)

class androguard.decompiler.decompiler.DecompilerJADX(vm, vmx, jadx='jadx', keep-
                                                               files=False)

Bases: object

display_all(_class)
???

Parameters _class -
```

**Returns**

**display\_source (m)**

This method does the same as `get_source_method` but prints the result directly to stdout

**Parameters** `m` – *EncodedMethod* to print

**Returns**

**get\_all (class\_name)**

???

**Parameters** `class_name` –

**Returns**

**get\_source\_class (\_class)**

Return the Java source code of a whole class

**Parameters** `_class` – *ClassDefItem* object, to get the source from

**Returns**

**get\_source\_method (m)**

Return the Java source of a single method

**Parameters** `m` – *EncodedMethod* Object

**Returns**

**class** androguard.decompiler.decompiler.**Dex2Jar** (`vm`, `bin_dex2jar='dex2jar.sh'`,  
`tmp_dir='/tmp/'`)

Bases: object

**get\_jar()**

**exception** androguard.decompiler.decompiler.**JADXDecompilerError**

Bases: Exception

Exception for JADeX related problems

**class** androguard.decompiler.decompiler.**MethodFilter** (\*\*options)

Bases: pygments.filter.Filter

**filter (lexer, stream)**

## Module contents

### 3.1.2 Submodules

#### 3.1.3 androguard.misc module

`androguard.misc.AnalyzeAPK (_file, session=None, raw=False)`

Analyze an android application and setup all stuff for a more quickly analysis! If session is None, no session is used at all. This is the default behaviour. If you like to continue your work later, it might be a good idea to use a session. A default session can be created by using `get_default_session()`.

**Parameters**

- `_file` (string (for filename) or bytes (for raw)) – the filename of the android application or a buffer which represents the application
- `session` – A session (default: None)

- **raw** – boolean if raw bytes are supplied instead of a filename

**Return type** return the `APK`, list of `DalvikVMFormat`, and `Analysis` objects

`androguard.misc.AnalyzeDex(filename, session=None)`

Analyze an android dex file and setup all stuff for a more quickly analysis !

#### Parameters

- **filename** (*string*) – the filename of the android dex file or a buffer which represents the dex file
- **session** – A session (Default None)

**Return type** return a tuple of (sha256hash, `DalvikVMFormat`, `Analysis`)

`androguard.misc.AnalyzeODex(filename, session=None)`

Analyze an android odex file and setup all stuff for a more quickly analysis !

#### Parameters

- **filename** (*string*) – the filename of the android dex file or a buffer which represents the dex file
- **session** – The Androguard Session to add the ODex to (default: None)

**Return type** return a tuple of (sha256hash, `DalvikOdexVMFormat`, `Analysis`)

`androguard.misc.RunDecompiler(d, dx, decompiler_name)`

Run the decompiler on a specific analysis

#### Parameters

- **d** (`DalvikVMFormat` object) – the DalvikVMFormat object
- **dx** (`VMAnalysis` object) – the analysis of the format
- **decompiler** (*string*) – the type of decompiler to use (“dad”, “dex2jad”, “ded”)

`androguard.misc.clean_file_name(filename, unique=True, replace='_', force_nt=False)`

Return a filename version, which has no characters in it which are forbidden. On Windows these are for example <, /, ?, ...

The intention of this function is to allow distribution of files to different OSes.

#### Parameters

- **filename** – string to clean
- **unique** – check if the filename is already taken and append an integer to be unique (default: True)
- **replace** – replacement character. (default: ‘\_’)
- **force\_nt** – Force shortening of paths like on NT systems (default: False)

**Returns** clean string

`androguard.misc.get_default_session()`

Return the default Session from the configuration or create a new one, if the session in the configuration is None.

`androguard.misc.init_print_colors()`

`androguard.misc.sign_apk(filename, keystore, storepass)`

Use jarsigner to sign an APK file.

#### Parameters

- **filename** – APK file on disk to sign (path)
- **keystore** – path to keystore
- **storepass** – your keystore passphrase

### 3.1.4 androguard.session module

`androguard.session.Load(filename)`

load your session!

example:

```
s = session.Load("mysession.ag")
```

**Parameters** `filename` (*string*) – the filename where the session has been saved

**Return type** the elements of your session :)

`androguard.session.Save(session, filename=None)`

save your session to use it later.

Returns the filename of the written file. If not filename is given, a file named *androguard\_session\_<DATE>.ag* will be created in the current working directory. *<DATE>* is a timestamp with the following format: *%Y-%m-%d\_%H%M%S*.

This function will overwrite existing files without asking.

If the file could not written, None is returned.

example:

```
s = session.Session()  
session.Save(s, "msession.ag")
```

**Parameters**

- **session** – A Session object to save
- **filename** (*string*) – output filename to save the session

`class androguard.session.Session(export_ipython=False)`

Bases: `object`

A Session is able to store multiple APK, DEX or ODEX files and can be pickled to disk in order to resume work later.

The main function used in Sessions is probably `add()`, which adds files to the session and performs analysis on them.

Afterwards, the files can be gathered using methods such as `get_objects_apk()`, `get_objects_dex()` or `get_classes()`.

example:

```
s = Session()  
digest = s.add("some.apk")  
  
print("SHA256 of the file: {}".format(digest))
```

(continues on next page)

(continued from previous page)

```
a, d, dx = s.get_objects_apk("some.apk", digest)
print(a.get_package())

# Reset the Session for a fresh set of files
s.reset()

digest2 = s.add("classes.dex")
print("SHA256 of the file: {}".format(digest2))
for h, d, dx in s.get_objects_dex():
    print("SHA256 of the DEX file: {}".format(h))
```

**add**(*filename*, *raw\_data=None*, *dx=None*)

Generic method to add a file to the session.

This is the main method to use when adding files to a Session!

If an APK file is supplied, all DEX files are analyzed too. For DEX and ODEX files, only this file is analyzed (what else should be analyzed).

Returns the SHA256 of the analyzed file.

**Parameters**

- **filename** – filename to load
- **raw\_data** – bytes of the file, or None to load the file from filename
- **dx** – An already exiting *Analysis* object

**Returns** the sha256 of the file or None on failure**addAPK**(*filename*, *data*)

Add an APK file to the Session and run analysis on it.

**Parameters**

- **filename** – (file)name of APK file
- **data** – binary data of the APK file

**Returns** a tuple of SHA256 Checksum and APK Object**addDEX**(*filename*, *data*, *dx=None*)

Add a DEX file to the Session and run analysis.

**Parameters**

- **filename** – the (file)name of the DEX file
- **data** – binary data of the dex file
- **dx** – an existing Analysis Object (optional)

**Returns** A tuple of SHA256 Hash, DalvikVMFormat Object and Analysis object**addODEX**(*filename*, *data*, *dx=None*)

Add an ODEX file to the session and run the analysis

**get\_all\_apks**()

Yields a list of tuples of SHA256 hash of the APK and APK objects of all analyzed APKs in the Session.

**get\_analysis**(*current\_class*)Returns the *Analysis* object which contains the *current\_class*.

**Parameters** `current_class` (`androguard.core.bytecodes.dvm.ClassDefItem`) – The class to search for

**Return type** `androguard.core.analysis.analysis.Analysis`

**get\_classes()**

Returns all Java Classes from the DEX objects as an array of DEX files.

**get\_digest\_by\_class(`current_class`)**

Return the SHA256 hash of the object containing the ClassDefItem

Returns the first digest this class was present. For example, if you analyzed an APK, this should return the digest of the APK and not of the DEX file.

**get\_filename\_by\_class(`current_class`)**

Returns the filename of the DEX file where the class is in.

Returns the first filename this class was present. For example, if you analyzed an APK, this should return the filename of the APK and not of the DEX file.

**Parameters** `current_class` – ClassDefItem

**Returns** None if class was not found or the filename

**get\_format(`current_class`)**

Returns the `DalvikVMFormat` of a given `ClassDefItem`.

**Parameters** `current_class` – A ClassDefItem

**get\_nb\_strings()**

Return the total number of strings in all Analysis objects

**get\_objects\_apk(`filename=None, digest=None`)**

Returns APK, DalvikVMFormat and Analysis of a specified APK.

You must specify either `filename` or `digest`. It is possible to use both, but in this case only `digest` is used.

example:

```
s = Session()
digest = s.add("some.apk")
a, d, dx = s.get_objects_apk(digest=digest)
```

example:

```
s = Session()
filename = "some.apk"
digest = s.add(filename)
a, d, dx = s.get_objects_apk(filename=filename)
```

**Parameters**

- `filename` – the filename of the APK file, only used if digest is None
- `digest` – the sha256 hash, as returned by `add()` for the APK

**Returns** a tuple of (APK, [DalvikVMFormat], Analysis)

**get\_objects\_dex()**

Yields all dex objects including their Analysis objects

**Returns** tuple of (sha256, DalvikVMFormat, Analysis)

```
get_strings()
    Yields all StringAnalysis for all unique Analysis objects

isOpen()
    Test if any file was analyzed in this session

    Returns True if any file was analyzed, False otherwise

reset()
    Reset the current session, delete all added files.

save(filename=None)
    Save the current session, see also Save\(\).

show()
    Print information to stdout about the current session. Gets all APKs, all DEX files and all Analysis objects.
```

### 3.1.5 androguard.util module

```
androguard.util.get_certificate_name_string(name, short=False, delimiter=',')
```

Format the Name type of a X509 Certificate in a human readable form.

#### Parameters

- **name** (dict or `asn1crypto.x509.Name`) – Name object to return the DN from
- **short** (boolean) – Use short form (default: False)
- **delimiter** (str) – Delimiter string or character between two parts (default: ‘,’)

#### Return type

```
androguard.util.read(filename, binary=True)
```

Open and read a file

#### Parameters

- **filename** – filename to open and read
- **binary** – True if the file should be read as binary

#### Returns

### 3.1.6 Module contents



# CHAPTER 4

---

## Indices and tables

---

- genindex
- modindex
- search



---

## Python Module Index

---

### a

androguard, 163  
androguard.core, 130  
androguard.core.analysis, 47  
androguard.core.analysis.analysis, 33  
androguard.core.analysis.auto, 42  
androguard.core.androconf, 124  
androguard.core.api\_specific\_resources,  
    47  
androguard.core.bytecode, 126  
androguard.core.bytecodes, 124  
androguard.core.bytecodes.apk, 48  
androguard.core.bytecodes.axml, 114  
androguard.core.bytecodes.dvm, 57  
androguard.core.bytecodes.mutf8, 124  
androguard.core.resources, 124  
androguard.core.resources.public, 124  
androguard.decompiler, 158  
androguard.decompiler.dad, 156  
androguard.decompiler.dad.basic\_blocks,  
    132  
androguard.decompiler.dad.control\_flow,  
    134  
androguard.decompiler.dad.dast, 130  
androguard.decompiler.dad.dataflow, 134  
androguard.decompiler.dad.decompile, 135  
androguard.decompiler.dad.graph, 136  
androguard.decompiler.dad.instruction,  
    138  
androguard.decompiler.dad.node, 146  
androguard.decompiler.dad.opcode\_ins,  
    146  
androguard.decompiler.dad.util, 154  
androguard.decompiler.dad.writer, 154  
androguard.decompiler.decompiler, 156  
androguard.misc, 158  
androguard.session, 160  
androguard.util, 163



---

## Index

---

### A

access (*androguard.core.analysis.analysis.MethodClassAnalysis attribute*), 41  
access\_flags (*androguard.core.bytecodes.dvm.EncodedMethod attribute*), 78  
ADD (*androguard.decompiler.dad.opcode\_ins.Op attribute*), 146  
add () (*androguard.core.analysis.analysis.Analysis method*), 33  
add () (*androguard.core.analysis.analysis.Exceptions method*), 40  
add () (*androguard.core.bytecodes.dvm.DBGBytecode method*), 66  
add () (*androguard.decompiler.dad.dast.JSONWriter method*), 130  
add () (*androguard.session.Session method*), 161  
add\_case () (*androguard.decompiler.dad.basic\_blocks.SwitchBlock method*), 133  
add\_catch\_edge () (*androguard.decompiler.dad.graph.Graph method*), 137  
add\_catch\_node () (*androguard.decompiler.dad.basic\_blocks.TryBlock method*), 133  
add\_edge () (*androguard.decompiler.dad.graph.Graph method*), 137  
add\_idx () (*androguard.core.bytecode.BuffHandle method*), 126  
add\_inote () (*androguard.core.bytecodes.dvm.DalvikCode method*), 67  
add\_inote () (*androguard.core.bytecodes.dvm.DCode method*), 66  
add\_inote () (*androguard.core.bytecodes.dvm.EncodedMethod method*), 78  
add\_ins () (*androguard.decompiler.dad.basic\_blocks.BasicBlock method*), 132  
add\_node () (*androguard.decompiler.dad.graph.Graph method*), 137  
add\_node () (*androguard.decompiler.dad.node.Interval method*), 146  
add\_note () (*androguard.core.analysis.analysis.DVMBasicBlock method*), 39  
add\_note () (*androguard.core.bytecodes.dvm.EncodedMethod method*), 78  
add\_note () (*androguard.core.bytecodes.dvm.FillArrayData method*), 84  
add\_note () (*androguard.core.bytecodes.dvm.PackedSwitch method*), 105  
add\_note () (*androguard.core.bytecodes.dvm.SparseSwitch method*), 108  
add\_type\_item () (*androguard.core.bytecodes.dvm.ClassManager method*), 64  
add\_variable\_declaration () (*androguard.decompiler.dad.basic\_blocks.BasicBlock method*), 132  
addAPK () (*androguard.session.Session method*), 161  
addDEX () (*androguard.session.Session method*), 161  
addDEY () (*androguard.session.Session method*), 161  
adddouble () (*in module androguard.decompiler.dad.opcode\_ins*), 147  
adddouble2addr () (*in module androguard.decompiler.dad.opcode\_ins*), 147  
addfloat () (*in module androguard.decompiler.dad.opcode\_ins*), 147  
addfloat2addr () (*in module androguard.decompiler.dad.opcode\_ins*), 147  
AddFXrefRead () (*androguard.core.analysis.analysis.ClassAnalysis method*), 37  
AddFXrefWrite () (*androguard.core.analysis.analysis.ClassAnalysis method*), 37  
addint () (*in module androguard.decompiler.dad.opcode\_ins*), 147  
addint2addr () (*in module andro-*

guard.decompiler.dad.opcode\_ins), 147  
addintlit16() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
addintlit8() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
addlong() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
addlong2addr() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
AddMXrefFrom() (andro-  
    guard.core.analysis.analysis.ClassAnalysis  
method), 37  
AddMXrefTo() (andro-  
    guard.core.analysis.analysis.ClassAnalysis  
method), 37  
AddXrefFrom() (andro-  
    guard.core.analysis.analysis.ClassAnalysis  
method), 37  
AddXrefFrom() (andro-  
    guard.core.analysis.analysis.MethodClassAnalysis  
method), 41  
AddXrefFrom() (andro-  
    guard.core.analysis.analysis.StringAnalysis  
method), 42  
AddXrefRead() (andro-  
    guard.core.analysis.analysis.FieldClassAnalysis  
method), 40  
AddXrefTo() (andro-  
    guard.core.analysis.analysis.ClassAnalysis  
method), 38  
AddXrefTo() (andro-  
    guard.core.analysis.analysis.MethodClassAnalysis  
method), 41  
AddXrefWrite() (andro-  
    guard.core.analysis.analysis.FieldClassAnalysis  
method), 40  
adjust\_idx() (andro-  
    guard.core.bytecodes.dvm.EncodedField  
method), 77  
adjust\_idx() (andro-  
    guard.core.bytecodes.dvm.EncodedMethod  
method), 78  
aget() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
agetboolean() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
agetbyte() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
agetchar() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
agetobject() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
agetshort() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
agetwide() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 147  
all\_preds() (andro-  
    guard.decompiler.dad.graph.Graph method),  
        137  
all\_sucs() (androguard.decompiler.dad.graph.Graph  
method), 137  
Analysis (class in androguard.core.analysis.analysis),  
        33  
analysis\_adex() (andro-  
    guard.core.analysis.auto.DefaultAndroAnalysis  
method), 43  
analysis\_apk() (andro-  
    guard.core.analysis.auto.DefaultAndroAnalysis  
method), 44  
analysis\_app() (andro-  
    guard.core.analysis.auto.DefaultAndroAnalysis  
method), 44  
analysis\_arsc() (andro-  
    guard.core.analysis.auto.DefaultAndroAnalysis  
method), 44  
analysis\_axml() (andro-  
    guard.core.analysis.auto.DefaultAndroAnalysis  
method), 44  
analysis\_dex() (andro-  
    guard.core.analysis.auto.DefaultAndroAnalysis  
method), 44  
analysis\_dey() (andro-  
    guard.core.analysis.auto.DefaultAndroAnalysis  
method), 45  
AnalyzeAPK() (in module androguard.misc), 158  
AnalyzeDex() (in module androguard.misc), 159  
AnalyzeODex() (in module androguard.misc), 159  
AND (androguard.decompiler.dad.opcode\_ins.Op  
attribute), 146  
andint() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 148  
andint2addr() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 148  
andintlit16() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 148  
andintlit8() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 148  
andlong() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 148  
andlong2addr() (in module andro-  
    guard.decompiler.dad.opcode\_ins), 148  
AndroAuto (class in androguard.core.analysis.auto),  
        42  
androguard(module), 163  
androguard.core(module), 130  
androguard.core.analysis(module), 47  
androguard.core.analysis.analysis (mod-  
ule), 33

androguard.core.analysis.auto (*module*), 42  
 androguard.core.androconf (*module*), 124  
 androguard.core.api\_specific\_resources (*module*), 47  
 androguard.core.bytecode (*module*), 126  
 androguard.core.bytecodes (*module*), 124  
 androguard.core.bytecodes.apk (*module*), 48  
 androguard.core.bytecodes.axml (*module*), 114  
 androguard.core.bytecodes.dvm (*module*), 57  
 androguard.core.bytecodes.mutf8 (*module*), 124  
 androguard.core.resources (*module*), 124  
 androguard.core.resources.public (*module*), 124  
 androguard.decompiler (*module*), 158  
 androguard.decompiler.dad (*module*), 156  
 androguard.decompiler.dad.basic\_blocks (*module*), 132  
 androguard.decompiler.dad.control\_flow (*module*), 134  
 androguard.decompiler.dad.dast (*module*), 130  
 androguard.decompiler.dad.dataflow (*module*), 134  
 androguard.decompiler.dad.decompile (*module*), 135  
 androguard.decompiler.dad.graph (*module*), 136  
 androguard.decompiler.dad.instruction (*module*), 138  
 androguard.decompiler.dad.node (*module*), 146  
 androguard.decompiler.dad.opcode\_ins (*module*), 146  
 androguard.decompiler.dad.util (*module*), 154  
 androguard.decompiler.dad.writer (*module*), 154  
 androguard.decompiler.decompiler (*module*), 156  
 androguard.misc (*module*), 158  
 androguard.session (*module*), 160  
 androguard.util (*module*), 163  
 AnnotationElement (class in androguard.core.bytecodes.dvm), 57  
 AnnotationItem (class in androguard.core.bytecodes.dvm), 58  
 AnnotationOffItem (class in androguard.core.bytecodes.dvm), 58  
 AnnotationsDirectoryItem (class in androguard.core.bytecodes.dvm), 60  
 AnnotationSetItem (class in androguard.core.bytecodes.dvm), 59  
 AnnotationSetRefItem (class in androguard.core.bytecodes.dvm), 59  
 AnnotationSetRefList (class in androguard.core.bytecodes.dvm), 59  
 APILevelNotFoundError, 47  
 APK (class in androguard.core.bytecodes.apk), 48  
 APKV2SignedData (class in androguard.core.bytecodes.apk), 56  
 APKV2Signer (class in androguard.core.bytecodes.apk), 56  
 APKV3SignedData (class in androguard.core.bytecodes.apk), 57  
 APKV3Signer (class in androguard.core.bytecodes.apk), 57  
 aput () (in module androguard.decompiler.dad.opcode\_ins), 148  
 aputboolean () (in module androguard.decompiler.dad.opcode\_ins), 148  
 aputbyte () (in module androguard.decompiler.dad.opcode\_ins), 148  
 aputchar () (in module androguard.decompiler.dad.opcode\_ins), 148  
 aputobject () (in module androguard.decompiler.dad.opcode\_ins), 148  
 aputshort () (in module androguard.decompiler.dad.opcode\_ins), 148  
 aputwide () (in module androguard.decompiler.dad.opcode\_ins), 148  
 array\_access () (in module androguard.decompiler.dad.dast), 131  
 array\_creation () (in module androguard.decompiler.dad.dast), 131  
 array\_initializer () (in module androguard.decompiler.dad.dast), 131  
 ArrayExpression (class in androguard.decompiler.dad.instruction), 138  
 arraylength () (in module androguard.decompiler.dad.opcode\_ins), 148  
 ArrayLengthExpression (class in androguard.decompiler.dad.instruction), 138  
 ArrayLoadExpression (class in androguard.decompiler.dad.instruction), 138  
 ArrayStoreInstruction (class in androguard.decompiler.dad.instruction), 138  
 ARSCComplex (class in androguard.core.bytecodes.axml), 114  
 ARSCHandler (class in androguard.core.bytecodes.axml), 115  
 ARSCPParser (class in androguard.core.bytecodes.axml), 115  
 ARSCPParser.ResourceResolver (class in androguard.core.bytecodes.axml), 115  
 ARSCResStringPoolRef (class in androguard.core.bytecodes.axml), 119

ARSCResTableConfig (class in <i>guard.core.bytecodes.axml</i> ), 119	andro-	Bold ( <i>androguard.core.androconf.Color</i> attribute), 125
ARSCResTableEntry (class in <i>guard.core.bytecodes.axml</i> ), 120	andro-	BrokenAPKError, 57
ARSCResTablePackage (class in <i>guard.core.bytecodes.axml</i> ), 120	andro-	Buff (class in <i>androguard.core.bytecode</i> ), 126
ARSCResType (class in <i>guard.core.bytecodes.axml</i> ), 120	andro-	BuffHandle (class in <i>androguard.core.bytecode</i> ), 126
ARSCResTypeSpec (class in <i>guard.core.bytecodes.axml</i> ), 120	andro-	build_def_use() (in module <i>androguard.decompiler.dad.dataflow</i> ), 134
assign_binary_2addr_exp () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148	andro-	build_node_from_block () (in module <i>androguard.decompiler.dad.basic_blocks</i> ), 134
assign_binary_exp () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148	andro-	build_path () (in module <i>androguard.decompiler.dad.util</i> ), 154
assign_cast_exp () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148	andro-	
assign_cmp () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148	andro-	
assign_const () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148	andro-	
assign_lit () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148	andro-	
AssignExpression (class in <i>guard.decompiler.dad.instruction</i> ), 139	andro-	
assignment () (in module <i>guard.decompiler.dad.dast</i> ), 131	andro-	
AXMLParser (class in <i>guard.core.bytecodes.axml</i> ), 121	andro-	
AXMLPrinter (class in <i>guard.core.bytecodes.axml</i> ), 122	andro-	
<b>B</b>		
BaseClass (class in <i>guard.decompiler.dad.instruction</i> ), 139	andro-	cast () (in module <i>androguard.decompiler.dad.dast</i> ), 131
BasicBlock (class in <i>guard.decompiler.dad.basic_blocks</i> ), 132	andro-	CastExpression (class in <i>androguard.decompiler.dad.instruction</i> ), 140
BasicBlocks (class in <i>guard.core.analysis.analysis</i> ), 37	andro-	catch_struct () (in module <i>androguard.decompiler.dad.control_flow</i> ), 134
BasicReachDef (class in <i>guard.decompiler.dad.dataflow</i> ), 134	andro-	CatchBlock (class in <i>androguard.decompiler.dad.basic_blocks</i> ), 132
bfs () (in module <i>androguard.decompiler.dad.graph</i> ), 137	andro-	checkcast () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148
binary_infix () (in module <i>androguard.decompiler.dad.dast</i> ), 131	andro-	CheckCastExpression (class in <i>androguard.decompiler.dad.instruction</i> ), 140
BinaryCompExpression (class in <i>androguard.decompiler.dad.instruction</i> ), 139	andro-	chr () (in module <i>androguard.core.bytecodes.mutf8</i> ), 124
BinaryExpression (class in <i>androguard.decompiler.dad.instruction</i> ), 139	andro-	ClassAnalysis (class in <i>androguard.core.analysis.analysis</i> ), 37
BinaryExpression2Addr (class in <i>androguard.decompiler.dad.instruction</i> ), 139	andro-	ClassDataItem (class in <i>androguard.core.bytecodes.dvm</i> ), 61
BinaryExpressionLit (class in <i>androguard.decompiler.dad.instruction</i> ), 140	andro-	ClassDefItem (class in <i>androguard.core.bytecodes.dvm</i> ), 62
Black ( <i>androguard.core.androconf.Color</i> attribute), 124	andro-	ClassHDefItem (class in <i>androguard.core.bytecodes.dvm</i> ), 64
Blue ( <i>androguard.core.androconf.Color</i> attribute), 125	andro-	ClassManager (class in <i>androguard.core.bytecodes.dvm</i> ), 64
	andro-	clean_file_name () (in module <i>androguard.misc</i> ), 159
	andro-	clean_name_instruction () (in module <i>androguard.core.bytecodes.dvm</i> ), 113
	andro-	clear_notes () (androguard.core.analysis.analysis.DVMBasicBlock method), 39
	andro-	clear_path () (in module <i>androguard.decompiler.dad.dataflow</i> ), 134
	andro-	clear_path_node () (in module <i>androguard.decompiler.dad.dataflow</i> ), 135
	andro-	CMP ( <i>androguard.decompiler.dad.opcode_ins.Op</i> attribute), 147
	andro-	cmpgdouble () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148
	andro-	cmpgfloat () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148

**C**

cast () (in module <i>androguard.decompiler.dad.dast</i> ), 131		
CastExpression (class in <i>androguard.decompiler.dad.instruction</i> ), 140		
catch_struct () (in module <i>androguard.decompiler.dad.control_flow</i> ), 134		
CatchBlock (class in <i>androguard.decompiler.dad.basic_blocks</i> ), 132		
checkcast () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148		
CheckCastExpression (class in <i>androguard.decompiler.dad.instruction</i> ), 140		
chr () (in module <i>androguard.core.bytecodes.mutf8</i> ), 124		
ClassAnalysis (class in <i>androguard.core.analysis.analysis</i> ), 37		
ClassDataItem (class in <i>androguard.core.bytecodes.dvm</i> ), 61		
ClassDefItem (class in <i>androguard.core.bytecodes.dvm</i> ), 62		
ClassHDefItem (class in <i>androguard.core.bytecodes.dvm</i> ), 64		
ClassManager (class in <i>androguard.core.bytecodes.dvm</i> ), 64		
clean_file_name () (in module <i>androguard.misc</i> ), 159		
clean_name_instruction () (in module <i>androguard.core.bytecodes.dvm</i> ), 113		
clear_notes () (androguard.core.analysis.analysis.DVMBasicBlock method), 39		
clear_path () (in module <i>androguard.decompiler.dad.dataflow</i> ), 134		
clear_path_node () (in module <i>androguard.decompiler.dad.dataflow</i> ), 135		
CMP ( <i>androguard.decompiler.dad.opcode_ins.Op</i> attribute), 147		
cmpgdouble () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148		
cmpgfloat () (in module <i>androguard.decompiler.dad.opcode_ins</i> ), 148		

cmpldouble() (in module andro-	conststring() (in module andro-
guard.decompiler.dad.opcode_ins), 148	guard.decompiler.dad.opcode_ins), 148
cmplfloat() (in module andro-	conststringjumbo() (in module andro-
guard.decompiler.dad.opcode_ins), 148	guard.decompiler.dad.opcode_ins), 148
cmplong() (in module andro-	constwide() (in module andro-
guard.decompiler.dad.opcode_ins), 148	guard.decompiler.dad.opcode_ins), 148
code_off (androguard.core.bytecodes.dvm.EncodedMethod) (in module andro-	constwide16() (in module andro-
attribute), 78	guard.decompiler.dad.opcode_ins), 148
CodeItem (class in androguard.core.bytecodes.dvm), 65	constwide32() (in module andro-
Color (class in androguard.core.androconf), 124	guard.decompiler.dad.opcode_ins), 149
color_range() (in module andro-	constwidehigh16() (in module andro-
guard.core.androconf), 125	guard.decompiler.dad.opcode_ins), 149
colorize_operands() (andro-	copy() (androguard.decompiler.dad.node.LoopType
guard.core.bytecodes.dvm.DalvikVMFormat	method), 146
method), 69	copy() (androguard.decompiler.dad.node.NodeType
comment (androguard.core.bytecodes.axml.AXMLParser	method), 146
attribute), 121	copy_from() (andro-
common_dom() (in module andro-	guard.decompiler.dad.basic_blocks.SwitchBlock
guard.decompiler.dad.util), 154	method), 133
complexToFloat() (in module andro-	copy_from() (androguard.decompiler.dad.node.Node
guard.core.bytecodes.axml), 123	method), 146
compute_end() (andro-	crash() (androguard.core.analysis.auto.DefaultAndroAnalysis
guard.decompiler.dad.node.Interval	method), 45
146	create_adex() (andro-
compute_rpo() (andro-	guard.core.analysis.auto.DefaultAndroAnalysis
guard.decompiler.dad.graph.Graph	method), 45
137	create_apk() (andro-
CondBlock (class in andro-	guard.core.analysis.auto.DefaultAndroAnalysis
guard.decompiler.dad.basic_blocks), 132	method), 45
Condition (class in andro-	create_arsc() (andro-
guard.decompiler.dad.basic_blocks), 132	guard.core.analysis.auto.DefaultAndroAnalysis
ConditionalExpression (class in andro-	method), 45
guard.decompiler.dad.instruction), 140	create_axml() (andro-
ConditionalZExpression (class in andro-	guard.core.analysis.auto.DefaultAndroAnalysis
guard.decompiler.dad.instruction), 140	method), 46
Configuration (class in andro-	create_dex() (andro-
guard.core.androconf), 125	guard.core.analysis.auto.DefaultAndroAnalysis
const() (in module andro-	method), 46
guard.decompiler.dad.opcode_ins), 148	create_dey() (andro-
const16() (in module andro-	guard.core.analysis.auto.DefaultAndroAnalysis
guard.decompiler.dad.opcode_ins), 148	method), 46
const4() (in module andro-	create_ipython_exports() (andro-
guard.decompiler.dad.opcode_ins), 148	guard.core.analysis.Analysis method),
Constant (class in andro-	33
guard.decompiler.dad.instruction), 140	create_png() (in module andro-
constclass() (in module andro-	guard.decompiler.dad.util), 154
guard.decompiler.dad.opcode_ins), 148	create_python_export() (andro-
consthigh16() (in module andro-	guard.core.bytecodes.dvm.DalvikVMFormat
guard.decompiler.dad.opcode_ins), 148	method), 69
construct() (in module andro-	create_xref() (andro-
guard.decompiler.dad.graph), 138	guard.core.analysis.Analysis method),
ConstString (class in andro-	34
guard.core.bytecodes.dvm), 66	Cyan (androguard.core.androconf.Color attribute), 125

**D**

DalvikCode	(class in <i>guard.core.bytecodes.dvm</i> ), 67	andro-	<i>guard.core.androconf</i> ), 125
DalvikOdexVMFormat	(class in <i>guard.core.bytecodes.dvm</i> ), 69	andro-	disable_print_colors() (in module <i>andro-</i> <i>guard.core.bytecode</i> ), 129
DalvikVMFormat	(class in <i>guard.core.bytecodes.dvm</i> ), 69	andro-	disassemble() (andro-
DBGBytecode	(class in <i>guard.core.bytecodes.dvm</i> ), 66	andro-	<i>guard.core.bytecodes.dvm.DalvikVMFormat</i> method), 69
DCode	(class in <i>androguard.core.bytecodes.dvm</i> ), 66	andro-	display_all() (andro-
dead_code_elimination()	(in module <i>andro-</i> <i>guard.decompiler.dad.dataflow</i> ), 135	andro-	<i>guard.decompiler.decompiler.DecompilerDAD</i> method), 156
DebugInfoItem	(class in <i>guard.core.bytecodes.dvm</i> ), 73	andro-	display_all() (andro-
DebugInfoItemEmpty	(class in <i>guard.core.bytecodes.dvm</i> ), 74	andro-	<i>guard.decompiler.decompiler.DecompilerDed</i> method), 156
dec_ind()	( <i>androguard.decompiler.dad.writer.Writer</i> method), 154	andro-	display_all() (andro-
decode()	(in module <i>guard.core.bytecodes.mutf8</i> ), 124	andro-	<i>guard.decompiler.decompiler.DecompilerDex2Fernflower</i> method), 157
DecompilerDAD	(class in <i>guard.decompiler.decompiler</i> ), 156	andro-	display_all() (andro-
DecompilerDed	(class in <i>guard.decompiler.decompiler</i> ), 156	andro-	<i>guard.decompiler.decompiler.DecompilerJADX</i> method), 157
DecompilerDex2Fernflower	(class in <i>guard.decompiler.decompiler</i> ), 157	andro-	display_source() (andro-
DecompilerDex2Jad	(class in <i>guard.decompiler.decompiler</i> ), 157	andro-	<i>guard.decompiler.decompiler.DecompilerDAD</i> method), 156
DecompilerDex2WineJad	(class in <i>guard.decompiler.decompiler</i> ), 157	andro-	display_source() (andro-
DecompilerJADX	(class in <i>guard.decompiler.decompiler</i> ), 157	andro-	<i>guard.decompiler.decompiler.DecompilerDed</i> method), 156
default_colors()	(in module <i>guard.core.androconf</i> ), 125	andro-	display_source() (andro-
default_config()	( <i>andro-</i> <i>guard.core.bytecodes.axml.ARSCResTableConfig</i> class method), 119	andro-	<i>guard.decompiler.decompiler.DecompilerDex2Jad</i> method), 157
DefaultAndroAnalysis	(class in <i>guard.core.analysis.auto</i> ), 43	andro-	display_source() (andro-
DefaultAndroLog	(class in <i>guard.core.analysis.auto</i> ), 46	andro-	<i>guard.decompiler.decompiler.DecompilerDex2WineJad</i> method), 157
derived_sequence()	(in module <i>andro-</i> <i>guard.decompiler.dad.control_flow</i> ), 134	andro-	display_source() (andro-
descriptor	( <i>androguard.core.analysis.analysis.MethodClassAnalysis</i> attribute), 41	andro-	<i>guard.decompiler.dad.opcode_ins.Op</i> at- tribute), 147
determineException()	(in module <i>andro-</i> <i>guard.core.bytecodes.dvm</i> ), 113	andro-	divdouble() (in module <i>andro-</i> <i>guard.decompiler.dad.opcode_ins</i> ), 149
determineNext()	(in module <i>andro-</i> <i>guard.core.bytecodes.dvm</i> ), 113	andro-	divdouble2addr() (in module <i>andro-</i> <i>guard.decompiler.dad.opcode_ins</i> ), 149
Dex2Jar	(class in <i>androguard.decompiler.decompiler</i> ), 158	andro-	divfloat() (in module <i>andro-</i> <i>guard.decompiler.dad.opcode_ins</i> ), 149
DirectoryAndroAnalysis	(class in <i>andro-</i> <i>guard.core.analysis.auto</i> ), 47	andro-	divfloat2addr() (in module <i>andro-</i> <i>guard.decompiler.dad.opcode_ins</i> ), 149
disable_colors()	(in module <i>andro-</i>	andro-	divint() (in module <i>andro-</i> <i>guard.decompiler.dad.opcode_ins</i> ), 149

divint2addr() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	EncodedArray (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 74
divintl16() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	EncodedArrayList (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 75
divintl8() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	EncodedCatchHandler (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 75
divlong() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	EncodedCatchHandlerList (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 76
divlong2addr() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	EncodedField (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 76
dom_lt() (in module <i>andro-</i>	<i>guard.decompiler.dad.graph</i> ), 138	EncodedMethod (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 78
doubleofloat() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	EncodedTypeAddrPair (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 81
doubleoint() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	EncodedValue (class in <i>andro-</i>	<i>guard.core.bytecodes.dvm</i> ), 81
doubletolong() (in module <i>andro-</i>	<i>guard.decompiler.dad.opcode_ins</i> ), 149	end ( <i>androguard.core.bytecodes.axml.ARSCHeader</i> at-	<i>tribute</i> ), 115
draw() ( <i>androguard.decompiler.dad.Graph</i> . <i>Graph</i>	<i>method</i> ), 137	end() ( <i>androguard.core bytecode.BuffHandle</i> <i>method</i> ),	126
dummy() (in module <i>androguard.decompiler.dad.dast</i> ),	131	end_ins() ( <i>androguard.decompiler.dad.writer.Writer</i>	<i>method</i> ), 154
DummyNode (class in <i>andro-</i>	<i>guard.decompiler.dad.dataflow</i> ), 134	ensure_final_value() (in module <i>andro-</i>	<i>guard.core.bytecodes.apk</i> ), 57
dump() ( <i>androguard.core.analysis.auto.AndroAuto</i>	<i>method</i> ), 43	EQUAL ( <i>androguard.decompiler.dad.opcode_ins.Op</i> <i>attribute</i> ), 147	
dump() ( <i>androguard.core.analysis.auto.DefaultAndroAnalysis</i>	<i>method</i> ), 46	Error, 57, 82	
dump_file() ( <i>andro-</i>	<i>guard.core.analysis.auto.AndroAuto</i> <i>method</i> ),	ExceptionAnalysis (class in <i>andro-</i>	
43		<i>guard.core.analysis.analysis</i> ), 40	
dump_file() ( <i>andro-</i>	<i>guard.core.analysis.auto.DefaultAndroAnalysis</i>	Exceptions (class in <i>andro-</i>	
method), 46		<i>guard.core.analysis.analysis</i> ), 40	
DvClass (class in <i>andro-</i>	<i>guard.decompiler.dad.decompile</i> ), 135	Exit () (in module <i>androguard.core.bytecode</i> ), 127	
DvMachine (class in <i>andro-</i>	<i>guard.decompiler.dad.decompile</i> ), 135	ExportObject (class in <i>andro-</i>	
DVMBasicBlock (class in <i>andro-</i>	<i>guard.core.analysis.analysis</i> ), 39	<i>guard.core.bytecodes.dvm</i> ), 82	
DvMethod (class in <i>andro-</i>	<i>guard.decompiler.dad.decompile</i> ), 136	expression_stmt() (in module <i>andro-</i>	
		<i>guard.decompiler.dad.dast</i> ), 131	
		extends ( <i>androguard.core.analysis.analysis.ClassAnalysis</i>	
		<i>attribute</i> ), 38	
		ExternalClass (class in <i>andro-</i>	
		<i>guard.core.analysis.analysis</i> ), 40	
		ExternalMethod (class in <i>andro-</i>	
		<i>guard.core.analysis.analysis</i> ), 40	

## E

each\_params\_by\_register() (*andro-*  
*guard.core.bytecodes.dvm.EncodedMethod*  
*method*), 78

enable\_colors() (in module *andro-*  
*guard.core.androconf*), 125

enable\_print\_colors() (in module *andro-*  
*guard.core.bytecode*), 129

EncodedAnnotation (class in *andro-*  
*guard.core.bytecodes.dvm*), 74

## F

FakeNop (class in *androguard.core.bytecodes.dvm*), 82

fetcher() (*androguard.core.analysis.auto.DefaultAndroAnalysis*  
*method*), 46

fetcher() (*androguard.core.analysis.auto.DirectoryAndroAnalysis*  
*method*), 47

field\_access() (in module *andro-*  
*guard.decompiler.dad.dast*), 131

FieldAnnotation (class in *andro-*  
*guard.core.bytecodes.dvm*), 82

FieldClassAnalysis (class in *andro-*  
    *guard.core.analysis.analysis*), 40  
FieldHIdItem (class in *andro-*  
    *guard.core.bytecodes.dvm*), 82  
FieldIdItem (class in *andro-*  
    *guard.core.bytecodes.dvm*), 83  
FieldIdItemInvalid (class in *andro-*  
    *guard.core.bytecodes.dvm*), 84  
FileNotPresent, 57  
files (*androguard.core.bytecodes.apk.APK* attribute),  
    48  
FillArrayData (class in *andro-*  
    *guard.core.bytecodes.dvm*), 84  
fillarraydata() (in module *andro-*  
    *guard.decompiler.dad.opcode\_ins*), 149  
fillarraydatapayload() (in module *andro-*  
    *guard.decompiler.dad.opcode\_ins*), 149  
FillArrayExpression (class in *andro-*  
    *guard.decompiler.dad.instruction*), 141  
FilledArrayExpression (class in *andro-*  
    *guard.decompiler.dad.instruction*), 141  
fillednewarray() (in module *andro-*  
    *guard.decompiler.dad.opcode\_ins*), 149  
fillednewarrayrange() (in module *andro-*  
    *guard.decompiler.dad.opcode\_ins*), 149  
filter() (*androguard.decompiler.decompiler.MethodFilter*  
    method), 158  
filter\_file() (*andro-*  
    *guard.core.analysis.auto.DefaultAndroAnalysis*  
    method), 46  
find\_classes() (*andro-*  
    *guard.core.analysis.analysis.Analysis* method),  
    34  
find\_fields() (*andro-*  
    *guard.core.analysis.analysis.Analysis* method),  
    34  
find\_methods() (*andro-*  
    *guard.core.analysis.analysis.Analysis* method),  
    34  
find\_strings() (*andro-*  
    *guard.core.analysis.analysis.Analysis* method),  
    35  
find\_tags() (*androguard.core.bytecodes.apk.APK*  
    method), 48  
find\_tags\_from\_xml() (*andro-*  
    *guard.core.bytecodes.apk.APK*  
    method), 48  
finish() (*androguard.core.analysis.auto.DefaultAndroAnalysis*  
    method), 46  
fix\_checksums() (*andro-*  
    *guard.core.bytecodes.dvm.DalvikVMFormat*  
    method), 70  
FLAG\_COMPLEX (*andro-*  
    *guard.core.bytecodes.axml.ARSCResTableEntry*  
    attribute), 120  
FLAG\_PUBLIC (*andro-*  
    *guard.core.bytecodes.axml.ARSCResTableEntry*  
    attribute), 120  
FLAG\_WEAK (*androguard.core.bytecodes.axml.ARSCResTableEntry*  
    attribute), 120  
floattodouble() (in module *andro-*  
    *guard.decompiler.dad.opcode\_ins*), 149  
floattoint() (in module *andro-*  
    *guard.decompiler.dad.opcode\_ins*), 149  
floattolong() (in module *andro-*  
    *guard.decompiler.dad.opcode\_ins*), 149  
format\_value() (*andro-*  
    *guard.core.bytecodes.axml.ARSCResStringPoolRef*  
    method), 119  
format\_value() (in module *andro-*  
    *guard.core.bytecodes.axml*), 123  
FormatClassToJava() (in module *andro-*  
    *guard.core bytecode*), 127  
FormatClassToPython() (in module *andro-*  
    *guard.core bytecode*), 128  
FormatDescriptorToPython() (in module *andro-*  
    *guard.core bytecode*), 128  
FormatNameToPython() (in module *andro-*  
    *guard.core bytecode*), 128

## G

GenInvokeRetName (class in *andro-*  
    *guard.decompiler.dad.graph*), 136  
GEQUAL (*androguard.decompiler.dad.opcode\_ins.Op*  
    attribute), 147  
get() (*androguard.core.analysis.analysis.BasicBlocks*  
    method), 37  
get() (*androguard.core.analysis.analysis.ExceptionAnalysis*  
    method), 40  
get() (*androguard.core.analysis.analysis.Exceptions*  
    method), 40  
get() (*androguard.core.bytecodes.dvm.FieldHIdItem*  
    method), 82  
get() (*androguard.core.bytecodes.dvm.MethodHIdItem*  
    method), 103  
get() (*androguard.core.bytecodes.dvm.ProtoHIdItem*  
    method), 106  
get() (*androguard.core.bytecodes.dvm.StringDataItem*  
    method), 109  
get() (*androguard.core.bytecodes.dvm.TypeHIdItem*  
    method), 111  
get\_access\_class() (in module *andro-*  
    *guard.decompiler.dad.util*), 154  
get\_access\_field() (in module *andro-*  
    *guard.decompiler.dad.util*), 154  
get\_access\_flags() (*andro-*  
    *guard.core.bytecodes.dvm.ClassDefItem*  
    method), 62

```

get_access_flags() (andro-
    guard.core.bytecodes.dvm.EncodedField
    method), 77
get_access_flags() (andro-
    guard.core.bytecodes.dvm.EncodedMethod
    method), 78
get_access_flags_string() (andro-
    guard.core.analysis.analysis.ExternalMethod
    method), 40
get_access_flags_string() (andro-
    guard.core.bytecodes.dvm.ClassDefItem
    method), 62
get_access_flags_string() (andro-
    guard.core.bytecodes.dvm.EncodedField
    method), 77
get_access_flags_string() (andro-
    guard.core.bytecodes.dvm.EncodedMethod
    method), 78
get_access_flags_string() (in module andro-
    guard.core.bytecodes.dvm), 113
get_access_method() (in module andro-
    guard.decompiler.dad.util), 154
get_activities() (andro-
    guard.core.bytecodes.apk(APK
    method), 48
get_addr() (androguard.core.bytecodes.dvm.EncodedTypeAddPair
    method), 81
get_address() (andro-
    guard.core.bytecodes.dvm.EncodedMethod
    method), 79
get_all() (androguard.decompiler.DecompilerDAD
    method), 156
get_all() (androguard.decompiler.DecompilerDed
    method), 156
get_all() (androguard.decompiler.DecompilerDex2Dex
    method), 157
get_all() (androguard.decompiler.DecompilerDex2Jad
    method), 157
get_all() (androguard.decompiler.DecompilerDex2Jad
    method), 158
get_all_apks() (androguard.session.Session
    method), 161
get_all_attribute_value() (andro-
    guard.core.bytecodes.apk(APK
    method), 48
get_all_dex() (andro-
    guard.core.bytecodes.apk(APK
    method), 48
get_all_engine() (andro-
    guard.core.bytecodes.dvm.ClassManager
    method), 64
get_all_fields() (andro-
    guard.core.bytecodes.dvm.DalvikVMFormat
    method), 70
get_analysis() (androguard.session.Session
    method), 161
get_android_manifest_axml() (andro-
    guard.core.bytecodes.apk(APK
    method), 48
get_android_manifest_xml() (andro-
    guard.core.bytecodes.apk(APK
    method), 48
get_android_resources() (andro-
    guard.core.bytecodes.apk(APK
    method), 48
get_androidversion_code() (andro-
    guard.core.bytecodes.apk(APK
    method), 49
get_androidversion_name() (andro-
    guard.core.bytecodes.apk(APK
    method), 49
get_annotated_fields_size() (andro-
    guard.core.bytecodes.dvm.AnnotationsDirectoryItem
    method), 60
get_annotated_methods_size() (andro-
    guard.core.bytecodes.dvm.AnnotationsDirectoryItem
    method), 60
get_annotation() (andro-
    guard.core.bytecodes.dvm.AnnotationItem
    method), 58
get_annotation_off() (andro-
    guard.core.bytecodes.dvm.AnnotationOffItem
    method), 58
get_annotation_ref_item() (andro-
    guard.core.bytecodes.dvm.AnnotationSetItem
    method), 59
get_annotations_off() (andro-
    guard.core.bytecodes.dvm.AnnotationSetRefItem
    method), 59
get_annotations_off() (andro-
    guard.core.bytecodes.dvm.ClassDefItem
    method), 62
get_annotations_off() (andro-
    guard.core.bytecodes.dvm.FieldAnnotation
    method), 82
get_annotations_off() (andro-
    guard.core.bytecodes.dvm.MethodAnnotation
    method), 102
get_annotations_off() (andro-
    guard.core.bytecodes.dvm.ParameterAnnotation
    method), 106
get_api_version() (andro-
    guard.core.bytecodes.dvm.DalvikVMFormat
    method), 106

```

method), 70  
get\_apk\_id() (in module  
    `androguard.core.bytecodes.apk`), 57  
get\_app\_icon() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    49  
get\_app\_name() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    49  
get\_args() (in module  
    `androguard.decompiler.dad.opcode_ins`), 149  
get\_arsc\_info() (in module  
    `androguard.core.bytecodes.axml`), 123  
get\_ascii\_string() (in module  
    `androguard.core.bytecodes.dvm.ClassManager`  
    method), 64  
get\_ast() (in module  
    `androguard.core.bytecodes.dvm.ClassDefItem`  
    method), 62  
get\_ast() (in module  
    `androguard.decompiler.dad.dast.JSONWriter`  
    method), 130  
get\_ast() (in module  
    `androguard.decompiler.dad.decompile.DvClass`  
    method), 135  
get\_ast() (in module  
    `androguard.decompiler.dad.decompile.DvMachine`  
    method), 136  
get\_ast() (in module  
    `androguard.decompiler.dad.decompile.DvMethod`  
    method), 136  
get\_ast\_class() (in module  
    `androguard.decompiler.DecompilerDAD`  
    method), 156  
get\_ast\_method() (in module  
    `androguard.decompiler.DecompilerDAD`  
    method), 156  
get\_attribute\_value() (in module  
    `androguard.core.bytecodes.apk.APK`  
    method), 50  
get\_basic\_block() (in module  
    `androguard.core.analysis.analysis.BasicBlocks`  
    method), 37  
get\_basic\_block\_pos() (in module  
    `androguard.core.analysis.analysis.BasicBlocks`  
    method), 37  
get\_basic\_blocks() (in module  
    `androguard.core.analysis.analysis.MethodAnalysis`  
    method), 41  
get\_bc() (in module  
    `androguard.core.bytecodes.dvm.DalvikCode`  
    method), 68  
get\_bool\_resources() (in module  
    `androguard.core.bytecodes.axml.ARSCParser`  
    method), 116  
get\_BRANCH\_DVM\_OPCODES() (in module  
    `androguard.core.bytecodes.dvm.DalvikVMFormat`  
    method), 70  
get\_buff() (in module  
    `androguard.core.bytecode.BuffHandle`  
    method), 126  
get\_buff() (in module  
    `androguard.core.bytecodes.axml.AXMLPrinter`  
    method), 122  
get\_buff() (in module  
    `androguard.core.bytecodes.dvm.DalvikOdexVMFormat`  
    method), 69  
get\_byte() (in module  
    `androguard.core.bytecodes.dvm`), 113  
get\_bytecodes() (in module  
    `androguard.core.bytecodes.dvm.DebugInfoItem`  
    method), 73  
get\_bytecodes\_method() (in module  
    `androguard.core.bytecodes.dvm`), 113  
get\_bytecodes\_methodx() (in module  
    `androguard.core.bytecodes.dvm`), 113  
get\_call\_graph() (in module  
    `androguard.core.analysis.analysis.Analysis` method),  
    35  
get\_catch\_all\_addr() (in module  
    `androguard.core.bytecodes.dvm.EncodedCatchHandler`  
    method), 76  
get\_certificate() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_certificate\_der() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_certificate\_name\_string() (in module  
    `androguard.util`), 163  
get\_certificates() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_certificates\_der\_v2() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_certificates\_der\_v3() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_certificates\_v1() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_certificates\_v2() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_certificates\_v3() (in module  
    `androguard.core.bytecodes.apk.APK`),  
    50  
get\_class() (in module  
    `androguard.core.bytecodes.dvm.DalvikVMFormat`  
    method), 70  
get\_class() (in module  
    `androguard.decompiler.dad.decompile.DvMachine`  
    method), 136  
get\_class\_analysis() (in module  
    `androguard.core.analysis.analysis.Analysis` method),  
    35

get_class_annotations_off()	(andro-	get_classes()	(andro-
guard.core.bytecodes.dvm.AnnotationsDirectoryItem		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 60		method), 70	
get_class_data()	(andro-	get_classes()	(andro-
guard.core.bytecodes.dvm.ClassDefItem		guard.decompiler.dad.decompile.DvMachine	
method), 62		method), 136	
get_class_data_item()	(andro-	get_classes()	(andro-
guard.core.bytecodes.dvm.ClassManager		guard.session.Session	
method), 64		method), 162	
get_class_data_off()	(andro-	get_classes_def_item()	(andro-
guard.core.bytecodes.dvm.ClassDefItem		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 62		method), 70	
get_class_idx()	(andro-	get_classes_names()	(andro-
guard.core.bytecodes.dvm.ClassDefItem		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 63		method), 70	
get_class_idx()	(andro-	get_cm_field()	(andro-
guard.core.bytecodes.dvm.ClassHDefItem		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 64		method), 70	
get_class_idx()	(andro-	get_cm_method()	(andro-
guard.core.bytecodes.dvm.FieldIdItem		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 83		method), 70	
get_class_idx()	(andro-	get_cm_string()	(andro-
guard.core.bytecodes.dvm.MethodIdItem		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 103		method), 70	
get_class_manager()	(andro-	get_cm_type()	(andro-
guard.core.bytecodes.dvm.DalvikVMFormat		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 70		method), 71	
get_class_manager()	(andro-	get_code()	(andro-
guard.core.bytecodes.dvm.MapList		guard.core.bytecodes.dvm.ClassManager	
method), 102		method), 64	
get_class_name()	(andro-	get_code()	(andro-
guard.core.analysis.analysis.ExternalMethod		guard.core.bytecodes.dvm.CodeItem	
method), 40		method), 65	
get_class_name()	(andro-	get_code()	(andro-
guard.core.bytecodes.dvm.EncodedField		guard.core.bytecodes.dvm.EncodedMethod	
method), 77		method), 79	
get_class_name()	(andro-	get_code_off()	(andro-
guard.core.bytecodes.dvm.EncodedMethod		guard.core.bytecodes.dvm.EncodedMethod	
method), 79		method), 79	
get_class_name()	(andro-	get_codes_item()	(andro-
guard.core.bytecodes.dvm.FieldIdItem		guard.core.bytecodes.dvm.DalvikVMFormat	
method), 83		method), 71	
get_class_name()	(andro-	get_color_resources()	(andro-
guard.core.bytecodes.dvm.FieldIdItemInvalid		guard.core.bytecodes.axml.ARSCParser	
method), 84		method), 116	
get_class_name()	(andro-	get_cond()	(andro-
guard.core.bytecodes.dvm.MethodIdItem		guard.decompiler.dad.dast.JSONWriter	
method), 103		method), 131	
get_class_name()	(andro-	get_config_name_friendly()	(andro-
guard.core.bytecodes.dvm.MethodIdItemInvalid		guard.core.bytecodes.axml.ARSCResTableConfig	
method), 104		method), 119	
get_classes()	(andro-	get_country()	(andro-
guard.core.analysis.analysis.Analysis		guard.core.bytecodes.axml.ARSCResTableConfig	
method), 35		method), 119	
		get_data()	(andro-
		guard.core.bytecodes.axml.ARSCResStringPoolRef	
		method), 119	
		get_data()	(andro-
		guard.core.bytecodes.dvm.FillArrayData	
		method), 84	
		get_data()	(andro-
		guard.core.bytecodes.dvm.StringDataItem	

method), 109  
get\_data\_type() (andro-  
guard.core.bytecodes.axml.ARSCResStringPoolRef  
method), 119  
get\_data\_type\_string() (andro-  
guard.core.bytecodes.axml.ARSCResStringPoolRef  
method), 119  
get\_data\_value() (andro-  
guard.core.bytecodes.axml.ARSCResStringPoolRef  
method), 119  
get\_debug() (andro-  
guard.core.bytecodes.dvm.DalvikCode  
method), 68  
get\_debug() (andro-  
guard.core.bytecodes.dvm.EncodedMethod  
method), 79  
get\_debug\_info\_item() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 71  
get\_debug\_info\_off() (andro-  
guard.core.bytecodes.dvm.DalvikCode  
method), 68  
get\_debug\_off() (andro-  
guard.core.bytecodes.dvm.ClassManager  
method), 64  
get\_declared\_permissions() (andro-  
guard.core.bytecodes.apk(APK  
method), 50  
get\_declared\_permissions\_details() (an-  
droguard.core.bytecodes.apk(APK  
method), 50  
get\_default\_session() (in module andro-  
guard.misc), 159  
get\_density() (andro-  
guard.core.bytecodes.axml.ARSCResTableConfig  
method), 119  
get\_dependencies() (andro-  
guard.core.bytecodes.dvm.DalvikOdexVMFormat  
method), 69  
get\_dependencies() (andro-  
guard.core.bytecodes.dvm.OdexDependencies  
method), 104  
get\_descriptor() (andro-  
guard.core.analysis.analysis.ExternalMethod  
method), 40  
get\_descriptor() (andro-  
guard.core.bytecodes.dvm.EncodedField  
method), 77  
get\_descriptor() (andro-  
guard.core.bytecodes.dvm.EncodedMethod  
method), 79  
get\_descriptor() (andro-  
guard.core.bytecodes.dvm.FieldIdItem  
method), 83  
get\_descriptor() (andro-  
guard.core.bytecodes.dvm.FieldIdItemInvalid  
method), 84  
get\_descriptor() (andro-  
guard.core.bytecodes.dvm.MethodIdItem  
method), 103  
get\_descriptor() (andro-  
guard.core.bytecodes.dvm.MethodIdItemInvalid  
method), 104  
get\_descriptor\_idx() (andro-  
guard.core.bytecodes.dvm.TypeIdItem method),  
111  
get\_descriptor\_idx\_value() (andro-  
guard.core.bytecodes.dvm.TypeIdItem method),  
111  
get\_details\_permissions() (andro-  
guard.core.bytecodes.apk(APK  
method), 51  
get\_determineException() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 71  
get\_determineNext() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 71  
get\_dex() (androguard.core.bytecodes.apk(APK  
method), 51  
get\_dex\_names() (andro-  
guard.core.bytecodes.apk(APK  
method), 51  
get\_digest\_by\_class() (andro-  
guard.session.Session method), 162  
get\_dimen\_resources() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 116  
get\_direct\_methods() (andro-  
guard.core.bytecodes.dvm.ClassDataItem  
method), 61  
get\_direct\_methods\_size() (andro-  
guard.core.bytecodes.dvm.ClassDataItem  
method), 61  
get\_effective\_target\_sdk\_version() (an-  
droguard.core.bytecodes.apk(APK  
method), 51  
get\_element() (andro-  
guard.core.bytecodes.apk(APK  
method), 51  
get\_elements() (andro-  
guard.core.bytecodes.apk(APK  
method), 51  
get\_elements() (andro-  
guard.core.bytecodes.dvm.EncodedAnnotation  
method), 74  
get\_encoded\_array\_item() (andro-  
guard.core.bytecodes.dvm.ClassManager

method), 64  
`get_end()` (*androguard.core.analysis.analysis.DVMBasicBlock* method), 39  
`get_end()` (*androguard.decompiler.dad.node.Interval* method), 146  
`get_end()` (*androguard.decompiler.dad.node.Node* method), 146  
`get_engine()` (*androguard.core.bytecodes.dvm.ClassManager* method), 64  
`get_exception()` (*androguard.core.analysis.analysis.Exceptions* method), 40  
`get_exception_analysis()` (*androguard.core.analysis.analysis.DVMBasicBlock* method), 39  
`get_extented_instruction()` (*in module androguard.core.bytecodes.dvm*), 113  
`get_external_classes()` (*androguard.core.analysis.analysis.Analysis* method), 35  
`get_fake_method()` (*androguard.core.analysis.analysis.ClassAnalysis* method), 38  
`get_features()` (*androguard.core.bytecodes.apk(APK* method), 51  
`get_field()` (*androguard.core.analysis.analysis.FieldClassAnalysis* method), 41  
`get_field()` (*androguard.core.bytecodes.dvm.ClassManager* method), 64  
`get_field()` (*androguard.core.bytecodes.dvm.DalvikVMFormat* method), 71  
`get_field_analysis()` (*androguard.core.analysis.analysis.Analysis* method), 35  
`get_field_analysis()` (*androguard.core.analysis.analysis.ClassAnalysis* method), 38  
`get_field_annotations()` (*androguard.core.bytecodes.dvm.AnnotationsDirectoryItem* method), 60  
`get_field_ast()` (*in module androguard.decompiler.dad.decompile*), 136  
`get_field_descriptor()` (*androguard.core.bytecodes.dvm.DalvikVMFormat* method), 71  
`get_field_idx()` (*androguard.core.bytecodes.dvm.EncodedField* method), 77  
`get_field_idx()` (*androguard.core.bytecodes.dvm.FieldAnnotation* method), 82  
`get_field_idx_diff()` (*androguard.core.bytecodes.dvm.EncodedField* method), 77  
`get_field_ref()` (*androguard.core.bytecodes.dvm.ClassManager* method), 64  
`get_fields()` (*androguard.core.analysis.analysis.Analysis* method), 35  
`get_fields()` (*androguard.core.analysis.analysis.ClassAnalysis* method), 38  
`get_fields()` (*androguard.core.bytecodes.dvm.ClassDataItem* method), 61  
`get_fields()` (*androguard.core.bytecodes.dvm.ClassDefItem* method), 63  
`get_fields()` (*androguard.core.bytecodes.dvm.DalvikVMFormat* method), 71  
`get_fields_class()` (*androguard.core.bytecodes.dvm.DalvikVMFormat* method), 71  
`get_fields_id_item()` (*androguard.core.bytecodes.dvm.DalvikVMFormat* method), 71  
`get_file()` (*androguard.core.bytecodes.apk(APK* method), 51  
`get_filename()` (*androguard.core.bytecodes.apk(APK* method), 51  
`get_filename_by_class()` (*androguard.session.Session* method), 162  
`get_files()` (*androguard.core.bytecodes.apk(APK* method), 52  
`get_files_crc32()` (*androguard.core.bytecodes.apk(APK* method), 52  
`get_files_information()` (*androguard.core.bytecodes.apk(APK* method), 52  
`get_files_types()` (*androguard.core.bytecodes.apk(APK* method), 52  
`get_format()` (*androguard.core.bytecodes.dvm.DalvikVMFormat* method), 71  
`get_format()` (*androguard.session.Session* method), 162  
`get_format_type()` (*androguard.core.bytecodes.dvm.DalvikOdexVMFormat*

method), 69  
get\_format\_type() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 71  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.FillArrayData  
method), 84  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction method),  
85  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction21h  
method), 89  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction21s  
method), 90  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction31i  
method), 95  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction51l  
method), 99  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.PackedSwitch  
method), 105  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.SparseSwitch  
method), 108  
get\_handler\_off() (andro-  
guard.core.bytecodes.dvm.TryItem  
method),  
110  
get\_handlers() (andro-  
guard.core.bytecodes.dvm.DalvikCode  
method), 68  
get\_handlers() (andro-  
guard.core.bytecodes.dvm.EncodedCatchHandler  
method), 76  
get\_head() (androguard.decompiler.dad.node.Interval  
method), 146  
get\_head() (androguard.decompiler.dad.node.Node  
method), 146  
get\_header\_item() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 71  
get\_hex() (androguard.core.bytecodes.dvm.FillArrayData  
method), 84  
get\_hex() (androguard.core.bytecodes.dvm.Instruction  
method), 85  
get\_hex() (androguard.core.bytecodes.dvm.PackedSwitch  
method), 105  
get\_hex() (androguard.core.bytecodes.dvm.SparseSwitch  
method), 108  
get\_id() (androguard.core.bytecodes.axml.ARSCParser  
method), 116  
get\_id\_resources() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 116  
get\_idx() (androguard.core.bytecode.BuffHandle  
method), 126  
get\_index() (andro-  
guard.core.bytecodes.axml.ARSCResTableEntry  
method), 120  
get\_information() (andro-  
guard.core.bytecodes.dvm.EncodedMethod  
method), 79  
get\_init\_value() (andro-  
guard.core.bytecodes.dvm.EncodedField  
method), 77  
get\_ins() (androguard.decompiler.dad.basic\_blocks.BasicBlock  
method), 132  
get\_ins() (androguard.decompiler.dad.basic\_blocks.Condition  
method), 133  
get\_ins() (androguard.decompiler.dad.basic\_blocks.LoopBlock  
method), 133  
get\_ins() (androguard.decompiler.dad.basic\_blocks.ShortCircuitBlock  
method), 133  
get\_ins\_from\_loc() (andro-  
guard.decompiler.dad.graph.Graph  
method),  
137  
get\_ins\_off() (andro-  
guard.core.bytecodes.dvm.DCode  
method),  
66  
get\_ins\_size() (andro-  
guard.core.bytecodes.dvm.DalvikCode  
method), 68  
get\_insn() (androguard.core.bytecodes.dvm.DCode  
method), 66  
get\_insn\_count() (andro-  
guard.core.bytecodes.dvm.TryItem  
method),  
110  
get\_insns\_size() (andro-  
guard.core.bytecodes.dvm.DalvikCode  
method), 68  
get\_instance\_fields() (andro-  
guard.core.bytecodes.dvm.ClassDataItem  
method), 61  
get\_instance\_fields\_size() (andro-  
guard.core.bytecodes.dvm.ClassDataItem  
method), 61  
get\_instruction() (andro-  
guard.core.bytecodes.dvm.DalvikCode  
method), 68  
get\_instruction() (andro-  
guard.core.bytecodes.dvm.DCode  
method), 66  
get\_instruction() (andro-  
guard.core.bytecodes.dvm.EncodedMethod  
method), 79

```

get_instruction() (in module andro- get_kind() (androguard.core.bytecodes.dvm.Instruction
    guard.core.bytecodes.dvm), 113 method), 85
get_instruction_payload() (in module andro- get_kind() (in module andro-
    guard.core.bytecodes.dvm), 113 guard.core.bytecodes.dvm), 113
get_instructions() (andro- get_language() (andro-
    guard.core.analysis.analysis.DVMBasicBlock
    method), 39 guard.core.bytecodes.axml.ARSCResTableConfig
method), 119
get_instructions() (andro- get_language_and_region() (andro-
    guard.core.bytecodes.dvm.DCode
    method), 67 guard.core.bytecodes.axml.ARSCResTableConfig
method), 120
get_instructions() (andro- get_last() (androguard.core.analysis.analysis.DVMBasicBlock
    guard.core.bytecodes.dvm.EncodedMethod
    method), 79 method), 39
get_instructions() (andro- get_last_length() (andro-
    guard.core.bytecodes.dvm.LinearSweepAlgorithm
    method), 101 guard.core.analysis.analysis.DVMBasicBlock
method), 39
get_int_value() (andro- get_lazy_analysis() (andro-
    guard.decompiler.dad.instruction.Constant
    method), 141 guard.core.bytecodes.dvm.ClassManager
method), 64
get_integer_resources() (andro- get_len_methods() (andro-
    guard.core.bytecodes.axml.ARSCPParser
    method), 117 guard.core.bytecodes.dvm.DalvikVMFormat
method), 72
get_intent_filters() (andro- get_length() (andro-
    guard.core.bytecodes.apk.APK
    method), 52 guard.core.analysis.analysis.MethodAnalysis
method), 41
get_interfaces() (andro- get_length() (andro-
    guard.core.bytecodes.dvm.ClassDefItem
    method), 63 guard.core.bytecodes.dvm.AnnotationElement
method), 58
get_interfaces_off() (andro- get_length() (andro-
    guard.core.bytecodes.dvm.ClassDefItem
    method), 63 guard.core.bytecodes.dvm.AnnotationItem
method), 58
get_internal_classes() (andro- get_length() (andro-
    guard.core.analysis.analysis.Analysis
    method), 35 guard.core.bytecodes.dvm.AnnotationOffItem
method), 58
get_item() (androguard.core.bytecodes.dvm.MapItem
    method), 101 get_length() (andro-
method), 60 guard.core.bytecodes.dvm.AnnotationsDirectoryItem
method), 60
get_item_by_offset() (andro- get_length() (andro-
    guard.core.bytecodes.dvm.ClassManager
    method), 64 guard.core.bytecodes.dvm.AnnotationSetItem
method), 59
get_item_type() (andro- get_length() (andro-
    guard.core.bytecodes.dvm.MapList
    method), 102 guard.core.bytecodes.dvm.AnnotationSetRefList
method), 60
get_items() (andro- get_length() (andro-
    guard.core.bytecodes.axml.ARSCPParser
    method), 117 guard.core.bytecodes.dvm.ClassDataItem
method), 61
get_jar() (androguard.decompiler.decompiler.Dex2Jar get_length() (andro-
    method), 158 guard.core.bytecodes.dvm.ClassDefItem
method), 63
get_key_data() (andro- get_length() (andro-
    guard.core.bytecodes.axml.ARSCResTableEntry
    method), 120 guard.core.bytecodes.dvm.ClassHDefItem
method), 64
get_keys() (androguard.core.bytecodes.dvm.PackedSwitch get_length() (andro-
    method), 105 guard.core.bytecodes.dvm.CodeItem
method), 65
get_keys() (androguard.core.bytecodes.dvm.SparseSwitch
    method), 108

```

get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikCode</i> <i>method</i> ), 68	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction10t</i> <i>method</i> ), 86
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DCode</i> 67	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction10x</i> <i>method</i> ), 86
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DebugInfoItemEmpty</i> <i>method</i> ), 74	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction11n</i> <i>method</i> ), 87
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedAnnotation</i> <i>method</i> ), 74	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction11x</i> <i>method</i> ), 87
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedArray</i> <i>method</i> ), 75	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction12x</i> <i>method</i> ), 88
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedArrayItem</i> <i>method</i> ), 75	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction20bc</i> <i>method</i> ), 88
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedCatchHandler</i> <i>method</i> ), 76	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction20t</i> <i>method</i> ), 88
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedCatchHandlerList</i> <i>method</i> ), 76	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction21c</i> <i>method</i> ), 89
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedMethod</i> <i>method</i> ), 79	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction21h</i> <i>method</i> ), 89
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedTypeAddrPair</i> <i>method</i> ), 81	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction21s</i> <i>method</i> ), 90
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedValue</i> <i>method</i> ), 81	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction21t</i> <i>method</i> ), 90
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.FakeNop</i> 82	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction22b</i> <i>method</i> ), 91
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.FieldAnnotation</i> <i>method</i> ), 82	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction22c</i> <i>method</i> ), 91
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.FieldHIdItem</i> <i>method</i> ), 82	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction22cs</i> <i>method</i> ), 92
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.FieldIdItem</i> <i>method</i> ), 83	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction22s</i> <i>method</i> ), 92
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.FillArrayData</i> <i>method</i> ), 84	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction22t</i> <i>method</i> ), 92
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.HeaderItem</i> <i>method</i> ), 85	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction22x</i> <i>method</i> ), 93
get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction</i> <i>method</i> ), 85	get_length() ( <i>andro-</i> <i>guard.core.bytecodes.dvm.Instruction23x</i> <i>method</i> ), 93

get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction30t	method), 94	guard.core.bytecodes.dvm.MapList	method), 102
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction31c	method), 94	guard.core.bytecodes.dvm.MethodAnnotation	method), 102
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction31i	method), 95	guard.core.bytecodes.dvm.MethodHIdItem	method), 103
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction31t	method), 95	guard.core.bytecodes.dvm.MethodIdItem	method), 104
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction32x	method), 95	guard.core.bytecodes.dvm.PackedSwitch	method), 105
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction35c	method), 96	guard.core.bytecodes.dvm.ParameterAnnotation	method), 106
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction35mi	method), 96	guard.core.bytecodes.dvm.ProtoHIdItem	method), 106
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction35ms	method), 97	guard.core.bytecodes.dvm.ProtoIdItem	method), 107
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction3rc	method), 97	guard.core.bytecodes.dvm.SparseSwitch	method), 108
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction3rmi	method), 98	guard.core.bytecodes.dvm.StringDataItem	method), 109
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction3rms	method), 98	guard.core.bytecodes.dvm.StringIdItem	method), 110
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction40sc	method), 98	guard.core.bytecodes.dvm.TryItem	method), 110
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction41c	method), 99	guard.core.bytecodes.dvm.TypeHIdItem	method), 111
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction51l	method), 99	guard.core.bytecodes.dvm.TypeIdItem	method), 111
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction52c	method), 100	guard.core.bytecodes.dvm.TypeItem	method), 111
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Instruction5rc	method), 100	guard.core.bytecodes.dvm.TypeList	method), 112
get_length()	(andro-	get_length()	(andro-
guard.core.bytecodes.dvm.Invalid	method), 101	guard.core.bytecodes.dvm.Unresolved	method), 112
get_length()	(andro-	get_lhs() (androguard.decompiler.dad.instruction.AssignExpression	
guard.core.bytecodes.dvm.MapItem	method), 101	method), 139	
		get_lhs() (androguard.decompiler.dad.instruction.ConditionalExpression	

method), 140  
get\_lhs () (androguard.decompiler.dad.instruction.ConditionalExpression method), 140  
get\_lhs () (androguard.decompiler.dad.instruction.InstanceInstruction method), 142  
get\_lhs () (androguard.decompiler.dad.instruction.IRForm method), 141  
get\_lhs () (androguard.decompiler.dad.instruction.MoveExceptionExpressions method), 143  
get\_lhs () (androguard.decompiler.dad.instruction.MoveExpressions method), 132  
get\_lhs () (androguard.decompiler.dad.instruction.NopExpression method), 144  
get\_lhs () (androguard.decompiler.dad.instruction.ReturnInstructionWithIns method), 144  
get\_lhs () (androguard.decompiler.dad.instruction.StaticInstruction method), 133  
get\_libraries () (androguard.core.bytecodes.apk.APK method), 52  
get\_line\_start () (androguard.core.bytecodes.dvm.DebugInfoItem method), 73  
get\_list () (androguard.core.bytecodes.dvm.AnnotationSetRefList method), 60  
get\_list () (androguard.core.bytecodes.dvm.EncodedCatchHandlerList method), 76  
get\_list () (androguard.core.bytecodes.dvm.FieldIdItem method), 83  
get\_list () (androguard.core.bytecodes.dvm.MethodIdItem method), 104  
get\_list () (androguard.core.bytecodes.dvm.MethodIdItemInvalid method), 104  
get\_list () (androguard.core.bytecodes.dvm.TypeList method), 112  
get\_literals () (androguard.core.bytecodes.dvm.Instruction method), 85  
get\_literals () (androguard.core.bytecodes.dvm.Instruction11n method), 87  
get\_literals () (androguard.core.bytecodes.dvm.Instruction21h method), 89  
get\_literals () (androguard.core.bytecodes.dvm.Instruction21s method), 90  
get\_literals () (androguard.core.bytecodes.dvm.Instruction22b method), 91  
get\_literals () (androguard.core.bytecodes.dvm.Instruction22s method), 92  
get\_literals () (androguard.core.bytecodes.dvm.Instruction31i method), 95  
get\_literals () (androguard.core.bytecodes.dvm.Instruction51l method), 99  
get\_loc\_with\_ins () (androguard.decompiler.dad.basic\_blocks.BasicBlock method), 133  
get\_loc\_with\_ins () (androguard.decompiler.dad.basic\_blocks.Condition method), 133  
get\_loc\_with\_ins () (androguard.decompiler.dad.basic\_blocks.LoopBlock method), 133  
get\_loc\_with\_ins () (androguard.decompiler.dad.dataflow.DummyNode method), 134  
get\_locales () (androguard.core.bytecodes.dvm.DebugInfoItem method), 73  
get\_main\_activities () (androguard.core.bytecodes.apk(APK method), 52  
get\_main\_activity () (androguard.core.bytecodes.apk(APK method), 52  
get\_max\_sdk\_version () (androguard.core.analysis.analysis.Analysis method), 36  
get\_method () (androguard.core.analysis.analysis.DVMBasicBlock method), 39  
get\_method () (androguard.core.analysis.analysis.ExternalClass method), 40  
get\_method () (androguard.core.analysis.analysis.MethodAnalysis method), 41  
get\_method () (androguard.core.analysis.analysis.MethodClassAnalysis method), 41  
get\_method () (androguard.core.bytecodes.dvm.ClassHDefItem method), 41

<code>method), 64</code>		<code>method), 61</code>
<code>get_method()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.ClassManager</i> <code>method), 65</code>		<code>get_methods()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.ClassDefItem</i> <code>method), 63</code>
<code>get_method()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikVMFormat</i> <code>method), 72</code>		<code>get_methods()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikVMFormat</i> <code>method), 72</code>
<code>get_method_analysis()</code> ( <i>andro-</i> <i>guard.core.analysis.analysis.Analysis</i> <code>method), 36</code>		<code>get_methods()</code> ( <i>andro-</i> <i>guard.decompiler.dad.decompile.DvClass</i> <code>method), 135</code>
<code>get_method_analysis()</code> ( <i>andro-</i> <i>guard.core.analysis.analysis.ClassAnalysis</i> <code>method), 38</code>		<code>get_methods_class()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikVMFormat</i> <code>method), 72</code>
<code>get_method_analysis_by_name()</code> ( <i>andro-</i> <i>guard.core.analysis.analysis.Analysis</i> <code>method), 36</code>		<code>get_methods_descriptor()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikVMFormat</i> <code>method), 72</code>
<code>get_method_annotations()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.AnnotationsDirectoryItem</i> <code>method), 60</code>		<code>get_methods_id_item()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikVMFormat</i> <code>method), 72</code>
<code>get_method_by_idx()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikVMFormat</i> <code>method), 72</code>		<code>get_min_sdk_version()</code> ( <i>andro-</i> <i>guard.core.bytecodes.apk.APK</i> <code>method), 52</code>
<code>get_method_by_name()</code> ( <i>andro-</i> <i>guard.core.analysis.analysis.Analysis</i> <code>method), 36</code>		<code>get_mResId()</code> ( <i>andro-</i> <i>guard.core.bytecodes.axml.PackageContext</i> <code>method), 123</code>
<code>get_method_descriptor()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.DalvikVMFormat</i> <code>method), 72</code>		<code>get_name()</code> ( <i>androguard.core.analysis.analysis.DVMBasicBlock</i> <code>method), 39</code>
<code>get_method_idx()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedMethod</i> <code>method), 80</code>		<code>get_name()</code> ( <i>androguard.core.analysis.analysis.ExternalClass</i> <code>method), 40</code>
<code>get_method_idx()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.MethodAnnotation</i> <code>method), 103</code>		<code>get_name()</code> ( <i>androguard.core.analysis.analysis.ExternalMethod</i> <code>method), 40</code>
<code>get_method_idx()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.ParameterAnnotation</i> <code>method), 106</code>		<code>get_name()</code> ( <i>androguard.core bytecode.TmpBlock</i> <code>method), 129</code>
<code>get_method_idx_diff()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.EncodedMethod</i> <code>method), 80</code>		<code>get_name()</code> ( <i>androguard.core.bytecodes.axml.ARSCResTablePackage</i> <code>method), 120</code>
<code>get_method_ref()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.ClassManager</i> <code>method), 65</code>		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.ClassDefItem</i> <code>method), 63</code>
<code>get_methods()</code> ( <i>andro-</i> <i>guard.core.analysis.analysis.Analysis</i> <code>method), 36</code>		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.EncodedField</i> <code>method), 77</code>
<code>get_methods()</code> ( <i>andro-</i> <i>guard.core.analysis.analysis.ClassAnalysis</i> <code>method), 38</code>		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.EncodedMethod</i> <code>method), 80</code>
<code>get_methods()</code> ( <i>andro-</i> <i>guard.core.analysis.analysis.ExternalClass</i> <code>method), 40</code>		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.FieldIdItem</i> <code>method), 83</code>
<code>get_methods()</code> ( <i>andro-</i> <i>guard.core.bytecodes.dvm.ClassDataItem</i>		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.FieldIdItemInvalid</i> <code>method), 84</code>
		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.FillArrayData</i> <code>method), 84</code>
		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.Instruction</i> <code>method), 85</code>
		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.InstructionInvalid</i> <code>method), 101</code>
		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.MethodIdItem</i> <code>method), 104</code>
		<code>get_name()</code> ( <i>androguard.core.bytecodes.dvm.MethodIdItemInvalid</i>

method), 104  
get\_name () (androguard.core.bytecodes.dvm.PackedSwitch) (androguard.core.bytecodes.dvm.AnnotationSetItem method), 59  
get\_name () (androguard.core.bytecodes.dvm.SparseSwitch) (androguard.core.bytecodes.dvm.AnnotationSetRefItem method), 59  
get\_name () (androguard.core.bytecodes.dvm.Unresolved) get\_obj () (androguard.core.bytecodes.dvm.AnnotationSetRefList method), 60  
get\_name\_idx () (androguard.core.bytecodes.dvm.AnnotationElement method), 58  
get\_name\_idx () (androguard.core.bytecodes.dvm.FieldIdItem method), 83  
get\_name\_idx () (androguard.core.bytecodes.dvm.MethodIdItem method), 104  
get\_names () (androguard.core.bytecodes.dvm.ClassHDefItem method), 64  
get\_nb\_instructions () (androguard.core.analysis.analysis.DVMBasicBlock method), 39  
get\_nb\_methods () (androguard.core.analysis.analysis.ClassAnalysis method), 38  
get\_nb\_strings () (androguard.session.Session method), 162  
get\_next () (androguard.core.analysis.analysis.DVMBasicBlock) obj () (androguard.core.bytecodes.dvm.EncodedCatchHandlerList method), 76  
get\_next\_offset\_item () (androguard.core.bytecodes.dvm.ClassManager method), 65  
get\_node\_from\_loc () (androguard.decompiler.dad.graph.Graph method), 137  
get\_notes () (androguard.core.analysis.analysis.DVMBasicBlock method), 39  
get\_notes () (androguard.core.bytecodes.dvm.FillArrayData method), 84  
get\_notes () (androguard.core.bytecodes.dvm.PackedSwitch method), 105  
get\_notes () (androguard.core.bytecodes.dvm.SparseSwitch method), 108  
get\_obj () (androguard.core.bytecodes.dvm.AnnotationElement) obj () (androguard.core.bytecodes.dvm.MethodAnnotation method), 103  
get\_obj () (androguard.core.bytecodes.dvm.AnnotationItem) get\_obj () (androguard.core.bytecodes.dvm.MethodHIdItem method), 103  
get\_obj () (androguard.core.bytecodes.dvm.AnnotationOffItem) obj () (androguard.core.bytecodes.dvm.MethodIdItem method), 104  
get\_obj () (androguard.core.bytecodes.dvm.AnnotationsDirectory) item (androguard.core.bytecodes.dvm.ParameterAnnotation

method), 106  
`get_obj()` (*androguard.core.bytecodes.dvm.ProtoHIdItem*)  
 method), 106  
`get_obj()` (*androguard.core.bytecodes.dvm.ProtoIdItem*)  
`get_off()` (*androguard.core.bytecodes.dvm.FieldHIdItem*)  
 method), 83  
`get_obj()` (*androguard.core.bytecodes.dvm.ProtoIdItem*)  
`get_off()` (*androguard.core.bytecodes.dvm.HeaderItem*)  
 method), 85  
`get_obj()` (*androguard.core.bytecodes.dvm.StringDataItem*)  
`get_off()` (*androguard.core.bytecodes.dvm.MapItem*)  
 method), 102  
`get_obj()` (*androguard.core.bytecodes.dvm.StringIdItem*)  
`get_off()` (*androguard.core.bytecodes.dvm.MapList*)  
 method), 102  
`get_obj()` (*androguard.core.bytecodes.dvm.TypeHIdItem*)  
`get_off()` (*androguard.core.bytecodes.dvm.MethodAnnotation*)  
 method), 103  
`get_obj()` (*androguard.core.bytecodes.dvm.TypeIdItem*)  
`get_off()` (*androguard.core.bytecodes.dvm.MethodHIdItem*)  
 method), 103  
`get_obj()` (*androguard.core.bytecodes.dvm.TypeItem*)  
`get_off()` (*androguard.core.bytecodes.dvm.ParameterAnnotation*)  
 method), 106  
`get_obj()` (*androguard.core.bytecodes.dvm.TypeList*)  
`get_off()` (*androguard.core.bytecodes.dvm.ProtoHIdItem*)  
 method), 106  
`get_obj_by_offset()` (*androguard.core.bytecodes.dvm.ClassManager*)  
 method), 65  
`get_objects_apk()` (*androguard.session.Session*)  
 method), 162  
`get_objects_dex()` (*androguard.session.Session*)  
 method), 162  
`get_odex_format()` (*androguard.core.bytecodes.dvm.ClassManager*)  
 method), 65  
`get_offset()` (*androguard.core.bytecodes.dvm.AnnotationItem*)  
`get_offset()` (*androguard.core.bytecodes.dvm.MapItem*)  
 method), 58  
`get_offset()` (*androguard.core.bytecodes.dvm.AnnotationsDirectoryItem*)  
 method), 61  
`get_offset()` (*androguard.core.bytecodes.dvm.AnnotationSetItem*)  
`get_RefList_value()` (*androguard.core.bytecodes.dvm.DBGBytecode*)  
 method), 66  
`get_offset()` (*androguard.core.bytecodes.dvm.AnnotationSetRefList*)  
 method), 60  
`get_offset()` (*androguard.core.bytecodes.dvm.ClassDataItem*)  
 method), 61  
`get_offset()` (*androguard.core.bytecodes.dvm.ClassHDefItem*)  
 method), 64  
`get_offset()` (*androguard.core.bytecodes.dvm.CodeItem*)  
 method), 65  
`get_offset()` (*androguard.core.bytecodes.dvm.DalvikCode*)  
 method), 68  
`get_offset()` (*androguard.core.bytecodes.dvm.DebugInfoItem*)  
 method), 74  
`get_offset()` (*androguard.core.bytecodes.dvm.DebugInfoItem*)  
`get_Empty_value()` (*androguard.core.bytecodes.dvm.Unresolved*)  
 method), 74  
`get_offset()` (*androguard.core.bytecodes.dvm.EncodedArrayItem*)  
 method), 75  
`get_offset()` (*androguard.core.bytecodes.dvm.EncodedCatchHandler*)  
`get_handler()` (*androguard.core.bytecodes.dvm.DalvikVMFormat*)  
 method), 76  
`get_offset()` (*androguard.core.bytecodes.dvm.EncodedCatchHandler*)  
`get_HandlerList()` (*androguard.core.bytecodes.dvm.ConstString*)  
 method), 76  
`get_offset()` (*androguard.core.bytecodes.dvm.FieldAnnotation*)  
 method), 66

get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.FillArrayData</i>		<i>guard.core.bytecodes.dvm.Instruction22x</i>	
<i>method)</i> , 84		<i>method)</i> , 93	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction</i>		<i>guard.core.bytecodes.dvm.Instruction23x</i>	
<i>method)</i> , 85		<i>method)</i> , 93	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction10t</i>		<i>guard.core.bytecodes.dvm.Instruction30t</i>	
<i>method)</i> , 86		<i>method)</i> , 94	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction10x</i>		<i>guard.core.bytecodes.dvm.Instruction31c</i>	
<i>method)</i> , 87		<i>method)</i> , 94	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction11n</i>		<i>guard.core.bytecodes.dvm.Instruction31i</i>	
<i>method)</i> , 87		<i>method)</i> , 95	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction11x</i>		<i>guard.core.bytecodes.dvm.Instruction31t</i>	
<i>method)</i> , 87		<i>method)</i> , 95	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction12x</i>		<i>guard.core.bytecodes.dvm.Instruction32x</i>	
<i>method)</i> , 88		<i>method)</i> , 95	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction20bc</i>		<i>guard.core.bytecodes.dvm.Instruction35c</i>	
<i>method)</i> , 88		<i>method)</i> , 96	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction20t</i>		<i>guard.core.bytecodes.dvm.Instruction35mi</i>	
<i>method)</i> , 88		<i>method)</i> , 96	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction21c</i>		<i>guard.core.bytecodes.dvm.Instruction35ms</i>	
<i>method)</i> , 89		<i>method)</i> , 97	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction21h</i>		<i>guard.core.bytecodes.dvm.Instruction3rc</i>	
<i>method)</i> , 89		<i>method)</i> , 97	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction21s</i>		<i>guard.core.bytecodes.dvm.Instruction3rmi</i>	
<i>method)</i> , 90		<i>method)</i> , 98	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction21t</i>		<i>guard.core.bytecodes.dvm.Instruction3rms</i>	
<i>method)</i> , 90		<i>method)</i> , 98	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction22b</i>		<i>guard.core.bytecodes.dvm.Instruction40sc</i>	
<i>method)</i> , 91		<i>method)</i> , 99	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction22c</i>		<i>guard.core.bytecodes.dvm.Instruction41c</i>	
<i>method)</i> , 91		<i>method)</i> , 99	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction22cs</i>		<i>guard.core.bytecodes.dvm.Instruction51l</i>	
<i>method)</i> , 92		<i>method)</i> , 100	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction22s</i>		<i>guard.core.bytecodes.dvm.Instruction52c</i>	
<i>method)</i> , 92		<i>method)</i> , 100	
get_operands ()	(andro-	get_operands ()	(andro-
<i>guard.core.bytecodes.dvm.Instruction22t</i>		<i>guard.core.bytecodes.dvm.Instruction5rc</i>	
<i>method)</i> , 92		<i>method)</i> , 100	

get_operands ()	(andro-	guard.core.bytecodes.dvm.Instruction21t method), 90
get_operands ()	(andro-	guard.core.bytecodes.dvm.Instruction22b method), 91
get_operands ()	(andro-	guard.core.bytecodes.dvm.Instruction22c method), 91
get_operands ()	(andro-	guard.core.bytecodes.dvm.Instruction22cs method), 92
get_operands ()	(andro-	guard.core.bytecodes.dvm.Instruction22s method), 92
get_orig_value ()	(andro-	guard.core.bytecodes.dvm.Instruction22t method), 93
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction22x method), 93
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction23x method), 93
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction30t method), 94
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction31c method), 94
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction31i method), 95
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction31t method), 95
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction32x method), 96
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction35c method), 96
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction35mi method), 96
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction35ms method), 97
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction3rc method), 97
get_output ()	(andro-	guard.core.bytecodes.dvm.Instruction3rmi method), 98
get_output ()	(andro-	get_output ()

`guard.core.bytecodes.dvm.Instruction3rms  
        method)`, 98

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.Instruction40sc  
        method)`, 99

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.Instruction41c  
        method)`, 99

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.Instruction51l  
        method)`, 100

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.Instruction52c  
        method)`, 100

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.Instruction5rc  
        method)`, 100

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.InstructionInvalid  
        method)`, 101

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.PackedSwitch  
        method)`, 105

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.SparseSwitch  
        method)`, 108

`get_output()` (andro-  
    `guard.core.bytecodes.dvm.Unresolved  
        method)`, 113

`get_outs_size()` (andro-  
    `guard.core.bytecodes.dvm.DalvikCode  
        method)`, 68

`get_package()` (andro-  
    `guard.core.bytecodes.apk.APK  
        method)`, 53

`get_package_class_name()` (in module andro-  
    `guard.core.bytecode`), 129

`get_package_name()` (andro-  
    `guard.core.bytecodes.axml.ARSCResType  
        method)`, 120

`get_package_name()` (andro-  
    `guard.core.bytecodes.axml.PackageContext  
        method)`, 123

`get_packages_names()` (andro-  
    `guard.core.bytecodes.axml.ARSCPParser  
        method)`, 117

`get_pad()` (andro-  
    `guard.core.bytecodes.dvm.TypeList  
        method)`, 112

`get_parameter_annotations()` (andro-  
    `guard.core.bytecodes.dvm.AnnotationsDirectoryItem  
        method)`, 61

`get_parameter_names()` (andro-  
    `guard.core.bytecodes.dvm.DebugInfoItem  
        method)`, 74

`get_parameters_off()` (andro-  
    `guard.core.bytecodes.dvm.ProtoIdItem  
        method)`, 107

`get_parameters_off_value()` (andro-  
    `guard.core.bytecodes.dvm.ProtoIdItem  
        method)`, 107

`get_parameters_size()` (andro-  
    `guard.core.bytecodes.dvm.DebugInfoItem  
        method)`, 74

`get_params()` (andro-  
    `guard.core.bytecodes.dvm.ProtoIdItemInvalid  
        method)`, 107

`get_params_info()` (in module andro-  
    `guard.core.bytecodes.dvm`), 114

`get_params_type()` (in module andro-  
    `guard.decompiler.dad.util`), 154

`get_permissions()` (andro-  
    `guard.core.bytecodes.apk.APK  
        method)`, 53

`get_prev()` (andro-  
    `guard.core.analysis.analysis.DVMBasicBlock  
        method)`, 39

`get_proto()` (andro-  
    `guard.core.bytecodes.dvm.ClassManager  
        method)`, 65

`get_proto()` (andro-  
    `guard.core.bytecodes.dvm.MethodIdItem  
        method)`, 104

`get_proto()` (andro-  
    `guard.core.bytecodes.dvm.MethodIdItemInvalid  
        method)`, 104

`get_proto_idx()` (andro-  
    `guard.core.bytecodes.dvm.MethodIdItem  
        method)`, 104

`get_providers()` (andro-  
    `guard.core.bytecodes.apk.APK  
        method)`, 53

`get_public_keys_der_v2()` (andro-  
    `guard.core.bytecodes.apk.APK  
        method)`, 53

`get_public_keys_der_v3()` (andro-  
    `guard.core.bytecodes.apk.APK  
        method)`, 53

`get_public_keys_v2()` (andro-  
    `guard.core.bytecodes.apk.APK  
        method)`, 53

`get_public_keys_v3()` (andro-  
    `guard.core.bytecodes.apk.APK  
        method)`, 53

`get_public_resources()` (andro-  
    `guard.core.bytecodes.axml.ARSCParser  
        method)`, 117

`get_qualifier()` (andro-  
    `guard.core.bytecodes.axml.ARSCResTableConfig  
        method)`, 120

get\_raw() (androguard.core.bytecodes.apk.APK get\_raw() (androguard.core.bytecodes.dvm.FieldIdItem method), 53  
get\_raw() (androguard.core.bytecodes.dvm.AnnotationElement get\_raw() (androguard.core.bytecodes.dvm.FieldIdItem method), 58  
get\_raw() (androguard.core.bytecodes.dvm.AnnotationItem get\_raw() (androguard.core.bytecodes.dvm.FillArrayData method), 58  
get\_raw() (androguard.core.bytecodes.dvm.AnnotationOffsetItem get\_raw() (androguard.core.bytecodes.dvm.HeaderItem method), 59  
get\_raw() (androguard.core.bytecodes.dvm.AnnotationsDictionaryItem (androguard.core.bytecodes.dvm.Instruction method), 61  
get\_raw() (androguard.core.bytecodes.dvm.AnnotationSetItem get\_raw() (androguard.core.bytecodes.dvm.Instruction10t method), 59  
get\_raw() (androguard.core.bytecodes.dvm.AnnotationSetRefItem get\_raw() (androguard.core.bytecodes.dvm.Instruction10x method), 59  
get\_raw() (androguard.core.bytecodes.dvm.AnnotationSetRefList get\_raw() (androguard.core.bytecodes.dvm.Instruction11n method), 60  
get\_raw() (androguard.core.bytecodes.dvm.ClassDataItem get\_raw() (androguard.core.bytecodes.dvm.Instruction11x method), 61  
get\_raw() (androguard.core.bytecodes.dvm.ClassDefItem get\_raw() (androguard.core.bytecodes.dvm.Instruction12x method), 63  
get\_raw() (androguard.core.bytecodes.dvm.ClassHDefItem get\_raw() (androguard.core.bytecodes.dvm.Instruction20bc method), 64  
get\_raw() (androguard.core.bytecodes.dvm.CodeItem get\_raw() (androguard.core.bytecodes.dvm.Instruction20t method), 65  
get\_raw() (androguard.core.bytecodes.dvm.DalvikCode get\_raw() (androguard.core.bytecodes.dvm.Instruction21c method), 68  
get\_raw() (androguard.core.bytecodes.dvm.DBGBytecode get\_raw() (androguard.core.bytecodes.dvm.Instruction21h method), 66  
get\_raw() (androguard.core.bytecodes.dvm.DCode get\_raw() (androguard.core.bytecodes.dvm.Instruction21s method), 67  
get\_raw() (androguard.core.bytecodes.dvm.DebugInfoItem get\_raw() (androguard.core.bytecodes.dvm.Instruction21t method), 74  
get\_raw() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty get\_raw() (androguard.core.bytecodes.dvm.Instruction22b method), 74  
get\_raw() (androguard.core.bytecodes.dvm.EncodedAnnotation get\_raw() (androguard.core.bytecodes.dvm.Instruction22c method), 74  
get\_raw() (androguard.core.bytecodes.dvm.EncodedArray get\_raw() (androguard.core.bytecodes.dvm.Instruction22cs method), 75  
get\_raw() (androguard.core.bytecodes.dvm.EncodedArrayItem get\_raw() (androguard.core.bytecodes.dvm.Instruction22s method), 75  
get\_raw() (androguard.core.bytecodes.dvm.EncodedCatchHandler get\_raw() (androguard.core.bytecodes.dvm.Instruction22t method), 76  
get\_raw() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList (androguard.core.bytecodes.dvm.Instruction22x method), 76  
get\_raw() (androguard.core.bytecodes.dvm.EncodedField get\_raw() (androguard.core.bytecodes.dvm.Instruction23x method), 77  
get\_raw() (androguard.core.bytecodes.dvm.EncodedMethod get\_raw() (androguard.core.bytecodes.dvm.Instruction30t method), 80  
get\_raw() (androguard.core.bytecodes.dvm.EncodedTypeAddrPair get\_raw() (androguard.core.bytecodes.dvm.Instruction31c method), 81  
get\_raw() (androguard.core.bytecodes.dvm.EncodedValue get\_raw() (androguard.core.bytecodes.dvm.Instruction31i method), 81  
get\_raw() (androguard.core.bytecodes.dvm.FieldAnnotation get\_raw() (androguard.core.bytecodes.dvm.Instruction31t method), 82  
get\_raw() (androguard.core.bytecodes.dvm.FieldIdItem get\_raw() (androguard.core.bytecodes.dvm.Instruction31t method), 95

get\_raw() (*androguard.core.bytecodes.dvm.Instruction32*)  
    method), 96  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction35*)  
    method), 96  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction35*)  
    method), 96  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction35*)  
    method), 97  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction35*)  
    method), 97  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction35*)  
    method), 97  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction35*)  
    method), 98  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction35*)  
    method), 98  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction40sc*)  
    method), 99  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction41c*)  
    method), 99  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction5H*)  
    method), 100  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction52c*)  
    method), 100  
get\_raw() (*androguard.core.bytecodes.dvm.Instruction5rc*)  
    method), 100  
get\_raw() (*androguard.core.bytecodes.dvm.InstructionInvalid*)  
    method), 101  
get\_raw() (*androguard.core.bytecodes.dvm.MapItem*)  
    method), 102  
get\_raw() (*androguard.core.bytecodes.dvm.MapList*)  
    method), 102  
get\_raw() (*androguard.core.bytecodes.dvm.MethodAnnotation*)  
    method), 103  
get\_raw() (*androguard.core.bytecodes.dvm.MethodHIdItem*)  
    method), 103  
get\_raw() (*androguard.core.bytecodes.dvm.MethodIdItem*)  
    method), 104  
get\_raw() (*androguard.core.bytecodes.dvm.OdexDependency*)  
    method), 104  
get\_raw() (*androguard.core.bytecodes.dvm.OdexHeaderItem*)  
    method), 105  
get\_raw() (*androguard.core.bytecodes.dvm.PackedSwitch*)  
    method), 105  
get\_raw() (*androguard.core.bytecodes.dvm.ParameterAnnotation*)  
    method), 106  
get\_raw() (*androguard.core.bytecodes.dvm.ProtoHIdItem*)  
    method), 106  
get\_raw() (*androguard.core.bytecodes.dvm.ProtoIdItem*)  
    method), 107  
get\_raw() (*androguard.core.bytecodes.dvm.SparseSwitch*)  
    method), 108  
get\_raw() (*androguard.core.bytecodes.dvm.StringDataItem*)  
    method), 109  
get\_raw() (*androguard.core.bytecodes.dvm.StringIdItem*)  
    method), 110  
get\_raw() (*androguard.core.bytecodes.dvm.TryItem*)  
    method), 110  
get\_raw() (*androguard.core.bytecodes.dvm.TypeHIdItem*)  
    method), 111  
get\_raw() (*androguard.core.bytecodes.dvm.TypeIdItem*)  
    method), 111  
get\_raw() (*androguard.core.bytecodes.dvm.TypeList*)  
    method), 112  
get\_raw() (*androguard.core.bytecodes.dvm.UnresolvedMethod*)  
    method), 113  
get\_raw\_string() (*androguard.core.bytecodes.dvm.ClassManager*)  
    method), 65  
get\_raw\_string() (*androguard.core.bytecodes.dvm.ConstString*)  
    method), 66  
get\_raw\_string() (*androguard.core.bytecodes.dvm.Instruction21c*)  
    method), 89  
get\_raw\_string() (*androguard.core.bytecodes.dvm.MethodIdItem*)  
    method), 104  
get\_receivers() (*androguard.core.bytecodes.apk.APK*)  
    method), 53  
get\_ref\_kind() (*androguard.core.bytecodes.dvm.Instruction method*)  
    method), 89  
get\_ref\_kind() (*androguard.core.bytecodes.dvm.Instruction21c*)  
    method), 86  
get\_ref\_kind() (*androguard.core.bytecodes.dvm.Instruction22c*)  
    method), 91  
get\_ref\_kind() (*androguard.core.bytecodes.dvm.Instruction31c*)  
    method), 94  
get\_ref\_kind() (*androguard.core.bytecodes.dvm.Instruction35c*)  
    method), 96  
get\_ref\_kind() (*androguard.core.bytecodes.dvm.Instruction35mi*)  
    method), 97  
get\_ref\_kind() (*androguard.core.bytecodes.dvm.Instruction35ms*)  
    method), 97

get\_ref\_kind() (andro-  
guard.core.bytecodes.dvm.Instruction3rc  
method), 97

get\_ref\_kind() (andro-  
guard.core.bytecodes.dvm.Instruction3rmi  
method), 98

get\_ref\_kind() (andro-  
guard.core.bytecodes.dvm.Instruction3rms  
method), 98

get\_ref\_kind() (andro-  
guard.core.bytecodes.dvm.Instruction40sc  
method), 99

get\_ref\_kind() (andro-  
guard.core.bytecodes.dvm.Instruction41c  
method), 99

get\_ref\_kind() (andro-  
guard.core.bytecodes.dvm.Instruction52c  
method), 100

get\_ref\_kind() (andro-  
guard.core.bytecodes.dvm.Instruction5rc  
method), 101

get\_ref\_off() (andro-  
guard.core.bytecodes.dvm.Instruction10t  
method), 86

get\_ref\_off() (andro-  
guard.core.bytecodes.dvm.Instruction20t  
method), 89

get\_ref\_off() (andro-  
guard.core.bytecodes.dvm.Instruction21t  
method), 91

get\_ref\_off() (andro-  
guard.core.bytecodes.dvm.Instruction22t  
method), 93

get\_ref\_off() (andro-  
guard.core.bytecodes.dvm.Instruction30t  
method), 94

get\_ref\_off() (andro-  
guard.core.bytecodes.dvm.Instruction31t  
method), 95

get\_regex\_strings() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 72

get\_registers\_size() (andro-  
guard.core.bytecodes.dvm.DalvikCode  
method), 68

get\_requested\_aosp\_permissions() (andro-  
guard.core.bytecodes.apk(APK method), 53

get\_requested\_aosp\_permissions\_details() (andro-  
guard.core.bytecodes.apk(APK method),  
53

get\_requested\_permissions() (andro-  
guard.core.bytecodes.apk(APK  
method), 53

get\_requested\_third\_party\_permissions() (andro-  
guard.core.bytecodes.apk(APK  
method), 54

get\_res\_configs() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 117

get\_res\_id\_by\_key() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resolved\_res\_configs() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resolved\_strings() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_bool() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_color() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_dimen() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_id() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_integer() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_string() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_style() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_resource\_xml\_name() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 118

get\_return\_type() (andro-  
guard.core.bytecodes.dvm.ProtoIdItemInvalid  
method), 107

get\_return\_type\_idx() (andro-  
guard.core.bytecodes.dvm.ProtoIdItem  
method), 107

get\_return\_type\_idx\_value() (andro-  
guard.core.bytecodes.dvm.ProtoIdItem  
method), 107

get\_rhs() (androguard.decompiler.dad.instruction.AssignExpression  
method), 139

get\_rhs() (androguard.decompiler.dad.instruction.FillArrayExpression  
method), 141

get\_rhs() (androguard.decompiler.dad.instruction.IRForm  
method), 141

get\_rhs() (androguard.decompiler.dad.instruction.MoveExpression  
method), 141

method), 143  
get\_sbyte() (in module  
guard.core.bytecodes.dvm), 114  
get\_services()  
guard.core.bytecodes.apk.APK  
54  
get\_short\_string()  
guard.core.bytecodes.dvm.EncodedMethod  
method), 80  
get\_shorty()  
guard.core.bytecodes.dvm.ProtoidItemInvalid  
method), 107  
get\_shorty\_idx()  
guard.core.bytecodes.dvm.ProtoidItem  
method), 107  
get\_shorty\_idx\_value()  
guard.core.bytecodes.dvm.ProtoidItem  
method), 107  
get\_signature()  
guard.core.bytecodes.apk.APK  
54  
get\_signature\_name()  
guard.core.bytecodes.apk.APK  
54  
get\_signature\_names()  
guard.core.bytecodes.apk.APK  
54  
get\_signatures()  
guard.core.bytecodes.apk.APK  
54  
get\_size() (androguard.core.bytecodes.dvm.DalvikCode  
method), 68  
get\_size() (androguard.core.bytecodes.dvm.EncodedAnnotation  
method), 135  
get\_size() (androguard.core.bytecodes.dvm.EncodedArray  
method), 75  
get\_size() (androguard.core.bytecodes.dvm.EncodedCatchHandler  
method), 76  
get\_size() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList  
method), 63  
get\_size() (androguard.core.bytecodes.dvm.EncodedField  
method), 77  
get\_size() (androguard.core.bytecodes.dvm.EncodedMethod  
method), 80  
get\_size() (androguard.core.bytecodes.dvm.MapItem  
method), 102  
get\_size() (androguard.core.bytecodes.dvm.TypeList  
method), 112  
get\_source()  
guard.core.bytecodes.dvm.ClassDefItem  
method), 63  
get\_source()  
guard.core.bytecodes.dvm.EncodedMethod  
method), 80  
get\_source()  
andro-  
guard.decompiler.dad.decompile.DvClass  
method), 135  
get\_source()  
andro-  
guard.decompiler.dad.decompile.DvMethod  
method), 136  
get\_source\_class()  
andro-  
guard.decompiler.decompiler.DecompilerDAD  
method), 156  
get\_source\_class()  
andro-  
guard.decompiler.decompiler.DecompilerDed  
method), 157  
get\_source\_class()  
andro-  
guard.decompiler.decompiler.DecompilerDex2Fernflower  
method), 157  
get\_source\_class()  
andro-  
guard.decompiler.decompiler.DecompilerDex2Jad  
method), 157  
get\_source\_class()  
andro-  
guard.decompiler.decompiler.DecompilerDex2WineJad  
method), 157  
get\_source\_class()  
andro-  
guard.decompiler.decompiler.DecompilerJADX  
method), 158  
get\_source\_class\_ext()  
andro-  
guard.decompiler.decompiler.DecompilerDAD  
method), 156  
get\_source\_ext()  
andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 63  
get\_source\_ext()  
andro-  
guard.decompiler.dad.decompile.DvMethod  
method), 136  
get\_source\_ext()  
andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 136  
get\_source\_file\_idx()  
andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 63  
get\_source\_method()  
andro-  
guard.decompiler.decompiler.DecompilerDAD  
method), 156  
get\_source\_method()  
andro-  
guard.decompiler.decompiler.DecompilerDed  
method), 157  
get\_source\_method()  
andro-  
guard.decompiler.decompiler.DecompilerDex2Fernflower  
method), 157  
get\_source\_method()  
andro-  
guard.decompiler.decompiler.DecompilerDex2Jad  
method), 157  
get\_source\_method()  
andro-  
guard.decompiler.decompiler.DecompilerDex2WineJad  
method), 157

get_source_method()	(andro-	get_strings()	(andro-
<i>guard.decompiler.decompiler.DecompilerJADX</i>	<i>method)</i> , 158	<i>guard.core.bytecodes.dvm.DalvikVMFormat</i>	<i>method)</i> , 73
get_special_ins()	(andro-	get_strings()	(andro-
<i>guard.core.analysis.analysis.DVMBasicBlock</i>	<i>method)</i> , 39	<i>guard.session.Session</i>	<i>method)</i> , 162
get_start()	(andro-	get_strings_analysis()	(andro-
<i>guard.core.analysis.analysis.DVMBasicBlock</i>	<i>method)</i> , 39	<i>guard.core.analysis.Analysis</i> <i>method)</i> ,	36
get_start_addr()	(andro-	get_strings_resources()	(andro-
<i>guard.core.bytecodes.dvm.TryItem</i>	<i>method)</i> , 110	<i>guard.core.bytecodes.axml.ARSCParser</i>	<i>method)</i> , 118
get_static_fields()	(andro-	get_strings_unicode()	(andro-
<i>guard.core.bytecodes.dvm.ClassDataItem</i>	<i>method)</i> , 61	<i>guard.core.bytecodes.dvm.DalvikVMFormat</i>	<i>method)</i> , 73
get_static_fields_size()	(andro-	get_superclass_idx()	(andro-
<i>guard.core.bytecodes.dvm.ClassDataItem</i>	<i>method)</i> , 62	<i>guard.core.bytecodes.dvm.ClassDefItem</i>	<i>method)</i> , 63
get_static_values_off()	(andro-	get_superclassname()	(andro-
<i>guard.core.bytecodes.dvm.ClassDefItem</i>	<i>method)</i> , 63	<i>guard.core.bytecodes.dvm.ClassDefItem</i>	<i>method)</i> , 63
get_string()	(andro-	get_target_sdk_version()	(andro-
<i>guard.core.bytecodes.axml.ARSCParser</i>	<i>method)</i> , 118	<i>guard.core.bytecodes.apk.APK</i>	<i>method)</i> , 54
get_string()	(andro-	get_targets()	(andro-
<i>guard.core.bytecodes.dvm.ClassManager</i>	<i>method)</i> , 65	<i>guard.core.bytecodes.dvm.PackedSwitch</i>	<i>method)</i> , 105
get_string()	(andro-	get_targets()	(andro-
<i>guard.core.bytecodes.dvm.Instruction21c</i>	<i>method)</i> , 89	<i>guard.core.bytecodes.dvm.SparseSwitch</i>	<i>method)</i> , 108
get_string()	(andro-	get_translated_kind()	(andro-
<i>guard.core.bytecodes.dvm.Instruction31c</i>	<i>method)</i> , 94	<i>guard.core.bytecodes.dvm.Instruction</i> <i>method)</i> , 86	
get_string()	(andro-	get_translated_parameter_names()	(andro-
<i>guard.core.bytecodes.dvm.TypeItem</i>	<i>method)</i> , 111	<i>guard.core.bytecodes.dvm.DebugInfoItem</i>	<i>method)</i> , 74
get_string()	(andro-	get_tries()	(andro-
<i>guard.core.bytecodes.dvm.TypeList</i>	<i>method)</i> , 112	<i>guard.core.bytecodes.dvm.DalvikCode</i>	<i>method)</i> , 68
get_string_by_offset()	(andro-	get_tries_size()	(andro-
<i>guard.core.bytecodes.dvm.ClassManager</i>	<i>method)</i> , 65	<i>guard.core.bytecodes.dvm.DalvikCode</i>	<i>method)</i> , 68
get_string_data_item()	(andro-	get_triple()	(andro-
<i>guard.core.bytecodes.dvm.DalvikVMFormat</i>	<i>method)</i> , 73	<i>guard.core.bytecodes.dvm.EncodedMethod</i>	<i>method)</i> , 80
get_string_data_off()	(andro-	get_triple()	(andro-
<i>guard.core.bytecodes.dvm.StringIdItem</i>	<i>method)</i> , 110	<i>guard.core.bytecodes.dvm.MethodIdItem</i>	<i>method)</i> , 104
get_string_resources()	(andro-	get_type()	(andro-
<i>guard.core.bytecodes.axml.ARSCParser</i>	<i>method)</i> , 118	<i>guard.core.bytecodes.axml.ARSCResType</i>	<i>method)</i> , 120
get_strings()	(andro-	get_type()	(andro-
<i>guard.core.analysis.Analysis</i> <i>method)</i> ,	36	<i>guard.core.bytecodes.dvm.ClassManager</i>	<i>method)</i> , 65
		get_type()	(andro-
		<i>guard.core.bytecodes.dvm.FieldIdItem</i>	<i>method)</i> , 83
		get_type()	(andro-
		<i>guard.core.bytecodes.dvm.FieldIdItemInvalid</i>	

method), 84  
get\_type () (androguard.core.bytecodes.dvm.MapItem (andro-  
method), 102 guard.core.bytecodes.axml.ARSCParser  
get\_type () (androguard.core.bytecodes.dvm.TypeHIdItem method), 119  
method), 111 get\_unicode () (andro-  
get\_type () (androguard.decompiler.dad.instruction.ArrayLengthExpansion (andro-  
method), 138 bytecodes.dvm.StringDataItem  
method), 109  
get\_type () (androguard.decompiler.dad.instruction.ArrayLoadExpressions (andro-  
method), 138 guard.decompiler.dad.instruction.ArrayLengthExpression  
get\_type () (androguard.decompiler.dad.instruction.CastExpressionmethod), 138  
method), 140 get\_used\_vars () (andro-  
get\_type () (androguard.decompiler.dad.instruction.Constant guard.decompiler.dad.instruction.ArrayLoadExpression  
method), 141 method), 138  
get\_type () (androguard.decompiler.dad.instruction.InstanceExpressions () (andro-  
method), 142 guard.decompiler.dad.instruction.ArrayStoreInstruction  
get\_type () (androguard.decompiler.dad.instruction.InvokeInstructionmethod), 139  
method), 142 get\_used\_vars () (andro-  
get\_type () (androguard.decompiler.dad.instruction.IRForm guard.decompiler.dad.instruction.AssignExpression  
method), 141 method), 139  
get\_type () (androguard.decompiler.dad.instruction.NewInstanceVars () (andro-  
method), 144 guard.decompiler.dad.instruction.BinaryExpression  
get\_type () (androguard.decompiler.dad.instruction.StaticExpressionmethod), 139  
method), 145 get\_used\_vars () (andro-  
get\_type () (androguard.decompiler.dad.instruction.UnaryExpressionCastExpression  
method), 145 method), 140  
get\_type () (in module andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm), 114 guard.decompiler.dad.instruction.CheckCastExpression  
get\_type () (in module andro- method), 140  
guard.decompiler.dad.util), 154  
get\_type\_configs () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.axml.ARSCParser guard.decompiler.dad.instruction.ConditionalExpression  
method), 119 method), 140  
get\_type\_idx () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm.EncodedAnnotation guard.decompiler.dad.instruction.ConditionalZExpression  
method), 74 method), 140  
get\_type\_idx () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm.EncodedTypeAddrPair guard.decompiler.dad.instruction.Constant  
method), 81 method), 141  
get\_type\_idx () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm.FieldIdItem guard.decompiler.dad.instruction.FillArrayExpression  
method), 83 method), 141  
get\_type\_idx () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm.TypeItem method), 112 guard.decompiler.dad.instruction.FilledArrayExpression  
method), 141  
get\_type\_list () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm.ClassManager guard.decompiler.dad.instruction.InstanceExpression  
method), 65 method), 142  
get\_type\_list\_off () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm.TypeList method), 112 guard.decompiler.dad.instruction.InstanceInstruction  
method), 142  
get\_type\_ref () (andro- get\_used\_vars () (andro-  
guard.core.bytecodes.dvm.ClassManager guard.decompiler.dad.instruction.InvokeInstruction  
method), 65 method), 142  
get\_type\_size () (in module andro- get\_used\_vars () (andro-  
guard.decompiler.dad.instruction.InvokeStaticInstruction

*method), 143*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.IRForm*  
*method), 141*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.MoveExceptionExpression*  
*method), 143*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.MoveExpression*  
*method), 143*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.NewArrayExpression*  
*method), 144*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.NewInstance*  
*method), 144*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.NopExpression*  
*method), 144*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.RefExpression*  
*method), 144*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.ReturnInstruction*  
*method), 144*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.StaticInstruction*  
*method), 145*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.SwitchExpression*  
*method), 145*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.UnaryExpression*  
*method), 145*  
`get_used_vars()` (*andro-*  
*guard.decompiler.dad.instruction.Variable*  
*method), 145*  
`get_uses_implied_permission_list()` (*an-*  
*droguard.core.bytecodes.apk(APK*  
*method), 54*  
`get_utf16_size()` (*andro-*  
*guard.core.bytecodes.dvm.StringDataItem*  
*method), 109*  
`get_value()` (*andro-*  
*guard.core.analysis.analysis.StringAnalysis*  
*method), 42*  
`get_value()` (*androguard.core.bytecode.SV*  
*method), 128*  
`get_value()` (*androguard.core.bytecode.SVs*  
*method), 129*  
`get_value()` (*andro-*  
*guard.core.bytecodes.axml.ARSCResTableEntry*  
*method), 120*  
`get_value()` (*andro-*

*guard.core.bytecodes.dvm.AnnotationElement*  
*method), 58*  
`get_value()` (*andro-*  
*guard.core.bytecodes.dvm.DBGBytecode*  
*method), 66*  
`get_value()` (*andro-*  
*guard.core.bytecodes.dvm.EncodedArrayItem*  
*method), 75*  
`get_value()` (*andro-*  
*guard.core.bytecodes.dvm.EncodedValue*  
*method), 81*  
`get_value()` (*andro-*  
*guard.core.bytecodes.dvm.EncodedValue*  
*method), 81*  
`get_value_buff()` (*androguard.core.bytecode.SV*  
*method), 129*  
`get_value_buff()` (*androguard.core.bytecode.SVs*  
*method), 129*  
`get_value_from_tag()` (*andro-*  
*guard.core.bytecodes.apk(APK*  
*method), 54*  
`get_value_type()` (*andro-*  
*guard.core.bytecodes.dvm.EncodedValue*  
*method), 81*  
`get_values()` (*andro-*  
*guard.core.bytecodes.dvm.EncodedArray*  
*method), 75*  
`get_values()` (*andro-*  
*guard.core.bytecodes.dvm.PackedSwitch*  
*method), 106*  
`get_values()` (*andro-*  
*guard.core.bytecodes.dvm.SparseSwitch*  
*method), 108*  
`get_variables()` (*in* *module* *andro-*  
*guard.decompiler.dad.opcode\_ins), 149*  
`get_virtual_methods()` (*andro-*  
*guard.core.bytecodes.dvm.ClassDataItem*  
*method), 62*  
`get_virtual_methods_size()` (*andro-*  
*guard.core.bytecodes.dvm.ClassDataItem*  
*method), 62*  
`get_visibility()` (*andro-*  
*guard.core.bytecodes.dvm.AnnotationItem*  
*method), 58*  
`get_vm()` (*androguard.core.analysis.analysis.MethodAnalysis*  
*method), 41*  
`get_vm_class()` (*andro-*  
*guard.core.analysis.analysis.ClassAnalysis*  
*method), 38*  
`get_vmanalysis()` (*andro-*  
*guard.core.bytecodes.dvm.DalvikVMFormat*  
*method), 73*  
`get_xml()` (*androguard.core.bytecodes.axml.AXMLPrinter*  
*method), 122*

get\_xml\_obj() (andro-  
guard.core.bytecodes.axml.AXMLPrinter  
method), 122

get\_xref\_from() (andro-  
guard.core.analysis.analysis.ClassAnalysis  
method), 38

get\_xref\_from() (andro-  
guard.core.analysis.analysis.MethodClassAnalysis  
method), 41

get\_xref\_from() (andro-  
guard.core.analysis.analysis.StringAnalysis  
method), 42

get\_xref\_read() (andro-  
guard.core.analysis.analysis.FieldClassAnalysis  
method), 41

get\_xref\_to() (andro-  
guard.core.analysis.analysis.ClassAnalysis  
method), 38

get\_xref\_to() (andro-  
guard.core.analysis.analysis.MethodClassAnalysis  
method), 41

get\_xref\_write() (andro-  
guard.core.analysis.analysis.FieldClassAnalysis  
method), 41

getAttributeCount() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

getAttributeName() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

getAttributeNamespace() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

getAttributeUri() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

getAttributeValue() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

getAttributeValueData() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

getAttributeValueType() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

GetMethod() (andro-  
guard.core.analysis.analysis.ExternalClass  
method), 40

getName() (androguard.core.bytecodes.axml.AXMLParser  
method), 121

getPrefix() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 121

gets() (androguard.core.analysis.analysis.BasicBlocks  
method), 37

gets() (androguard.core.analysis.analysis.Exceptions  
method), 40

gets() (androguard.core.bytecodes.dvm.FieldHdItem  
method), 83

getString() (andro-  
guard.core.bytecodes.axml.StringBlock  
method), 123

getStyle() (androguard.core.bytecodes.axml.StringBlock  
method), 123

getText() (androguard.core.bytecodes.axml.AXMLParser  
method), 121

go() (androguard.core.analysis.auto.AndroAuto  
method), 43

goto() (in module andro-  
guard.decompiler.dad.opcode\_ins), 149

goto16() (in module andro-  
guard.decompiler.dad.opcode\_ins), 149

goto32() (in module andro-  
guard.decompiler.dad.opcode\_ins), 149

Graph (class in androguard.decompiler.dad.graph), 137

GREATER (androguard.decompiler.dad.opcode\_ins.Op  
attribute), 147

Green (androguard.core.androconf.Color attribute), 125

Grey (androguard.core.androconf.Color attribute), 125

group\_variables() (in module andro-  
guard.decompiler.dad.dataflow), 135

## H

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.ArrayStoreInstruction  
method), 139

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.AssignExpression  
method), 139

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.BinaryExpression  
method), 139

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.InstanceInstruction  
method), 142

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.InvokeInstruction  
method), 142

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.IRForm  
method), 141

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.MoveExceptionExpression  
method), 143

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.MoveExpression  
method), 143

has_side_effect ()	(andro-	igetobject ()	(in module andro-
method), 143	guard.decompiler.dad.instruction.MoveResultExpression	guard.decompiler.dad.opcode_ins), 150	
has_side_effect ()	(andro-	igetshort ()	(in module andro-
method), 145	guard.decompiler.dad.instruction.StaticInstruction	guard.decompiler.dad.opcode_ins), 150	
header_size	(andro-	igetwide ()	(in module andro-
attribute), 115	guard.core.bytecodes.axml.ARSCHeader	guard.decompiler.dad.opcode_ins), 150	
HeaderItem (class in	andro-	immediate_dominators ()	(andro-
guard.core.bytecodes.dvm), 85	guard.decompiler.dad.writer.Writer	method), 137	
		implements (androguard.core.analysis.analysis.ClassAnalysis	
identify_structures () (in module andro-	attribute), 38		
guard.decompiler.dad.control_flow), 134	inc_ind () (androguard.decompiler.dad.writer.Writer	method), 154	
idx (androguard.core.bytecodes.mutf8.PeekIterator at-	init_print_colors () (in module andro-		
tribute), 124	guard.misc), 159		
if_stmt () (in module andro-	instance (androguard.core.androconf.Configuration	attribute), 125	
guard.decompiler.dad.dast), 131	InstanceExpression (class in andro-		
if_struct () (in module andro-	guard.decompiler.dad.instruction), 142		
guard.decompiler.dad.control_flow), 134	InstanceInstruction (class in andro-		
ifeq () (in module andro-	guard.decompiler.dad.opcode_ins), 150		
guard.decompiler.dad.opcode_ins), 149	instanceof () (in module andro-		
ifeqz () (in module andro-	guard.decompiler.dad.opcode_ins), 85		
guard.decompiler.dad.opcode_ins), 149	Instruction (class in andro-		
ifge () (in module andro-	guard.core.bytecodes.dvm), 85		
guard.decompiler.dad.opcode_ins), 149	Instruction10t (class in andro-		
ifgez () (in module andro-	guard.core.bytecodes.dvm), 86		
guard.decompiler.dad.opcode_ins), 149	Instruction10x (class in andro-		
ifgt () (in module andro-	guard.core.bytecodes.dvm), 86		
guard.decompiler.dad.opcode_ins), 149	Instruction11n (class in andro-		
ifgtz () (in module andro-	guard.core.bytecodes.dvm), 87		
guard.decompiler.dad.opcode_ins), 149	Instruction11x (class in andro-		
ifle () (in module andro-	guard.core.bytecodes.dvm), 87		
guard.decompiler.dad.opcode_ins), 149	Instruction12x (class in andro-		
iflez () (in module andro-	guard.core.bytecodes.dvm), 88		
guard.decompiler.dad.opcode_ins), 149	Instruction20bc (class in andro-		
iflt () (in module andro-	guard.core.bytecodes.dvm), 88		
guard.decompiler.dad.opcode_ins), 149	Instruction20t (class in andro-		
ifltz () (in module andro-	guard.core.bytecodes.dvm), 88		
guard.decompiler.dad.opcode_ins), 150	Instruction21c (class in andro-		
ifne () (in module andro-	guard.core.bytecodes.dvm), 89		
guard.decompiler.dad.opcode_ins), 150	Instruction21h (class in andro-		
ifnez () (in module andro-	guard.core.bytecodes.dvm), 89		
guard.decompiler.dad.opcode_ins), 150	Instruction21s (class in andro-		
iget () (in module andro-	guard.core.bytecodes.dvm), 90		
guard.decompiler.dad.opcode_ins), 150	Instruction21t (class in andro-		
igetboolean () (in module andro-	guard.core.bytecodes.dvm), 90		
guard.decompiler.dad.opcode_ins), 150	Instruction22b (class in andro-		
igetbyte () (in module andro-	guard.core.bytecodes.dvm), 91		
guard.decompiler.dad.opcode_ins), 150	Instruction22c (class in andro-		
igetchar () (in module andro-	guard.core.bytecodes.dvm), 91		
guard.decompiler.dad.opcode_ins), 150	Instruction22cs (class in andro-		
	Instruction22s (class in andro-		

*guard.core.bytecodes.dvm*), 92  
Instruction22t (class in  
    *guard.core.bytecodes.dvm*), 92  
Instruction22x (class in  
    *guard.core.bytecodes.dvm*), 93  
Instruction23x (class in  
    *guard.core.bytecodes.dvm*), 93  
Instruction30t (class in  
    *guard.core.bytecodes.dvm*), 93  
Instruction31c (class in  
    *guard.core.bytecodes.dvm*), 94  
Instruction31i (class in  
    *guard.core.bytecodes.dvm*), 94  
Instruction31t (class in  
    *guard.core.bytecodes.dvm*), 95  
Instruction32x (class in  
    *guard.core.bytecodes.dvm*), 95  
Instruction35c (class in  
    *guard.core.bytecodes.dvm*), 96  
Instruction35mi (class in  
    *guard.core.bytecodes.dvm*), 96  
Instruction35ms (class in  
    *guard.core.bytecodes.dvm*), 97  
Instruction3rc (class in  
    *guard.core.bytecodes.dvm*), 97  
Instruction3rmi (class in  
    *guard.core.bytecodes.dvm*), 97  
Instruction3rms (class in  
    *guard.core.bytecodes.dvm*), 98  
Instruction40sc (class in  
    *guard.core.bytecodes.dvm*), 98  
Instruction41c (class in  
    *guard.core.bytecodes.dvm*), 99  
Instruction511 (class in  
    *guard.core.bytecodes.dvm*), 99  
Instruction52c (class in  
    *guard.core.bytecodes.dvm*), 100  
Instruction5rc (class in  
    *guard.core.bytecodes.dvm*), 100  
InstructionInvalid (class in  
    *guard.core.bytecodes.dvm*), 101  
interpolate\_tuple() (in module  
    *guard.core.androconf*), 125  
Interval (class in *androguard.decompiler.dad.node*),  
    146  
intervals() (in module  
    *androguard.decompiler.dad.control\_flow*), 134  
INTSHL (*androguard.decompiler.dad.opcode\_ins.Op* at-  
    tribute), 147  
INTSHR (*androguard.decompiler.dad.opcode\_ins.Op* at-  
    tribute), 147  
inttobyte() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
inttochar() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- inttodouble() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- inttofloat() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- inttolong() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- inttoshort() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- InvalidInstruction, 101  
andro- InvalidResourceError, 125  
andro- invokedirect() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- InvokeDirectInstruction (class in *andro-*  
    *guard.decompiler.dad.instruction*), 142  
andro- invokedirectrange() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- InvokeInstruction (class in *andro-*  
    *guard.decompiler.dad.instruction*), 142  
andro- invokeinterface() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- invokeinterfacerange() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- InvokeRangeInstruction (class in *andro-*  
    *guard.decompiler.dad.instruction*), 142  
andro- invokestatic() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- InvokeStaticInstruction (class in *andro-*  
    *guard.decompiler.dad.instruction*), 143  
andro- invokestaticrange() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- invokesuper() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- invokesuperrange() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- invokevirtual() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- invokevirtualrange() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- iput() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- iputboolean() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- iputbyte() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- iputchar() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- iputobject() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- iputshort() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- iputwide() (in module  
    *androguard.decompiler.dad.opcode\_ins*), 150  
andro- IRForm (class in *andro-*

```

        guard.decompiler.dad.instruction), 141
is_android() (in module andro-
    guard.core.androconf), 125
is_android_api() (andro-
    guard.core.analysis.analysis.ClassAnalysis
method), 38
is_android_api() (andro-
    guard.core.analysis.analysis.MethodClassAnalysis
method), 42
is_android_raw() (in module andro-
    guard.core.androconf), 125
is_androidtv() (andro-
    guard.core.bytecodes.apk.APK
55
is_ascii_obfuscation() (in module andro-
    guard.core.analysis.analysis), 42
is_ascii_problem() (in module andro-
    guard.core.androconf), 125
is_cached_instructions() (andro-
    guard.core.bytecodes.dvm.DCode
67
is_cached_instructions() (andro-
    guard.core.bytecodes.dvm.EncodedMethod
method), 80
is_call() (androguard.decompiler.dad.instruction.AssignExpression
method), 139
is_call() (androguard.decompiler.dad.instruction.InvokeInstruction
method), 142
is_call() (androguard.decompiler.dad.instruction.IRForm
method), 141
is_call() (androguard.decompiler.dad.instruction.MoveExpression
method), 143
is_class_present() (andro-
    guard.core.analysis.analysis method),
36
is_complex() (andro-
    guard.core.bytecodes.axml.ARSCResTableEntry
method), 120
is_cond (androguard.decompiler.dad.node.NodeType
attribute), 146
is_cond() (androguard.decompiler.dad.instruction.ConditionalExpression
method), 140
is_cond() (androguard.decompiler.dad.instruction.ConditionalExpression
method), 140
is_cond() (androguard.decompiler.dad.instruction.IRForm
method), 141
is_const() (androguard.decompiler.dad.instruction.BaseClass
method), 139
is_const() (androguard.decompiler.dad.instruction.CastExpression
method), 140
is_const() (androguard.decompiler.dad.instruction.CheckCastExpression
method), 140
is_const() (androguard.decompiler.dad.instruction.Constant
method), 141
is_const() (andro-
    guard.core.bytecodes.axml.ARSCResTableConfig
method), 120
is_endless (androguard.decompiler.dad.node.LoopType
attribute), 146
is_external() (andro-
    guard.core.analysis.analysis.ClassAnalysis
method), 39
is_external() (andro-
    guard.core.analysis.analysis.MethodClassAnalysis
method), 42
is_ident() (androguard.decompiler.dad.instruction.IRForm
method), 141
is_ident() (androguard.decompiler.dad.instruction.Variable
method), 145
is_leanback() (andro-
    guard.core.bytecodes.apk.APK
55
is_multidex() (andro-
    guard.core.bytecodes.apk.APK
method), 122
is_packed() (andro-
    guard.core.bytecodes.axml.AXMLPrinter
method), 122
is_posttest (andro-
    guard.decompiler.dad.node.LoopType
attribute), 146
is_pretest (androguard.decompiler.dad.node.LoopType
attribute), 146
is_propagable() (andro-
    guard.decompiler.dad.instruction.AssignExpression
method), 139
is_propagable() (andro-
    guard.decompiler.dad.instruction.FillArrayExpression
method), 141
is_propagable() (andro-
    guard.decompiler.dad.instruction.MoveResultExpression
method), 141
is_propagable() (andro-
    guard.decompiler.dad.instruction.NewArrayExpression
method), 144
is_propagable() (andro-
    guard.decompiler.dad.instruction.RefExpression
method), 144
is_public() (andro-
    guard.core.bytecodes.axml.ARSCResTableEntry
method), 120

```

is\_reference() (andro-LinearSweepAlgorithm (class in andro-guard.core.bytecodes.axml.ARSCResStringPoolRef guard.core.bytecodes.dvm), 101  
method), 119  
list\_classes\_hierarchy() (andro-guard.core.bytecodes.dvm.DalvikVMFormat method), 73

is\_return(androguard.decompiler.dad.node.NodeType attribute), 146

is\_signed() (androguard.core.bytecodes.apk.APK method), 55

is\_signed\_v1() (andro-guard.core.bytecodes.apk.APK method), 55

is\_signed\_v2() (andro-guard.core.bytecodes.apk.APK method), 55

is\_signed\_v3() (andro-guard.core.bytecodes.apk.APK method), 55

is\_stmt (androguard.decompiler.dad.node.NodeType attribute), 146

is\_switch(androguard.decompiler.dad.node.NodeType attribute), 146

is\_tag\_matched() (andro-guard.core.bytecodes.apk.APK method), 55

is\_throw (androguard.decompiler.dad.node.NodeType attribute), 146

is\_valid() (androguard.core.bytecodes.axml.AXMLParser.read method), 122

is\_valid() (androguard.core.bytecodes.axml.AXMLPrinter.read method), 122

is\_valid\_APK() (andro-guard.core.bytecodes.apk.APK method), 56

is\_weak() (androguard.core.bytecodes.axml.ARSCResTableEditor.array\_exp() (in module andro-guard.decompiler.dad.opcode\_ins), 150  
method), 120

is\_wearable() (andro-guard.core.bytecodes.apk.APK method), 56

isOpen() (androguard.session.Session method), 163

**J**

JADXDecompilerError, 158

JSONWriter (class in andro-guard.decompiler.dad.dast), 130

jump\_stmt() (in module andro-guard.decompiler.dad.dast), 131

**L**

last() (androguard.decompiler.dad.graph.GenInvokeRetName method), 136

length\_buff() (andro-guard.core.bytecode.BuffHandle method), 126

LEQUAL (androguard.decompiler.dad.opcode\_ins.Op attribute), 147

literal() (in module andro-guard.decompiler.dad.dast), 131

literal\_bool() (in module andro-guard.decompiler.dad.dast), 131

literal\_class() (in module andro-guard.decompiler.dad.dast), 131

literal\_double() (in module andro-guard.decompiler.dad.dast), 131

literal\_float() (in module andro-guard.decompiler.dad.dast), 131

literal\_hex\_int() (in module andro-guard.decompiler.dad.dast), 131

literal\_int() (in module andro-guard.decompiler.dad.dast), 131

literal\_long() (in module andro-guard.decompiler.dad.dast), 131

literal\_null() (in module andro-guard.decompiler.dad.dast), 131

literal\_string() (in module andro-guard.decompiler.dad.dast), 131

load() (in module androguard.session), 160

load\_api\_specific\_resource\_module() (in module androguard.core.androconf), 125

load\_permission\_mappings() (in module andro-guard.core.api\_specific\_resources), 47

load\_permissions() (in module andro-guard.core.api\_specific\_resources), 47

local() (in module androguard.decompiler.dad.dast), 131

local\_decl\_stmt() (in module andro-guard.decompiler.dad.dast), 131

LONGSHL (androguard.decompiler.dad.opcode\_ins.Op attribute), 147

LONGSHR (androguard.decompiler.dad.opcode\_ins.Op attribute), 147

longtодouble() (in module andro-guard.decompiler.dad.dast), 151

longtofloat() (in module andro-guard.decompiler.dad.dast), 151

longtoint() (in module andro-guard.decompiler.dad.dast), 151

loop\_follow() (in module andro-guard.decompiler.dad.control\_flow), 134

loop_stmt () (in module <i>andro-guard.decompiler.dad.dast</i> ), 131	<i>andro-</i>	MethodClassAnalysis (class in <i>andro-guard.core.analysis.analysis</i> ), 41	<i>andro-</i>
loop_struct () (in module <i>andro-guard.decompiler.dad.control_flow</i> ), 134	<i>andro-</i>	MethodFilter (class in <i>andro-guard.decompiler.decompiler</i> ), 158	<i>andro-</i>
loop_type () (in module <i>andro-guard.decompiler.dad.control_flow</i> ), 134	<i>andro-</i>	MethodHIdItem (class in <i>andro-guard.core.bytecodes.dvm</i> ), 103	<i>andro-</i>
LoopBlock (class in <i>andro-guard.decompiler.dad.basic_blocks</i> ), 133	<i>andro-</i>	MethodIdItem (class in <i>andro-guard.core.bytecodes.dvm</i> ), 103	<i>andro-</i>
LoopType (class in <i>androguard.decompiler.dad.node</i> ), 146	<i>andro-</i>	MethodIdItemInvalid (class in <i>andro-guard.core.bytecodes.dvm</i> ), 104	<i>andro-</i>
LOWER ( <i>androguard.decompiler.dad.opcode_ins.Op</i> attribute), 147	<i>andro-</i>	MOD ( <i>androguard.decompiler.dad.opcode_ins.Op</i> attribute), 147	<i>andro-</i>
<b>M</b>		monitorenter () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
main () (in module <i>andro-guard.decompiler.dad.decompile</i> ), 136	<i>andro-</i>	MonitorEnterExpression (class in <i>andro-guard.decompiler.dad.instruction</i> ), 143	<i>andro-</i>
make_color_tuple () (in module <i>andro-guard.core.androconf</i> ), 126	<i>andro-</i>	monitorexit () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
make_node () (in module <i>andro-guard.decompiler.dad.graph</i> ), 138	<i>andro-</i>	MonitorExitExpression (class in <i>andro-guard.decompiler.dad.instruction</i> ), 143	<i>andro-</i>
MakeProperties (class in <i>andro-guard.decompiler.dad.node</i> ), 146	<i>andro-</i>	move () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
MapItem (class in <i>androguard.core.bytecodes.dvm</i> ), 101	<i>andro-</i>	move16 () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
MapList (class in <i>androguard.core.bytecodes.dvm</i> ), 102	<i>andro-</i>	moveexception () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
mark_loop () (in module <i>andro-guard.decompiler.dad.control_flow</i> ), 134	<i>andro-</i>	MoveExceptionExpression (class in <i>andro-guard.decompiler.dad.instruction</i> ), 143	<i>andro-</i>
mark_loop_rec () (in module <i>andro-guard.decompiler.dad.control_flow</i> ), 134	<i>andro-</i>	MoveExpression (class in <i>andro-guard.decompiler.dad.instruction</i> ), 143	<i>andro-</i>
merge_inner () (in module <i>andro-guard.decompiler.dad.util</i> ), 154	<i>andro-</i>	movefrom16 () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method2dot () (in module <i>androguard.core.bytecode</i> ), 129	<i>andro-</i>	moveobject () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method2format () (in module <i>andro-guard.core.bytecode</i> ), 129	<i>andro-</i>	moveobject16 () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method2jpg () (in module <i>androguard.core.bytecode</i> ), 129	<i>andro-</i>	moveobjectfrom16 () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method2json () (in module <i>andro-guard.core.bytecode</i> ), 129	<i>andro-</i>	moveresult () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method2json_direct () (in module <i>andro-guard.core.bytecode</i> ), 130	<i>andro-</i>	MoveResultExpression (class in <i>andro-guard.decompiler.dad.instruction</i> ), 143	<i>andro-</i>
method2json_undirect () (in module <i>andro-guard.core.bytecode</i> ), 130	<i>andro-</i>	moveresultobject () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method2png () (in module <i>androguard.core.bytecode</i> ), 130	<i>andro-</i>	moveresultwide () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method_idx_diff (attribute), 80	<i>(andro-</i>	movewide () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
method_invocation () (in module <i>andro-guard.decompiler.dad.dast</i> ), 131	<i>andro-</i>	movewide16 () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
MethodAnalysis (class in <i>andro-guard.core.analysis.analysis</i> ), 41	<i>andro-</i>	movewidefrom16 () (in module <i>andro-guard.decompiler.dad.opcode_ins</i> ), 151	<i>andro-</i>
MethodAnnotation (class in <i>andro-guard.core.bytecodes.dvm</i> ), 102	<i>andro-</i>	MUL ( <i>androguard.decompiler.dad.opcode_ins.Op</i> attribute), 147	<i>andro-</i>
MethodBC (class in <i>androguard.core.bytecode</i> ), 128			

muldouble() (in module andro- NEQUAL (*androguard.decompiler.dad.opcode\_ins.Op attribute*), 147  
guard.decompiler.dad.opcode\_ins), 151  
muldouble2addr() (in module andro- new() (*androguard.decompiler.dad.graph.GenInvokeRetName method*), 136  
guard.decompiler.dad.opcode\_ins), 151  
mulfloat() (in module andro- new\_zip() (*androguard.core.bytecodes.apk(APK method)*), 56  
guard.decompiler.dad.opcode\_ins), 151  
mulfloat2addr() (in module andro- newarray() (in module andro-  
guard.decompiler.dad.opcode\_ins), 151  
guard.decompiler.dad.opcode\_ins), 151  
mulint() (in module andro- NewArrayExpression (class in andro-  
guard.decompiler.dad.instruction), 144  
guard.decompiler.dad.opcode\_ins), 151  
mulint2addr() (in module andro- NewInstance (class in andro-  
guard.decompiler.dad.instruction), 144  
guard.decompiler.dad.opcode\_ins), 151  
mulintlit16() (in module andro- newInstance() (in module andro-  
guard.decompiler.dad.opcode\_ins), 151  
guard.decompiler.dad.opcode\_ins), 151  
mulintlit8() (in module andro- next() (*androguard.core.bytecodes.mutf8.PeekIterator method*), 124  
guard.decompiler.dad.opcode\_ins), 151  
mullong() (in module andro- Node (class in *androguard.core bytecode*), 128  
guard.decompiler.dad.opcode\_ins), 151  
mullong2addr() (in module andro- Node (class in *androguard.decompiler.dad.node*), 146  
guard.decompiler.dad.opcode\_ins), 151  
NodeType (class in *androguard.decompiler.dad.node*), 146  
nop() (in module andro-  
guard.decompiler.dad.opcode\_ins), 151  
NopExpression (class in andro-  
guard.decompiler.dad.instruction), 144  
name (*androguard.core.analysis.analysis.ClassAnalysis attribute*), 39  
name (*androguard.core.analysis.analysis.FieldClassAnalysis attribute*), 41  
Normal (*androguard.core.androconf.Color attribute*), 125  
name (*androguard.core.analysis.analysis.MethodClassAnalysis attribute*), 42  
NOT (*androguard.decompiler.dad.opcode\_ins.Op attribute*), 147  
name (*androguard.core.bytecodes.axml.AXMLParser attribute*), 122  
notint() (in module andro-  
guard.decompiler.dad.opcode\_ins), 151  
namespace (*androguard.core.bytecodes.axml.AXMLParser attribute*), 122  
notlong() (in module andro-  
guard.decompiler.dad.opcode\_ins), 151  
NEG (*androguard.decompiler.dad.opcode\_ins.Op attribute*), 147  
notmap (*androguard.core.bytecodes.axml.AXMLParser attribute*), 122  
neg() (*androguard.decompiler.dad.basic\_blocks.CondBlock attribute*), 132  
num (*androguard.decompiler.dad.basic\_blocks.TryBlock attribute*), 133  
neg() (*androguard.decompiler.dad.basic\_blocks.Condition attribute*), 133  
number\_ins() (*androguard.decompiler.dad.basic\_blocks.BasicBlock method*), 132  
neg() (*androguard.decompiler.dad.basic\_blocks.LoopBlock attribute*), 133  
number\_ins() (*androguard.decompiler.dad.basic\_blocks.BasicBlock method*), 132  
neg() (*androguard.decompiler.dad.basic\_blocks.ShortCircuitBlock attribute*), 133  
guard.decompiler.dad.graph.Graph method), 137  
neg() (*androguard.decompiler.dad.instruction.ConditionalExpression method*), 140  
O  
neg() (*androguard.decompiler.dad.instruction.ConditionalExpression method*), 140  
NEExpression\_bytes() (in module andro-  
guard.core.bytecode), 130  
negdouble() (in module andro- OdexDependencies (class in andro-  
guard.decompiler.dad.opcode\_ins), 151  
guard.core.bytecodes.dvm), 104  
negfloat() (in module andro- OdexHeaderItem (class in andro-  
guard.decompiler.dad.opcode\_ins), 151  
guard.core.bytecodes.dvm), 104  
negint() (in module andro- off\_to\_pos() (andro-  
guard.decompiler.dad.opcode\_ins), 151  
guard.core.bytecodes.dvm.DCode method),  
neglong() (in module andro- 67  
guard.decompiler.dad.opcode\_ins), 151  
OffObj (class in *androguard.core.bytecodes.dvm*), 105

Op (class in androguard.decompiler.dad.opcode_ins), 146	peek () (androguard.core.bytecode.BuffHandle method), 126
OR (androguard.decompiler.dad.opcode_ins.Op attribute), 147	peek () (androguard.core.bytecodes.mutf8.PeekIterator method), 124
order_cases () (androguard.decompiler.dad.basic_blocks.SwitchBlock method), 133	PeekIterator (class in androguard.core.bytecodes.mutf8), 124
orint () (in module androguard.decompiler.dad.opcode_ins), 152	place_declarations () (in module androguard.decompiler.dad.dataflow), 135
orint2addr () (in module androguard.decompiler.dad.opcode_ins), 152	pop () (androguard.core.analysis.analysis.BasicBlocks method), 37
orintlit16 () (in module androguard.decompiler.dad.opcode_ins), 152	post_order () (androguard.decompiler.dad.graph.Graph method), 137
orintlit8 () (in module androguard.decompiler.dad.opcode_ins), 152	preds () (androguard.decompiler.dad.graph.Graph method), 137
orlong () (in module androguard.decompiler.dad.opcode_ins), 152	PrettyShow () (in module androguard.core.bytecode), 128
orlong2addr () (in module androguard.decompiler.dad.opcode_ins), 152	PrettyShowEx () (in module androguard.core.bytecode), 128
<b>P</b>	
PackageManager (class in androguard.core.bytecodes.axml), 122	print_classes_hierarchy () (androguard.core.bytecodes.dvm.DalvikVMFormat method), 73
PackedSwitch (class in androguard.core.bytecodes.dvm), 105	process () (androguard.decompiler.dad.decompile.DvClass method), 135
packedswitch () (in module androguard.decompiler.dad.opcode_ins), 152	process () (androguard.decompiler.dad.decompile.DvMachine method), 136
Param (class in androguard.decompiler.dad.instruction), 144	process () (androguard.decompiler.dad.decompile.DvMethod method), 136
ParameterAnnotation (class in androguard.core.bytecodes.dvm), 106	process_and_show () (androguard.decompiler.dad.decompile.DvMachine method), 136
parenthesis () (in module androguard.decompiler.dad.dast), 131	process_method () (androguard.decompiler.dad.decompile.DvClass method), 135
parse () (androguard.core.bytecodes.dvm.MapItem method), 102	ProtoHIdItem (class in androguard.core.bytecodes.dvm), 106
parse_descriptor () (in module androguard.decompiler.dad.dast), 132	ProtoIdItem (class in androguard.core.bytecodes.dvm), 107
parse_id () (androguard.core.bytecodes.axml.ARSCParser static method), 119	ProtoIdItemInvalid (class in androguard.core.bytecodes.dvm), 107
parse_lxml_dom () (in module androguard.core.bytecodes.apk), 57	Purple (androguard.core.androconf.Color attribute), 125
parse_signatures_or_digests () (androguard.core.bytecodes.apk(APK method), 56	push () (androguard.core.analysis.analysis.BasicBlocks method), 37
parse_v2_signing_block () (androguard.core.bytecodes.apk(APK method), 56	push () (androguard.core.analysis.analysis.DVMBasicBlock method), 39
parse_v2_v3_signature () (androguard.core.bytecodes.apk(APK 56	put_ate_value () (androguard.core.bytecodes.axml.ARSCParser.ResourceResolver method), 115
parse_v3_signing_block () (androguard.core.bytecodes.apk(APK 56	put_item_value () (androguard.core.bytecodes.axml.ARSCParser.ResourceResolver method), 115
patch_string () (in module androguard.core.bytecodes.mutf8), 124	

## R

reach\_def\_analysis() (in module andro-  
guard.decompiler.dad.dataflow), 135  
read() (androguard.core.bytecode.BuffHandle  
method), 126  
read() (in module androguard.util), 163  
read\_at() (androguard.core.bytecode.BuffHandle  
method), 127  
read\_b() (androguard.core.bytecode.BuffHandle  
method), 127  
read\_null\_terminated\_string() (in module  
androguard.core.bytecodes.dvm), 114  
read\_uint32\_le() (andro-  
guard.core.bytecodes.apk.APK  
method), 56  
readat() (androguard.core.bytecode.BuffHandle  
method), 127  
readNullString() (andro-  
guard.core.bytecode.BuffHandle  
method), 127  
readsleb128() (in module  
androguard.core.bytecodes.dvm), 114  
readuleb128() (in module  
androguard.core.bytecodes.dvm), 114  
readuleb128p1() (in module  
androguard.core.bytecodes.dvm), 114  
Red (androguard.core.androconf.Color attribute), 125  
RefExpression (class in andro-  
guard.decompiler.dad.instruction), 144  
register\_propagation() (in module andro-  
guard.decompiler.dad.dataflow), 135  
reload() (androguard.core.bytecodes.dvm.AnnotationItem  
method), 58  
reload() (androguard.core.bytecodes.dvm.AnnotationsDirectory  
method), 61  
reload() (androguard.core.bytecodes.dvm.AnnotationSetItem  
method), 59  
reload() (androguard.core.bytecodes.dvm.AnnotationSetRefList  
method), 60  
reload() (androguard.core.bytecodes.dvm.ClassDataItem  
method), 62  
reload() (androguard.core.bytecodes.dvm.ClassDefItem  
method), 63  
reload() (androguard.core.bytecodes.dvm.ClassHDefItem  
method), 64  
reload() (androguard.core.bytecodes.dvm.CodeItem  
method), 65  
reload() (androguard.core.bytecodes.dvm.DalvikCode  
method), 69  
reload() (androguard.core.bytecodes.dvm.DCode  
method), 67  
reload() (androguard.core.bytecodes.dvm.DebugInfoItem  
method), 74  
reload() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty  
method), 74  
reload() (androguard.core.bytecodes.dvm.EncodedArrayItem  
method), 75  
reload() (androguard.core.bytecodes.dvm.EncodedField  
method), 77  
reload() (androguard.core.bytecodes.dvm.EncodedMethod  
method), 80  
reload() (androguard.core.bytecodes.dvm.FieldIdItem  
method), 83  
reload() (androguard.core.bytecodes.dvm.FieldIdItem  
method), 83  
reload() (androguard.core.bytecodes.dvm.HeaderItem  
method), 85  
reload() (androguard.core.bytecodes.dvm.MapItem  
method), 102  
reload() (androguard.core.bytecodes.dvm.MapList  
method), 102  
reload() (androguard.core.bytecodes.dvm.MethodIdItem  
method), 103  
reload() (androguard.core.bytecodes.dvm.MethodIdItem  
method), 104  
reload() (androguard.core.bytecodes.dvm.ProtoIdItem  
method), 106  
reload() (androguard.core.bytecodes.dvm.ProtoIdItem  
method), 107  
reload() (androguard.core.bytecodes.dvm.StringDataItem  
method), 109  
reload() (androguard.core.bytecodes.dvm.StringIdItem  
method), 110  
reload() (androguard.core.bytecodes.dvm.TypeIdItem  
method), 111  
reload() (androguard.core.bytecodes.dvm.TypeIdItem  
method), 111  
reload() (androguard.core.bytecodes.dvm.TypeList  
method), 112  
remdouble() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remdouble2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remfloat() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remfloat2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remint() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remint2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remintlit16() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remintlit8() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remlong() (in module andro-  
guard.decompiler.dad.opcode\_ins), 152  
remlong2addr() (in module andro-

```

        guard.decompiler.dad.opcode_ins), 152
remove_colors() (in module andro-
    guard.core.androconf), 126
remove_defined_var() (andro-
    guard.decompiler.dad.instruction.AssignExpression
method), 139
remove_defined_var() (andro-
    guard.decompiler.dad.instruction.IRForm
method), 141
remove_ins() (andro-
    guard.decompiler.dad.basic_blocks.BasicBlock
method), 132
remove_ins() (andro-
    guard.decompiler.dad.graph.Graph
method), 137
remove_node() (andro-
    guard.decompiler.dad.graph.Graph
method), 137
replace() (androguard.decompiler.dad.instruction.ArrayLengthExp
method), 143
replace() (androguard.decompiler.dad.instruction.ArrayLoadExp
method), 138
replace() (androguard.decompiler.dad.instruction.ArrayStoreInstruc
method), 139
replace() (androguard.decompiler.dad.instruction.AssignExp
method), 138
replace() (androguard.decompiler.dad.instruction.BinaryExp
method), 139
replace() (androguard.decompiler.dad.instruction.CheckCastExp
method), 140
replace() (androguard.decompiler.dad.instruction.ConditionalExp
method), 140
replace() (androguard.decompiler.dad.instruction.ConditionalZExp
method), 140
replace() (androguard.decompiler.dad.instruction.FillArrayExp
method), 141
replace() (androguard.decompiler.dad.instruction.FilledArrayExp
method), 141
replace() (androguard.decompiler.dad.instruction.InstanceExp
method), 142
replace() (androguard.decompiler.dad.instruction.InstanceInstruc
method), 142
replace() (androguard.decompiler.dad.instruction.InvokeInstruc
method), 140
replace() (androguard.decompiler.dad.instruction.MoveExp
method), 143
replace() (androguard.decompiler.dad.instruction.NewArrayExp
method), 144
replace() (androguard.decompiler.dad.instruction.NewInstance
method), 144
replace() (androguard.decompiler.dad.instruction.RefExp
method), 144
replace() (andro-
    guard.decompiler.dad.instruction.ReturnInstruction
method), 144
replace() (androguard.decompiler.dad.instruction.StaticExp
method), 145
replace() (androguard.decompiler.dad.instruction.StaticInstruc
method), 145
replace() (androguard.decompiler.dad.instruction.SwitchExp
method), 145
replace() (androguard.decompiler.dad.instruction.UnaryExp
method), 145
replace_lhs() (andro-
    guard.decompiler.dad.instruction.AssignExp
method), 139
replace_lhs() (andro-
    guard.decompiler.dad.instruction.IRForm
method), 141
replace_lhs() (andro-
    guard.decompiler.dad.instruction.MoveExceptionExp
method), 143
replace_lhs() (andro-
    guard.decompiler.dad.instruction.ArrayLengthExp
method), 143
replace_var() (andro-
    guard.decompiler.dad.instruction.ArrayLoadExp
method), 138
replace_var() (andro-
    guard.decompiler.dad.instruction.CheckCastExp
method), 140
replace_var() (andro-
    guard.decompiler.dad.instruction.ConditionalExp
method), 139
replace_var() (andro-
    guard.decompiler.dad.instruction.ConditionalZExp
method), 140
replace_var() (andro-
    guard.decompiler.dad.instruction.FillArrayExp
method), 141
replace_var() (andro-
    guard.decompiler.dad.instruction.FilledArrayExp
method), 141
replace_var() (andro-
    guard.decompiler.dad.instruction.InstanceExp
method), 142
replace_var() (andro-
    guard.decompiler.dad.instruction.InstanceInstruc
method), 142
replace_var() (andro-
    guard.decompiler.dad.instruction.InvokeInstruc
method), 140
replace_var() (andro-
    guard.decompiler.dad.instruction.MoveExp
method), 143
replace_var() (andro-
    guard.decompiler.dad.instruction.NewArrayExp
method), 144
replace_var() (andro-
    guard.decompiler.dad.instruction.NewInstance
method), 144
replace_var() (andro-
    guard.decompiler.dad.instruction.RefExp
method), 144

```

method), 142  
replace\_var() (andro- run () (androguard.decompiler.dad.dataflow.BasicReachDef  
guard.decompiler.dad.instruction.InstanceInstruction method), 134  
method), 142  
replace\_var() (andro- S  
guard.decompiler.dad.instruction.InvokeInstruction save () (androguard.core bytecode.BuffHandle  
method), 142 method), 127  
replace\_var() (andro- save () (androguard.core.bytecodes.dvm.DalvikOdexVMFormat  
guard.decompiler.dad.instruction.IRForm method), 69  
method), 141  
replace\_var() (andro- save () (androguard.core.bytecodes.dvm.DalvikVMFormat  
guard.decompiler.dad.instruction.MoveExpression method), 73  
method), 143  
replace\_var() (andro- save () (androguard.session.Session method), 163  
guard.decompiler.dad.instruction.NewArrayExpression Save () (in module androguard.session), 160  
method), 144  
replace\_var() (andro- save\_colors () (in module andro-  
guard.decompiler.dad.instruction.RefExpression guard.core.androconf), 126  
method), 144 Session (class in androguard.session), 160  
replace\_var() (andro- set\_buff () (androguard.core bytecode.BuffHandle  
guard.decompiler.dad.instruction.ReturnInstruction method), 127  
method), 144  
replace\_var() (andro- set\_catch\_type () (andro-  
guard.decompiler.dad.instruction.StaticInstruction guard.decompiler.dad.basic\_blocks.BasicBlock  
method), 145 method), 132  
replace\_var() (andro- set\_childs () (andro-  
guard.decompiler.dad.instruction.SwitchExpression guard.core.analysis.analysis.DVMBasicBlock  
method), 145 method), 39  
replace\_var() (andro- set\_code\_idx () (andro-  
guard.decompiler.dad.instruction.UnaryExpression guard.core.bytecodes.dvm.EncodedMethod  
method), 145 method), 80  
reset () (androguard.session.Session method), 163  
resolve () (androguard.core.bytecodes.antlr.ARSParse.set\_decompiler () (andro-  
ResourceRepository, 73  
method), 116  
ResParserError, 123  
return\_reg() (in module andro- set\_decompiler () (andro-  
guard.decompiler.dad.opcode\_ins), 152  
return\_stmt() (in module andro- set\_exception\_analysis () (andro-  
guard.decompiler.dad.dast), 132  
ReturnBlock (class in andro- set\_fathers () (andro-  
guard.decompiler.dad.basic\_blocks), 133  
ReturnInstruction (class in andro- set\_hook\_class\_name () (andro-  
guard.decompiler.dad.instruction), 144  
returnobject() (in module andro- set\_hook\_field\_name () (andro-  
guard.decompiler.dad.opcode\_ins), 152  
returnvoid() (in module andro- set\_hook\_method\_name () (andro-  
guard.decompiler.dad.opcode\_ins), 152  
returnwide() (in module andro- set\_hook\_string () (andro-  
guard.decompiler.dad.opcode\_ins), 152  
rrmdir() (in module androguard.core.androconf), 126  
rsubint() (in module andro- set\_idx () (androguard.core bytecode.BuffHandle  
guard.decompiler.dad.opcode\_ins), 152  
rsubintlit8() (in module andro- method), 127  
guard.decompiler.dad.opcode\_ins), 152

```

set_idx() (androguard.core.bytecodes.dvm.DalvikCode
           method), 69
set_idx() (androguard.core.bytecodes.dvm.DCode
           method), 67
set_init_value() (andro-
                  guard.core.bytecodes.dvm.EncodedField
                  method), 77
set_insn() (androguard.core.bytecodes.dvm.DCode
            method), 67
set_instructions() (andro-
                     guard.core.bytecodes.dvm.DCode
                     method), 67
set_instructions() (andro-
                     guard.core.bytecodes.dvm.EncodedMethod
                     method), 80
set_item() (androguard.core.bytecodes.dvm.MapItem
            method), 102
set_mResId() (andro-
               guard.core.bytecodes.axml.PackageContext
               method), 123
set_name() (androguard.core.bytecodes.dvm.ClassDefItem
            method), 63
set_name() (androguard.core.bytecodes.dvm.EncodedField
            method), 78
set_name() (androguard.core.bytecodes.dvm.EncodedMethod
            method), 80
set_notes() (andro-
             guard.core.analysis.analysis.DVMBasicBlock
             method), 40
set_off() (androguard.core.bytecodes.dvm.AnnotationItem
           method), 58
set_off() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem
           method), 61
set_off() (androguard.core.bytecodes.dvm.AnnotationSetItem
           method), 59
set_off() (androguard.core.bytecodes.dvm.AnnotationSetRefList
           method), 60
set_off() (androguard.core.bytecodes.dvm.ClassDataItem
           method), 62
set_off() (androguard.core.bytecodes.dvm.ClassHDefItem
           method), 64
set_off() (androguard.core.bytecodes.dvm.CodeItem
           method), 65
set_off() (androguard.core.bytecodes.dvm.DalvikCode
           method), 69
set_off() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty
           method), 74
set_off() (androguard.core.bytecodes.dvm.EncodedArrayItem
           method), 75
set_off() (androguard.core.bytecodes.dvm.EncodedCatchHandler
           method), 76
set_off() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList
           method), 76
set_off() (androguard.core.bytecodes.dvm.FieldAnnotation
           method), 82
set_off() (androguard.core.bytecodes.dvm.FieldHIdItem
           method), 83
set_off() (androguard.core.bytecodes.dvm.HeaderItem
           method), 85
set_off() (androguard.core.bytecodes.dvm.MapList
           method), 102
set_off() (androguard.core.bytecodes.dvm.MethodAnnotation
           method), 103
set_off() (androguard.core.bytecodes.dvm.MethodHIdItem
           method), 103
set_off() (androguard.core.bytecodes.dvm.ParameterAnnotation
           method), 106
set_off() (androguard.core.bytecodes.dvm.ProtoHIdItem
           method), 107
set_off() (androguard.core.bytecodes.dvm.StringDataItem
           method), 109
set_off() (androguard.core.bytecodes.dvm.StringIdItem
           method), 110
set_off() (androguard.core.bytecodes.dvm.TryItem
           method), 110
set_off() (androguard.core.bytecodes.dvm.TypeHIdItem
           method), 111
set_off() (androguard.core.bytecodes.dvm.TypeList
           method), 112
set_options() (in module andro-
               guard.core.androconf), 126
set_static_fields() (andro-
                     guard.core.bytecodes.dvm.ClassDataItem
                     method), 62
set_to() (androguard.decompiler.dad.graph.GenInvokeRetName
          method), 137
set_type() (androguard.decompiler.dad.instruction.IRForm
            method), 142
set_value() (andro-
             guard.core.analysis.analysis.StringAnalysis
             method), 42
set_value() (androguard.core.bytecode.SV
             method), 129
set_value() (androguard.core.bytecode.SVs
             method), 129
set_vanalysis() (andro-
                  guard.core.bytecodes.dvm.DalvikVMFormat
                  method), 73
sget() (in module andro-
        guard.core.decompiler.dad.opcode_ins), 152
sgetboolean() (in module andro-
               guard.core.decompiler.dad.opcode_ins), 152
sgetbyte() (in module andro-
            guard.core.decompiler.dad.opcode_ins), 152
sgetchar() (in module andro-
            guard.core.decompiler.dad.opcode_ins), 152
sgetobject() (in module andro-
              guard.decompiler.dad.opcode_ins), 152

```

```
sgetshort()      (in module andro- show() (androguard.core.bytecodes.dvm.DBGBytecode  
    guard.decompiler.dad.opcode_ins), 152   method), 66  
sgetwide()       (in module andro- show() (androguard.core.bytecodes.dvm.DCode  
    guard.decompiler.dad.opcode_ins), 152   method), 67  
shlint()         (in module andro- show() (androguard.core.bytecodes.dvm.DebugInfoItem  
    guard.decompiler.dad.opcode_ins), 152   method), 74  
shlnt2addr()     (in module andro- show() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty  
    guard.decompiler.dad.opcode_ins), 152   method), 74  
shlntlit8()      (in module andro- show() (androguard.core.bytecodes.dvm.EncodedAnnotation  
    guard.decompiler.dad.opcode_ins), 152   method), 74  
shllong()        (in module andro- show() (androguard.core.bytecodes.dvm.EncodedArray  
    guard.decompiler.dad.opcode_ins), 152   method), 75  
shllong2addr()   (in module andro- show() (androguard.core.bytecodes.dvm.EncodedArrayItem  
    guard.decompiler.dad.opcode_ins), 152   method), 75  
short_circuit_struct() (in module andro- show() (androguard.core.bytecodes.dvm.EncodedCatchHandler  
    guard.decompiler.dad.control_flow), 134   method), 76  
ShortCircuitBlock (class in andro- show() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList  
    guard.decompiler.dad.basic_blocks), 133   method), 76  
show() (androguard.core.analysis.analysis.DVMBasicBlock show() (androguard.core.bytecodes.dvm.EncodedField  
    method), 40   method), 78  
show() (androguard.core.analysis.analysis.MethodAnalysis) show() (androguard.core.bytecodes.dvm.EncodedMethod  
    method), 41   method), 80  
show() (androguard.core.bytecode.MethodBC method), 128 show() (androguard.core.bytecodes.dvm.EncodedTypeAddrPair  
    method), 81  
show() (androguard.core.bytecodes.apk.APK method), 56 show() (androguard.core.bytecodes.dvm.EncodedValue  
    method), 81  
show() (androguard.core.bytecodes.axml.StringBlock show() (androguard.core.bytecodes.dvm.FieldAnnotation  
    method), 123   method), 82  
show() (androguard.core.bytecodes.dvm.AnnotationElement show() (androguard.core.bytecodes.dvm.FieldIdItem  
    method), 58   method), 83  
show() (androguard.core.bytecodes.dvm.AnnotationItem show() (androguard.core.bytecodes.dvm.FieldIdItem  
    method), 58   method), 83  
show() (androguard.core.bytecodes.dvm.AnnotationOffItem show() (androguard.core.bytecodes.dvm.FieldIdItemInvalid  
    method), 59   method), 84  
show() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem show() (androguard.core.bytecodes.dvm.FillArrayData  
    method), 61   method), 84  
show() (androguard.core.bytecodes.dvm.AnnotationSetItem show() (androguard.core.bytecodes.dvm.HeaderItem  
    method), 59   method), 85  
show() (androguard.core.bytecodes.dvm.AnnotationSetRefItem show() (androguard.core.bytecodes.dvm.Instruction  
    method), 59   method), 86  
show() (androguard.core.bytecodes.dvm.AnnotationSetRefList show() (androguard.core.bytecodes.dvm.MapItem  
    method), 60   method), 102  
show() (androguard.core.bytecodes.dvm.ClassDataItem show() (androguard.core.bytecodes.dvm.MapList  
    method), 62   method), 102  
show() (androguard.core.bytecodes.dvm.ClassDefItem show() (androguard.core.bytecodes.dvm.MethodAnnotation  
    method), 63   method), 103  
show() (androguard.core.bytecodes.dvm.ClassHDefItem show() (androguard.core.bytecodes.dvm.MethodIdItem  
    method), 64   method), 103  
show() (androguard.core.bytecodes.dvm.CodeItem show() (androguard.core.bytecodes.dvm.MethodIdItem  
    method), 65   method), 104  
show() (androguard.core.bytecodes.dvm.DalvikCode show() (androguard.core.bytecodes.dvm.MethodIdItemInvalid  
    method), 69   method), 104  
show() (androguard.core.bytecodes.dvm.DalvikVMFormat show() (androguard.core.bytecodes.dvm.OdexHeaderItem  
    method), 73   method), 105
```

```

show() (androguard.core.bytecodes.dvm.PackedSwitch
       method), 106
show() (androguard.core.bytecodes.dvm.ParameterAnnotation
       method), 106
show() (androguard.core.bytecodes.dvm.ProtoHIdItem
       method), 107
show() (androguard.core.bytecodes.dvm.ProtoIdItem
       method), 107
show() (androguard.core.bytecodes.dvm.ProtoIdItemInvalid
       method), 107
show() (androguard.core.bytecodes.dvm.SparseSwitch
       method), 108
show() (androguard.core.bytecodes.dvm.StringDataItem
       method), 109
show() (androguard.core.bytecodes.dvm.StringIdItem
       method), 110
show() (androguard.core.bytecodes.dvm.TypeHIdItem
       method), 111
show() (androguard.core.bytecodes.dvm.TypeIdItem
       method), 111
show() (androguard.core.bytecodes.dvm.TypeItem
       method), 112
show() (androguard.core.bytecodes.dvm.TypeList
       method), 112
show() (androguard.session.Session method), 163
show_buff() (andro-
            guard.core.analysis.analysis.ExceptionAnalysis
            method), 40
show_buff() (andro-
            guard.core.bytecodes.dvm.FillArrayData
            method), 85
show_buff() (andro-
            guard.core.bytecodes.dvm.Instruction method),
            86
show_buff() (andro-
            guard.core.bytecodes.dvm.PackedSwitch
            method), 106
show_buff() (andro-
            guard.core.bytecodes.dvm.SparseSwitch
            method), 108
show_Certificate() (in module andro-
            guard.core.bytecodes.apk), 57
show_info() (andro-
            guard.core.bytecodes.dvm.EncodedMethod
            method), 80
show_logging() (in module andro-
            guard.core.androconf), 126
show_notes() (andro-
            guard.core.bytecodes.dvm.EncodedMethod
            method), 81
show_source() (andro-
            guard.decompiler.dad.decompile.DvClass
            method), 135
show_source() (andro-
            guard.decompiler.dad.decompile.DvMachine
            method), 136
show_source() (andro-
            guard.decompiler.dad.decompile.DvMethod
            method), 136
shrint() (in module andro-
            guard.decompiler.dad.opcode_ins), 152
shrint2addr() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
shrintlit8() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
shrlong() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
shrlong2addr() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
sign_apk() (in module androguard.misc), 159
simplify() (in module andro-
            guard.decompiler.dad.graph), 138
SIZE (androguard.core.bytecodes.axyml.ARSCHeader at-
      tribute), 115
size (androguard.core.bytecodes.axyml.ARSCHeader at-
      tribute), 115
size() (androguard.core.bytecode.BuffHandle
       method), 127
source() (androguard.core.bytecodes.dvm.ClassDefItem
       method), 64
source() (androguard.core.bytecodes.dvm.EncodedMethod
       method), 81
space() (androguard.decompiler.dad.writer.Writer
       method), 154
SparseSwitch (class in andro-
            guard.core.bytecodes.dvm), 107
sparseswitch() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
split_if_nodes() (in module andro-
            guard.decompiler.dad.graph), 138
split_variables() (in module andro-
            guard.decompiler.dad.dataflow), 135
sput() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
sputboolean() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
sputbyte() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
sputchar() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
sputobject() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
sputshort() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
sputwide() (in module andro-
            guard.decompiler.dad.opcode_ins), 153
statement_block() (in module andro-
            guard.decompiler.dad.dast), 132

```

StatementBlock (class in androguard.decompiler.dad.basic\_blocks), 133  
static\_operand\_instruction() (in module androguard.core.bytecodes.dvm), 114  
StaticExpression (class in androguard.decompiler.dad.instruction), 144  
StaticInstruction (class in androguard.decompiler.dad.instruction), 145  
store\_array\_inst() (in module androguard.decompiler.dad.opcode\_ins), 153  
str\_ext() (androguard.decompiler.dad.writer.Writer method), 154  
string() (in module androguard.decompiler.dad.writer), 156  
StringAnalysis (class in androguard.core.analysis.analysis), 42  
StringBlock (class in androguard.core.bytecodes.axyml), 123  
StringDataItem (class in androguard.core.bytecodes.dvm), 108  
StringIdItem (class in androguard.core.bytecodes.dvm), 109  
SUB (androguard.decompiler.dad.opcode\_ins.Op attribute), 147  
subdouble() (in module androguard.decompiler.dad.opcode\_ins), 153  
subdouble2addr() (in module androguard.decompiler.dad.opcode\_ins), 153  
subfloat() (in module androguard.decompiler.dad.opcode\_ins), 153  
subfloat2addr() (in module androguard.decompiler.dad.opcode\_ins), 153  
subint() (in module androguard.decompiler.dad.opcode\_ins), 153  
subint2addr() (in module androguard.decompiler.dad.opcode\_ins), 153  
sublong() (in module androguard.decompiler.dad.opcode\_ins), 153  
sublong2addr() (in module androguard.decompiler.dad.opcode\_ins), 153  
sucs() (androguard.decompiler.dad.graph.Graph method), 137  
SV (class in androguard.core.bytecode), 128  
SVs (class in androguard.core.bytecode), 129  
switch\_stmt() (in module androguard.decompiler.dad.dast), 132  
switch\_struct() (in module androguard.decompiler.dad.control\_flow), 134  
SwitchBlock (class in androguard.decompiler.dad.basic\_blocks), 133  
SwitchExpression (class in androguard.decompiler.dad.instruction), 145

## T

tell() (androguard.core.bytecode.BuffHandle method), 127  
text (androguard.core.bytecodes.axyml.AXMLParser attribute), 122  
ThisParam (class in androguard.decompiler.dad.instruction), 145  
throw() (in module androguard.decompiler.dad.opcode\_ins), 153  
throw\_stmt() (in module androguard.decompiler.dad.dast), 132  
ThrowBlock (class in androguard.decompiler.dad.basic\_blocks), 133  
ThrowExpression (class in androguard.decompiler.dad.instruction), 145  
TmpBlock (class in androguard.core.bytecode), 129  
try\_stmt() (in module androguard.decompiler.dad.dast), 132  
TryBlock (class in androguard.decompiler.dad.basic\_blocks), 133  
TryItem (class in androguard.core.bytecodes.dvm), 110  
type (androguard.core.bytecodes.axyml.ARSCHeader attribute), 115  
TypeHIdItem (class in androguard.core.bytecodes.dvm), 110  
TypeIIdItem (class in androguard.core.bytecodes.dvm), 111  
TypeItem (class in androguard.core.bytecodes.dvm), 111  
TypeList (class in androguard.core.bytecodes.dvm), 112  
typen() (in module androguard.decompiler.dad.dast), 132

## U

unary\_postfix() (in module androguard.decompiler.dad.dast), 132  
unary\_prefix() (in module androguard.decompiler.dad.dast), 132  
UnaryExpression (class in androguard.decompiler.dad.instruction), 145  
Unresolved (class in androguard.core.bytecodes.dvm), 112  
update\_attribute\_with() (androguard.decompiler.dad.basic\_blocks.CondBlock method), 132  
update\_attribute\_with() (androguard.decompiler.dad.basic\_blocks.LoopBlock method), 133  
update\_attribute\_with() (androguard.decompiler.dad.basic\_blocks.SwitchBlock method), 133  
update\_attribute\_with() (androguard.decompiler.dad.node.Node method),

146  
`update_chain()` (in module `andro-`  
`guard.decompiler.dad.dataflow`), 135  
`update_dom()` (in module `andro-`  
`guard.decompiler.dad.control_flow`), 134  
`ushrint()` (in module `andro-`  
`guard.decompiler.dad.opcode_ins`), 153  
`ushrint2addr()` (in module `andro-`  
`guard.decompiler.dad.opcode_ins`), 153  
`ushrintlit8()` (in module `andro-`  
`guard.decompiler.dad.opcode_ins`), 153  
`ushrlong()` (in module `andro-`  
`guard.decompiler.dad.opcode_ins`), 153  
`ushrlong2addr()` (in module `andro-`  
`guard.decompiler.dad.opcode_ins`), 153

**V**

`value()` (`androguard.decompiler.dad.instruction.Variable`  
`method`), 145  
`var_decl()` (in module `andro-`  
`guard.decompiler.dad.dast`), 132  
`Variable` (class in `andro-`  
`guard.decompiler.dad.instruction`), 145  
`visit()` (`androguard.decompiler.dad.basic_blocks.CatchBlock`  
`method`), 132  
`visit()` (`androguard.decompiler.dad.basic_blocks.CondBlock`  
`method`), 132  
`visit()` (`androguard.decompiler.dad.basic_blocks.Condition`  
`method`), 133  
`visit()` (`androguard.decompiler.dad.basic_blocks.LoopBlock`  
`method`), 133  
`visit()` (`androguard.decompiler.dad.basic_blocks.ReturnBlock`  
`method`), 133  
`visit()` (`androguard.decompiler.dad.basic_blocks.StatementBlock`  
`method`), 133  
`visit()` (`androguard.decompiler.dad.basic_blocks.SwitchBlock`  
`method`), 133  
`visit()` (`androguard.decompiler.dad.basic_blocks.ThrowBlock`  
`method`), 133  
`visit()` (`androguard.decompiler.dad.basic_blocks.TryBlock`  
`method`), 134  
`visit()` (`androguard.decompiler.dad.instruction.ArrayLengthExpression`  
`method`), 138  
`visit()` (`androguard.decompiler.dad.instruction.ArrayLoadExpression`  
`method`), 138  
`visit()` (`androguard.decompiler.dad.instruction.ArrayStoreInstruction`  
`method`), 139  
`visit()` (`androguard.decompiler.dad.instruction.AssignExpression`  
`method`), 139  
`visit()` (`androguard.decompiler.dad.instruction.BaseClass`  
`method`), 139  
`visit()` (`androguard.decompiler.dad.instruction.BinaryCompExpression`  
`method`), 139

`visit()` (`androguard.decompiler.dad.instruction.BinaryExpression`  
`method`), 139  
`visit()` (`androguard.decompiler.dad.instruction.CastExpression`  
`method`), 140  
`visit()` (`androguard.decompiler.dad.instruction.CheckCastExpression`  
`method`), 140  
`visit()` (`androguard.decompiler.dad.instruction.ConditionalExpression`  
`method`), 140  
`visit()` (`androguard.decompiler.dad.instruction.ConditionalZExpression`  
`method`), 140  
`visit()` (`androguard.decompiler.dad.instruction.Constant`  
`method`), 141  
`visit()` (`androguard.decompiler.dad.instruction.FillArrayExpression`  
`method`), 141  
`visit()` (`androguard.decompiler.dad.instruction.FilledArrayExpression`  
`method`), 141  
`visit()` (`androguard.decompiler.dad.instruction.InstanceExpression`  
`method`), 142  
`visit()` (`androguard.decompiler.dad.instruction.InstanceInstruction`  
`method`), 142  
`visit()` (`androguard.decompiler.dad.instruction.InvokeInstruction`  
`method`), 142  
`visit()` (`androguard.decompiler.dad.instruction.IRForm`  
`method`), 142  
`visit()` (`androguard.decompiler.dad.instruction.MonitorEnterExpression`  
`method`), 142  
`visit()` (`androguard.decompiler.dad.instruction.MonitorExitExpression`  
`method`), 143  
`visit()` (`androguard.decompiler.dad.instruction.MoveExceptionExpression`  
`method`), 143  
`visit()` (`androguard.decompiler.dad.instruction.MoveExpression`  
`method`), 143  
`visit()` (`androguard.decompiler.dad.instruction.MoveResultExpression`  
`method`), 143  
`visit()` (`androguard.decompiler.dad.instruction.NewArrayExpression`  
`method`), 144  
`visit()` (`androguard.decompiler.dad.instruction.NewInstance`  
`method`), 144  
`visit()` (`androguard.decompiler.dad.instruction.NopExpression`  
`method`), 144  
`visit()` (`androguard.decompiler.dad.instruction.Param`  
`method`), 144  
`visit()` (`androguard.decompiler.dad.instruction.ReturnInstruction`  
`method`), 144  
`visit()` (`androguard.decompiler.dad.instruction.StaticExpression`  
`method`), 144  
`visit()` (`androguard.decompiler.dad.instruction.StaticInstruction`  
`method`), 145  
`visit()` (`androguard.decompiler.dad.instruction.SwitchExpression`  
`method`), 145  
`visit()` (`androguard.decompiler.dad.instruction.ThisParam`  
`method`), 145  
`visit()` (`androguard.decompiler.dad.instruction.ThrowExpression`  
`method`), 145

visit() (*androguard.decompiler.dad.instruction.UnaryExpression*)  
    constant ()  
        (*androguard.decompiler.dad.writer.Writer*)  
            (*androguard.decompiler.dad.method*), 155  
visit() (*androguard.decompiler.dad.instruction.Variable*)  
    method(), 145  
visit\_alength()  
    (*androguard.decompiler.dad.writer.Writer*)  
    154  
visit\_aload()  
    (*androguard.decompiler.dad.writer.Writer*)  
    154  
visit\_arr\_data() (in *module*)  
    (*androguard.decompiler.dad.dast*), 132  
visit\_assign()  
    (*androguard.decompiler.dad.writer.Writer*)  
    154  
visit astore()  
    (*androguard.decompiler.dad.writer.Writer*)  
    154  
visit\_base\_class()  
    (*androguard.decompiler.dad.writer.Writer*)  
    154  
visit\_binary\_expression()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_cast()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_catch\_node()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_check\_cast()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_cond()  
    (*androguard.decompiler.dad.basic\_blocks.CondBlock*)  
        (*androguard.decompiler.dad.method*), 132  
visit\_cond()  
    (*androguard.decompiler.dad.basic\_blocks.LoopBlock*)  
        (*androguard.decompiler.dad.method*), 133  
visit\_cond()  
    (*androguard.decompiler.dad.basic\_blocks.ShortCircuitBlock*)  
        (*androguard.decompiler.dad.method*), 133  
visit\_cond\_expression()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_cond\_node()  
    (*androguard.decompiler.dad.dast.JSONWriter*)  
        (*androguard.decompiler.dad.method*), 131  
visit\_cond\_node()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_condz\_expression()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_decl()  
    (*androguard.decompiler.dad.instruction.Variable*)  
        (*androguard.decompiler.dad.method*), 146  
visit\_decl()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_decl() (in *module*)  
    (*androguard.decompiler.dad.dast*), 132  
visit\_exception()  
    (*androguard.decompiler.dad.basic\_blocks.CatchBlock*)  
        (*androguard.decompiler.dad.method*), 132  
visit\_expr() (in *module*)  
    (*androguard.decompiler.dad.dast*), 132  
visit\_fill\_array()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_filled\_new\_array()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_get\_instance()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_get\_static()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_ins()  
    (*androguard.decompiler.dad.dast.JSONWriter*)  
        (*androguard.decompiler.dad.method*), 131  
visit\_ins()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_ins() (in *module*)  
    (*androguard.decompiler.dad.dast*), 132  
visit\_invoke()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_loop\_node()  
    (*androguard.decompiler.dad.dast.JSONWriter*)  
        (*androguard.decompiler.dad.method*), 131  
visit\_loop\_node()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_monitor\_enter()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_monitor\_exit()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155  
visit\_move()  
    (*androguard.decompiler.dad.writer.Writer*)  
    155

visit_move_exception() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_switch() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_switch() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),
visit_move_result() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_switch_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131	(andro- method),	visit_switch_node() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),
visit_new() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_new() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_this() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_new_array() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_new_array() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_throw() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131	(andro- method),	visit_node() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_throw_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131
visit_node() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_node() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_throw_node() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_nop() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_nop() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_try_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131
visit_param() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_param() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_try_node() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_put_instance() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_put_instance() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_unary_expression() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_put_static() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_put_static() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	visit_variable() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_return() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_return() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	vm2json() (in module <code>androguard.core.bytecode</code> ), 130
visit_return_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131	(andro- method),	visit_return_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131	(andro- method),	W
visit_return_node() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_return_node() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	while_block_struct() (in module <code>androguard.decompiler.dad.control_flow</code> ), 134
visit_return_void() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_return_void() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	write() (androguard.decompiler.dad.writer.Writer <code>method</code> ), 156
visit_short_circuit_condition() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_short_circuit_condition() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	write_ext() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_statement_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131	(andro- method),	visit_statement_node() <code>guard.decompiler.dad.dast.JSONWriter</code> <code>method</code> ), 131	(andro- method),	write_ind() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_statement_node() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_statement_node() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	write_ind_visit_end() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
visit_super() <code>guard.decompiler.dad.writer.Writer</code> 155	(andro- method),	visit_super() <code>guard.decompiler.dad.writer.Writer</code> 155 <code>method</code> ),	(andro- method),	write_ind_visit_end_ext() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),
				write_inplace_if_possible() <code>guard.decompiler.dad.writer.Writer</code> 156 <code>method</code> ),

156  
write\_inplace\_if\_possible() (in module androguard.decompiler.dad.dast), 132  
write\_method() (androguard.decompiler.dad.writer.Writer method),  
156  
Writer (class in androguard.decompiler.dad.writer),  
154  
writesleb128() (in module androguard.core.bytecodes.dvm), 114  
writeuleb128() (in module androguard.core.bytecodes.dvm), 114

## X

XOR (androguard.decompiler.dad.opcode\_ins.Op attribute), 147  
xorint() (in module androguard.decompiler.dad.opcode\_ins), 153  
xorint2addr() (in module androguard.decompiler.dad.opcode\_ins), 153  
xorintlit16() (in module androguard.decompiler.dad.opcode\_ins), 153  
xorintlit8() (in module androguard.decompiler.dad.opcode\_ins), 153  
xorlong() (in module androguard.decompiler.dad.opcode\_ins), 153  
xorlong2addr() (in module androguard.decompiler.dad.opcode\_ins), 153

## Y

Yellow (androguard.core.androconf.Color attribute),  
125